




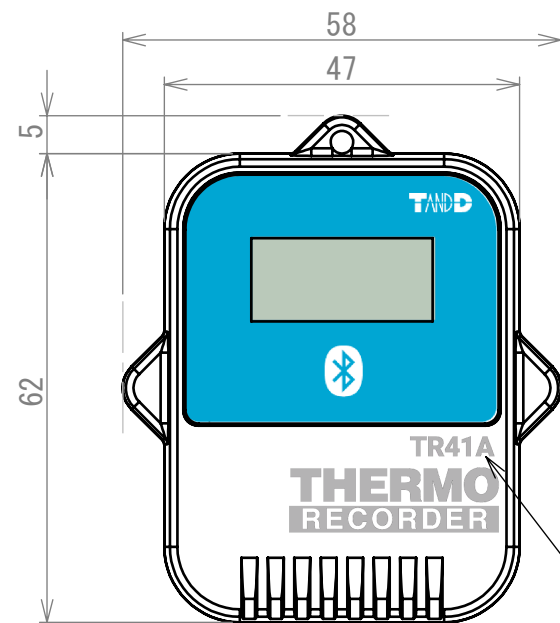


<TR41A>

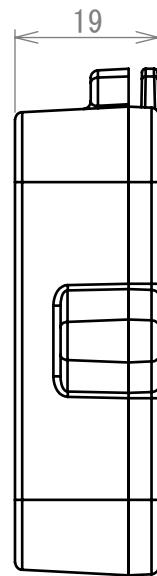


PMN

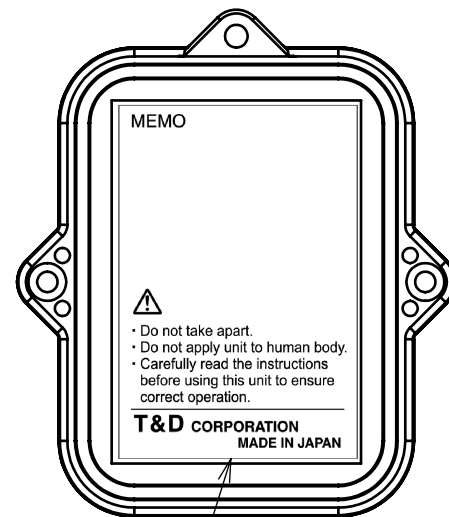


Caution Label

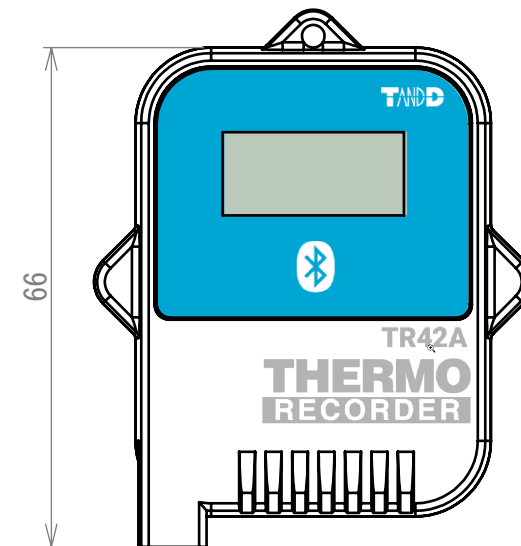

<TR42A>

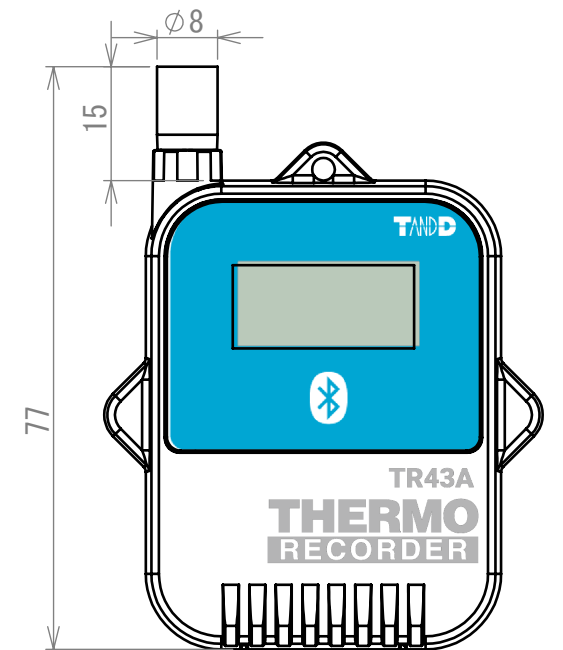

<TR43A>

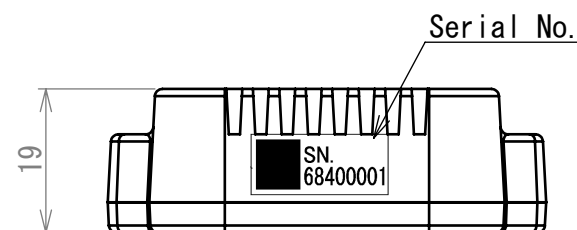


Serial No.

Certification Label

The FCC/ISED certification label is attached inside the battery box. After purchasing the data logger, the user will see this label when inserting the batteries.

HVIN




Tamper-proof Pan Head LR Machine Screw(x2)

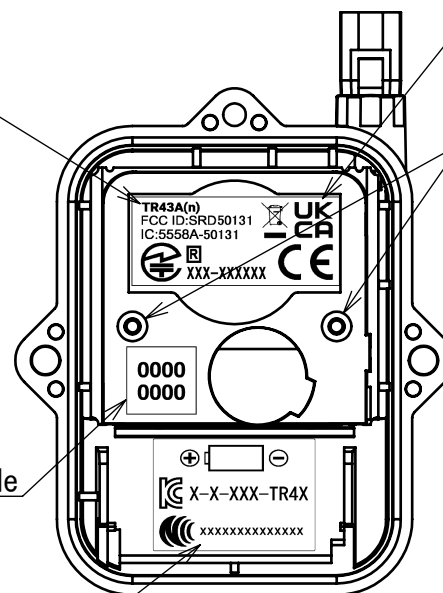

Registration Code

Certification Label

FCC/ISED 4pt

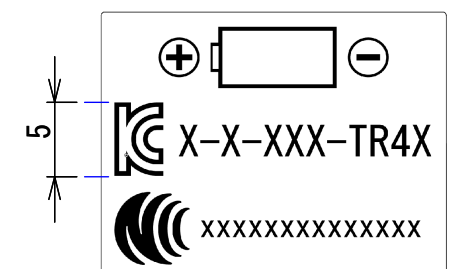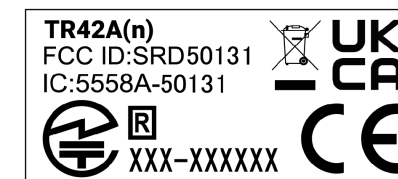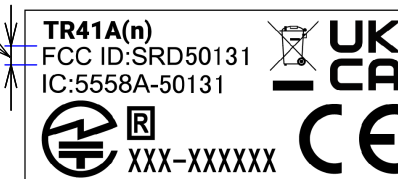

will be replaced by the official certification number after the product is certified

Certification Label Scale(2 : 1)

- Material: PET thickness:0.05mm
- Base: White Text color: Black
- Surface: Laminated

The label cannot be peeled off easily within the product lifetime because:
 • It is laminated.
 • It is attached inside the battery box.
 It makes difficult to contact with any materials or environmental effects.

Material

Upper Case, Lower Case : Polycarbonate

SABIC 「LEXAN EXL9330-WH9A302」 Min.thickness : 1mm

Display Panel : Polycarbonate

TEIJIN KASEI 「Panlite L-1225-Z-100」 Min.thickness : 1.5mm

Doc.No.851-0811-7160

③						材料						処理	
②						公						品名	
①						差							
		24.09.05		担当		00.5630120350							
						0.56301203501000						TR4xA (海外) nRF 外觀図	
内		容				±0.05 ±0.1 ±0.2 ±0.3 ±0.5 ±0.8							
設計		製図		検図		承認		尺数					
福田						株式会社 ティアンドディ 度 1:1 量						製品コード	