

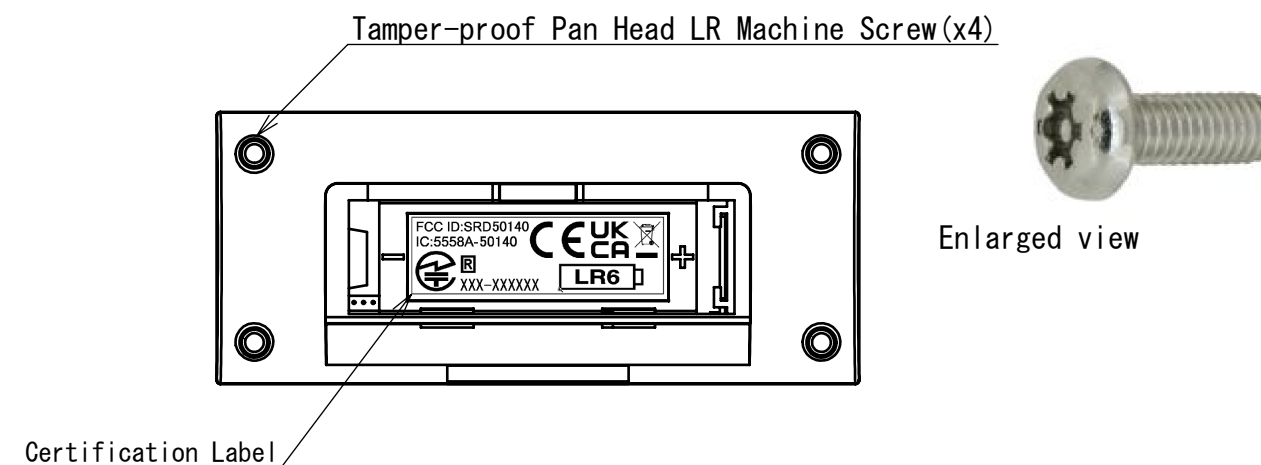

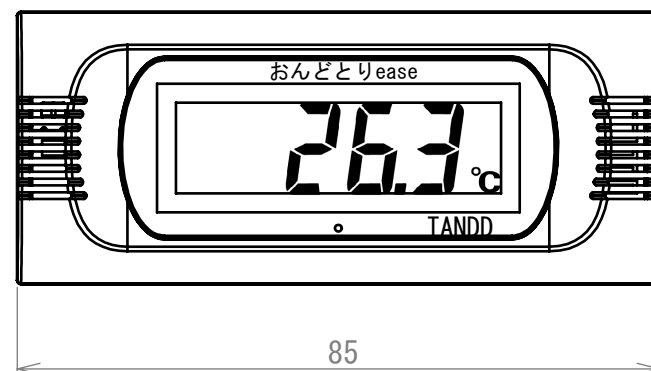


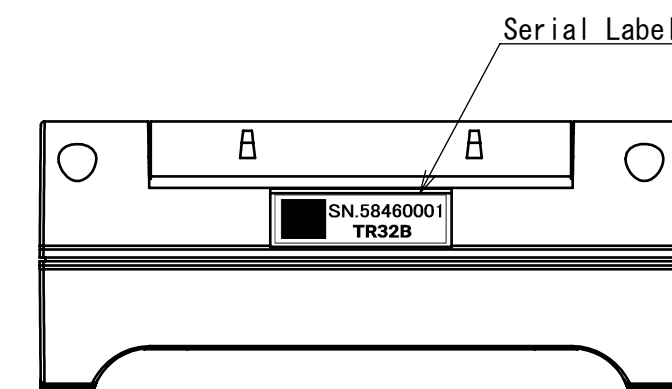

The label is placed in the battery compartment.  
The product is shipped without a battery installed.  
The user will see the label when installing the battery.

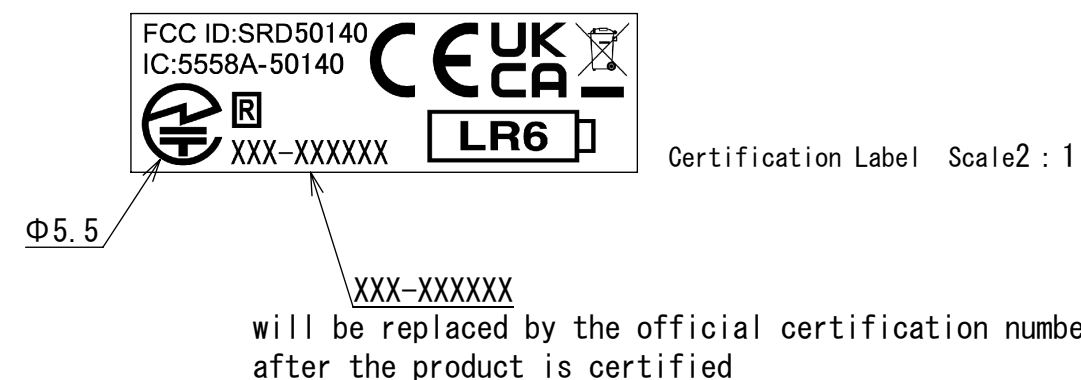

Upper Case,  
Lower Case,  
Battery Cover : Polycarbonate  
(Mitsubishi Chemical Corporation 「Iupilon N5R」 )File No.E41179

• Min.thickness : 1mm

Display Panel : Polycarbonate (AGC 「CARBOGLASS C110C」 )

• Min.thickness : 1mm

Certification Label  
• Material: PET  
• Surface: Laminated  
Durable and does not peel off.

Weight (with Battery) : About 65 g

Unit:mm

| 材料       |    |    |    | 処理                 |  |  |  |
|----------|----|----|----|--------------------|--|--|--|
| 公        |    |    |    | 品名                 |  |  |  |
| 差        |    |    |    | TR32B              |  |  |  |
| 23.03.07 |    |    |    | Appearance Drawing |  |  |  |
| 年月日担当    |    |    |    | 製品コード              |  |  |  |
| 設計       | 製図 | 検図 | 承認 |                    |  |  |  |
| 岡崎       |    |    |    | 株式会社 ティアンドディ       |  |  |  |
|          |    |    |    | 尺 度 1:1            |  |  |  |
|          |    |    |    | 数 量                |  |  |  |