Wonde Proud technology co., Ltd.
21F., No. 100, Sec. 1, Sintal 5th Rd., Sijhih City, Taipei County, Taiwan, R. O. C.

Federal Communications Commission
Authorization and Evaluation Division

Confidentiality Request

FCC ID: SRKWCD100

Pursuant to Sections 0.457 and 0.459 of the Commission's Rules, the Applicant hereby requests confidential treatment of information accompanying this Application as outlined below:

- Schematics
- Block Diagram

The above materials contain trade secrets and proprietary information not customarily released to the public.
The public disclosure of these matters might be harmful to the Applicant and provide unjustified benefits to its competitors.

The Applicant understands that pursuant to Rule 0.457, disclosure of this Application and all accompanying documentation will not be made before the date of the Grant for this application.

Sincerely yours,

Signer / Title
E-mail:

PEP Testing Laboratory
12-3Fl, No. 27-1, Lane 169, Kang-Ning St., Hsi-Chih,
Taipei Hsien, Taiwan, R. O. C.
TEL: 886-2-26922097 FAX: 886-2-26956236

RFI / EMI TEST REPORT

APPLICANT	:	**WONDE PROUD TECHNOLOGY CO., LTD.**
E U T Type	:	**Bluetooth GPS Camera Detect**
MODEL NO.	:	**GPS CD-100**
FCC ID	:	**SRKWCD100**
REGULATION	:	CFR 47 , Part 15 Subpart C , **Class B**
TEST SITE	:	PEP Testing Laboratory
TEST ENGINEER	:	**JASON KUNG**
TEST DATE	:	APR. 25, 2006
ISSUED DATE	:	MAY 17, 2006
REPORT NO.	:	E950214

VERIFICATION

WE HEREBY VERIFY THAT:

The EUT listed below has completed RFI testing by PEP Testing Laboratory and it does comply with the limitation of FCC Part 15, Section 15.247 limitations .

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63 . 4 - 2003 .

Any data in this RFI report is " **reference** " only .

APPLICANT : WONDE PROUD TECHNOLOGY CO., LTD.
PRODUCT : Bluetooth GPS Camera Detect
FCC ID : SRKWCD100
MODEL : GPS CD-100

M. Y. TSUI / President

PEP Testing Laboratory
12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,
Hsi-Chi, Taipei Hsien, Taiwan, R. O. C.
TEL : 886-2-6922097 FAX : 886-2-6956236

TABLE OF CONTENTS

I. GENERAL INFORMATION 5
- 1.1 Description of EUT
- 1.2 Supporting Devices for EUT testing
- 1.3 EUT Test Setup Configuration
- 1.4 Channels Verification (15.205)

II. §15.207 POWER LINE CONDUCTED EMISSION TEST 11
- 2.1 Testing Description
- 2.2 Software Using
- 2.3 Test Result
- 2.4 Conducted Emission Test Photo

III. §15.247(a)(1): HOPPINGCHANNEL FREQUENCY SEPARATION 15
- 3.1 Test Procedure
- 3.2 Test result of Frequency Separation
- 3.3 Spectrum Plot Data

IV. §15.247(a)(1) : 20dB BANDWIDTH 16
- 4.1 Test Procedure
- 4.2 Test Result of Bandwidth
- 4.3 Spectrum Plot Data

V. §15.247(a) (1): TIME OF OCCUPANCY(DWELL TIME) 23
- 5.1 Test Procedure
- 5.2 Test Result of Dwell Time
- 5.3 Spectrum Plot Data

VI §15.247(b) : THE MAXIMUM PEAK OUTPUT POWER (≦ 1WATT) 25
- 6.1 Testing Description
- 6.2 Software Using
- 6.3 Test Result of Fundamental Emissions

VII. §15.247(b)(4) MAXIMUM PERMISSIBLE EXPOSURE (MPE) 33
- 7.1 MPE distance calculation
- 7.2 Device operating configurations exposure conditions
- 7.3 Maximum Permissible Exposure (MPE)

Ⅷ. §15.247(c) : SPURIOUS RADIATED EMISSIONS 35
8.1 Out side band below 1GHz
8.2 Out side band above 1GHz
8.2 Spurious Radiate Emission Testing Photos

Ⅸ. §15.247(c) : BAND-EDGES COMPLIANCE 40

Ⅹ. §15.247(d) : PEAK POWER SPECTRAL DENSITY 44
10.1 Test Procedure
10.2 Test result of Peak Power Spectral Density
10.3 Spectrum Plot Data

XI. LIST OF TEST INSTRUMENTS 48

XII. EUT PHOTOS 49

Ⅰ. General Information

The equipment under test (EUT) is Bluetooth GPS Camera Detect, FCC ID SRKWCD100, model GPS CD-100. The EUT is designed for the applications such as car navigation purpose. The working frequencies for EUT transmitter and receiver functions are 2.4GHz and 1.575GHz respectively. 3.7V lithium battery or 5.3Vdc from external adaptor or via USB interface is required to operate EUT. For more detail specification about EUT, please refer to the user's manual.

Test method: According to the major function designed, the test was respectively carried out on the operational condition of Tx-On mode: continuous transmission state that was supplied by power adaptor (listed as Bluetooth mode) and PC USB port (listed as USB mode). The worst-case test result of each test mode was recorded and provided in this report.

At the frequencies where the peak values of the emission exceeded the quasi-peak limit, the emissions were also measured with the quasi-peak detectors. The average detector also measured the emission either (A) quasi-peak values were under quasi-peak limit but exceeded average limit, or (B) peak values were under quasi-peak limit but exceeded average limit.

1.1 Description of EUT

EUT Type : Bluetooth GPS Camera Detect
FCC ID : SRKWCD100
EUT Model No. : GPS CD-100

Frequency Range : 2.402～2.480GHz
Support Channel : 79 channels
Modulation : QBSK
Antenna Type : Comply with FCC Part 15, Section 15.203;
Build-in PCB trace type, can't be removed by the user
Power Supply : 1) Manufacturer : DVE
Model No. : DSA-0051-05C FUS 53050F
Input : AC 100~240V, 0.2A
Output : DC 5.3V, 0.5A

Power Cord : N/A

1.2 Supporting Devices for EUT testing

1. Personal Computer (PC3)

CPU : Intel P4 Socket 478 1.6GHz
FCC ID： Declaration of Conformity(DoC)
Manufacturer： LEMEL
Model Number： LMIH1A2
Power Supply： Switching
Power Cord： Non-Shielded, Detachable, 1.8m
Data Cable： N/A

2. Keyboard (KBS1 PS/2)

FCC ID： E5XKB5121WTH0110
Manufacturer： BTC
Model Number： 5121W
Power Supply： +5Vdc from PS2 of PC
Power Cord： N/A
Data Cable： **1 >** Shielded , Non-detachable,1.6m
2 > Back Shell : Metal

3. Monitor (MON1 15”)

FCC ID： Declaration of Conformity(DoC)
Manufacturer： SAMSUNG
Model Number： 550S
Power Supply： Switching
Power Cord： Non-Shielded, Detachable, 1.8m
Data Cable： **1 >** Shielded , Non-detachable,1.2m
2 > Back Shell : Metal

4. Printer (PRN1)

FCC ID： B94C2642X
Manufacturer： Hewlett-Packard
Model Number： C2642E
Power Supply： Linear, 30Vdc O/P
Power Cable： Non-Shielded , Detachable,1.8m
Data Cable： **1 >** Shielded , Detachable,1.2m
2 > Back Shell : Metal

5. Modem (MOD1)

FCC ID：IFAXDM1414
Manufacturer：ACEEX
Model Number：1414
Power Supply：Linear, 9Vac O/P
Power Cable：Non-Shielded , Detachable,1.7m
Data Cable：**1 >** Shielded , Detachable,1m
2 > Back Shell : Metal

6. Mouse (MOUS/1 PS/2)

FCC ID：DZL211106
Manufacturer：LOGITECH
Model Number：M-S43
Power Supply：+5Vdc from PS2 of PC
Power Cord：N/A
Data Cable：**1 >** Shielded , Non-detachable,1.8m
2 > Back Shell : Metal

7. DUNGLE

Manufacturer：Bluetooth-SIG. Inc, USA
Model Number：UBTCR3C1E-N

1.3 EUT Test Setup Configuration

(A)Test Procedure: As required by ANSI C63.4 (2003)

(B)Channel Verification: In order to force selection of the typical channels for testing, Dungle was connected PC through USB interface and using the driver "CSR BlueSuite", under WinXP to force the channel selection by control PC, then set the EUT in high power and continuously transmitting mode for detecting the operating frequency, the test result for 79 channels is operating within 2.402～2.480GHz band.

(C)Measurement Procedure: As required by FCC Part15, Section 15.31(m) measurements on intentional radiators or receiver should be performed at three frequencies for operating frequency over 10MHz, one near top, one near middle and one near bottom.

(D)Test Channel: Due to the support channels are 79 channels, the selected three frequencies for testing would be 2.402GHz near top for CH LOW, 2.441GHz near middle for CH MID and 2.480GHz near bottom for CH HIGH.

(E) At the frequencies where the peak values of the emission exceeded the quasi-peak limit, the emissions were also measured with the quasi-peak detectors. The average detector also measured the emission either (a) quasi-peak values were under quasi-peak limit but exceeded average limit, or (b) peak values were under quasi-peak limit but exceeded average limit.

(F) In this RFI test report, we provided the worst case conducted emission test data and radiated emission test data. The entire testing data was recorded and provided in this report.

1.4 Channels Verification

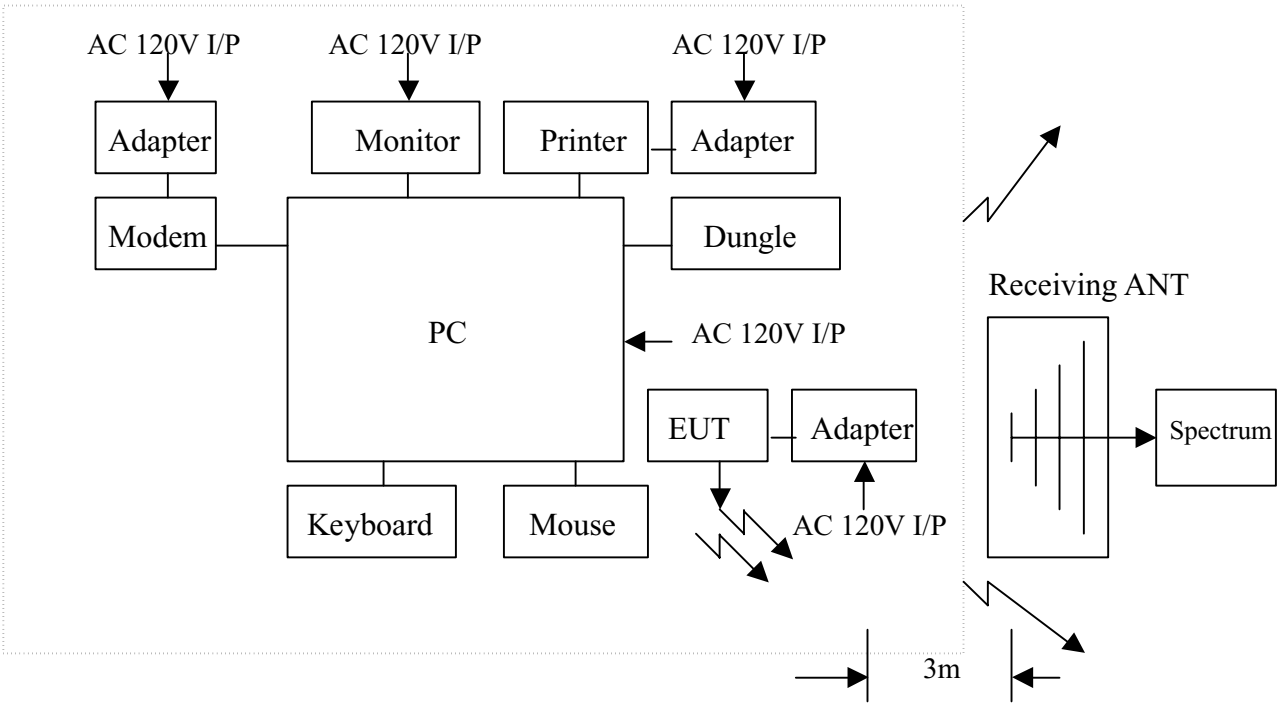

a. EUT Type：Bluetooth GPS Camera Detect

b. EUT Model：GPS CD-100

c. TX Channel No.：79

Channel 01: 2402 MHz	**Channel 28: 2429 MHz**	**Channel 55: 2456 MHz**
Channel 02: 2403 MHz	**Channel 29: 2430 MHz**	**Channel 56: 2457 MHz**
Channel 03: 2404 MHz	**Channel 30: 2431 MHz**	**Channel 57: 2458 MHz**
Channel 04: 2405 MHz	**Channel 31: 2432 MHz**	**Channel 58: 2459 MHz**
Channel 05: 2406 MHz	**Channel 32: 2433 MHz**	**Channel 59: 2460 MHz**
Channel 06: 2407 MHz	**Channel 33: 2434 MHz**	**Channel 60: 2461 MHz**
Channel 07: 2408 MHz	**Channel 34: 2435 MHz**	**Channel 61: 2462 MHz**
Channel 08: 2409 MHz	**Channel 35: 2436 MHz**	**Channel 62: 2463 MHz**
Channel 09: 2410 MHz	**Channel 36: 2437 MHz**	**Channel 63: 2464 MHz**
Channel 10: 2411 MHz	**Channel 37: 2438 MHz**	**Channel 64: 2465 MHz**
Channel 11: 2412 MHz	**Channel 38: 2439 MHz**	**Channel 65: 2466 MHz**
Channel 12: 2413 MHz	**Channel 39: 2440 MHz**	**Channel 66: 2467 MHz**
Channel 13: 2414 MHz	**Channel 40: 2441 MHz**	**Channel 67: 2468 MHz**
Channel 14: 2415 MHz	**Channel 41: 2442 MHz**	**Channel 68: 2469 MHz**
Channel 15: 2416 MHz	**Channel 42: 2443 MHz**	**Channel 69: 2470 MHz**
Channel 16: 2417 MHz	**Channel 43: 2444 MHz**	**Channel 70: 2471 MHz**
Channel 17: 2418 MHz	**Channel 44: 2445 MHz**	**Channel 71: 2472 MHz**
Channel 18: 2419 MHz	**Channel 45: 2446 MHz**	**Channel 72: 2473 MHz**
Channel 19: 2420 MHz	**Channel 46: 2447 MHz**	**Channel 73: 2474 MHz**
Channel 20: 2421 MHz	**Channel 47: 2448 MHz**	**Channel 74: 2475 MHz**
Channel 21: 2422 MHz	**Channel 48: 2449 MHz**	**Channel 75: 2476 MHz**
Channel 22: 2423 MHz	**Channel 49: 2450 MHz**	**Channel 76: 2477 MHz**
Channel 23: 2424 MHz	**Channel 50: 2451 MHz**	**Channel 77: 2478 MHz**
Channel 24: 2425 MHz	**Channel 51: 2452 MHz**	**Channel 78: 2479 MHz**
Channel 25: 2426 MHz	**Channel 52: 2453 MHz**	**Channel 79: 2480 MHz**
Channel 26: 2427 MHz	**Channel 53: 2454 MHz**	
Channel 27: 2428 MHz	**Channel 54: 2455 MHz**	

Frequency Range : 2.402 GHz to 2.480 GHz

Note :

1. All channels located in the frequency range as below :

2.4 GHz --- 2.4835 GHz ☑ Yes ☐ No

Typical Channel for testing :

Channel	Channel Number	Frequency (GHz)
LOW	1	2.402
MID	40	2.441
HIGH	79	2.480

Ⅱ. 15.207 Power Line Conducted Emission Test

2.1 Testing Description

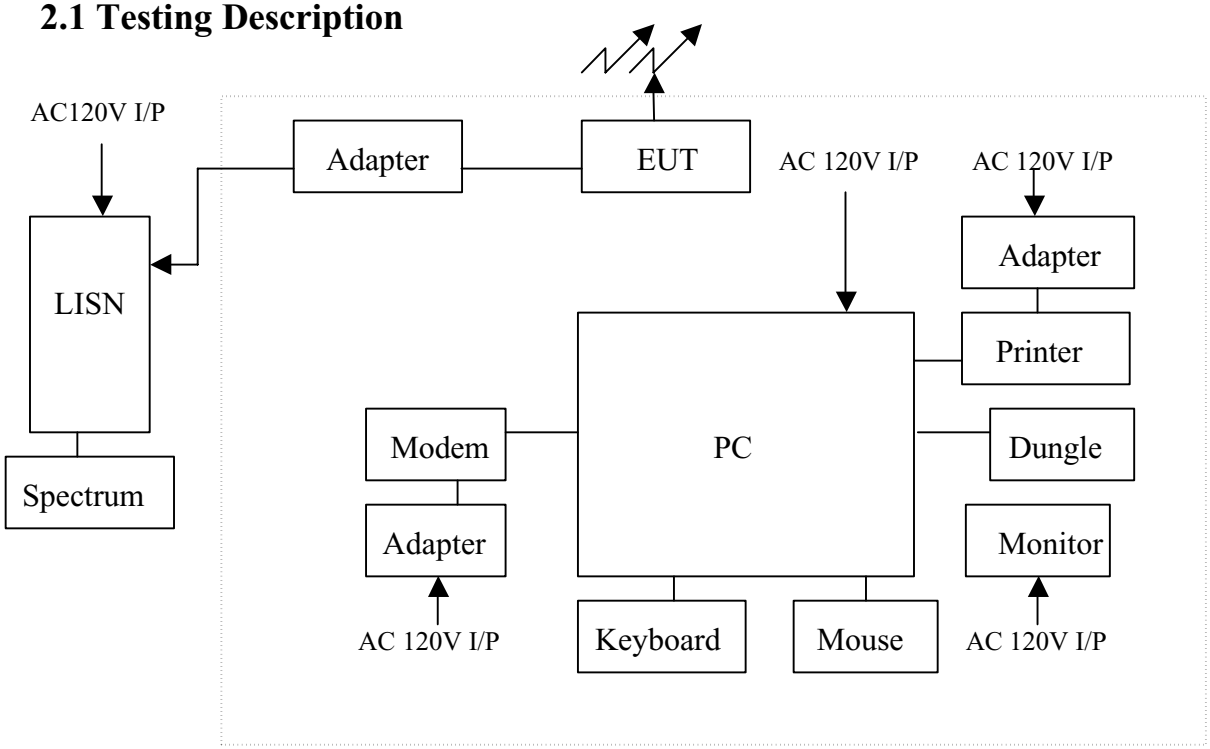

2.2 Software Using

The driver of "CSR BlueSuite" is used to select the support channel as mentioned on section 1.3 (b) listed above

2.3 Test Result

EUT Model No. GPS CD-100 (LINE)

Detector : Peak Value

暐鑫科技股份有限公司
PEP Testing Laboratory

Data#: 75 File#: EN55022-B(QP).EMI Date: 2006-04-25 Time: 18:24:43

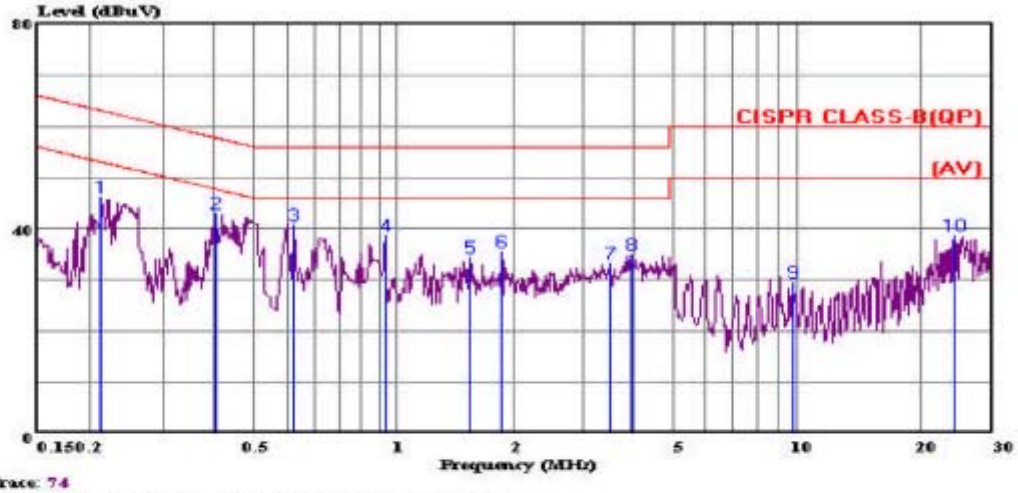

Trace: 74
Site : Shih-Chi : Conduction No.1(Jason)
Condition: CISPR CLASS-B(QP) LISN.L(16A) LINE
eut : E950214
power : AC 230V 50HZ
memo : Peak Value
: Final Test
: BT MODE

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.214	46.05	-17.00	63.05	45.82	0.10	0.13	
2	0.402	43.09	-14.72	57.81	42.89	0.10	0.10	
3	0.621	40.68	-15.32	56.00	40.48	0.10	0.10	
4	1.032	38.70	-17.30	56.00	38.40	0.10	0.20	
5	1.645	34.35	-21.65	56.00	34.05	0.10	0.20	
6	1.970	35.58	-20.42	56.00	35.28	0.10	0.20	
7	3.603	33.17	-22.83	56.00	32.81	0.10	0.26	
8	4.027	34.85	-21.15	56.00	34.45	0.10	0.30	
9	9.913	29.39	-30.61	60.00	28.79	0.30	0.30	
10	24.400	38.69	-21.31	60.00	37.51	0.78	0.40	

EUT Model No.: GPS CD-100 (NEUTRAL)

Detector : Peak Value

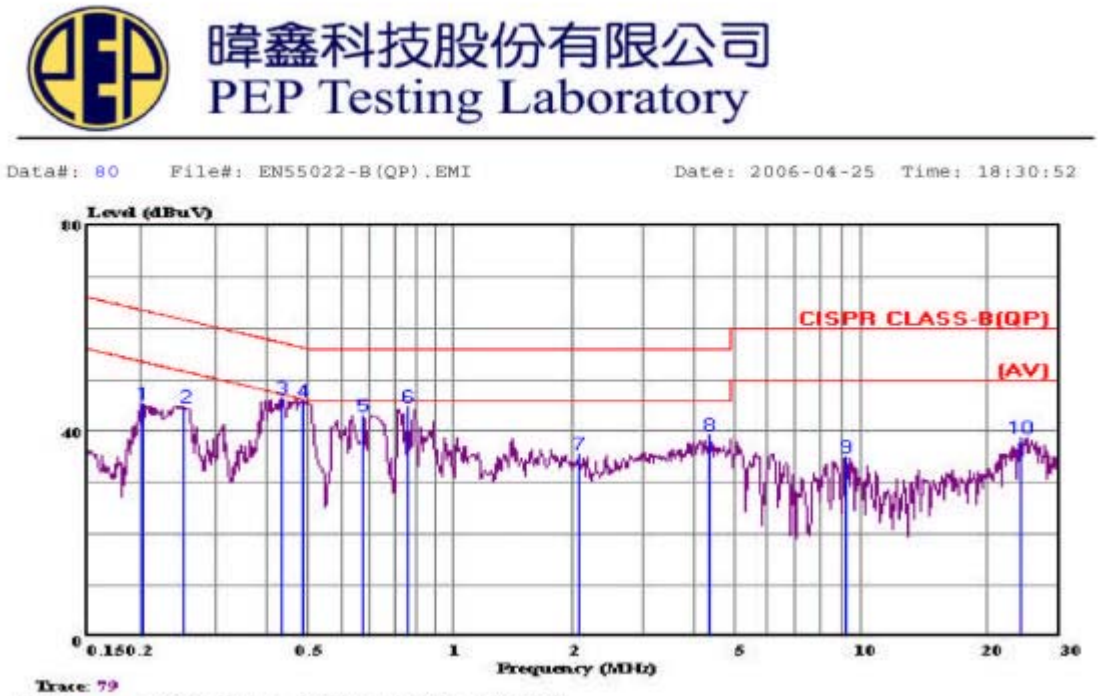

Trace: 79
Site : Shih-Chi : Conduction No.1(Jason)
Condition: CISPR CLASS-B(QP) LISN.N(16A) NEUTRAL
eut : E950214
power : AC 230V 50HZ
memo : Peak Value
: Final Test
: BT MODE

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.203	45.39	-18.10	63.49	45.18	0.10	0.11	
2	0.255	44.80	-16.80	61.60	44.51	0.10	0.19	
3	0.435	46.33	-10.82	57.15	46.13	0.10	0.10	
4	0.486	45.98	-10.25	56.23	45.70	0.10	0.18	
5	0.675	43.09	-12.91	56.00	42.89	0.10	0.10	
6	0.857	44.62	-11.38	56.00	44.37	0.10	0.15	
7	2.178	35.46	-20.54	56.00	35.16	0.10	0.20	
8	4.454	39.20	-16.80	56.00	38.78	0.12	0.30	
9	9.401	34.98	-25.02	60.00	34.40	0.28	0.30	
10	24.271	38.74	-21.26	60.00	37.75	0.59	0.40	

2.4 Conducted Emission Test Photo

EUT Model No. GPS CD-100

< FRONT VIEW >

Ⅲ. §15.247(a)(1) : Hopping Channel Frequency Separation

3.1 Test Procedure

(1)The Hopping Channel Frequency Separation was measured in max hold analyzer mode with span wide enough to capture the peaks of two adjacent channels.

(2)Set the Spectrum as RBW=VBW=100KHz

(3) 3.3 Spectrum Plot Data show the Frequency Separation test results.

3.2 Test result of Frequency Separation

	Measured Separation (KHz)	Limit (KHz)	Pass/Fail
Channel Separation	**990**	**25**	**Pass**
Separation at -20dB	**720**	**25**	**Pass**

3.3 Spectrum Plot Data

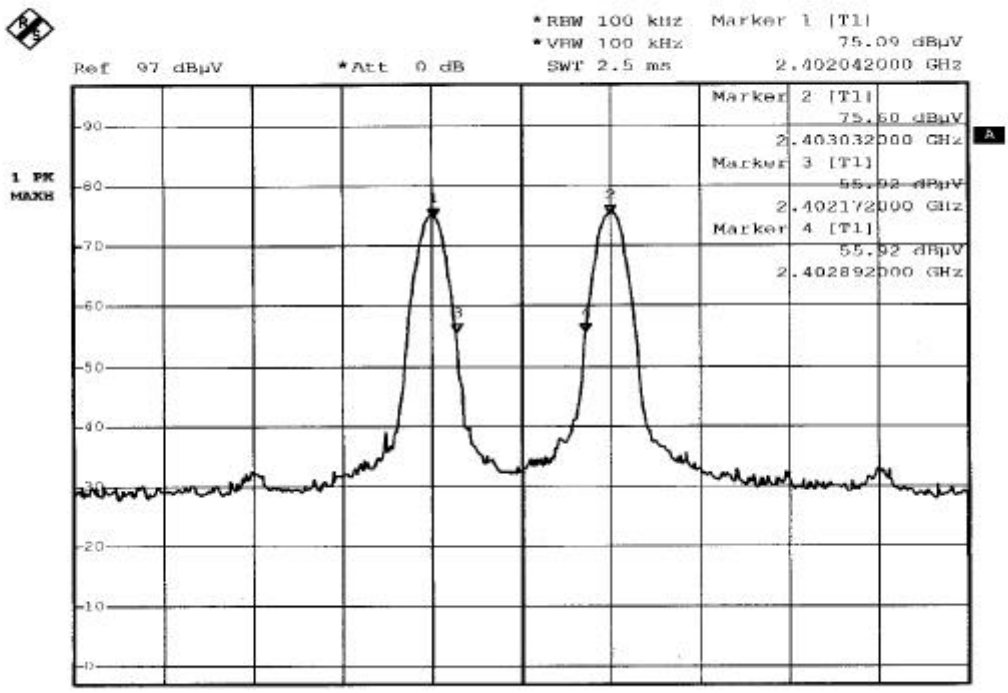

Ⅳ. §15.247(a)(1) : 20dB Bandwidth

4.1 Test Procedure

(1)The 20dB bandwidth was measured at the EUT antenna terminal in max hold analyzer mode with span wide enough to capture the hopping channel emissions.

(2)Set the Spectrum as RBW=VBW=10KHz

(3) 4.2 Spectrum Plot Data show the 20dB Bandwidth test results.

4.2 Test result of Bandwidth

EUT Model No. GPS CD-100

Channel	Antenna Polarity	Bandwidth (KHz)	Limit (KHz)	Pass/Fail
LOW	H	40	1000	Pass
	V	37	1000	Pass
MID	H	41	1000	Pass
	V	38	1000	Pass
HIGH	H	39	1000	Pass
	V	36	1000	Pass

4.3 Spectrum Plot Data

Channel : CH LOW

Polarity : Horizontal

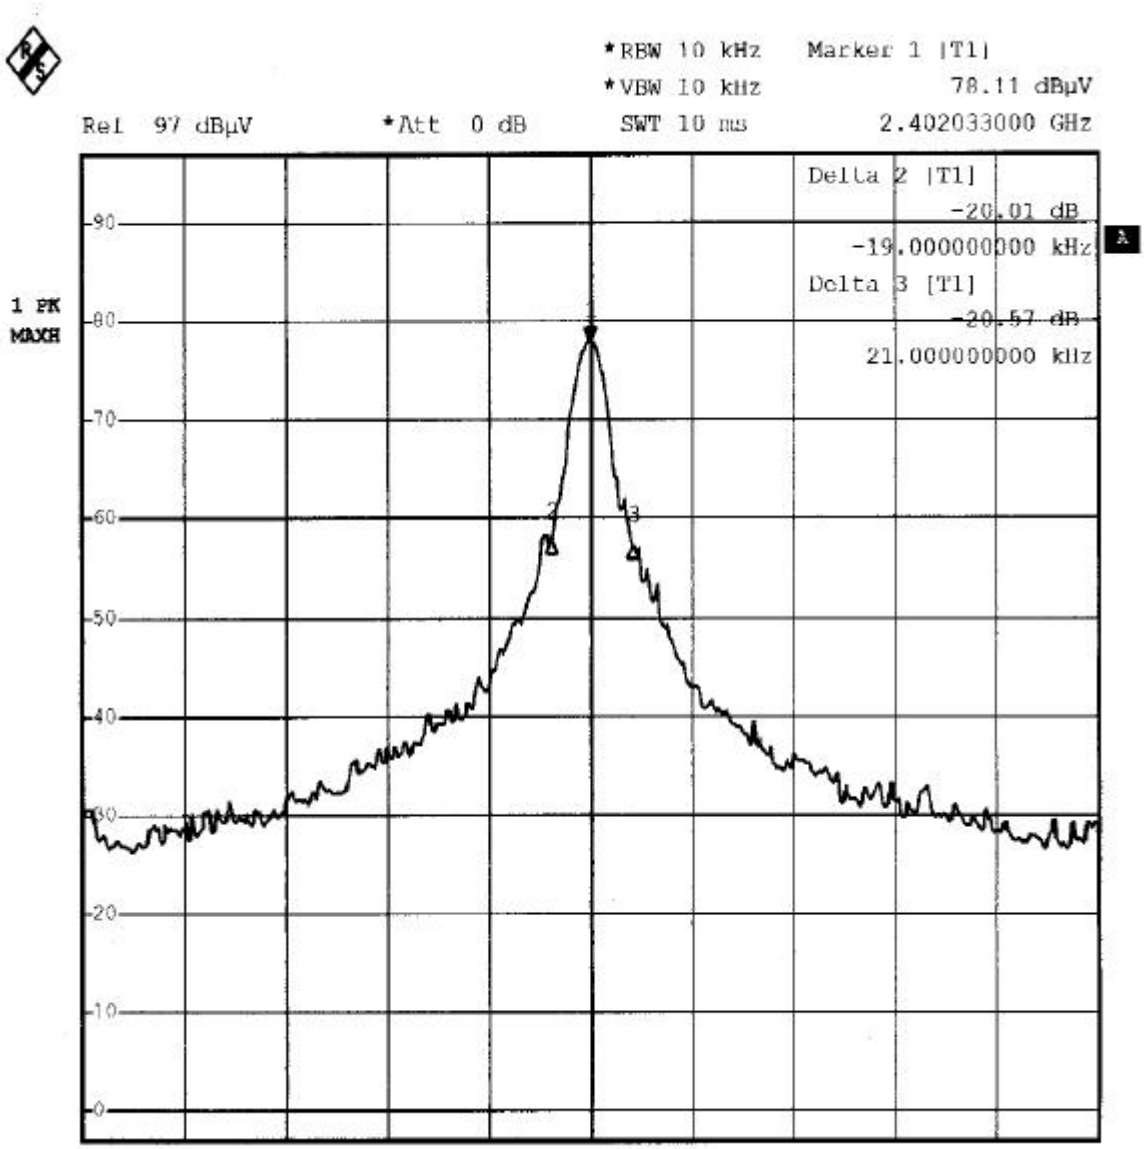

Channel : CH LOW

Polarity : Vertical

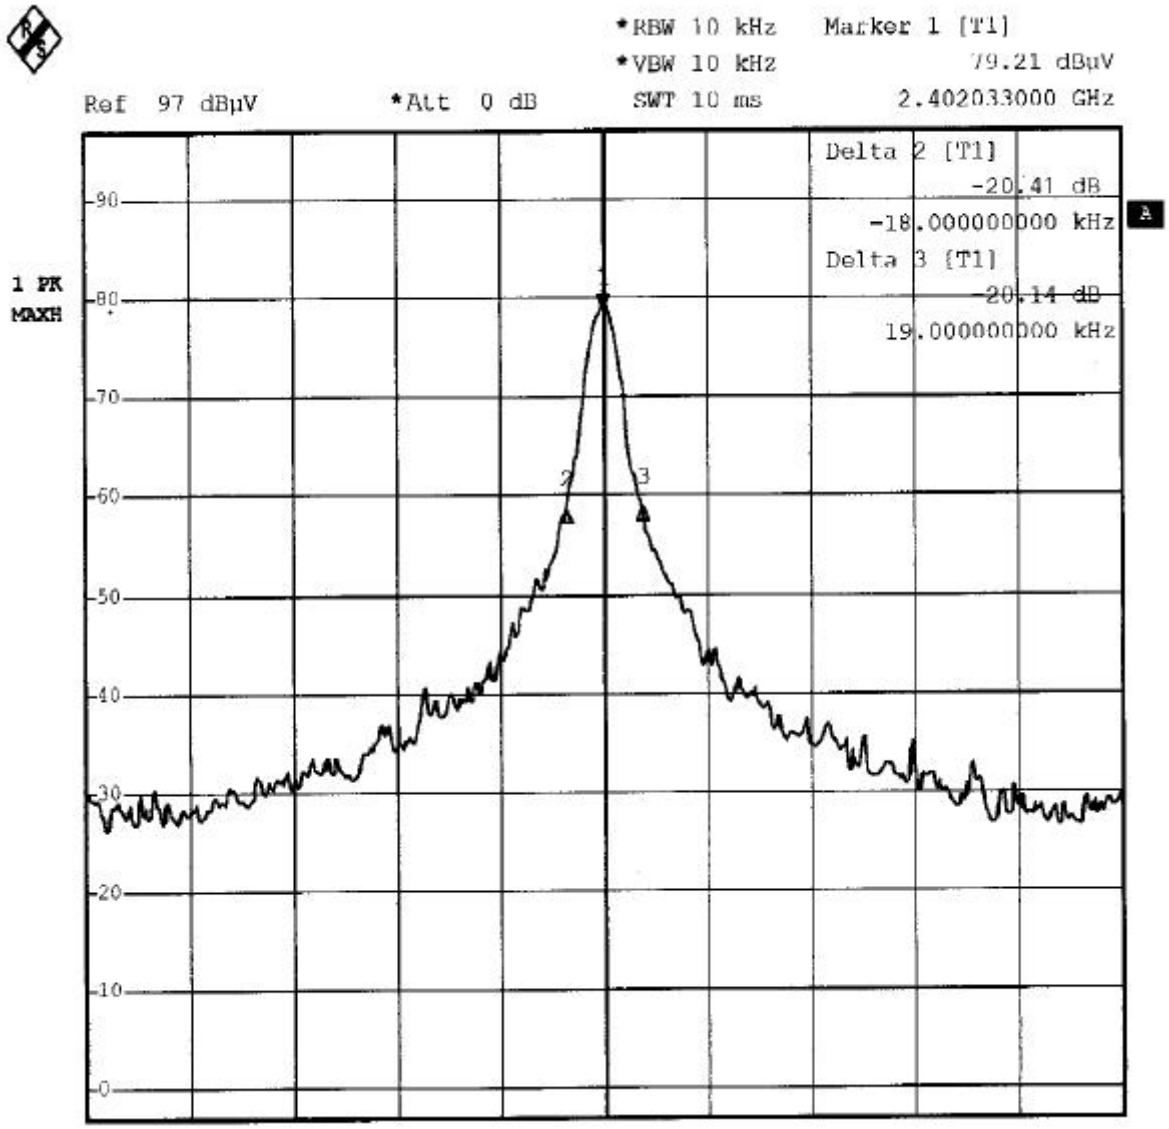

Channel : CH MID

Polarity : Horizontal

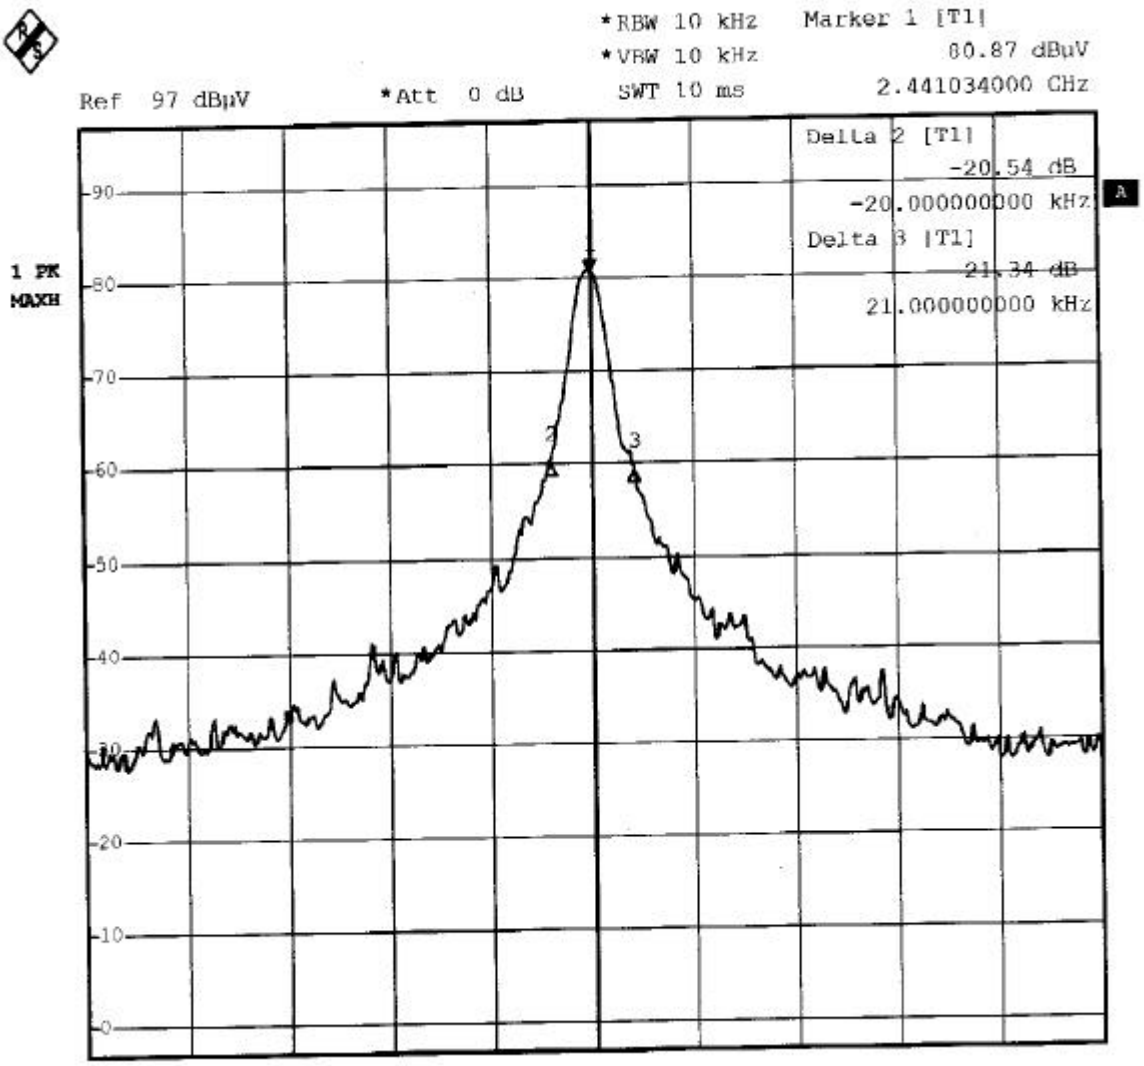

Channel : CH MID

Polarity : Vertical

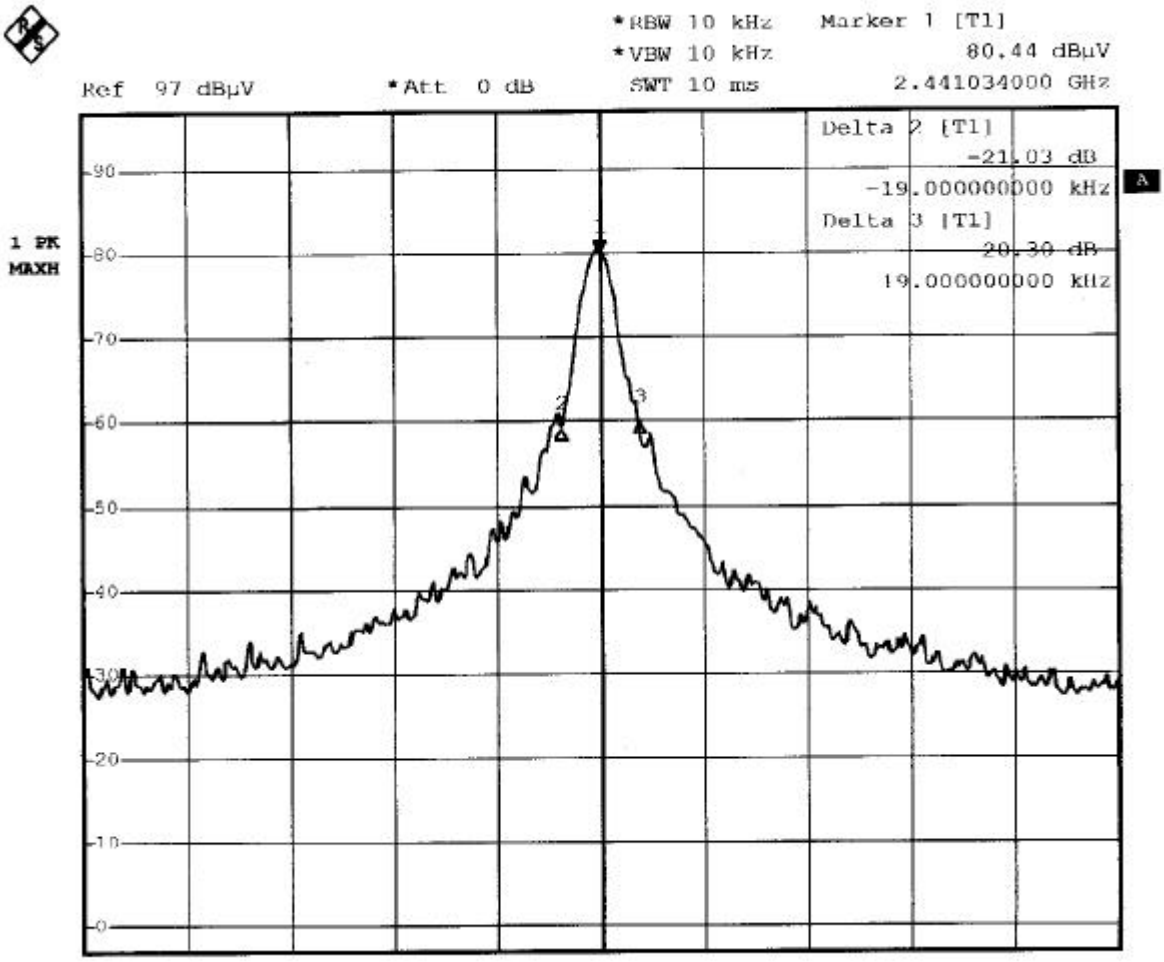

Channel : CH HIGH

Polarity : Horizontal

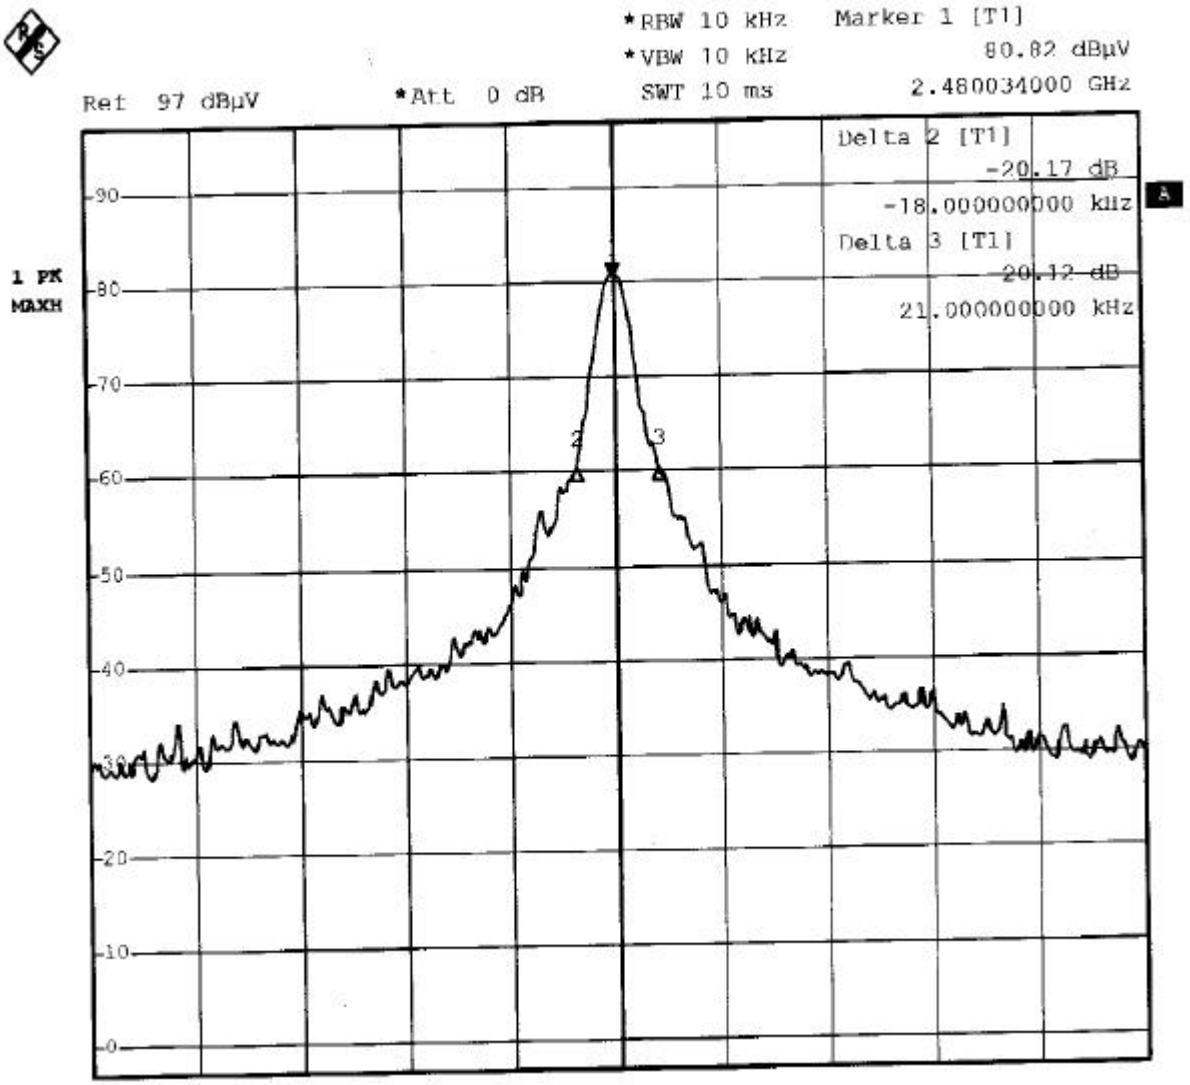

Channel : CH HIGH

Polarity : Vertical

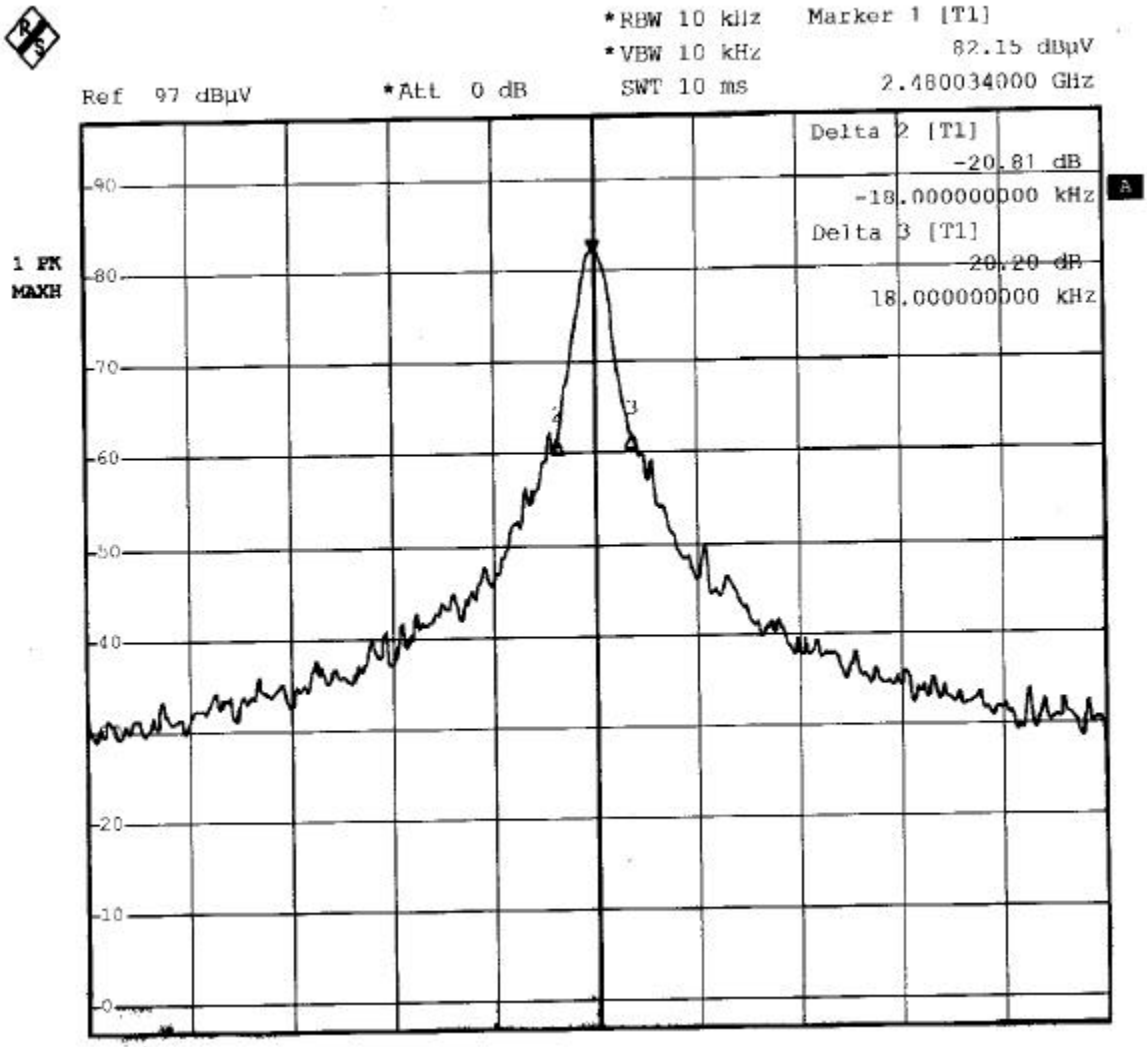

V. §15.247(a) (1): Time of Occupancy(Dwell Time)

5.1 Test Procedure

(1)The Time of Occupancy was measured in "max hold" analyzer mode with zero span and different sweep time to calculate the Time of Occupancy.

(2)Set the Spectrum as RBW=VBW=1MHz

(3)5.3 Spectrum Plot Data show the Time of Occupancy test results.

5.2 Test Result of Dwell Time

Dwell Time= 0.42*80= 33.6ms < 0.4s

5.3 Spectrum Plot Data

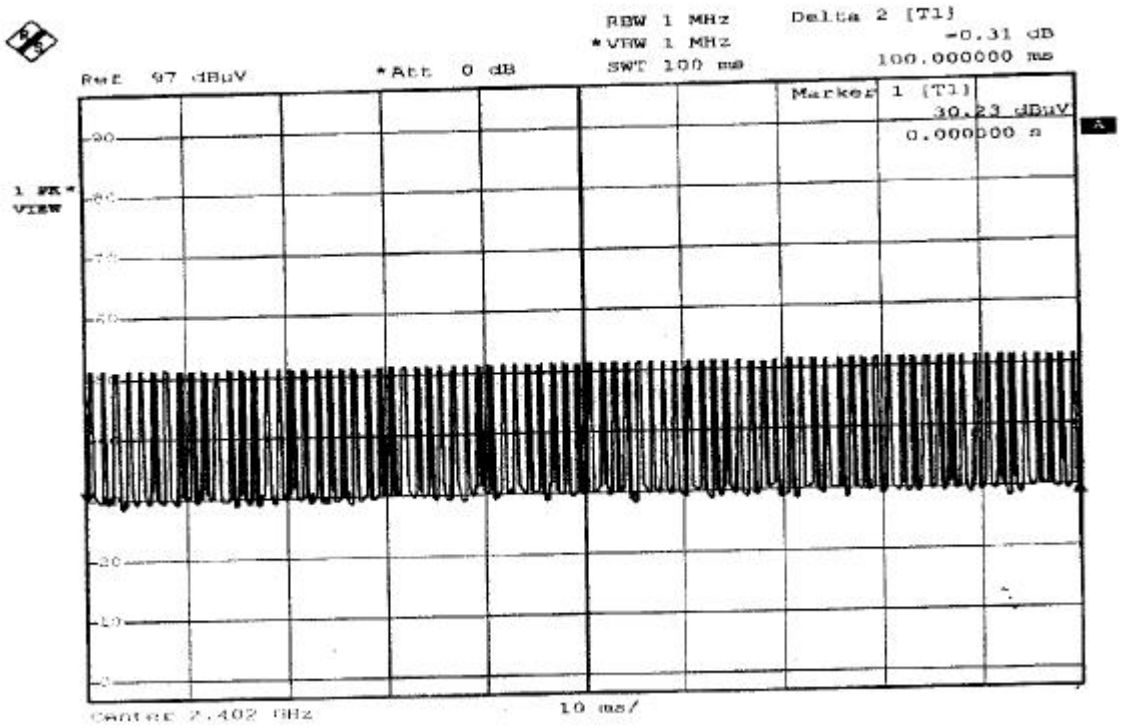

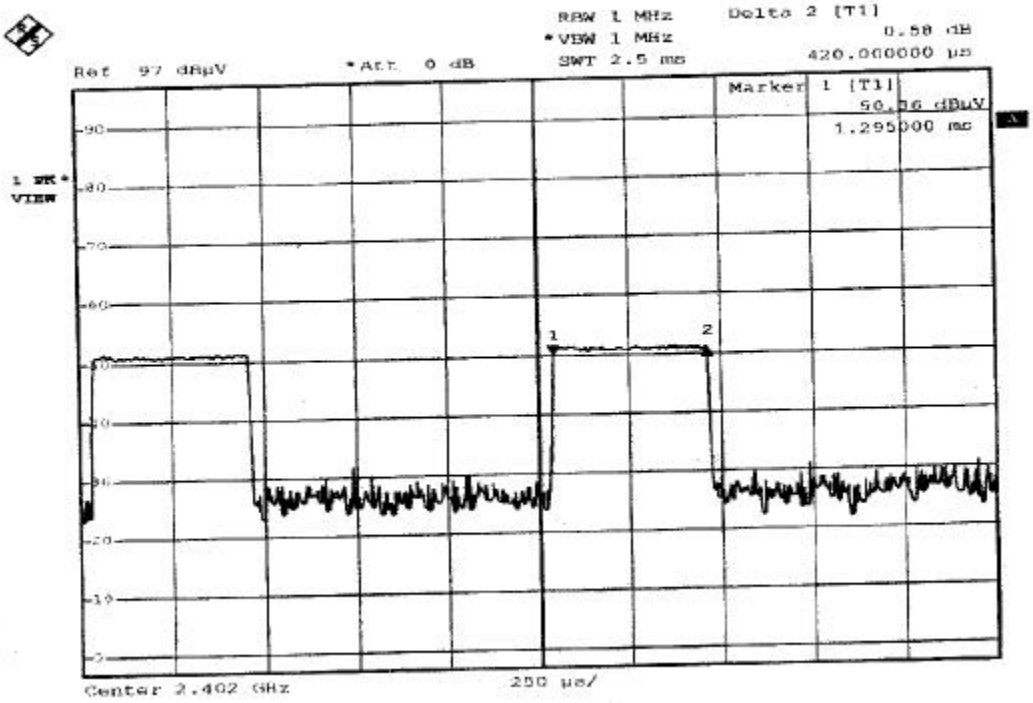

Ⅵ. §15.247(b) : The maximum peak output power (≦ 1watt)

6.1 Testing Description

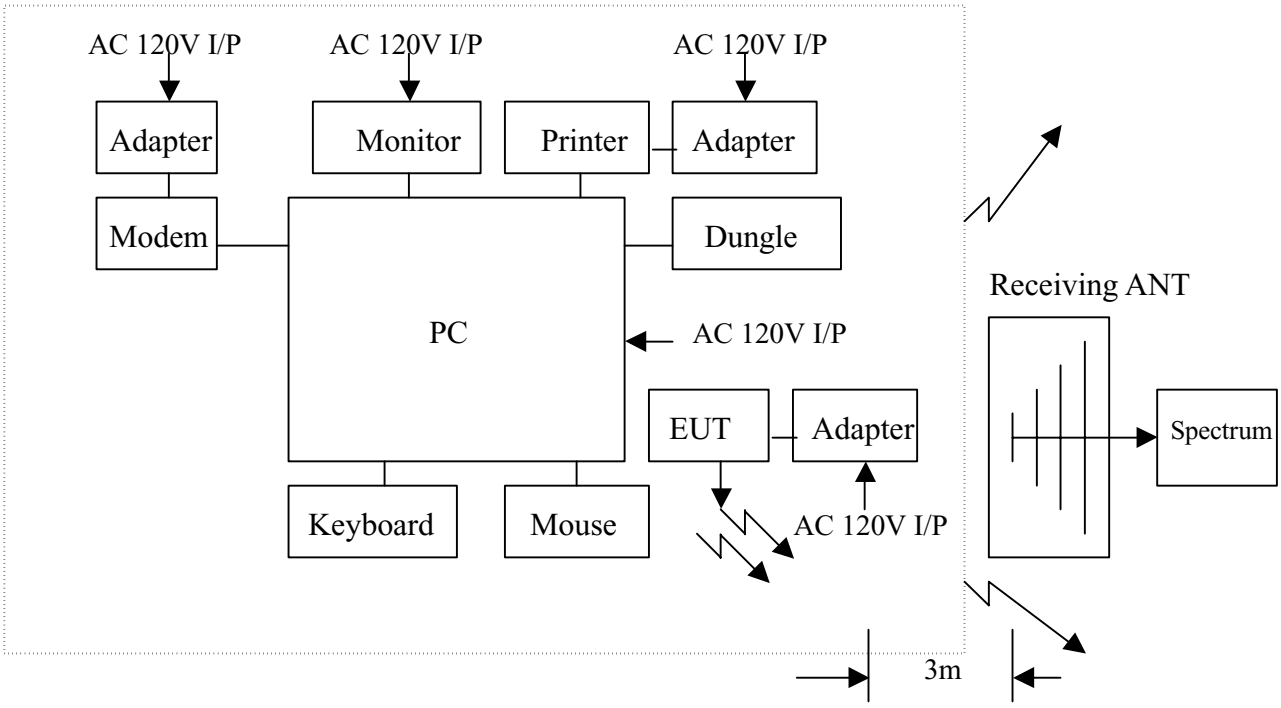

Three channels were tested : CH LOW, CH MID AND CH HIGH Measurements were taken by using both horizontal and vertical antenna polarization, and the antenna was raised and lowered from one to four meters to find the worst emission levels.

6.2 Software Using

The driver of "CSR BlueSuite" is used to select the support channel as mentioned on section 1.3 (b) listed above

6.3 Test Result of Fundamental Emissions

EUT Model No. GPS CD-100

Channel	Frequency (MHz)	Antenna Polarity (H/V)	Level (dBuV/m)	E.I.R.P. (W)
LOW	2402.02	H	76.31	$1.28*10^{-5}$
	2402.08	V	76.26	$1.27*10^{-5}$
MID	2440.98	H	77.58	$1.72*10^{-5}$
	2441.04	V	78.69	$2.22*10^{-5}$
HIGH	2480.08	H	78.76	$2.25*10^{-5}$
	2480.02	V	80.57	$3.42*10^{-5}$

Note :

1. Level means emission amplitude = S.P. + C.F. + duty cycle factor
2. Conducted output power : $P = (E\ d)^2 / 30G$

   where E (V) = Level (V)

   d (m) = measurement distance = 3m

   G = 1 (the gain of the transmitting antenna over isotropic antenna)

   P = E.I.R.P.
3. Example :

   If Level = 120 dBuV/m

   $10^{(120/20)} \times 10^{-6} = 1$ V

   E.I.R.P. = $(1 \times 3)^2 / 30 = 300$ mW

EUT Model No. GPS CD-100

Channel : CH LOW

Polarity : Horizontal

暐鑫科技股份有限公司
PEP Testing Laboratory

Data#: 5 File#: C:\tmp\客戶\旺普.EMI

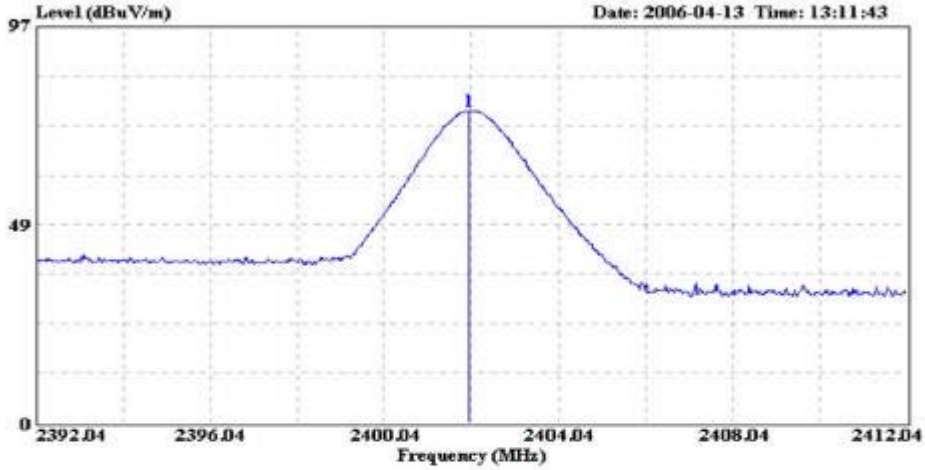

Site : Shih-Chi : Chamber No.1
Condition : 3m HORN.3H HORIZONTAL
EUT : E950214
Power : AC 120V 60Hz
Memo : TX ON
Memo : LOW

	Freq	Level	Over Limit	Limit Line	Read Level	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	2402.000	76.42	------	------	78.53	-2.11

-1-

Channel : CH LOW

Polarity : Vertical

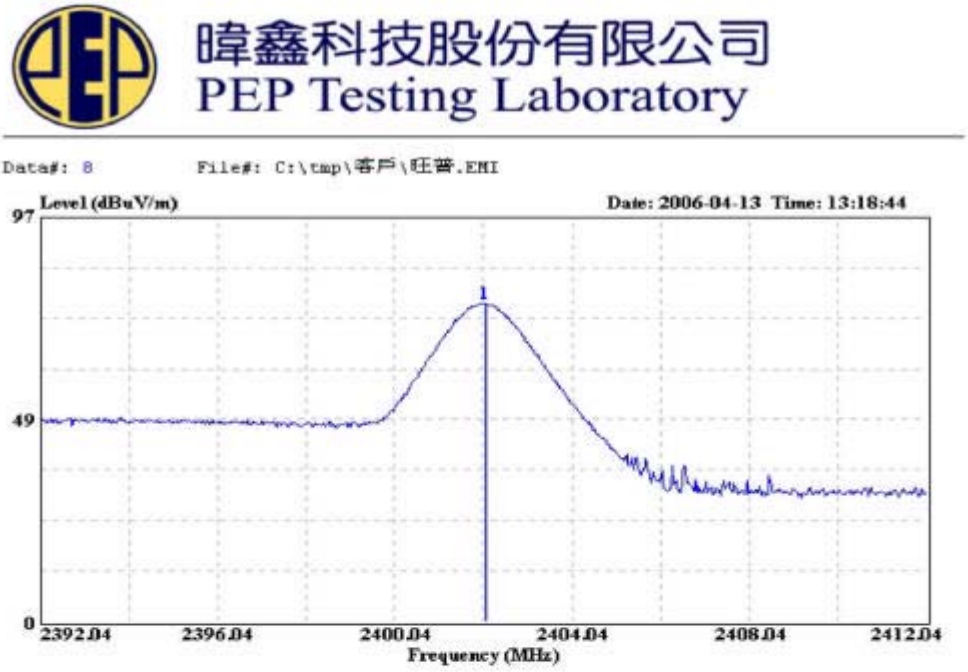

Site : Shih-Chi : Chamber No.1
Condition : 3m HORN.3V VERTICAL
EUT : E950214
Power : AC 120V 60Hz
Memo : TX ON
Memo : LOW

	Freq	Level	Over Limit	Limit Line	Read Level	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	2402.080	76.26	------	------	78.37	-2.11

- 1 -

Channel : CH MID

Polarity : Horizontal

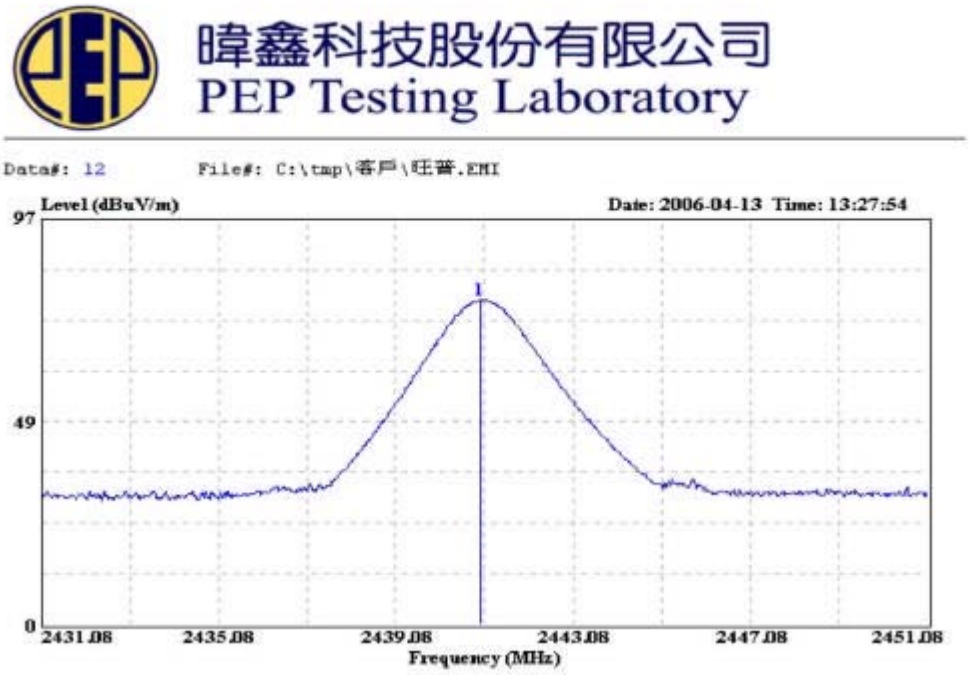

Site : Shih-Chi : Chamber No.1
Condition : 3m HORN.3H HORIZONTAL
EUT : E950214
Power : AC 120V 60Hz
Memo : TX ON
Memo : MID

	Freq	Level	Over Limit	Limit Line	Read Level	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	2440.980	77.58	------	------	79.59	-2.01

-1-

Channel : CH MID

Polarity : Vertical

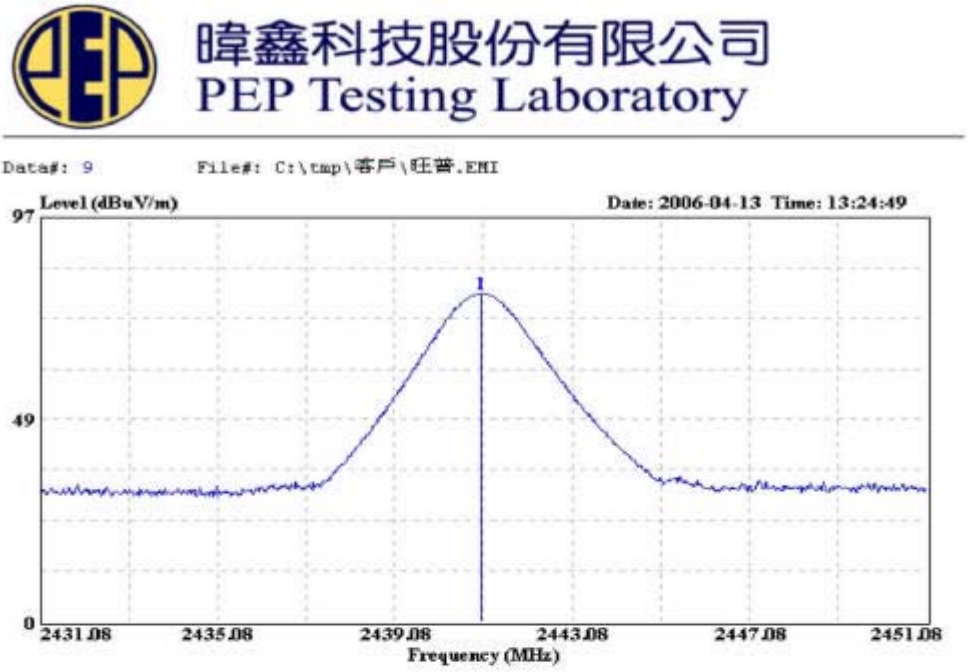

Site : Shih-Chi : Chamber No.1
Condition : 3m HORN.3V VERTICAL
EUT : E950214
Power : AC 120V 60Hz
Memo : TX ON
Memo : MID

	Freq	Level	Over Limit	Limit Line	Read Level	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	2441.040	78.69	------	------	80.70	-2.01

- 1 -

Channel : CH HIGH

Polarity : Horizontal

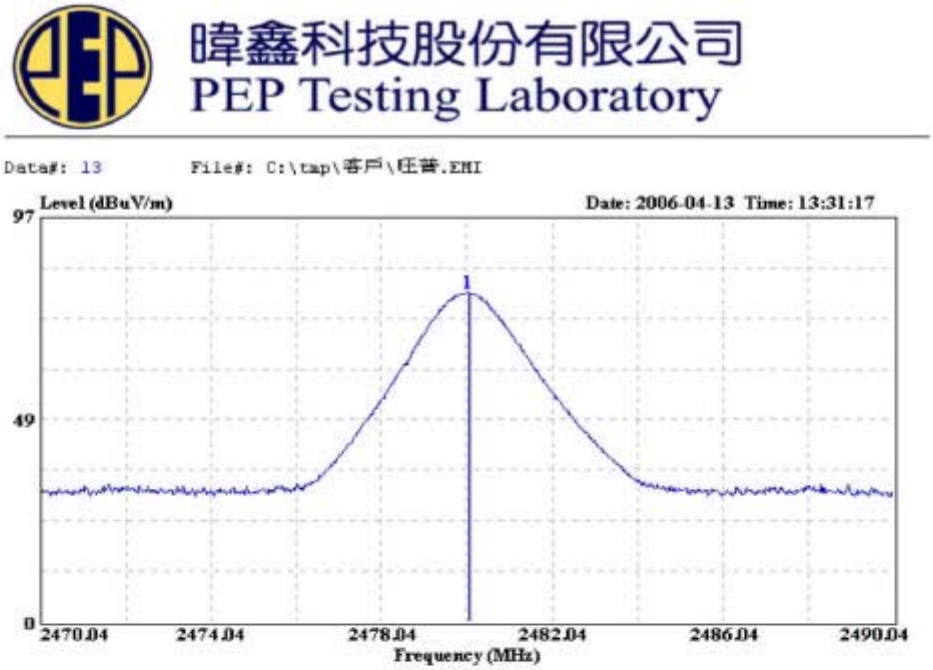

Site : Shih-Chi : Chamber No.1
Condition : 3m HORN.3H HORIZONTAL
EUT : E950214
Power : AC 120V 60Hz
Memo : TX ON
Memo : HIGH

	Freq	Level	Over Limit	Limit Line	Read Level	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	2480.080	78.76	------	------	80.70	-1.94

-1-

Channel : CH HIGH

Polarity : Vertical

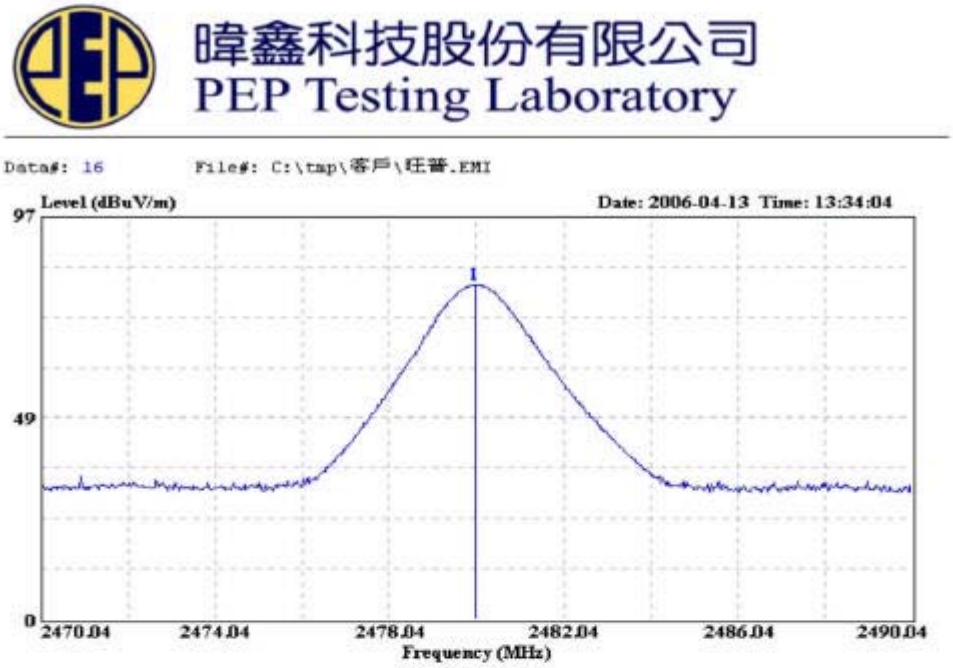

Site : Shih-Chi : Chamber No.1
Condition : 3m HORN.3V VERTICAL
EUT : E950214
Power : AC 120V 60Hz
Memo : TX ON
Memo : HIGH

	Freq	Level	Over Limit	Limit Line	Read Level	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	2480.020	80.57	------	------	82.51	-1.94

- 1 -

Ⅶ. §15.247(b)(4) Maximum Permissible Exposure (MPE)

7.1 MPE distance calculation

$$d = \frac{\sqrt{30G\ EIRP}}{E}$$

7.2 Device operating configurations exposure conditions

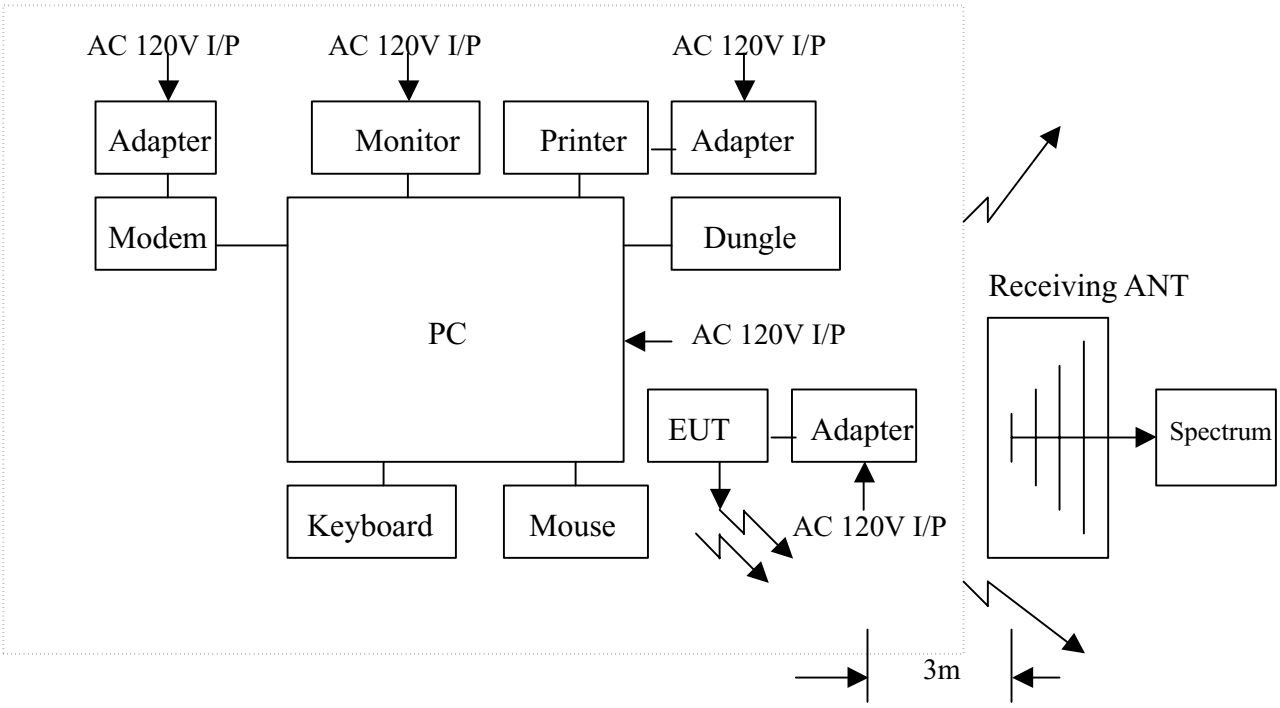

7.3 Maximum Permissible Exposure (MPE)

EUT Model No. GPS CD-100

Channel	Frequency (MHz)	A.P. (H/V)	Level (dBuV/m)	Power density at 20cm (m W / cm^2)
LOW	2402.02	H	76.31	$5.70*10^{-8}$
	2402.08	V	76.26	$5.64*10^{-8}$
MID	2440.98	H	77.58	$7.64*10^{-8}$
	2441.04	V	78.69	$9.86*10^{-8}$
HIGH	2480.08	H	78.76	$1.00*10^{-7}$
	2480.02	V	80.57	$1.52*10^{-7}$

Note :

1. P.” means antenna polarity .
2. “S.P.“ Read means amplitude read by spectrum analyzer .
3. “C.F.” means corrected factor = antenna factor + cable loss - Preamplifier Gain .
4. Level means emission amplitude = S.P. + C.F. + duty cycle factor
5. Conducted output power : $P = (E\ d)^2 / 30G$

where E (V) = Level (V)

d (m) = distance = 20 cm

G = 1 (the gain of the transmitting antenna over isotropic antenna)

P = E.I.R.P.

6. Example :

If Level = 120 dBuV/m

$10^{(120/20)} \times 10^{-6} = 1$ V

E.I.R.P. = $(1 \times 3)^2 / 30 = 300$ mW

Ⅷ. §15.247(c) : Spurious Radiated Emissions

8.1 Out side band below 1GHz

Test Results :

Model No. : **GPS CD-100**
Frequency range : **30MHz - 1GHz** **Detector** : **Quasi-Peak Value**
Temperature : **26° C** **Humidity** : **54 %**

Antenna polarization : HORIZONTAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Remark
36.216	33.38	- 6.62	40.00	37.72	16.61	0.45	21.40	
44.651	30.73	- 9.27	40.00	38.76	12.86	0.51	21.40	
63.303	31.28	- 8.72	40.00	43.49	8.46	0.73	21.40	
134.317	26.30	-17.20	43.50	38.04	8.43	1.23	21.40	
491.871	35.66	-10.34	46.00	35.48	17.91	3.07	20.80	
503.779	37.23	- 8.77	46.00	36.81	18.10	3.11	20.79	

Antenna polarization : VERTICAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Remark
34.939	28.06	-11.94	40.00	31.70	17.36	0.40	21.40	
79.468	32.54	- 7.46	40.00	45.04	8.09	0.81	21.40	
133.632	30.17	-13.33	43.50	41.94	8.41	1.22	21.40	
166.974	26.59	-16.91	43.50	36.77	9.72	1.50	21.40	
431.036	34.09	-11.91	46.00	35.66	16.55	2.83	20.95	
478.614	36.52	- 9.48	46.00	36.56	17.74	3.02	20.80	

Note :

1. Level = Read Level + Probe Factor + Cable Loss – Preamp Factor
2. Over Limit = Level – Limit Line
3. All the other frequencies are under the limits more than 20dB

8.2 Out side band above 1GHz

Test Results :

Model No. : GPS CD-100
Frequency range : above 1GHz **Detector : Peak / Average Value**
Temperature : 26° C **Humidity : 54 %**
Channel : LOW

Antenna polarization : HORIZONTAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Remark
4805.000	44.44	-29.56	74	39.82	32.80	5.93	34.11	PK

Antenna polarization : VERTICAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Remark
4804	41.41	-32.59	74	36.79	32.80	5.93	34.11	PK

Note :
1. Level = Read Level + Probe Factor + Cable Loss – Preamp Factor
2. Over Limit = Level – Limit Line
3. All the other frequencies are under the limits more than 20dB

Model No. : GPS CD-100
Frequency range : above 1GHz **Detector : Peak / Average Value**
Temperature : 26° C **Humidity : 54 %**
Channel : MID

Antenna polarization : HORIZONTAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Remark
4882	45.32	-28.68	74	40.32	33.10	5.96	34.06	PK

Antenna polarization : VERTICAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Remark
4882	42.06	-31.94	74	37.06	33.10	5.96	34.06	PK

Note :
1. Level = Read Level + Probe Factor + Cable Loss – Preamp Factor
2. Over Limit = Level – Limit Line
3. All the other frequencies are under the limits more than 20dB

Model No. : GPS CD-100
Frequency range : above 1GHz **Detector : Peak / Average Value**
Temperature : 26° C **Humidity : 54 %**
Channel : HIGH

Antenna polarization : HORIZONTAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Remark
4960	46.14	-27.86	74	40.77	33.40	5.99	34.02	PK

Antenna polarization : VERTICAL ; Test distance : 3 m ;

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Remark
4960	41.31	-32.69	74	35.94	33.40	5.99	34.02	PK

Note :
1. Level = Read Level + Probe Factor + Cable Loss – Preamp Factor
2. Over Limit = Level – Limit Line
3. All the other frequencies are under the limits more than 20dB

8.3 Spurious Radiate Emission Testing Photos

EUT Model No. GPS CD-100

< FRONT VIEW >

< REAR VIEW >

Ⅸ. §15.247(c) : Band-edges Compliance

Channel : CH LOW

Polarity : Horizontal

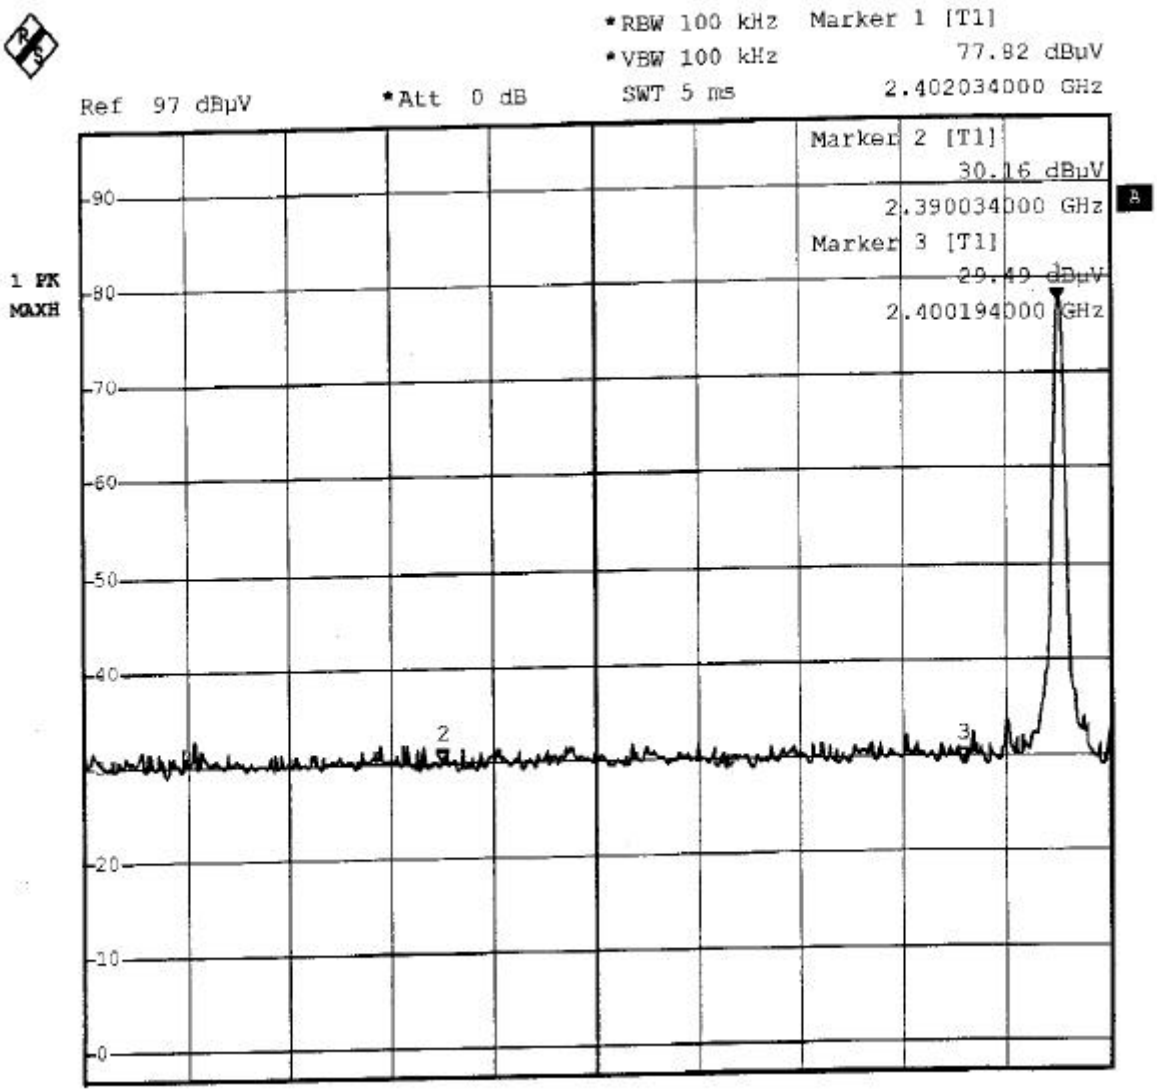

Channel : CH HIGH

Polarity : Horizontal

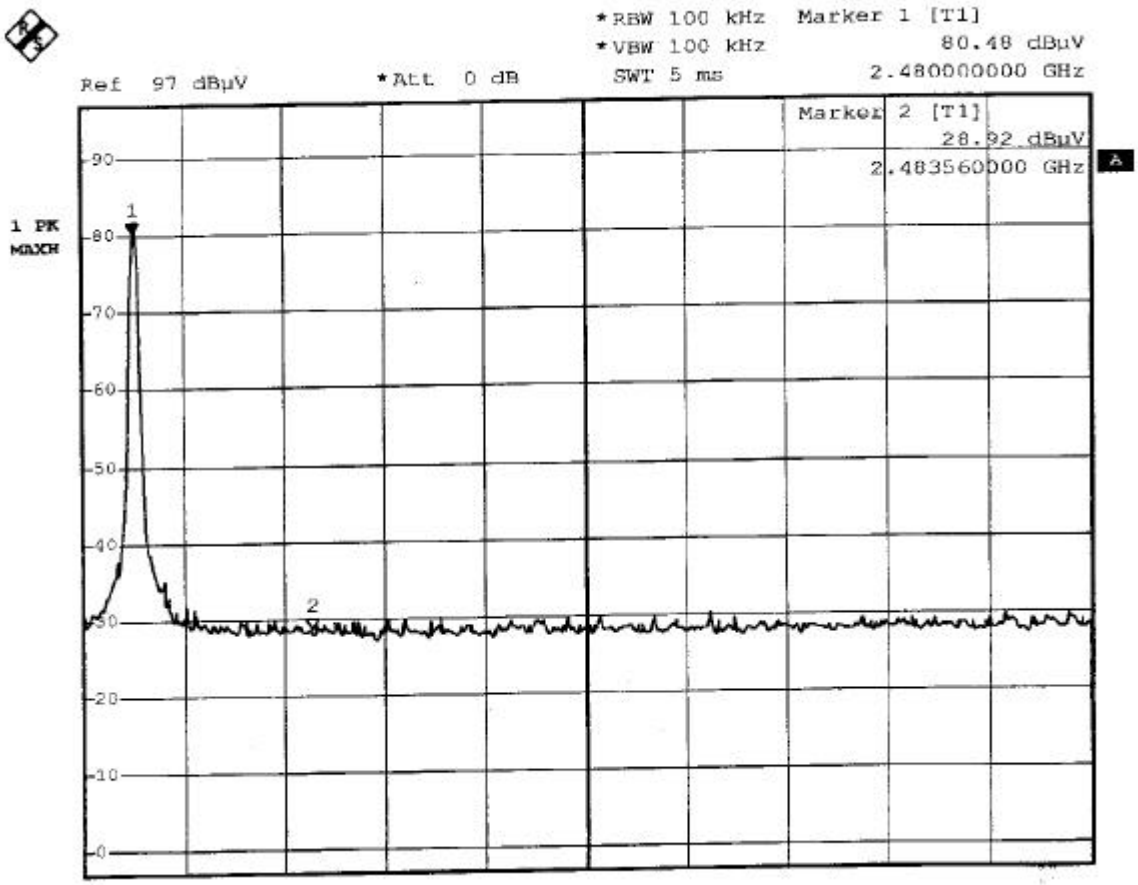

Test method : Public Notice DA 00-705

Detect : Peak Value

Marker-Delta method :

78.31dBuV/m-37.04 dBuV/m =41.27dBuV/m

78.31 dBuV/m-41.27 dBuV/m=36.95 dBuV/m

*37.04dBuV/m<Average Limit (54dBuV/m)

Channel : CH LOW

Polarity : Vertical

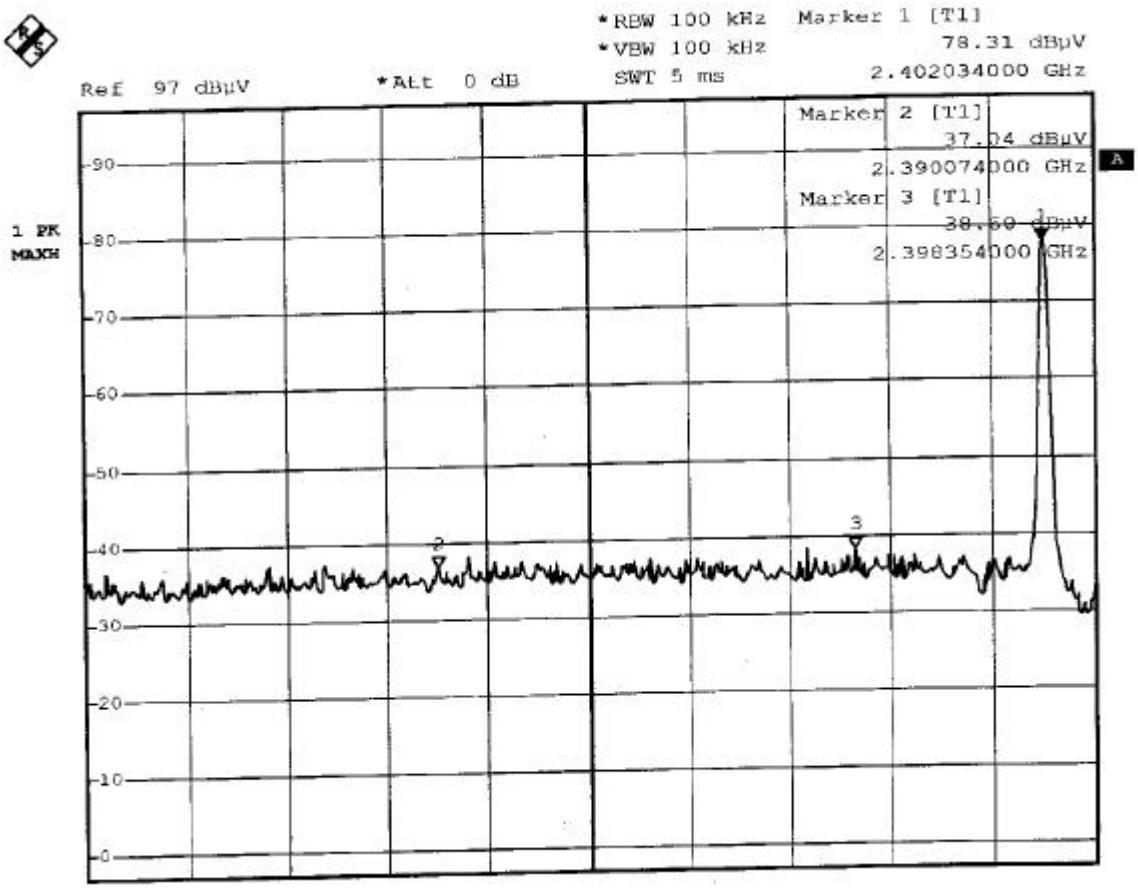

Test method : Public Notice DA 00-705

Detect : Peak Value

Marker-Delta method :

80.48dBuV/m-28.92 dBuV/m =51.56dBuV/m

80.48 dBuV/m-51.56 dBuV/m=28.92 dBuV/m

*28.92dBuV/m<Average Limit (54dBuV/m)

Channel : CH HIGH

Polarity : Vertical

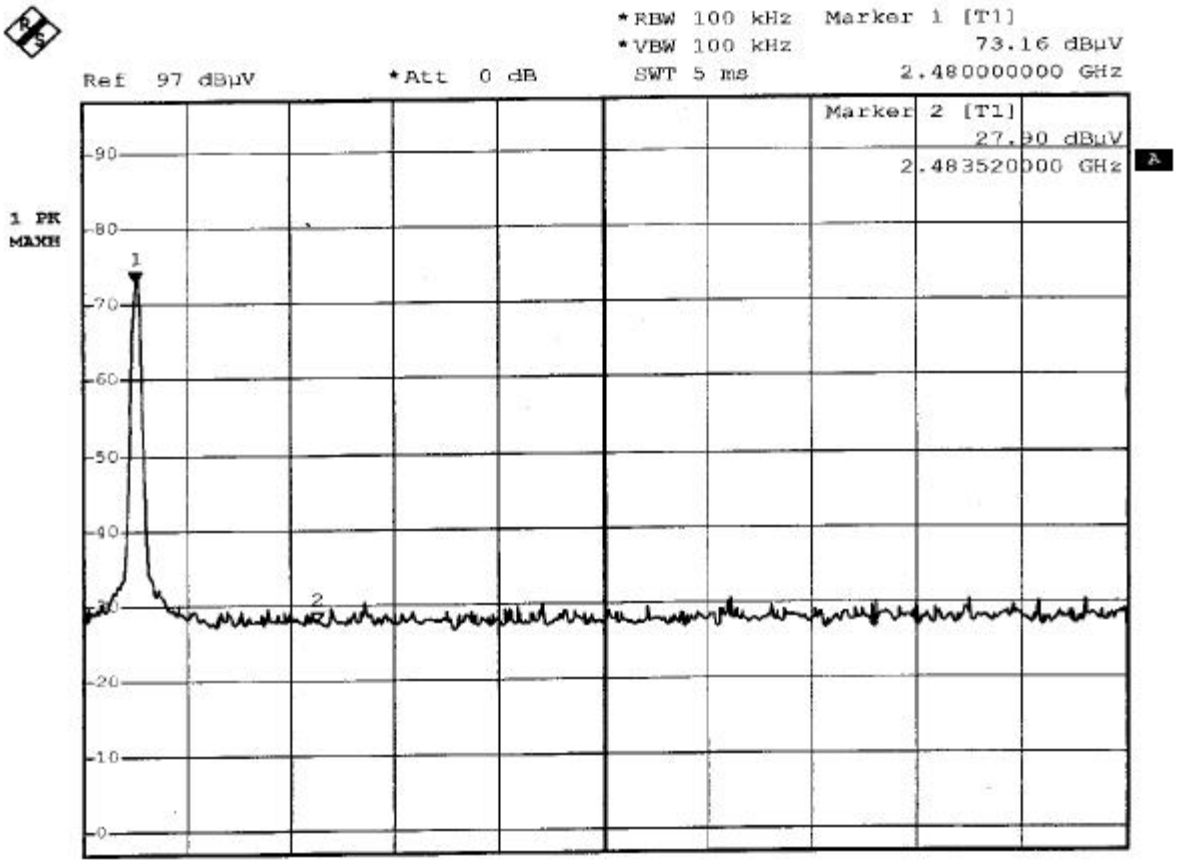

X. §15.247(d) : Peak Power Spectral Density

10.1 Test Procedure

(1) The Peak Power Spectral Density was measured at the EUT antenna terminal in max hold analyzer mode with span wide enough to capture the hopping channel emissions.

(2)Set Spectrum as RBW=VBW=3KHz , Sweeptime:auto.

(3)10.3 Spectrum Plot Data show the Peak Power Spectral Density test results.

10.2 Test result of Peak Power Spectral Density

Channel	Frequency (MHz)	Level (dBm)	Limit (dBm)	Pass/Fail
LOW	2402.030	-29.15	8	Pass
MID	2441.04	-27.41	8	Pass
HIGH	2480.03	-27.75	8	Pass

Note:

1. "S.P. read" means spectrum analyzer read power density.
2. "C.F." means correct factor = antenna factor + cable loss – Preamplifier Gain.
3. "Level" means power spectral density.

   E.R.P. = $(E\ d)^2 / 30G$

   where E (V) = S.P. read + C.F.

   d (m) = measurement distance = 3m

   G = 1 (the gain of the transmitting antenna over isotropic antenna)

   Example :

   If Level = 120 dBuV/m

   $10^{(120/20)} \times 10^{-6} = 1$ V

   E.R.P. = $(1 \times 3)^2 / 30$ = 300 mW = 10 Log (300mW/1mW)

   = 24.77dBm

10.3 Spectrum Plot Data

Channel : CH LOW

Polarity : Horizontal

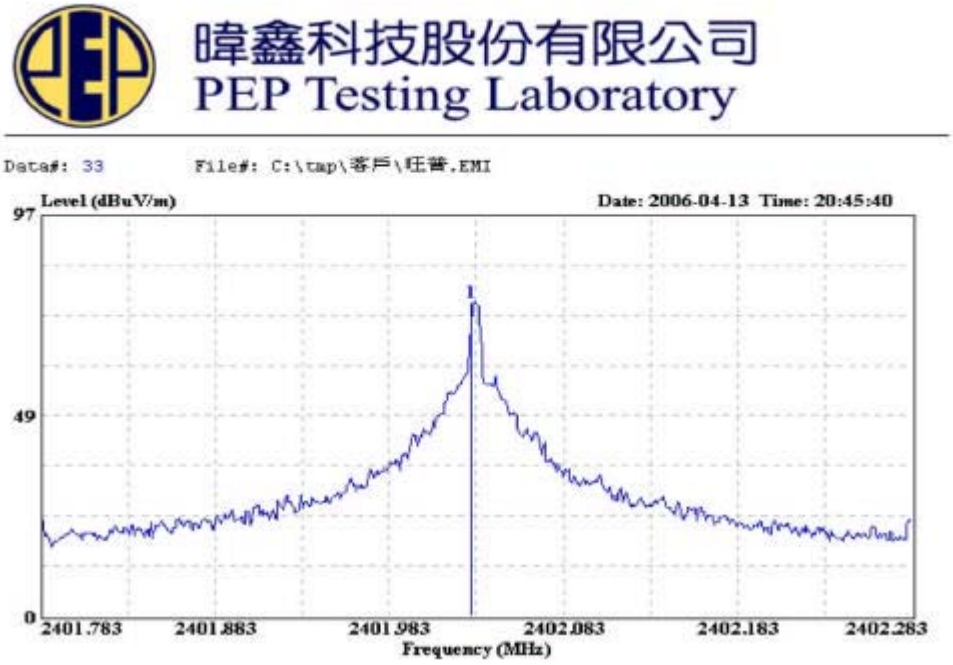

Site : Shih-Chi : Chamber No.1
Condition : 3m HORN.3H HORIZONTAL
EUT : E950214
Power : AC 120V 60Hz
Memo : TX ON
Memo : LOW

	Freq	Level	Over Limit	Limit Line	Read Level	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	2402.030	76.08	------	------	78.20	-2.12

- 1 -

Channel : CH MID

Polarity : Horizontal

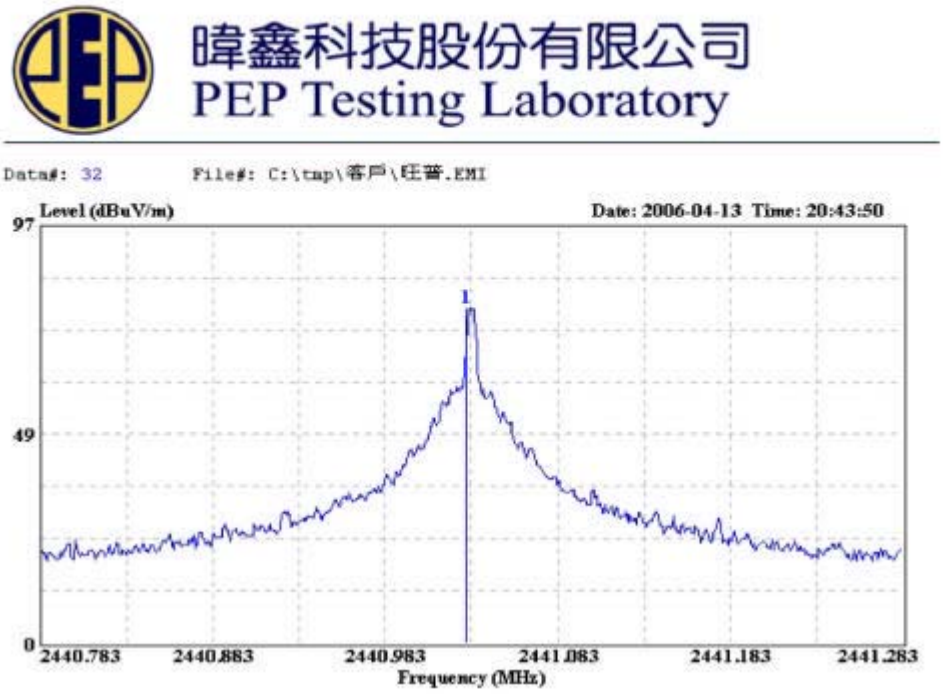

Site : Shih-Chi : Chamber No.1
Condition : 3m HORN.3H HORIZONTAL
EUT : E950214
Power : AC 120V 60Hz
Memo : TX ON
Memo : MID

	Freq	Level	Over Limit	Limit Line	Read Level	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	2441.030	77.82	------	------	79.83	-2.01

-1-

Channel : CH HIGH

Polarity : Horizontal

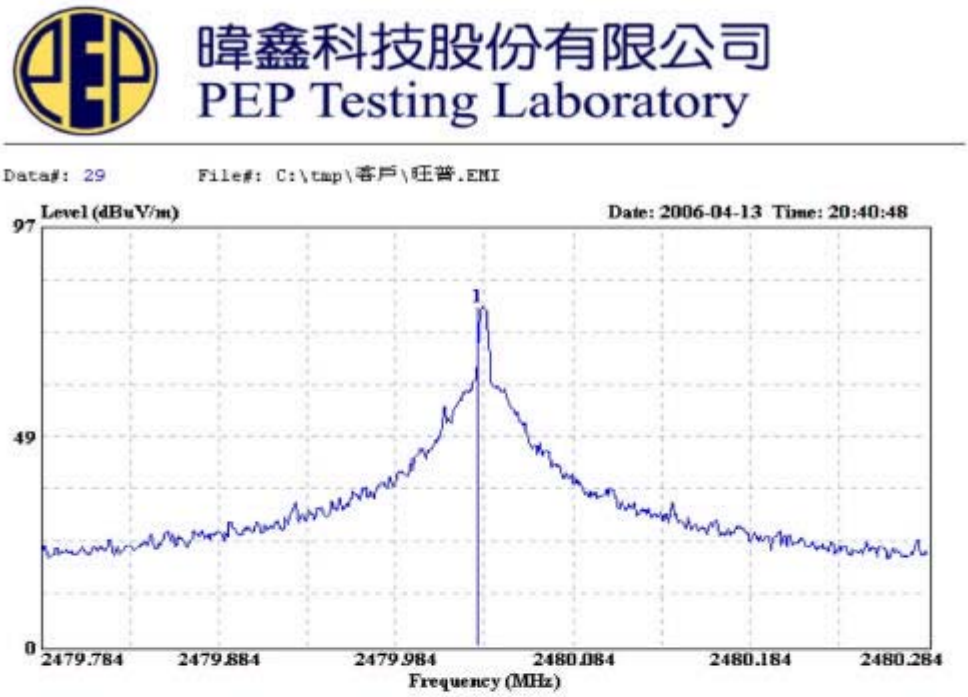

Site : Shih-Chi : Chamber No.1
Condition : 3m HORN.3H HORIZONTAL
EUT : E950214
Power : AC 120V 60Hz
Memo : TX ON
Memo : HIGH

	Freq	Level	Over Limit	Limit Line	Read Level	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB
1	2480.030	78.59	------	------	80.53	-1.94

- 1 -

XI. List of Test Instruments

Test Mode	Instrument	Model No.	Serial No.	Next Cal. Date	Cal. Interval
Conduction (No.1)	R & S Receiver	ESHS10	830223/008	May 22, 2006	1Year
	Rolf Heine LISN	NNB-4/63TL	98008	May 01, 2007	1Year
	R & S LISN	ESH3-Z5	844982/039	Aug. 06, 2006	1Year
	Spectrum Analyzer	R3261A	91720076	June 08, 2006	1Year
	RF Cable	Rg400	N/A	May 12, 2007	1Year
	Schaffner ISN	T411	N/A	June 29, 2006	1Year
Radiation (OP No.1)	R & S Receiver	ESVS30	863342/012	May 22, 2006	1Year
	Schaffner Pre-amplifier	CPA9232	1028	May 20, 2006	1Year
	COM-Power Horn Ant.	AH-118 (1GHz~18GHz)	10095	May 21, 2007	2Year
	Schwarzbeck Precision Dipole Ant	VHAP (30MHz~1GHz)	970 + 971 953 + 954	June 26, 2006	3Year
	R &S Signal Generator	SMY01	841104/037	Apr. 29, 2007	2Year
	RF Cable	No. 1	N/A	May 11, 2007	1Year
	EMCO Antenna	3142B (26MHz~2GHz)	9904-1370	Aug. 24, 2006	1Year
Chamber (No. 3)	Spectrum Analyzer	FSP 30	100157	Aug. 30, 2006	1Year
	Pre-Amplifier	CPA-9232	1027	Feb. 24, 2007	1Year
	Antenna	VULB9160	3074	July 24, 2006	1Year
	Signal Generator	SMY02	829846/0358	Jane 29, 2007	2Year
	RF Cable	NO.3	N/A	Feb. 19, 2007	1Year
	HORN ANTENNA	AH-118	10095	May 13, 2007	1Year

XII. EUT Photos

EUT Model No. GPS CD-100

Li-ion Battery
Model No: WP-LI11
RATING: 3.7V
CAUTION: DO NOT INCINERATE
DISASSEMBLE, SHORT, HEAT ABOVE
140°F, USE DESIGNATED CHARGER ONLY
Achtung: Nicht ins Feuer werfen,
öffnen, kurzschliessen, Vor Hitze
schützen (maximel 60°C) nur mit
original Ladegerät aufladen
Li-ion
WARNING
S/N: B 022342
CELLS MADE IN JAPAN
TFTG Technology Co., Ltd

DVE®
AC Adaptor/交換式電源供應器
MODEL/型號: DSA-0051-05C FUS 53050F
INPUT/輸入: 100-240V~ 50/60Hz 0.2A
OUTPUT/輸出: +5.3V ⎓ 0.5A
PIN5"-" PIN1"+"
LEVEL 3
I.T.E L.P.S LISTED
FC
c UL us
81GJ E135856
R33050
Made In China 中國製造 (F)

Li-ion Battery
S/N: B 022342

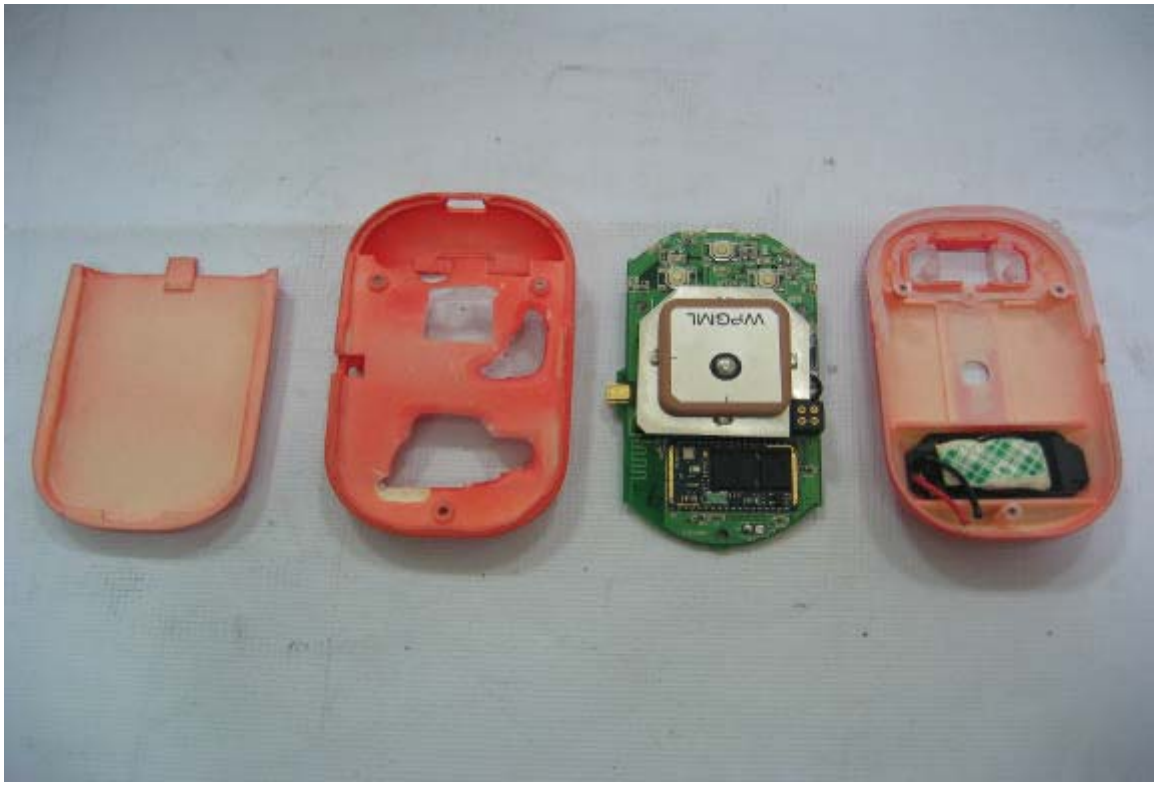

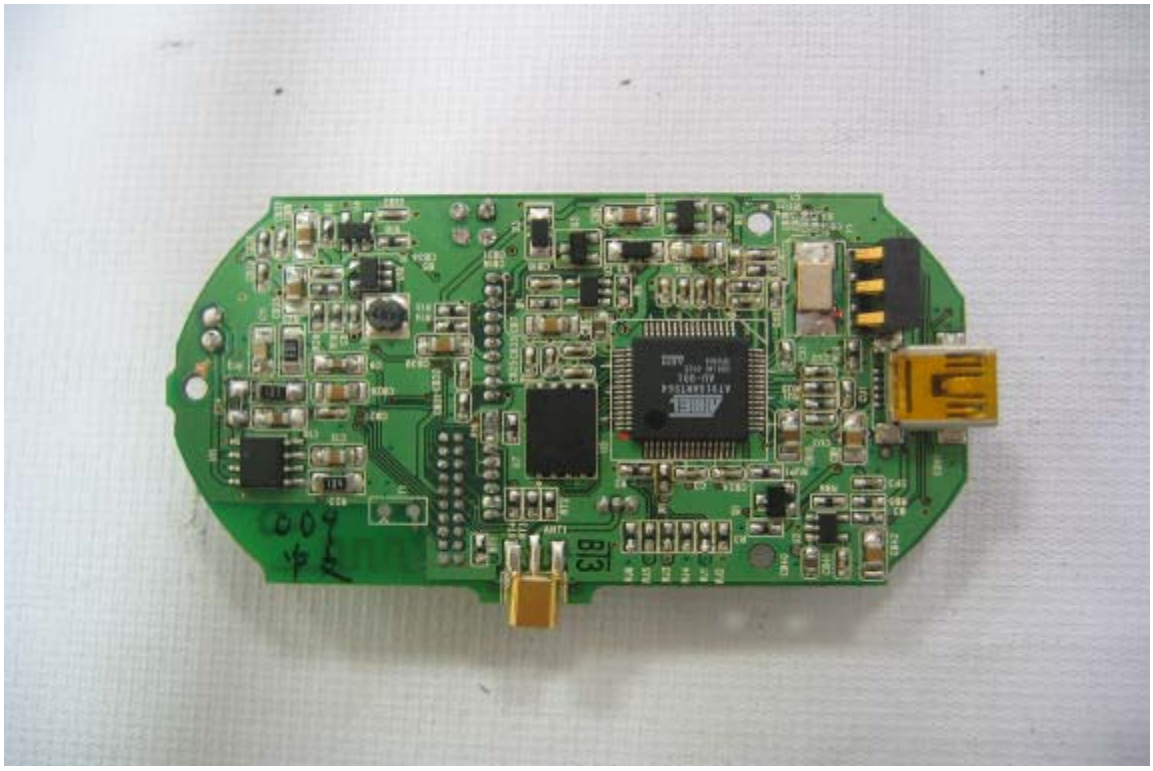

WPGML

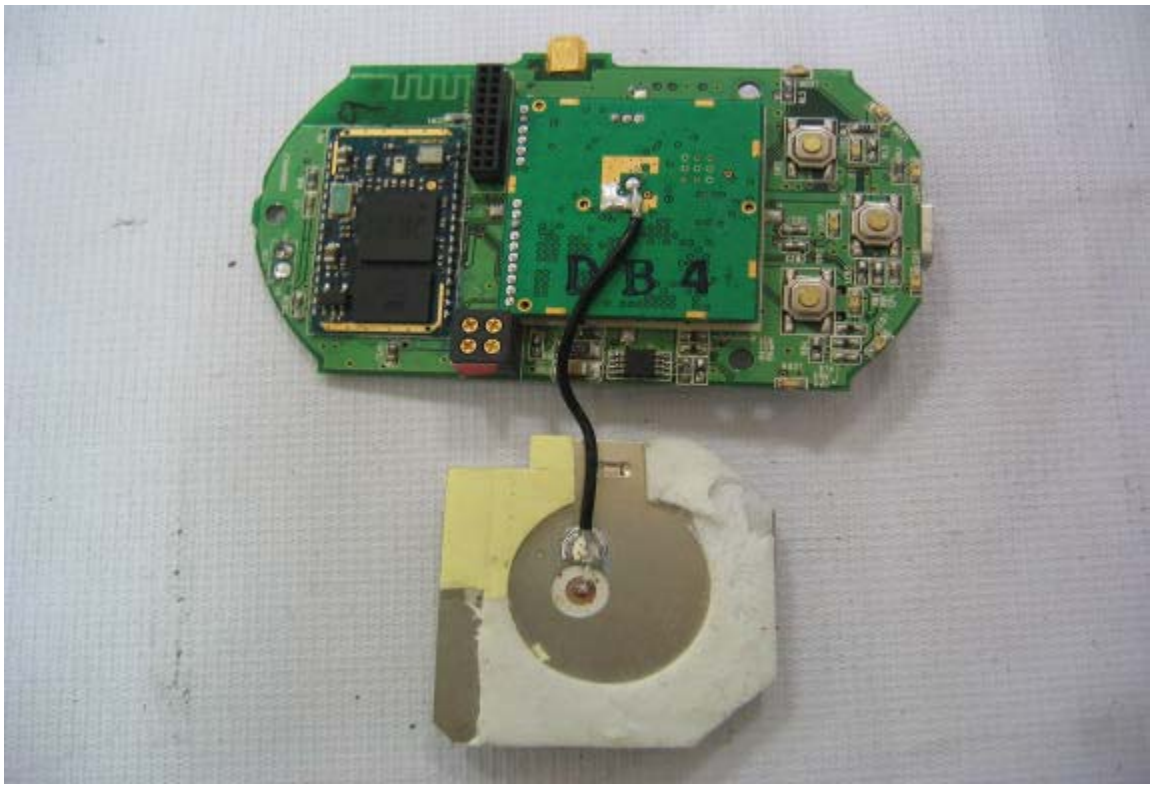
DB 4

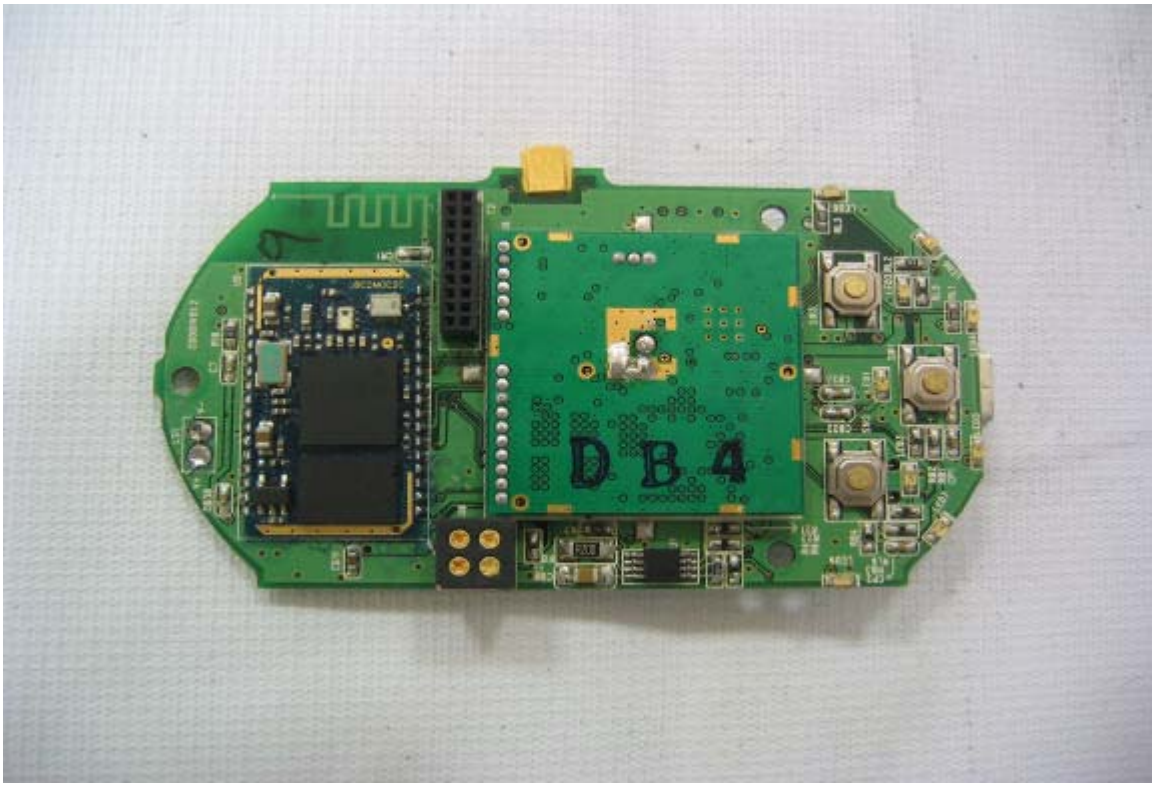
D B 4

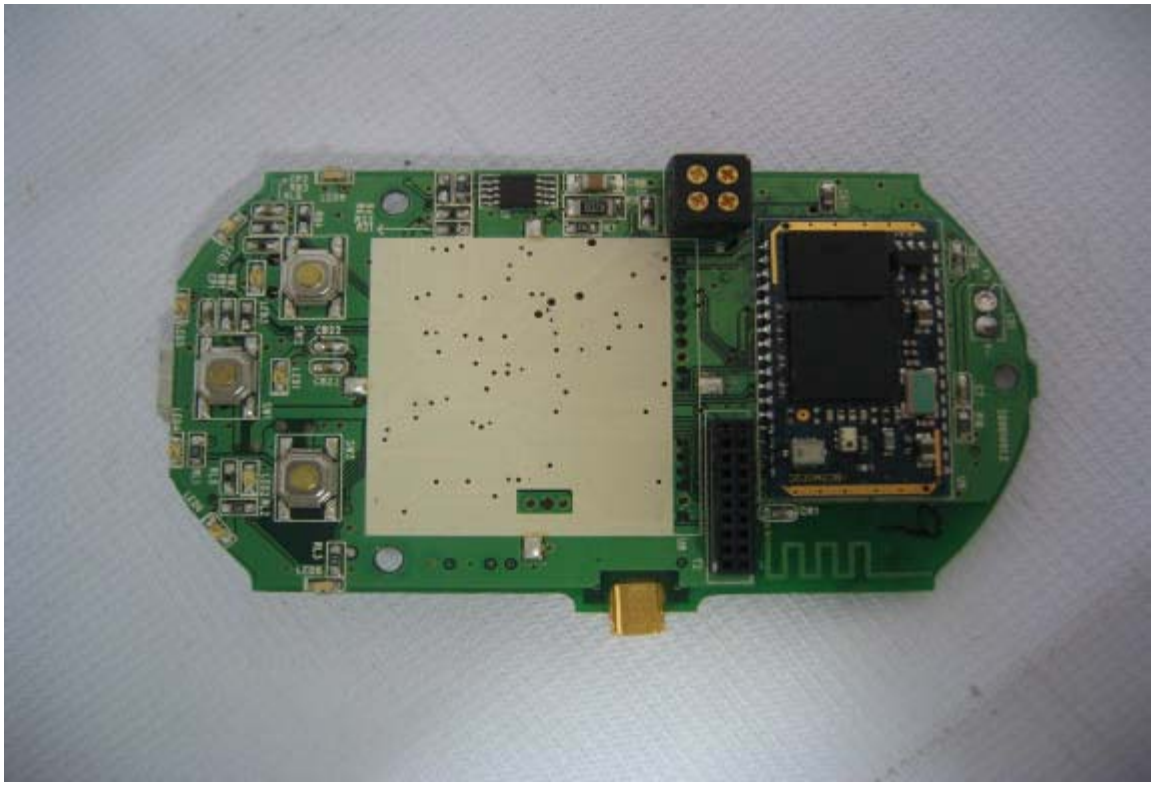

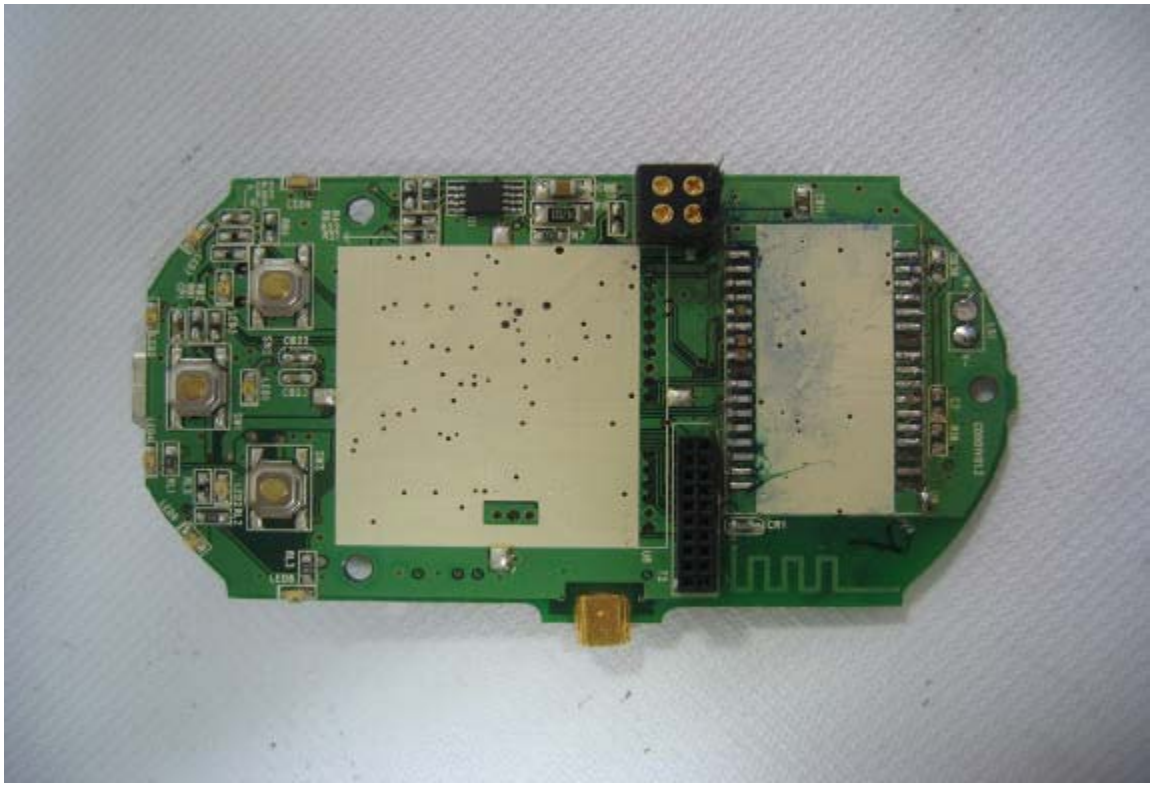

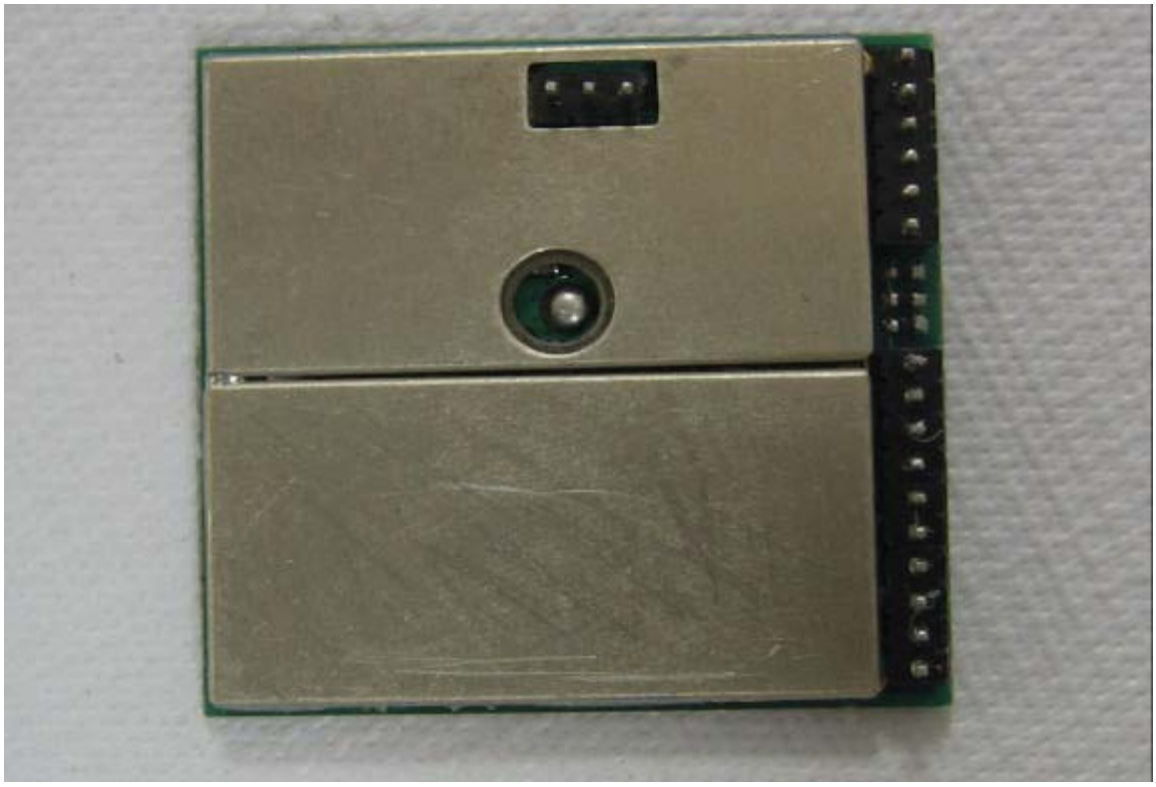

ZX4125
V1.0

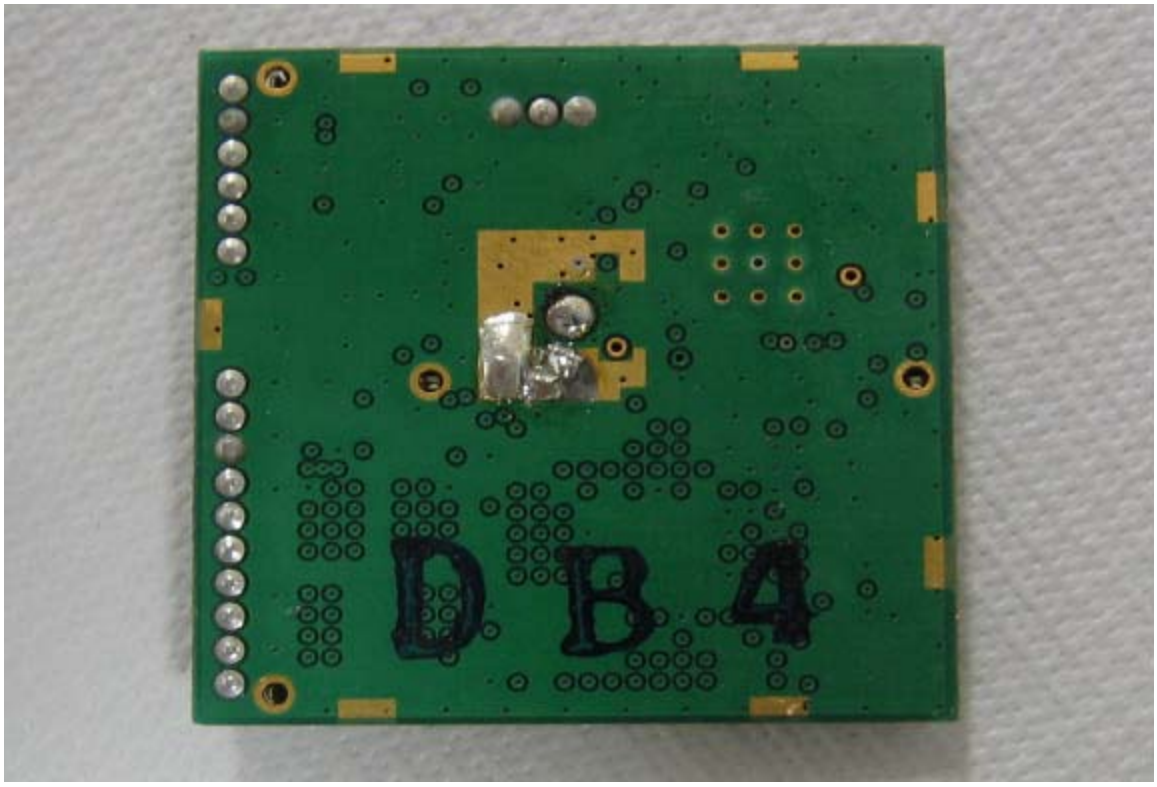
D B 4

BC2MOC2C

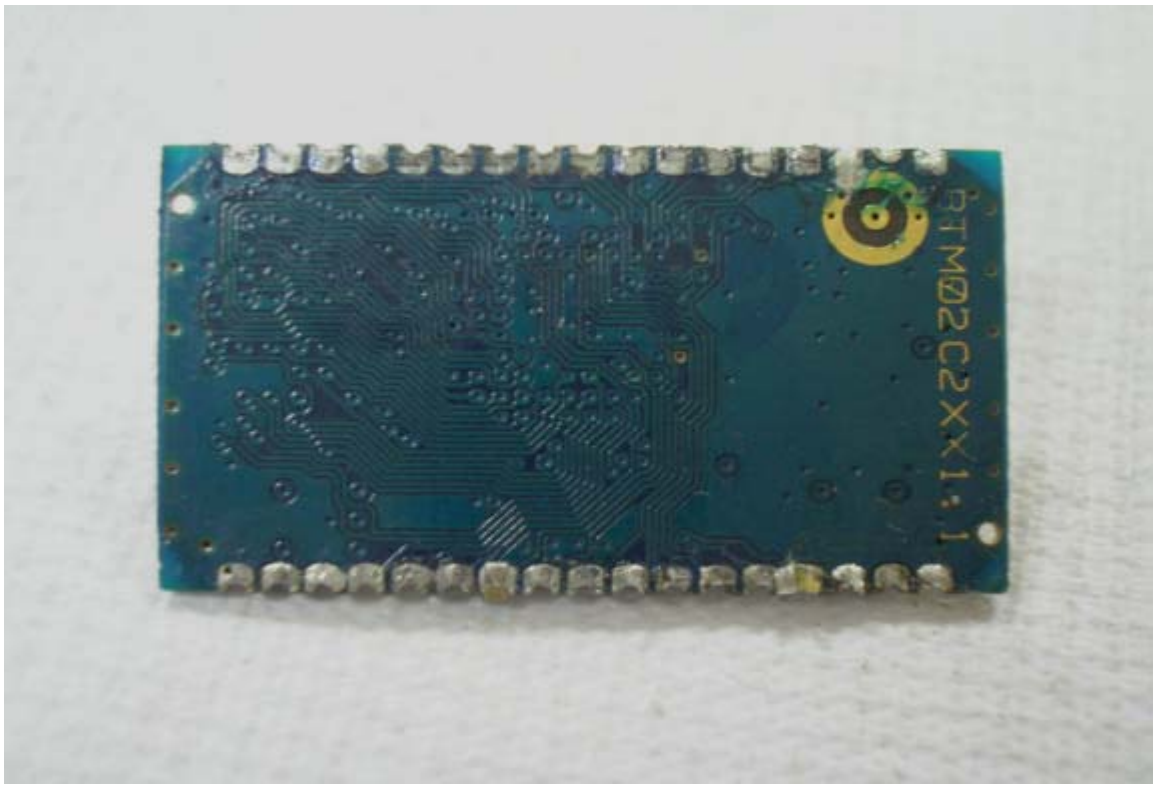
RTM02C2XX1:1