



Registration
No.910917

TEST REPORT

FOR SAR TESTING

Report No.: SRTC2017-9004(F)-0035

Product Name: LTE/WCDMA/GSM(GPRS) Mutil-Mode Digital Mobile Phone

Product Model: 602ZT

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: FCC Part 2.1093

IEEE Std 1528-2013

FCC RF Exposure KDB Procedures

FCC ID: SRQ-602ZT

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-57996181 Fax: 86-10-57996288

Contents

1. GENERAL INFORMATION.....	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT'S DETAILS	2
1.4 MANUFACTURER'S DETAILS	2
1.5 TEST ENVIRONMENT	3
2. DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS.....	4
2.2 SUPPORT EQUIPMENT	5
3. REFERENCE SPECIFICATION.....	5
4. TEST CONDITIONS	6
4.1 PICTURE TO DEMONSTRATE THE REQUIRED LIQUID DEPTH	6
4.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER	6
4.3 SAR MEASUREMENT SET-UP	6
4.4 PHANTOMS	7
4.5 TISSUE SIMULANTS	7
4.6 DESCRIPTION OF THE TEST PROCEDURE	8
5 RESULT SUMMAR	10
6 TEST RESULT	11
6.1 MANUFACTURING TOLERANCE.....	11
6.2 GSM MEASUREMENT RESULT	14
6.3 LTE MEASUREMENT RESULT	16
6.5 BLUETOOTH MEASUREMENT RESULT	22
6.6 WI-FI MEASUREMENT RESULT	23
6.7 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	25
6.8 RF EXPOSURE CONDITIONS	27
6.9 SYSTEM CHECKING	29
6.10 SAR TEST RESULT	30
6.11 SAR MEASUREMENT VARIABILITY	36
6.12 SIMULTANEOUS TRANSMISSION SAR ANALYSIS.....	37
7 MEASUREMENT UNCERTAINTY.....	39
8 TEST EQUIPMENTS.....	40
ANNEX A – TEST PLOTS	42
ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS	86
ANNEX C – PHOTOGRAPH.....	105

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	No.80 Beilishi Road, Xicheng District
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 5799 6181
Fax:	+86 10 5799 6288
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park,Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	P.R.China
Grantee Code:	SRQ
Contacted person:	Min Zhang
Tel:	021-68897867
Fax:	021-50801070
Email:	zhang.min13@zte.com.cn

1.4 Manufacturer's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park,Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	P.R.China
Contacted person:	Min Zhang
Tel:	021-68897867
Fax:	021-50801070
Email:	zhang.min13@zte.com.cn

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2017.04.11
Testing Start Date:	2017.04.11
Testing End Date:	2017.04.17

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25.0	38.0

Normal Supply Voltage (V d.c.):	3.85
---------------------------------	------

2. DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Wireless Technology and Frequency Bands	GSM Band : PCS1900 LTE Band: FDD41 (2545MHz-2595MHz) Wi-Fi Band: 2400MHz~2483.5MHz Bluetooth Band: 2400MHz~2483.5MHz
Mode	GSM ☒ Voice (GMSK) ☒ GPRS (GMSK) ☒ EGPRS (GMSK/8PSK) LTE ☒ QPSK ☒ 16QAM Wi-Fi 2.4GHz (802.11b/g/n) ☒ 802.11b ☒ 802.11g ☒ 802.11n (20MHz) ☒ 802.11n (40MHz) Bluetooth ☒ BR(GFSK) ☒ EDR($\pi/4$ DQPSK , 8-DPSK) ☒ BLE(GFSK)
Duty Cycle	GSM Voice: 12.5%; GPRS: 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots) WCDMA: 100% Wi-Fi 802.11b/g/n: 100% Bluetooth: 32.25% (DH1), 66.68% (DH3), 77.52% (DH5)
GPRS Multi-Slot Class	☐ Class 8 - One Up ☐ Class 10 - Two Up ☒ Class 12 - Four Up
Mobile Phone Capability	☐ Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. ☒ Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. ☐ Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
DTM (Dual Transfer Mode)	Not Supported

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

State of sample	Production unit
Headset	JD1504231/ DONGGUAN HETONG INDUSTRIAL CO.,LTD
Batteries	Li3824T44P4h716043/ BYD
H/W Version	csrB
S/W Version	602ZT a0.1
IMEI	864766030001334
Notes	Accessories(Charger/USB Cable/Headset)are provided by testlab

3. REFERENCE SPECIFICATION

Specification	Version	Title
Part 2.1093	Nov. 14, 2016	Radiofrequency radiation exposure evaluation: portable devices.
IEEE Std 1528	2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a	2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
KDB 447498 D01	v06	General RF Exposure Guidance
KDB 648474 D04	v01r03	Handset SAR
KDB 941225 D01	v03r01	3G SAR Procedures
KDB 941225 D06	v02r01	Hotspot Mode
KDB 248227 D01	v02r02	SAR meas for 802 11 a b g
KDB 865664 D01	v01r04	SAR Measurement 100 MHz to 6 GHz
KDB 865664 D02	v01r02	RF Exposure Reporting
KDB 941225 D05	v02r05	SAR for LTE Devices

4. TEST CONDITIONS

4.1 Picture to demonstrate the required liquid depth

The liquid depth in the used SAM phantoms



Liquid depth for SAR Measurement

4.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

4.3 SAR Measurement Set-up

The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit. A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors.

The PC consists of the Micron Pentium IV computer with Win7 system and SAR Measurement Software DASY5 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software

manipulation of the robot.

A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection

The robot uses its own controller with a built in VME-bus computer.

4.4 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2013.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.5 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2013 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.5.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue stimulant(s):

835MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Water	41.45	52.50
Sugar	56.00	45.0
Nacl	1.45	1.40
Cellulose	1.00	1.00
Preventol	0.10	0.10

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Water	44.45	70.17
DGBE	55.24	29.44
Nacl	0.31	0.39

2450MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Water	55.00	68.64
DGBE	45.00	31.37
Nacl	0.00	0.00

5GHz band

Ingredient	Head (% by weight)	Body (% by weight)
Water	65.52	---
Triton X-100	17.24	---
Diethylenglycol monohexylether	17.24	---

4.6 DESCRIPTION OF THE TEST PROCEDURE

4.6.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

4.6.2 Test positions

4.6.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2013 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

4.6.2.2 Body Worn Configuration

The device was placed in the SPEAG holder below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance using a separate flat spacer that was removed before the start of the measurements. And the distance is 10mm. The device was oriented with its antenna facing the phantom since this orientation gives higher results.

4.6.3 Scan Procedure

First, area scans were used for determination of the field distribution and the approximate location of the local peak SAR values. The SAR distribution is scanned along the inside surface, at least for an area larger than the projection of the handset and antenna. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. The SAR distribution is first measured on a 2-D coarse grid. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. It is a 15 mm × 15 mm measurement grid used when two staggered one-dimensional cubic splines are used to estimate the maximum SAR location. Next, a zoom scan, a minimum of 7 x 7x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

4.6.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within DASY5 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics. In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.



5 RESULT SUMMAR

The maximum reported SAR values for Head configuration and Body Worn configuration are given as follows. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.

Exposure Position	Frequency Band	1g-SAR Reported Result (W/kg)	Highest 1g-SAR Reported Result (W/kg)	Limit (W/kg)/1g	Result
Head	GSM 1900	0.144	0.852	1.6	PASS
	WLAN 2.4GHz Band	0.287			
	LTE Band 41	0.416			
Body (10mm Gap)	GSM 1900	0.852			
	WLAN 2.4GHz Band	0.107			
	LTE Band 41	0.675			

Simultaneous Transmission Summary

Exposure Position	Frequency Band	1g-SAR Result(W/kg)	Highest 1g-SAR Result(W/kg)	Limit (W/kg)/1g	Result
Head	GSM & Wi-Fi	0.431	0.982	1.6	PASS
	LTE& Wi-Fi	0.703			
	GSM & Bluetooth	0.274			
	LTE& Bluetooth	0.546			
Body (Gap 10mm)	GSM & Wi-Fi	0.959			
	LTE& Wi-Fi	0.675			
	GSM & Bluetooth	0.982			
	LTE& Bluetooth	0.805			

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Ms. Liu Jia 
Tested by: Mr. Jiang Shuo 	Issued date: 20170425

6 TEST RESULT

6.1 Manufacturing Tolerance

(Unit: dBm)

GSM

GSM 1900			
Channel	Channel 512	Channel 661	Channel 810
Tolerance (dBm)	27.0~30.5	27.0~30.5	27.0~30.5

GSM 1900 GPRS				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	27.0~30.5	27.0~30.5	27.0~30.5
2 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
3 Txslot	Tolerance (dBm)	25.0~29.0	25.0~29.0	25.0~29.0
4 Txslot	Tolerance (dBm)	24.0~26.5	24.0~26.5	24.0~26.5
GSM 1900 EGPRS (GMSK)				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	27.0~30.5	27.0~30.5	27.0~30.5
2 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
3 Txslot	Tolerance (dBm)	25.0~29.0	25.0~29.0	25.0~29.0
4 Txslot	Tolerance (dBm)	24.0~26.5	24.0~26.5	24.0~26.5

Bluetooth

GFSK			
Channel	0	39	78
Tolerance (dBm)	4.0~6.0	4.0~6.0	4.0~6.0
$\pi/4$ DQPSK			
Channel	0	39	78
Tolerance (dBm)	5.0~8.0	5.0~8.0	5.0~8.0
8DPSK			
Channel	0	39	78
Tolerance (dBm)	5.0~8.0	5.0~8.0	5.0~8.0

Bluetooth (BLE)

GFSK			
Channel	0	39	78
Tolerance (dBm)	-4.0~0.0	-4.0~0.0	-4.0~0.0

Wi-Fi(2.4GHz)

802.11b			
Channel	1	6	11
Tolerance (dBm)	13.0~16.0	13.0~16.0	13.0~16.0
802.11g			
Channel	1	6	11
Tolerance (dBm)	7.0~13.5	7.0~13.5	7.0~13.5
802.11n HT20			
Channel	1	6	11
Tolerance (dBm)	7.0~13.5	7.0~13.5	7.0~13.5
802.11n HT40			
Channel	3	6	11
Tolerance (dBm)	5.0~13.0	5.0~13.0	5.0~13.0

LTE Band 41

20BW 100%RB			
Channel	Channel 40240	Channel 40390	Channel 40540
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 50%RB			
Channel	Channel 40240	Channel 40390	Channel 40540
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
20BW 1RB			
Channel	Channel 40240	Channel 40390	Channel 40540
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
15BW 100%RB			
Channel	Channel 40215	Channel 40390	Channel 40565
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
15BW 50%RB			
Channel	Channel 40215	Channel 40390	Channel 40565
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
15BW 1RB			
Channel	Channel 40215	Channel 40390	Channel 40565
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
10BW 100%RB			
Channel	Channel 40190	Channel 40390	Channel 40590
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
10BW 50%RB			
Channel	Channel 40190	Channel 40390	Channel 40590
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
10BW 1RB			
Channel	Channel 40190	Channel 40390	Channel 40590
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
5BW 100%RB			
Channel	Channel 40165	Channel 40390	Channel 40615
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
5BW 50%RB			
Channel	Channel 40165	Channel 40390	Channel 40615
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0
5BW 1RB			
Channel	Channel 40165	Channel 40390	Channel 40615
Tolerance (dBm)	20.0~24.0	20.0~24.0	20.0~24.0

6.2 GSM Measurement result

GSM Measured Power

Mode	GSM1900		
Channel	512	661	810
Frequency(MHz)	1850.2	1880.0	1909.8
Measured Power(dBm)	29.56	29.32	29.27

GPRS Measured Power

Mode	GPRS1900		
Channel	512	661	810
Frequency(MHz)	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	29.53	29.48	29.56
3Downlink2uplinkPower(dBm)	27.41	27.32	27.51
2Downlink3uplinkPower(dBm)	25.62	25.47	25.85
1Downlink4uplinkPower(dBm)	24.84	24.91	24.97

GPRS Averaged Power

Mode	GPRS1900		
Channel	512	661	810
Frequency(MHz)	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	20.50	20.45	20.53
3Downlink2uplinkPower(dBm)	21.39	21.30	21.49
2Downlink3uplinkPower(dBm)	21.36	21.21	21.59
1Downlink4uplinkPower(dBm)	21.43	21.70	21.56

Division Factors (for Measured Power and Averaged Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink)= 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink)= 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots (1Downlink4uplink) for GPRS.

EGPRS Measured Power

Mode	EGPRS1900 (GMSK)		
	EGPRS1900 (8PSK)		
Channel	512	661	810
Frequency(MHz)	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	29.43	29.37	29.14
	29.55	29.41	29.20
3Downlink2uplinkPower(dBm)	29.33	29.48	29.55
	29.25	29.72	29.29
2Downlink3uplinkPower(dBm)	27.73	27.61	27.51
	27.41	27.76	27.74
1Downlink4uplinkPower(dBm)	26.77	26.49	26.59
	26.72	26.59	26.59

EGPRS Averaged Power

Mode	EGPRS1900 (GMSK)		
	EGPRS1900 (8PSK)		
Channel	512	661	810
Frequency(MHz)	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	20.40	20.34	20.11
	20.52	20.38	20.17
3Downlink2uplinkPower(dBm)	23.31	23.46	23.53
	23.23	23.7	23.27
2Downlink3uplinkPower(dBm)	23.47	23.35	23.25
	23.15	23.50	23.48
1Downlink4uplinkPower(dBm)	23.76	23.48	23.58
	23.71	23.58	23.58

Division Factors (for Measured Power and Averaged Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots (1Downlink4uplink) for EGPRS (GMSK).

6.3 LTE Measurement result

Band 41

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	5	40165	2547.5	QPSK	1	Low	23.00
						Mid	23.33
						High	23.26
					50%	Low	21.89
						Mid	21.72
						High	21.91
					100%	---	21.89
				16QAM	1	Low	21.61
						Mid	22.68
						High	21.72
					50%	Low	20.81
						Mid	20.78
						High	20.78
					100%	---	20.86
	10	40190	2550	QPSK	1	Low	23.15
						Mid	23.32
						High	23.29
					50%	Low	21.82
						Mid	21.97
						High	22.19
					100%	---	21.94
				16QAM	1	Low	21.89
						Mid	22.38
						High	21.91
					50%	Low	20.86
						Mid	21.02
						High	21.17
					100%	---	20.56

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	15	40215	2552.5	QPSK	1	Low	22.67
						Mid	22.18
						High	23.37
					50%	Low	21.74
						Mid	21.80
						High	21.84
					100%	---	21.84
				16QAM	1	Low	21.90
						Mid	21.82
						High	21.82
					50%	Low	20.74
						Mid	20.79
						High	20.85
					100%	---	20.82
	20	40240	2555	QPSK	1	Low	23.18
						Mid	23.27
						High	23.19
					50%	Low	22.93
						Mid	22.71
						High	22.82
					100%	---	22.89
				16QAM	1	Low	21.81
						Mid	22.23
						High	21.93
					50%	Low	20.68
						Mid	20.56
						High	20.58
					100%	---	20.86

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	5	40390	2570	QPSK	1	Low	23.17
						Mid	23.47
						High	22.81
					50%	Low	21.84
						Mid	21.85
						High	21.83
					100%	---	21.90
				16QAM	1	Low	21.79
						Mid	22.67
						High	21.83
					50%	Low	20.92
						Mid	20.76
						High	20.81
					100%	---	20.85
	10	40390	2570	QPSK	1	Low	23.21
						Mid	23.10
						High	22.92
					50%	Low	21.84
						Mid	21.87
						High	21.68
					100%	---	21.84
				16QAM	1	Low	21.89
						Mid	22.18
						High	21.76
					50%	Low	21.22
						Mid	20.80
						High	20.72
					100%	---	20.82

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	15	40390	2570	QPSK	1	Low	23.16
						Mid	22.77
						High	22.98
					50%	Low	22.11
						Mid	21.88
						High	21.44
					100%	---	21.90
				16QAM	1	Low	22.15
						Mid	21.88
						High	21.60
					50%	Low	20.97
						Mid	20.92
						High	20.28
					100%	---	20.49
	20	40390	2570	QPSK	1	Low	23.11
						Mid	23.11
						High	22.70
					50%	Low	22.69
						Mid	22.81
						High	22.65
					100%	---	22.92
				16QAM	1	Low	22.12
						Mid	22.28
						High	21.53
					50%	Low	20.94
						Mid	20.88
						High	20.57
					100%	---	20.67

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	5	40615	2592.5	QPSK	1	Low	22.73
						Mid	23.56
						High	22.75
					50%	Low	21.61
						Mid	21.52
						High	21.57
					100%	---	21.44
				16QAM	1	Low	21.64
						Mid	22.46
						High	21.73
					50%	Low	20.11
						Mid	20.46
						High	20.58
					100%	---	20.62
	10	40590	2590	QPSK	1	Low	22.88
						Mid	22.59
						High	22.94
					50%	Low	22.78
						Mid	22.69
						High	22.82
					100%	---	21.64
				16QAM	1	Low	21.66
						Mid	21.98
						High	21.57
					50%	Low	20.68
						Mid	20.59
						High	20.69
					100%	---	20.61

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	15	40565	2587.5	QPSK	1	Low	23.02
						Mid	22.71
						High	22.95
					50%	Low	21.48
						Mid	21.61
						High	21.66
					100%	---	21.75
				16QAM	1	Low	21.71
						Mid	21.78
						High	21.71
					50%	Low	20.74
						Mid	20.72
						High	20.60
					100%	---	20.48
	20	40540	2585	QPSK	1	Low	22.96
						Mid	22.71
						High	22.72
					50%	Low	22.85
						Mid	22.62
						High	22.51
					100%	---	22.31
				16QAM	1	Low	21.58
						Mid	21.94
						High	21.67
					50%	Low	20.70
						Mid	20.61
						High	20.58
					100%	---	20.66

6.5 Bluetooth Measurement result

Modulation type	Test Result (dBm)		
	2402MHz(Ch0)	2441MHz(Ch39)	2480MHz(Ch78)
GFSK	5.74	5.33	5.11
$\pi/4$ DQPSK	6.53	6.14	6.15
8DPSK	6.56	7.03	6.77
GFSK(BLE)	2402MHz(Ch0)	2440MHz(Ch19)	2480MHz(Ch39)
	-2.21	-3.01	-3.92

Modulation type	Test Result (mW)		
	2402MHz(Ch0)	2441MHz(Ch39)	2480MHz(Ch78)
GFSK	3.75	3.41	3.24
$\pi/4$ DQPSK	4.50	4.11	4.12
8DPSK	4.53	5.05	4.75
GFSK(BLE)	2402MHz(Ch0)	2440MHz(Ch19)	2480MHz(Ch39)
	0.60	0.50	0.41

6.6 Wi-Fi Measurement result

Modulation type		Average power output (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
11b	1 Mbps	17.15	17.19	17.12
	2 Mbps	17.01	17.02	16.99
	5.5 Mbps	16.93	16.73	16.62
	11 Mbps	16.87	16.56	16.43
11g	6 Mbps	14.75	14.68	14.62
	9 Mbps	14.54	14.52	14.37
	12 Mbps	14.37	14.39	14.29
	18 Mbps	14.29	14.28	14.11
	24 Mbps	13.99	14.11	13.89
	36 Mbps	13.87	13.84	13.73
	48 Mbps	13.78	13.76	13.66
	54 Mbps	13.75	13.68	13.59
11n HT20	6.5 Mbps	13.35	13.86	14.12
	13 Mbps	13.12	13.62	14.02
	19.5 Mbps	12.83	13.38	13.83
	26 Mbps	12.52	13.02	13.38
	39 Mbps	12.29	12.74	12.87
	52 Mbps	11.84	12.37	12.73
	58.5 Mbps	11.73	11.85	12.69
	65 Mbps	11.51	11.54	11.56

Modulation type		Average power output (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2462MHz (Ch11)
11n HT40	13.5 Mbps	12.78	12.85	12.83
	27 Mbps	12.53	12.63	12.63
	40.5 Mbps	12.47	12.51	12.52
	54 Mbps	11.84	12.10	11.84
	81 Mbps	11.64	11.83	11.61
	108 Mbps	11.27	11.53	11.39
	121.5 Mbps	10.85	10.88	10.89
	135 Mbps	10.65	10.69	10.73

Modulation type		Average power output (mW)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
11b	1 Mbps	51.88	52.36	51.52
	2 Mbps	50.23	50.35	50.00
	5.5 Mbps	49.32	47.10	45.92
	11 Mbps	48.64	45.29	43.95
11g	6 Mbps	29.85	29.38	28.97
	9 Mbps	28.44	28.31	27.35
	12 Mbps	27.35	27.48	26.85
	18 Mbps	26.85	26.79	25.76
	24 Mbps	25.06	25.76	24.49
	36 Mbps	24.38	24.21	23.60
	48 Mbps	23.88	23.77	23.23
	54 Mbps	23.71	23.33	22.86
11n HT20	6.5 Mbps	21.63	24.32	25.82
	13 Mbps	20.51	23.01	25.23
	19.5 Mbps	19.19	21.78	24.15
	26 Mbps	17.86	20.04	21.78
	39 Mbps	16.94	18.79	19.36
	52 Mbps	15.28	17.26	18.75
	58.5 Mbps	14.89	15.31	18.58
	65 Mbps	14.16	14.26	14.32

Modulation type		Average power output (mW)		
		2422MHz (Ch3)	2437MHz (Ch6)	2462MHz (Ch11)
11n HT40	13.5 Mbps	18.97	19.28	19.19
	27 Mbps	17.91	18.32	18.32
	40.5 Mbps	17.66	17.82	17.86
	54 Mbps	15.28	16.22	15.28
	81 Mbps	14.59	15.24	14.49
	108 Mbps	13.40	14.22	13.77
	121.5 Mbps	12.16	12.25	12.27
	135 Mbps	11.61	11.72	11.83

6.7 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

According to the KDB447498 4.3.1 (1)

For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

This is equivalent to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (60 / \sqrt{f(\text{GHz})} \text{ mW})] \cdot [20 \text{ mm} / (\text{min. test separation distance, mm})] \leq 1.0$ for 1-g SAR; also see Appendix A for approximate exclusion threshold values at selected frequencies and distances.

According to the KDB447498 appendix A

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

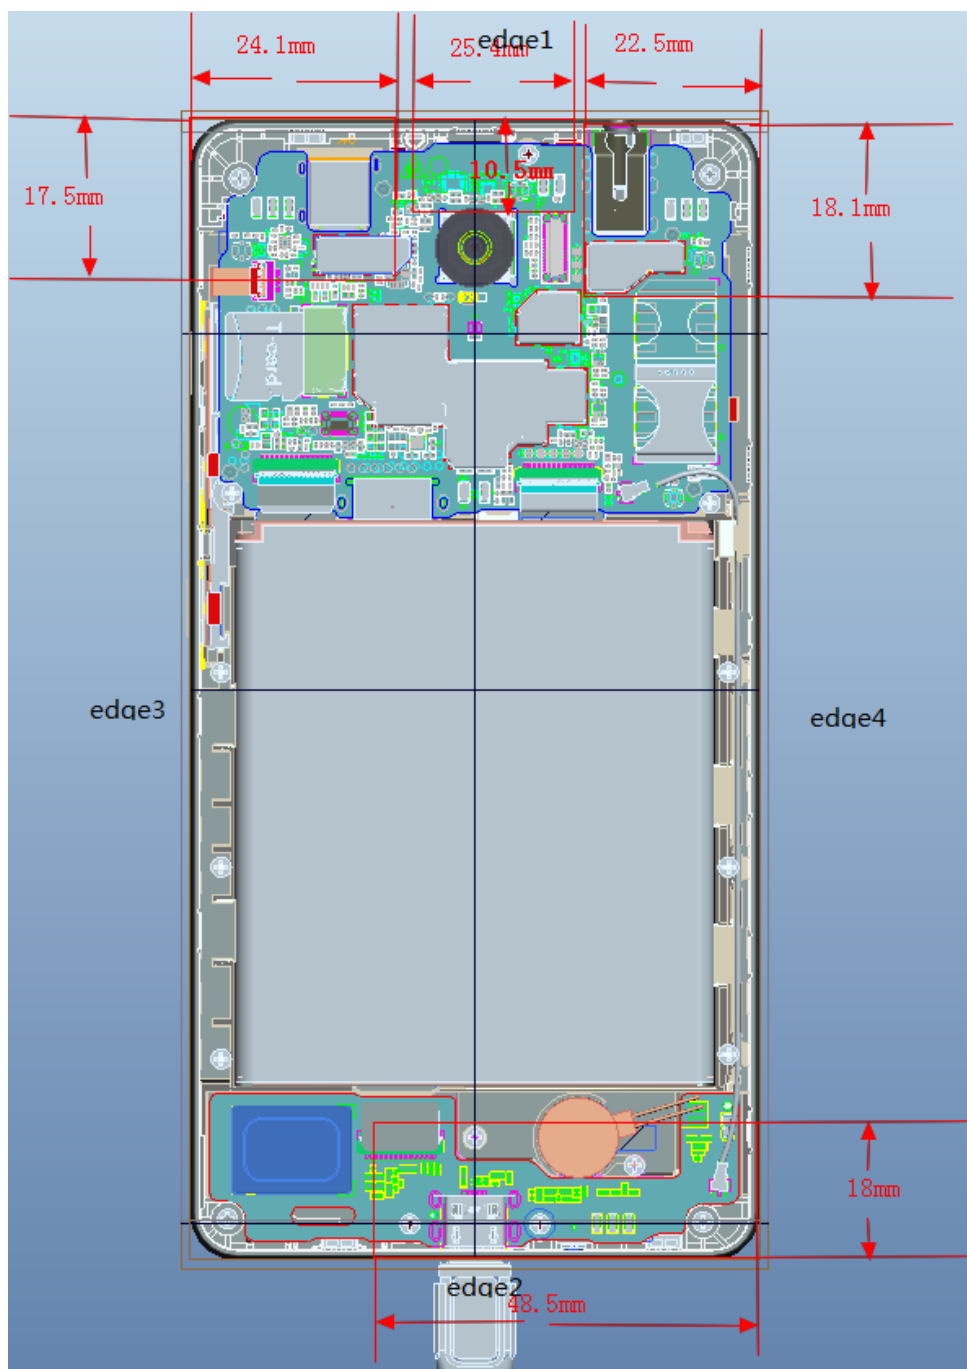
MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Summary of Transmitters

Band/Mode	Max.RF output power (mW)	SAR test exclusion Threshold (mW)	SAR Required
(2.4~2.4835)GHz Bluetooth	5.05	10	No
(2.4~2.4835)GHz WLAN	52.36	10	Yes

6.8 RF exposure conditions

Refer to the follow picture“Antenna Locations & Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.



6.8.1 Head Exposure Conditions

For WWAN,

Test Configurations	SAR Required	Note
Left Touch	yes	/
Left Tilt (15°)	yes	/
Right Touch	yes	/
Right Tilt (15°)	yes	/

6.8.2 Body-worn Accessory Exposure conditions

For WWAN

Test Configurations	SAR Required	Note
Rear	yes	/
Front	yes	/

For WiFi

Test Configurations	SAR Required	Note
Rear	yes	/
Front	yes	/

6.8.3 Hotspot Exposure Conditions

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required
Rear	<25 mm	Yes
Front	<25 mm	Yes
Edge 1 (top)	131 mm	No
Edge 2 (Bottom)	0 mm	Yes
Edge 3(Right)	0 mm	Yes
Edge 4(Left)	0 mm	Yes

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required
Rear	<25 mm	Yes
Front	<25 mm	Yes
Edge 1 (top)	0 mm	Yes
Edge 2 (Bottom)	137 mm	No
Edge 3(Right)	49.5 mm	No
Edge 4(Left)	0 mm	Yes

6.9 System Checking

The manufacturer calibrates the probes annully. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref.Value)	Delta (%)	Tolerance (%)
2017.04.11	D1900V2	Head	1g	9.81	39.25	40.70	±10
2017.04.11	D1900V2	Body	1g	9.85	39.38	39.80	±10
2017.04.12	D2450V2	Head	1g	13.11	52.45	51.20	±10
2017.04.12	D2450V2	Body	1g	12.87	51.47	50.80	±10

Plots of the system checking scans are given in Appendix A.

Tissue Simulants used in the Measurements

For the measurement of the following parameters the SPEAG DAKS-3.5 dielectric parameter probe is used, representing the open-ended coaxial probe measurement procedure.

Date Tested	Freq.(MHz)	Liquid parameters	measured	Target	Delta(%)	Tolerance(%)
2017.04.11	Head 1900	ϵ_r	40.82	40.00	2.05	±5
		σ [S/m]	1.39	1.40	0.71	±5
2017.04.11	Body 1900	ϵ_r	52.16	53.30	-0.26	±5
		σ [S/m]	1.52	1.52	0.00	±5
2017.04.12	Head 2450	ϵ_r	39.24	39.20	0.10	±5
		σ [S/m]	1.81	1.80	0.56	±5
2017.04.12	Body 2450	ϵ_r	52.01	52.70	-1.25	±5
		σ [S/m]	1.93	1.95	1.31	±5

6.10 SAR TEST RESULT

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations, and operational modes should be tested for each frequency band according to Steps 1 to 3 below.

Step 1: The tests should be performed at the channel that is closest to the center of the transmit frequency band.

a) All device positions (cheek and tilt, for both left and right sides of the SAM phantom),
b) All configurations for each device position in a), e.g., antenna extended and retracted, and
c) All operational modes for each device position in item a) and configuration in item b) in each frequency band, e.g., analog and digital, If more than three frequencies need to be tested (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing the highest peak spatial-average SAR determined in Step 1 for each frequency, perform all tests at all other test frequency channels, e.g., lowest and highest frequencies. In addition, for all other conditions (device position, configuration, and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak.

Note:

1. Per KDB 447498 D01v05, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Reported SAR (W/kg) = Measured SAR (W/kg)* Scaling Factor

2. Per KDB 447498 D01v05, for each exposure position, if the highest output channel reported SAR ≤ 0.8 W/kg, other channels SAR testing are not necessary.

3. In the report the test position "Mobile phone screen Towards Ground" abbreviated as "TG", and "Mobile phone screen Towards Phantom" abbreviated as "TP".

The measured and reported Head/body SAR values for the test device are tabulated below:

Mode: GSM1900

fL(MHz)=1850.2MHz

fM(MHz)=1880.0MHz

fH(MHz)=1909.8MHz

SAR Values (Head , 1900MHz Band)

Limit of SAR (W/kg) : <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	GSM	L	29.56	30.50	----	----	----
		M	29.32	30.50	1.31	0.110	0.144
		H	29.27	30.50	----	----	----
Left Tilted		L	29.56	30.50	----	----	----
		M	29.32	30.50	1.31	0.037	0.049
		H	29.27	30.50	----	----	----
Right cheek		L	29.56	30.50	----	----	----
		M	29.32	30.50	1.31	0.083	0.109
		H	29.27	30.50	----	----	----
Right Tilted		L	29.56	30.50	----	----	----
		M	29.32	30.50	1.31	0.033	0.043
		H	29.27	30.50	----	----	----

Mode: GSM1900 (GSM/GPRS/EGPRS)

fL(MHz)=1850.2MHz fM(MHz)=1880.0MHz fH(MHz)=1909.8MHz

SAR Values (body , 1900MHz Band)

Limit of SAR (W/kg) :<1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1 g Average	1g Average
TG	GSM With headset	L	29.56	30.50	----	----	----
		M	29.32	30.50	1.31	0.584	0.766
		H	29.27	30.50	----	----	----
	GPRS	L	24.84	26.50	----	----	----
		M	24.91	26.50	1.44	0.591	0.852
		H	24.97	26.50	----	----	----
	EGPRS	L	26.77	26.50	1.06	0.632	0.673
		M	26.49	26.50	1.00	0.636	0.637
		H	26.59	26.50	1.02	0.515	0.526
TP	GSM With headset	L	29.56	30.50	----	----	----
		M	29.32	30.50	1.31	0.315	0.413
		H	29.27	30.50	----	----	----
	GPRS	L	24.84	26.50	----	----	----
		M	24.91	26.50	1.44	0.295	0.425
		H	24.97	26.50	----	----	----
	EGPRS	L	26.77	26.50	----	----	----
		M	26.49	26.50	1.00	0.299	0.300
		H	26.59	26.50	----	----	----
Hotspot EDGE 2	EGPRS	M	26.49	26.50	1.00	0.503	0.504
Hotspot EDGE 3		M	26.49	26.50	1.00	0.038	0.038
Hotspot EDGE 4		M	26.49	26.50	1.00	0.029	0.029

Note: The distance between the EUT and the phantom bottom is 10mm.

Mode: WiFi

SAR Values (WIFI 802.11b - Head)

Limit of SAR (W/kg):<1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Result (W/kg)	Reported Result (W/kg)
Position	mode					1 g Average	1g Average
Leftcheek	1Mbps	1	17.15	16.00	----	----	----
		6	17.19	16.00	1.32	0.218	0.287
		11	17.12	16.00	----	----	----
Left Tilt	1Mbps	1	17.15	16.00	----	----	----
		6	17.19	16.00	1.32	0.192	0.253
		11	17.12	16.00	----	----	----
Rightcheek	1Mbps	1	17.15	16.00	----	----	----
		6	17.19	16.00	1.32	0.098	0.129
		11	17.12	16.00	----	----	----
Right Tilt	1Mbps	1	17.15	16.00	----	----	----
		6	17.19	16.00	1.32	0.081	0.107
		11	17.12	16.00	----	----	----

SAR Values (WIFI 802.11b - Body)

Limit of SAR (W/kg):<1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Result (W/kg)	Reported Result (W/kg)
Position	mode					1 g Average	1g Average
TG	1Mbps	1	17.15	16.00	----	----	----
		6	17.19	16.00	1.32	0.081	0.107
		11	17.12	16.00	----	----	----
TP	1Mbps	1	17.15	16.00	----	----	----
		6	17.19	16.00	1.32	0.077	0.101
		11	17.12	16.00	----	----	----
Hotspot Edge 1	1Mbps	1	17.15	16.00	----	----	----
		6	17.19	16.00	1.32	0.057	0.075
		11	17.12	16.00	----	----	----
Hotspot Edge 4	1Mbps	1	17.15	16.00	----	----	----
		6	17.19	16.00	1.32	0.030	0.036
		11	17.12	16.00	----	----	----

Note: The distance between the EUT and the phantom bottom is 10mm.

Mode: LTE Band 41(20BW-1RB-QPSK)

fL(MHz)=2555MHz fM(MHz)=2570MHz fH(MHz)=2585MHz

SAR Values (Head, LTE BAND41)

Limit of SAR (W/kg) : <2.0W/kg (10g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					10 g Average	10g Average
Left cheek	20 BW 1RB	L	23.18	24.00	----	----	----
		M	23.11	24.00	1.23	0.257	0.315
		H	22.96	24.00	----	----	----
Left Tilted		L	23.18	24.00	----	----	----
		M	23.11	24.00	1.23	0.142	0.174
		H	22.96	24.00	----	----	----
Right cheek		L	23.18	24.00	----	----	----
		M	23.11	24.00	1.23	0.147	0.180
		H	22.96	24.00	----	----	----
Right Tilted		L	23.18	24.00	----	----	----
		M	23.11	24.00	1.23	0.183	0.225
		H	22.96	24.00	----	----	----

Mode: LTE Band 41(20BW-1RB-QPSK)

fL(MHz)=2555MHz fM(MHz)=2570MHz fH(MHz)=2585MHz

SAR Values (Body, LTE BAND41)

Limit of SAR (W/kg) : <2.0W/kg (10g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					10 g Average	10g Average
TG	20 BW 1RB	L	23.18	24.00	----	----	----
		M	23.11	24.00	1.23	0.431	0.529
		H	22.96	24.00	----	----	----
TP	20 BW 1RB	L	23.18	24.00	----	----	----
		M	23.11	24.00	1.23	0.331	0.406
		H	22.96	24.00	----	----	----

Note: The distance between the EUT and the phantom bottom is 10mm.

Mode: LTE Band 41(20BW-50%RB-QPSK)

fL(MHz)=2555MHz fM(MHz)=2570MHz fH(MHz)=2585MHz

SAR Values (Head, LTE BAND41)

Limit of SAR (W/kg) : <2.0W/kg (10g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					10 g Average	10g Average
Left cheek	20 BW 50%RB	L	22.93	24.00	1.28	0.113	0.145
		M	22.69	24.00	1.35	0.308	0.416
		H	22.85	24.00	1.30	0.150	0.195
Left Tilted		L	22.93	24.00	----	----	----
		M	22.69	24.00	1.35	0.105	0.142
		H	22.85	24.00	----	----	----
Right cheek		L	22.93	24.00	----	----	----
		M	22.69	24.00	1.35	0.125	0.169
		H	22.85	24.00	----	----	----
Right Tilted		L	22.93	24.00	----	----	----
		M	22.69	24.00	1.35	0.136	0.184
		H	22.85	24.00	----	----	----

Mode: LTE Band 41(20BW-50%RB-QPSK)

fL(MHz)=2555MHz fM(MHz)=2570MHz fH(MHz)=2585MHz

SAR Values (Body, LTE BAND41)

Limit of SAR (W/kg) : <2.0W/kg (10g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	20 BW 50RB	L	22.93	24.00	----	----	----
		M	22.69	24.00	1.35	0.436	0.590
		H	22.85	24.00	----	----	----
TP		L	22.93	24.00	----	----	----
		M	22.69	24.00	1.35	0.291	0.393
		H	22.85	24.00	----	----	----
Hotspot EDGE 2		M	22.69	24.00	1.35	0.449	0.675
Hotspot EDGE 3		M	22.69	24.00	1.35	0.078	0.105
Hotspot EDGE 4		M	22.69	24.00	1.35	0.342	0.462

Note: The distance between the EUT and the phantom bottom is 10mm

6.11 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6.11.1 The Highest Measured SAR configuration in Each Frequency Band

Frequency band(MHz)	Air interface	Head(w/kg)	Body(w/kg)
1900	GSM1900	<0.8	>0.8
2450	WiFi 802.11b/g/n LTE Band 41	<0.8	<0.8

6.12 Simultaneous Transmission SAR Analysis

The sum of SAR values for GSM & WiFi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
GSM	0.144	0.852
WiFi	0.287	0.107
Sum	0.431	0.959
Note	GSM1900+WiFi Left cheek	EGPRS1900+WiFi TG

According to the above tables, the sum of SAR values for GSM and WiFi < 1.6W/kg. So simultaneous transmission SAR are not required for WiFi transmitter.

The sum of SAR values for LTE & WiFi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
LTE	0.416	0.675
WiFi	0.287	0
Sum	0.703	0.675
Note	LTE B41+WiFi Left cheek	LTE B41+WiFi EDGE2

According to the above tables, the sum of SAR values for LTE and WiFi < 1.6W/kg. So simultaneous transmission SAR are not required for WiFi transmitter.

According to the formula (KDB447498 4.3.2) the Bluetooth SAR as follow:

$$\left[\frac{\text{max.power of channel, including tune-up tolerance,mw}}{(\text{min.test separation distance,mm})} \right] \left[\sqrt{f(\text{GHz})/x} \right] \text{ W/kg for test separation distances} \leq 50\text{mm}.$$

Head:

min. test separation distance = 5mm

Body:

min. test separation distance = 10mm

Where $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.

The sum of SAR values for GSM & Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
GSM	0.144	0.852
Bluetooth	0.130	0.130
Sum	0.274	0.982

According to the above tables, the sum of SAR values for GSM and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

The sum of SAR values for LTE & Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
LTE	0.416	0.675
Bluetooth	0.130	0.130
Sum	0.546	0.805

According to the above tables, the sum of SAR values for LTE and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

7 MEASUREMENT UNCERTAINTY

DASY5 Uncertainty Budget								
Error description	Uncertainty value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std.Unc (1g).	Std.Unc. (10g)	(vi) Veff
Measurement system								
Probe calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	∞
Axial isotropy	±4.7%	R	√3	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical isotropy	±9.6%	R	√3	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%	∞
System detection limits	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Readout electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response time	±0.8%	R	√3	1	1	±0.5%	±0.5%	∞
Integration time	±2.6%	R	√3	1	1	±1.5%	±1.5%	∞
RF ambient noise	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
RF ambient reflections	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
Probe positioner	±0.4%	R	√3	1	1	±0.2%	±0.2%	∞
Probe positioning	±2.9%	R	√3	1	1	±1.7%	±1.7%	∞
Max.SAR Eval.	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Test Sample Related								
Device holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Power drift	±5.0%	R	√3	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom uncertainty	±4.0%	R	√3	1	1	±2.3%	±2.3%	∞
Liquid conductivity (target.)	±5.0%	R	√3	0.64	0.43	±1.8%	±1.2%	∞
Liquid conductivity (mea.)	±2.5%	R	√3	0.64	0.43	±0.9%	±0.6%	∞
Liquid Permittivity (target.)	±5.0%	R	√3	0.60	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (mea.)	±2.5%	R	√3	0.60	0.49	±0.9%	±0.7%	∞
Combined std. Uncertainty						±10.9%	±10.7%	387
Expanded STD Uncertainty						±21.7%	±21.4%	

8 TEST EQUIPMENTS

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	720	2016.10.31	2017.10.30
DAE	DAE4	546	2016.08.22	2017.08.21
Dosimetric E-field Probe	EX3DV4	3708	2016.11.10	2017.11.09
Dosimetric E-field Probe	ES3DV3	3127	2016.08.29	2017.08.28
Dipole Validation Kit	D835V2	4d023	2016.10.24	2017.10.23
Dipole Validation Kit	D1800V2	2d084	2016.08.19	2017.08.18
Dipole Validation Kit	D1900V2	5d113	2016.10.31	2017.10.30
Dipole Validation Kit	D2450V2	738	2016.10.25	2017.10.24

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2016.08.20	2017.08.19
Signal Generator	SML 03	103514	2016.08.20	2017.08.19
Power meter	E4417A	MY45101182	2016.08.20	2017.08.19
Power Sensor	E4412A	MY41502214	2016.08.20	2017.08.19
Power Sensor	E4412A	MY41502130	2016.08.20	2017.08.19
Power meter	E4417A	MY45101004	2016.08.20	2017.08.19
Power Sensor	E9300B	MY41496001	2016.08.20	2017.08.19
Power Sensor	E9300B	MY41496003	2016.08.20	2017.08.19
Communication Tester	8960	GB43194054	2016.08.20	2017.08.19
Communication Tester	CMU200	114666	2016.08.20	2017.08.19
Vector Network Analyzer	VNA R140	0011213	2016.08.20	2017.08.19
Dielectric Parameter Probe	DAKS-3.5	1042	2016.08.20	2017.08.19

Detailed information of Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Dynamic Range	5 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

Detailed information of Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Optical Surface Detection	± 0.3 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Dynamic Range	10 μ W/g to > 100 W/kg Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

ANNEX A – TEST PLOTS

Please refer to the attachment.

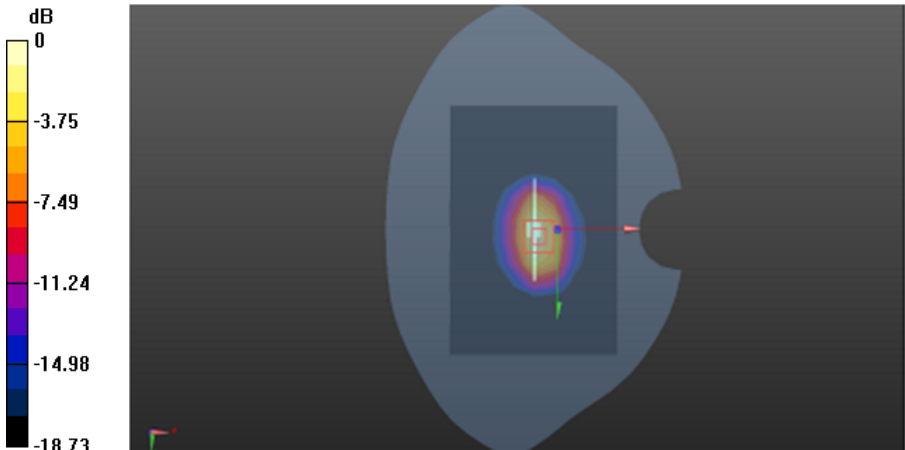
ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS

Please refer to the attachment.

ANNEX C – PHOTOGRAPH

Please refer to the attachment.

ANNEX A – TEST PLOTS

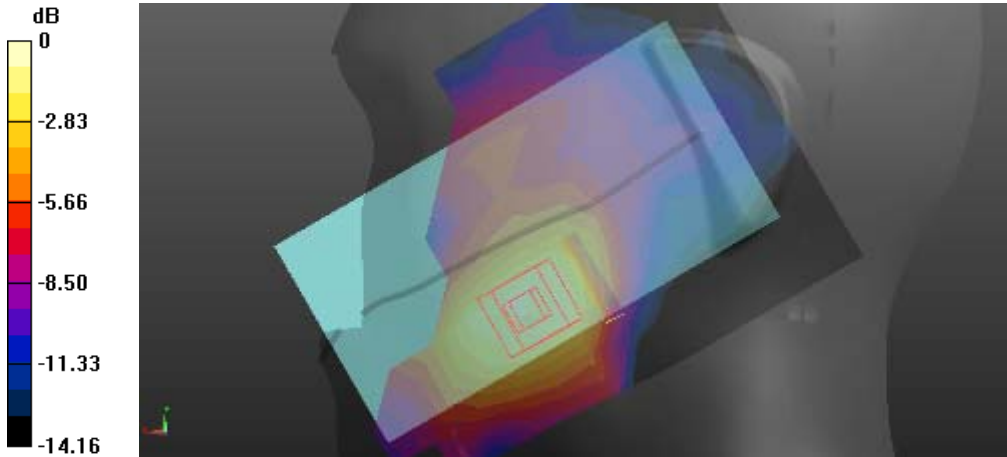
SYSTEM CHECKING SCANS	1900MHz Head
Communication System: UID 0, CW (0); Frequency: 1900 MHz Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.82$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard:DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.94, 4.94, 4.94); Calibrated: 8/21/2015; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/19/2015 - Phantom: SAM 1560; Type: SAM; Serial: 1560 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 1900MHz Head/d=10mm, Pin=250mW, dist=2.0mm (EX-Probe)/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 14.0 W/kg System Performance Check at Frequencies 1900MHz Head/d=10mm, Pin=250mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 95.996 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 20.8 W/kg SAR(1 g) = 9.81 W/kg; SAR(10 g) = 5.47 W/kg Maximum value of SAR (measured) = 15.9 W/kg	
	

SYSTEM CHECKING SCANS	1900MHz Flat
Communication System: UID 0, CW (0); Frequency: 1900 MHz Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.52 \text{ S/m}$; $\epsilon_r = 52.164$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard:DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.67, 4.67, 4.67); Calibrated: 8/21/2015; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/19/2015 - Phantom: SAM 1560; Type: SAM; Serial: 1560 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 1900MHz Flat/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 14.7 W/kg System Performance Check at Frequencies 1900MHz Flat/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 91.541 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 19.2 W/kg SAR(1 g) = 9.85 W/kg; SAR(10 g) = 5.64 W/kg Maximum value of SAR (measured) = 14.5 W/kg	

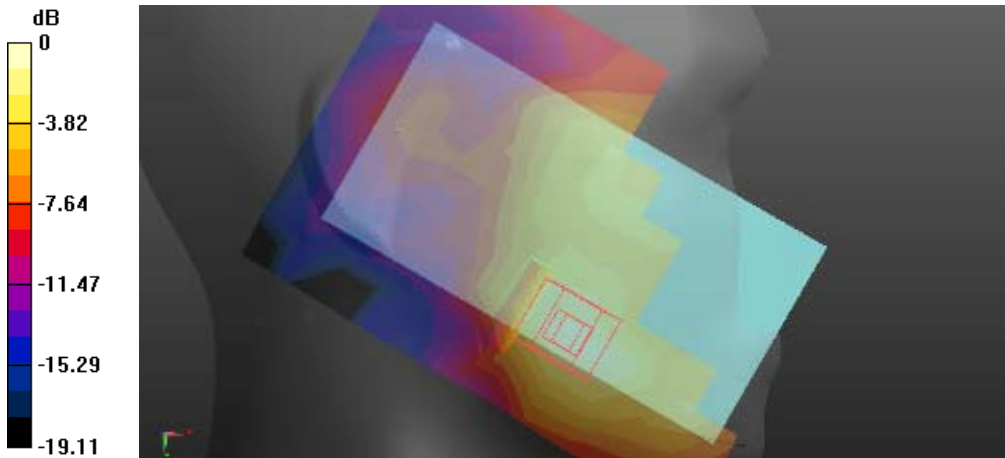
SYSTEM CHECKING SCANS	2450 MHz Head
Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.81 \text{ S/m}$; $\epsilon_r = 39.238$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.35, 4.35, 4.35); Calibrated: 2015/8/21; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2015/8/19 - Phantom: SAM 1659; Type: QD000P40CD; Serial: TP:1659 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164) System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 17.1 W/kg System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 102.2 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 28.8 W/kg SAR(1 g) = 13.11 W/kg; SAR(10 g) = 5.92 W/kg Maximum value of SAR (measured) = 17.0 W/kg	

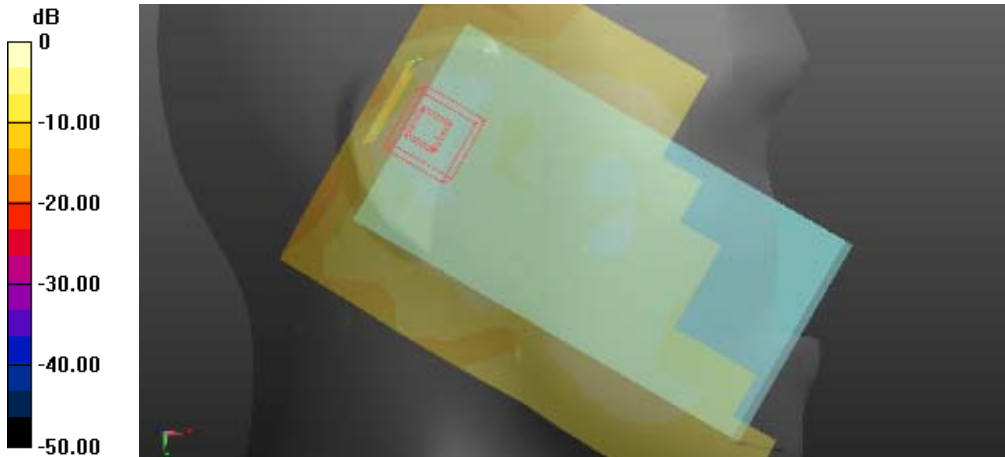
SYSTEM CHECKING SCANS	2450MHz Flat
Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.925$ S/m; $\epsilon_r = 52.012$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.19, 4.19, 4.19); Calibrated: 2015/8/21; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2015/8/19 - Phantom: SAM 1659; Type: QD000P40CD; Serial: TP:1659 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164) System Performance Check at Frequencies 2450MHz Flat/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 17.1 W/kg System Performance Check at Frequencies 2450MHz Flat/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 104.3 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 28.0 W/kg SAR(1 g) = 12.87 W/kg; SAR(10 g) = 5.78 W/kg Maximum value of SAR (measured) = 17.4 W/kg	

GSM (1900MHz/Head)

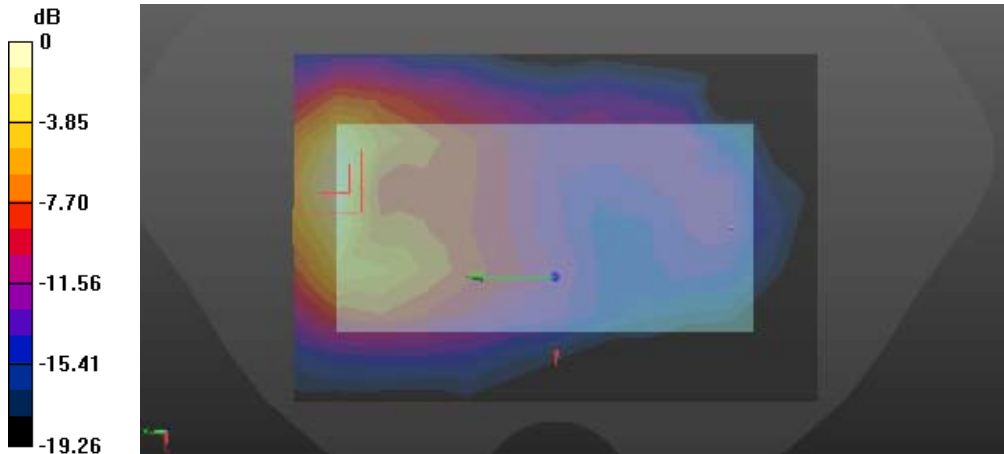
Left Side	Cheek
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Left HSL 1900/1900GSM HSL touch M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.103 W/kg Head-Section Left HSL 1900/1900GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.846 V/m; Power Drift = 3.52 dB Peak SAR (extrapolated) = 0.188 W/kg SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.066 W/kg Maximum value of SAR (measured) = 0.121 W/kg  0 dB = 0.121 W/kg = -9.17 dBW/kg	

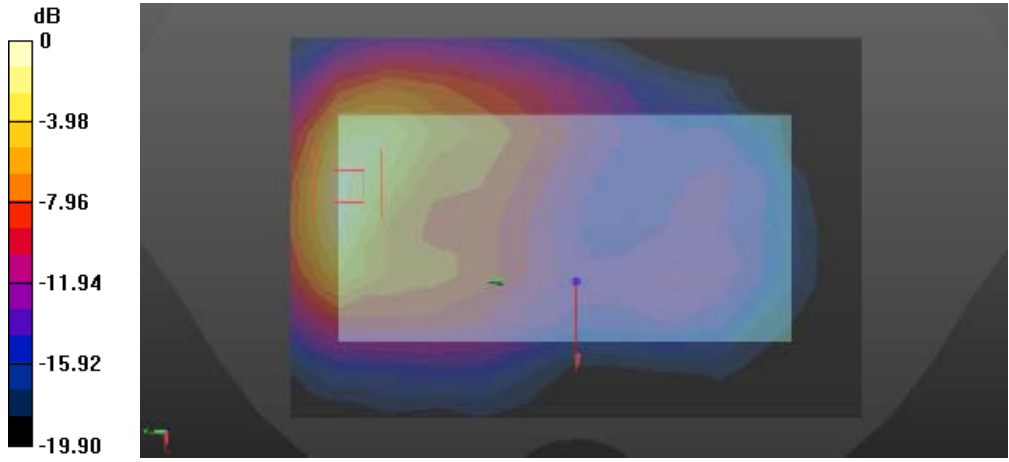
Left Side	Tilt
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Left Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Left HSL 1900/1900GSM HSL tilt M/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.0360 W/kg Head-Section Left HSL 1900/1900GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 4.317 V/m; Power Drift = 1.39 dB Peak SAR (extrapolated) = 0.0640 W/kg SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.023 W/kg Maximum value of SAR (measured) = 0.0410 W/kg 0 dB = 0.0410 W/kg = -13.87 dBW/kg	

Right Side	Cheek
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Right HSL 1900/1900GSM HSL touch M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0914 W/kg Head-Section Right HSL 1900/1900GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.093 V/m; Power Drift = -0.21 dB Peak SAR (extrapolated) = 0.134 W/kg SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.049 W/kg Maximum value of SAR (measured) = 0.0926 W/kg  dB 0 -3.82 -7.64 -11.47 -15.29 -19.11 0 dB = $0.0926 \text{ W/kg} = -10.33 \text{ dBW/kg}$	

Right Side	Tilt
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Right HSL 1900/1900GSM HSL tilt M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0255 W/kg Head-Section Right HSL 1900/1900GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.759 V/m; Power Drift = -0.78 dB Peak SAR (extrapolated) = 0.0620 W/kg SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.018 W/kg Maximum value of SAR (measured) = 0.0364 W/kg  0 dB = $0.0364 \text{ W/kg} = -14.39 \text{ dBW/kg}$	

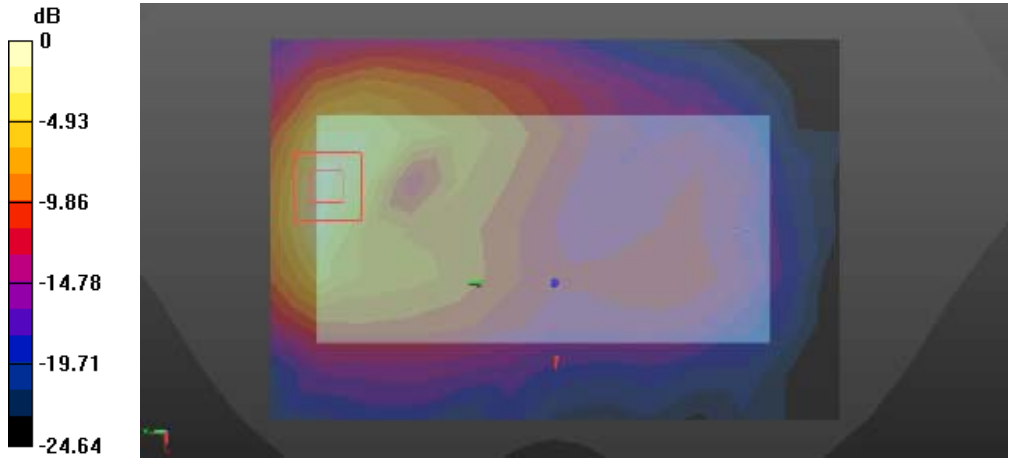
GSM with headset (1900MHz/Flat)

FLAT	Towards phantom
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL 1900 TP/1900GSM TP M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.355 W/kg Flat-Section MSL 1900 TP/1900GSM TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 3.595 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.583 W/kg SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.162 W/kg Maximum value of SAR (measured) = 0.353 W/kg	
 0 dB = 0.353 W/kg = -4.52 dBW/kg	

FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL 1900 TG/1900GSM TG M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.600 W/kg Flat-Section MSL 1900 TG/1900GSM TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.688 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 1.15 W/kg SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.292 W/kg Maximum value of SAR (measured) = 0.662 W/kg  0 dB = 0.662 W/kg = -1.79 dBW/kg	

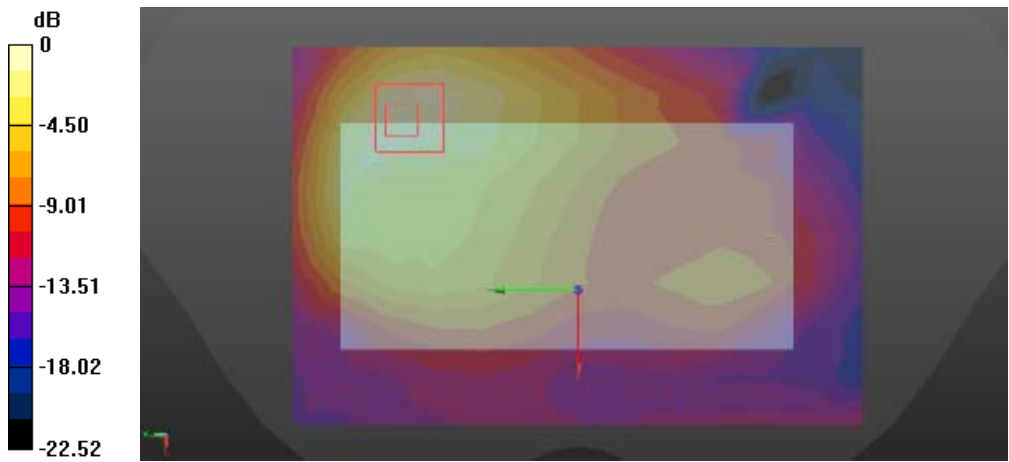
GSM (1900MHz with GPRS/Flat)

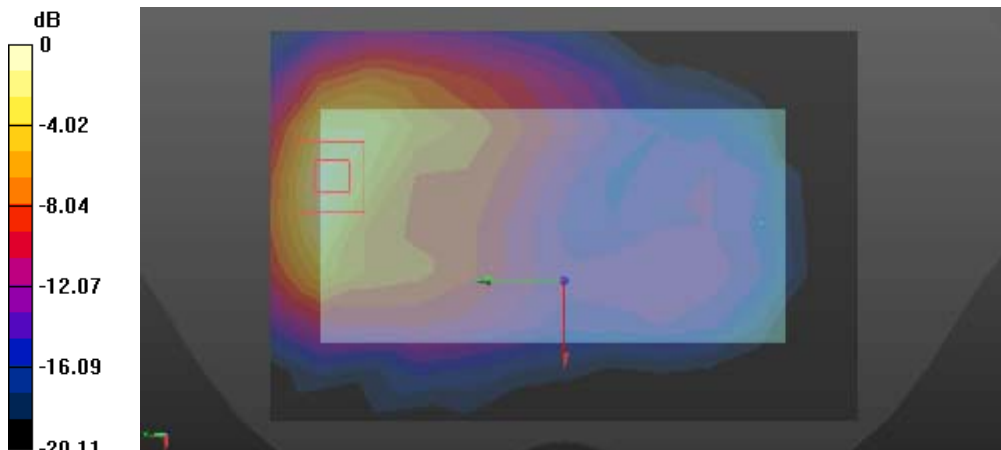
FLAT	Towards phantom
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL 1900 TP/1900GPRS TP M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.321 W/kg Flat-Section MSL 1900 TP/1900GPRS TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 3.853 V/m; Power Drift = -0.23 dB Peak SAR (extrapolated) = 0.517 W/kg SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.154 W/kg Maximum value of SAR (measured) = 0.337 W/kg 0 dB = 0.337 W/kg = -4.72 dBW/kg	

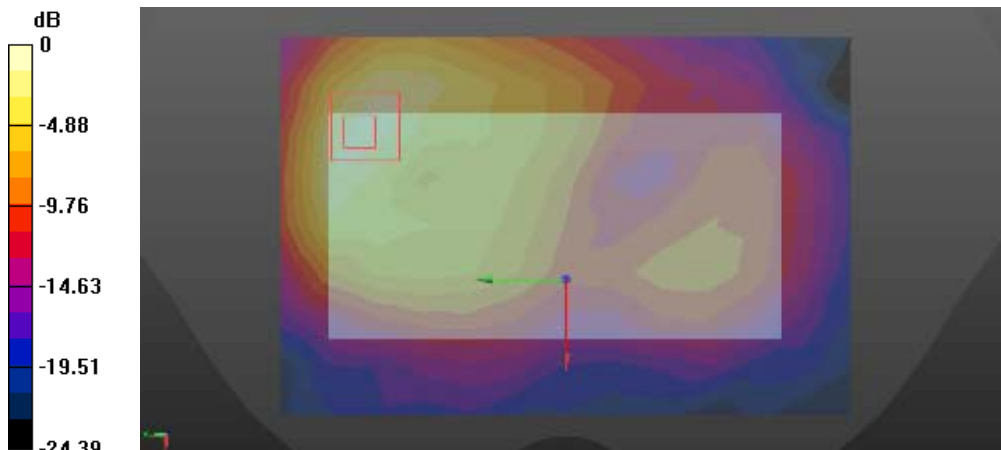
FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL 1900 TG/1900GPRS TG M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.592 W/kg Flat-Section MSL 1900 TG/1900GPRS TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 4.662 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.19 W/kg SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.293 W/kg Maximum value of SAR (measured) = 0.669 W/kg  0 dB = 0.669 W/kg = -1.75 dBW/kg	

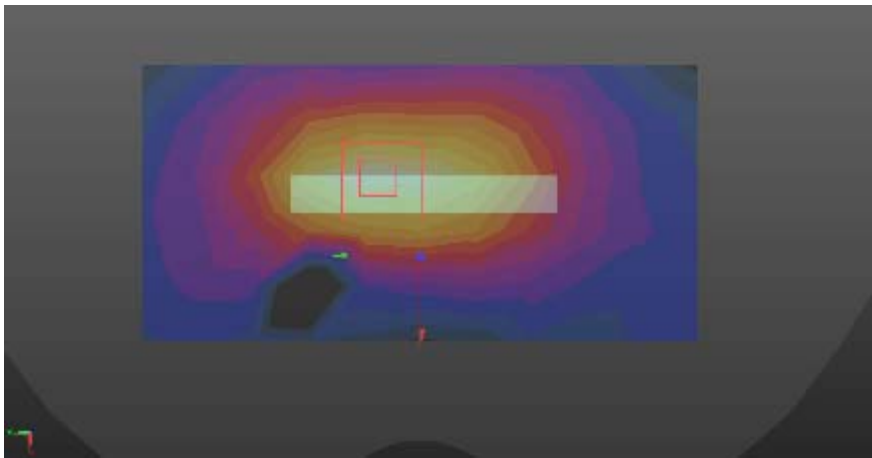
GSM (1900MHz with EGPRS/Flat)

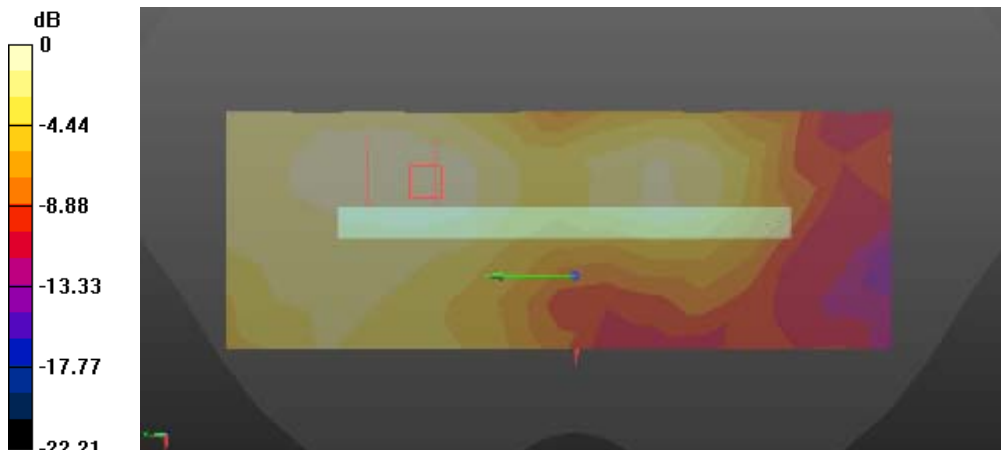
FLAT	Towards phantom
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL 1900 TP/1900EDGE TP M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.326 W/kg Flat-Section MSL 1900 TP/1900EDGE TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.883 V/m; Power Drift = -0.66 dB Peak SAR (extrapolated) = 0.520 W/kg SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.158 W/kg Maximum value of SAR (measured) = 0.337 W/kg 0 dB = 0.337 W/kg = -4.72 dBW/kg	

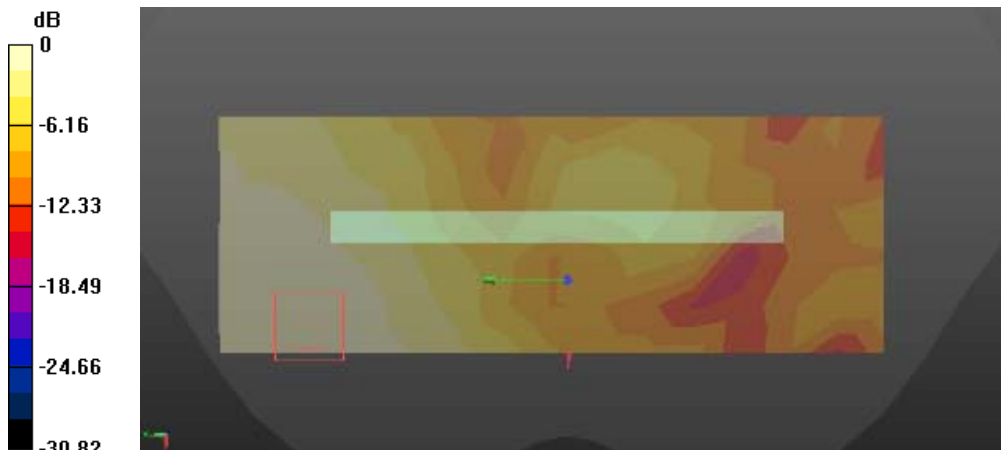
FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.87$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL 1900 TG/1900EDGE TG L 10mm/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.621 W/kg Flat-Section MSL 1900 TG/1900EDGE TG L 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 11.15 V/m; Power Drift = -2.81 dB Peak SAR (extrapolated) = 1.18 W/kg SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.350 W/kg Maximum value of SAR (measured) = 0.687 W/kg  0 dB = 0.687 W/kg = -1.63 dBW/kg	

FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL 1900 TG/1900EDGE TG M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.644 W/kg Flat-Section MSL 1900 TG/1900EDGE TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.698 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 1.28 W/kg SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.315 W/kg Maximum value of SAR (measured) = 0.716 W/kg  0 dB = 0.716 W/kg = -1.45 dBW/kg	

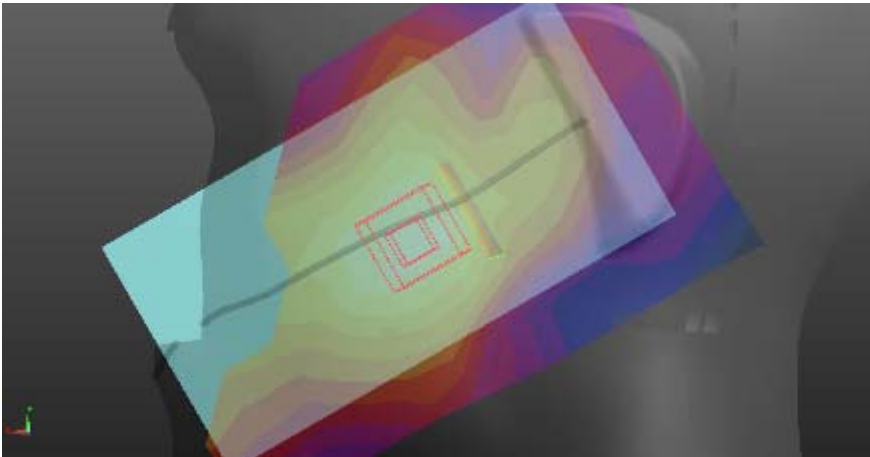
FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL 1900 TG/1900EDGE TG H 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.513 W/kg Flat-Section MSL 1900 TG/1900EDGE TG H 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.344 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 1.03 W/kg SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.260 W/kg Maximum value of SAR (measured) = 0.579 W/kg  0 dB = 0.579 W/kg = -2.37 dBW/kg	

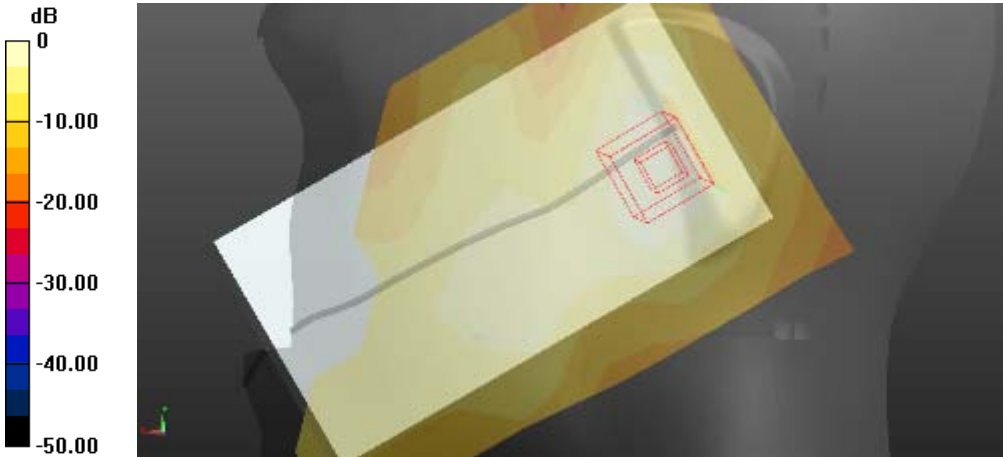
FLAT	EDGE2
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL EGPRS1900 HOT/1900GPRS TP H edge 2/Area Scan (6x11x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.569 W/kg Flat-Section MSL EGPRS1900 HOT/1900GPRS TP H edge 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 16.70 V/m; Power Drift = 0.24 dB Peak SAR (extrapolated) = 0.944 W/kg SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.253 W/kg dB 0 -4.00 -8.00 -12.01 -16.01 -20.01  0 dB = 0.569 W/kg = -2.45 dBW/kg	

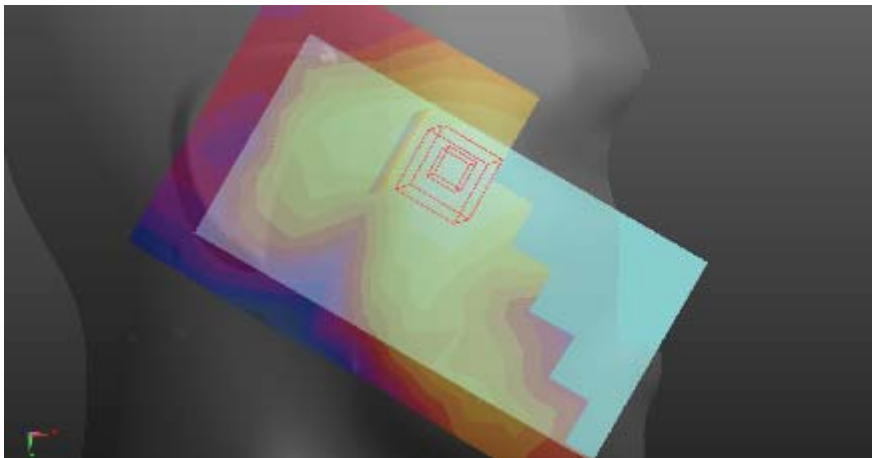
FLAT	EDGE3
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL EGPRS1900 HOT/1900EGPRS TP M edge 3/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0360 W/kg Flat-Section MSL EGPRS1900 HOT/1900EGPRS TP M edge 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.174 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 0.0690 W/kg SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.022 W/kg Maximum value of SAR (measured) = 0.0398 W/kg  0 dB = 0.0398 W/kg = -14.00 dBW/kg	

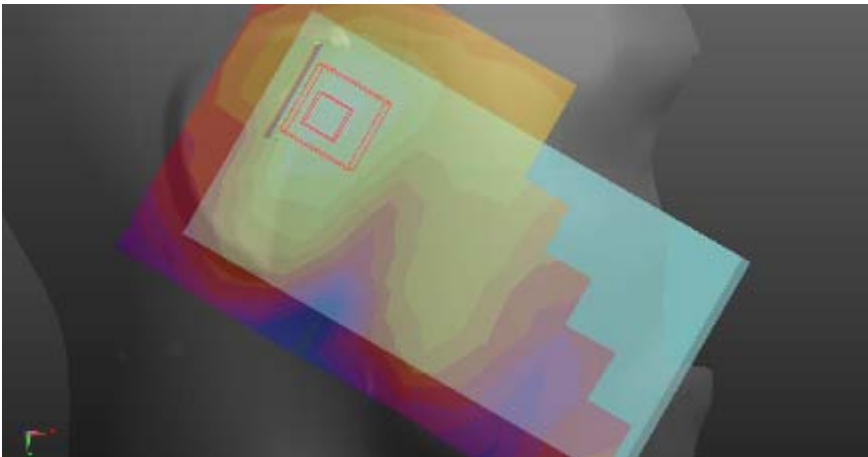
FLAT	EDGE4
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 11/10/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -4.0, 31.0$ - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL EGPRS1900 HOT/1900EGPRS TP M edge 4/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0293 W/kg Flat-Section MSL EGPRS1900 HOT/1900EGPRS TP M edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.897 V/m; Power Drift = 0.48 dB Peak SAR (extrapolated) = 0.0480 W/kg SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.018 W/kg Maximum value of SAR (measured) = 0.0332 W/kg  0 dB = 0.0332 W/kg = -14.79 dBW/kg	

LTE (Band 7 20BW-1RB-Low/Head)

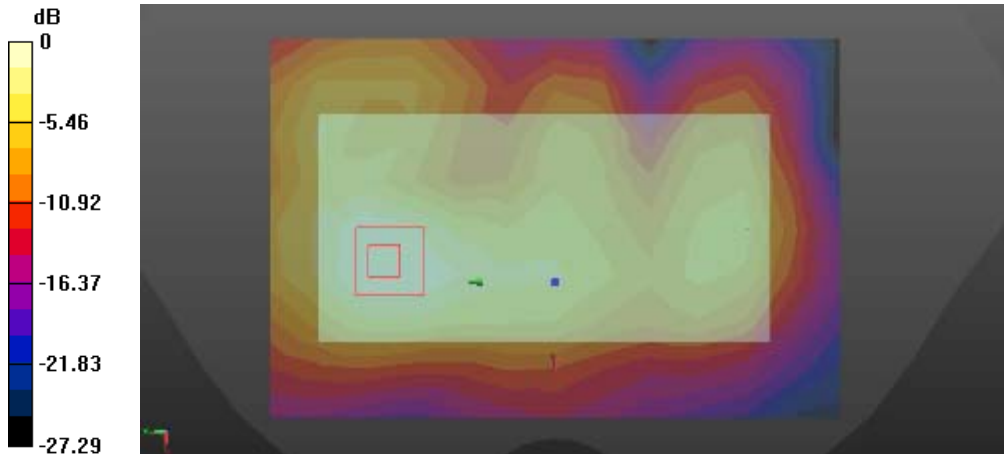
Left Side	Cheek
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³ Phantom section: Left Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Left HSL LTE band41/LTE band41 1RB LOW HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.244 W/kg Head-Section Left HSL LTE band41/LTE band41 1RB LOW HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 3.478 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.535 W/kg SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.123 W/kg Maximum value of SAR (measured) = 0.287 W/kg dB 0 -5.42 -10.84 -16.27 -21.69 -27.11  0 dB = 0.287 W/kg = -5.42 dBW/kg	

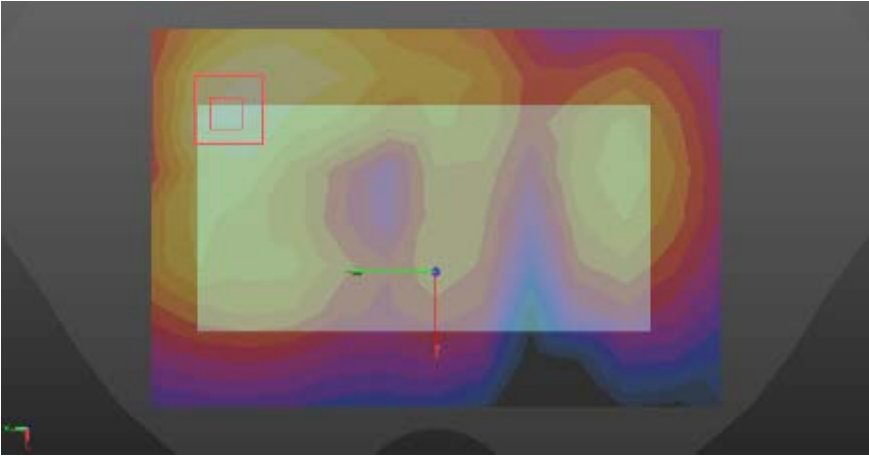
Left Side	Tilt
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³ Phantom section: Left Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Left HSL LTE band41/LTE band41 1RB LOW HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.148 W/kg Head-Section Left HSL LTE band41/LTE band41 1RB LOW HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 8.318 V/m; Power Drift = -0.23 dB Peak SAR (extrapolated) = 0.290 W/kg SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.069 W/kg Maximum value of SAR (measured) = 0.152 W/kg  0 dB = 0.152 W/kg = -8.18 dBW/kg	

Right Side	Cheek
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Right HSL LTE band41/LTE band41 1RB LOW HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.156 W/kg Head-Section Right HSL LTE band41/LTE band41 1RB LOW HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 3.002 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.283 W/kg SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.075 W/kg Maximum value of SAR (measured) = 0.161 W/kg dB 0 -5.32 -10.64 -15.96 -21.28 -26.60  0 dB = 0.161 W/kg = -7.93 dBW/kg	

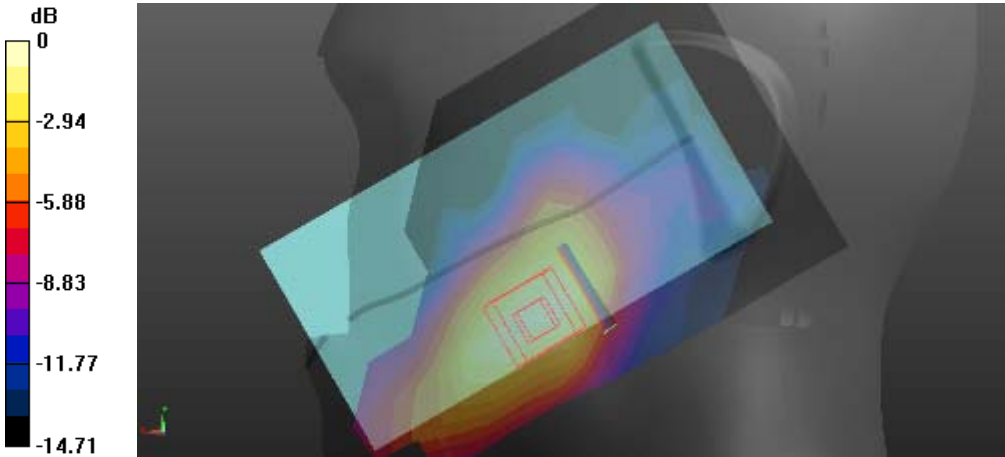
Right Side	Tilt
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Right HSL LTE band41/LTE band41 1RB LOW HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.203 W/kg Head-Section Right HSL LTE band41/LTE band41 1RB LOW HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 7.534 V/m; Power Drift = 0.32 dB Peak SAR (extrapolated) = 0.385 W/kg SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.085 W/kg Maximum value of SAR (measured) = 0.201 W/kg dB 0 -6.27 -12.54 -18.81 -25.08 -31.35  0 dB = 0.201 W/kg = -6.97 dBW/kg	

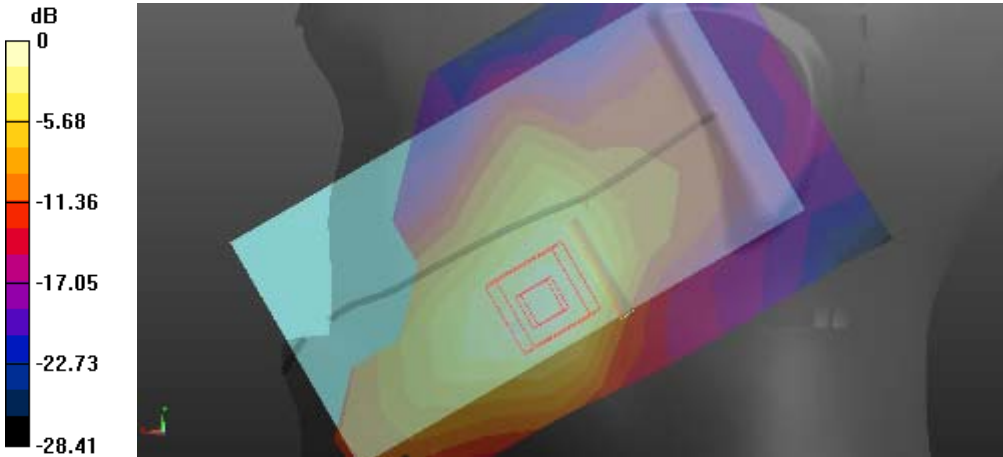
LTE (Band 7 20BW-1RB-Low/Flat)

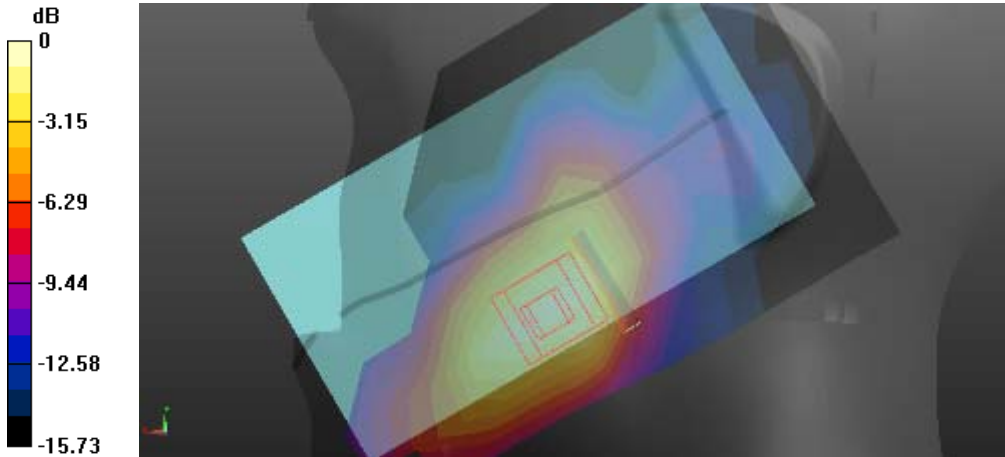
FLAT	Towards phantom
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 2.09$ S/m; $\epsilon_r = 50.49$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL LTE band41 TP/LTE band41 1RB LOW TP M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.402 W/kg Flat-Section MSL LTE band41 TP/LTE band41 1RB LOW TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 7.942 V/m; Power Drift = -0.57 dB Peak SAR (extrapolated) = 0.696 W/kg SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.164 W/kg Maximum value of SAR (measured) = 0.360 W/kg  0 dB = 0.360 W/kg = -4.44 dBW/kg	

FLAT	Towards ground
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 2.09$ S/m; $\epsilon_r = 50.49$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL LTE band41 TG/LTE band41 1RB LOW TG M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.320 W/kg Flat-Section MSL LTE band41 TG/LTE band41 1RB LOW TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 4.667 V/m; Power Drift = 0.24 dB Peak SAR (extrapolated) = 1.00 W/kg SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.190 W/kg Maximum value of SAR (measured) = 0.469 W/kg dB 0 -5.75 -11.49 -17.24 -22.98 -28.73  0 dB = 0.469 W/kg = -3.29 dBW/kg	

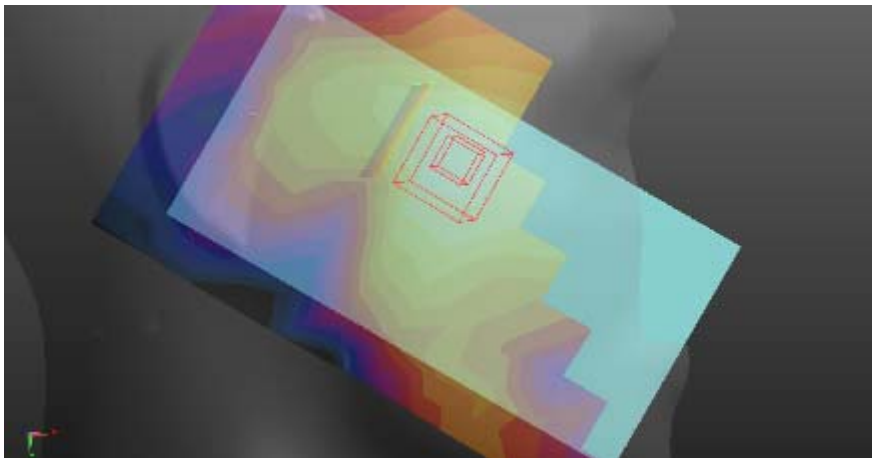
LTE (Band 7 20BW-50RB-Low/Head)

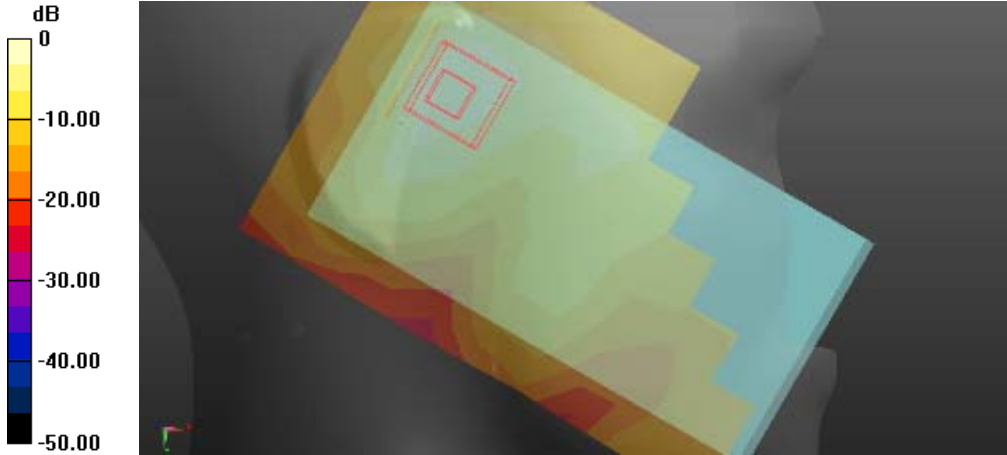
Left Side	Cheek
Communication System: UID 0, Lte band41 (0); Frequency: 2555 MHz Medium parameters used: $f = 2555 \text{ MHz}$; $\sigma = 1.95 \text{ S/m}$; $\epsilon_r = 37.7$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Left HSL LTE band41/LTE band41 50RB LOW HSL touch L/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.119 W/kg Head-Section Left HSL LTE band41/LTE band41 50RB LOW HSL touch L/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.131 V/m; Power Drift = 0.26 dB Peak SAR (extrapolated) = 0.229 W/kg SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.059 W/kg Maximum value of SAR (measured) = 0.124 W/kg  0 dB = 0.124 W/kg = -9.07 dBW/kg	

Left Side	Cheek
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³ Phantom section: Left Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Left HSL LTE band41/LTE band41 50RB LOW HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.334 W/kg Head-Section Left HSL LTE band41/LTE band41 50RB LOW HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 2.820 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 0.646 W/kg SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.150 W/kg Maximum value of SAR (measured) = 0.343 W/kg  0 dB = 0.343 W/kg = -4.65 dBW/kg	

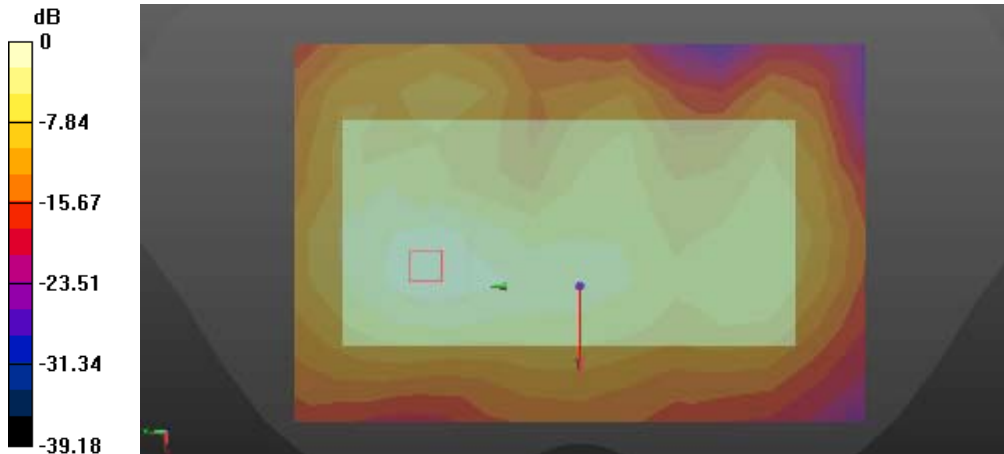
Left Side	Cheek
Communication System: UID 0, Lte band41 (0); Frequency: 2585 MHz Medium parameters used: $f = 2585 \text{ MHz}$; $\sigma = 1.95 \text{ S/m}$; $\epsilon_r = 37.7$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Left HSL LTE band41/LTE band41 50RB LOW HSL touch H/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.157 W/kg Head-Section Left HSL LTE band41/LTE band41 50RB LOW HSL touch H/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.690 V/m; Power Drift = 0.57 dB Peak SAR (extrapolated) = 0.305 W/kg SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.077 W/kg Maximum value of SAR (measured) = 0.163 W/kg  0 dB = 0.163 W/kg = -7.88 dBW/kg	

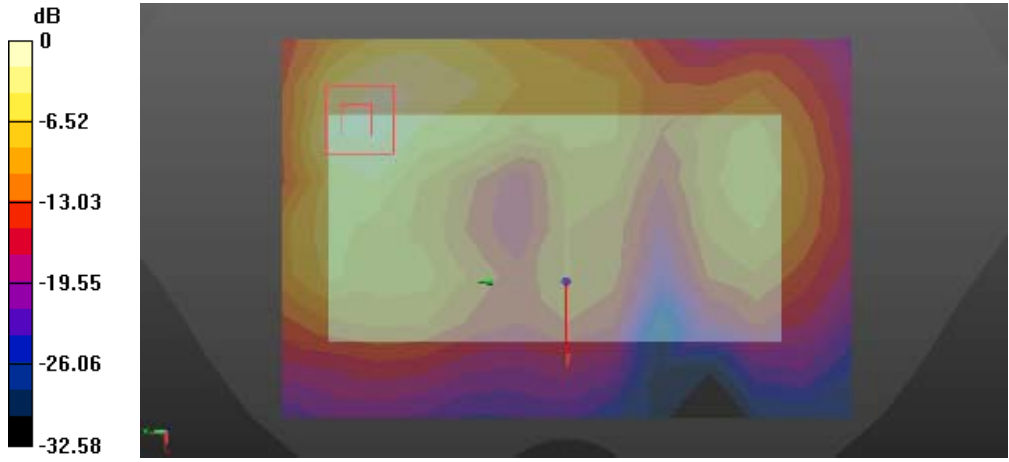
Left Side	Tilt
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³ Phantom section: Left Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Left HSL LTE band41/LTE band41 50RB LOW HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.115 W/kg Head-Section Left HSL LTE band41/LTE band41 50RB LOW HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 7.558 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.216 W/kg SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.051 W/kg Maximum value of SAR (measured) = 0.114 W/kg 0 dB = 0.114 W/kg = -9.43 dBW/kg	

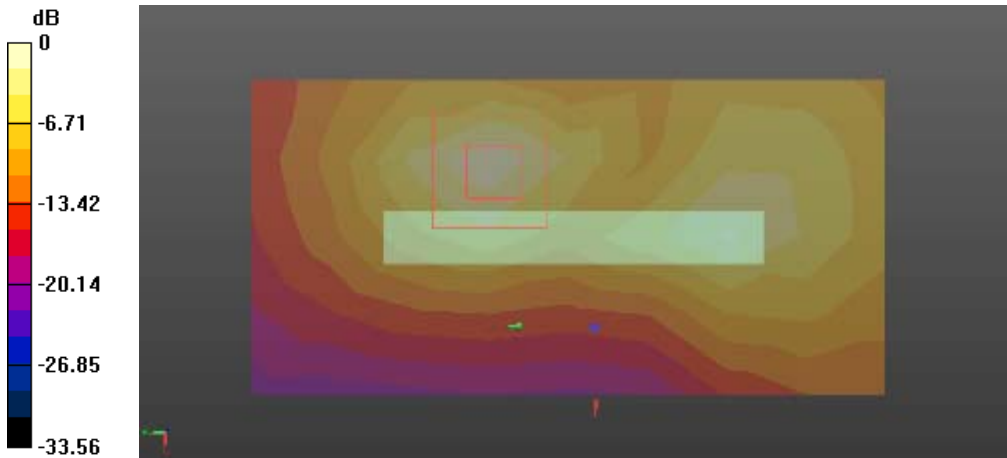
Right Side	Cheek
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Right HSL LTE band41/LTE band41 50RB LOW HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.116 W/kg Head-Section Right HSL LTE band41/LTE band41 50RB LOW HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 2.439 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.235 W/kg SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.064 W/kg Maximum value of SAR (measured) = 0.137 W/kg dB 0 -5.08 -10.16 -15.23 -20.31 -25.39  0 dB = 0.137 W/kg = -8.63 dBW/kg	

Right Side	Tilt
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Head-Section Right HSL LTE band41/LTE band41 50RB LOW HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.153 W/kg Head-Section Right HSL LTE band41/LTE band41 50RB LOW HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 6.770 V/m; Power Drift = -0.14 dB Peak SAR (extrapolated) = 0.287 W/kg SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.064 W/kg  0 dB = 0.153 W/kg = -8.15 dBW/kg	

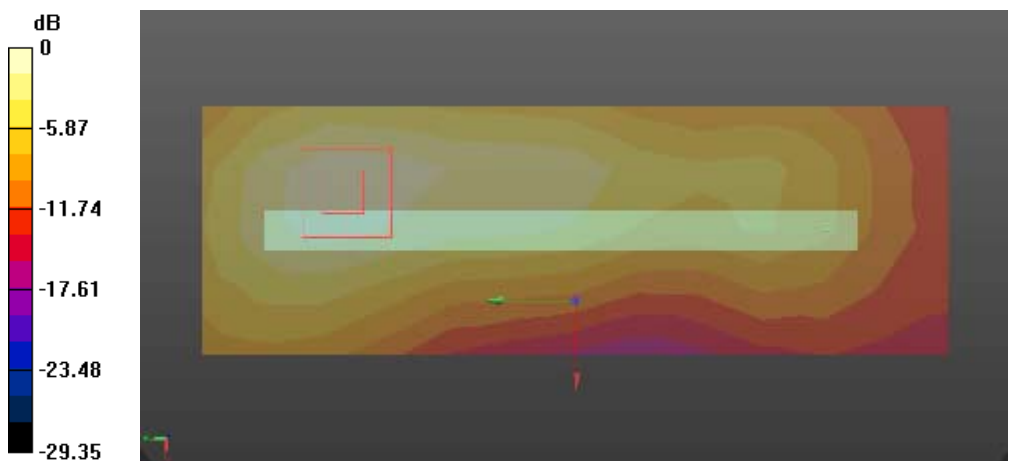
LTE (Band 7 20BW-50RB-Low/Flat)

FLAT	Towards phantom
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 2.09$ S/m; $\epsilon_r = 50.49$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL LTE band41 TP/LTE band41 50RB LOW TP M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.289 W/kg Flat-Section MSL LTE band41 TP/LTE band41 50RB LOW TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 6.675 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.625 W/kg SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.143 W/kg Maximum value of SAR (measured) = 0.316 W/kg  0 dB = 0.316 W/kg = -5.00 dBW/kg	

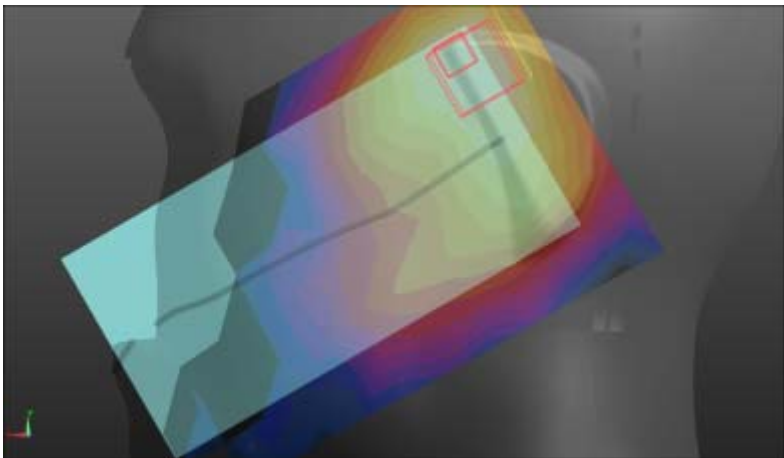
FLAT	Towards ground
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 2.09$ S/m; $\epsilon_r = 50.49$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL LTE band41 TG/LTE band41 50RB LOW TG M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.331 W/kg Flat-Section MSL LTE band41 TG/LTE band41 50RB LOW TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 4.292 V/m; Power Drift = 0.27 dB Peak SAR (extrapolated) = 1.03 W/kg SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.191 W/kg Maximum value of SAR (measured) = 0.473 W/kg  0 dB = 0.473 W/kg = -3.25 dBW/kg	

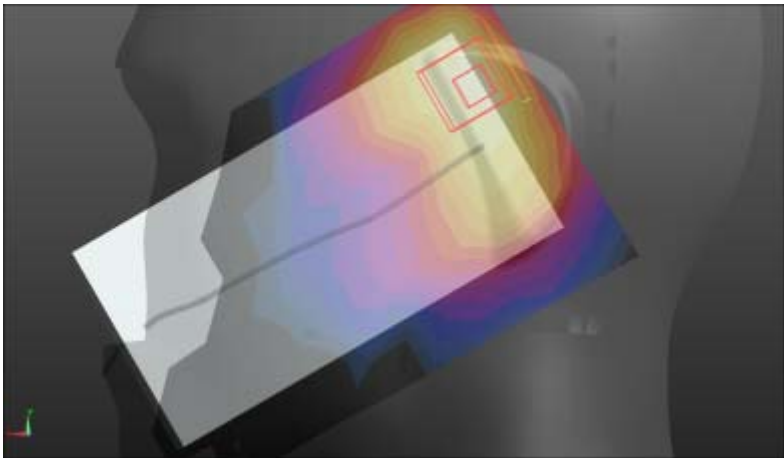
FLAT	EDGE2
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 2.09$ S/m; $\epsilon_r = 50.49$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL LTE band41 HOT/LTE Band41 edge2/Area Scan (5x9x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.563 W/kg Flat-Section MSL LTE band41 HOT/LTE Band41 edge2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 5.961 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 1.17 W/kg SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.204 W/kg Maximum value of SAR (measured) = 0.572 W/kg  0 dB = 0.572 W/kg = -2.43 dBW/kg	

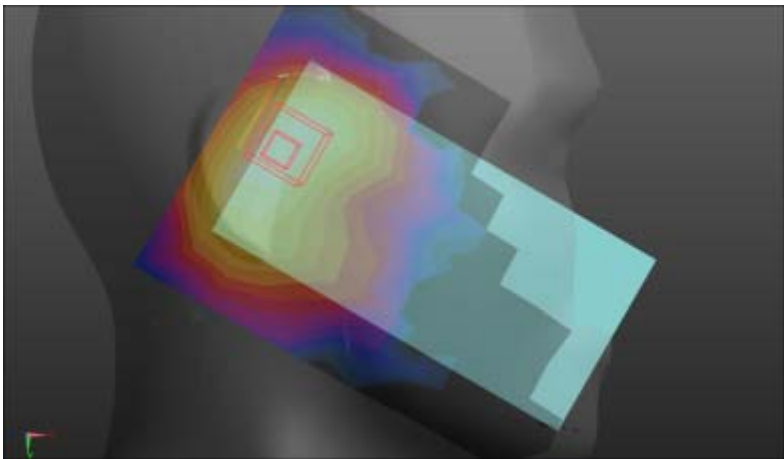
FLAT	EDGE3
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 2.09$ S/m; $\epsilon_r = 50.49$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL LTE band41 HOT/LTE Band41 edge3/Area Scan (5x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.0839 W/kg Flat-Section MSL LTE band41 HOT/LTE Band41 edge3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 3.289 V/m; Power Drift = 0.33 dB Peak SAR (extrapolated) = 0.162 W/kg SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.040 W/kg Maximum value of SAR (measured) = 0.0841 W/kg  0 dB = 0.0841 W/kg = -10.75 dBW/kg	

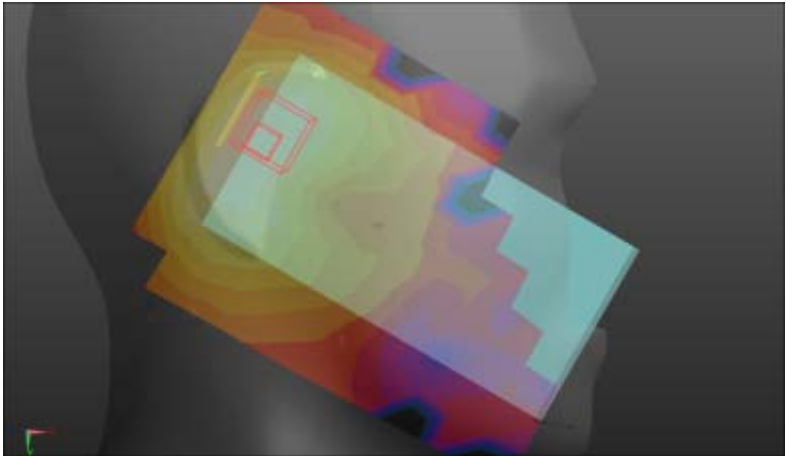
FLAT	EDGE4
Communication System: UID 0, Lte band41 (0); Frequency: 2570 MHz Medium parameters used: $f = 2570$ MHz; $\sigma = 2.09$ S/m; $\epsilon_r = 50.49$; $\rho = 1000$ kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -3.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373) Flat-Section MSL LTE band41 HOT/LTE Band41 edge4/Area Scan (5x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.324 W/kg Flat-Section MSL LTE band41 HOT/LTE Band41 edge4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 8.509 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.755 W/kg SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.170 W/kg Maximum value of SAR (measured) = 0.368 W/kg  0 dB = 0.368 W/kg = -4.34 dBW/kg	

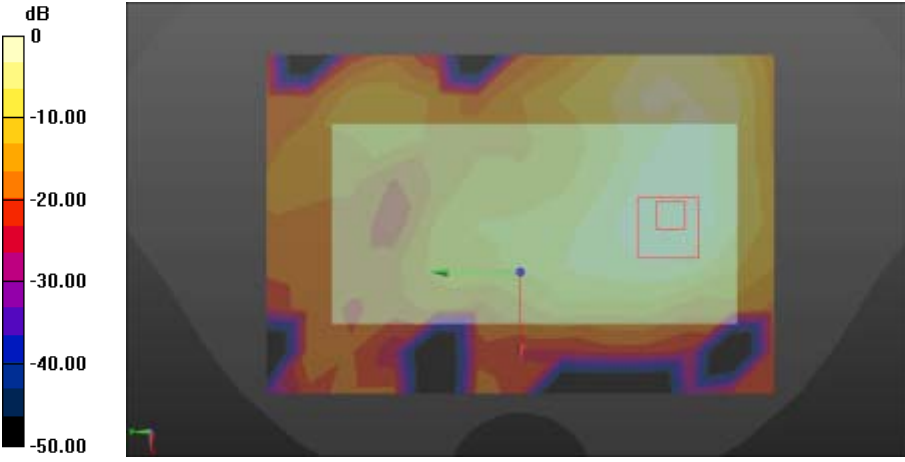
WLAN

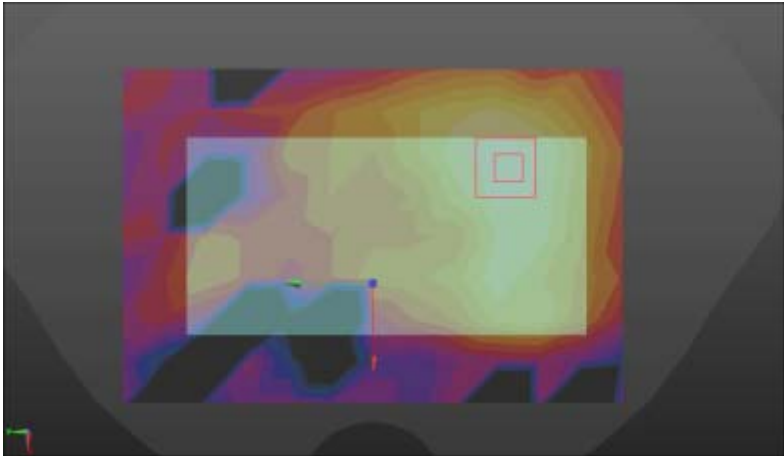
Left Side	Cheek
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz;Duty Cycle: 1:1.53815 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.021$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.61, 4.61, 4.61); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Left HSL WIFI/WIFI touch M/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.127 W/kg Head-Section Left HSL WIFI/WIFI touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.235 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.416 W/kg SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.160 W/kg Maximum value of SAR (measured) = 0.241 W/kg dB 0 -6.68 -13.35 -20.03 -26.70 -33.38  0 dB = 0.241 W/kg = -6.18 dBW/kg	

Left Side	Tilt
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz;Duty Cycle: 1:1.53815 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.021$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.61, 4.61, 4.61); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Left HSL WIFI/WIFI tilt M/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.337 W/kg Head-Section Left HSL WIFI/WIFI tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 8.231 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.610 W/kg SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.104 W/kg Maximum value of SAR (measured) = 0.301 W/kg dB 0 -5.58 -11.17 -16.75 -22.34 -27.92  0 dB = 0.301 W/kg = -5.21 dBW/kg	

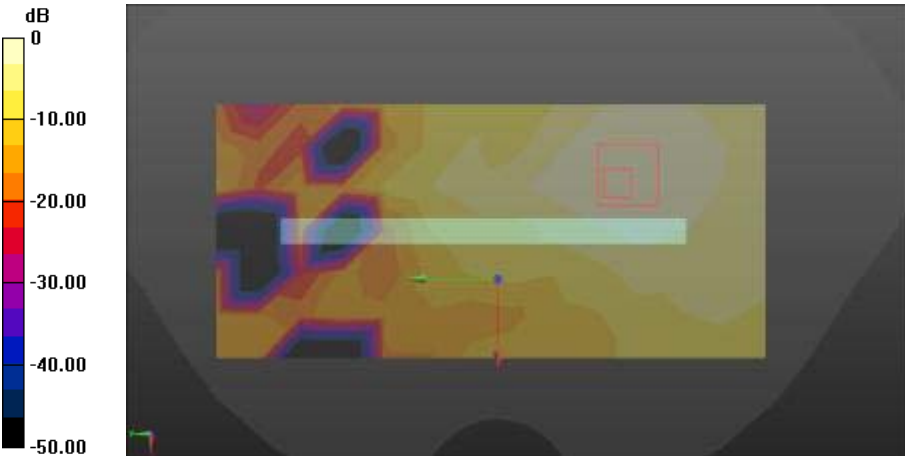
Right Side	Cheek
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz;Duty Cycle: 1:1.53815 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.021$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.61, 4.61, 4.61); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Right HSL WIFI/WIFI touch M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0821 W/kg Head-Section Right HSL WIFI/WIFI touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.441 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.123 W/kg SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.041 W/kg Maximum value of SAR (measured) = 0.0952 W/kg dB 0 -4.85 -9.69 -14.54 -19.38 -24.23  0 dB = 0.0952 W/kg = -10.21 dBW/kg	

Right Side	Tilt
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz;Duty Cycle: 1:1.53815 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.021$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.61, 4.61, 4.61); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Right HSL WIFI/WIFI tilt M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0991 W/kg Head-Section Right HSL WIFI/WIFI tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 8.291 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.314 W/kg SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.039 W/kg Maximum value of SAR (measured) = 0.0872 W/kg dB 0 -10.00 -20.00 -30.00 -40.00 -50.00  0 dB = 0.0872 W/kg = -10.59 dBW/kg	

FLAT	Towards phantom
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz;Duty Cycle: 1:1.53815 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 50.739$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.36, 4.36, 4.36); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL WIFI TP/WIFI TP M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0741 W/kg Flat-Section MSL WIFI TP/WIFI TP M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.060 V/m; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.0886 W/kg SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.034 W/kg Maximum value of SAR (measured) = 0.0491 W/kg  0 dB = 0.0491 W/kg = -13.09 dBW/kg	

FLAT	Towards ground
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz;Duty Cycle: 1:1.53815 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 50.739$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.36, 4.36, 4.36); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSLWIFI TG/WIF TG M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0619 W/kg Flat-Section MSLWIFI TG/WIF TG M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.170 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.0960 W/kg SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.044 W/kg Maximum value of SAR (measured) = 0.0511 W/kg dB 0 -6.25 -12.50 -18.76 -25.01 -31.26  0 dB = 0.0511 W/kg = -12.92 dBW/kg	

FLAT	EDGE1
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz;Duty Cycle: 1:1.53815 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 50.739$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.36, 4.36, 4.36); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL WIFI HOTSPOT/WIF M edge 1/Area Scan (7x11x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.0612 W/kg Flat-Section MSL WIFI HOTSPOT/WIF M edge 1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 3.177 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.0771 W/kg SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.040 W/kg Maximum value of SAR (measured) = 0.0435 W/kg 0 dB = 0.0435 W/kg = -13.62 dBW/kg	

FLAT	EDGE4
Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz;Duty Cycle: 1:1.53815 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 50.739$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.36, 4.36, 4.36); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL WIFI HOTSPOT/WIF M edge 4/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0725 W/kg Flat-Section MSL WIFI HOTSPOT/WIF M edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.2120 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.0370 W/kg SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.00982 W/kg Maximum value of SAR (measured) = 0.0449 W/kg  0 dB = 0.0449 W/kg = -13.48 dBW/kg	

ANNEX B - RELEVANT PAGES FROM CALIBRATION REPORTS

DAE4 Sn:546

Calibration Laboratory of
Schmidt & Partner
Engineering AG
Bühlstrasse 10, 8004 Zurich, Switzerland

Accreditation No.: SCS 0108

Client: SRTC (FHAG) Certificate No: DAE4-546_Aug16

CALIBRATION CERTIFICATE

Object: DAE4 - 00-000 D04 000 - SRQ 546

Calibration procedure: DA-CAL-06.v09
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: August 22, 2016

This calibration certificate documents the possibility to deliver standards, which define the physical units of measurement (SI). The measurement and the associated self-confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the calibration laboratory facility environment (temperature 22 ± 0.5 °C and humidity < 10%).

Calibration program used: 2017.11 version for calibration

Primary Standards	Calibration Date	Calibration Date	Calibration Date
Primary Standard: 10-01	10-01	10-01	10-01
Secondary Standard: 10-02	10-02	10-02	10-02
Secondary Standard: 10-03	10-03	10-03	10-03
Secondary Standard: 10-04	10-04	10-04	10-04
Secondary Standard: 10-05	10-05	10-05	10-05
Secondary Standard: 10-06	10-06	10-06	10-06
Secondary Standard: 10-07	10-07	10-07	10-07
Secondary Standard: 10-08	10-08	10-08	10-08
Secondary Standard: 10-09	10-09	10-09	10-09
Secondary Standard: 10-10	10-10	10-10	10-10
Secondary Standard: 10-11	10-11	10-11	10-11
Secondary Standard: 10-12	10-12	10-12	10-12
Secondary Standard: 10-13	10-13	10-13	10-13
Secondary Standard: 10-14	10-14	10-14	10-14
Secondary Standard: 10-15	10-15	10-15	10-15
Secondary Standard: 10-16	10-16	10-16	10-16
Secondary Standard: 10-17	10-17	10-17	10-17
Secondary Standard: 10-18	10-18	10-18	10-18
Secondary Standard: 10-19	10-19	10-19	10-19
Secondary Standard: 10-20	10-20	10-20	10-20
Secondary Standard: 10-21	10-21	10-21	10-21
Secondary Standard: 10-22	10-22	10-22	10-22
Secondary Standard: 10-23	10-23	10-23	10-23
Secondary Standard: 10-24	10-24	10-24	10-24
Secondary Standard: 10-25	10-25	10-25	10-25
Secondary Standard: 10-26	10-26	10-26	10-26
Secondary Standard: 10-27	10-27	10-27	10-27
Secondary Standard: 10-28	10-28	10-28	10-28
Secondary Standard: 10-29	10-29	10-29	10-29
Secondary Standard: 10-30	10-30	10-30	10-30
Secondary Standard: 10-31	10-31	10-31	10-31
Secondary Standard: 10-32	10-32	10-32	10-32
Secondary Standard: 10-33	10-33	10-33	10-33
Secondary Standard: 10-34	10-34	10-34	10-34
Secondary Standard: 10-35	10-35	10-35	10-35
Secondary Standard: 10-36	10-36	10-36	10-36
Secondary Standard: 10-37	10-37	10-37	10-37
Secondary Standard: 10-38	10-38	10-38	10-38
Secondary Standard: 10-39	10-39	10-39	10-39
Secondary Standard: 10-40	10-40	10-40	10-40
Secondary Standard: 10-41	10-41	10-41	10-41
Secondary Standard: 10-42	10-42	10-42	10-42
Secondary Standard: 10-43	10-43	10-43	10-43
Secondary Standard: 10-44	10-44	10-44	10-44
Secondary Standard: 10-45	10-45	10-45	10-45
Secondary Standard: 10-46	10-46	10-46	10-46
Secondary Standard: 10-47	10-47	10-47	10-47
Secondary Standard: 10-48	10-48	10-48	10-48
Secondary Standard: 10-49	10-49	10-49	10-49
Secondary Standard: 10-50	10-50	10-50	10-50
Secondary Standard: 10-51	10-51	10-51	10-51
Secondary Standard: 10-52	10-52	10-52	10-52
Secondary Standard: 10-53	10-53	10-53	10-53
Secondary Standard: 10-54	10-54	10-54	10-54
Secondary Standard: 10-55	10-55	10-55	10-55
Secondary Standard: 10-56	10-56	10-56	10-56
Secondary Standard: 10-57	10-57	10-57	10-57
Secondary Standard: 10-58	10-58	10-58	10-58
Secondary Standard: 10-59	10-59	10-59	10-59
Secondary Standard: 10-60	10-60	10-60	10-60
Secondary Standard: 10-61	10-61	10-61	10-61
Secondary Standard: 10-62	10-62	10-62	10-62
Secondary Standard: 10-63	10-63	10-63	10-63
Secondary Standard: 10-64	10-64	10-64	10-64
Secondary Standard: 10-65	10-65	10-65	10-65
Secondary Standard: 10-66	10-66	10-66	10-66
Secondary Standard: 10-67	10-67	10-67	10-67
Secondary Standard: 10-68	10-68	10-68	10-68
Secondary Standard: 10-69	10-69	10-69	10-69
Secondary Standard: 10-70	10-70	10-70	10-70
Secondary Standard: 10-71	10-71	10-71	10-71
Secondary Standard: 10-72	10-72	10-72	10-72
Secondary Standard: 10-73	10-73	10-73	10-73
Secondary Standard: 10-74	10-74	10-74	10-74
Secondary Standard: 10-75	10-75	10-75	10-75
Secondary Standard: 10-76	10-76	10-76	10-76
Secondary Standard: 10-77	10-77	10-77	10-77
Secondary Standard: 10-78	10-78	10-78	10-78
Secondary Standard: 10-79	10-79	10-79	10-79
Secondary Standard: 10-80	10-80	10-80	10-80
Secondary Standard: 10-81	10-81	10-81	10-81
Secondary Standard: 10-82	10-82	10-82	10-82
Secondary Standard: 10-83	10-83	10-83	10-83
Secondary Standard: 10-84	10-84	10-84	10-84
Secondary Standard: 10-85	10-85	10-85	10-85
Secondary Standard: 10-86	10-86	10-86	10-86
Secondary Standard: 10-87	10-87	10-87	10-87
Secondary Standard: 10-88	10-88	10-88	10-88
Secondary Standard: 10-89	10-89	10-89	10-89
Secondary Standard: 10-90	10-90	10-90	10-90
Secondary Standard: 10-91	10-91	10-91	10-91
Secondary Standard: 10-92	10-92	10-92	10-92
Secondary Standard: 10-93	10-93	10-93	10-93
Secondary Standard: 10-94	10-94	10-94	10-94
Secondary Standard: 10-95	10-95	10-95	10-95
Secondary Standard: 10-96	10-96	10-96	10-96
Secondary Standard: 10-97	10-97	10-97	10-97
Secondary Standard: 10-98	10-98	10-98	10-98
Secondary Standard: 10-99	10-99	10-99	10-99
Secondary Standard: 10-100	10-100	10-100	10-100

Calibration No: DAE4-546_Aug16 Page 1 of 5

Calibration Laboratory of
Schmidt & Partner
Engineering AG
Bühlstrasse 10, 8004 Zurich, Switzerland

Accreditation No.: SCS 0108

Client: SRTC (FHAG) Certificate No: DAE4-546_Aug16

Glossary

DAE: data acquisition electronics
Connector angle: information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
- DC Voltage Measurement Uncertainty: Verification of the Uncertainty at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
- Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
- Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
- AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage.
- Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
- Input Offset Current: Typical value for information. Maximum channel input offset current, not considering the input resistance.
- Input resistance: Typical value for information. DAE input resistance of the connector, during internal auto zeroing and during measurement.
- Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
- Power consumption: Typical value for information. Supply currents in various operating modes.

Calibration No: DAE4-546_Aug16 Page 2 of 5

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200031.74	-2.15	-0.00
Channel X + Input	20003.66	-0.75	-0.00
Channel X - Input	-20001.68	3.77	-0.02
Channel Y + Input	200021.10	-12.53	-0.01
Channel Y + Input	20002.22	-2.13	-0.01
Channel Y - Input	-20003.76	1.68	-0.01
Channel Z + Input	200025.91	-7.99	-0.00
Channel Z + Input	19999.97	-4.36	-0.02
Channel Z - Input	-20005.55	0.07	-0.00

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2000.62	-0.12	-0.01
Channel X + Input	201.00	0.23	0.11
Channel X - Input	-198.76	0.38	-0.19
Channel Y + Input	2000.36	-0.29	-0.01
Channel Y + Input	200.22	-0.57	-0.29
Channel Y - Input	-200.24	-0.93	0.47
Channel Z + Input	2000.61	0.13	0.01
Channel Z + Input	199.06	-1.52	-0.76
Channel Z - Input	-201.43	-1.99	1.00

2. Common mode sensitivity

Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X		
200	1.49	0.15
-200	1.41	-0.23
Channel Y		
200	-0.40	-0.13
-200	-1.08	-1.50
Channel Z		
200	9.19	2.17
-200	-4.93	-4.90

3. Channel separation

Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X			
200	-	-3.01	-3.43
Channel Y			
200	9.77	-	-1.00
Channel Z			
200	5.39	7.02	-

Certificate No: DAE4-546_Aug16

Page 4 of 5

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15845	15442
Channel Y	16150	14493
Channel Z	15907	16531

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input (mV)	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	1.22	0.21	1.94	0.35
Channel Y	0.27	-1.07	1.43	0.50
Channel Z	-0.65	-1.46	0.11	0.35

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (MΩ)	Measuring (MΩ)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Voc)	+7.9
Supply (- Voc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Voc)	+0.01	+6	+14
Supply (- Voc)	-0.01	-6	-9

Certificate No: DAE4-546_Aug16

Page 5 of 5

DAE4 Sn:546

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15845	16442
Channel Y	16150	14493
Channel Z	15907	16531

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	1.22	0.21	1.94	0.35
Channel Y	0.27	-1.07	1.43	0.50
Channel Z	-0.65	-1.46	0.11	0.35

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25IA

7. Input Resistance (Typical values for information)

	Zeroing (KOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Voc)	+7.9
Supply (- Voc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Voc)	+0.01	+6	+14
Supply (- Voc)	-0.01	-6	-9

Certificate No: DAE4-546_Aug16

Page 5 of 5

DAE4 Sn:720

Calibration Laboratory of
Sofnol & Partner
Engineering AG
Bergheimstrasse 15, 8000 Zurich, Switzerland

Accreditation No.: BCB 9106

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is also an official signatory to the ISO
Mutual Recognition Agreement for the recognition of calibration certificates

Client: SRTC (VWS) Article No: DAE4-720_S016

CALIBRATION CERTIFICATE

Item: DAE4 - 10-000 104 889 - 546-720

Calibration procedure: G&S GAL-DE-009
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: October 31, 2016

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environmental temperature (20 ± 0.5) °C, and humidity < 75%.

Calibration of equipment used (EN 17025) verified by calibration:

Primary Standards	1.1.1.1	1.1.1.2	1.1.1.3
Reference Standards	1.1.1.1	1.1.1.2	1.1.1.3
Reference Standards	1.1.1.1	1.1.1.2	1.1.1.3
Reference Standards	1.1.1.1	1.1.1.2	1.1.1.3

Calibrated by: [Signature]
Reviewed by: [Signature]
Approved by: [Signature]

This calibration certificate shall not be reproduced without the written approval of the laboratory.

Certificate No: DAE4-720_S016 Page 1 of 5

DAE4 Sn:720

Calibration Laboratory of
Schmid & Partner
Engineering AG
Bergstrasse 10, 800 Zurich, Switzerland

Schmid & Partner
Service center electronics
Service center IT systems
Service Calibration Service

Accreditation No.: SCS 0108

Overview
DAE: data acquisition electronics
Connector angle: Information used in DASY system to align probe sensor X to the robot coordinate system.

- Methods Applied and Interpretation of Parameters**
- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
 - **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
 - The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage.
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information; GAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-720_Oct16

Page 3 of 5

DC Voltage Measurement

AD-Converter Resolution: nominal
High Range: 15.88 mV 5 µV full range: -100...+200 mV
Low Range: 15.88 mV 500 nV full range: -10...+200 mV
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	900.000 ± 0.02% (3σ)	404.780 ± 0.02% (3σ)	499.299 ± 0.02% (3σ)
Low Range	0.90000 ± 1.02% (3σ)	0.00407 ± 1.02% (3σ)	0.00500 ± 1.02% (3σ)

Connector Angle

Connector Angle to be used in DASY system	23.0 ° ± 1 °
---	--------------

Certificate No: DAE4-720_Oct16

Page 3 of 5

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200030.00	-2.83	-0.00
Channel X + Input	20005.59	1.21	0.01
Channel X - Input	-20002.63	2.74	-0.01
Channel Y + Input	200031.46	-1.44	-0.00
Channel Y + Input	20003.49	-0.90	-0.00
Channel Y - Input	-20003.62	1.72	-0.01
Channel Z + Input	200030.86	-1.63	-0.00
Channel Z + Input	20001.58	-2.67	-0.01
Channel Z - Input	-20009.93	-4.50	0.02

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	1999.86	-0.99	-0.05
Channel X + Input	200.42	-0.42	-0.21
Channel X - Input	-199.45	-0.24	0.12
Channel Y + Input	2000.78	-0.01	-0.00
Channel Y + Input	200.66	-0.06	-0.03
Channel Y - Input	-199.50	-0.28	0.14
Channel Z + Input	2000.45	-0.29	-0.01
Channel Z + Input	199.41	-1.33	-0.66
Channel Z - Input	-200.21	-0.92	0.46

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-0.59	-3.72
	-200	7.16	5.57
Channel Y	200	15.99	15.62
	-200	-16.62	-17.01
Channel Z	200	-16.19	-16.08
	-200	14.56	14.81

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	0.26	-3.89
Channel Y	200	8.74	-	0.77
Channel Z	200	6.36	7.07	-

Certificate No: DAE4-720_Oct16

Page 4 of 5

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16156	16521
Channel Y	16178	16048
Channel Z	16424	15774

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input (10MΩ)	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	0.75	-1.14	2.77	0.62
Channel Y	-0.03	-1.04	0.90	0.43
Channel Z	-0.18	-2.07	1.75	0.69

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25nA

7. Input Resistance (Typical values for information)

	Zeroing (kΩ)	Measuring (MΩ)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	<0.01	<6	<14
Supply (- Vcc)	<0.01	<8	<9

Certificate No: DAE4-720_Oct16

Page 5 of 5

ES3DV3 Sn:3127

Calibration Laboratory of
Suzhou & Puzhou
Engineering AG
Zhanghuashan St. 344, Suzhou, Jiangsu

Accredited by the China Accreditation Service (CMA)
The Service Accreditation Service is one of the agencies in the P.R.
Multi-lateral Agreement for the recognition of calibration certificates

Accreditation No.: BCS 0108

Client: SRTC (China) Calibration No.: ES3-3127_Aug16

CALIBRATION CERTIFICATE

Model: ES3DV3 - SN:3127

Calibration procedure: QA CAL-01-08, QA CAL-02-04, QA CAL-20-04, QA CAL-25-04
Calibration procedure for business E-field probes

Calibration date: August 26, 2016

The calibration certificate documents the following: (1) National standards, which specify the physical units measurements; (2)
The requirements and the uncertainties with confidence intervals for given measurement results and are part of the certificate

All calibrations have been conducted in the latest laboratory facility, environmental parameters (2) ± 0.1°C and humidity: 1-65%

Calibration Equipment used (MPE: critical for calibration)

Item	Model	Serial No.	Cal. Date	Cal. Certificate No.	Calibration Uncertainty
Traceable E-field probe	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB
Traceable E-field probe	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB
Traceable E-field probe	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB
Reference Probe (ES3-3127)	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB
ES3-3127	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB

Calibration for: E-field probe Calibration by: E-field probe Signature: [Signature]

Remarks: E-field probe Technical Manager: [Signature]

This calibration certificate shall not be valid unless signed by the authorized representative of the laboratory

Model: August 26, 2016

Certificate No.: ES3-3127_Aug16 Page 1 of 10

Calibration Laboratory of
Suzhou & Puzhou
Engineering AG
Zhanghuashan St. 344, Suzhou, Jiangsu

Accredited by the China Accreditation Service (CMA)
The Service Accreditation Service is one of the agencies in the P.R.
Multi-lateral Agreement for the recognition of calibration certificates

Accreditation No.: BCS 0108

Client: SRTC (China) Calibration No.: ES3-3127_Aug16

CALIBRATION CERTIFICATE

Model: ES3DV3 - SN:3127

Calibration procedure: QA CAL-01-08, QA CAL-02-04, QA CAL-20-04, QA CAL-25-04
Calibration procedure for business E-field probes

Calibration date: August 26, 2016

The calibration certificate documents the following: (1) National standards, which specify the physical units measurements; (2)
The requirements and the uncertainties with confidence intervals for given measurement results and are part of the certificate

All calibrations have been conducted in the latest laboratory facility, environmental parameters (2) ± 0.1°C and humidity: 1-65%

Calibration Equipment used (MPE: critical for calibration)

Item	Model	Serial No.	Cal. Date	Cal. Certificate No.	Calibration Uncertainty
Traceable E-field probe	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB
Traceable E-field probe	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB
Traceable E-field probe	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB
Reference Probe (ES3-3127)	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB
ES3-3127	ES3-3127	3127	2016-08-26	ES3-3127_Aug16	±0.1 dB

Calibration for: E-field probe Calibration by: E-field probe Signature: [Signature]

Remarks: E-field probe Technical Manager: [Signature]

This calibration certificate shall not be valid unless signed by the authorized representative of the laboratory

Model: August 26, 2016

Certificate No.: ES3-3127_Aug16 Page 1 of 10

ES3DV3 - SN:3127

August 29, 2016

Probe ES3DV3

SN:3127

Manufactured: July 11, 2006
Calibrated: August 29, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system)

Certificate No.: ES3-3127_Aug16

Page 3 of 12

ES3DV3 - SN:3127

August 29, 2016

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3127

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm. (uV/Vm) ²	1.26	1.23	1.18	± 10.1 %
DCP (mV)	102.7	101.6	103.7	

Modulation Calibration Parameters

UID	Communication System Name	A	B	C	D	V _{th}	U _{th}
0	CW	0.0	0.0	1.0	0.00	200.2	±5.3 %
		Y	0.0	0.0	1.0	213.8	
		Z	0.0	0.0	1.0	202.7	

Note: For details on UID parameters see Appendix.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

* The uncertainties of Norm. X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

* Numerical interpolation parameter, uncertainty not required.

* Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No.: ES3-3127_Aug16

Page 4 of 12

ES3DV3 Sn:3127

ES3DV3- SN:3127

August 29, 2016

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3127

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^d	Conductivity (S/m) ^d	ConvF X	ConvF Y	ConvF Z	Alpha ^e	Depth ^f (mm)	Unc (k=2)
450	43.5	0.87	6.74	6.74	6.74	0.21	2.30	± 13.3 %
750	41.9	0.89	6.55	6.55	6.55	0.62	1.37	± 12.0 %
900	41.5	0.97	6.20	6.20	6.20	0.54	1.41	± 12.0 %
1450	40.5	1.20	5.44	5.44	5.44	0.80	1.06	± 12.0 %
1810	40.0	1.40	5.15	5.15	5.15	0.80	1.16	± 12.0 %
2000	40.0	1.40	5.11	5.11	5.11	0.68	1.28	± 12.0 %
2300	39.5	1.67	4.83	4.83	4.83	0.80	1.19	± 12.0 %
2450	39.2	1.80	4.61	4.61	4.61	0.67	1.38	± 12.0 %
2600	39.0	1.96	4.40	4.40	4.40	0.70	1.36	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2); else it is restricted to ± 50 MHz. The uncertainty is the RSS of the Conf. uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for Conf. assessments at 30, 60, 120, 150 and 200 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^d At frequencies below 3 GHz, the validity of tissue parameters (x and y) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (x and y) is restricted to ± 5%. The uncertainty is the RSS of the Conf. uncertainty for indicated target tissue parameters.

^e Alpha values are determined during calibration. SPEACD warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: ES3-3127_Aug16

Page 5 of 12

ES3DV3- SN:3127

August 29, 2016

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3127

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^d	Conductivity (S/m) ^d	ConvF X	ConvF Y	ConvF Z	Alpha ^e	Depth ^f (mm)	Unc (k=2)
450	56.7	0.54	6.99	6.99	6.99	0.12	2.10	± 13.3 %
750	55.5	0.96	6.12	6.12	6.12	0.80	1.14	± 12.0 %
900	55.0	1.05	6.16	6.16	6.16	0.46	1.53	± 12.0 %
1450	54.0	1.30	5.29	5.29	5.29	0.74	1.21	± 12.0 %
1810	53.3	1.52	4.90	4.90	4.90	0.43	1.69	± 12.0 %
2000	53.3	1.52	4.92	4.92	4.92	0.55	1.48	± 12.0 %
2300	52.9	1.81	4.63	4.63	4.63	0.80	1.24	± 12.0 %
2450	52.7	1.95	4.36	4.36	4.36	0.71	1.22	± 12.0 %
2600	52.5	2.16	4.17	4.17	4.17	0.80	1.11	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2); else it is restricted to ± 50 MHz. The uncertainty is the RSS of the Conf. uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for Conf. assessments at 30, 60, 120, 150 and 200 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^d At frequencies below 3 GHz, the validity of tissue parameters (x and y) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (x and y) is restricted to ± 5%. The uncertainty is the RSS of the Conf. uncertainty for indicated target tissue parameters.

^e Alpha values are determined during calibration. SPEACD warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

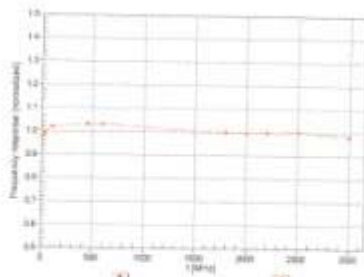
Certificate No: ES3-3127_Aug16

Page 6 of 12

ES3DV3- SN:3127

August 29, 2016

Frequency Response of E-Field (TEM-Cal: 30119 EXL Waveguide: R22)



Uncertainty of Frequency Response of E-Field: ± 0.8% (k=2)


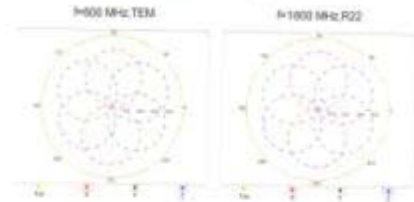
Certificate No: ES3-3127_Aug16

Page 7 of 12

ES3DV3- SN:3127

August 29, 2016

Receiving Pattern (φ), θ = 0°

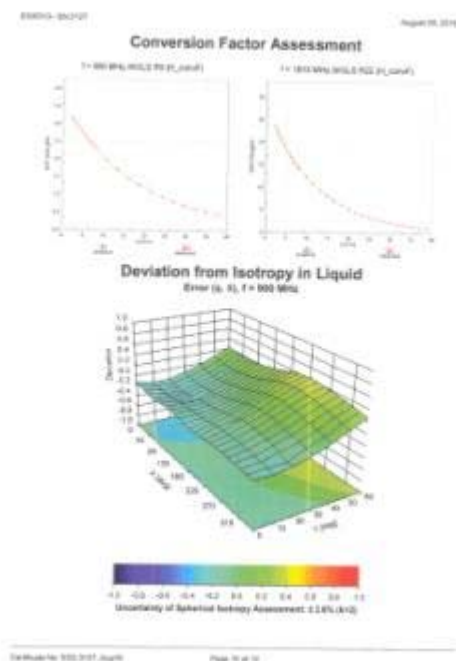
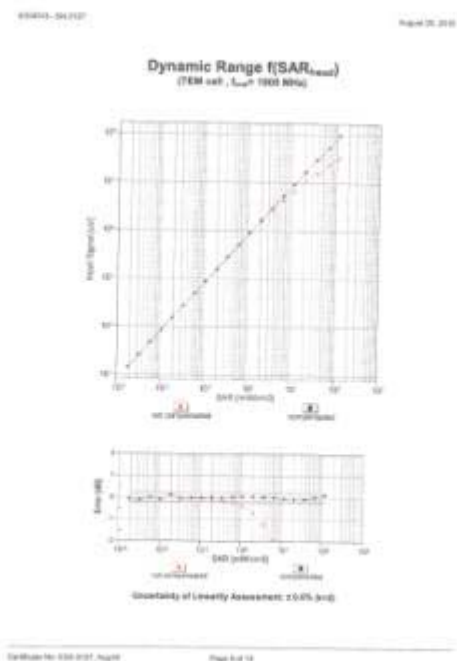


Uncertainty of Avid Geometry Assessment: ± 0.25% (k=2)

Certificate No: ES3-3127_Aug16

Page 8 of 12

ES3DV3 Sn:3127



ES3DV3-SN:3127 August 28, 2016

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3127

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-15.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

Certificate No: ES3-3127_Aug16 Page 11 of 12

ES3DV3-SN:3127 August 28, 2016

Appendix: Modulation Calibration Parameters

UID	Communication System Name	A	B	C	D	VR	Unc ¹
		dB	dB/√V		dB	mV	(k=2)
0	CW	X 0.0	0.0	1.0	0.00	209.2	±3.3 %
		Y 0.0	0.0	1.0		213.8	
		Z 0.0	0.0	1.0		202.7	
10012-CAR	IEEE 802.11b WiFi 2.4 GHz (SSBSS, 1 Mbps)	X 3.29	71.4	20.2	1.87	125.8	±0.7 %
		Y 2.75	67.3	17.9		129.9	
		Z 3.10	70.4	19.7		120.2	
10100-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X 6.43	67.7	20.1	5.80	137.8	±1.4 %
		Y 6.43	67.5	19.7		144.6	
		Z 6.39	67.6	20.0		131.5	
10110-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X 6.17	67.4	20.0	5.75	134.4	±1.4 %
		Y 6.14	67.0	19.6		141.5	
		Z 6.02	67.0	19.7		138.3	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X 6.13	67.3	19.9	5.75	135.5	±1.2 %
		Y 6.19	67.3	19.8		140.3	
		Z 6.04	67.1	19.8		128.2	
10169-CAR	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X 5.00	66.8	19.8	5.73	117.2	±0.9 %
		Y 5.04	66.9	19.7		120.3	
		Z 4.89	66.5	19.7		111.8	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X 4.97	66.6	19.7	5.72	117.2	±0.9 %
		Y 4.93	66.3	19.4		120.2	
		Z 4.87	66.5	19.6		111.6	
10267-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X 6.51	68.0	20.3	5.81	137.1	±1.4 %
		Y 6.46	67.6	19.9		140.9	
		Z 6.37	67.6	20.0		130.4	

¹ Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: ES3-3127_Aug16 Page 12 of 12

EX3DV4 S_n:3708[illegible][illegible]

EX30V4 – SN:3708

Abbildung 4.10: 2D-Plot des 2D-Modells

Probe EX3DV4

SN:3708

Manufactured: July 21, 2009
Calibrated: November 10, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

Certificate No: EX3-3708 Nov16

Page 3 of 11

DOI: 10.1002/anie.200500000

November 1991

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3708

[illegible]

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

¹¹ The construction of Steps 4, 5, 6, 7 does not affect the $\mathcal{U}$ -topology, assuming, as usual, the usual regularity property.

Continued on p. 227

Effectiveness of oral FOL

EX3DV4 S_n:3708[illegible]

November 10, 2006

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3708

Calibration Parameter Determined in Head Tissue Simulating Media

1984q1	Share Percentage	Consistency (%)	Good F	Good F	Good F	Good F	Good F	Good F	Good F
300	43.2	0.87	0.00	0.00	0.00	0.44	0.00	0.00	0.00
1000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00
2000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00
3000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00
4000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00
5000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00
6000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00
7000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00
8000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00
9000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00
10000	40.0	1.40	7.04	7.04	7.04	0.00	0.00	0.00	0.00

^a Frequency stability: measure (in Hz) of the frequency stability for the 1000000 Hz and 1000 Hz signals (see Page 1). 1000000 Hz is referenced to ± 10 MHz, the 1000 Hz is referenced to ± 10 kHz. The frequency stability is measured in ppm (parts per million) and is calculated as the maximum frequency error (in Hz) divided by the nominal frequency (in Hz). Frequency stability: 1000000 Hz: ± 0.000001 ppm, 1000 Hz: ± 0.000001 ppm. Frequency stability: 1000000 Hz: ± 0.000001 ppm, 1000 Hz: ± 0.000001 ppm.

Copyright © 2000 John Wiley & Sons, Inc.

Figure 6.20.10

0022-0474/04/050474-12\$15.00/0

© 2004 Blackwell Publishing Ltd
Journal of Internal Medicine 255: 499–504

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3708

Calibration Parameter Determined in Body Tissue Simulating Media

150mg	Average serum concentrations (nmol/L)						
	Baseline	15 min	30 min	1 h	2 h	4 h	8 h
150	58.5	1.60	5.19	9.33	33.33	3.48	5.81
150	53.2	1.60	7.78	9.79	7.79	3.44	5.81
150	53.9	1.59	7.71	7.71	7.71	3.43	5.80
150	52.7	1.58	7.22	7.22	7.22	3.40	5.80
150	49.0	1.55	4.80	5.67	6.52	3.36	5.81
150	48.2	1.62	6.57	9.31	9.31	3.43	5.81
150	48.6	1.66	6.07	6.07	6.07	3.39	5.81
150	48.6	1.57	3.88	3.88	3.88	3.38	5.81
150	48.0	1.60	4.12	4.12	4.12	3.40	5.81

Frequency spectra density (PSD) of the α and β bands were calculated by the FFT of x and y components (see Figure 2). PSDs in each frequency α and β band. The PSDs in the α band of the α and β components are calculated separately for the x and y components. The PSDs in the β band of the α and β components are calculated separately for the x and y components. The PSDs in the α band of the α and β components are calculated separately for the x and y components. The PSDs in the β band of the α and β components are calculated separately for the x and y components.

Copyright © 2004 John Wiley & Sons, Inc.

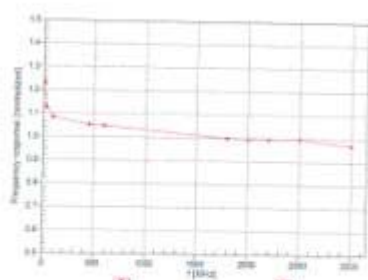
1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 2679, 26

© 2004 Blackwell Publishing Ltd, *Journal of Internal Medicine* 255: 105–112

November 20, 2006

Frequency Response of E-Field

(TOM-Cal-10110 EXX, Waveguide: 102)



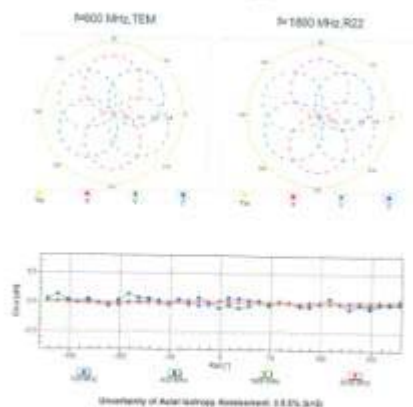
Uncertainty of Frequency Response of 0.49% to 0.2% (0.01)

Continued from 6198-6206, Nov. 78

Stages II and III

[illegible]

0000-0001-9300-3000

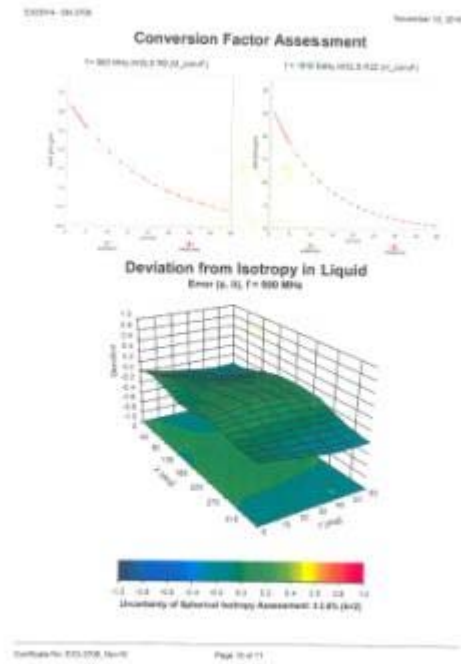
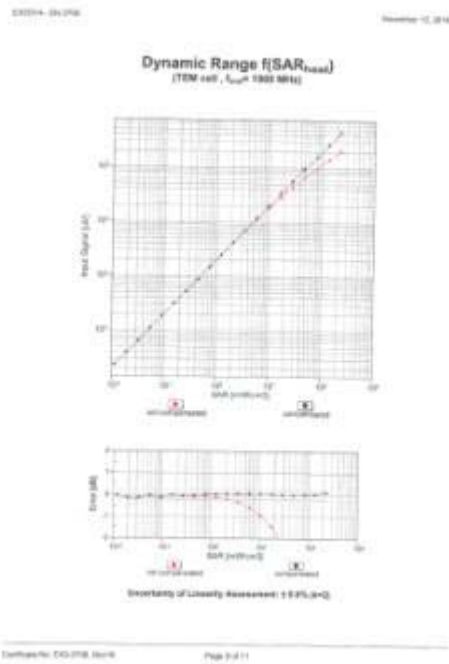
Receiving Pattern (a), $\theta = 0^\circ$ 

University of North Dakota, Grand Forks, ND 58202, USA

Copyright © 2004 John Wiley & Sons, Inc.

Page 8 of 10

EX3DV4 Sn:3708



EX3DV4 - SN:3708

November 10, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3708

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-1.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Certificate No: EX3-3708, Nov16

Page 11 of 11

D750V3 Sn:1101

Calibration Laboratory of
Schmidt & Partner
Engineering AG
Schoenbuchstrasse 10, 80384 Garching, Germany

Accredited by the State Accreditation Service (SAS)
The State Accreditation Service is an official organization in the EU
Notified Approval for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: **SRTC (HSE)** Certificate No.: **D750V3-1101_Doct18**

CALIBRATION CERTIFICATE

Report: **D750V3 - SRQ 1101**

Calibration requested: **DA-04L-05 v6**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **October 24, 2018**

The calibration certificate documents the capability to perform calibrations, which require the use of special units of measurement (SU).
The measurement and the uncertainty with confidence probability are given in the following pages-entries part of the certificate.

All calibration have been conducted in the latest designed facility (environmental temperature: $\pm 20^\circ\text{C}$, air humidity $\pm 50\%$).

Calibration Equipment used (MPE% unless for calibration):

Primary Standards	Unit	Cal Date (Certificate No.)	Expiry date (Calibrated)
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Reference SW: 100W	SW: 100W (SW)	26-Apr-18 (No. 217-0000000)	Apr-17
Uncertainty calibration	SW: 100W (SW)	26-Apr-18 (No. 217-0000000)	Apr-17
Reference Power 100W	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
DA-04L-05 v6	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17

Secondary Standards

Primary Standard	Unit	Cal Date (Certificate No.)	Expiry date (Calibrated)
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Reference SW: 100W	SW: 100W (SW)	26-Apr-18 (No. 217-0000000)	Apr-17
Uncertainty calibration	SW: 100W (SW)	26-Apr-18 (No. 217-0000000)	Apr-17
Reference Power 100W	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17

Calibration

Parameter	Value	Uncertainty	Expiry date
DA-04L-05 v6	SW: 100W	SW: 100W	Apr-17

Calibration

Parameter	Value	Uncertainty	Expiry date
DA-04L-05 v6	SW: 100W	SW: 100W	Apr-17

The calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No.: D750V3-1101_Doct18 Page 1 of 6

Calibration Laboratory of
Schmidt & Partner
Engineering AG
Schoenbuchstrasse 10, 80384 Garching, Germany

Accredited by the State Accreditation Service (SAS)
The State Accreditation Service is an official organization in the EU
Notified Approval for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: **SRTC (HSE)** Certificate No.: **D750V3-1101_Doct18**

CALIBRATION CERTIFICATE

Report: **D750V3 - SRQ 1101**

Calibration requested: **DA-04L-05 v6**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **October 24, 2018**

The calibration certificate documents the capability to perform calibrations, which require the use of special units of measurement (SU).
The measurement and the uncertainty with confidence probability are given in the following pages-entries part of the certificate.

All calibration have been conducted in the latest designed facility (environmental temperature: $\pm 20^\circ\text{C}$, air humidity $\pm 50\%$).

Calibration Equipment used (MPE% unless for calibration):

Primary Standards	Unit	Cal Date (Certificate No.)	Expiry date (Calibrated)
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Reference SW: 100W	SW: 100W (SW)	26-Apr-18 (No. 217-0000000)	Apr-17
Uncertainty calibration	SW: 100W (SW)	26-Apr-18 (No. 217-0000000)	Apr-17
Reference Power 100W	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
DA-04L-05 v6	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17

Secondary Standards

Primary Standard	Unit	Cal Date (Certificate No.)	Expiry date (Calibrated)
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Power meter NIST	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17
Reference SW: 100W	SW: 100W (SW)	26-Apr-18 (No. 217-0000000)	Apr-17
Uncertainty calibration	SW: 100W (SW)	26-Apr-18 (No. 217-0000000)	Apr-17
Reference Power 100W	SW: 100W	26-Apr-18 (No. 217-0000000)	Apr-17

Calibration

Parameter	Value	Uncertainty	Expiry date
DA-04L-05 v6	SW: 100W	SW: 100W	Apr-17

Calibration

Parameter	Value	Uncertainty	Expiry date
DA-04L-05 v6	SW: 100W	SW: 100W	Apr-17

The calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No.: D750V3-1101_Doct18 Page 2 of 6

Measurement Conditions

DA-04L-05 v6 configuration, as per the report of the client

Parameter	Value	Uncertainty	Expiry date
DA-04L-05 v6	SW: 100W	SW: 100W	Apr-17

Head TSL parameters

The following parameters and calibrations were applied:

Parameter	Value	Uncertainty	Expiry date
Measured Head TSL parameters	SW: 100W	SW: 100W	Apr-17
Measured Head TSL parameters	SW: 100W	SW: 100W	Apr-17
Head TSL temperature change during test	SW: 100W	SW: 100W	Apr-17

SAR result with Head TSL

Parameter	Value	Uncertainty	Expiry date
SAR averaged over 1 cm ² (1 g) of Head TSL	SW: 100W	SW: 100W	Apr-17
SAR measured	SW: 100W	SW: 100W	Apr-17
SAR for normal Head TSL parameters	SW: 100W	SW: 100W	Apr-17

Body TSL parameters

The following parameters and calibrations were applied:

Parameter	Value	Uncertainty	Expiry date
Measured Body TSL parameters	SW: 100W	SW: 100W	Apr-17
Measured Body TSL parameters	SW: 100W	SW: 100W	Apr-17
Body TSL temperature change during test	SW: 100W	SW: 100W	Apr-17

SAR result with Body TSL

Parameter	Value	Uncertainty	Expiry date
SAR averaged over 1 cm ² (1 g) of Body TSL	SW: 100W	SW: 100W	Apr-17
SAR measured	SW: 100W	SW: 100W	Apr-17
SAR for normal Body TSL parameters	SW: 100W	SW: 100W	Apr-17

Certificate No.: D750V3-1101_Doct18 Page 3 of 6

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Parameter	Value	Uncertainty	Expiry date
Impedance, normalized to feed point	SW: 100W	SW: 100W	Apr-17
Return Loss	SW: 100W	SW: 100W	Apr-17

Antenna Parameters with Body TSL

Parameter	Value	Uncertainty	Expiry date
Impedance, normalized to feed point	SW: 100W	SW: 100W	Apr-17
Return Loss	SW: 100W	SW: 100W	Apr-17

General Antenna Parameters and Design

Parameter	Value	Uncertainty	Expiry date
Electromagnetic Delay (one-direction)	SW: 100W	SW: 100W	Apr-17

After long term use with 100W reduced power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard averaged (average) cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small air caps are soldered to the dipole arms in order to improve matching when needed according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the standard.

No operations have been applied to the dipole arms, because they might lead to the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Parameter	Value	Uncertainty	Expiry date
Manufactured by	SW: 100W	SW: 100W	Apr-17
Manufactured on	SW: 100W	SW: 100W	Apr-17

Certificate No.: D750V3-1101_Doct18 Page 4 of 6

D750V3 Sn:1101

DASY5 Validation Report for Head TSL

Date: 24.10.2016

Test Laboratory: SPAG, Zurich, Switzerland

DUT: Dipole 750 MHz, Type D750V3, Serial: D750V3-SN:1101

Communication System: UTD-G-CW, Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$, $n = 0.92$, $\mu_0 = 4\pi \cdot 10^{-7} \text{ Vs/Am}$, $\rho = 0.0004 \text{ g/cm}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (BIS/BIC/ANSI C63.10-2011)

DASY5 Configuration:

- Probe: SCDP4 - SNT48, CoreF(1047, 1047, 1047), Calibration: 11.06.2016
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DAJ4 (a001), Calibration: 30.12.2015
- Phantom: Flat Phantom 4 RE, Type Q000P00AA, Serial: 1001
- DASY52 52.8.93.2381, SEMCAD X 14.6.00(7372)

Dipole Calibration for Head Tissue/Pos:210 mW, d=15mm/Zero Scan (7x7x7)/Cube 0:

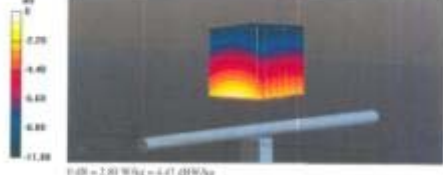
Measurement grid: d=15mm, d=15mm, d=15mm

Reference Value = 51.10 V/m, Power Dens = 0.00 dB

Peak SAR (integrated) = 2.14 W/kg

SAR(1g) = 2.01 W/kg, SAR(10g) = 1.38 W/kg

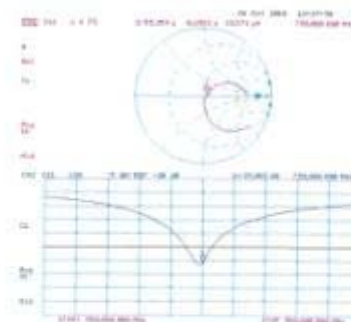
Maximum value of SAR (measured) = 2.80 W/kg



Certificate No: D750V3-1101_2016

Page 5 of 8

Impedance Measurement Plot for Head TSL



Certificate No: D750V3-1101_2016

Page 6 of 8

DASY5 Validation Report for Body TSL

Date: 24.10.2016

Test Laboratory: SPAG, Zurich, Switzerland

DUT: Dipole 750 MHz, Type D750V3, Serial: D750V3-SN:1101

Communication System: UTD-G-CW, Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$, $n = 0.97$, $\mu_0 = 4\pi \cdot 10^{-7} \text{ Vs/Am}$, $\rho = 0.0004 \text{ g/cm}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (BIS/BIC/ANSI C63.10-2011)

DASY5 Configuration:

- Probe: SCDP4 - SNT48, CoreF(9.99, 9.99, 9.99), Calibration: 11.06.2016
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DAJ4 (a001), Calibration: 30.12.2015
- Phantom: Flat Phantom 4 RE, Type Q000P00AA, Serial: 1001
- DASY52 52.8.93.2381, SEMCAD X 14.6.00(7372)

Dipole Calibration for Body Tissue/Pos:210 mW, d=15mm/Zero Scan (7x7x7)/Cube 0:

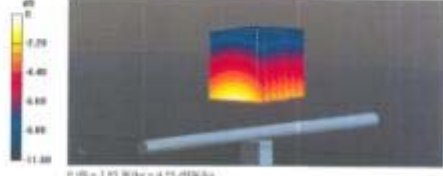
Measurement grid: d=15mm, d=15mm, d=15mm

Reference Value = 54.79 V/m, Power Dens = 0.00 dB

Peak SAR (integrated) = 2.19 W/kg

SAR(1g) = 1.97 W/kg, SAR(10g) = 1.44 W/kg

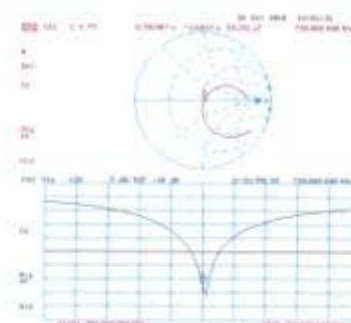
Maximum value of SAR (measured) = 2.80 W/kg



Certificate No: D750V3-1101_2016

Page 7 of 8

Impedance Measurement Plot for Body TSL



Certificate No: D750V3-1101_2016

Page 8 of 8

D835V2 Sn:4d023

Calibration Laboratory of
Schmitz & Partner
Engineering AG
Aargauerstrasse 15, 8004 Zurich, Switzerland

ISO 9001
ISO 17025

Schweizerischer Eidgenössischer
Verband der Industrie- und
Handelsgewerkschaften
SUISV
Bundeskalibrierdienst

Accreditation No.: SCS 0108

Accredited by Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client: SRTC (FHE) Certificate No.: D835V2-40023_Oct16

CALIBRATION CERTIFICATE

Product: D835V2 - SR4-0023

Calibration procedure(s): QA-DL-05.01
Calibration procedure for dipole validation into above TSL Mfg

Calibration date: October 24, 2016

This calibration certificate documents the traceability to national standards, which define the physical units of measurement (SI).
The measurement and the uncertainty and compliance uncertainty are given in the following pages and are part of the certificate.

All calibration have been conducted in the fixed laboratory facility, environmental temperature: 22 ± 0.2 °C and humidity: < 70%.

Calibration Equipment used (SAS) (used for calibration):

Primary Standard	Unit	Exp. Date (if applicable)	Expiration Date/Date
Power meter 100W	100W	04-Apr-16 (No. 217-00000000)	Apr-17
Power meter 10W/20W	10W/20W	04-Apr-16 (No. 217-00000000)	Apr-17
Power meter 10W/20W	10W/20W	04-Apr-16 (No. 217-00000000)	Apr-17
Networks 10-dB Attenuator	10-dB	04-Apr-16 (No. 217-00000000)	Apr-17
Type N impedance coupler	20-dB	04-Apr-16 (No. 217-00000000)	Apr-17
Reference Plane 50Ω/50Ω	50Ω	04-Apr-16 (No. 217-00000000)	Apr-17
100W	100W	04-Apr-16 (No. 217-00000000)	Apr-17
10W	10W	04-Apr-16 (No. 217-00000000)	Apr-17

Secondary Standards:

Unit	Exp. Date (if applicable)	Expiration Date
Power meter 100W/20W	04-Apr-16 (No. 217-00000000)	04-Apr-17
Power meter 10W/20W	04-Apr-16 (No. 217-00000000)	04-Apr-17
Power meter 10W/20W	04-Apr-16 (No. 217-00000000)	04-Apr-17
10-dB Attenuator	04-Apr-16 (No. 217-00000000)	04-Apr-17
20-dB Attenuator	04-Apr-16 (No. 217-00000000)	04-Apr-17

Calibration by: SCS 0108
Calibration by: SCS 0108

Approved by: SCS 0108

This calibration certificate shall not be reproduced except in full without written approval of the issuing body.

Certificate No.: D835V2-40023_Oct16 Page 1 of 8

Calibration Laboratory of
Schmitz & Partner
Engineering AG
Aargauerstrasse 15, 8004 Zurich, Switzerland

ISO 9001
ISO 17025

Schweizerischer Eidgenössischer
Verband der Industrie- und
Handelsgewerkschaften
SUISV
Bundeskalibrierdienst

Accreditation No.: SCS 0108

Accredited by Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client: SRTC (FHE) Certificate No.: D835V2-40023_Oct16

CALIBRATION CERTIFICATE

Product: D835V2 - SR4-0023

Calibration procedure(s): QA-DL-05.01
Calibration procedure for dipole validation into above TSL Mfg

Calibration date: October 24, 2016

This calibration certificate documents the traceability to national standards, which define the physical units of measurement (SI).
The measurement and the uncertainty and compliance uncertainty are given in the following pages and are part of the certificate.

All calibration have been conducted in the fixed laboratory facility, environmental temperature: 22 ± 0.2 °C and humidity: < 70%.

Calibration Equipment used (SAS) (used for calibration):

Primary Standard	Unit	Exp. Date (if applicable)	Expiration Date/Date
Power meter 100W	100W	04-Apr-16 (No. 217-00000000)	Apr-17
Power meter 10W/20W	10W/20W	04-Apr-16 (No. 217-00000000)	Apr-17
Power meter 10W/20W	10W/20W	04-Apr-16 (No. 217-00000000)	Apr-17
Networks 10-dB Attenuator	10-dB	04-Apr-16 (No. 217-00000000)	Apr-17
Type N impedance coupler	20-dB	04-Apr-16 (No. 217-00000000)	Apr-17
Reference Plane 50Ω/50Ω	50Ω	04-Apr-16 (No. 217-00000000)	Apr-17
100W	100W	04-Apr-16 (No. 217-00000000)	Apr-17
10W	10W	04-Apr-16 (No. 217-00000000)	Apr-17

Secondary Standards:

Unit	Exp. Date (if applicable)	Expiration Date
Power meter 100W/20W	04-Apr-16 (No. 217-00000000)	04-Apr-17
Power meter 10W/20W	04-Apr-16 (No. 217-00000000)	04-Apr-17
Power meter 10W/20W	04-Apr-16 (No. 217-00000000)	04-Apr-17
10-dB Attenuator	04-Apr-16 (No. 217-00000000)	04-Apr-17
20-dB Attenuator	04-Apr-16 (No. 217-00000000)	04-Apr-17

Calibration by: SCS 0108
Calibration by: SCS 0108

Approved by: SCS 0108

This calibration certificate shall not be reproduced except in full without written approval of the issuing body.

Certificate No.: D835V2-40023_Oct16 Page 2 of 8

Measurement Conditions

SAR subject configuration, see Fig. 10.1 (not shown) on page 1.

Parameter	Value	Unit
Exposure <td>Antenna <td>W/kg</td> </td>	Antenna <td>W/kg</td>	W/kg
Phantom <td>Antenna <td>W/kg</td> </td>	Antenna <td>W/kg</td>	W/kg
Distance Dipole Center - TSL <td>10 cm</td> <td>cm</td>	10 cm	cm
Distance Scan Resolution <td>10 cm</td> <td>cm</td>	10 cm	cm
Frequency <td>200 MHz ± 1 MHz</td> <td>Hz</td>	200 MHz ± 1 MHz	Hz

Head TSL parameters

The following parameters and calculations were applied:

Parameter	Value	Unit
Measured Head TSL parameters	0.01 W/kg	W/kg
Measured Head TSL parameters	0.01 ± 0.01 W/kg	W/kg
Head TSL temperature change during test	+0.2 °C	°C

SAR result with Head TSL

Parameter	Value	Unit
SAR averaged over 1 cm² (1 g) of Head TSL	0.01 W/kg	W/kg
SAR for nominal Head TSL parameters	0.01 W/kg	W/kg
SAR for nominal Head TSL parameters	0.01 W/kg	W/kg

Body TSL parameters

The following parameters and calculations were applied:

Parameter	Value	Unit
Measured Body TSL parameters	0.01 W/kg	W/kg
Measured Body TSL parameters	0.01 ± 0.01 W/kg	W/kg
Body TSL temperature change during test	+0.2 °C	°C

SAR result with Body TSL

Parameter	Value	Unit
SAR averaged over 1 cm² (1 g) of Body TSL	0.01 W/kg	W/kg
SAR for nominal Body TSL parameters	0.01 W/kg	W/kg
SAR for nominal Body TSL parameters	0.01 W/kg	W/kg

Certificate No.: D835V2-40023_Oct16 Page 3 of 8

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Parameter	Value	Unit
Impedance, transformed to feed point	53.4 Ω ± 1.9 Ω	Ω
Return Loss	-28.4 dB	dB

Antenna Parameters with Body TSL

Parameter	Value	Unit
Impedance, transformed to feed point	49.3 Ω ± 5.1 Ω	Ω
Return Loss	-25.8 dB	dB

General Antenna Parameters and Design

Parameter	Value	Unit
Electrical Delay (one direction)	1.389 ns	ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Parameter	Value	Unit
Manufactured by	SPEAG	
Manufactured on	December 17, 2004	

Certificate No.: D835V2-40023_Oct16 Page 4 of 8

D835V2 Sn:4d023

DASY5 Validation Report for Head TSL

Date: 26.10.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN-4d023

Communication System: UHF 0 - CW; Frequency: 835 MHz
Medium parameters used: $f = 835$ MHz, $n = 0.95$ Mm, $\alpha = 60$ dB, $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C93.19-2011)

DASY5 Configuration:

- Probe: EXCIV4 - EN748; Coax: F8, 9, 73; Calibration: 11.06.2016
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DA84 Set01; Calibration: 30.12.2015
- Phantom: Flat Phantom A.H.; Type: Q000P99AA; Serial: 1001
- DASY52 52.8.8.1258; SEMCAD X 14.6.10(7772)

Dipole Calibration for Head Tissue/Flat=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 8:

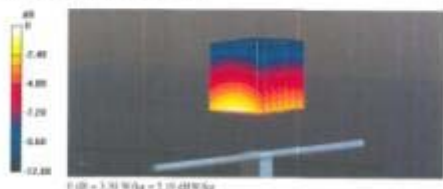
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.72 V/m; Power Dens = 0.03 dB

Peak SAR (measured) = 3.72 W/kg

SAR(1 g) = 3.47 W/kg; SAR(10 g) = 1.39 W/kg

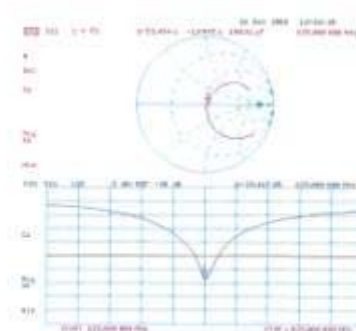
Maximum value of SAR (measured) = 3.70 W/kg



Certificate No.: D835V2-4d023_C0116

Page 6 of 8

Impedance Measurement Plot for Head TSL



Certificate No.: D835V2-4d023_C0116

Page 8 of 8

DASY5 Validation Report for Body TSL

Date: 24.10.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN-4d023

Communication System: UHF 0 - CW; Frequency: 835 MHz
Medium parameters used: $f = 835$ MHz, $n = 0.99$ Mm, $\alpha = 55$ dB, $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C93.19-2011)

DASY5 Configuration:

- Probe: EXCIV4 - EN748; Coax: F8, 9, 73; Calibration: 11.06.2016
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DA84 Set01; Calibration: 30.12.2015
- Phantom: Flat Phantom A.H.; Type: Q000P99AA; Serial: 1001
- DASY52 52.8.8.1258; SEMCAD X 14.6.10(7772)

Dipole Calibration for Body Tissue/Flat=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 8:

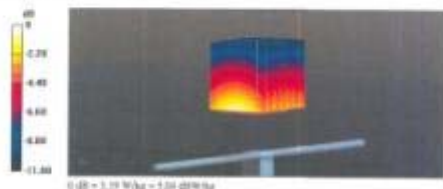
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.07 V/m; Power Dens = 0.01 dB

Peak SAR (measured) = 3.79 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.6 W/kg

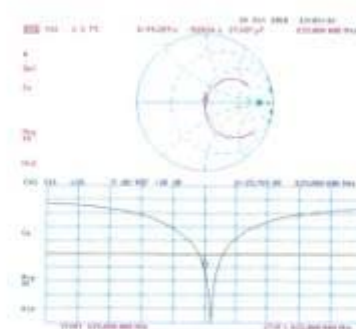
Maximum value of SAR (measured) = 3.79 W/kg



Certificate No.: D835V2-4d023_C0116

Page 7 of 8

Impedance Measurement Plot for Body TSL



Certificate No.: D835V2-4d023_C0116

Page 8 of 8

D1900V2 Sn:5d113

Calibration Laboratory of
Schmid & Partner
Engineering AG
Engelshausen 15, 89073 Ulm, Germany

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the IAF
Mutual Recognition Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Certificate No.: D1900V2-Sn:5d113, Seite 1

Client: BNTC (HWA)

CALIBRATION CERTIFICATE

Object: D1900V2 - SN:5d113

Calibration procedure(s): QA CAL-05-V3
Calibration procedure for dipole antennas 4 to above 750 MHz

Calibration date: October 31, 2018

This calibration certificate documents the conformity to national standards, which makes the official state of measurements (2).
The measurements and the evaluation with confidence probability and given in the following pages are part of the certificate.

All calibrations have been conducted in the climate laboratory (humidity: development temperature (20 ± 2)°C; air humidity: < 65%).

Calibration equipment used (MPE/C, unless for calibration):

Process identifier	QTY	Top Item (Calibration No.)	Subsequent calibration
Power meter HPV	01	019 180178	06-Apr-18 (No. 211-020802000)
Power sensor HPV-20	01	110234	06-Apr-18 (No. 211-020802000)
Power sensor HPV-01	01	110235	06-Apr-18 (No. 211-020802000)
Reference (10 dB) Attenuator	01	1000 (200)	06-Apr-18 (No. 211-020802000)
10 dB Attenuator (calibration)	01	2000 (200)	06-Apr-18 (No. 211-020802000)
Calibration (100 dB) Attenuator	01	1000	06-Apr-18 (No. 211-020802000)
100 dB	01	1000	06-Apr-18 (No. 211-020802000)

Subsequent calibration

Process identifier	QTY	Process Date (Calibration No.)	Subsequent Date
Power meter HPV-20	01	07-Sep-18 (No. 211-020802000)	06-Apr-18 (No. 211-020802000)
Power sensor HPV-20	01	07-Sep-18 (No. 211-020802000)	06-Apr-18 (No. 211-020802000)
Power sensor HPV-01	01	07-Sep-18 (No. 211-020802000)	06-Apr-18 (No. 211-020802000)
Reference (10 dB) Attenuator	01	07-Sep-18 (No. 211-020802000)	06-Apr-18 (No. 211-020802000)
10 dB Attenuator (calibration)	01	07-Sep-18 (No. 211-020802000)	06-Apr-18 (No. 211-020802000)
Calibration (100 dB) Attenuator	01	07-Sep-18 (No. 211-020802000)	06-Apr-18 (No. 211-020802000)
100 dB	01	07-Sep-18 (No. 211-020802000)	06-Apr-18 (No. 211-020802000)

Calibrated by: J. Schmid

Approved by: J. Schmid

Technical Manager: J. Schmid

Issue Date: October 31, 2018

Certificate No.: D1900V2-Sn:5d113, Seite 1

Calibration Laboratory of
Schmid & Partner
Engineering AG
Engelshausen 15, 89073 Ulm, Germany

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the IAF
Mutual Recognition Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Certificate No.: D1900V2-Sn:5d113, Seite 2

Client: BNTC (HWA)

CALIBRATION CERTIFICATE

Object: D1900V2 - SN:5d113

Calibration procedure(s): QA CAL-05-V3
Calibration procedure for dipole antennas 4 to above 750 MHz

Calibration date: October 31, 2018

This calibration certificate documents the conformity to national standards, which makes the official state of measurements (2).
The measurements and the evaluation with confidence probability and given in the following pages are part of the certificate.

All calibrations have been conducted in the climate laboratory (humidity: development temperature (20 ± 2)°C; air humidity: < 65%).

Calibration equipment used (MPE/C, unless for calibration):

Additional Documentation:

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Calibration Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the upper to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured SAR measured at the stated antenna input power.
- SAR normalized SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No.: D1900V2-Sn:5d113, Seite 2

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52 8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

Parameter	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.6 ± 6 %	1.39 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.7 W/kg ± 17.0 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

Parameter	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.2 ± 6 %	1.48 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.80 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.8 W/kg ± 17.0 % (k=2)

Certificate No.: D1900V2-Sn:5d113, Seite 3

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Parameter	Value
Impedance, transformed to feed point	51.1 ± 0.3 Ω
Return Loss	23.8 dB

Antenna Parameters with Body TSL

Parameter	Value
Impedance, transformed to feed point	47.0 ± 0.3 Ω
Return Loss	25.8 dB

General Antenna Parameters and Design

Parameter	Value
Electrical Delay (one direction)	1.00 ns

After long-term use with 1000W reflected power, only a slight warping of the dipole loop (the feedpoint) can be measured.

The dipole is made of stainless steel (AISI 304). The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore also connected for DC signals. On some of the dipole arms, small notches are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The central dipole length is still according to the standard.

No protective films must be applied to the dipole arms, because they might lead to the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Parameter	Value
Manufactured by	SPEAG
Manufactured on	July 24, 2018

Certificate No.: D1900V2-Sn:5d113, Seite 4

D1900V2 Sn:5d113

DASY5 Validation Report for Head TSL

Date: 31.10.2016

Test Laboratory: SP/AG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d113

Communication System: UTD 0 - CW; Frequency: 1900 MHz
Medium parameters used: $f = 1900$ MHz, $\epsilon = 1.29$ Skin, $\mu = 40.6$, $\rho = 1000$ kg/m³
Phantom section: Flat Surface
Measurement Standard: DASY5 (IEEE/BCAN/CE3.19.2011)

DASY5 Configuration:

- Probe: EXCEP4 - SN7548; Core: P7 95, 7.95, 7.95; Calibration: 15.06.2016;
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DAQ4 16011; Calibration: 30.12.2015
- Phantom: Flat Phantom 5.0 (Back); Type: QD000P90AA; Serial: 1001
- DASY52: 52.8.6.1234; SEMCAD X 14.6.1007322

Dipole Calibration for Head Tissue/ $\rho = 200$ kg/m³, $d = 10$ mm/Zoom Scan (7x7x7) Cube B:

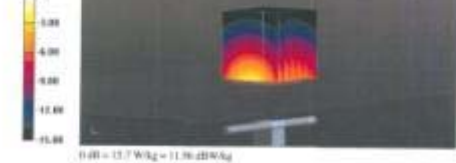
Measurement grid: $d_{\text{horiz}} = 10$ mm, $d_{\text{vert}} = 10$ mm

Solver: Value = 104.5 V/m; Power DUT = 410 dB

Peak SAR (extrapolated) = 19.0 W/kg

SAR(10 g) = 10.1 W/kg; SAR(10 g) = 5.3 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

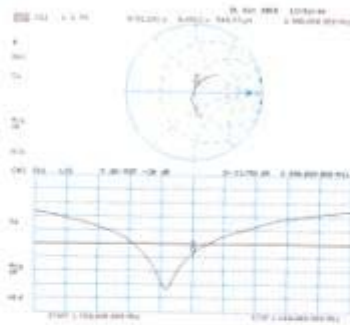


0 dB = 13.7 W/kg = 11.36 dB W/kg

Graphical No: 0100002-00115_0010

Page 5 of 8

Impedance Measurement Plot for Head TSL



Graphical No: 0100002-00115_0010

Page 6 of 8

DASY5 Validation Report for Body TSL

Date: 31.10.2016

Test Laboratory: SP/AG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d113

Communication System: UTD 0 - CW; Frequency: 1900 MHz
Medium parameters used: $f = 1900$ MHz, $\epsilon = 1.44$ Skin, $\mu = 55.2$, $\rho = 1000$ kg/m³
Phantom section: Flat Surface
Measurement Standard: DASY5 (IEEE/BCAN/CE3.19.2011)

DASY5 Configuration:

- Probe: EXCEP4 - SN7548; Core: P7 95, 8.05, 8.05; Calibration: 15.06.2016;
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DAQ4 16011; Calibration: 30.12.2015
- Phantom: Flat Phantom 5.0 (Back); Type: QD000P90AA; Serial: 1002
- DASY52: 52.8.6.1234; SEMCAD X 14.6.1007322

Dipole Calibration for Body Tissue/ $\rho = 200$ kg/m³, $d = 10$ mm/Zoom Scan (7x7x7) Cube B:

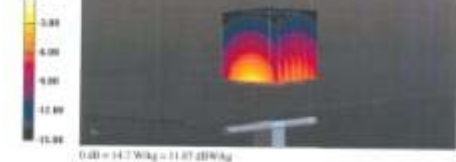
Measurement grid: $d_{\text{horiz}} = 10$ mm, $d_{\text{vert}} = 10$ mm

Solver: Value = 104.5 V/m; Power DUT = 410 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(10 g) = 9.8 W/kg; SAR(10 g) = 5.23 W/kg

Maximum value of SAR (measured) = 14.3 W/kg

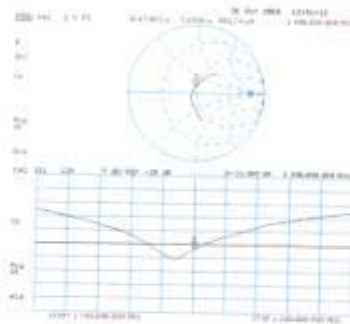


0 dB = 14.7 W/kg = 11.87 dB W/kg

Graphical No: 0100002-00115_0010

Page 7 of 8

Impedance Measurement Plot for Body TSL



Graphical No: 0100002-00115_0010

Page 8 of 8

D2450V2 S_n:738[illegible]

Calibration Laboratory of Swissair & Partner Engineering AG Angewandte Str. 9, 8954 Gais, Switzerland			Schweizerische Eidgenossenschaft Confédération suisse Confederaziun Svizra Confederaziun Svizra Swiss Confederation
Issued by the Swiss Accreditation Service (OAS) The Swiss Accreditation Service is the sole authority for the use of the accreditation in the EU Multilateral Agreement for the recognition of calibration certificates			Accreditation No.: SGS 0166
Client: TSL ComCo N/A	Issue stimulating field sensitivity in TSL / NORM 5.0.1 not applicable or not measured		
Calibration is Performed According to the Following Standards:			
• IEC 61010-1:2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013 • IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005 • IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010 • ECU 60656A, "SAR Measurement Requirements for 100 MHz to 6 GHz"			
Additional Documentation:			
a) DAEFAS system handbook			
Methods Applied and Interpretation of Parameters:			
• Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. • Antenna: Antennas with TSL. The dipole is mounted with the spacer in position its feed point exactly below the center marking of the far phantom section, with the arms oriented parallel to the body axis. • Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance station is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required. • Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required. • SAR measured: SAR measured at the distal antenna input power. • SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector. • SAR for nominal TBL parameters: The measured TBL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.			

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.9 $\pm$ 6 %	1.87 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.2 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.07 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.9 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.3 $\pm$ 6 %	2.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.0 W/kg $\pm$ 16.5 % (k=2)

Certificate No: D2450V2-738, Oct16

Page 3 of 8

Appendix (Additional Assessments outside the scope of SCS 0106)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$75 \pm 5 \Omega \pm 2 \text{ dB}$
Return loss	$> 10 \text{ dB}$

Antenna Parameters with Body TSL

Impedance, transformed to feedpoint	$40 \pm 10 \pm 5 \text{ dB}$
Return loss	$> 10 \text{ dB}$

General Antenna Parameters and Design

Connector (Antenna to cable)	1 MIL16
Electrical Delay (one direction)	

After being built with user 100W solid-state power, only a slight warping of the dipole (see the feedpoint) can be measured.

The shield is made of standard annealed copper cable. The center conductor of the loading line is directly connected to the second arm of the dipole. The antenna is therefore shield-mounted by DC signals. On some of the dipoles, small antennas are added to the dipole arms in order to improve matching when tested according to the position as explained in the "Measurement Considerations" paragraph. The SUT does not affect this at all. The overall dipole length is 100, according to the standard.

No excessive force must be applied to the dipole arms, because they might bend or the accident connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	OPTEAG
Manufactured on	August 05, 2005

Certificate No. 0040400-004, Conf-01

Page 4 of 8

D2450V2 Sn:738

DASY5 Validation Report for Head TSL

Date: 25.10.2016

Test Laboratory: SPEAG, Zurich, Switzerland

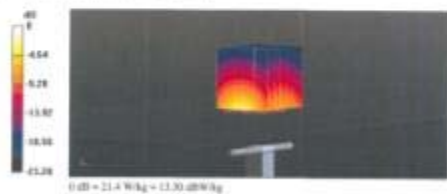
DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2-SN:738

Communication System: UED 9; CW; Frequency: 2450 MHz
Medium parameters used: $f = 2450$ MHz, $n = 1.87$ S/m, $\epsilon_r = 36.2$, $\rho = 1000$ kg/m³
Phantom version: Flat Surface
Measurement Standard: DASY5 (IEEE/IEC/ANSI C93.29-2011)

DASY5 Configuration:

- Probe: EX3DP14 - SNT500; Case(P): 7.75, 7.75, 7.75; Calibrated: 15.06.2016;
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DA69 Sub01; Calibrated: 30.12.2015
- Phantom: Flat Phantom 1.0 (Inert); Type: QD00P50AA; Serial: 1001
- DASY5: S2.8.8(129); SEMCAD X 14.4.00(7372)

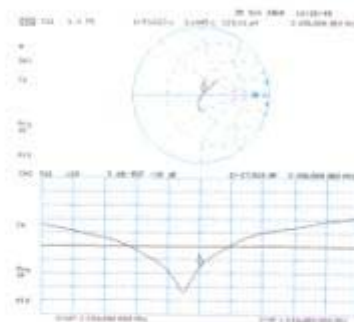
Dipole Calibration for Head Tissue/ $\rho = 230$ g/cm³, $d = 10$ mm/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: $d_x = 5$ mm, $d_y = 5$ mm, $d_z = 5$ mm
Reference Value: ≈ 13.7 dB; Power Dens: ≈ 0.10 dB
Peak SAR (extrapolated): ≈ 20.4 W/kg
SAR(1 g): ≈ 13.1 W/kg; SAR(10 g): ≈ 6.87 W/kg
Minimum value of SAR (measured): ≈ 2.14 W/kg



Coordinate File: D2450V2-TSL_2016

Page 5 of 8

Impedance Measurement Plot for Head TSL



Coordinate File: D2450V2-TSL_2016

Page 6 of 8

DASY5 Validation Report for Body TSL

Date: 25.10.2016

Test Laboratory: SPEAG, Zurich, Switzerland

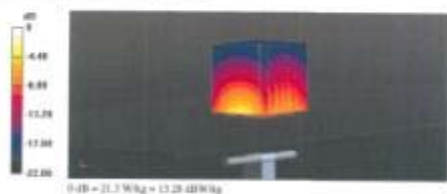
DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2-SN:738

Communication System: UED 9; CW; Frequency: 2450 MHz
Medium parameters used: $f = 2450$ MHz, $n = 2.00$ S/m, $\epsilon_r = 51.3$, $\rho = 1000$ kg/m³
Phantom version: Flat Surface
Measurement Standard: DASY5 (IEEE/IEC/ANSI C93.29-2011)

DASY5 Configuration:

- Probe: EX3DP14 - SNT500; Case(P): 7.75, 7.75, 7.75; Calibrated: 15.06.2016;
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DA69 Sub01; Calibrated: 30.12.2015
- Phantom: Flat Phantom 1.0 (Inert); Type: QD00P50AA; Serial: 1002
- DASY5: S2.8.8(129); SEMCAD X 14.4.00(7372)

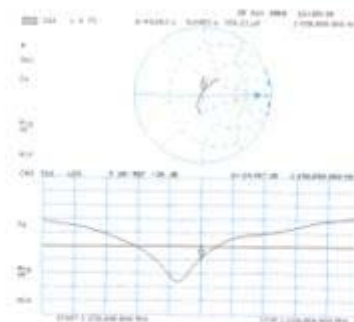
Dipole Calibration for Body Tissue/ $\rho = 230$ g/cm³, $d = 10$ mm/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: $d_x = 5$ mm, $d_y = 5$ mm, $d_z = 5$ mm
Reference Value: ≈ 107.3 dB; Power Dens: ≈ 0.10 dB
Peak SAR (extrapolated): ≈ 26.0 W/kg
SAR(1 g): ≈ 13.7 W/kg; SAR(10 g): ≈ 6.88 W/kg
Minimum value of SAR (measured): ≈ 2.13 W/kg



Coordinate File: D2450V2-TSL_2016

Page 7 of 8

Impedance Measurement Plot for Body TSL



Coordinate File: D2450V2-TSL_2016

Page 8 of 8

D2600V2 Sn:1089

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zürcherstrasse 43, 8034 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servicio suizo de calibración
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client: Sony Mobile CN (Vitec)

Certificate No.: D2600V2-1089_Jul16

CALIBRATION CERTIFICATE

Object: D2600V2 - SN: 1089

Calibration procedure(s): QA-CAL-05-v9
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: July 13, 2016

This calibration certificate documents the traceability to national standards, which ensure the physical units of measurement (SI).
The measurements and the uncertainties with confidence probability (coverage) are given on the following pages and are part of the certificate.

All calibrations have been conducted in the proper laboratory facility, environment temperature (20 ± 0.5 °C) and humidity (< 70%).

Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 134776	06-Apr-16 (No.: 217-02089-02089)	Apr-17
Power sensor NRP-251	SN: 130044	06-Apr-16 (No.: 217-02089)	Apr-17
Power sensor NRP-251	SN: 130046	06-Apr-16 (No.: 217-02089)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (DIN)	06-Apr-16 (No.: 217-02089)	Apr-17
Type II internal combination	SN: 5047-2 (NIST)	16-Apr-16 (No.: 217-02089)	Apr-17
Reference Power E2600V2	SN: 7349	15-Jan-16 (No.: E2600V2-016)	Jan-17
DAK1	SN: 651	30-Dec-15 (No.: DAK4-001) (DIN 15)	Dec-16

Secondary Standards	ID #	Check Date (to be used)	Scheduled Check
Power meter EPM-4103	SN: 0801480104	07-Oct-15 (No.: 217-02025)	to be used check Oct-16
Power sensor HP 3481A	SN: 1451267152	07-Oct-15 (No.: 217-02025)	to be used check Oct-16
Power sensor HP 3481A	SN: 1451267152	07-Oct-15 (No.: 217-02025)	to be used check Oct-16
HP generator N6661A (2)	SN: 1400374	15-Jun-16 (to be used check Aug-16)	to be used check Feb-16
Network Analyzer N16471C	SN: 1401765240	18-Oct-15 (to be used check Feb-16)	to be used check Feb-16

Calibrated by: Jonas
Laboratory Technician

Approved by: Rafał Polowski
Technical Manager

This certificate is valid only for the stated scope of calibration and is not valid for other purposes.

Certificate No.: D2600V2-1089_Jul16 Page 1 of 8

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zürcherstrasse 43, 8034 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servicio suizo de calibración
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL: tissue simulating liquid
ConvF: sensitivity in TSL / NORM x,y,z
N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDS 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4.5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement, multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No.: D2600V2-1089_Jul16

Page 2 of 8

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY7.5	1702.0.0.0
Extrapolation	Advanced Extrapolation	
Phantom	Module Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	(dx, dy, dz) = 5 mm	
Frequency	2600 MHz ± 1.5 kHz	

Head TSL parameters

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	79.0	1.96 mS/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.5 ± 6 %	2.02 mS/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.6 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	57.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ² (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.46 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.5 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.16 mS/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.4 ± 6 %	2.20 mS/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.6 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	53.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ² (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.1 W/kg ± 16.5 % (k=2)

Certificate No.: D2600V2-1089_Jul16

Page 3 of 8

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.5 (± 6.8) Ω
Return Loss	> 20.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	65.8 (± 6.0) Ω
Return Loss	> 22.7 dB

General Antenna Parameters and Design

Electrical Delay (see direction)	1.146 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard serrated coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connectors near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 15, 2014

Certificate No.: D2600V2-1089_Jul16

Page 4 of 8

D2600V2 Sn:1089

DASY5 Validation Report for Head TSL

Date: 13/07/2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1089

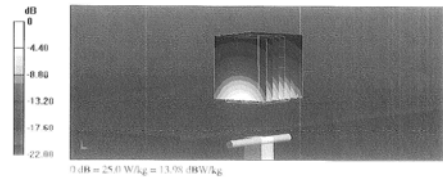
Communication System: UTD 0 - CW; Frequency: 2600 MHz
Medium parameters used: $f = 2600$ MHz; $n = 2.02$ S/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF:7.56, 7.56, 7.56; Calibrated: 15.06.2016;
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

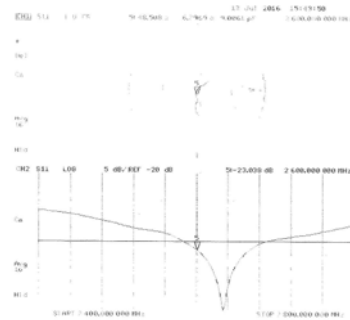
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 117.2 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 11.2 W/kg
SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.46 W/kg
Maximum value of SAR (measured) = 25.0 W/kg



CalcSource: 10460000-0000-0000

Page 5 of 8

Impedance Measurement Plot for Head TSL



CalcSource: 10460000-0000-0000-0000

Page 6 of 8

DASY5 Validation Report for Body TSL

Date: 07/07/2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1089

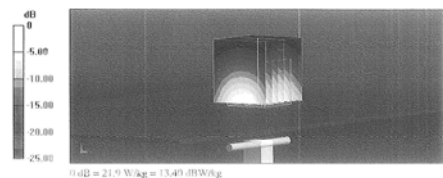
Communication System: UTD 0 - CW; Frequency: 2600 MHz
Medium parameters used: $f = 2600$ MHz; $n = 2.2$ S/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF:7.43, 7.43, 7.43; Calibrated: 15.06.2016;
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

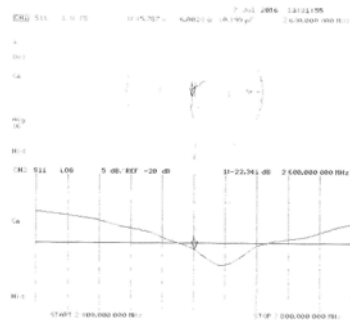
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 105.3 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 27.8 W/kg
SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.06 W/kg
Maximum value of SAR (measured) = 21.9 W/kg



CalcSource: 10460000-0000-0000-0000

Page 7 of 8

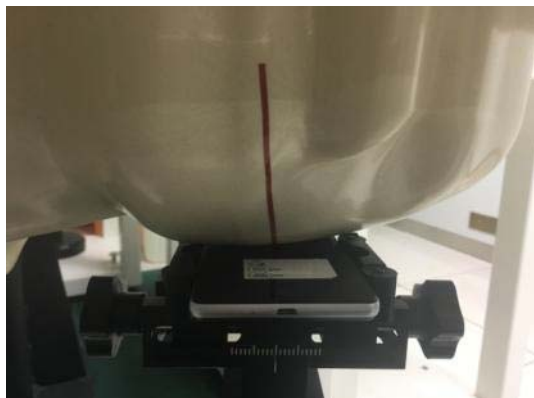
Impedance Measurement Plot for Body TSL



CalcSource: 10460000-0000-0000-0000

Page 8 of 8

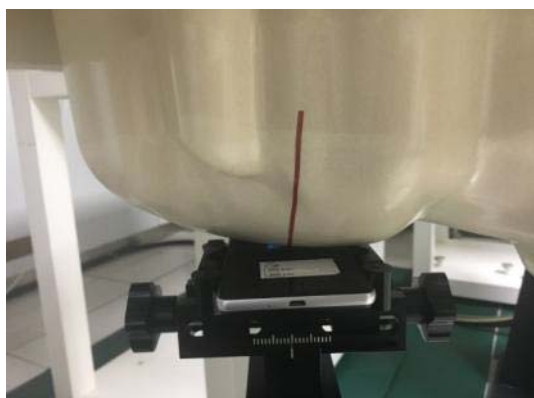
ANNEX C - PHOTOGRAPH



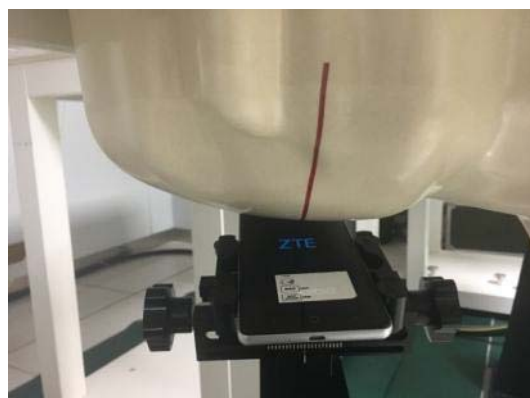
Cheek position, left side



Tilt position, left side



Cheek position, Right side



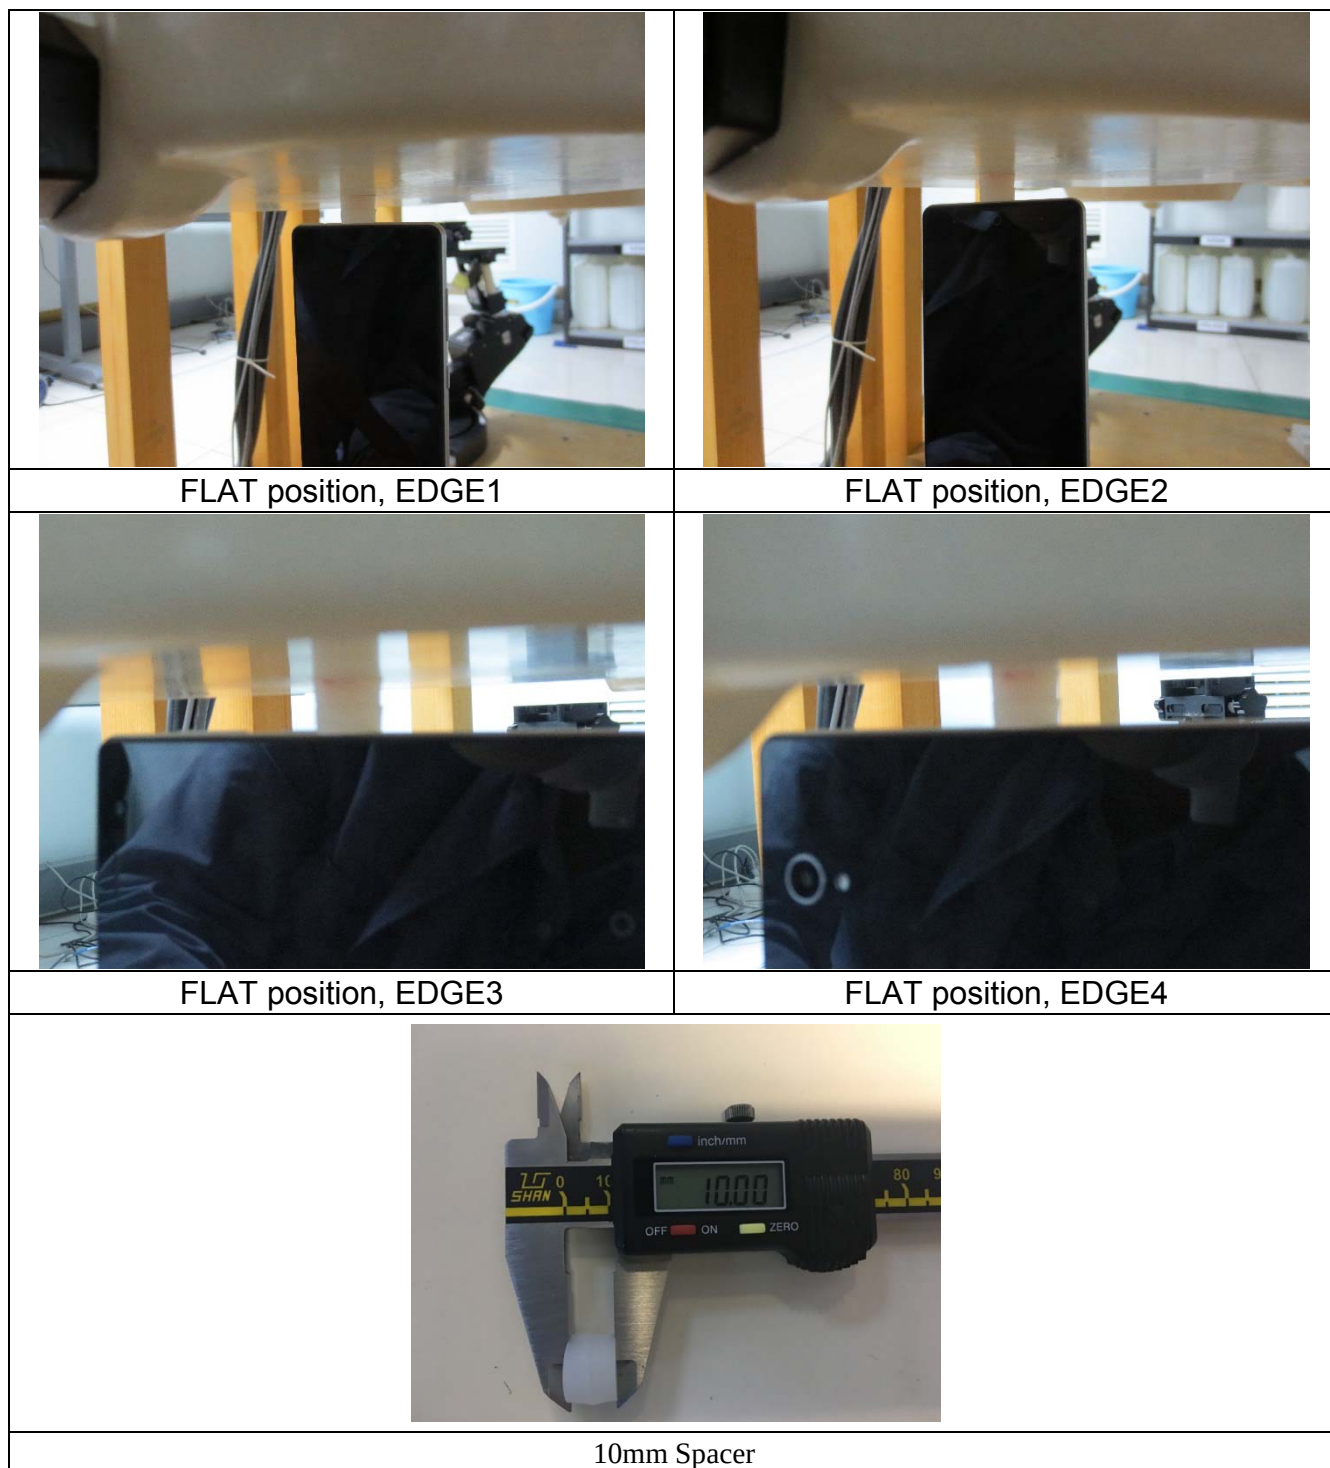
Tilt position, Right side



FLAT position, Towards phantom



FLAT position, Towards ground



---End of Test Report---