



EMC TEST REPORT

Applicant ZTE Corporation

FCC ID SRQ-ZTEBLADEV8Q

Product LTE/WCDMA/GSM (GPRS)
Multi-Mode Digital Mobile Phone

Model ZTE BLADE V0840 /ZTE BLADE V8Q/
BLADE V8Q

Report No. RXA1708-0309EMC01R1

Issue Date October 17, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2017)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Guangchang Fan

Performed by: Wei Liu/ Manager

Approved by: Guangchang Fan/ Director

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information.....	6
2.2	General information.....	6
2.3	Applied Standards.....	8
2.4	Test Mode.....	9
3	Test Case Results	10
3.1	Radiated Emission	10
3.2	Conducted Emission	16
4	Main Test Instrument.....	18
	ANNEX A: The EUT Appearance and Test Configuration.....	19
	A.1 EUT Appearance	19
	A.2 Test Setup.....	23
	A.3 Host Product.....	25



Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	15.107, ANSI C63.4-2014	PASS
Test Date: August 31, 2017~September 22, 2017			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

2.2 General information

EUT Description	
Device Type:	Portable Device
Product Name:	LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone
Model Number:	ZTE BLADE V0840 / ZTE BLADE V8Q / BLADE V8Q
HW Version:	MBV1.0
SW Version:	GEN_ZTE_V0840_V1.0
IMEI:	866032030009464
Antenna Type:	Internal Antenna
Used Host Product:	PC Manufacturer: lenovo Model: Thinkpad T540p (SN : SL10E37685)
Test Mode:	Transfer Data Mode
EUT Accessory	
Adapter 1	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD RUIJING Model: STC-A51A-Z
Adapter 2	Manufacturer: Jiangsu Chenyang Electronics Co., Ltd. Model: STC-A51A-Z
Adapter 3	Manufacturer: DONGGUAN AOHAI POWER TECHNOLOGY CO., LTD. Model: STC-A51A-Z
Adapter 4	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD RUIJING Model: STC-A51A-A
Adapter 5	Manufacturer: Jiangsu Chenyang Electronics Co., Ltd. Model: STC-A51A-A
Battery	Manufacturer: Zhongshan tianmao battery co., ltd Model: Li3825T43P3h736037



Earphone 1	Manufacturer: GoerTek Inc Model: HA3-3
Earphone 2	Manufacturer: Shenzhen FDC Electronics Co. ,Ltd. Model: DEM-53
USB Extend Cable 1	Manufacturer: Chuan electronics co., ltd SN: 080410500049
USB Extend Cable 2	Manufacturer: KoEY Huaxing electronics co., ltd SN: 080410500049
Remark: 1.The information of the EUT is declared by the manufacturer. 2. There is more than one USB cable/one Adapter, each one should be applied throughout the compliance test respectively, and however, only the worst case (USB cable 1/ Adapter 1) will be recorded in this report.	



2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2017)

ANSI C63.4 (2014)

2.4 Test Mode

Test Mode	
Mode 1:	Adapter + USB cable+ earphone + Camera On +GPS Rx + MP3 +Idle
Mode 2:	Adapter + USB cable+ earphone + MP3 +Idle
Mode 3:	Adapter + USB cable+ earphone +Idle
Mode 4:	Adapter + USB cable +Idle
Mode 6:	USB Copy(EUT with PC) + USB cable +earphone + Camera On + MP3+GPS Rx +Idle
Mode 7:	Camera On +earphone + GPS Rx +Idle
Mode 8:	Earphone+MP3+Idle
Mode 9:	Earphone +Idle

During the test, the preliminary test was performed in all modes (Camera/MP3/GPS) with all frequency bands (GSM/ WCDMA/ LTE/ BT/ Wi-Fi), mode 6 (with Camera + MP3 + GPS Rx + GSM/ WCDMA/ LTE/ BT/ Wi-Fi idle) selected as the worst condition. The test data of the worst-case condition was recorded in this report.

3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

Below 1GHz

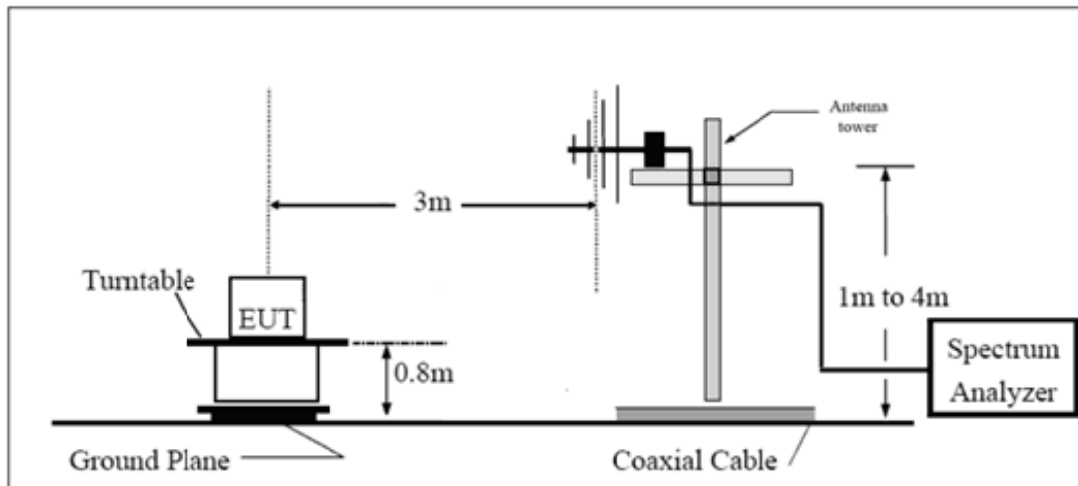

Above 1GHz

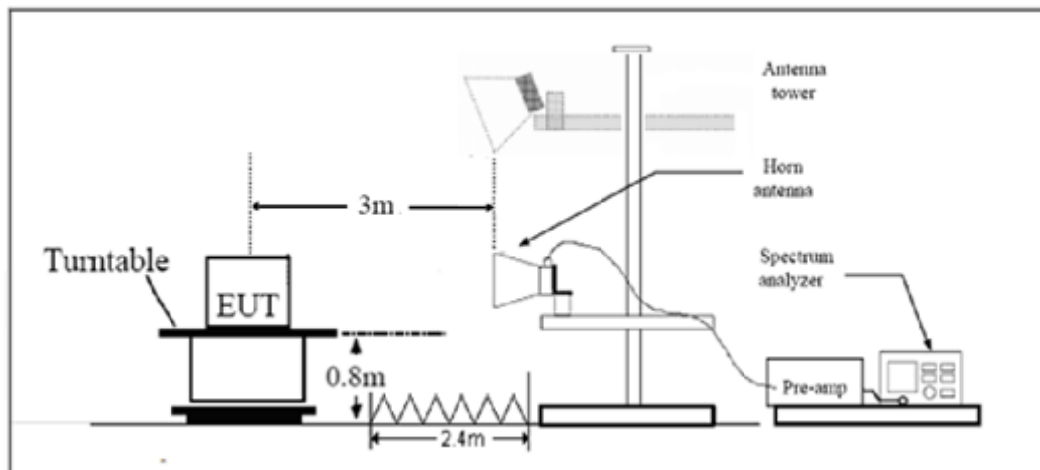

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.92$ dB.

Test Results

The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

FCC RE 0.03-1GHz QP Class B

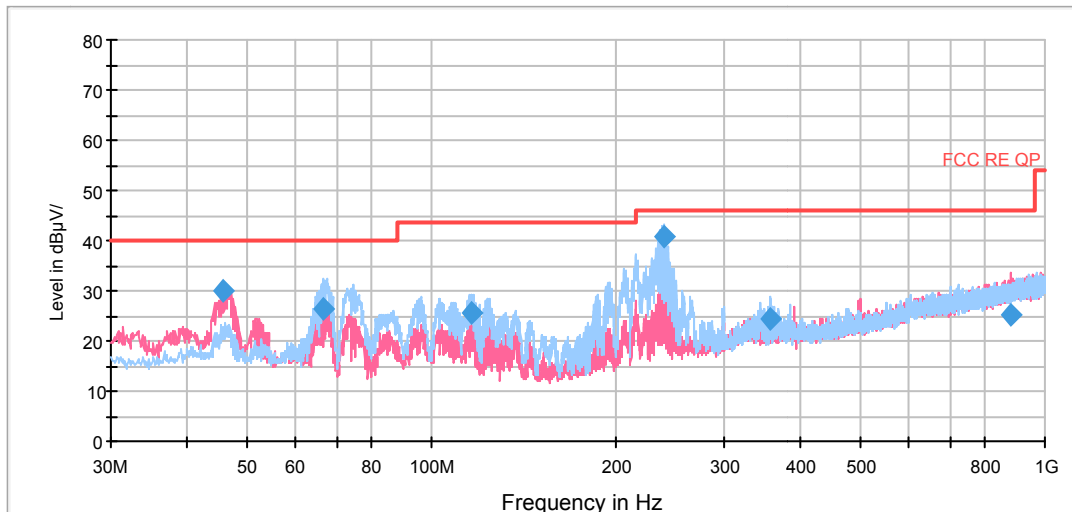


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
45.762500	30.1	16.9	100.0	V	86.0	13.2	9.9	40.0
66.738750	26.3	16.3	175.0	H	152.0	10.0	13.7	40.0
116.252500	25.5	14.3	216.0	H	158.0	11.2	18.0	43.5
240.005000	41.0	27.3	125.0	H	152.0	13.7	5.0	46.0
356.240000	24.3	7.0	100.0	H	200.0	17.3	21.7	46.0
877.013750	25.0	-1.4	175.0	V	16.0	26.4	21.0	46.0

- Remark: 1. Quasi-Peak = Reading value + Correction factor
2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
3. Margin = Limit – Quasi-Peak

FCC RE 1G-18GHz PK+AV Class B

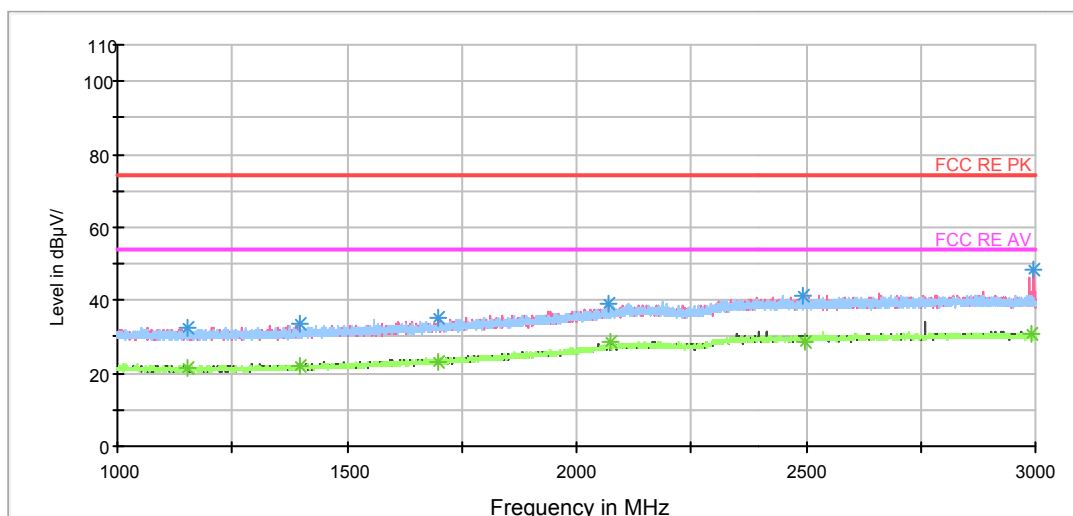


Radiated Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1152.000000	32.4	40.9	100.0	H	54.0	-8.5	41.6	74
1395.750000	33.7	40.7	100.0	V	227.0	-7.0	40.3	74
1698.750000	35.0	40.3	100.0	V	277.0	-5.3	39.0	74
2071.250000	39.2	42.1	100.0	V	132.0	-2.9	34.8	74
2493.250000	41.3	42.2	100.0	H	342.0	-0.9	32.7	74
2997.500000	48.2	48.8	100.0	V	357.0	-0.6	25.8	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1153.250000	21.2	29.7	100.0	V	206.0	-8.5	32.8	54
1398.250000	22.1	29.1	100.0	V	327.0	-7.0	31.9	54
1696.750000	23.2	28.5	100.0	V	109.0	-5.3	30.8	54
2074.250000	28.5	31.5	100.0	V	299.0	-3.0	25.5	54
2495.750000	28.9	29.8	100.0	V	161.0	-0.9	25.1	54
2992.500000	31.0	31.6	100.0	V	284.0	-0.6	23.0	54

FCC RE 1G-18GHz PK+AV Class B

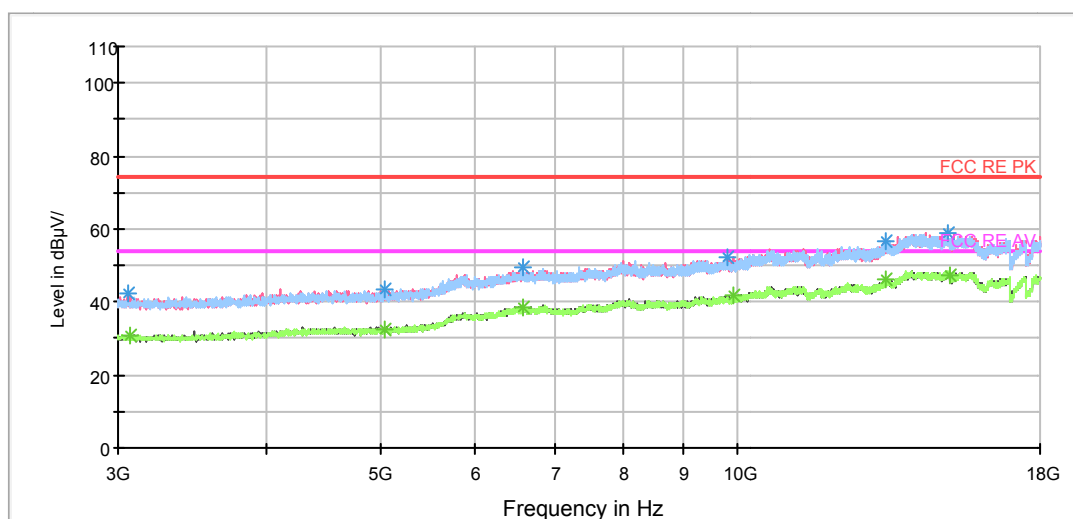

Radiated Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3054.375000	42.6	42.9	100.0	V	332.0	-0.3	31.4	74
5026.875000	43.7	42.0	100.0	H	81.0	1.7	30.3	74
6585.000000	49.7	42.3	100.0	V	226.0	7.4	24.3	74
9817.500000	52.0	40.6	100.0	V	200.0	11.4	22.0	74
13350.000000	56.5	40.8	100.0	H	99.0	15.7	17.5	74
15028.125000	58.9	41.5	100.0	H	125.0	17.4	15.1	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3067.500000	30.6	30.9	100.0	V	0.0	-0.3	23.4	54
5028.750000	32.4	30.6	100.0	V	253.0	1.8	21.6	54
6583.125000	38.5	31.1	100.0	V	0.0	7.4	15.5	54
9905.625000	41.5	30.1	100.0	V	332.0	11.4	12.5	54
13340.625000	46.2	30.5	100.0	H	55.0	15.7	7.8	54
15091.875000	47.4	29.8	100.0	V	358.0	17.6	6.6	54

3.2 Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

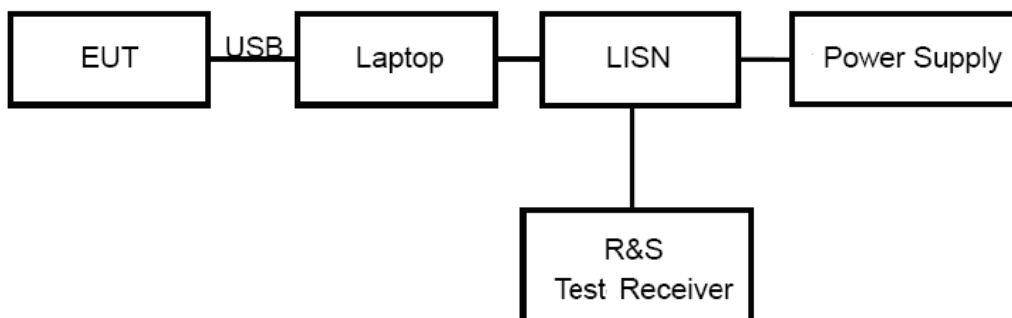

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.69$ dB.

Test Results


Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

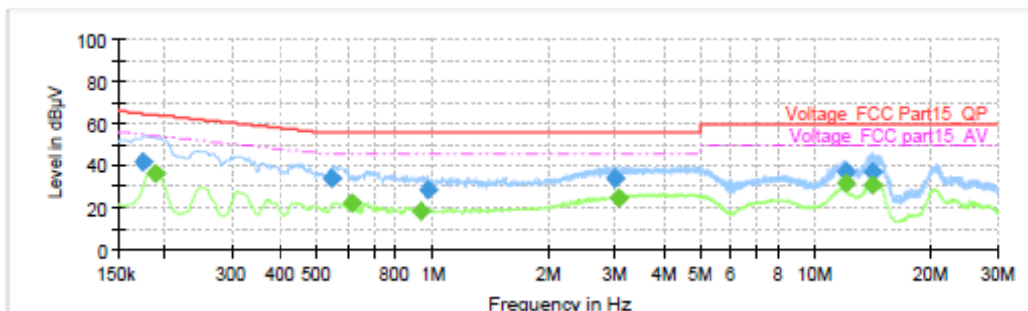

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.174750	42.08	---	64.73	22.65	1000.0	9.000	L1	ON	19.2
0.188250	---	36.21	54.11	17.91	1000.0	9.000	L1	ON	19.2
0.543750	33.94	---	56.00	22.06	1000.0	9.000	L1	ON	19.2
0.613500	---	22.47	46.00	23.53	1000.0	9.000	L1	ON	19.3
0.933000	---	18.47	46.00	27.53	1000.0	9.000	L1	ON	19.2
0.969000	28.76	---	56.00	27.24	1000.0	9.000	L1	ON	19.2
3.003000	34.15	---	56.00	21.85	1000.0	9.000	L1	ON	19.1
3.072750	---	24.94	46.00	21.06	1000.0	9.000	L1	ON	19.1
11.926500	37.46	---	60.00	22.54	1000.0	9.000	L1	ON	19.4
11.960250	---	31.64	50.00	18.36	1000.0	9.000	L1	ON	19.4
14.102250	37.33	---	60.00	22.67	1000.0	9.000	L1	ON	19.5
14.109000	---	31.17	50.00	18.83	1000.0	9.000	L1	ON	19.5

L line

Conducted Emission from 150 KHz to 30 MHz

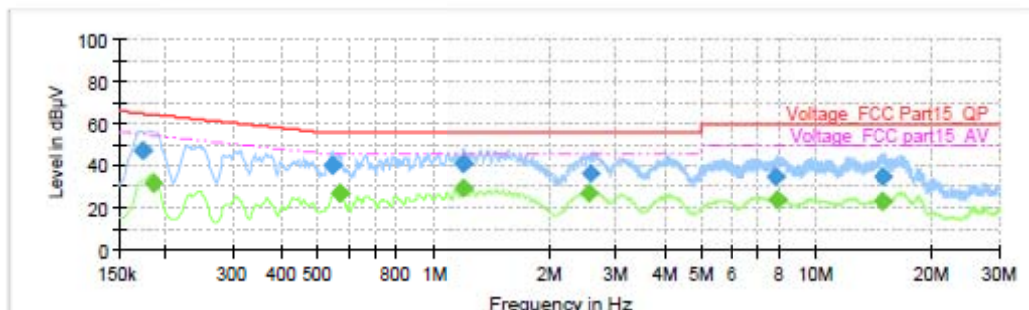

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.172500	47.19	---	64.84	17.65	1000.0	9.000	N	ON	19.2
0.183750	---	31.70	54.31	22.62	1000.0	9.000	N	ON	19.2
0.541500	40.59	---	56.00	15.41	1000.0	9.000	N	ON	19.2
0.566250	---	27.25	46.00	18.75	1000.0	9.000	N	ON	19.3
1.198500	40.92	---	56.00	15.08	1000.0	9.000	N	ON	19.2
1.198500	---	29.08	46.00	16.92	1000.0	9.000	N	ON	19.2
2.550750	---	27.15	46.00	18.85	1000.0	9.000	N	ON	19.0
2.557500	36.79	---	56.00	19.21	1000.0	9.000	N	ON	19.0
7.845000	34.83	---	60.00	25.17	1000.0	9.000	N	ON	19.2
7.894500	---	24.10	50.00	25.90	1000.0	9.000	N	ON	19.2
14.916750	---	22.90	50.00	27.10	1000.0	9.000	N	ON	19.5
14.919000	34.89	---	60.00	25.11	1000.0	9.000	N	ON	19.5

N line

Conducted Emission from 150 KHz to 30 MHz

4 Main Test Instrument

Name	Manufacturer	Type	Serial Number	Last Cal.	Cal. Due Date
Signal Analyzer	R&S	FSV30	100815	2016-12-16	2017-12-15
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-02-18	2019-02-17
Trilog Antenna	SCHWARZBECK	VULB 9163	9163-201	2014-12-06	2017-12-05
Horn Antenna	R&S	HF907	100126	2014-12-06	2017-12-05
Horn Antenna	ETS-Lindgren	3160-09	00102643	2015-01-30	2018-01-29
EMI Test Receiver	R&S	ESCS30	100138	2016-12-16	2017-12-15
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Bore Sight Antenna mast	ETS	2171B	00058752	NA	NA

ANNEX A: The EUT Appearance and Test Configuration

A.1 EUT Appearance



Front Side



Back Side

a: EUT



Adapter 1



Adapter 2



Adapter 3




Adapter 4




Adapter 5

b: Adapter

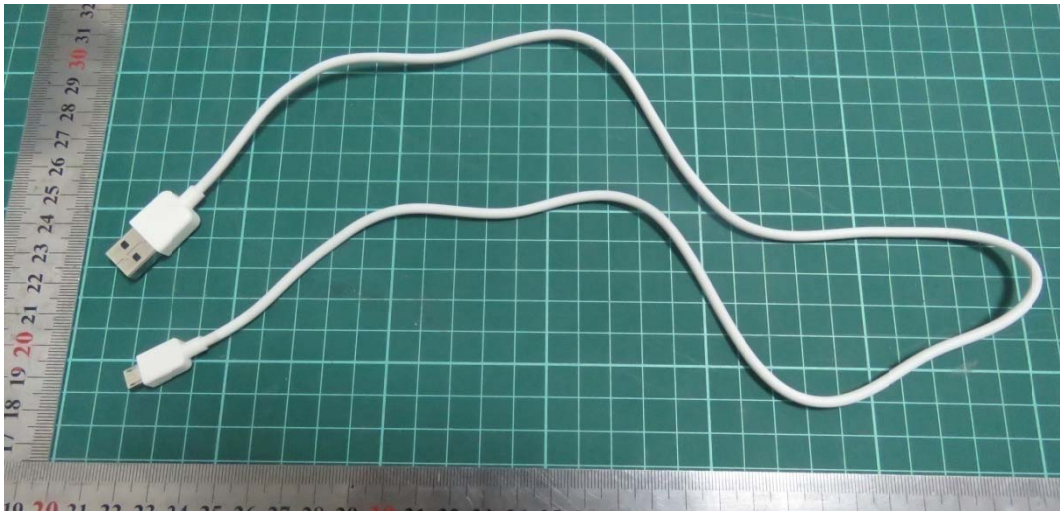

USB Cable 1

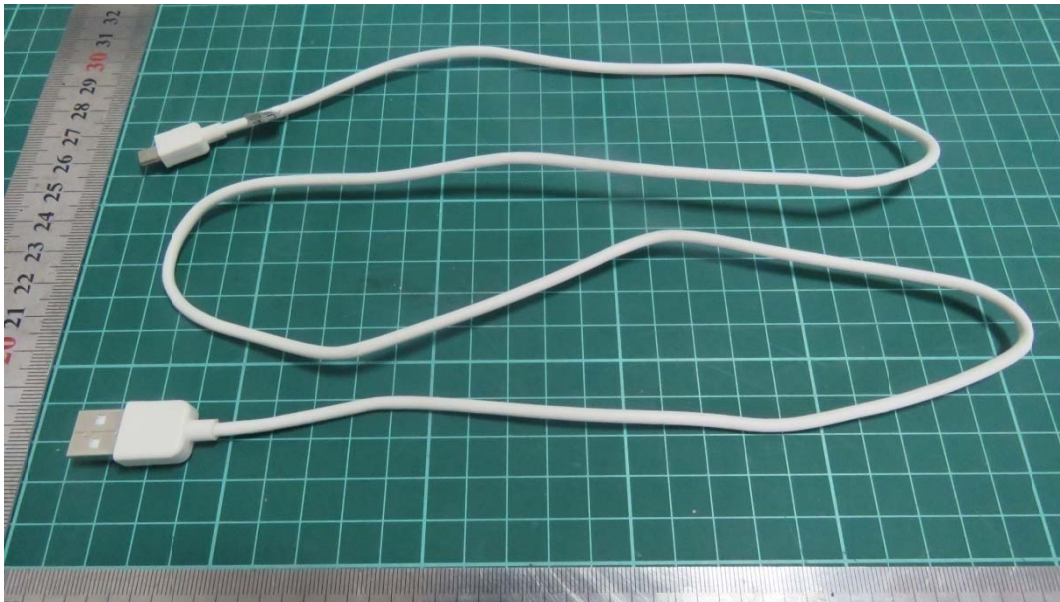USB Cable 2
c: USB Cable



Earphone 1




Earphone 2


d: Earphone

Picture 1 EUT

A.2 Test Setup

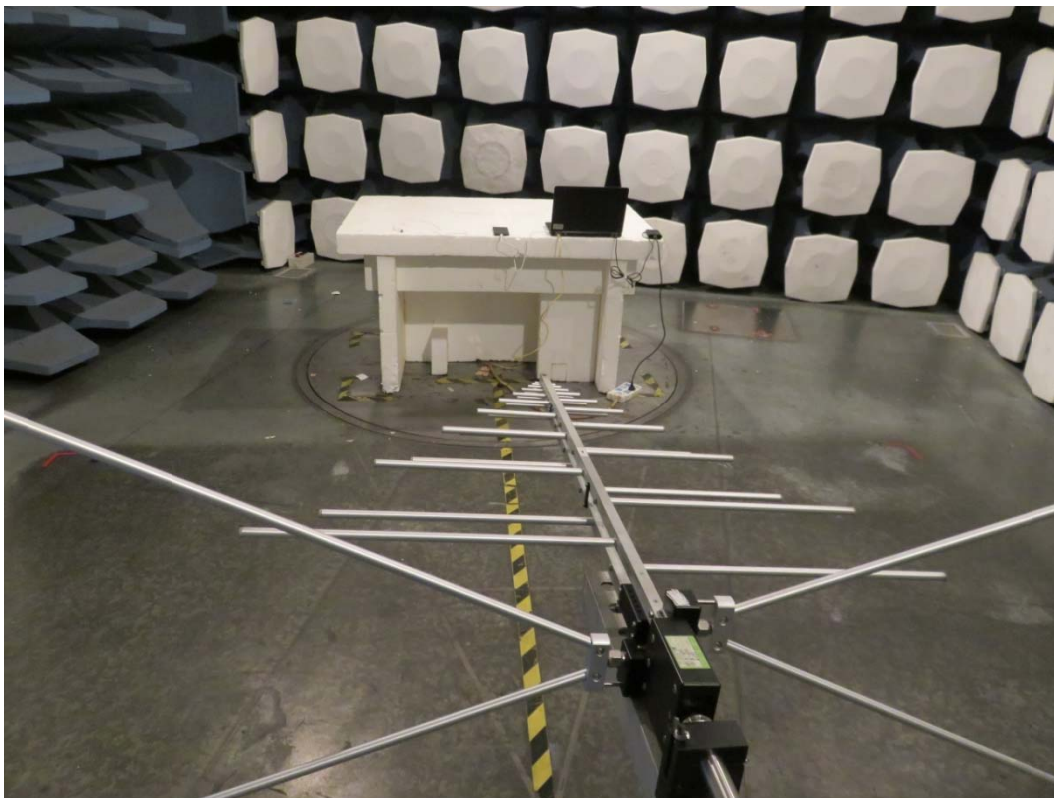

a: Below 1GHz

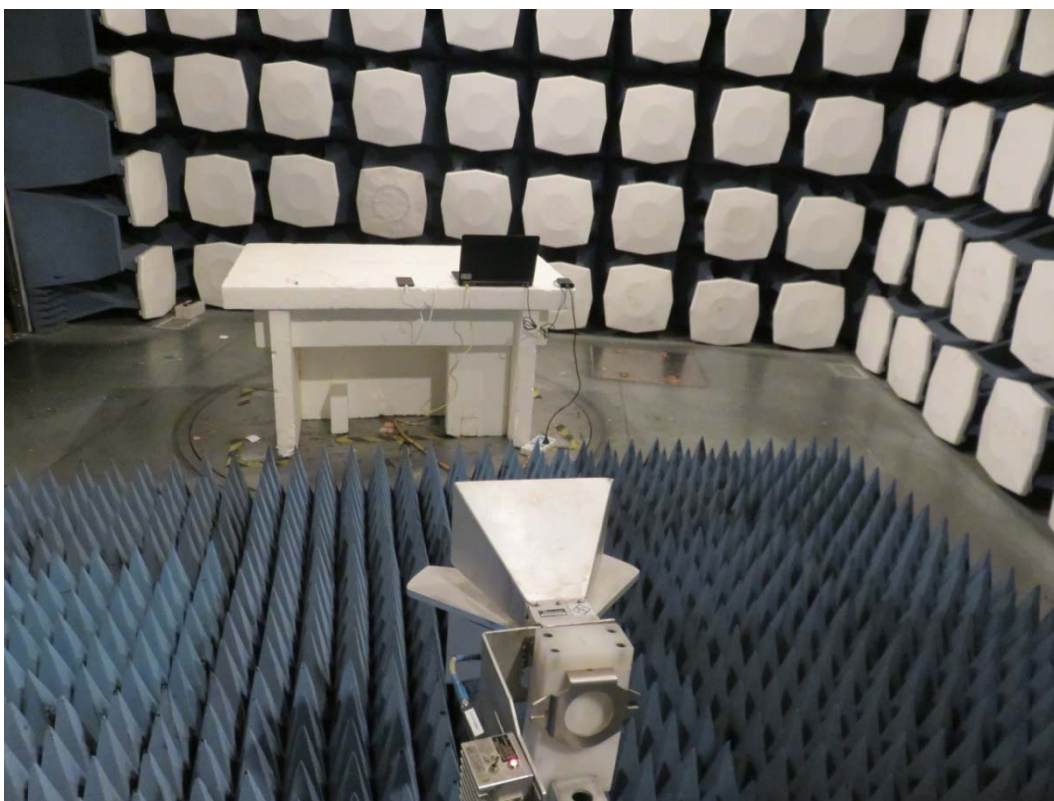

b: Above 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup

A.3 Host Product

