



EMC TEST REPORT

Report No.: SET2015-13042

Product Name: WCDMA/GSM(GPRS)Dual-Mode Digital Mobile Phone

FCC ID: SRQ-ZTEL3LITE

Model No. : ZTE Blade L3 Lite/Blade L3 Lite

Applicant: ZTE CORPORATION

Address: ZTE PLaza, Keji Road South,Shenzhen, China

Received Date: 2015-08-12

Tested Date: 2015-08-13—2015-09-11

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District,
Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **22** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : WCDMA/GSM(GPRS) Dual-Mode Digital Mobile Phone

Model No. : ZTE Blade L3 Lite/Blade L3 Lite

Applicant..... : ZTE CORPORATION

Applicant Address..... : ZTE PLaza, Keji Road South,Shenzhen, China

Manufacturer..... : ZTE CORPORATION

Manufacturer Address : ZTE PLaza, Keji Road South,Shenzhen, China

Test Standards..... : 47 CFR Part 15 Subpart B: Radio Frequency Devices

Test Result : PASS

Tested by : Xiao long zhang 2015.09.15
Xiaolong Zhang, Test Engineer

Reviewed by..... : Shuangwen zhang 2015.09.15
Shuangwen Zhang, Senior Engineer

Approved by : Wu Lian 2015.09.15
Wu Li'an, Manager

**TABLE OF CONTENTS**

1.	GENERAL INFORMATION	4
1.1	EUT Description	4
1.2	Test Standards and Results	5
1.3	Facilities and Accreditations	6
1.3.1	Facilities	6
1.3.2	Test Environment Conditions	6
1.3.3	Measurement Uncertainty	6
2.	TEST CONDITIONS SETTING	7
2.1	Test Peripherals	7
2.2	Test Mode	7
2.3	Test Setup and Equipments List	8
2.3.1	Conducted Emission	8
2.3.2	Radiated Emission	8
3.	47 CFR PART 15B REQUIREMENTS	11
3.1	Conducted Emission	11
3.1.1	Requirement	11
3.1.2	Test Description	11
3.1.3	Test Result	11
3.2	Radiated Emission	14
3.2.1	Requirement	14
3.2.2	Test Description	15
3.2.3	Test Result	15
4.	PHOTOGRAPHS OF THE EUT	20
5.	PHOTOGRAPHS OF THE TEST SET-UP	21

Change History		
Issue	Date	Reason for change
1.0	2015.09.15	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : WCDMA/GSM(GPRS)Dual-Mode Digital Mobile Phone
FCC ID : SRQ-ZTEL3LITE
Trade Name..... : ZTE
Brand Name..... : ZTE
Hardware Version..... : WMDM
Software Version : ZTE_CN_QB25S_P172A50V1.0.0
Power Supply : Battery

Model No.: Li3820T43P3h785439

Capacitance: 2000 mAh

Rated Voltage: 3.8V

Charge Limit: 4.35V

Ancillary Equipment 1 : AC Adapter (Charger for Battery)

Model No.: STC-A22O50I500USBA-Z

Rated Input: 100-240V, 50/60Hz ,200mA

Rated Output: 5V=700mA

*Note1:*The EUT is a WCDMA/GSM(GPRS)Dual-Mode Digital Mobile Phone, it supports the following operating frequency band:GSM850/900/18001900, WCDMA850/1900, Wifi 2.4G (802.11b,802.11g,802.11n/20M,802.11n/40M),GPS, Bluetooth3.0+EDR, Bluetooth4.0LE.

*Note2:*The EUT is equipped with a T-Flash card slot; equipped with a USB port which can be connected to the ancillary equipments.

*Note 3:*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2014	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2009.



1.3 Facilities and Accreditations

1.3.1 Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)

2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Description	Brand name	Model	Serial No.	FCCID /DOC
Notebook	ThinkPad	E430C	A131101550	/
Micro SD card	SanDisk	/	/	/
Mouse	deiog			DOC

2.2 Test Mode


(1) The first test mode

The EUT configuration of the emission tests is TransFlash Card + EUT + PC+Earphone.
In this test mode, the EUT with a TransFlash Card embedded is connected with a PC via a USB cable supplied by applicant. During the measurement, the data is transmitting between the PC and the TransFlash Card of the EUT.

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

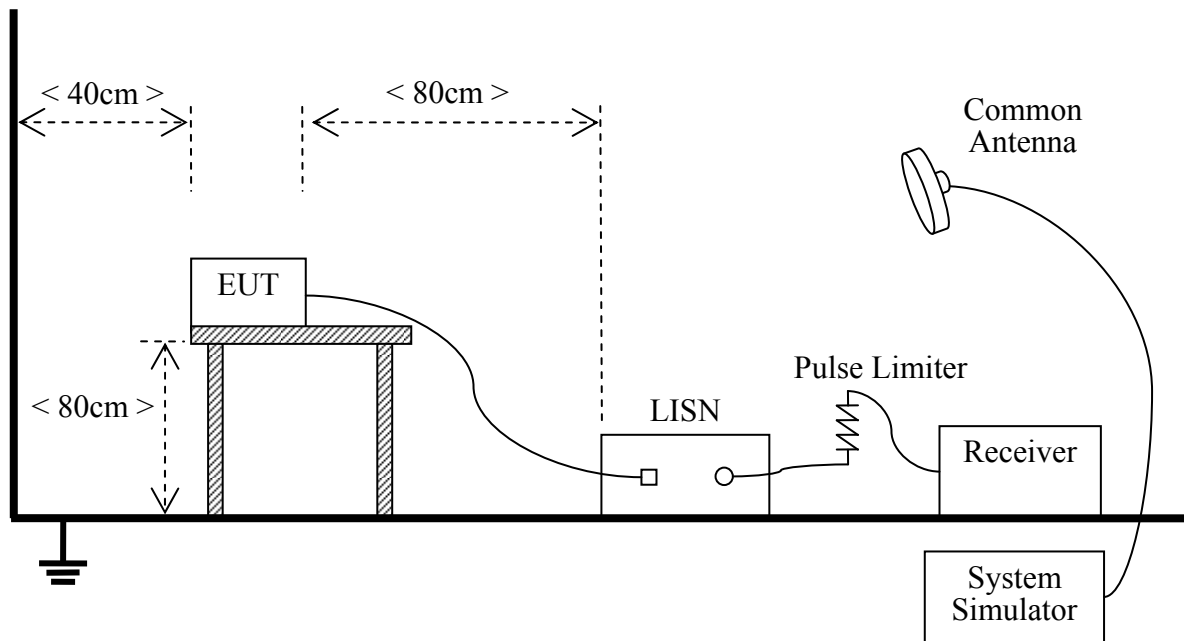

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50Ω/50μH of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	ROHDE&SCHWARZ	ESCI	A130901475	2014.09.09	2015.09.08
LISN	ROHDE&SCHWARZ	ENV216	/	2015.04.28	2016.04.27
Cable	MATCHING PAD	W7	/	2015.06.05	2016.06.04


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

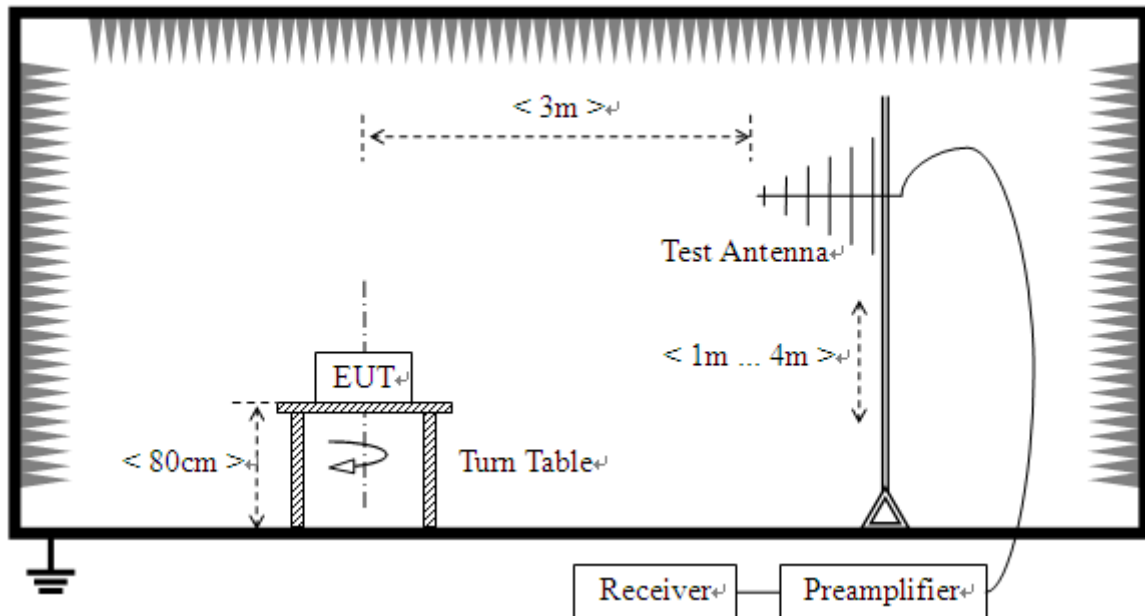

- 2) For radiated emissions above 1GHz

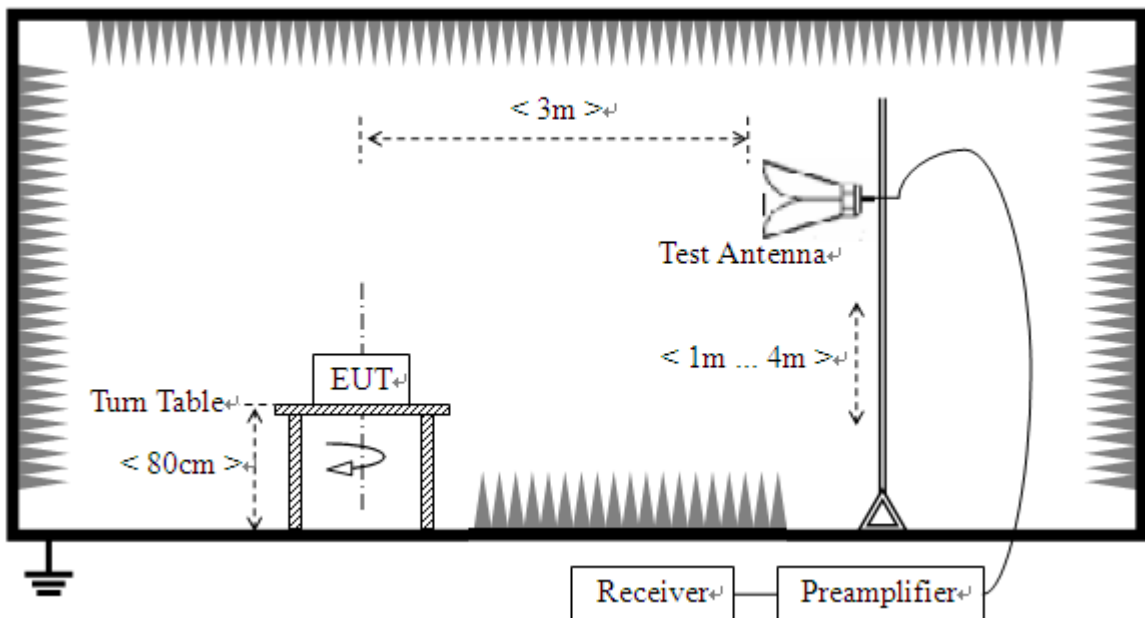

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a

variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2015.06.10	2016.06.09
Test Receiver	ROHDE&SCHWARZ	ESIB26	A0304218	2015.06.10	2016.06.09
Semi-Anechoic Chamber	Albatross	9m*6m*6m	A0412372	2015.03.22	2016.03.21
Test Antenna - Bi-Log	HP	CBL6111A	A9704202	2015.06.10	2016.06.09
Test Antenna – Horn	ROHDE&SCHWARZ	HF906	A0304225	2015.06.10	2016.06.09
Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2015.03.22	2016.03.21
Amplifier 1G~18GHz	ROHDE&SCHWARZ	MITEQ AFS42-001018 00	A0509366	2015.06.10	2016.06.09
Amplifier 20M~3GHz	Compliance Direction System	PAP-0203H	A0509377	2015.06.10	2016.06.09
Cable	SUNHNER	SUCOFLEX 100	/	2015.06.10	2016.06.09
Cable	SUNHNER	SUCOFLEX 104	MY1758/4	2015.06.10	2016.06.09

3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.


Test voltage and frequency (120V AC,60Hz)

A. Test Plot and Suspicious Points:

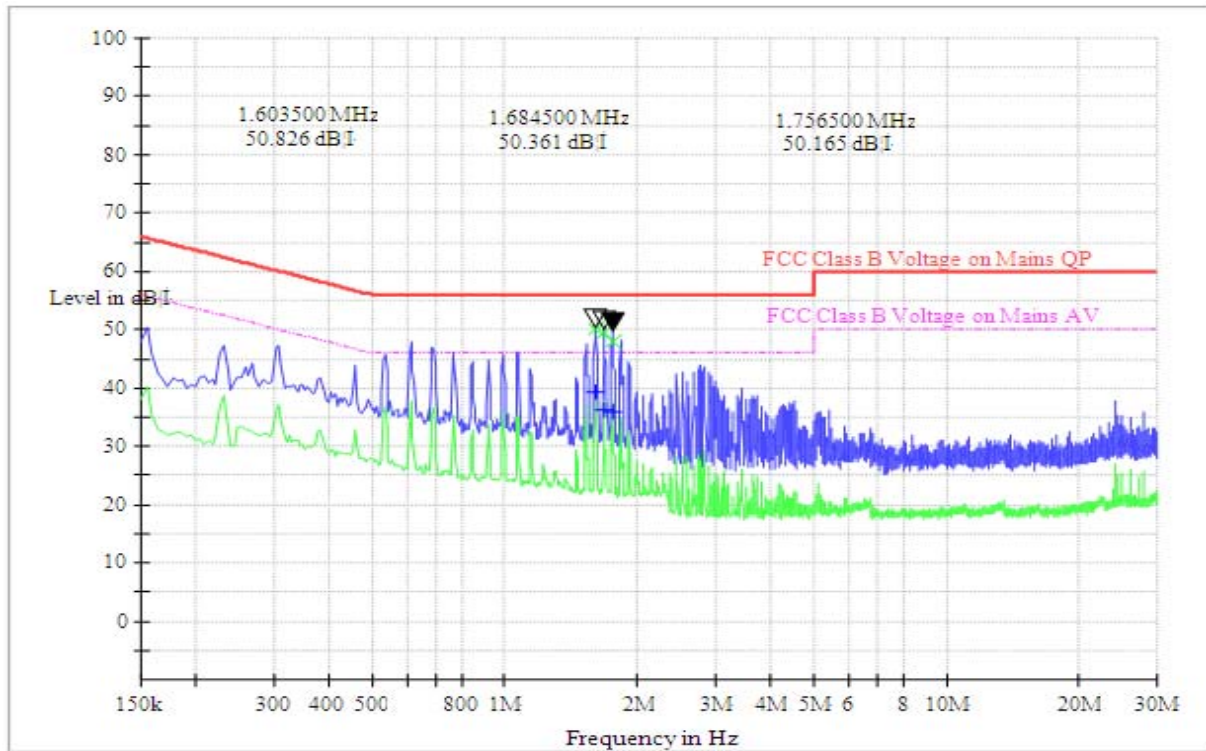

(Plot A: L Phase)

Conducted Disturbance at Mains Terminals							
L Test Data							
QP				AV			
Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)	Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)
1.6035	56.00	49.98	6.02	1.6035	46.00	39.26	6.74
1.6845	56.00	49.32	6.68	1.6845	46.00	36.24	9.76
1.7565	56.00	47.97	8.03	1.7565	46.00	36.03	9.97

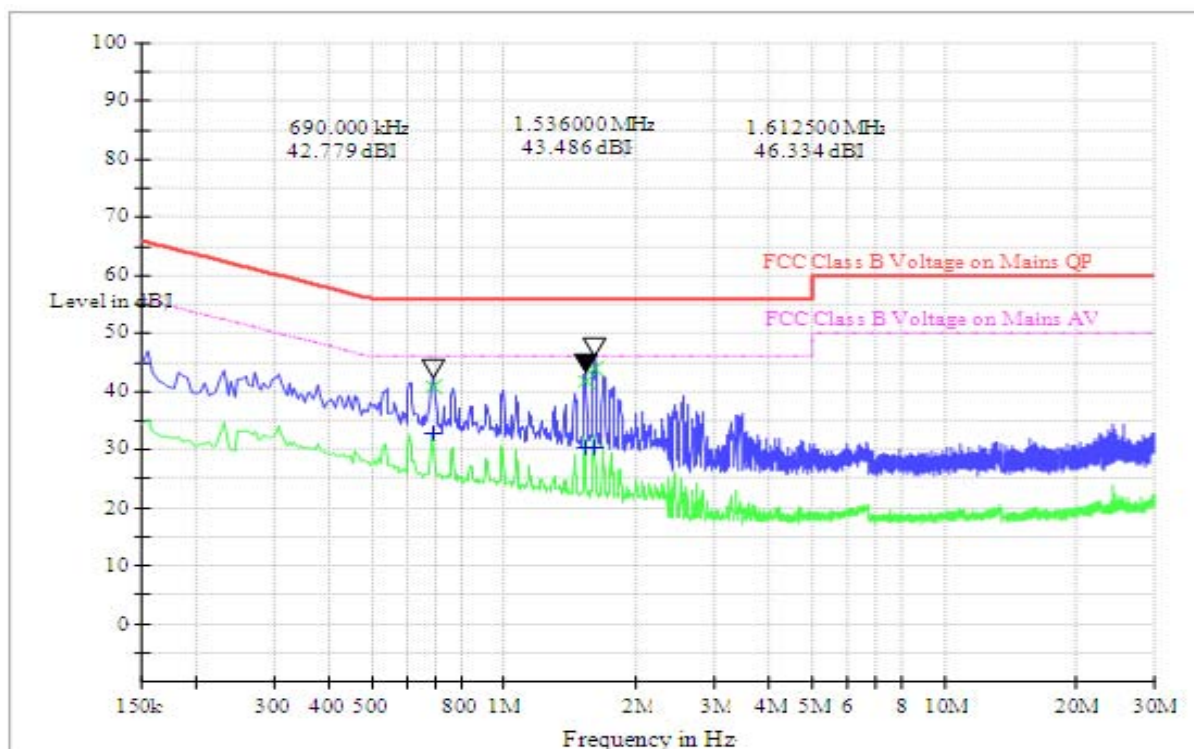

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals							
N Test Data							
QP				AV			
Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)	Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)
0.6900	56.00	40.93	15.07	0.3975	46.00	32.76	13.24
1.5360	56.00	41.86	14.14	0.4605	46.00	30.27	15.73
1.6125	56.00	43.95	12.05	19.9680	46.00	30.34	15.66

Test Result: PASS

3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	(dBuV/m)
0.009 - 0.490	$2400/F(\text{kHz})$	300m	$10000 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 80$
0.490 - 1.705	$2400/F(\text{kHz})$	30m	$100 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 40$
1.705 - 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;PK detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\mu\text{V/m})$.
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$



3.2.2 Test Description

See section 2.3.2 of this report.


3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

B. Test Plots and Suspicious Points:

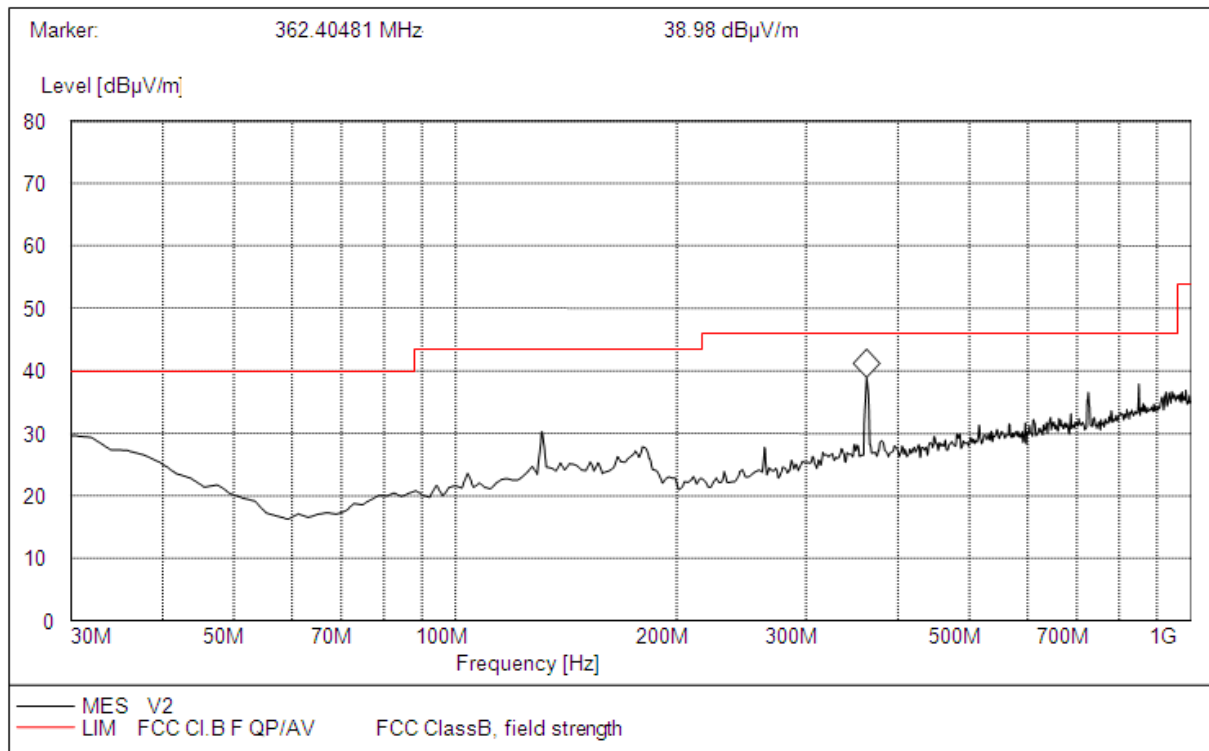


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBμV/m)	Margin (dB)	Antenna	Verdict
130.63000	29.72	120.000	168.0	43.50	13.78	Vertical	Pass
361.58000	37.18	120.000	240.0	46.00	8.82	Vertical	Pass
725.16000	36.35	120.000	185.0	46.00	9.65	Vertical	Pass

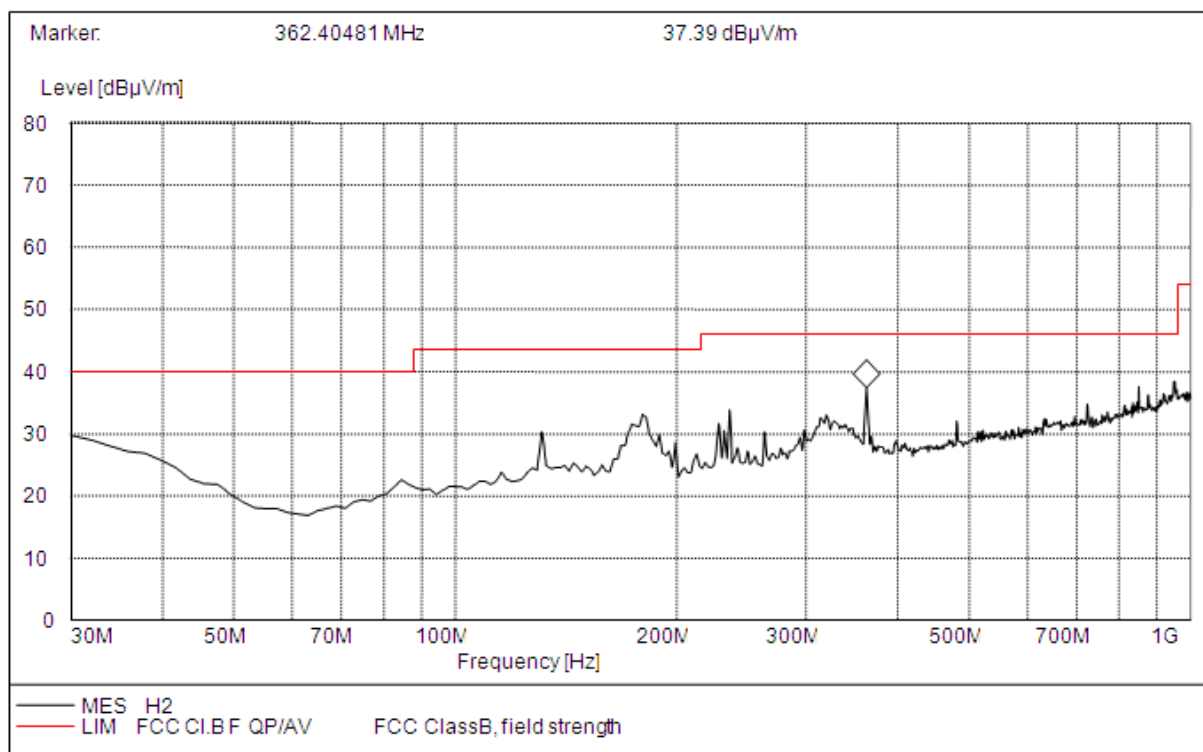


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBμV/m)	Margin (dB)	Antenna	Verdict
180.62000	30.43	120.000	292.0	43.50	13.07	Horizontal	Pass
231.48000	32.82	120.000	244.0	46.00	13.18	Horizontal	Pass
361.58000	36.75	120.000	183.0	46.00	9.25	Horizontal	Pass

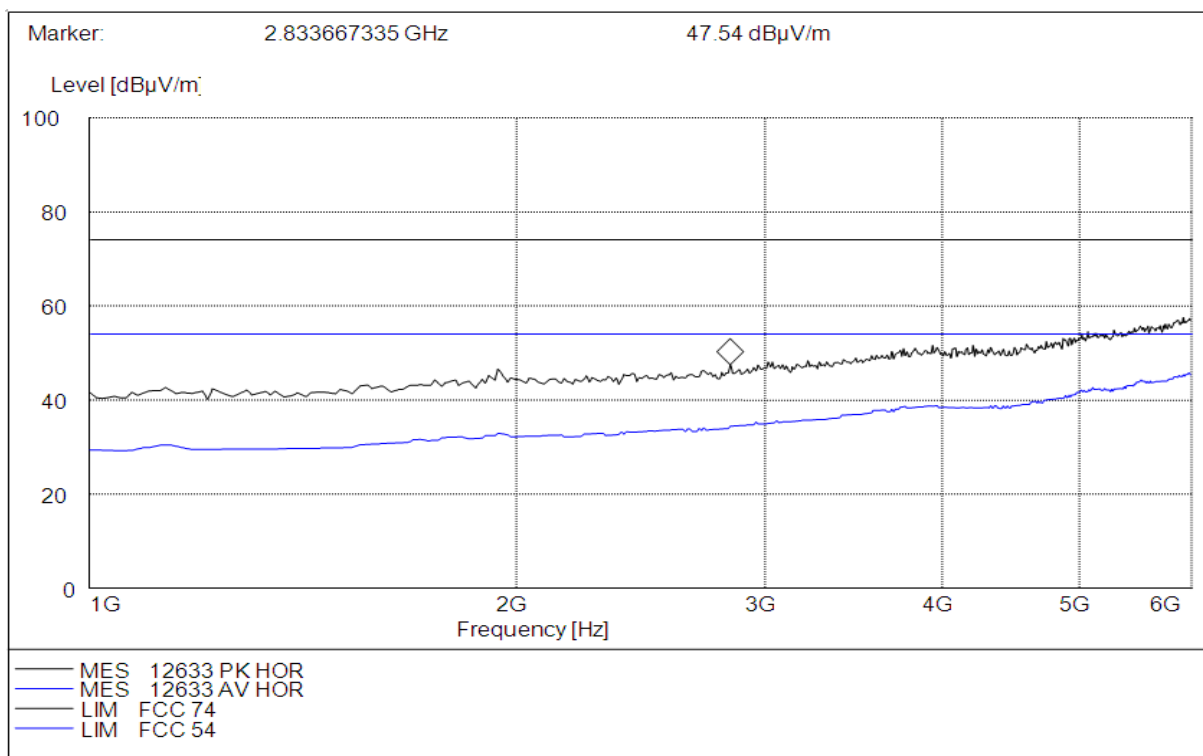

(Plot E: Test Antenna Horizontal 1G – 6G)

Frequency (MHz)	PK/AV (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
1175.74549	29.39	1000.000	267.0	54.00	24.61	Horizontal	Pass
1951.26352	31.78	1000.000	156.0	54.00	22.22	Horizontal	Pass
2833.65214	34.36	1000.000	280.0	54.00	19.64	Horizontal	Pass
1175.74549	41.58	1000.000	190.0	74.00	32.42	Horizontal	Pass
1951.26352	45.87	1000.000	245.0	74.00	28.13	Horizontal	Pass
2833.65214	45.75	1000.000	275.0	74.00	28.25	Horizontal	Pass

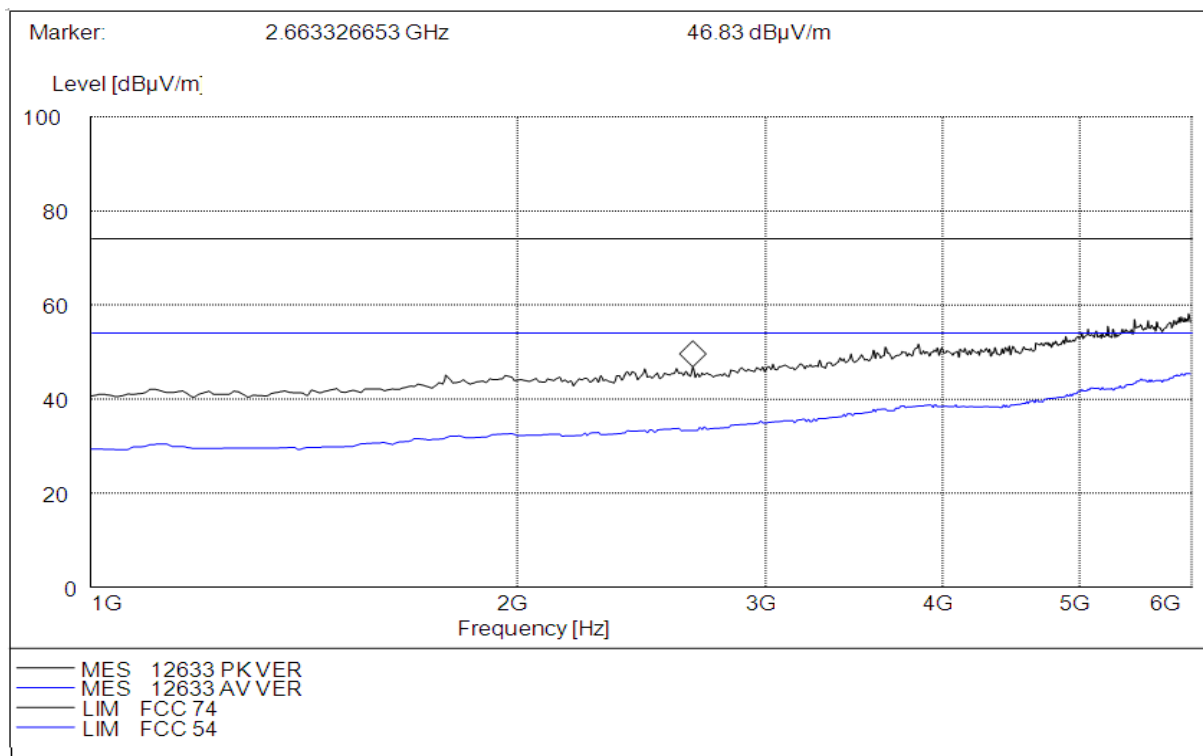

(Plot F: Test Antenna Vertical 1G – 6G)

Frequency (MHz)	PK/AV (dBμV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBμV/m)	Margin (dB)	Antenna	Verdict
1130.21090	29.55	1000.000	280.0	54.00	24.45	Vertical	Pass
1810.75452	31.07	1000.000	270.0	54.00	22.93	Vertical	Pass
2663.32549	33.56	1000.000	230.0	54.00	20.44	Vertical	Pass
1130.21090	40.25	1000.000	185.0	74.00	33.75	Vertical	Pass
1810.75452	42.65	1000.000	275.0	74.00	31.35	Vertical	Pass
2663.32549	44.38	1000.000	250.0	74.00	29.62	Vertical	Pass

Test Result: PASS

4. PHOTOGRAPHS OF THE EUT




5. PHOTOGRAPHS OF THE TEST SET-UP



Conducted Emission



Radiated Emission of 30M-1G

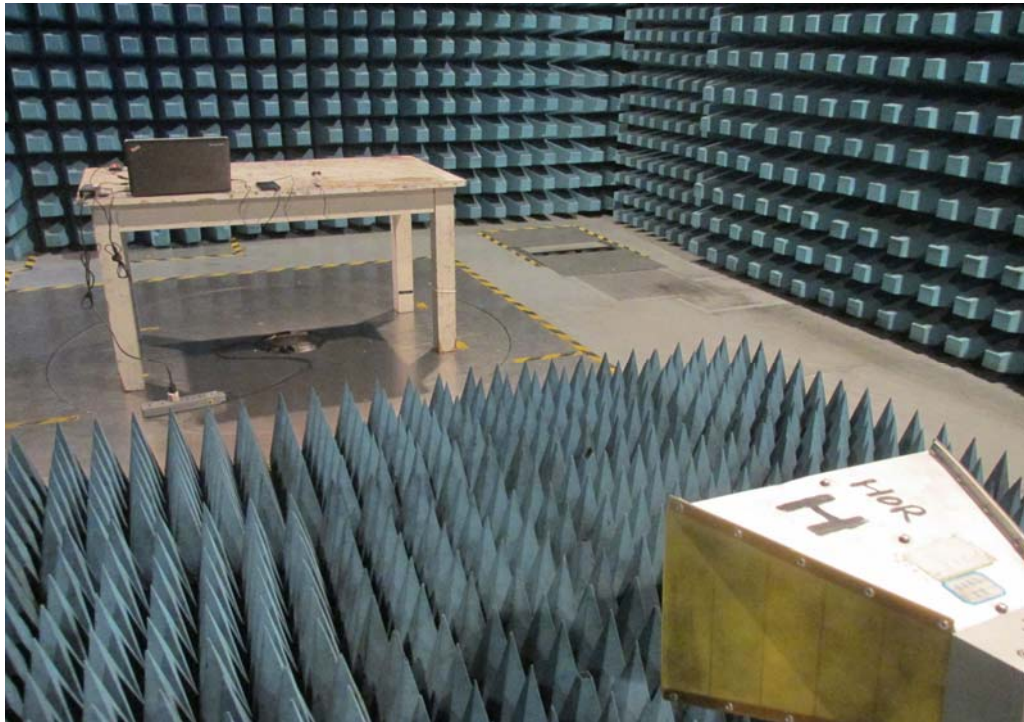

Radiated Emission of 1-6G

** END OF REPORT **