HAC TEST REPORT

Applicant	ZTE Corporation
FCC ID	SRQ-ZTEN9131
Product	LTE/WCDMA/GSM/CDMA
	Multi-Mode Digital Mobile Phone
Model	N9131
Report No.	RXA1603-0039HAC02R1
Issue Date	April 28, 2016

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **ANSI C63.19-2011**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Liang Ye

Performed by: Liang Ye

Jiang peng Lan

Approved by: Jiangpeng Lan

Kai Xu

Reviewed by: Kai Xu

ilac-MRA

CNAS TESTING No. L2264

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1 Test Laboratory 3
1.1 Notes of the Test Report 3
1.2 Test facility 3
1.3 Testing Location 4
1.4 Laboratory Environment 4
2 Statement of Compliance 5
3 Description of Equipment under Test 6
4 Test Specification and Operational Conditions 9
4.1 Test Specification 9
5 Test Information 10
5.1 Operational Conditions during Test 10
5.1.1 General Description of Test Procedures 10
5.1.2 GSM Test Configuration 10
5.1.3 WCDMA Test Configuration 10
5.2 T-Coil Measurements System Configuration 10
5.2.1 T-coil Measurement Set-up 10
5.2.2 AM1D Probe 13
5.2.3 Audio Magnetic Measurement Instrument (AMMI) 14
5.2.4 Helmholtz Calibration Coil (AMCC) 15
5.2.5 Test Arch Phantom & Phone Positioner 15
5.3 T-Coil measurement points and reference plane 16
5.4 T-Coil Test Procedueres 17
6 T-Coil Performance Requirements 19
6.1 T-Coil coupling field intensity 19
6.2 Frequency response 19
6.3 Signal quality 20
7 Summary Test Results 21
7.1 GSM 850 21
7.2 GSM 1900 22
7.3 WCDMA Band II 23
7.4 WCDMA Band IV 24
7.5 WCDMA Band V 25
7.6 CDMA BC0 26
7.7 CDMA BC1 27
7.8 CDMA BC10 28
8 Measurement Uncertainty 29
9 Main Test Instruments 31
ANNEX A: Test Layout 32
ANNEX B: Graph Results 33
ANNEX C: Probe Calibration Certificate 73
ANNEX D: DAE4 Calibration Certificate 76

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd).**The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Xu Kai

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: http://www.ta-shanghai.com

E-mail: xukai@ta-shanghai.com

1.4 Laboratory Environment

Temperature	Min. = 18°C, Max. = 28 °C
Relative humidity	Min. = 0%, Max. = 80%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

2 Statement of Compliance

Table 2.1: T-Coil signal quality categories of each tested Mode

Band	Category
GSM 850	T4
GSM 1900	T4
WCDMA Band II	T4
WCDMA Band IV	T4
WCDMA Band V	T4
CDMA BC0	T4
CDMA BC1	T4
CDMA BC10	T4
Date of Testing: March 30, 2016	

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

3 Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

General Technologies

Device Type:	Portable Device	
EUT Stage	Production Unit	
Model	N9131	
MEID:	99000680000346	
Hardware Version	cuzA	
Software Version	N9131V1.0.0B01	
Antenna Type	Internal Antenna	
Device Operating Configurations:		
Tested Mode(s):	GSM 850/GSM 1900; WCDMA Band II/IV/V CDMA BC0/BC1/BC10	
Test Modulation:	(GSM)GMSK;(WCDMA) QPSK;(CDMA) QPSK;	
Operating Frequency Range(s):	Mode	Tx (MHz)
	GSM 850	824.2 ~ 848.8
	GSM 1900	1850.2 ~ 1909.8
	WCDMA Band II	1852.4 ~ 1907.6
	WCDMA Band IV	1712.4 ~ 1752.6
	WCDMA Band V	826.4 ~ 846.6
	CDMA BC0	824.7 ~ 848.31
	CDMA BC1	1851.25 ~ 1908.75
	CDMA BC10	817.9 ~ 823.1
Power Class:	GSM 850: 4 GSM 1900: 1 WCDMA Band II/IV/VIII: 3 CDMA BC0/BC1/BC10: 3	
Power Level	GSM 850: level 5 GSM 1900: level 0 WCDMA Band II/IV/VIII: Tested with Power Control All up bits CDMA BC0/BC1/BC10: Tested with Power Control All up bits	
Test Channel/ Frequency(MHz): Middle	190/836.6 (GSM 850) 661/1880 (GSM 1900) 9400/1880 (WCDMA Band II) 1412/1732.4 (WCDMA Band IV) 4183/836.6 (WCDMA Band V) 384/836.52 (CDMA BC0) 600/1880 (CDMA BC1) 580/820.5 (CDMA BC10)	
Accessory Equipment		
Battery	Manufacturer: SCUD(FUJIAN)ELECTRONICS Model: Li3922T44P6h903546 Power Rating: DC 3.8V, 2200mAh, Li-ion	

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Air-Interface	Band (MHz)	Type	HAC tested	Simultaneous Transmissions Note: Not to be tested	Reduced power 20.19(c)(1)	Voice Over Digital Transport (Data)
GSM	850	VO	Yes	Yes BT and Wi-Fi	NA	NA
	1900	VO			NO	NA
	GPRS/EGPRS	DT	NA	Yes BT and Wi-Fi	NA	NA
WCDMA	Band II	VO	Yes	Yes BT and Wi-Fi	NA	NA
	Band IV	VO	Yes		NA	NA
	Band V	VO	Yes		NA	NA
	HSDPA/HSUPA /HSPA+/DC-HS DPA/RMC	DT	NA	Yes BT and Wi-Fi	NA	NA
CDMA	BC0	VO	Yes	Yes BT and Wi-Fi	NA	NA
	BC1	VO	Yes		NA	NA
	BC10	VO	Yes		NA	NA
	EVDO	DT	NA	Yes BT and Wi-Fi	NA	NA
	1X Advance	VO	NA	Yes BT and Wi-Fi	NA	NA
Wi-Fi	2450	DT	NA	Yes GSM, CDMA, WCDMA, BT	NA	NA
Bluetooth (BT)	2440	DT	NA	Yes GSM, CDMA, WCDMA, Wi-Fi	NA	NA

VO Voice CMRS/PSTN Service only
V/D Voice CMRS/PSTN and Data Service Transport

*HAC Rating was based on concurrent voice and data modes, Non current mode was found to DT Digital represent worst case rating for both M and T rating

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

4 Test Specification and Operational Conditions

4.1 Test Specification

The tests documented in this report were performed in accordance with the following:

ANSI C63.19-2011
KDB285076 D01 HAC Guidance v04
KDB285076 D02 T-Coil testing for CMRS IP v01r01

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5 Test Information

5.1 Operational Conditions during Test

5.1.1 General Description of Test Procedures

The phone was tested in all normal configurations for the ear use. The EUT is mounted in the device holder equivalent as for classic dosimeter measurements. The acoustic output of the EUT shall coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame The EUT shall be moved vertically upwards until it touches the frame. The fine adjustment is possible by sliding the complete. EUT holder on the yellow base plate of the Test Arch phantom. During the test, the EUT is selected on T-Coil mode, the LCD backlight is turn off and volume is adjusted to maximum level.

No associated T-coil measurement has been made in accordance with the guidance issued by OET in KDB publication 285076 D02 T-Coil testing for CMRS IP.

5.1.2 GSM Test Configuration

A communication link is set up with a System Simulator (SS) by RF cable, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 190 respectively in the case of GSM 850, allocated to 661 respectively in the case of GSM 1900. T-Coil configurations is measured in Speechcod/Hendset Low using System Simulator (SS) of CMU200 , at the same time the EUT shall be operated at its maximum RF output power setting.

5.1.3 WCDMA Test Configuration

A communication link is set up with a System Simulator (SS) by RF cable, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) are allocated to 9400 respectively in the case of WCDMA Band II, allocated to 1413 respectively in the case of WCDMA Band IV, allocated to 4183 respectively in the case of WCDMA Band V. T-Coil configurations is measured in voice mode with 12.2kps RMC using System Simulator (SS) of CMU200, at the same time the EUT shall be operated at its maximum RF output power setting.

5.2 T-Coil Measurements System Configuration

5.2.1 T-coil Measurement Set-up

These measurements are performed using the DASY5 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. Cell

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

controller systems contain the power supply, robot controller, teach pendant (Joystick) and remote control, and are used to drive the robot motors. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

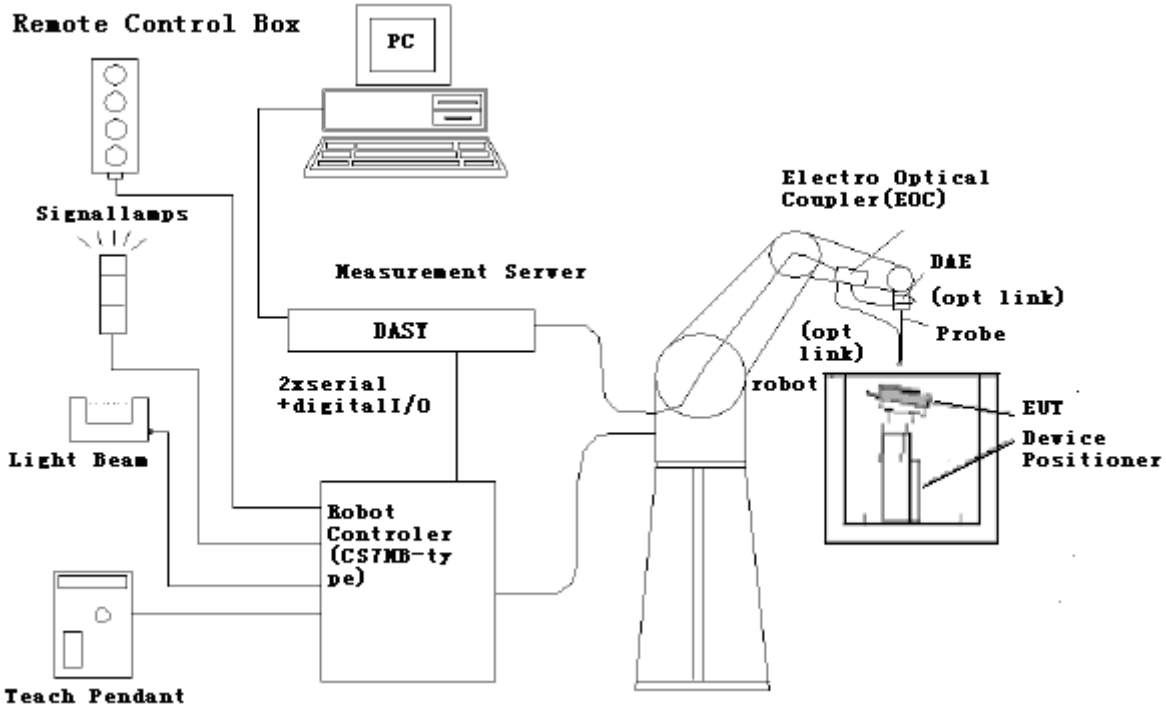

Figure 1 T-Coil Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

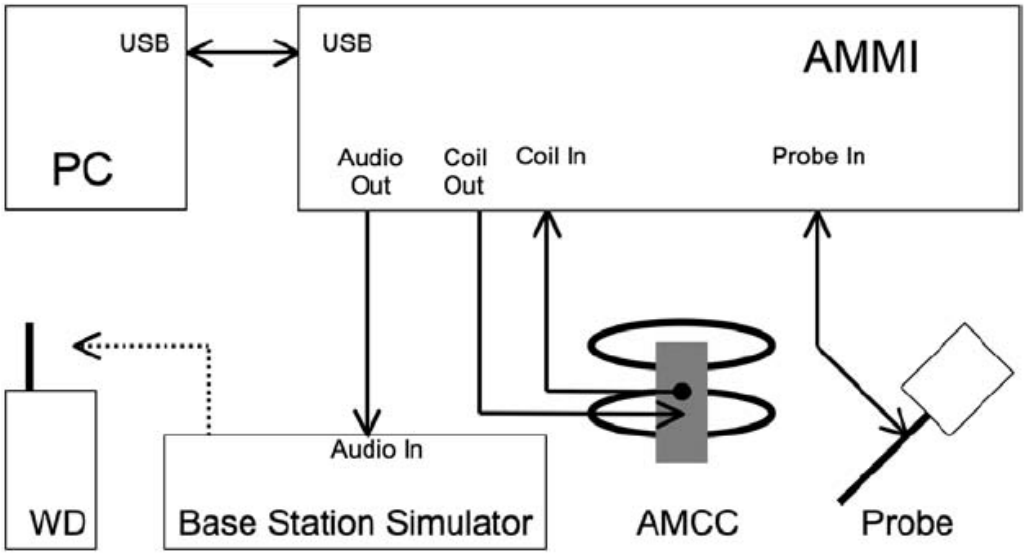

Figure 2 T-Coil Test Measurement Set-up

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5.2.2 AM1D Probe

The AM1D probe is an active probe with a single sensor. It is fully RF-shielded and has a rounded tip 6mm in diameter incorporating a pickup coil with its center offset 3mm from the tip and the sides. The symmetric signal preamplifier in the probe is fed via the shielded symmetric output cable from the AMMI with a 48V “phantom” voltage supply. The 7-pin connector on the back in the axis of the probe does not carry any signals. It is mounted to the DAE for the correct orientation of the sensor. If the probe axis is tilted 54.7 degree from the vertical, the sensor is approximately vertical when the signal connector is at the underside of the probe (cable hanging downwards).

Specification

frequency range	0.1 - 20 kHz (RF sensitivity <-100 dB, fully RF shielded)
sensitivity	<-50 dB A/m @ 1 kHz
pre-amplifier	40 dB, symmetric
dimensions	tip diameter / length: 6 / 290 mm, sensor according to ANSI-C63.19

Figure 3 AM1D Probe

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5.2.3 Audio Magnetic Measurement Instrument (AMMI)

The Audio Magnetic Measuring Instrument (AMMI) is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals, and a USB interface.

Figure 4 AMMI front panel

Port description:

Audio Out	BNC, audio signal to the base station simulator, for >500Ohm load
Coil Out	BNC, test and calibration signal to the AMCC (top connector), for 50Ohm load
Coil In	XLR, monitor signal from the AMCC BNO connector, 600 Ohm
Probe In	XLR, probe signal and phantom supply to the probe Lemo connector

Figure 5 AMMI rear side

Sampling rate	48 kHz / 24 bit
Dynamic range	85 dB
Test signal generation	User selectable and predefined (vis PC)
Calibration	Auto-calibration / full system calibration using AMCC with monitor output
Dimensions	482 x 65 x 270 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5.2.4 Helmholtz Calibration Coil (AMCC)

The Audio Magnetic Calibration coil is a Helmholtz Coil designed for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction. The DC input resistance is adjusted by a series resistor to approximately 50Ohm, and a shunt resistor of 10Ohm permits monitoring the current with a scale of 1:10

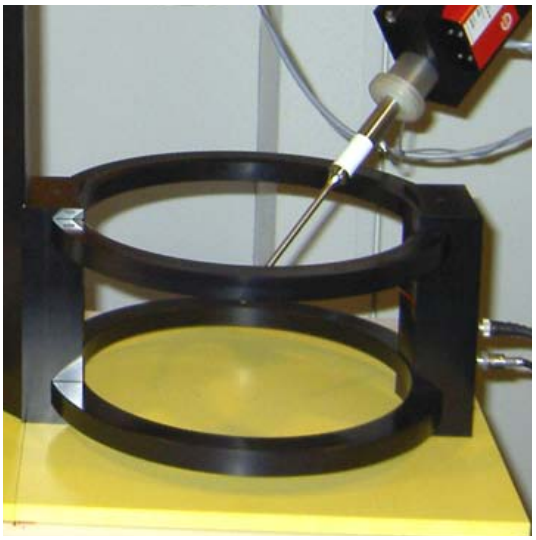

Figure 6 AMCC

Port description:

Signal	**Connector**	**Resistance**
Coil In	BNC	Typically 50Ohm
Coil Monitor	BNO	10Ohm±1% (100mV corresponding to 1 A/m)

Specification:

Dimensions	370 x 370 x 196 mm, according to ANSI-C63.19

5.2.5 Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).
The Device reference point is set for the EUT at 6.3 mm, the Grid reference point is on the upper surface at the origin of the coordinates, and the “user point \Height Check 0.5 mm” is 0.5mm above the center, allowing verication of the gap of 0.5mm while the probe is positioned there.

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field <±0.5 dB.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Figure 7 T-coil Phantom & Device Holder

5.3 T-Coil measurement points and reference plane

The following figure illustrates the standard probe orientations. Position 1 is the perpendicular orientation of the probe coil; orientation 2 is the transverse orientation. The space between the measurement positions is not fixed. It is recommended that a scan of the WD be performed for each probe coil orientation and that the maximum level recorded be used as the reading for that orientation of the probe coil.

1) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.

2) The measurement plane is parallel to, and 10 mm in front of, the reference plane.

3) The reference axis is normal to the reference plane and passes through the center of the receiver speaker section (or the center of the hole array); or may be centered on a secondary inductive source. The actual location of the measurement point shall be noted in the test report as the measurement reference point.

4) The measurement points may be located where the axial and radial field intensity measurements are optimum with regard to the requirements. However, the measurement points should be near the acoustic output of the EUT and shall be located in the same half of the phone as the EUT receiver. In a EUT handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

5) The relative spacing of each measurement orientation is not fixed. The axial and two radial orientations should be chosen to select the optimal position.

6) The measurement point for the axial position is located 10 mm from the reference plane on the measurement axis.

7) The actual location of the measurement point shall be noted in test reports and designated as the measurement reference point.

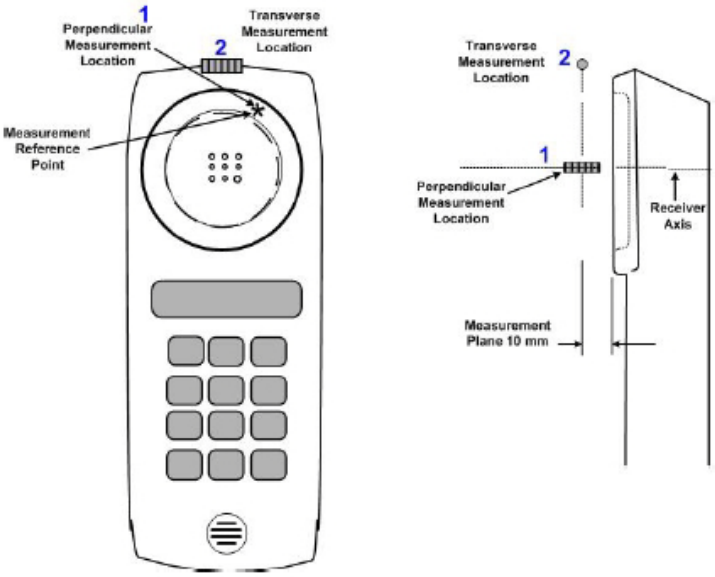

Figure 8 Axis and planes for EUT audio frequency magnetic field measurements

5.4 T-Coil Test Procedueres

The following illustrate a typical test scan over a wireless communications device:

1) Geometry and signal check: system probe alignment, proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test Arch.

2) Set the reference drive level of signal voice defined in C63.19 per 7.4.2.1.

3) The ambient and test system background noise (dB A/m) was measured as well as ABM2 over the full measurement. The maximum noise level must be at least 10dB below the limit of C63.19 per 8.3.2.

4) The EUT was positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.

5) The EUT operation for maximum rated RF output power was configured and connected by using of coaxial cable connection to the base station simulator at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The EUT audio output was positioned tangent (as physically possible) to the measurement plane.

6) The EUT's RF emission field was eliminated from T-coil results by using a well RF-shielding of the probe, AM1D, and by using of coaxial cable connection to a Base Station Simulator. One test channel was pre-measurement to avoid this possibility.

7) Determined the optimal measurement locations for the EUT by following the three steps, coarse

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

resolution scan, fine resolution scans, and point measurement, as described in C63.19 per 7.4.4.2. At each measurement locations, samples in the measurement window duration were evaluated to get ABM1 and the signal spectrum. The noise measurement was performed after the scan with the signal, the same happened, just with the voice signal switched off. The ABM2 was calculated from this second scan.

8) All results resulting from a measurement point in a T-Coil job were calculated from the signal samples during this window interval. ABM values were averaged over the sequence of there samples.

9) At an optimal point measurement, the SNR (ABM1/ABM2) was calculated for axial,radial transverse and radial longitudinal orientation, and the frequency response was measured in axial axis.

10) Corrected for the frequency response after the EUT measurement since the DASY5 system had known the spectrum of the input signal by using a reference job.

11) In SEMCAD postprocessing, the spectral points are in addition scaled with the high-pass (half-band) and the A-weighting, bandwidth compensated factor (BWC) and those results are final as shown in this report.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

6 T-Coil Performance Requirements

In order to be rated for T-Coil use, a EUT shall meet the requirements for signal level and signal quality contained in this part.

6.1 T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be ≥ –18 dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.

6.2 Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. The following figures provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

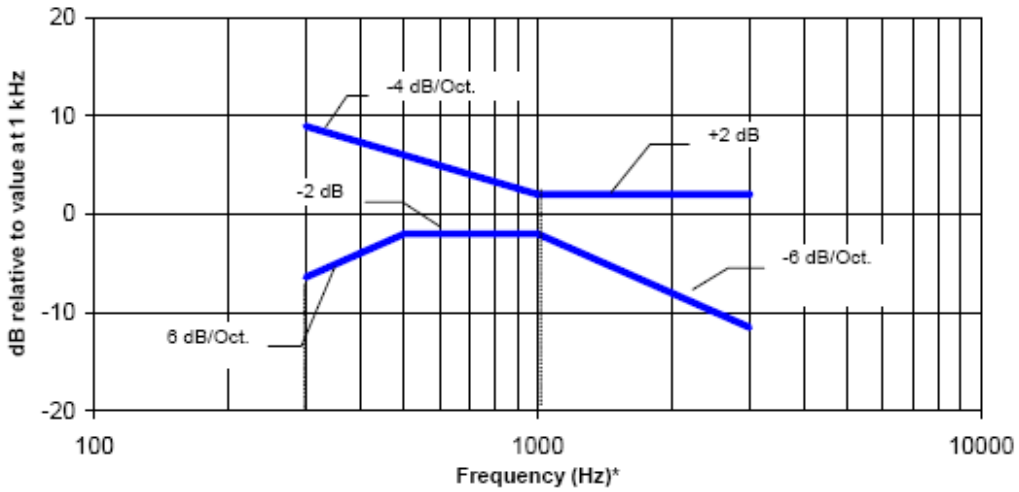

NOTE—Frequency response is between 300 Hz and 3000 Hz.

Figure 9 Magnetic field frequency response for EUTs with a field ≤ –15 dB (A/m) at 1 kHz

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

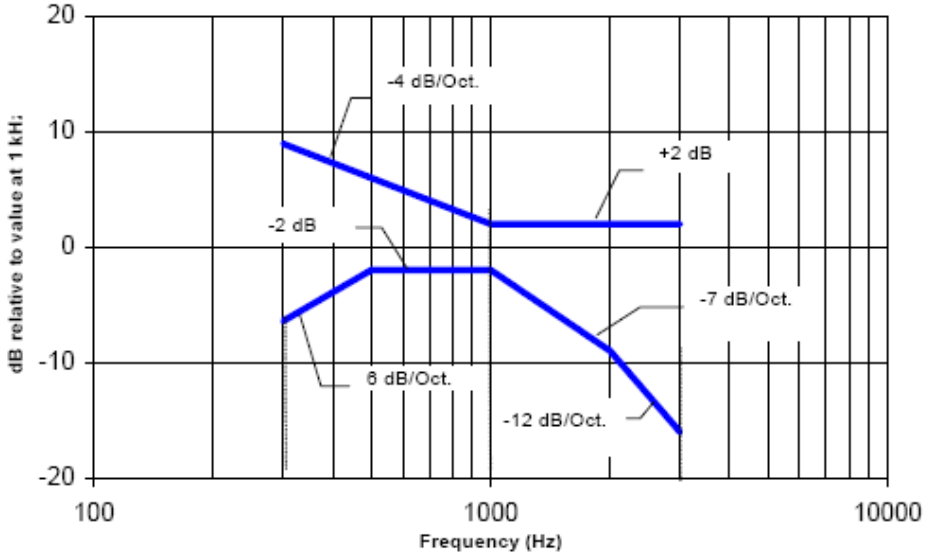

NOTE—Frequency response is between 300 Hz and 3000 Hz.

Figure 10 Magnetic field frequency response for EUTs with a field that exceeds –15 dB(A/m) at 1 kHz

6.3 Signal quality

This part provides the signal quality requirement for the intended T-Coil signal from a EUT. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criteria that can be measured is the RF immunity in T-Coil mode. This is measured using the same procedure as for the audio coupling mode and at the same levels.

The worst signal quality of the twoT-Coil signal measurements shall be used to determine the T-Coil mode category per Table 1

Table 1: T-Coil signal quality categories

Category	Telephone parameters WD signal quality [(signal + noise) – to – noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

7 Summary Test Results

7.1 GSM 850

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ ABM2)(dB)	Frequency Response	T-Rating
GSM 850-CH190	y (Radial):	(-4.2,8.3,3.7)	-4.52	47.27	Pass	T4
	z (Axial):	(0,0,3.7)	4.25	44.01	Pass	T4

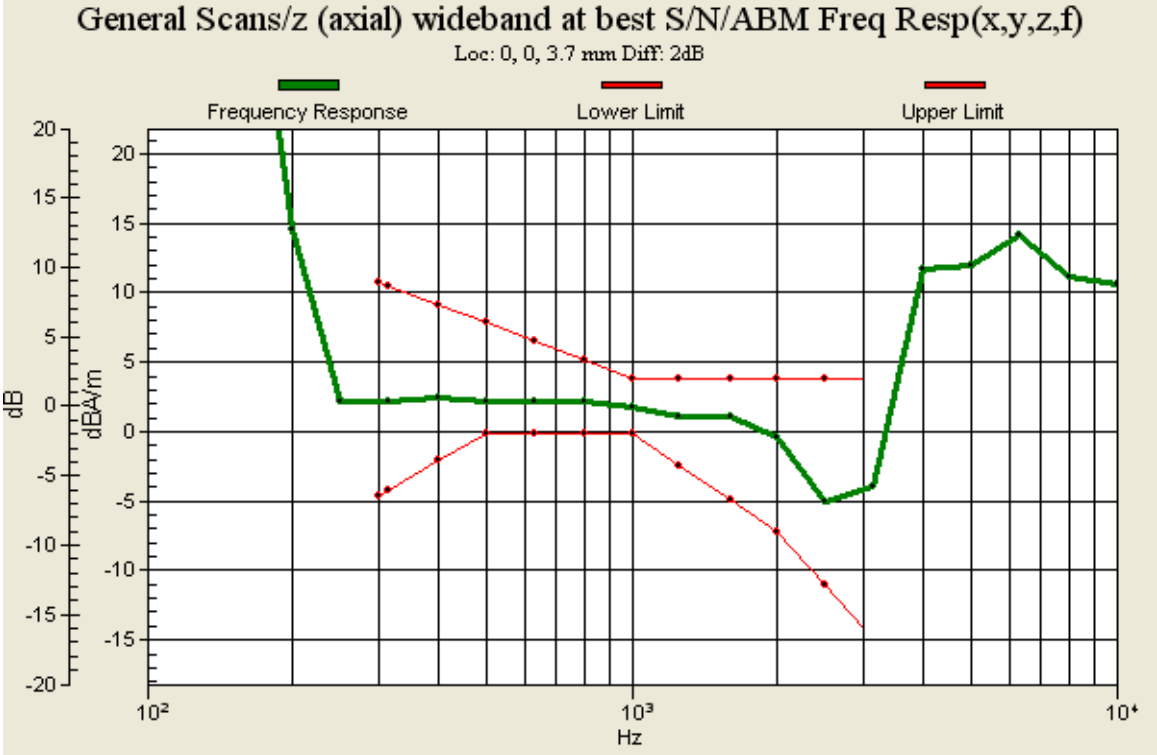

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

7.2 GSM 1900

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ ABM2)(dB)	Frequency Response	T-Rating
GSM 1900-CH661	y (Radial):	(-4.2,8.3,3.7)	-4.51	48.69	Pass	T4
	z (Axial):	(0,0,3.7)	4.23	45.91	Pass	T4

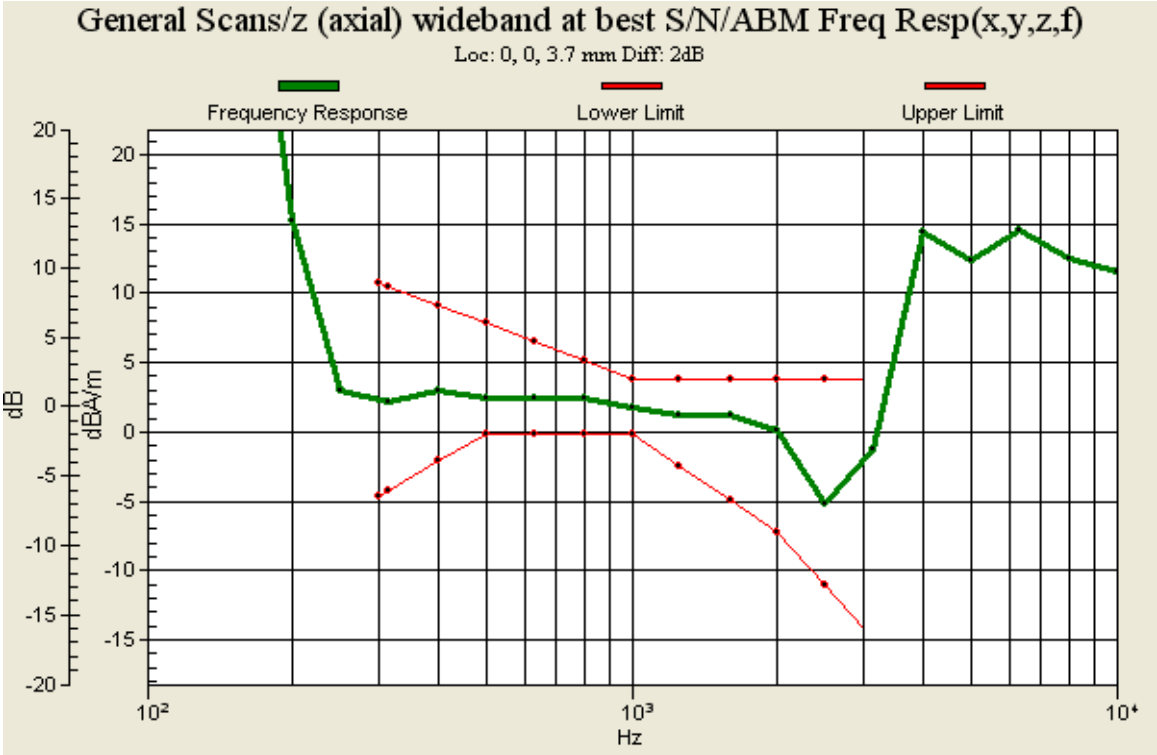

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

7.3 WCDMA Band II

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
WCDMA Band II -CH9400	y (Radial):	(0,4.2,3.7)	-3.55	48.94	Pass	T4
	z (Axial):	(0,0,3.7)	4.41	48.67	Pass	T4

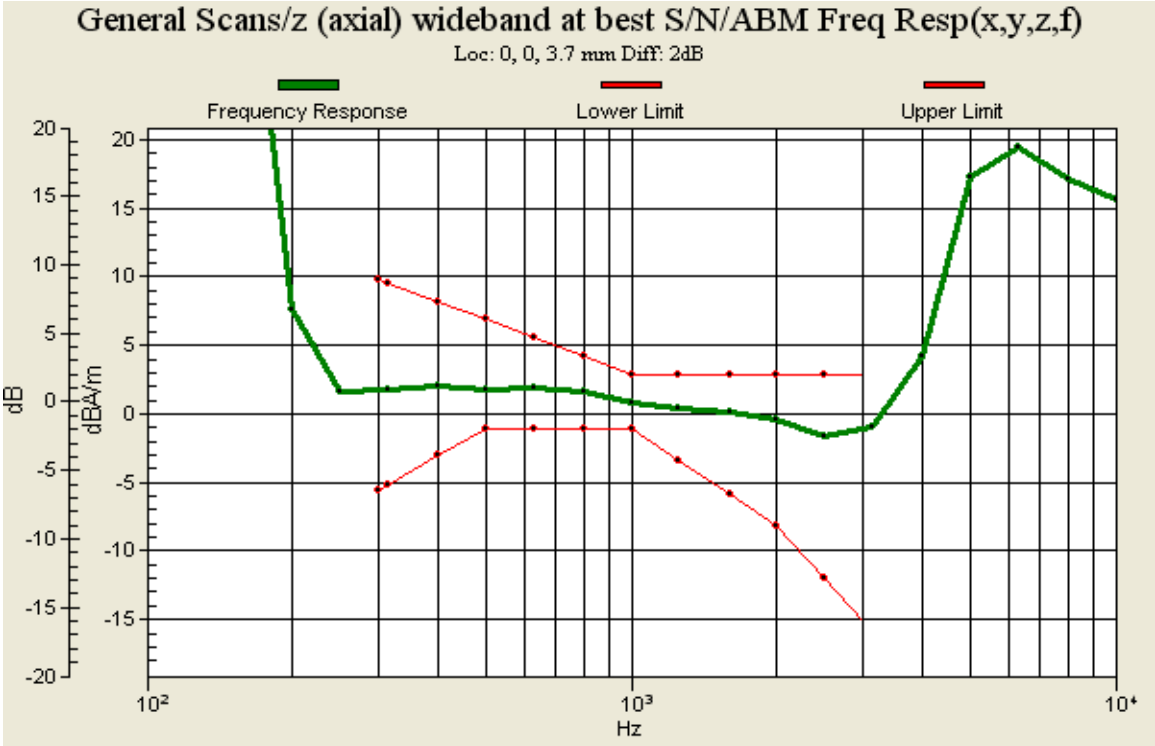

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

7.4 WCDMA Band IV

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
WCDMA Band IV -CH1413	y (Radial):	(0,4.2,3.7)	-3.28	48.91	Pass	T4
	z (Axial):	(0,0,3.7)	4.46	46.69	Pass	T4

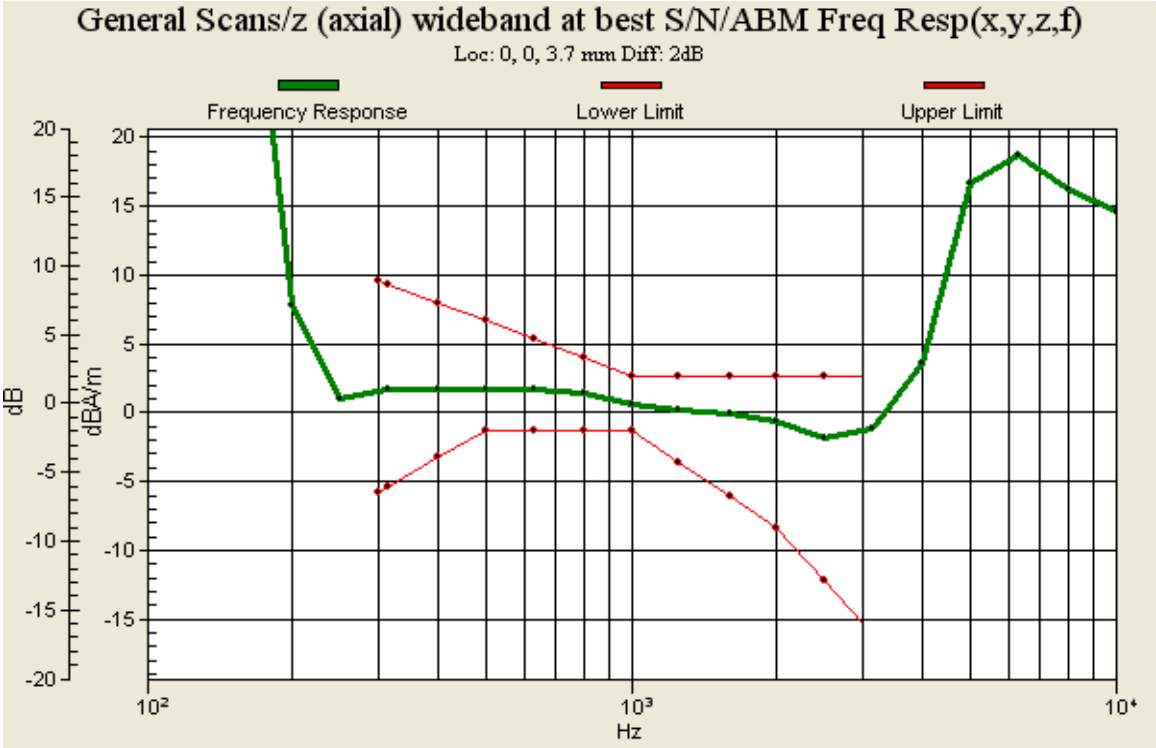

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

7.5 WCDMA Band V

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
WCDMA Band V -CH4183	y (Radial):	(-4.2,8.3,3.7)	-4.47	48.73	Pass	T4
	z (Axial):	(0,0,3.7)	4.34	46.97	Pass	T4

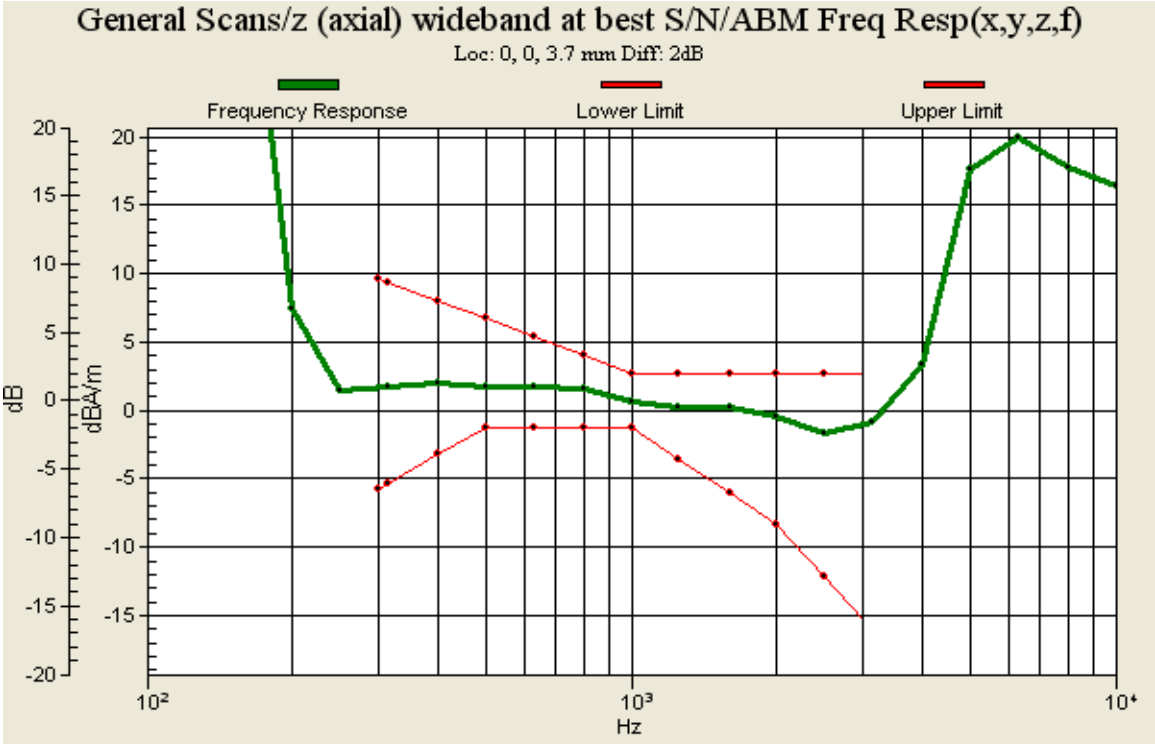

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

7.6 CDMA BC0

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA BC0 –CH384	y (Radial):	(0,8.3,3.7)	-5.36	47.32	Pass	T4
	z (Axial):	(0,-4.2,3.7)	2.42	45.56	Pass	T4

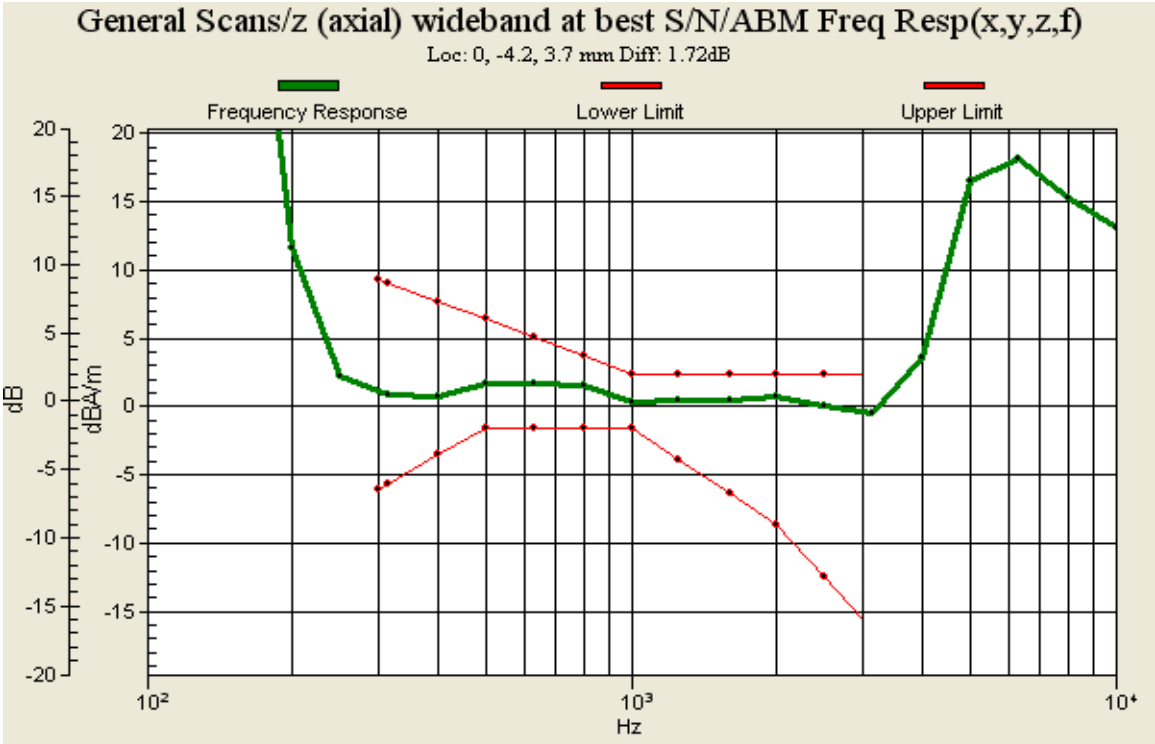

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

7.7 CDMA BC1

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA BC1 –CH600	y (Radial):	(0,4.2,3.7)	-5.70	47.00	Pass	T4
	z (Axial):	(0,0,3.7)	2.10	44.67	Pass	T4

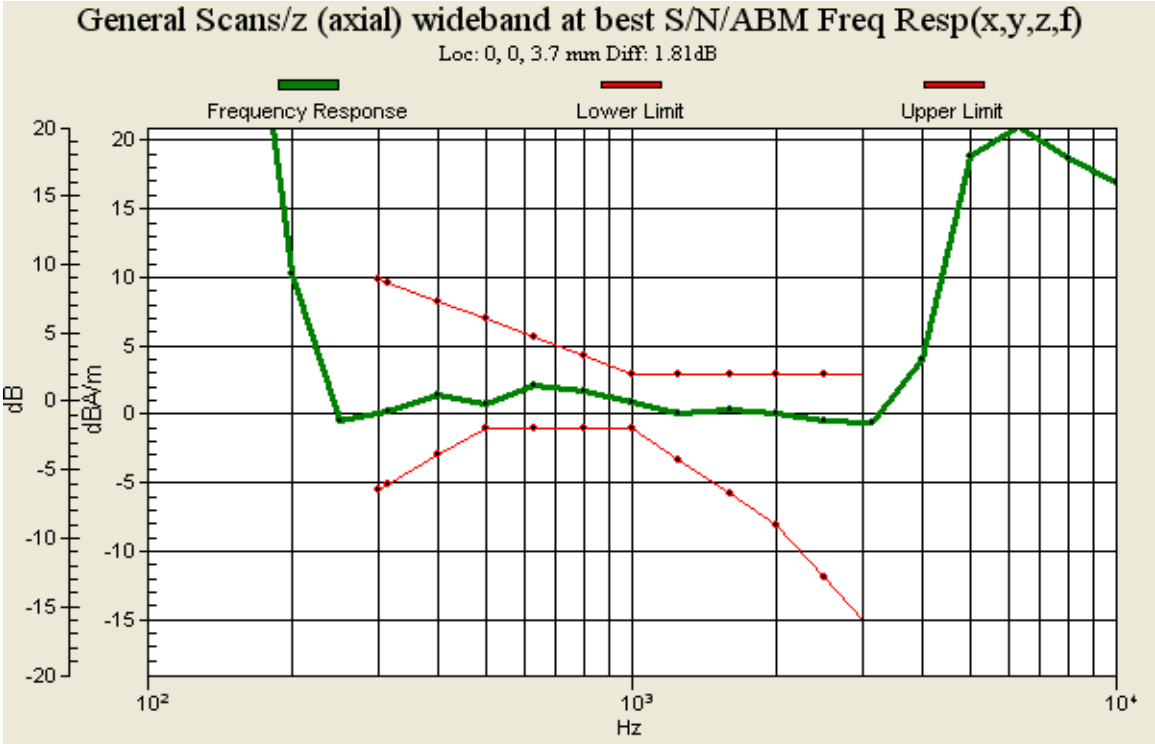

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

7.8 CDMA BC10

Band-Channel	Probe Orientation	Measurement Position (x,y)[mm]	ABM1≥ -18dB(A/m) (Signal)	SNR(ABM1/ABM2)(dB)	Frequency Response	T-Rating
CDMA BC10 –CH580	y (Radial):	(0,8.3,3.7)	-5.59	47.28	Pass	T4
	z (Axial):	(0,-4.2,3.7)	2.91	44.85	Pass	T4

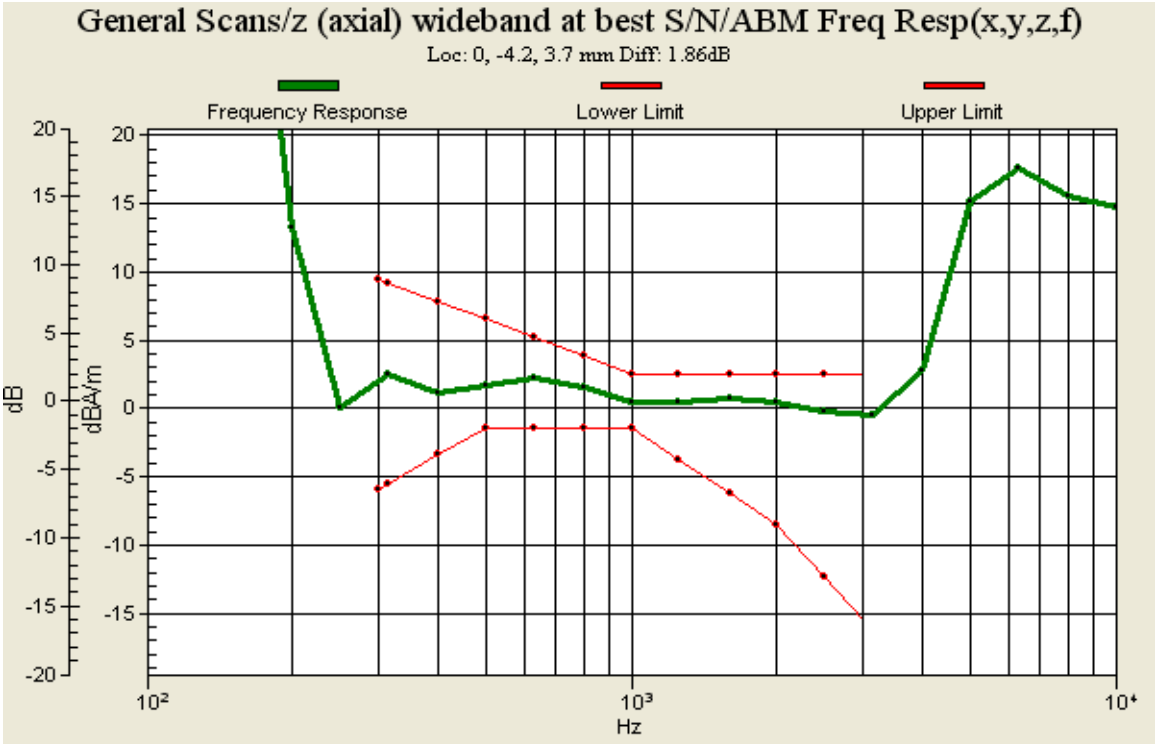

Note:

1. The LCD backlight is turn off and volume is adjusted to maximum level during T-Coil testing.
2. Signal strength measurement scan plots are presented in Annex B.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

8 Measurement Uncertainty

No.	Error source	Type	Uncertainty Value a_i (%)	Prob. Dist.	k	ABM 1 c_i	ABM2 c_i	Std. Unc. ABM1 u_i' (%)	Std. Unc. ABM2 u_i' (%)	Degree of freedom V_{eff} or v_i
1	System Repeatability	A	0.016	N	1	1	1	0.016	0.016	9
Probe Sensitivity										
2	Reference Level	B	3.0	R	$\sqrt{3}$	1	1	3.0	3.0	∞
3	AMCC Geometry	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
4	AMCC Current	B	0.6	R	$\sqrt{3}$	1	1	0.4	0.4	∞
5	Probe Positioning during Calibration	B	0.1	R	$\sqrt{3}$	1	1	0.1	0.1	∞
6	Noise Contribution	B	0.7	R	$\sqrt{3}$	0.0143	1	0.0	0.4	∞
7	Frequency Slope	B	5.9	R	$\sqrt{3}$	0.1	1	0.3	3.5	∞
Probe System										
8	Repeatability / Drift	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
9	Linearity / Dynamic Range	B	0.6	N	1	1	1	0.4	0.4	∞
10	Acoustic Noise	B	1.0	R	$\sqrt{3}$	0.1	1	0.1	0.6	∞
11	Probe Angle	B	2.3	R	$\sqrt{3}$	1	1	1.4	1.4	∞
12	Spectral Processing	B	0.9	R	$\sqrt{3}$	1	1	0.5	0.5	∞
13	Integration Time	B	0.6	N	1	1	5	0.6	3.0	∞
14	Field Distribution	B	0.2	R	$\sqrt{3}$	1	1	0.1	0.1	∞
Test Signal										
15	Ref.Signal Spectral Response	B	0.6	R	$\sqrt{3}$	0	1	0.0	0.4	∞
Positioning										
16	Probe Positioning	B	1.9	R	$\sqrt{3}$	1	1	1.1	1.1	∞
17	Phantom Thickness	B	0.9	R	$\sqrt{3}$	1	1	0.5	0.5	∞

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

18	EUT Positioning	B	1.9	R	$\sqrt{3}$	1	1	1.1	1.1	∞
External Contributions										
19	RF Interference	B	0.0	R	$\sqrt{3}$	1	0.3	0.0	0.0	∞
20	Test Signal Variation	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
Combined Std. Uncertainty (ABM Field)		$u_c^{'} = \sqrt{\sum_{i=1}^{20} c_i^2 u_i^2}$						4.1	6.1	
Expanded Std. Uncertainty		$u_e = 2u_c$		N	$k = 2$			**8.2**	**12.2**	

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

9 Main Test Instruments

Name	Type	Serial Number	Last Cal.	Cal. Due Date
Audio Magnetic 1D Field Probe	AM1DV3	3082	2014-11-13	2017-11-12
Audio Magnetic Calibration Coil	SD HAC P02A	1112	N/A	N/A
Audio Measuring Instrument	AMMI	1101	N/A	N/A
DAE	DAE4	871	2015-11-17	2016-11-16
Software	DASY5, V5.2 Build 162	N/A	N/A	N/A
Software	SEMCAD X Version 14.0 Build 59	N/A	N/A	N/A
Universal Radio Communication Tester	CMU 200	118133	2015-05-22	2016-05-21
TMFS	TMFS	1018	2015-12-02	2016-12-01
Hygrothermograph	NT-311	20150731	2015-07-16	2016-07-15

*******END OF REPORT *******

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

ANNEX A: Test Layout

Picture 1: HAC T-Coil System Layout

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

ANNEX B: Graph Results

T-Coil GSM 850 Y transversal

Date: 2016-3-30
Communication System: UID 0, GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 GSM850 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.17 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = -3.59 dBA/m
BWC Factor = 0.17 dB
Location: 0, 4.2, 3.7 mm

N9131 GSM850 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.17 dB
Device Reference Point: 0, 0, -6.3 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 47.27 dB

ABM1 comp = -4.52 dBA/m

BWC Factor = 0.17 dB

Location: -4.2, 8.3, 3.7 mm

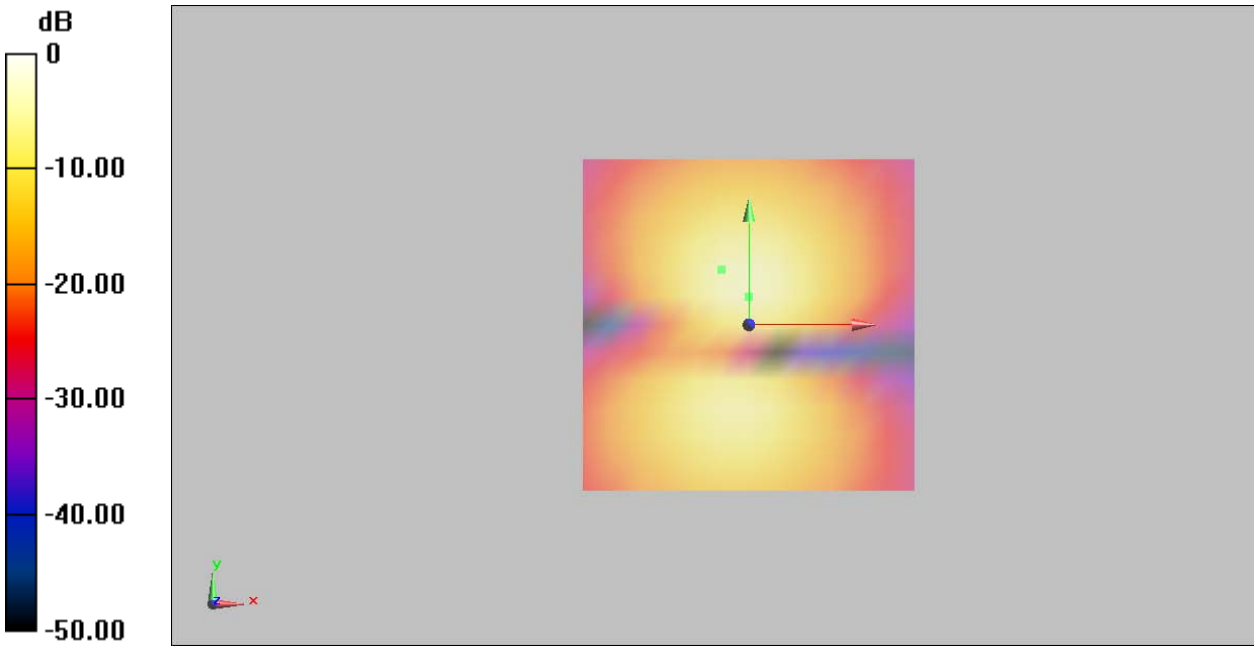

0 dB = 1.000 A/m = 0.00 dBA/m

Figure 11 T-Coil GSM 850 Y transversal

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil GSM 850 Z Axial

Date: 2016-3-30
Communication System: UID 0, GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 GSM850 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.17 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = 4.25 dBA/m
BWC Factor = 0.17 dB
Location: 0, 0, 3.7 mm

N9131 GSM850 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.17 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1/ABM2 = 44.01 dB
ABM1 comp = 4.25 dBA/m
BWC Factor = 0.17 dB
Location: 0, 0, 3.7 mm

N9131 GSM850 HAC_TCoil_WD_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 66.12
Measure Window Start: 300ms
Measure Window Length: 2000ms
BWC applied: 10.81 dB
Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
Diff = 2.00 dB
BWC Factor = 10.81 dB
Location: 0, 0, 3.7 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

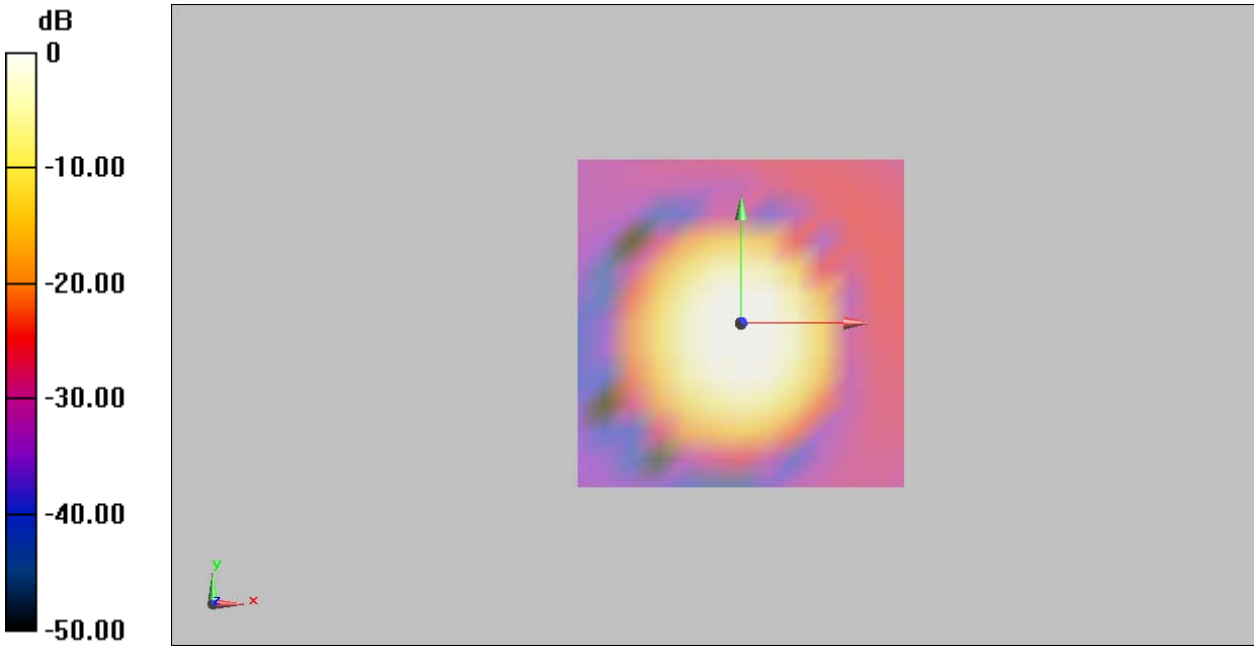

0 dB = 1.000 A/m = 0.00 dBA/m

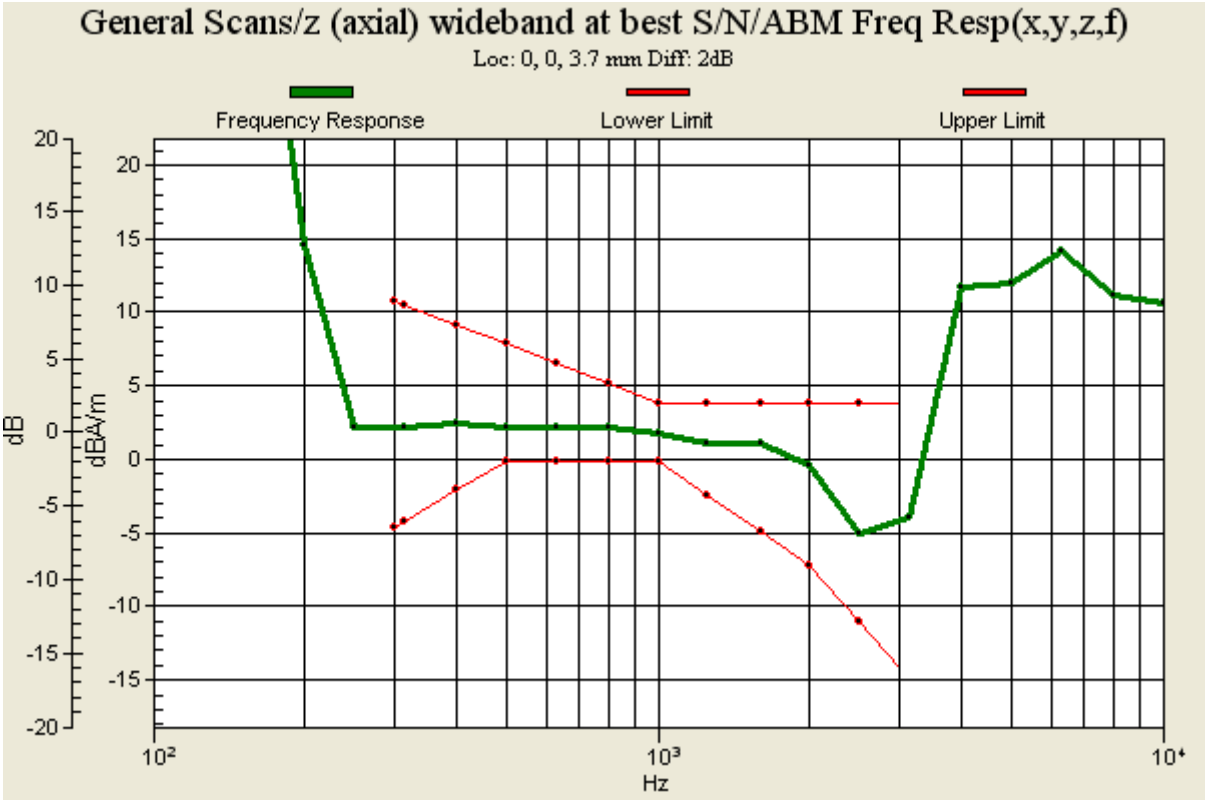

Figure 12 T-Coil GSM 850 Z Axial

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil GSM 1900 Y transversal

Date: 2016-3-30
Communication System: UID 0, GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 GSM1900 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = -3.60 dBA/m
BWC Factor = 0.16 dB
Location: 0, 4.2, 3.7 mm

N9131 GSM1900 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 48.69 dB

ABM1 comp = -4.51 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 8.3, 3.7 mm

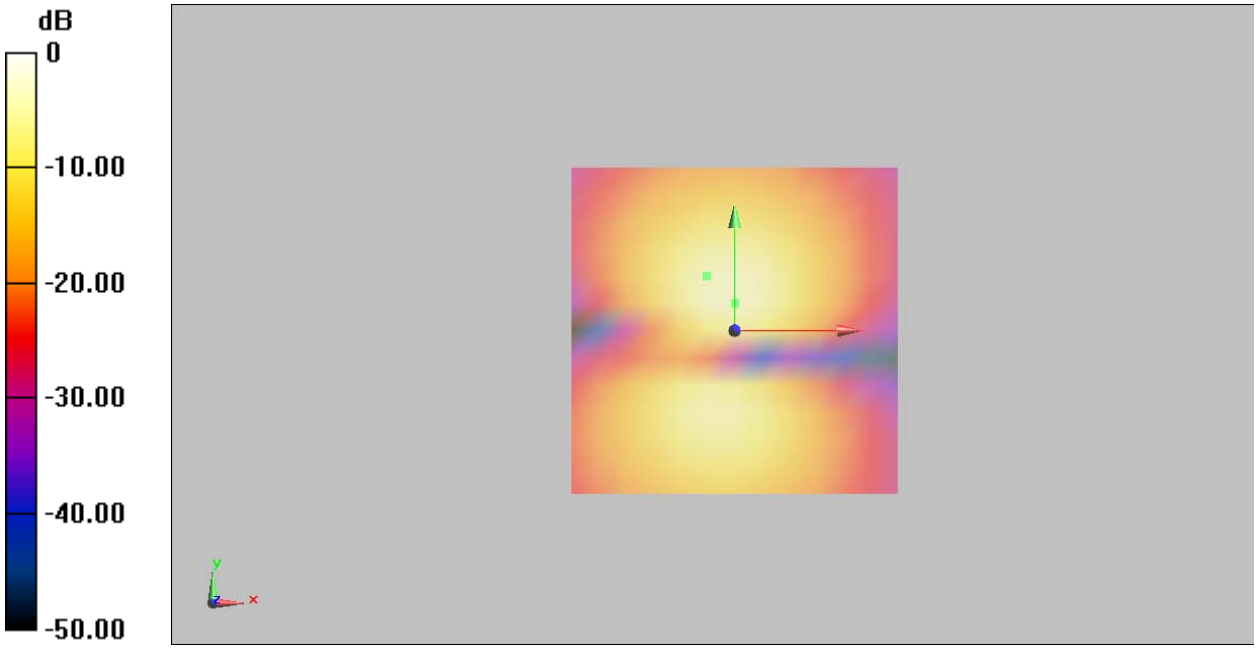

0 dB = 1.000 A/m = 0.00 dBA/m

Figure 13 T-Coil GSM 1900 Y transversal

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil GSM 1900 Z Axial

Date: 2016-3-30
Communication System: UID 0, GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 GSM1900 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = 4.23 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 GSM1900 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1/ABM2 = 45.91 dB
ABM1 comp = 4.23 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 GSM1900 HAC_TCoil_WD_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 66.12
Measure Window Start: 300ms
Measure Window Length: 2000ms
BWC applied: 10.81 dB
Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
Diff = 2.00 dB
BWC Factor = 10.81 dB
Location: 0, 0, 3.7 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

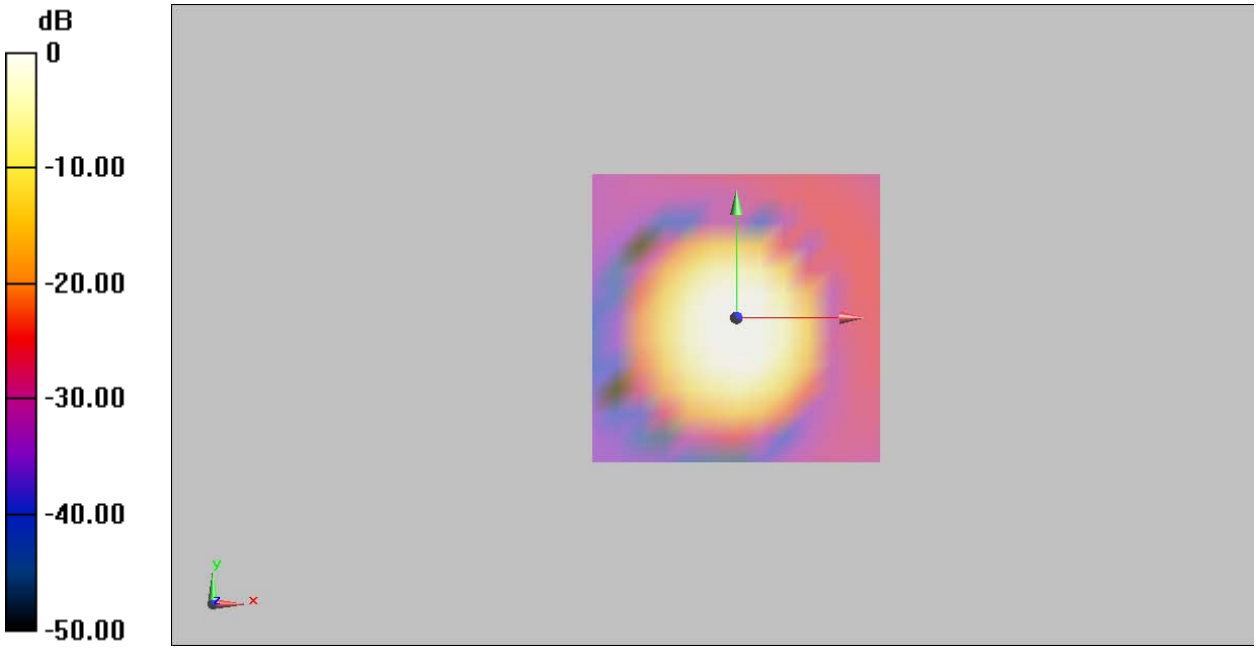

0 dB = 1.000 A/m = 0.00 dBA/m

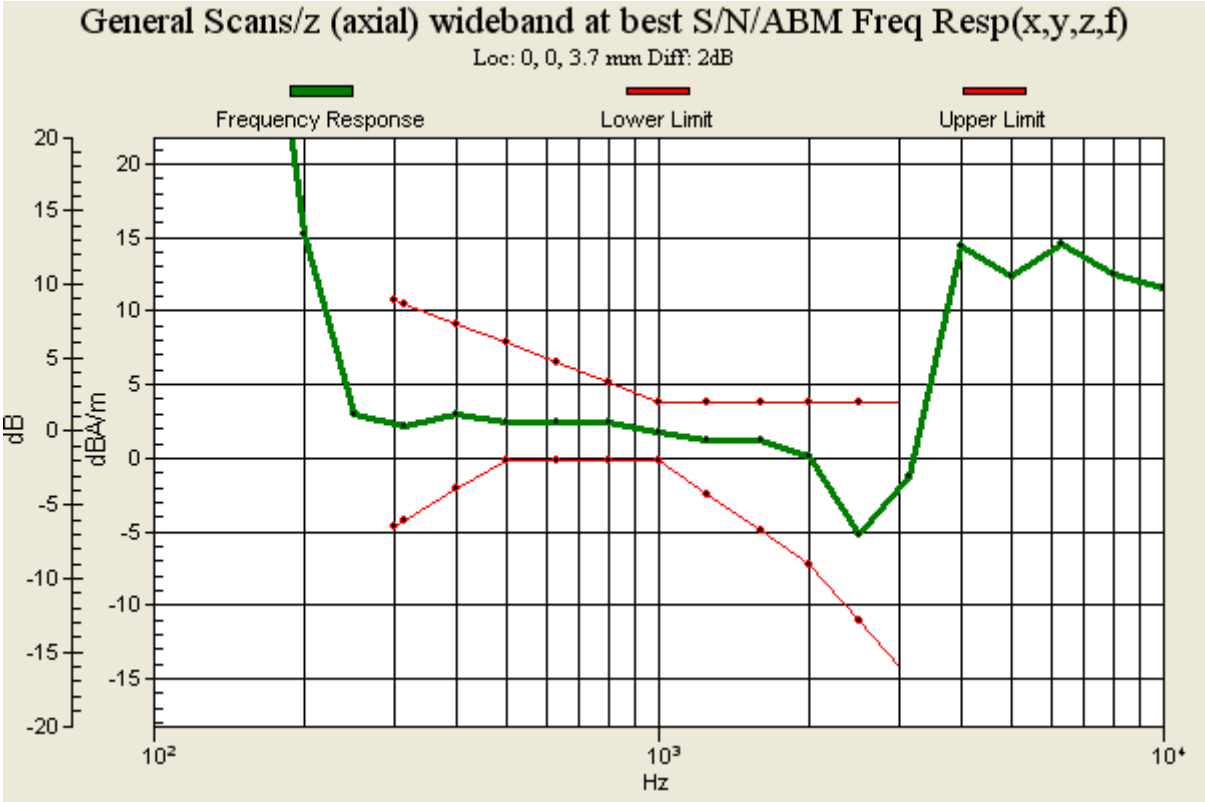

Figure 14 T-Coil GSM 1900 Z Axial

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil WCDMA Band II Y transversal

Date: 2016-3-30
Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 WCDMA II HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = -3.55 dBA/m
BWC Factor = 0.16 dB
Location: 0, 4.2, 3.7 mm

N9131 WCDMA II HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 48.94 dB

ABM1 comp = -3.55 dBA/m

BWC Factor = 0.16 dB

Location: 0, 4.2, 3.7 mm

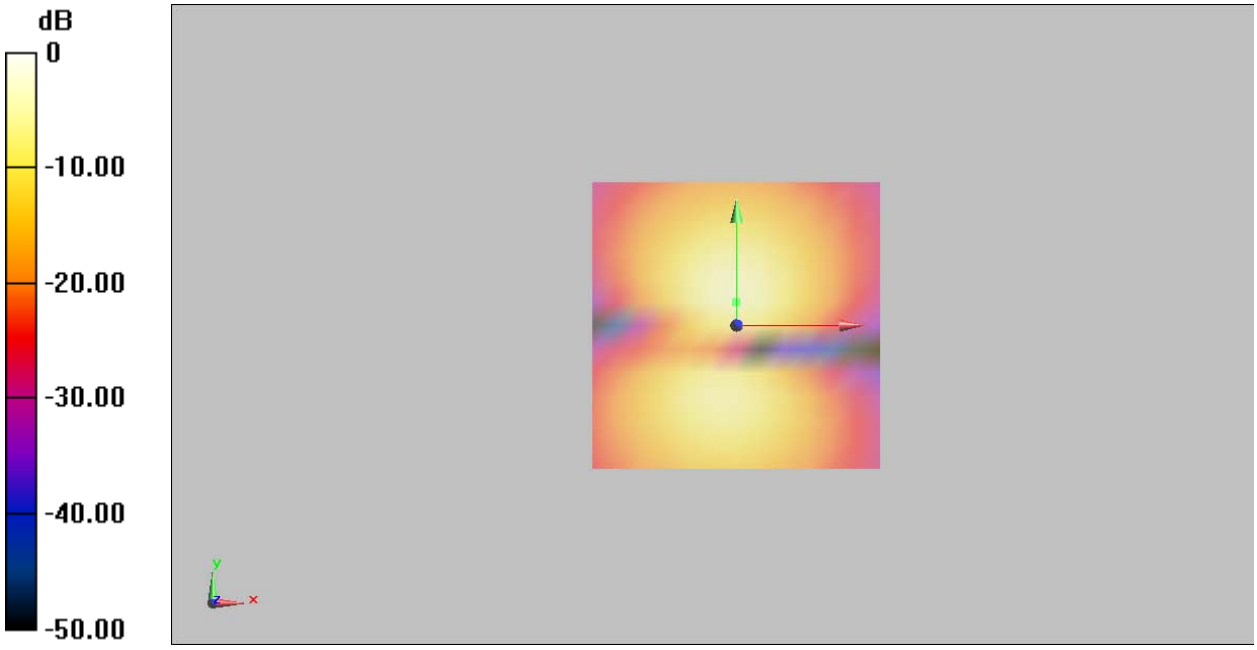

0 dB = 1.000 A/m = 0.00 dBA/m

Figure 15 T-Coil WCDMA Band II Y transversal

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil WCDMA Band II Z Axial

Date: 2016-3-30
Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 WCDMA II HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = 4.41 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 WCDMA II HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1/ABM2 = 48.67 dB
ABM1 comp = 4.41 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 WCDMA II HAC_TCoil_WD_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 66.12
Measure Window Start: 300ms
Measure Window Length: 2000ms
BWC applied: 10.81 dB
Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
Diff = 2.00 dB
BWC Factor = 10.81 dB
Location: 0, 0, 3.7 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

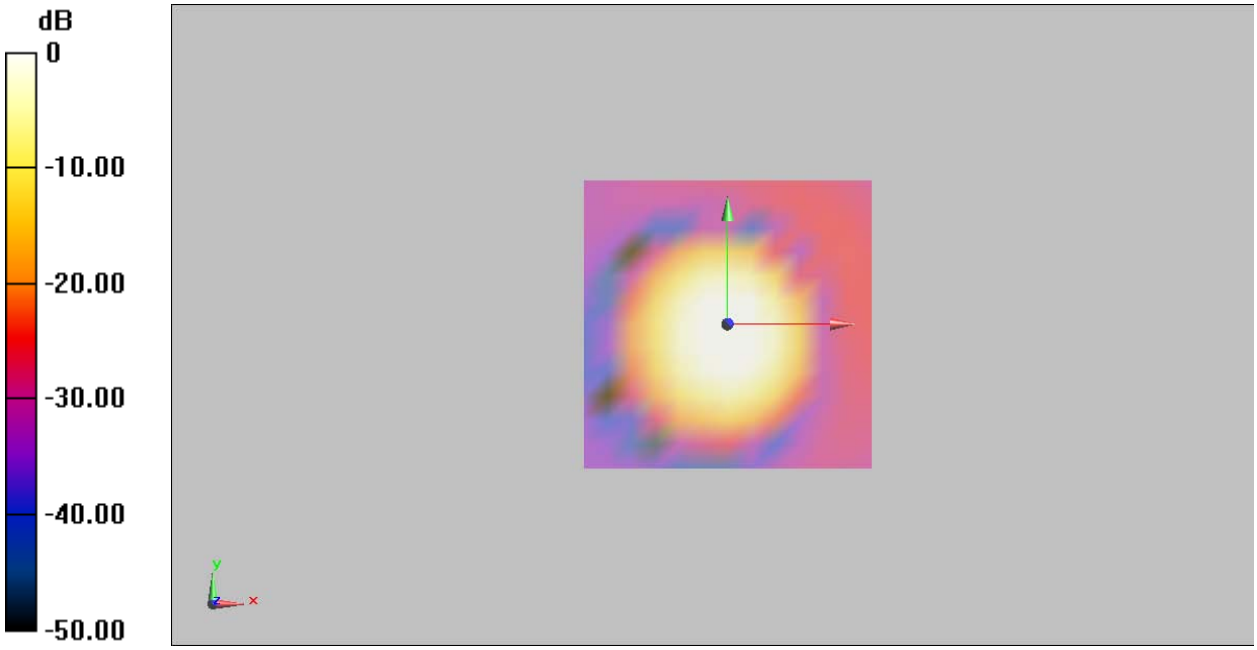

0 dB = 1.000 A/m = 0.00 dBA/m

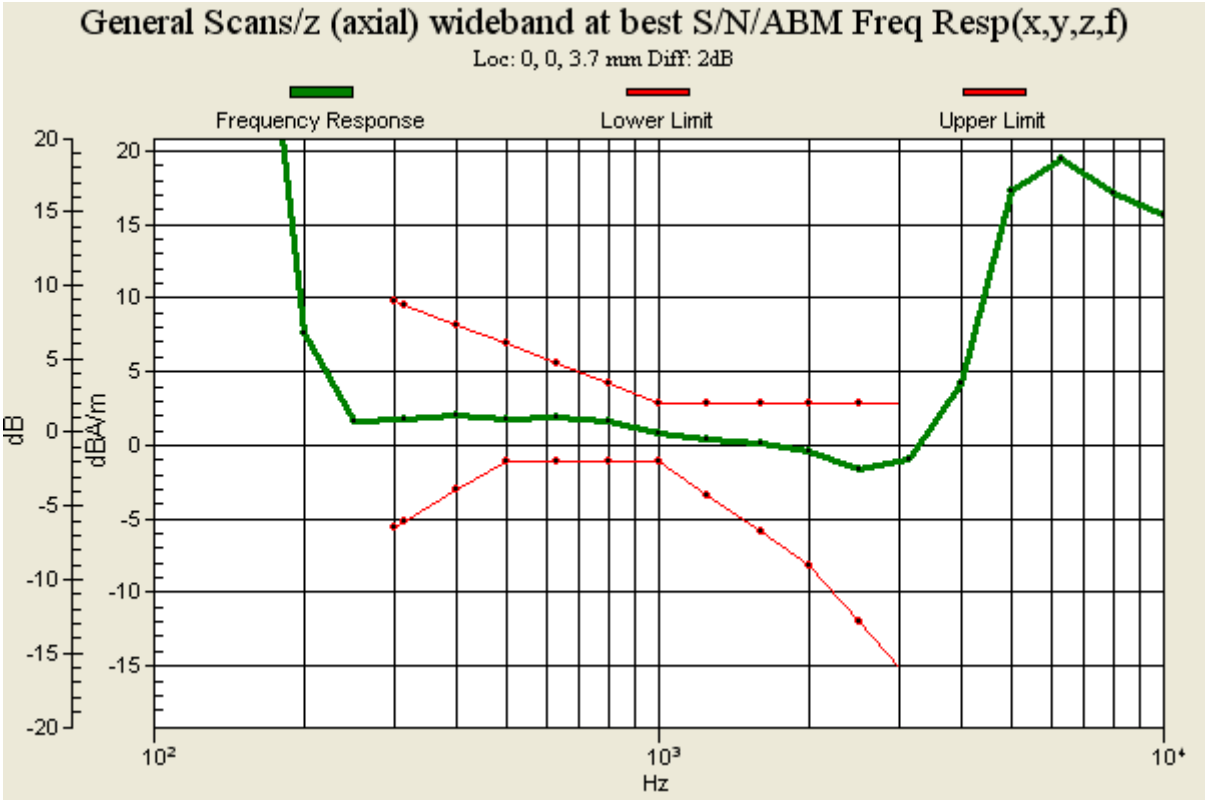

Figure 16 T-Coil WCDMA Band II Z Axial

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil WCDMA Band IV Y transversal

Date: 2016-3-30
Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 WCDMA IV HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = -3.28 dBA/m
BWC Factor = 0.16 dB
Location: 0, 4.2, 3.7 mm

N9131 WCDMA IV HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 48.91 dB

ABM1 comp = -3.28 dBA/m

BWC Factor = 0.16 dB

Location: 0, 4.2, 3.7 mm

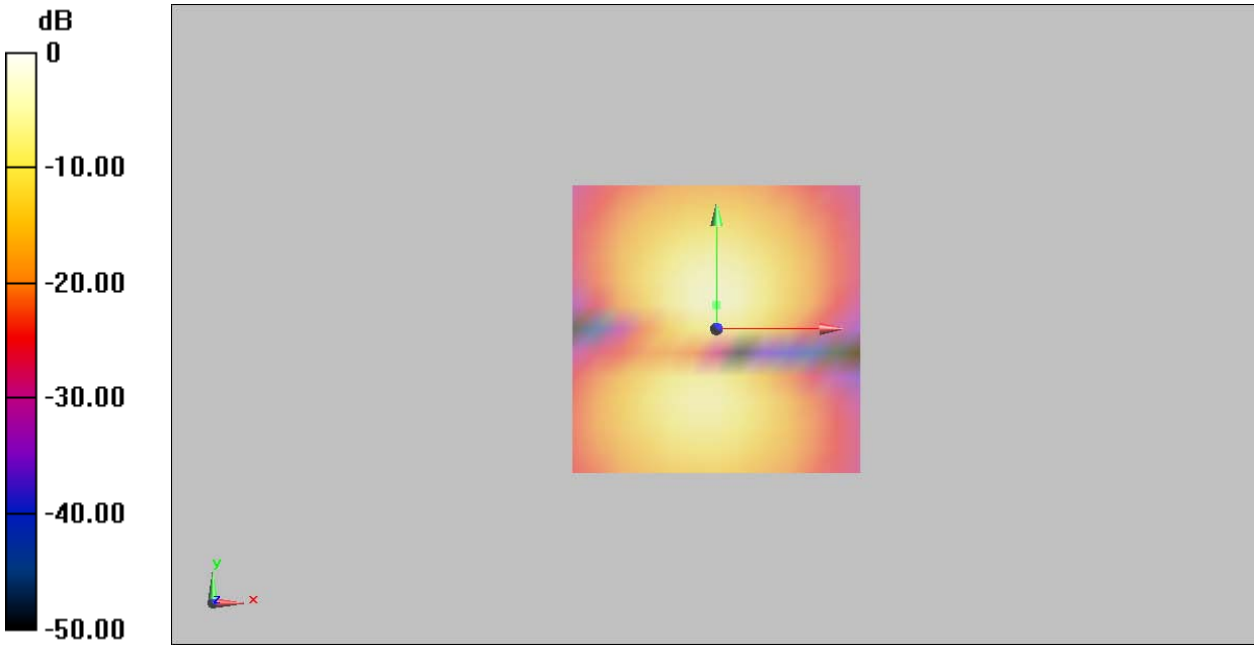

0 dB = 1.000 A/m = 0.00 dBA/m

Figure 17 T-Coil WCDMA Band IV Y transversal

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil WCDMA Band IV Z Axial

Date: 2016-3-30
Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 WCDMA IV HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = 4.46 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 WCDMA IV HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1/ABM2 = 46.69 dB
ABM1 comp = 4.46 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 WCDMA IV HAC_TCoil_WD_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 66.12
Measure Window Start: 300ms
Measure Window Length: 2000ms
BWC applied: 10.81 dB
Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
Diff = 2.00 dB
BWC Factor = 10.81 dB
Location: 0, 0, 3.7 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

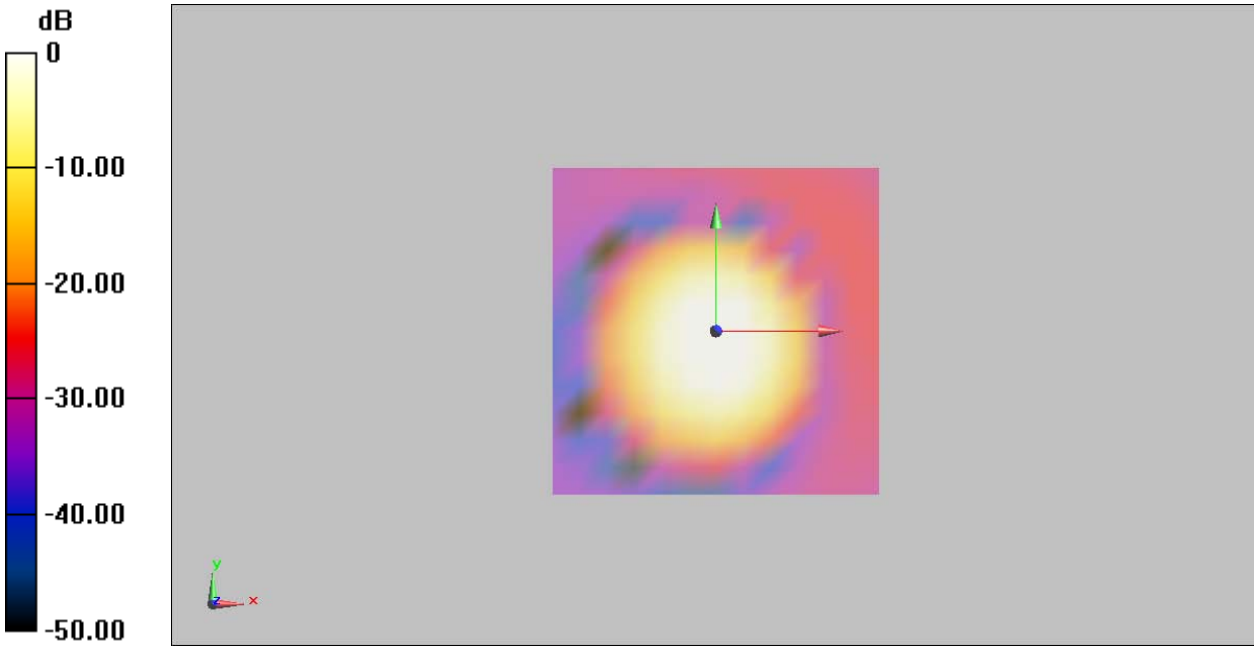

0 dB = 1.000 A/m = 0.00 dBA/m

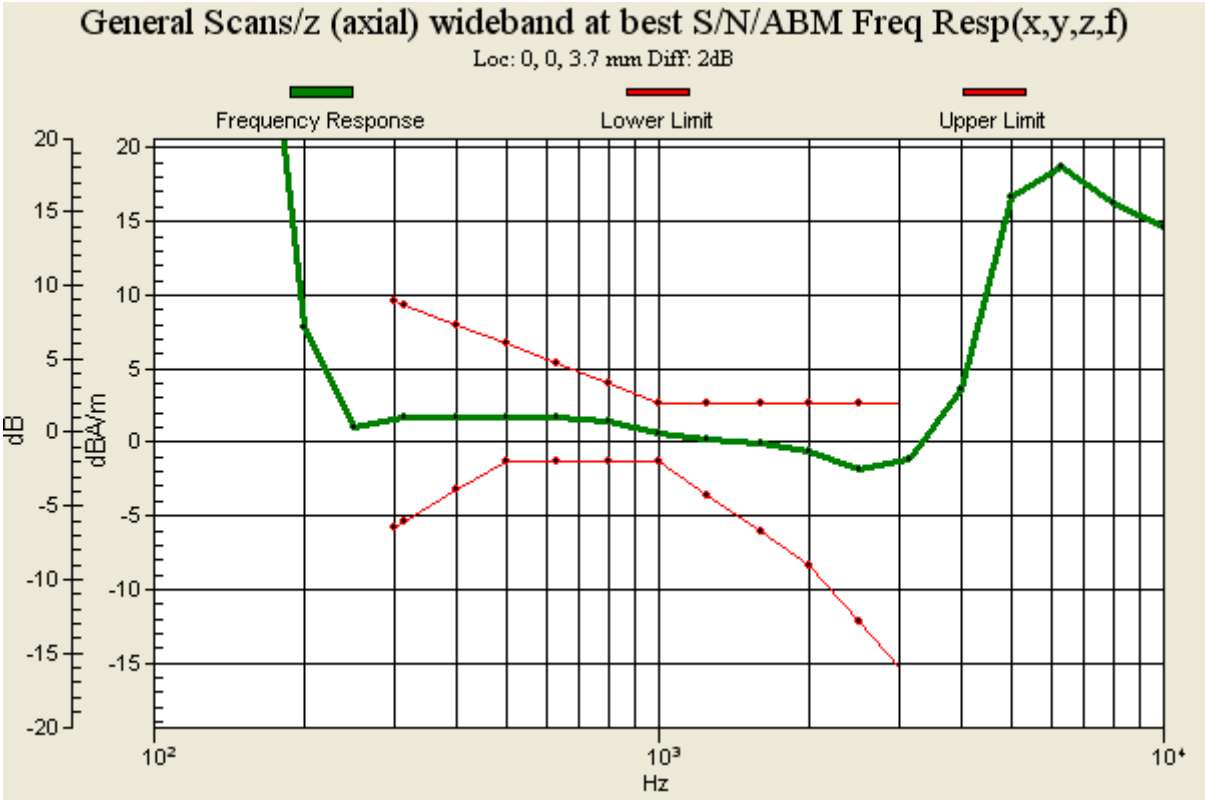

Figure 18 T-Coil WCDMA Band IV Z Axial

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil WCDMA Band V Y transversal

Date: 2016-3-30
Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz;Duty Cycle: 1:1
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 WCDMA V HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = -3.39 dBA/m
BWC Factor = 0.16 dB
Location: 0, 4.2, 3.7 mm

N9131 WCDMA V HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 48.73 dB

ABM1 comp = -4.47 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 8.3, 3.7 mm

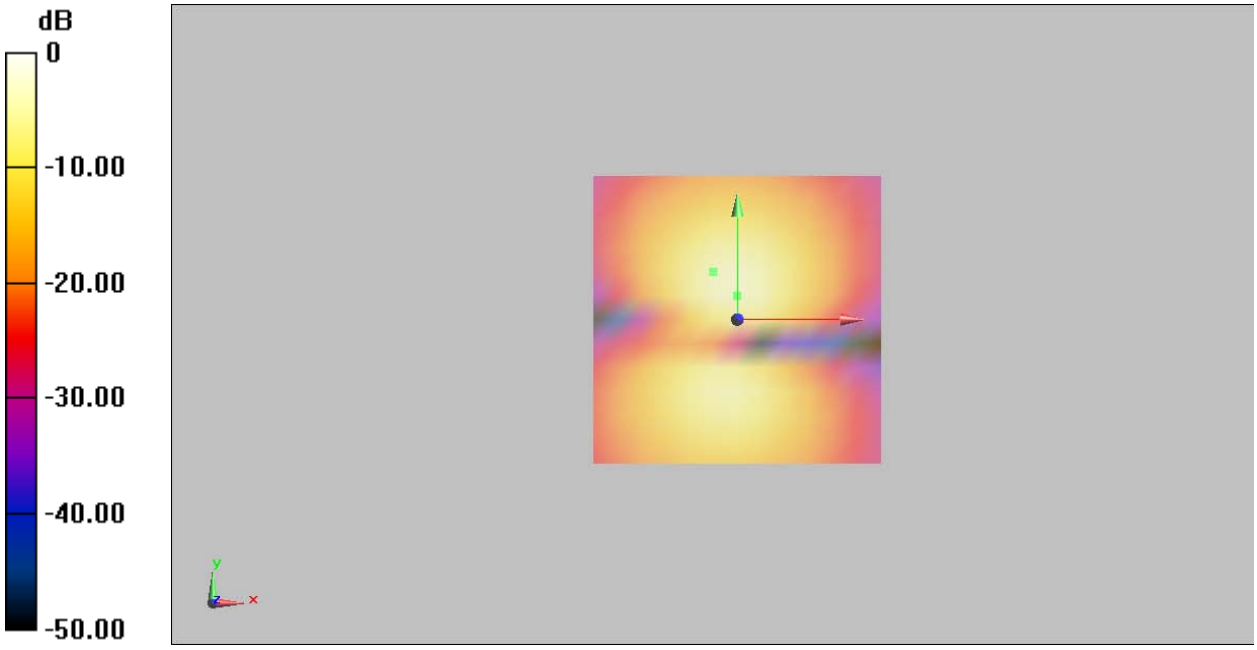

0 dB = 1.000 A/m = 0.00 dBA/m

Figure 19 T-Coil WCDMA Band V Y transversal

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil WCDMA Band V Z Axial

Date: 2016-3-30
Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz;Duty Cycle: 1:1
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 WCDMA V HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = 4.34 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 WCDMA V HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 33.76
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1/ABM2 = 46.97 dB
ABM1 comp = 4.34 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 WCDMA V HAC_TCoil_WD_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 66.12
Measure Window Start: 300ms
Measure Window Length: 2000ms
BWC applied: 10.81 dB
Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
Diff = 2.00 dB
BWC Factor = 10.81 dB
Location: 0, 0, 3.7 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

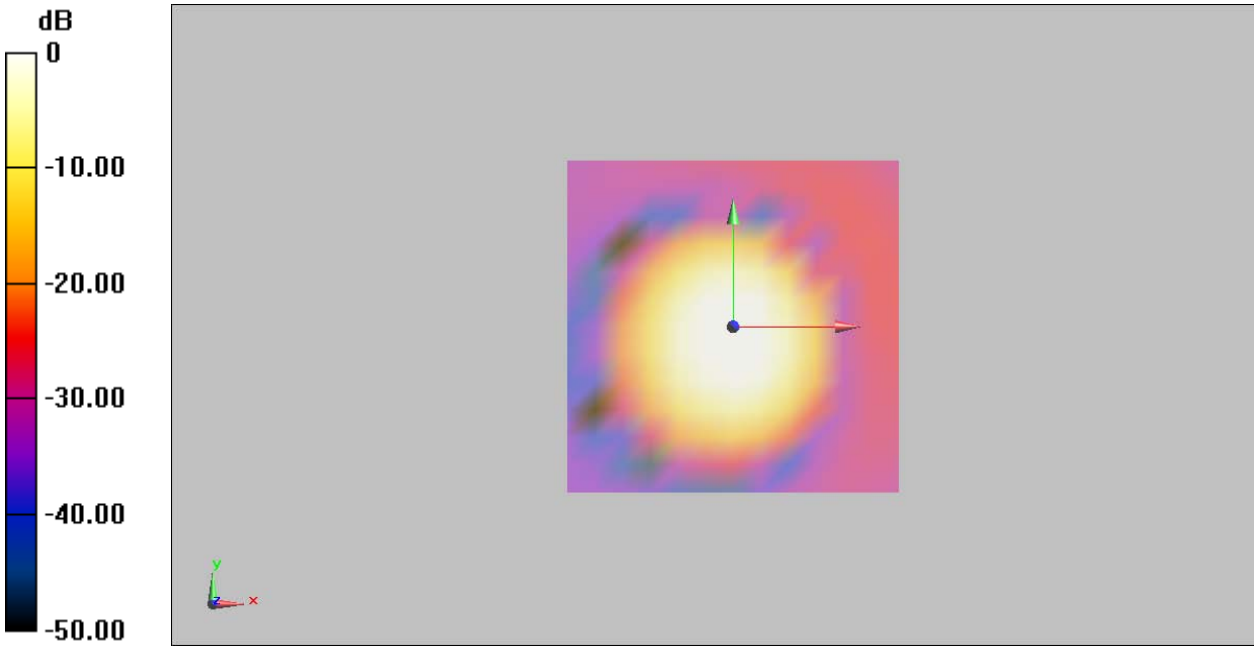

0 dB = 1.000 A/m = 0.00 dBA/m

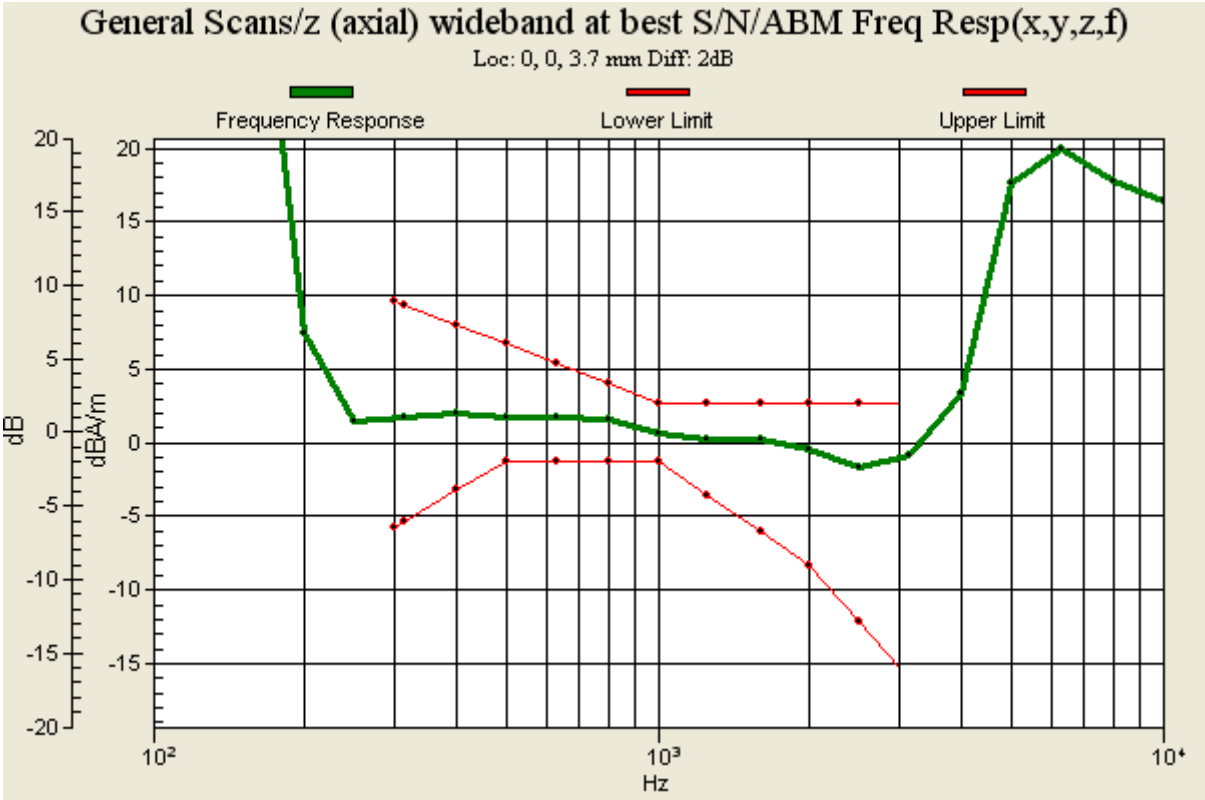

Figure 20 T-Coil WCDMA Band V Z Axial

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil CDMA BC0 Y transversal

Date: 2016-3-30

Communication System: UID 0, CDMA (0); Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13

Electronics: DAE4 Sn871; Calibrated: 2015-11-17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 CDMA BC0 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 28.77

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1 comp = -5.36 dBA/m

BWC Factor = 0.16 dB

Location: 0, 8.3, 3.7 mm

N9131 CDMA BC0 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 28.77

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 47.32 dB

ABM1 comp = -5.36 dBA/m

BWC Factor = 0.16 dB

Location: 0, 8.3, 3.7 mm

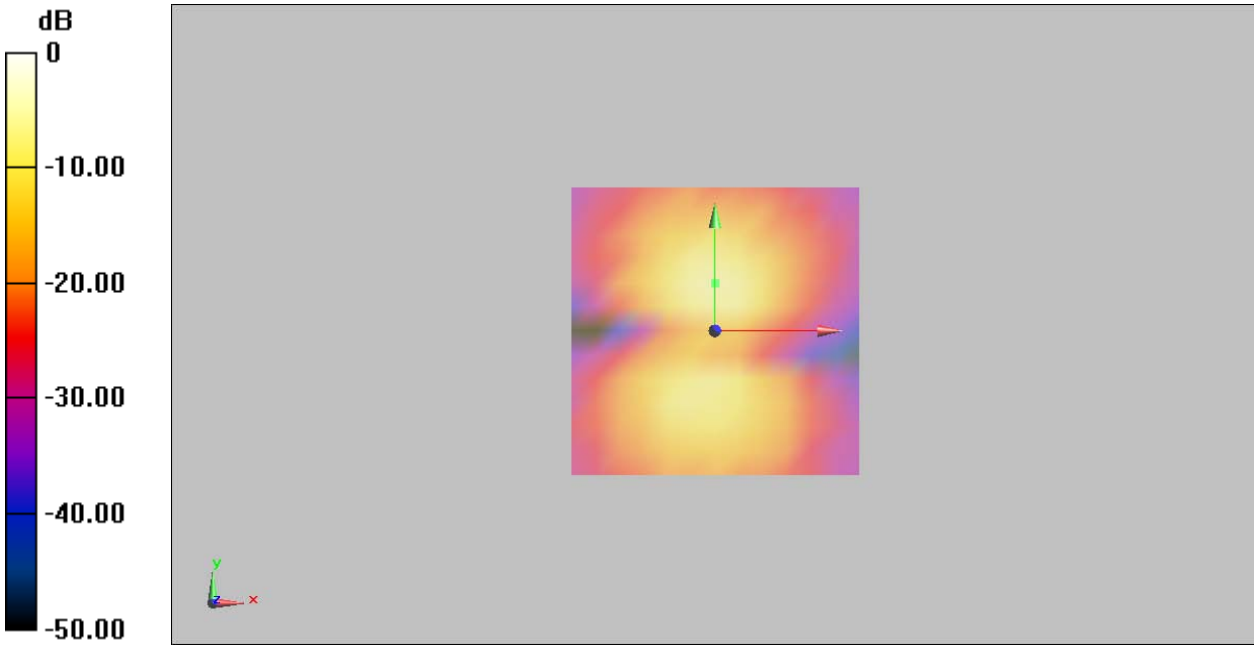

0 dB = 1.000 A/m = 0.00 dBA/m

Figure 21 T-Coil CDMA BC0 Y transversal

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil CDMA BC0 Z Axial

Date: 2016-3-30
Communication System: UID 0, CDMA (0); Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 CDMA BC0 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 28.77
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = 2.42 dBA/m
BWC Factor = 0.16 dB
Location: 0, -4.2, 3.7 mm

N9131 CDMA BC0 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 28.77
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1/ABM2 = 45.56 dB
ABM1 comp = 2.42 dBA/m
BWC Factor = 0.16 dB
Location: 0, -4.2, 3.7 mm

N9131 CDMA BC0 HAC_TCoil_WD_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 56.35
Measure Window Start: 300ms
Measure Window Length: 2000ms
BWC applied: 10.81 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
Diff = 1.72 dB
BWC Factor = 10.81 dB
Location: 0, -4.2, 3.7 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

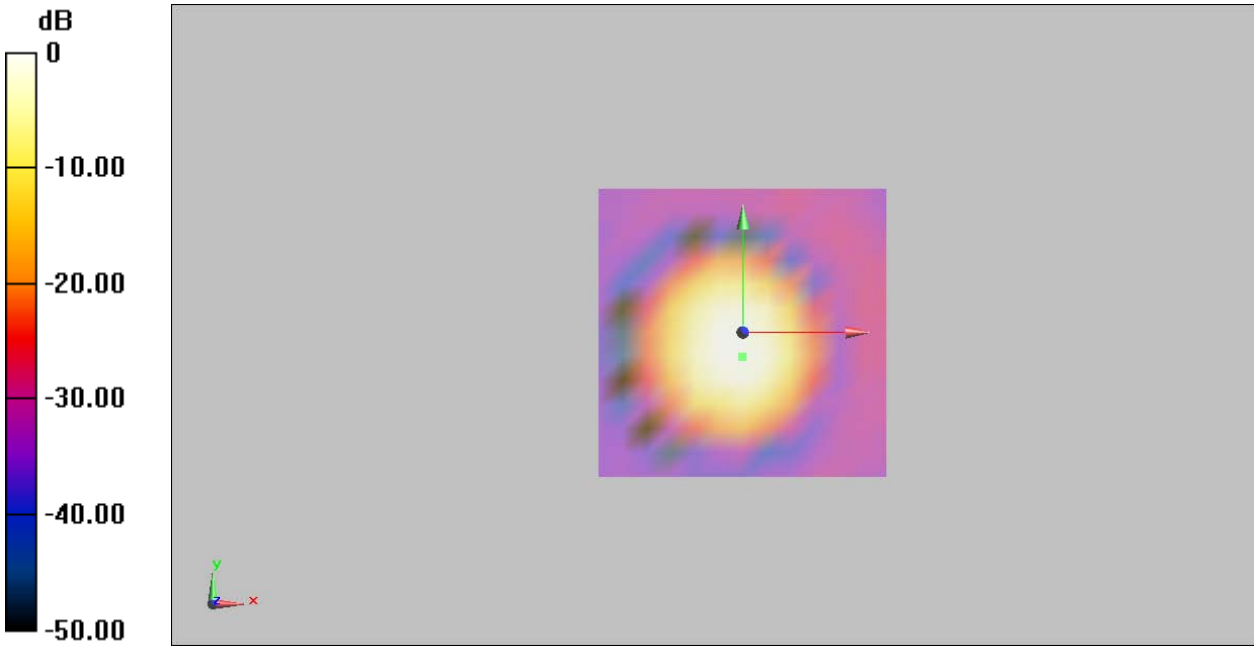

0 dB = 1.000 A/m = 0.00 dBA/m

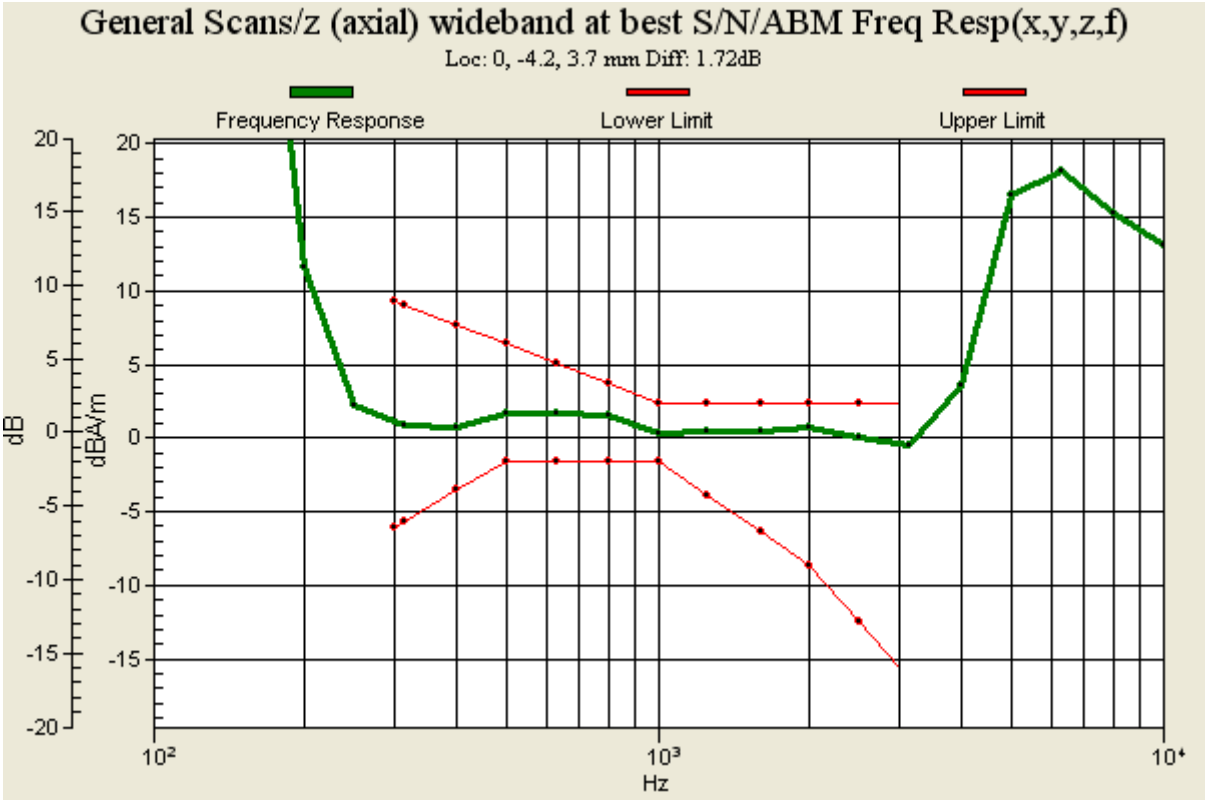

Figure 22 T-Coil CDMA BC0 Z Axial

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil CDMA BC1 Y transversal

Date: 2016-3-30

Communication System: UID 0, CDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13

Electronics: DAE4 Sn871; Calibrated: 2015-11-17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 CDMA BC1 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 28.77

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1 comp = -5.70 dBA/m

BWC Factor = 0.16 dB

Location: 0, 4.2, 3.7 mm

N9131 CDMA BC1 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 28.77

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 47.00 dB

ABM1 comp = -5.70 dBA/m

BWC Factor = 0.16 dB

Location: 0, 4.2, 3.7 mm

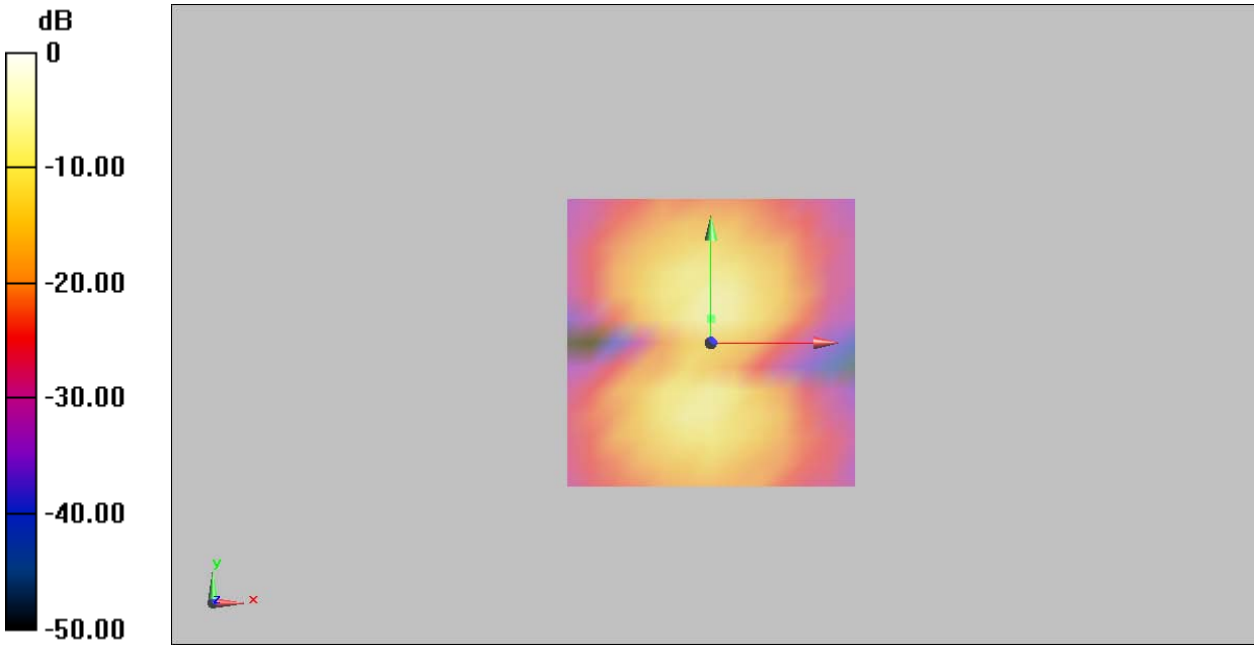

0 dB = 1.000 A/m = 0.00 dBA/m

Figure 23 T-Coil CDMA BC1 Y transversal

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil CDMA BC1 Z Axial

Date: 2016-3-30
Communication System: UID 0, CDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 CDMA BC1 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 28.77
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = 2.10 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 CDMA BC1 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 28.77
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1/ABM2 = 44.67 dB
ABM1 comp = 2.10 dBA/m
BWC Factor = 0.16 dB
Location: 0, 0, 3.7 mm

N9131 CDMA BC1 HAC_TCoil_WD_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 56.35
Measure Window Start: 300ms
Measure Window Length: 2000ms
BWC applied: 10.81 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
Diff = 1.81 dB
BWC Factor = 10.81 dB
Location: 0, 0, 3.7 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

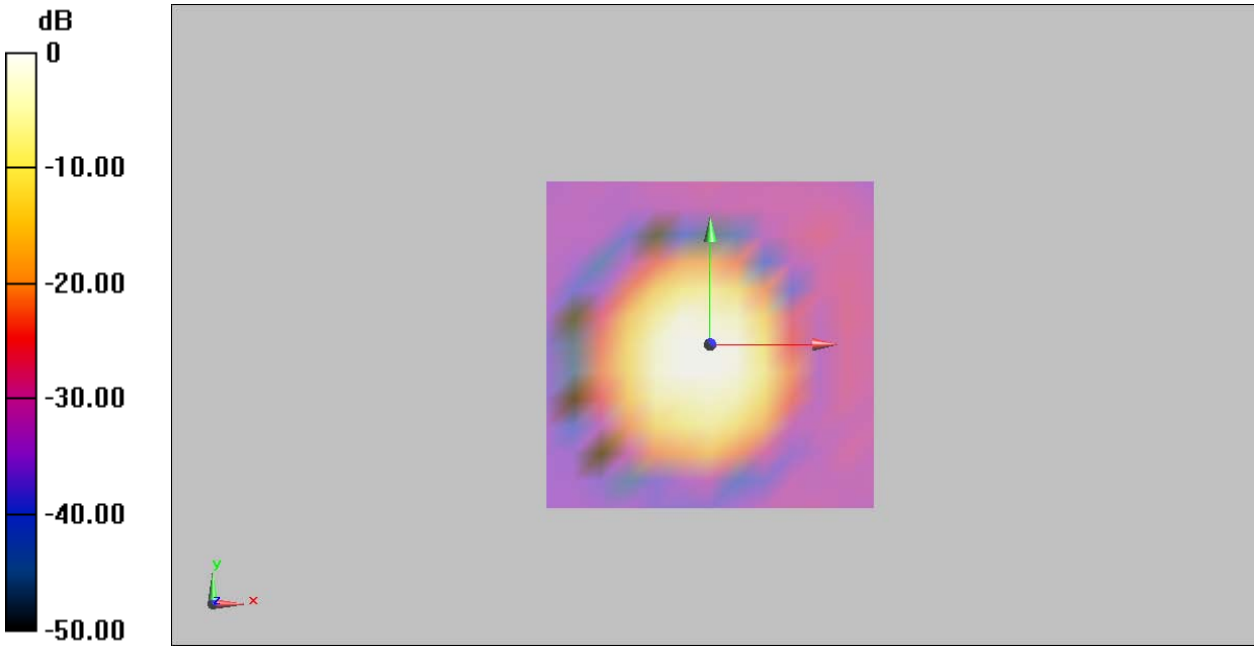

0 dB = 1.000 A/m = 0.00 dBA/m

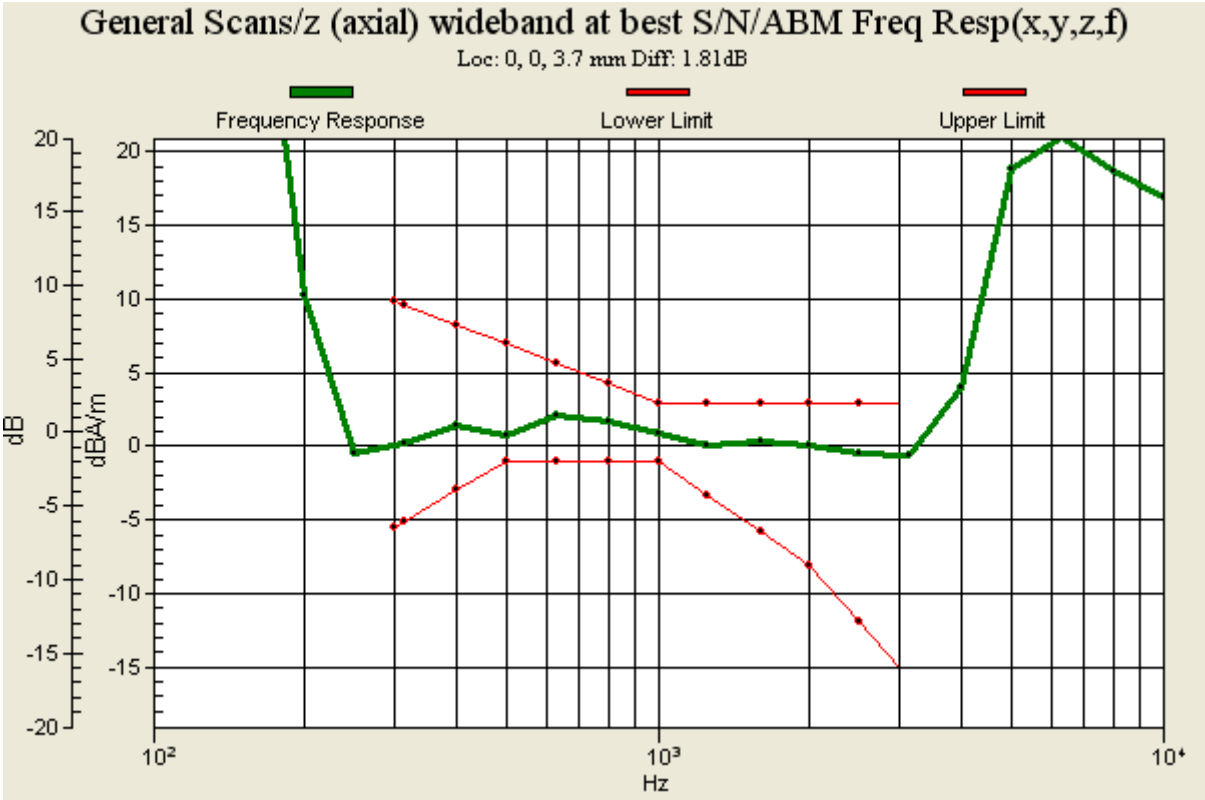

Figure 24 T-Coil CDMA BC1 Z Axial

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil CDMA BC10 Y transversal

Date: 2016-3-30

Communication System: UID 0, CDMA (0); Frequency: 820.5 MHz;Duty Cycle: 1:1

Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3

Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13

Electronics: DAE4 Sn871; Calibrated: 2015-11-17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 CDMA BC10 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 28.77

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1 comp = -5.59 dBA/m

BWC Factor = 0.16 dB

Location: 0, 8.3, 3.7 mm

N9131 CDMA BC10 HAC_TCoil_WD_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 28.77

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 47.28 dB

ABM1 comp = -5.59 dBA/m

BWC Factor = 0.16 dB

Location: 0, 8.3, 3.7 mm

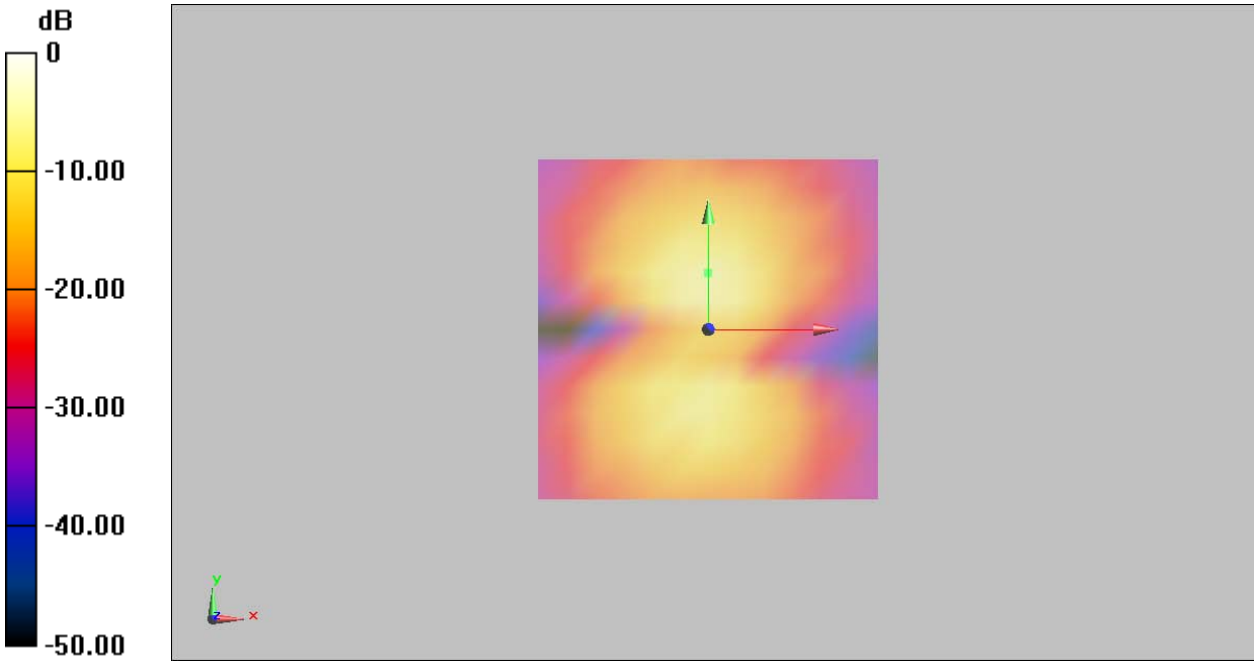

0 dB = 1.000 A/m = 0.00 dBA/m

Figure 25 T-Coil CDMA BC10 Y transversal

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

T-Coil CDMA BC10 Z Axial

Date: 2016-3-30
Communication System: UID 0, CDMA (0); Frequency: 820.5 MHz;Duty Cycle: 1:1
Medium parameters used: σ = 0 S/m, ε_r = 1; ρ = 1 kg/m^3
Ambient Temperature:22.3 ℃ Liquid Temperature: 21.5℃
Phantom section: TCoil Section
DASY5 Configuration:
Sensor-Surface: 4mm (Mechanical Surface Detection)
Probe: AM1DV3 - 3082; ; Calibrated: 2014-11-13
Electronics: DAE4 Sn871; Calibrated: 2015-11-17
Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

N9131 CDMA BC10 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 28.77
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Category	**Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]**
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1 comp = 2.91 dBA/m
BWC Factor = 0.16 dB
Location: 0, -4.2, 3.7 mm

N9131 CDMA BC10 HAC_TCoil_WD_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 28.77
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
ABM1/ABM2 = 44.85 dB
ABM1 comp = 2.91 dBA/m
BWC Factor = 0.16 dB
Location: 0, -4.2, 3.7 mm

N9131 CDMA BC10 HAC_TCoil_WD_Emission/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav
Output Gain: 56.35
Measure Window Start: 300ms
Measure Window Length: 2000ms
BWC applied: 10.81 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
Diff = 1.86 dB
BWC Factor = 10.81 dB
Location: 0, -4.2, 3.7 mm

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

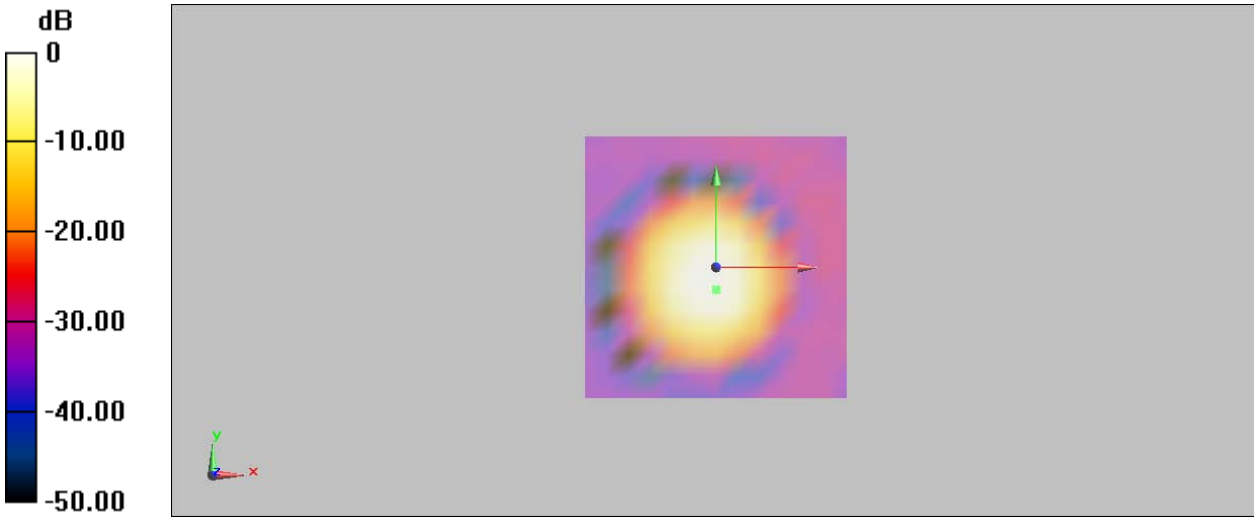

0 dB = 1.000 A/m = 0.00 dBA/m

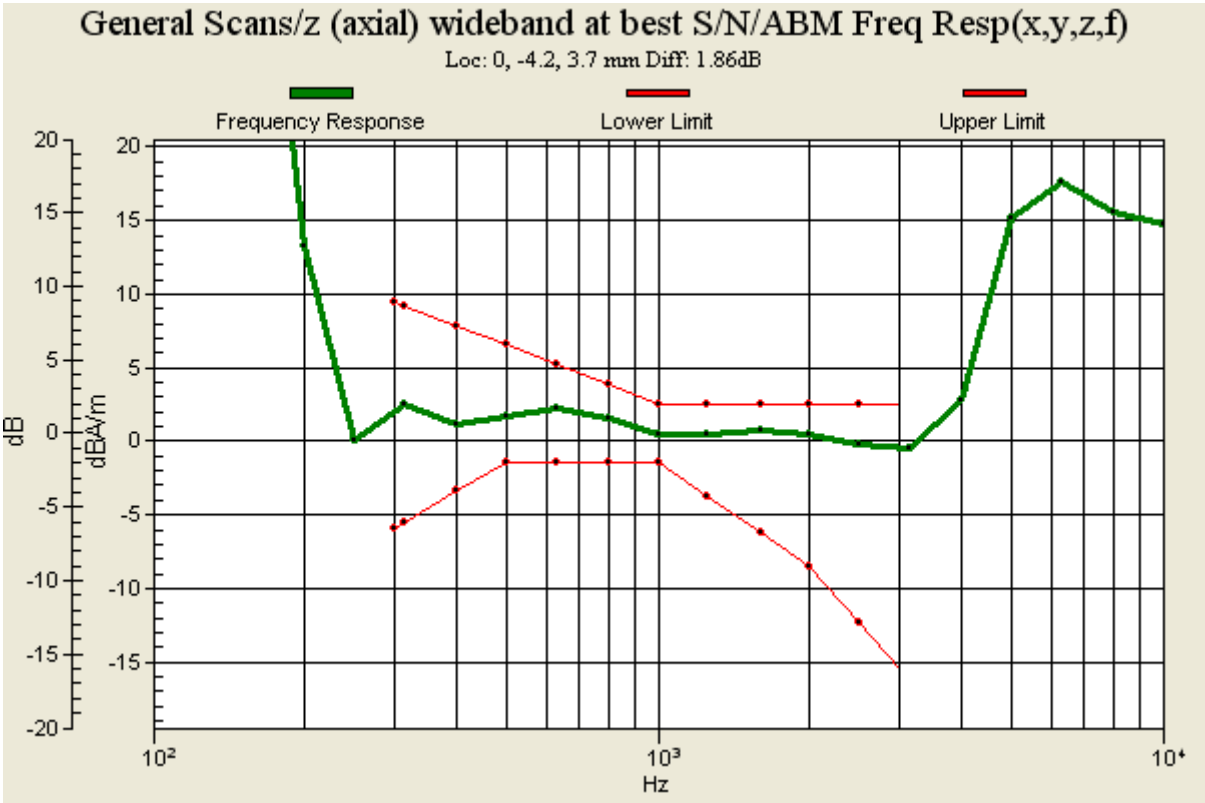

Figure 26 T-Coil CDMA BC10 Z Axial

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

ANNEX C: Probe Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **TA-Shanghai (Auden)**

Certificate No: AM1DV3-3082_Nov14

CALIBRATION CERTIFICATE

Object	AM1DV3 - SN: 3082
Calibration procedure(s)	QA CAL-24.v3 Calibration procedure for AM1D magnetic field probes and TMFS in the audio range
Calibration date:	November 13, 2014

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	03-Oct-14 (No:15573)	Oct-15
Reference Probe AM1DV2	SN: 1008	14-Jan-14 (No. AM1D-1008_Jan14)	Jan-15
DAE4	SN: 781	12-Sep-14 (No. DAE4-781_Sep14)	Sep-15

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
AMCC	1050	01-Oct-13 (in house check Oct-13)	Oct-16
AMMI Audio Measuring Instrument	1062	26-Sep-12 (in house check Sep-12)	Sep-15

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: November 13, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: AM1DV3-3082_Nov14 Page 1 of 3

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

[**References**

[1] ANSI-C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
[2] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
[3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.
The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.
The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of
  Noise level
  RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected.
  Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and –120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and –120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.

Sensitivity: With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

AM1D probe identification and configuration data

Item	**AM1DV3** Audio Magnetic 1D Field Probe
Type No	SP AM1 001 BA
Serial No	**3082**

Overall length	296 mm
Tip diameter	6.0 mm (at the tip)
Sensor offset	3.0 mm (centre of sensor from tip)
Internal Amplifier	20 dB

Manufacturer / Origin	Schmid & Partner Engineering AG, Zürich, Switzerland
Manufacturing date	May 28, 2010
Last calibration date	February 17, 2012

Calibration data

Connector rotation angle	(in DASY system)	**4.0 °**	+/- 3.6 ° (k=2)
Sensor angle	(in DASY system)	**0.65 °**	+/- 0.5 ° (k=2)
Sensitivity at 1 kHz	(in DASY system)	**0.00739 V / (A/m)**	+/- 2.2 % (k=2)

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: AM1DV3-3082_Nov14 Page 3 of 3

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

ANNEX D: DAE4 Calibration Certificate

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn

ilac-MRA CNAS CALIBRATION No. L0570

Client : TA(Shanghai) Certificate No: Z15-97194

CALIBRATION CERTIFICATE

Object	DAE4 - SN: 871
Calibration Procedure(s)	FD-Z11-2-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx)
Calibration date:	November 17, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	06-July-15 (CTTL, No:J15X04257)	July-16

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	

Issued: November 18, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z15-97194 Page 1 of 3

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

In Collaboration with
CTTL speag
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Glossary:

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV , full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.728 ± 0.15% (k=2)	404.712 ± 0.15% (k=2)	405.156 ± 0.15% (k=2)
Low Range	3.98308 ± 0.7% (k=2)	3.93782 ± 0.7% (k=2)	3.97048 ± 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	90.5° ± 1 °

Certificate No: Z15-97194 Page 3 of 3

This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.