

Test Plot 1#: FSK Mode 1_Handheld Front_Middle Channel**DUT: C1; Type: DLG30A; Serial: 17030800720**

Communication System: FSK 2.4GHz; Frequency: 2442.5 MHz; Duty Cycle: 1:1.25

Medium parameters used: $f = 2442.5$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 54.381$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.07 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.358 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

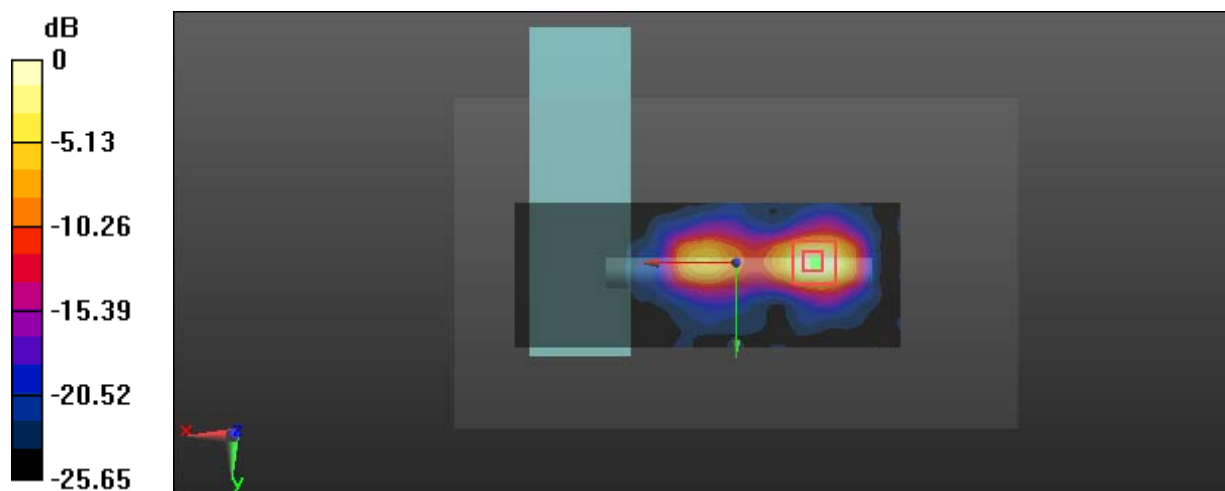

0 dB = 1.43 W/kg = 1.55 dBW/kg

Test Plot 2#: FSK Mode 2_Handheld Front_Middle Channel**DUT: C1; Type: DLG30A; Serial: 17030800720**

Communication System: FSK 2.4GHz; Frequency: 2442.5 MHz; Duty Cycle: 1:1.4

Medium parameters used: $f = 2442.5$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 54.381$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.80 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.055 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

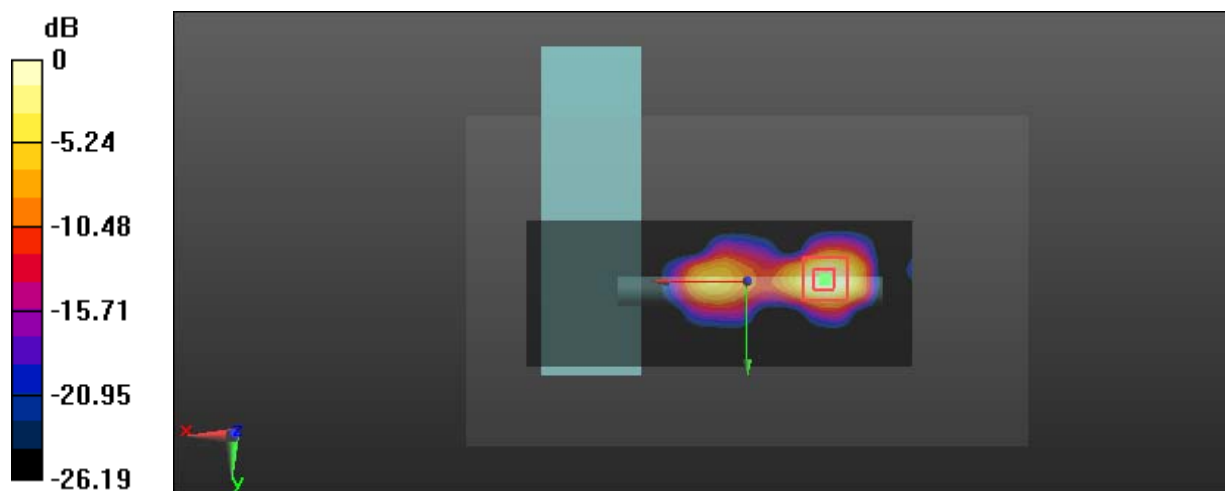

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Plot 3#: FSK Mode 3_Handheld Front_Middle Channel**DUT: C1; Type: DLG30A; Serial: 17030800720**


Communication System: FSK 2.4GHz; Frequency: 2442 MHz; Duty Cycle: 1:1.84

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.949 \text{ S/m}$; $\epsilon_r = 54.366$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

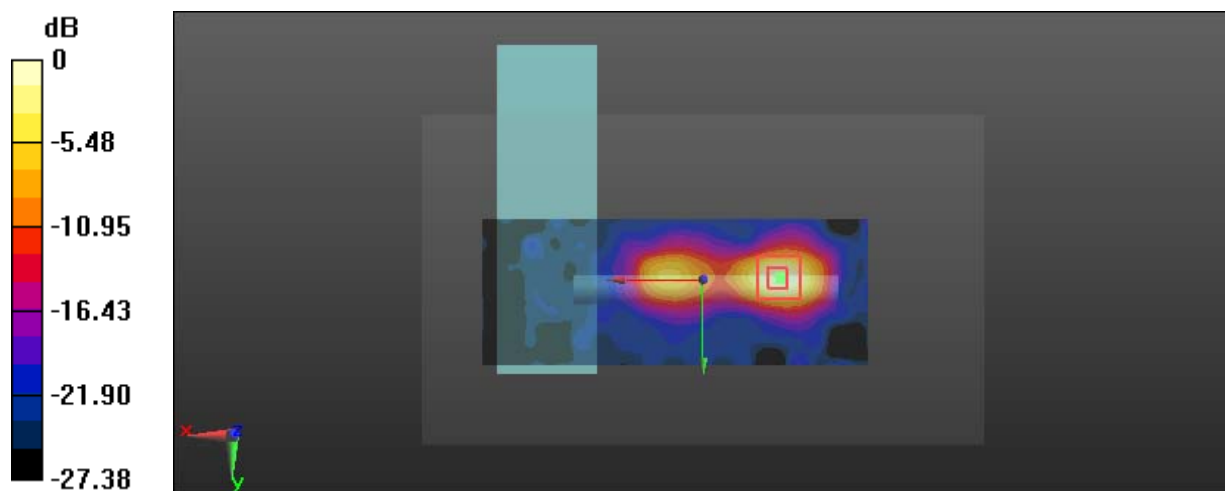Area Scan (161x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$ Maximum value of SAR (interpolated) = 1.30 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.285 V/m ; Power Drift = -0.19 dB Peak SAR (extrapolated) = 1.27 W/kg **SAR(1 g) = 0.566 W/kg ; SAR(10 g) = 0.220 W/kg** Maximum value of SAR (measured) = 0.936 W/kg  $0 \text{ dB} = 0.936 \text{ W/kg} = -0.29 \text{ dBW/kg}$

Test Plot 4#: FSK Mode 1_Handheld Back Remove hold stick_Middle Channel**DUT: C1; Type: DLG30A; Serial: 17030800720**

Communication System: FSK 2.4GHz; Frequency: 2442.5 MHz; Duty Cycle: 1:1.25

Medium parameters used: $f = 2442.5$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 54.381$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.130 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.174 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

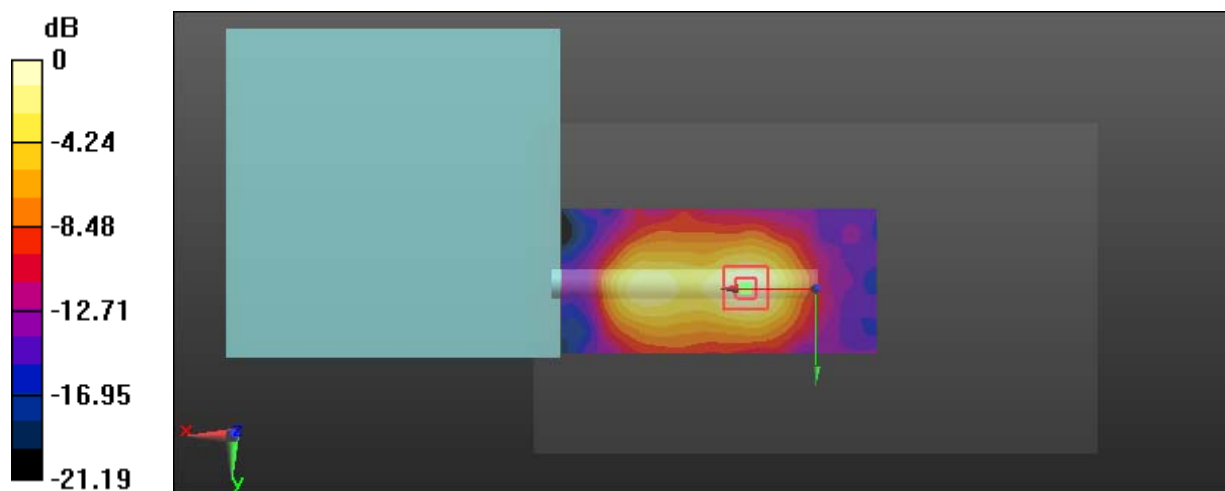

0 dB = 0.127 W/kg = -8.96 dBW/kg

Test Plot 5#: FSK Mode 1_Handheld Top with mobile device holder_Middle Channel**DUT: C1; Type: DLG30A; Serial: 17030800720**

Communication System: FSK 2.4GHz; Frequency: 2442.5 MHz; Duty Cycle: 1:1.25

Medium parameters used: $f = 2442.5$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 54.381$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0360 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.003 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0334 W/kg

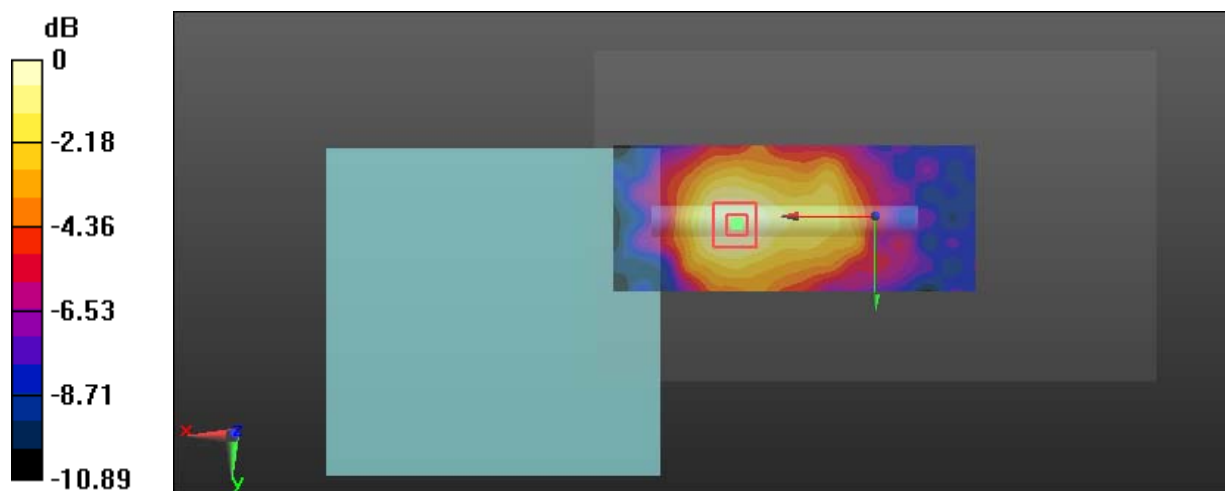

0 dB = 0.0334 W/kg = -14.76 dBW/kg

Test Plot 6#: FSK Mode 1_Close to Body Front_Middle Channel**DUT: C1; Type: DLG30A; Serial: 17030800720**

Communication System: FSK 2.4GHz; Frequency: 2442.5 MHz; Duty Cycle: 1:1.25

Medium parameters used: $f = 2442.5$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 54.381$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.448 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.193 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.444 W/kg

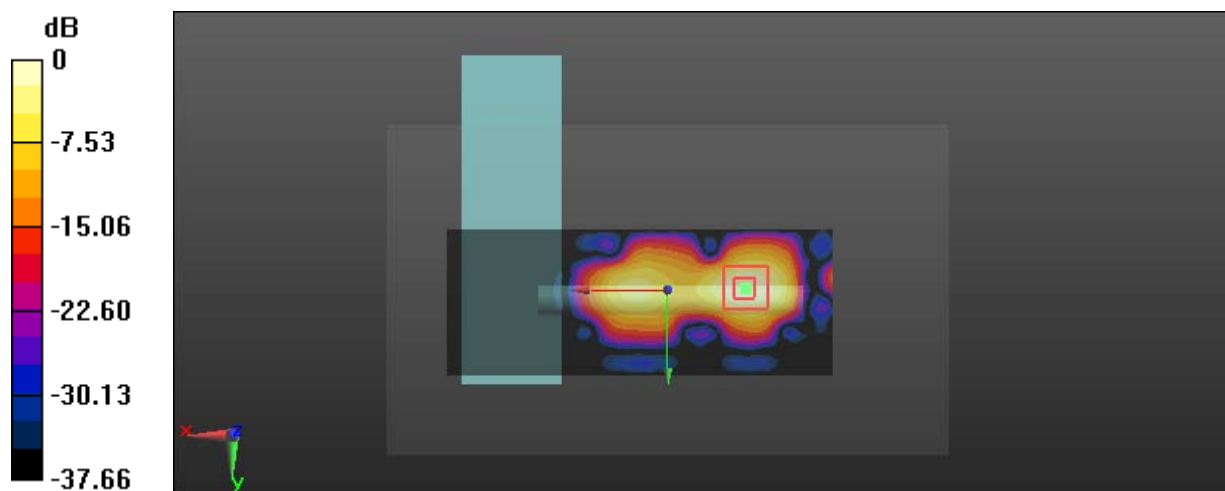

0 dB = 0.444 W/kg = -3.53 dBW/kg