


field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

17.6 TEST DATA


Below 1GHz

[TestMode: TX]; [Polarity: Vertical]

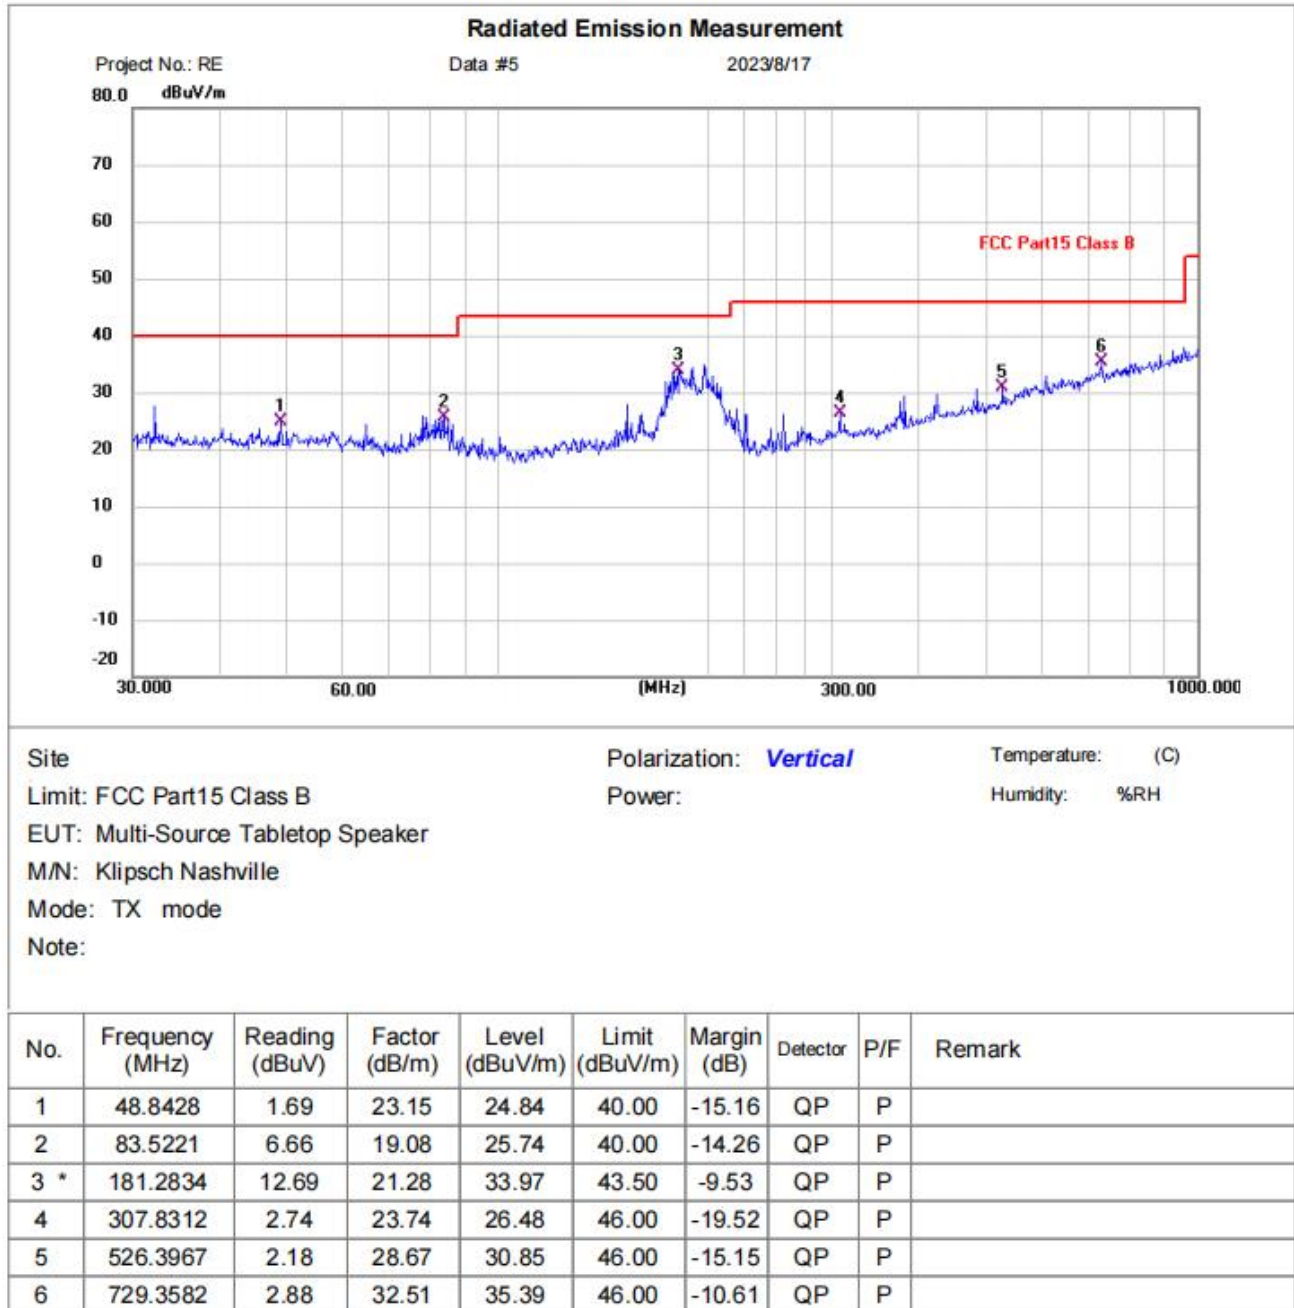

Test Result: Pass


[TestMode: TX]; [Polarity: Horizontal]

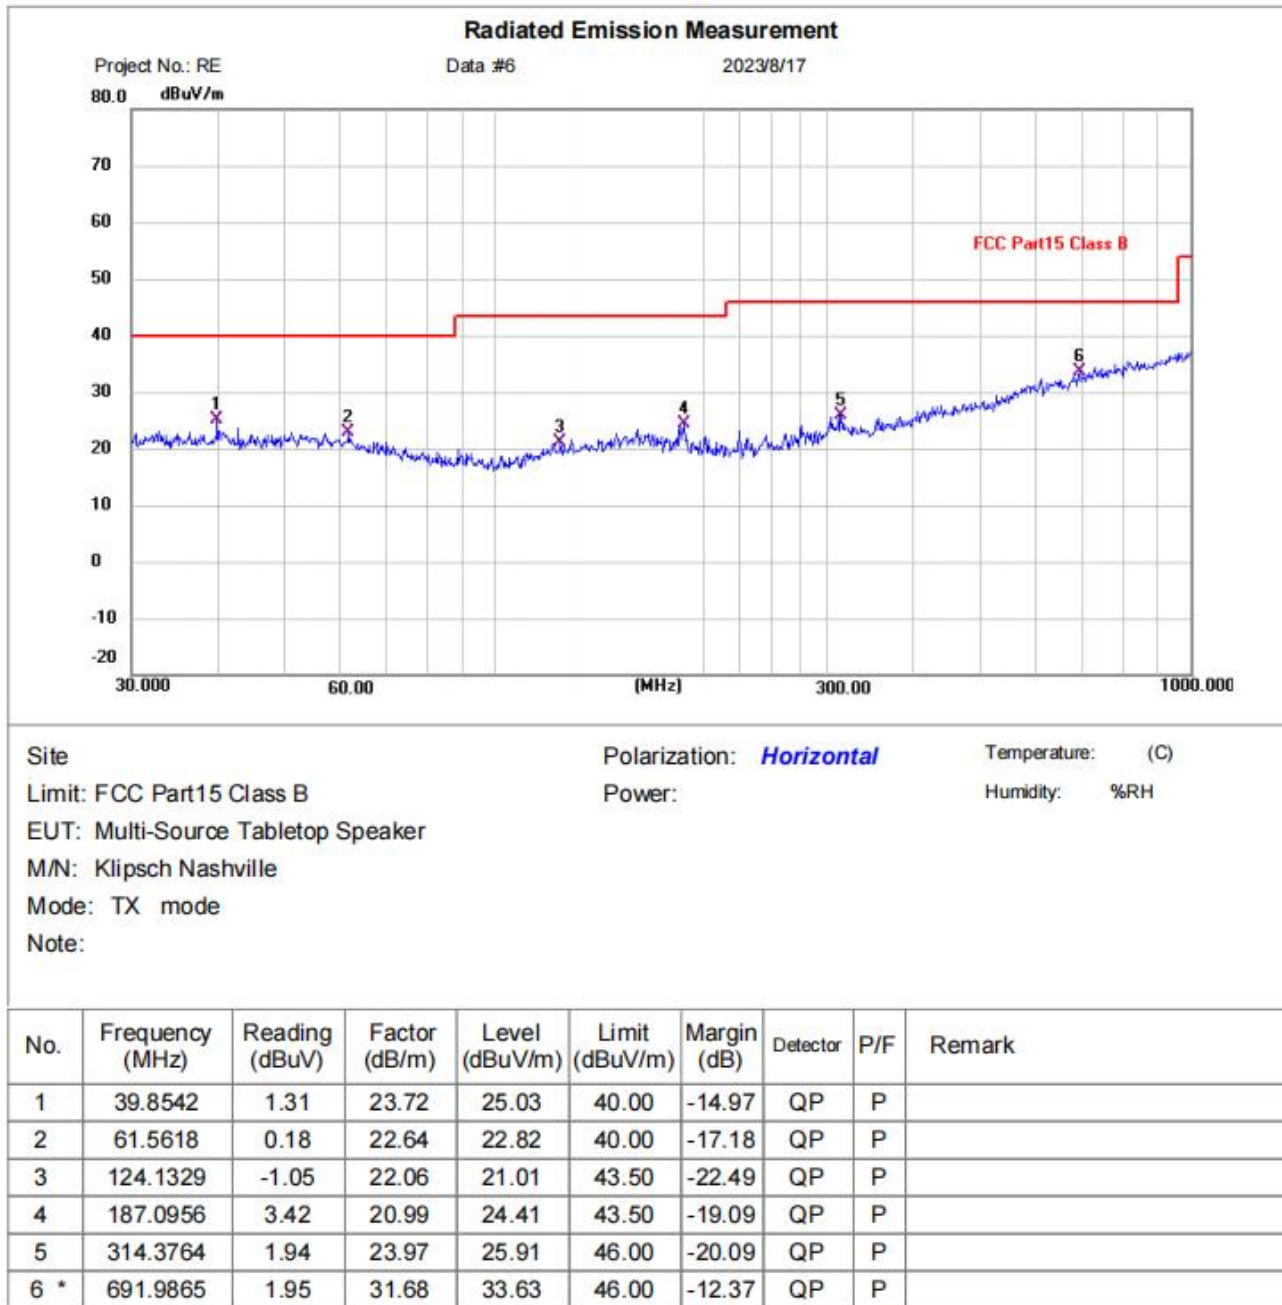

Test Result: Pass

Above 1GHz

[TestMode: TX lowest channel]; [Polarity: Horizontal]

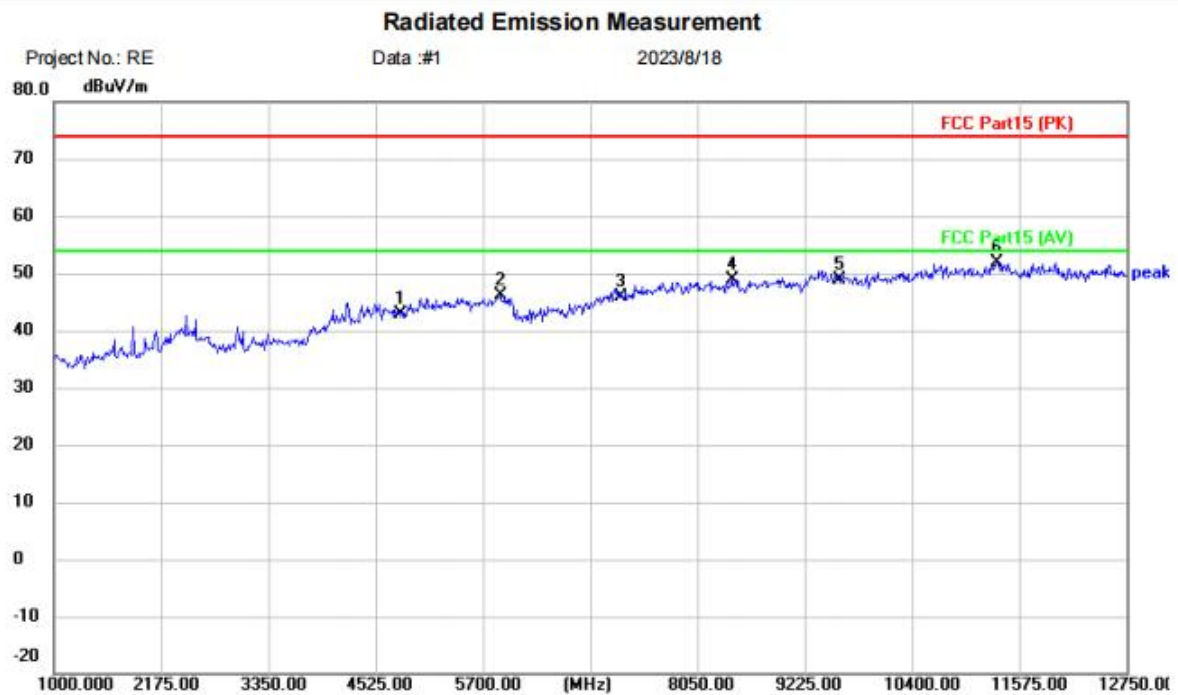


Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Multi-Source Tabletop Speaker
M/N: Klipsch Nashville
Mode: TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	38.46	4.51	42.97	74.00	-31.03	peak	
2		5888.000	39.40	6.71	46.11	74.00	-27.89	peak	
3		7206.000	38.48	7.41	45.89	74.00	-28.11	peak	
4		8426.000	39.92	9.01	48.93	74.00	-25.07	peak	
5		9608.000	37.32	11.59	48.91	74.00	-25.09	peak	
6	*	11328.25	38.60	13.39	51.99	74.00	-22.01	peak	

Test Result: Pass

[TestMode:TX lowest channel]; [Polarity: Vertical]

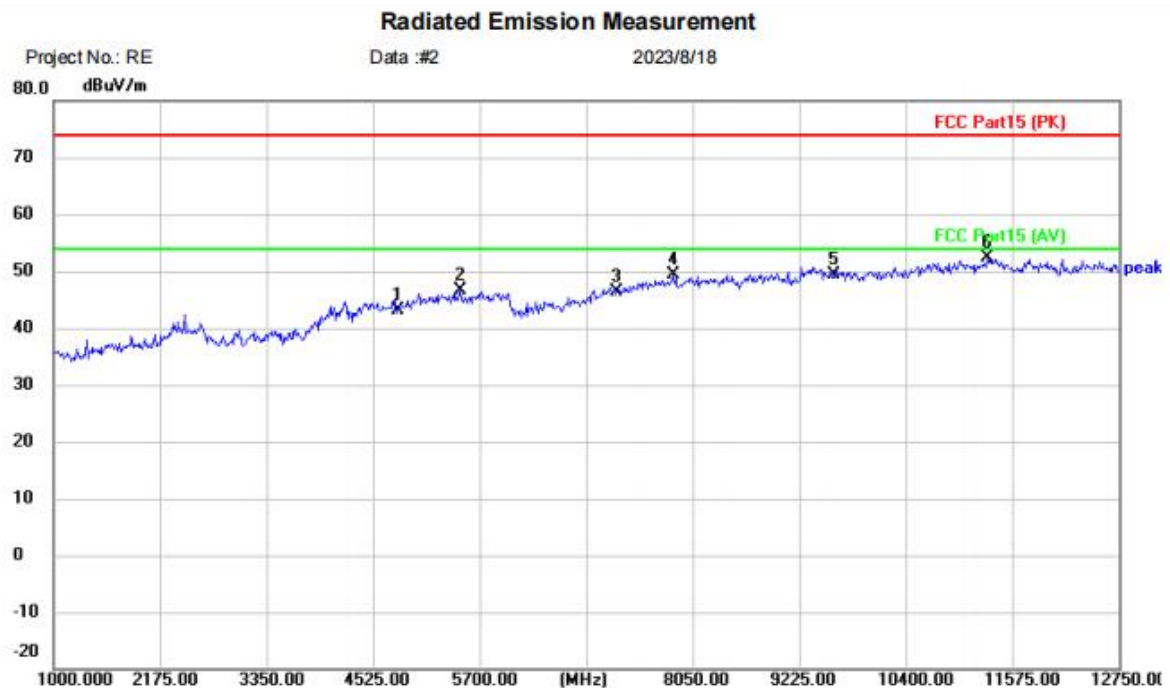

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Multi-Source Tabletop Speaker

M/N: Klipsch Nashville


Mode: TX-L

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	38.71	4.51	43.22	74.00	-30.78	peak	
2		5488.500	40.31	6.24	46.55	74.00	-27.45	peak	
3		7206.000	39.05	7.41	46.46	74.00	-27.54	peak	
4		7838.500	40.79	8.66	49.45	74.00	-24.55	peak	
5		9608.000	37.85	11.59	49.44	74.00	-24.56	peak	
6	*	11304.75	38.92	13.39	52.31	74.00	-21.69	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

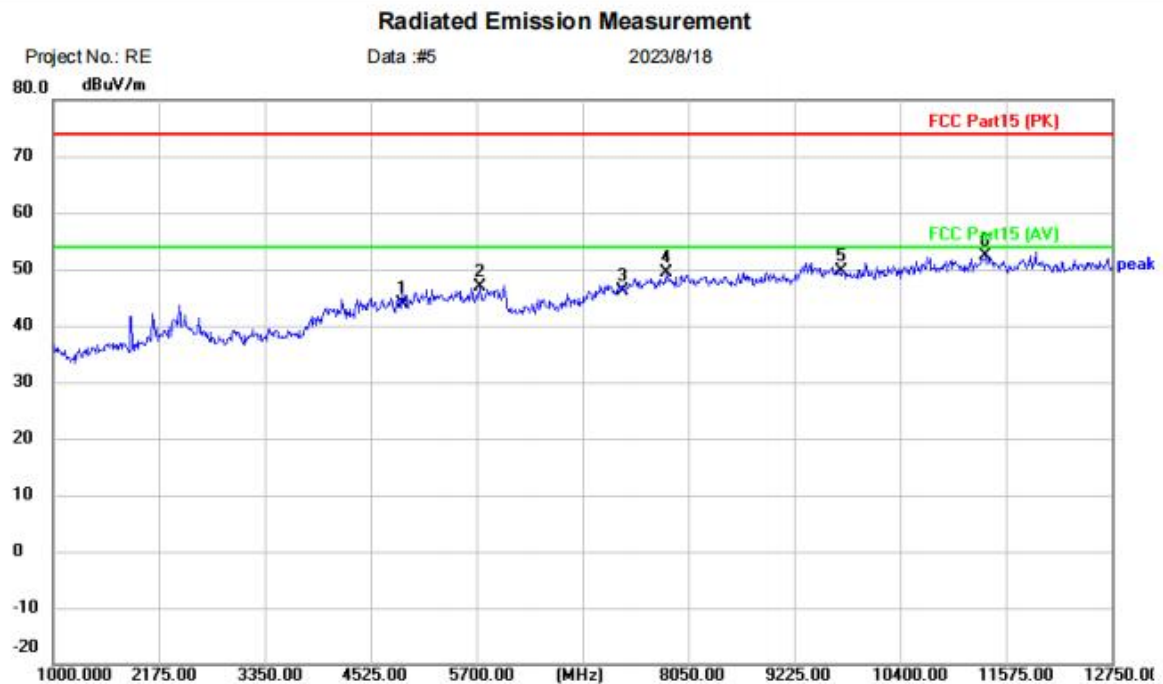


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Multi-Source Tabletop Speaker
M/N: Klipsch Nashville
Mode: TX-M
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	39.32	4.60	43.92	74.00	-30.08	peak	
2		5735.250	40.50	6.44	46.94	74.00	-27.06	peak	
3		7323.000	38.20	7.82	46.02	74.00	-27.98	peak	
4		7803.250	41.08	8.23	49.31	74.00	-24.69	peak	
5		9764.000	37.76	11.76	49.52	74.00	-24.48	peak	
6	*	11351.75	39.10	13.39	52.49	74.00	-21.51	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

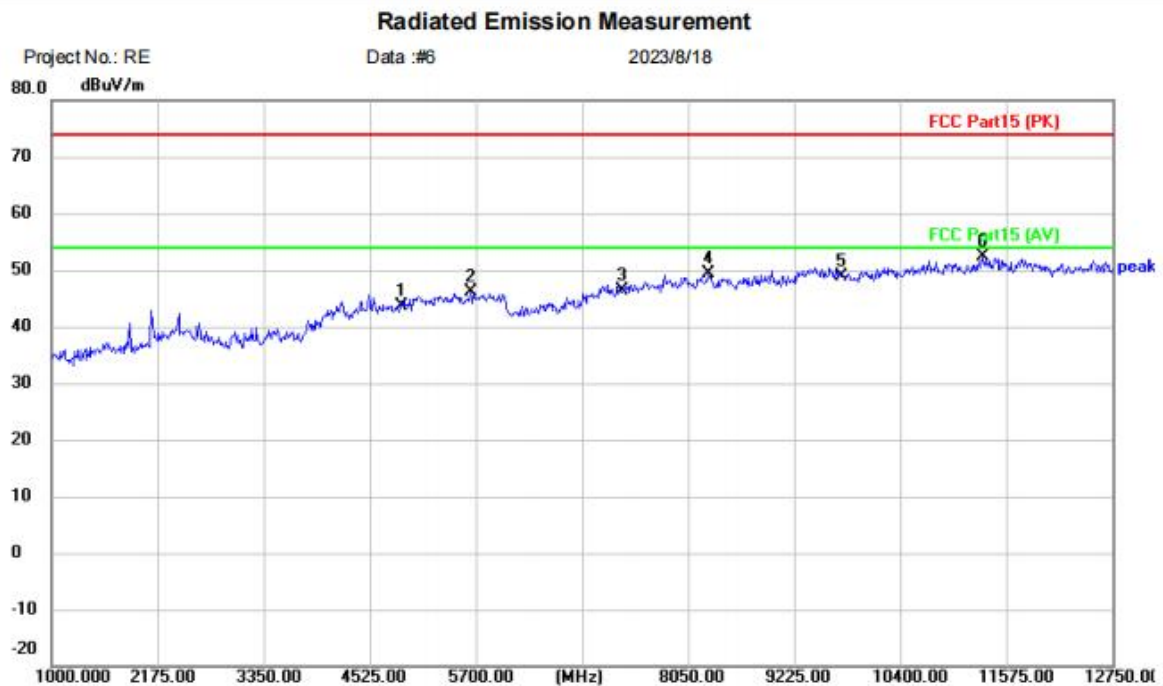

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Multi-Source Tabletop Speaker

M/N: Klipsch Nashville


Mode: TX-M

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	39.10	4.60	43.70	74.00	-30.30	peak	
2		5641.250	40.02	6.12	46.14	74.00	-27.86	peak	
3		7323.000	38.52	7.82	46.34	74.00	-27.66	peak	
4		8273.250	40.62	8.71	49.33	74.00	-24.67	peak	
5		9764.000	37.11	11.76	48.87	74.00	-25.13	peak	
6	*	11316.50	38.89	13.39	52.28	74.00	-21.72	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

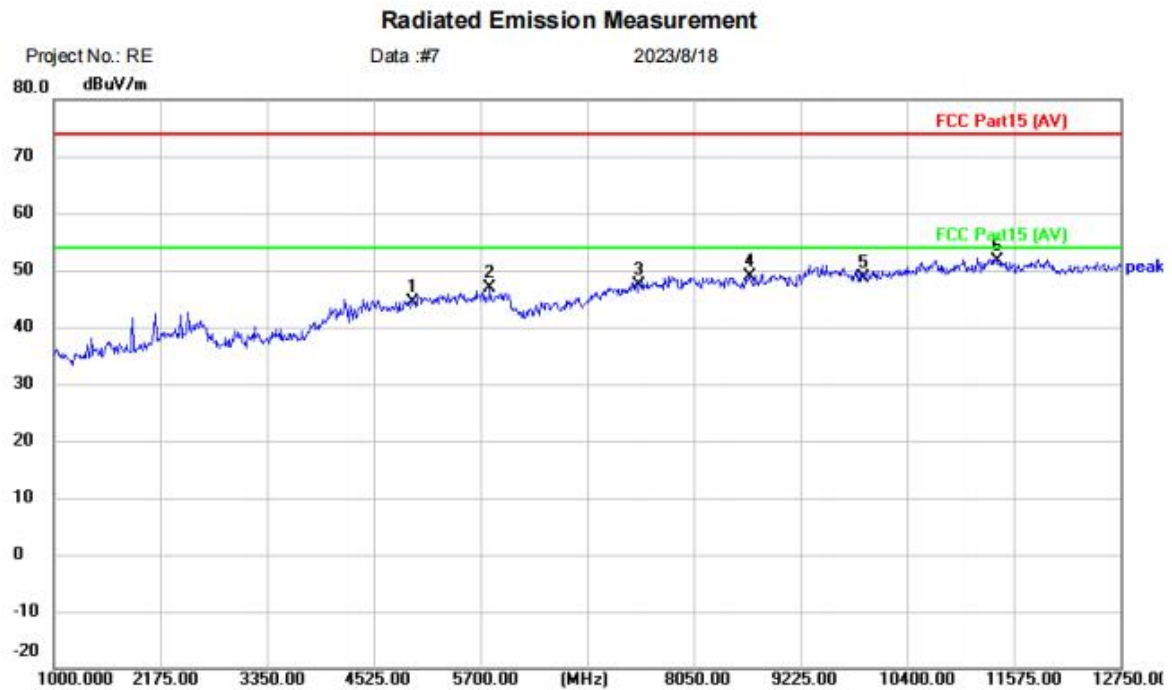

Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (AV) Power: Humidity: %RH

EUT: Multi-Source Tabletop Speaker

M/N: Klipsch Nashville


Mode: TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	38.89	5.47	44.36	74.00	-29.64	peak	
2		5805.750	40.55	6.22	46.77	74.00	-27.23	peak	
3		7440.000	39.05	8.24	47.29	74.00	-26.71	peak	
4		8661.000	39.10	9.76	48.86	74.00	-25.14	peak	
5		9920.000	36.56	11.96	48.52	74.00	-25.48	peak	
6	*	11398.75	38.27	13.41	51.68	74.00	-22.32	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

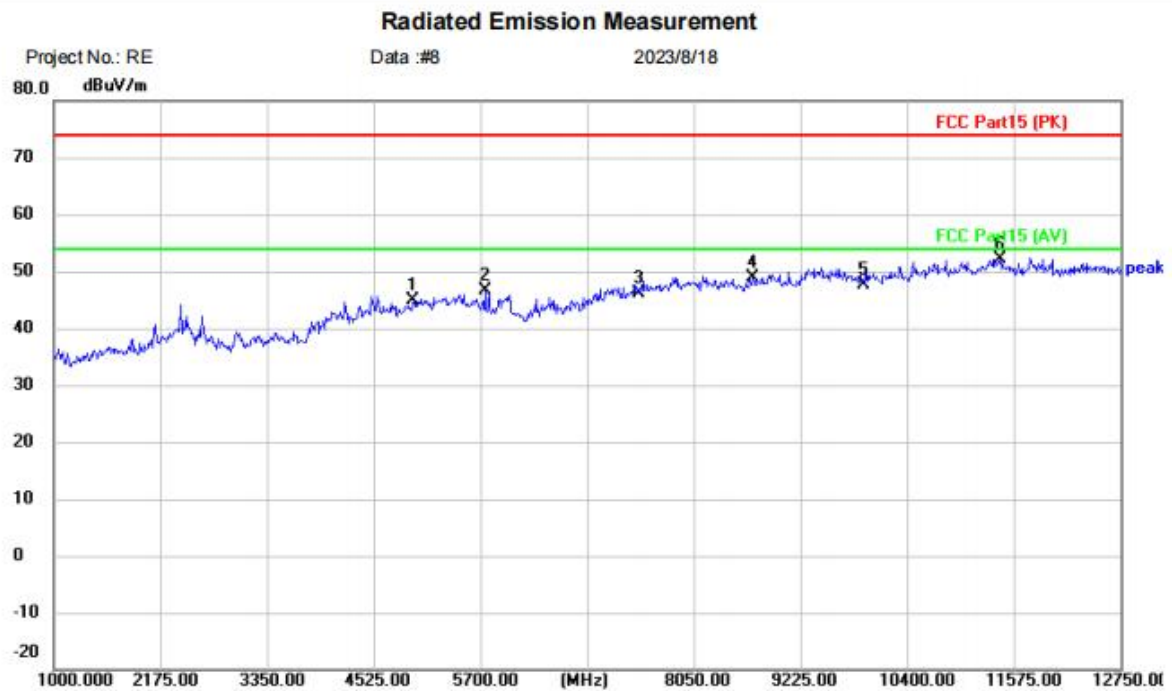

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Multi-Source Tabletop Speaker

M/N: Klipsch Nashville

Mode: TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	39.41	5.47	44.88	74.00	-29.12	peak	
2		5747.000	40.17	6.44	46.61	74.00	-27.39	peak	
3		7440.000	37.89	8.24	46.13	74.00	-27.87	peak	
4		8696.250	39.04	9.87	48.91	74.00	-25.09	peak	
5		9920.000	35.57	11.96	47.53	74.00	-26.47	peak	
6	*	11422.25	38.65	13.44	52.09	74.00	-21.91	peak	

Test Result: Pass

18 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

18.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

18.2 BLOCK DIAGRAM OF TEST SETUP

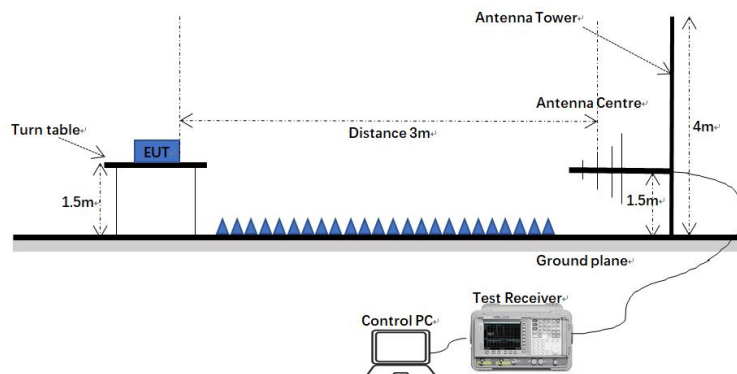

Description of test setup connection:

- EUT was put on turn table in a 966 chamber room;
- The center distance of the receiving antenna is 3 meters from the EUT;
- The signal received by the receiving antenna is transmitted to the receiver through the coaxial line;
- Test receiver connected to control PC.

18.3 TEST SETUP CONFIGURATION

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

Radiated Spurious Emissions:



The EUT is powered by batteries.

18.4 SUPPORT EQUIPMENT

Name	Brand	Mode	Series No	Note
Control PC	Leveon	510S-07IMB	N/A	
Receiver	R&S	ESR7	101199	
Horn Antenna	Schwarz-beck	BBHA9120D	01892 P:00331	

18.5 PROCEDURE


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

18.6 TEST DATA

[TestMode: TX lowest channel]; [Polarity: Horizontal]

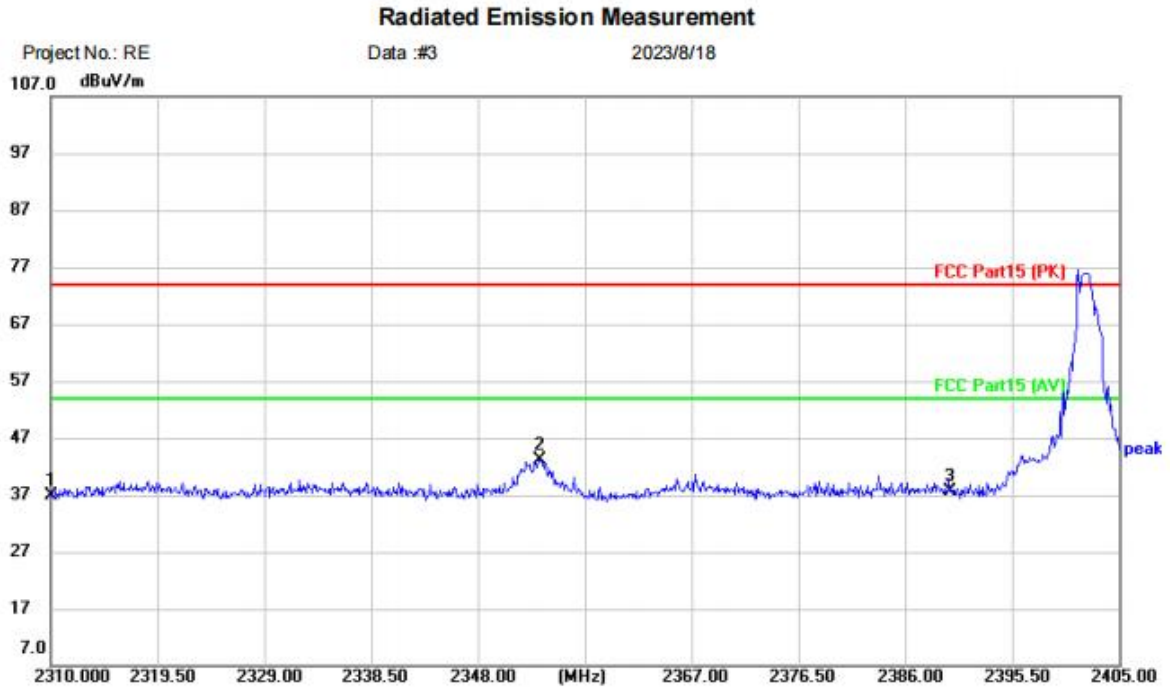


Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Multi-Source Tabletop Speaker
M/N: Klipsch Nashville
Mode: TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	41.40	-4.40	37.00	74.00	-37.00	peak	
2	*	2353.510	47.52	-4.34	43.18	74.00	-30.82	peak	
3		2390.000	42.04	-4.31	37.73	74.00	-36.27	peak	


Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

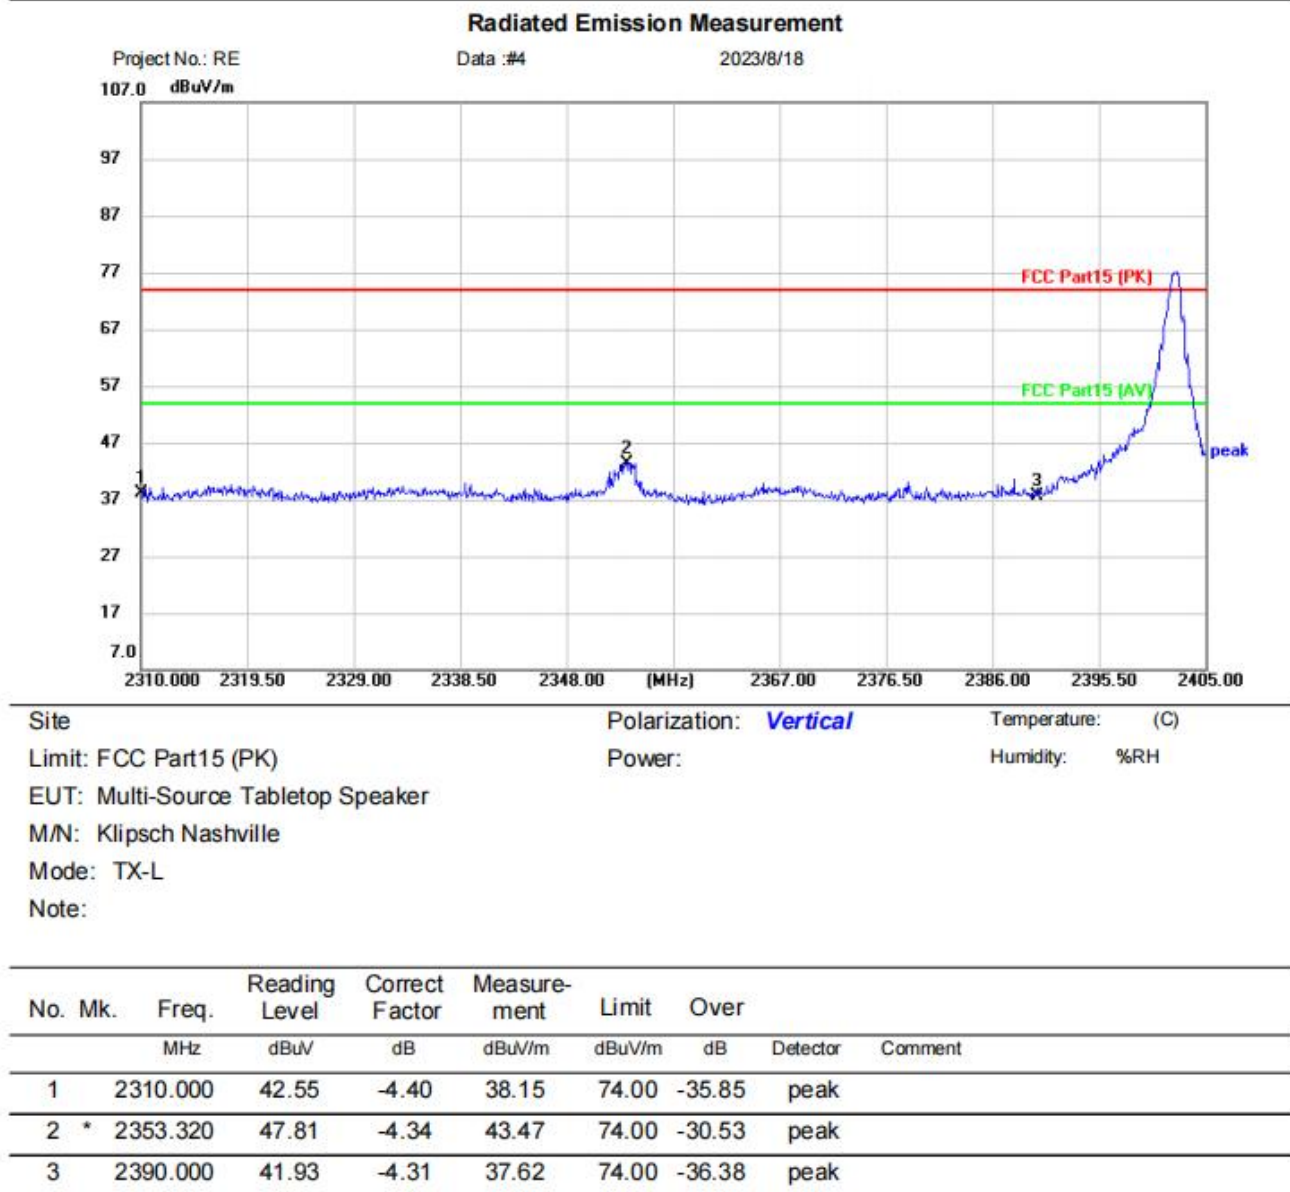

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

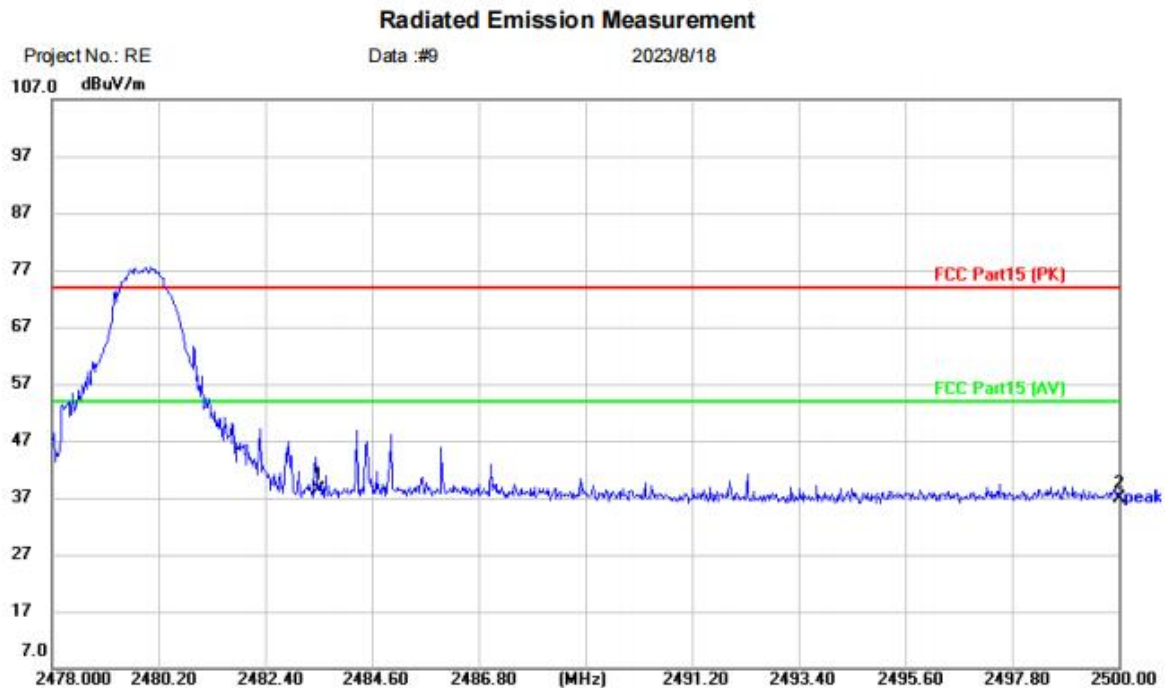

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Multi-Source Tabletop Speaker

M/N: Klipsch Nashville


Mode: TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	42.94	-4.64	38.30	74.00	-35.70	peak	
2		2500.000	41.62	-4.75	36.87	74.00	-37.13	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

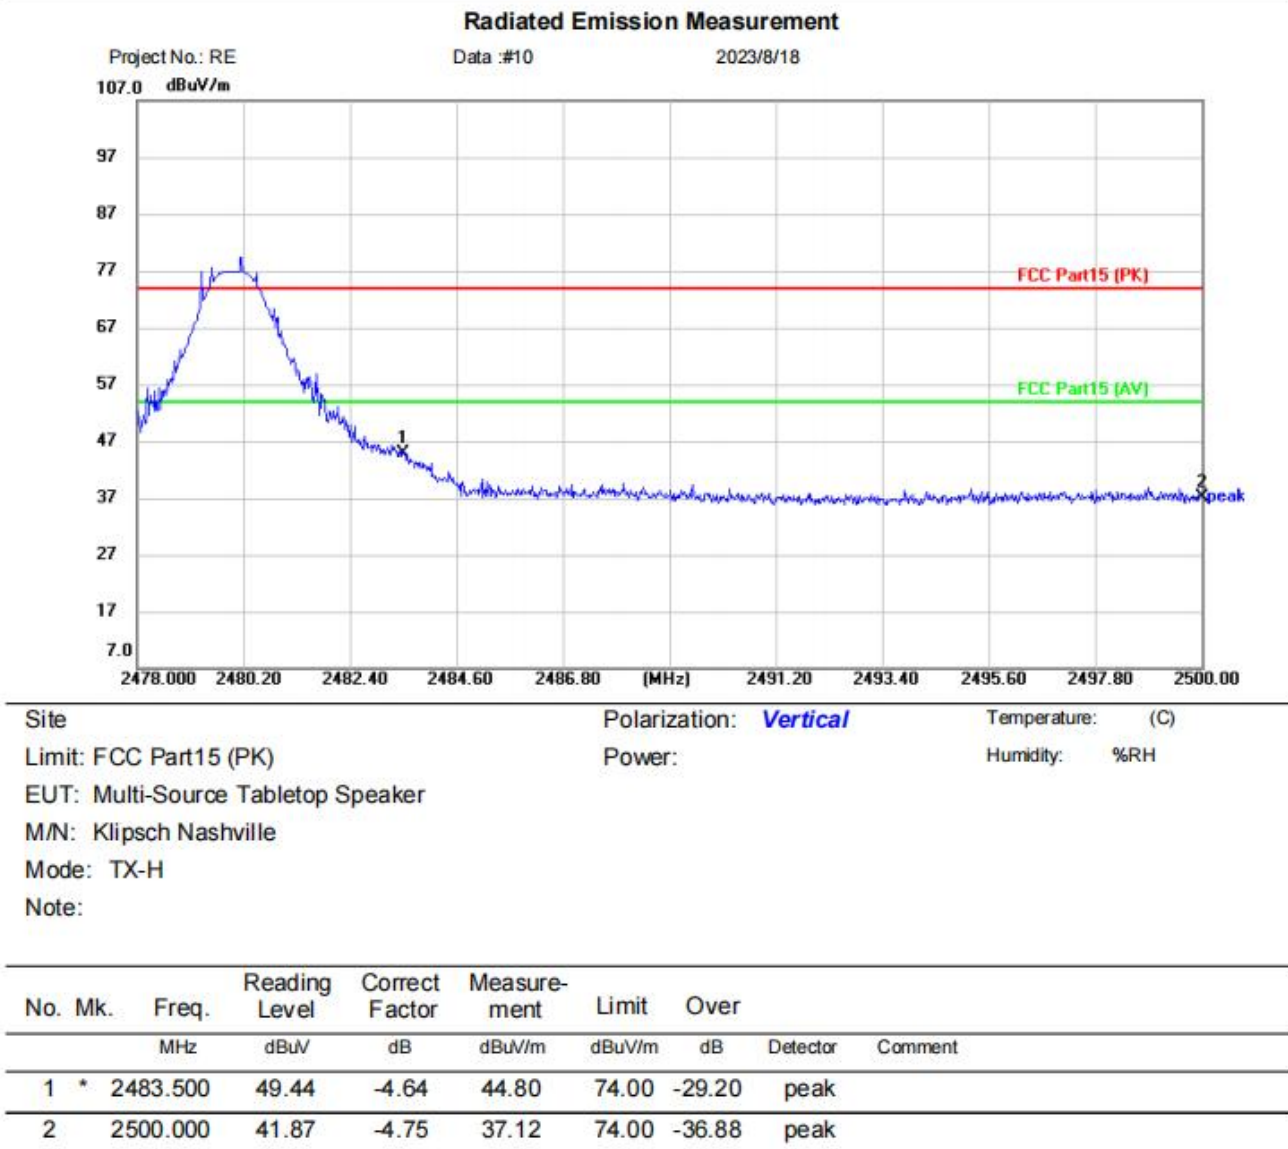

Test Result: Pass

19 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


19.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

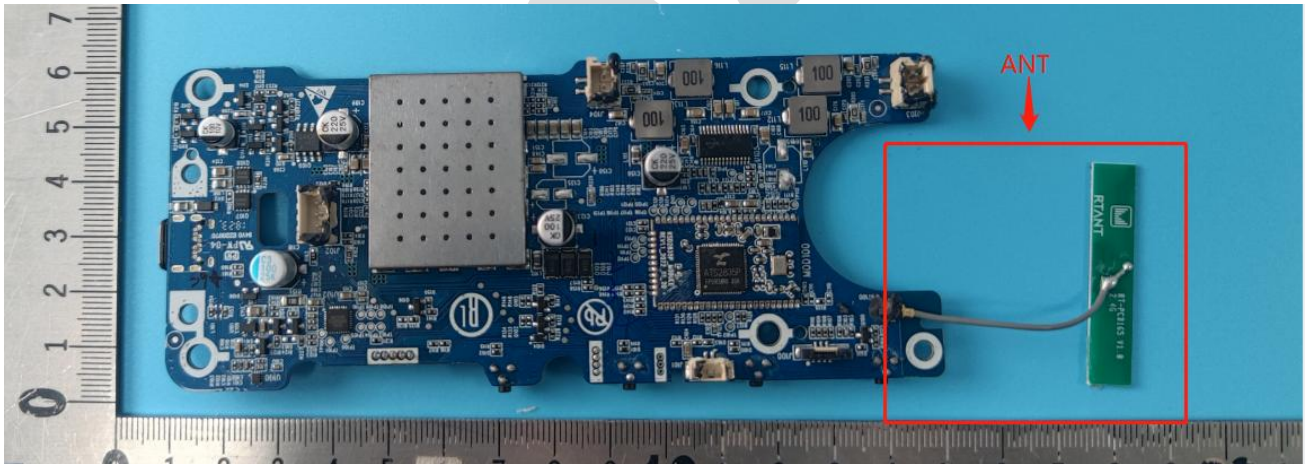


20 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

20.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	---

20.2 BLOCK DIAGRAM OF TEST SETUP

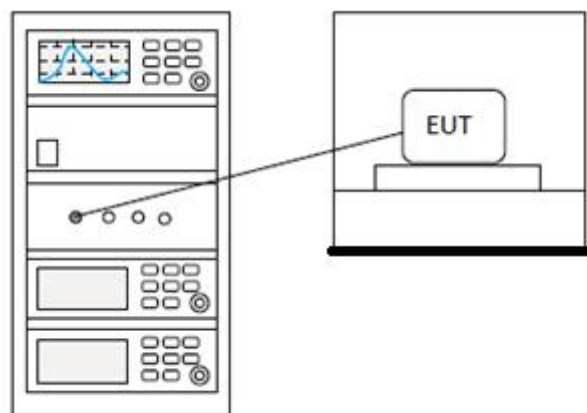

20.3 TEST DATA**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


21 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

21.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

21.2 BLOCK DIAGRAM OF TEST SETUP

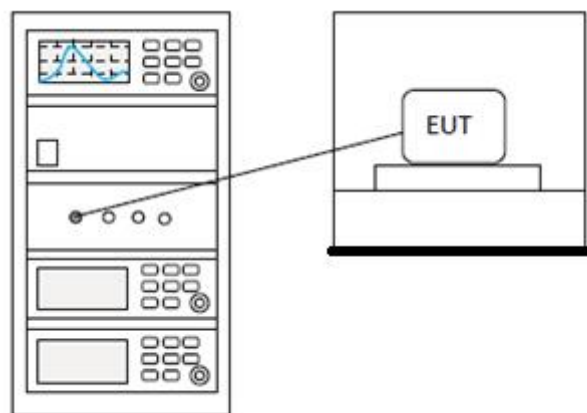

21.3 TEST DATA**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


22 APPENDIX

Appendix1


22.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-0.56	21	Pass
NVNT	1-DH1	2441	Ant1	-2.424	21	Pass
NVNT	1-DH1	2480	Ant1	-2.26	21	Pass
NVNT	2-DH1	2402	Ant1	-0.564	21	Pass
NVNT	2-DH1	2441	Ant1	-2.441	21	Pass
NVNT	2-DH1	2480	Ant1	-2.278	21	Pass
NVNT	3-DH1	2402	Ant1	-0.561	21	Pass
NVNT	3-DH1	2441	Ant1	-2.45	21	Pass
NVNT	3-DH1	2480	Ant1	-2.27	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

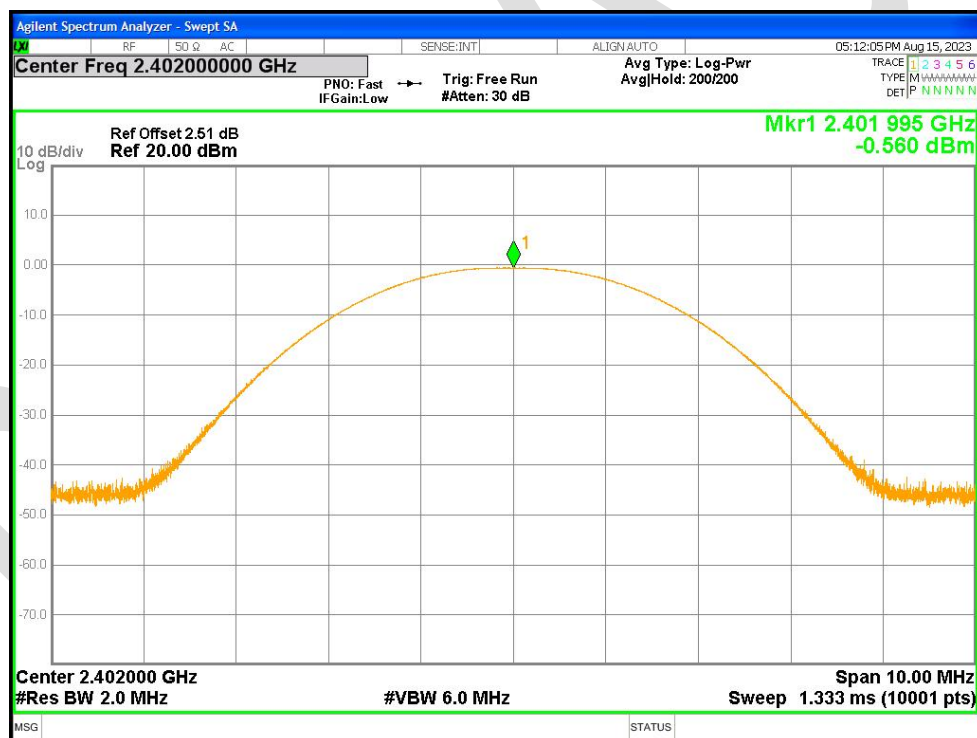


Power NVNT 1-DH1 2441MHz Ant1

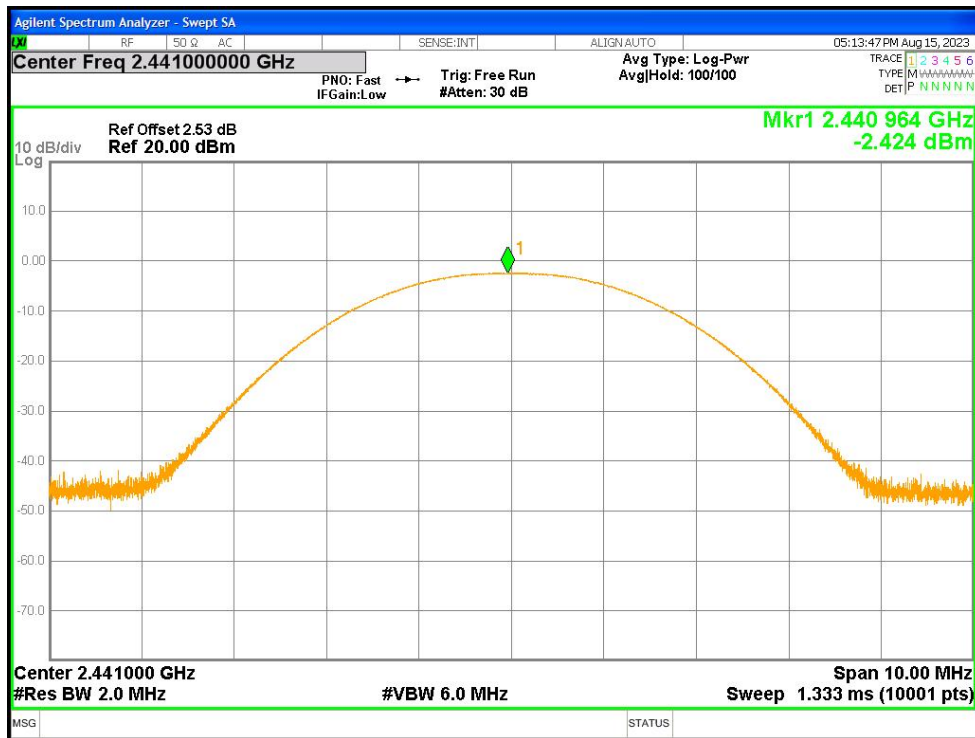


Power NVNT 1-DH1 2480MHz Ant1

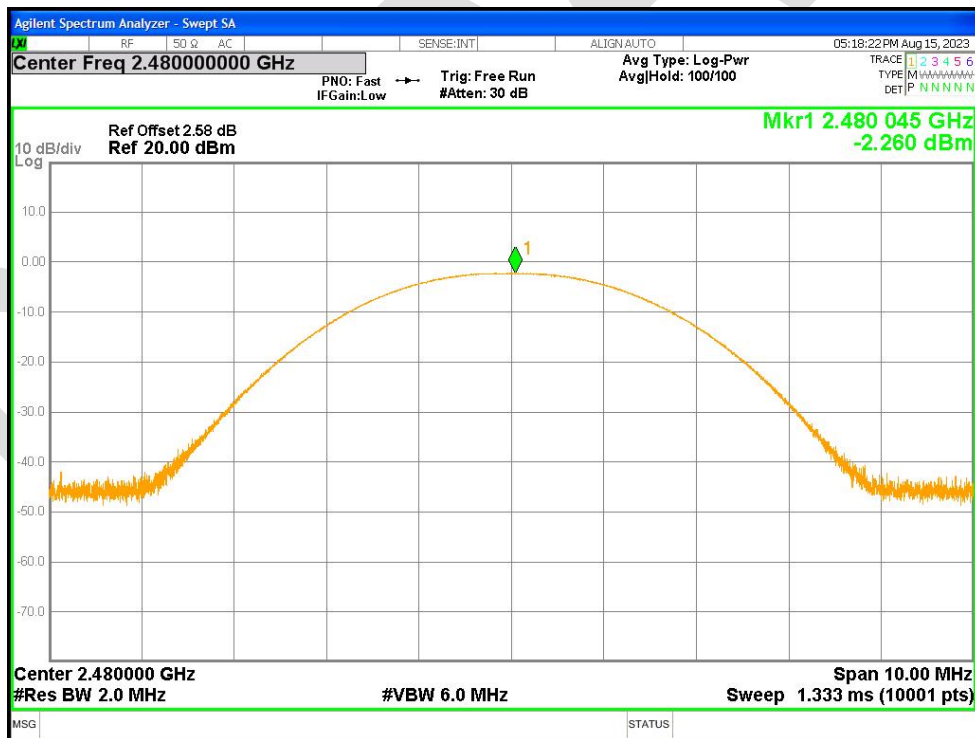


Power NVNT 2-DH1 2402MHz Ant1

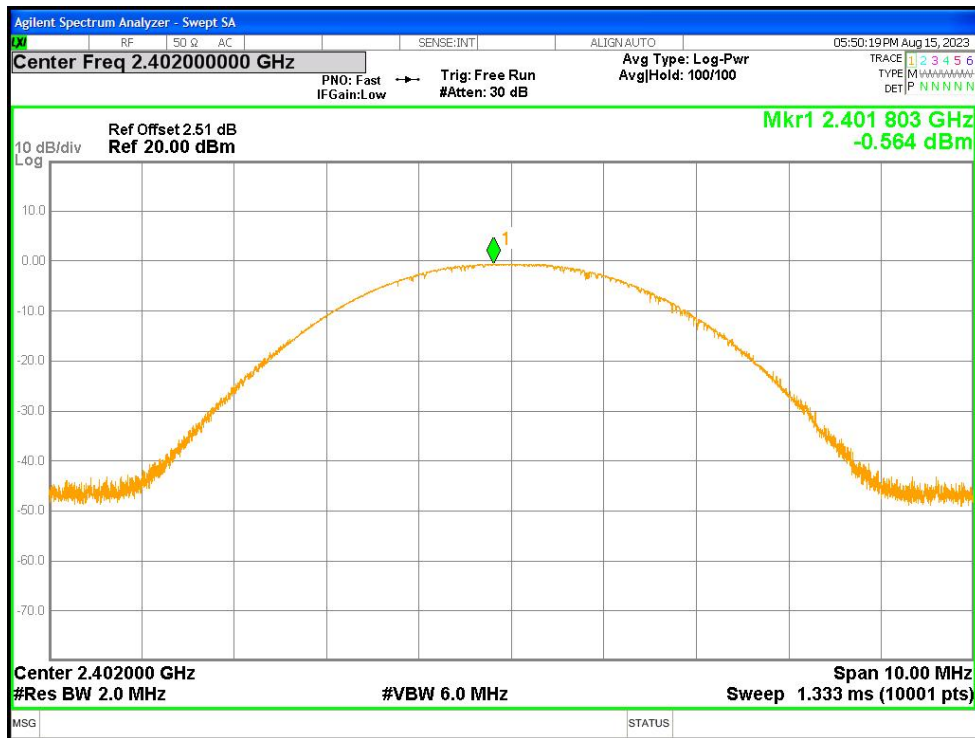


Power NVNT 2-DH1 2441MHz Ant1

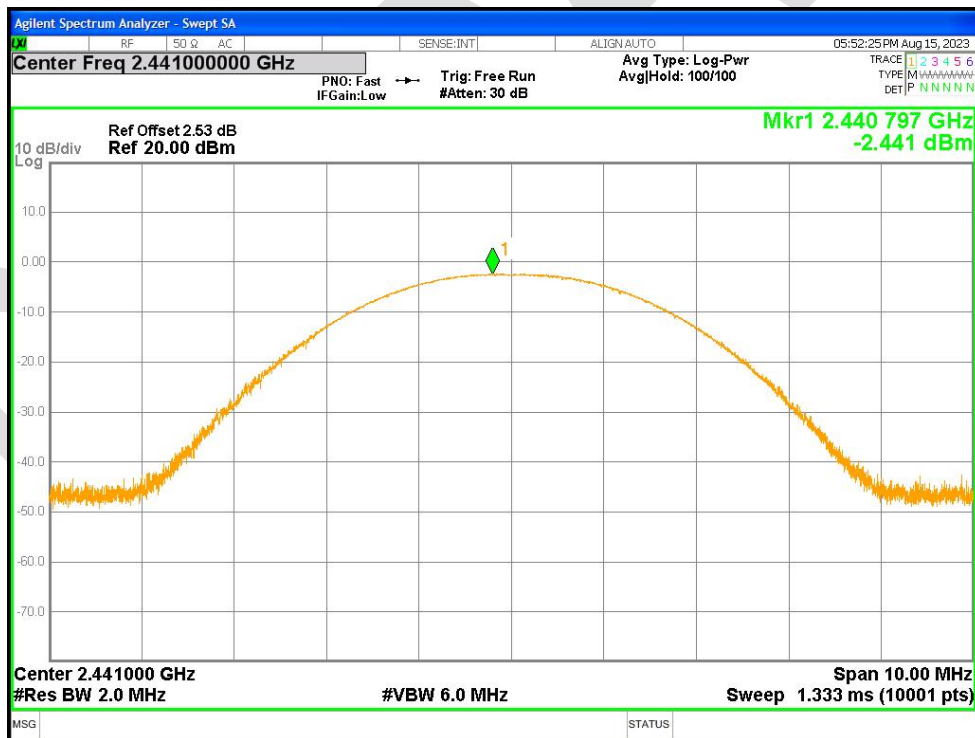


Power NVNT 2-DH1 2480MHz Ant1

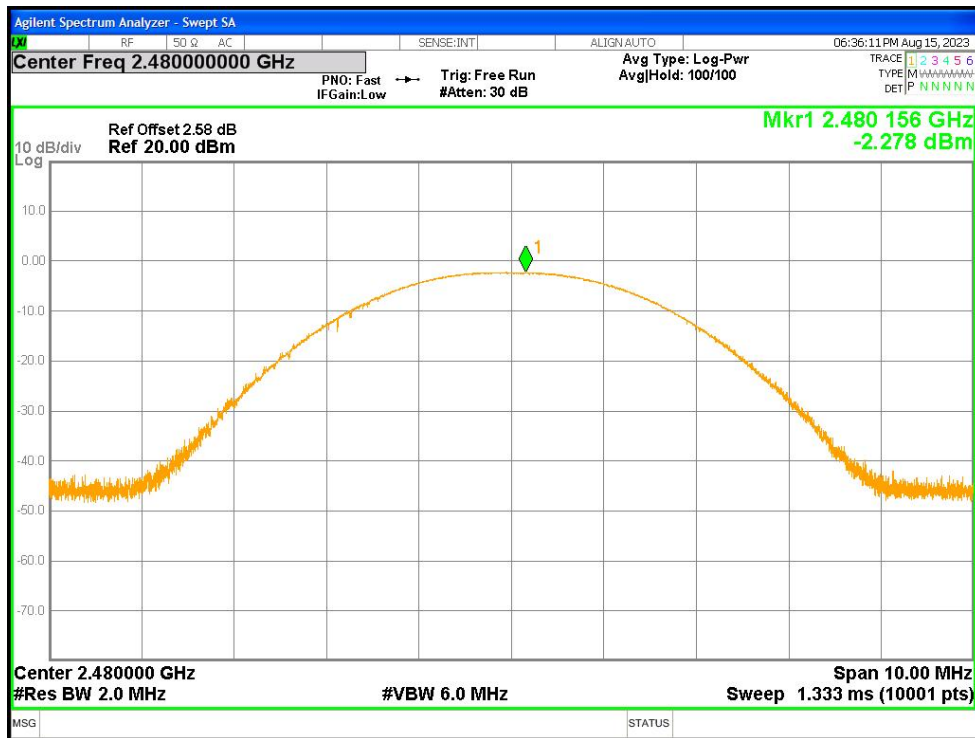

Power NVNT 3-DH1 2402MHz Ant1

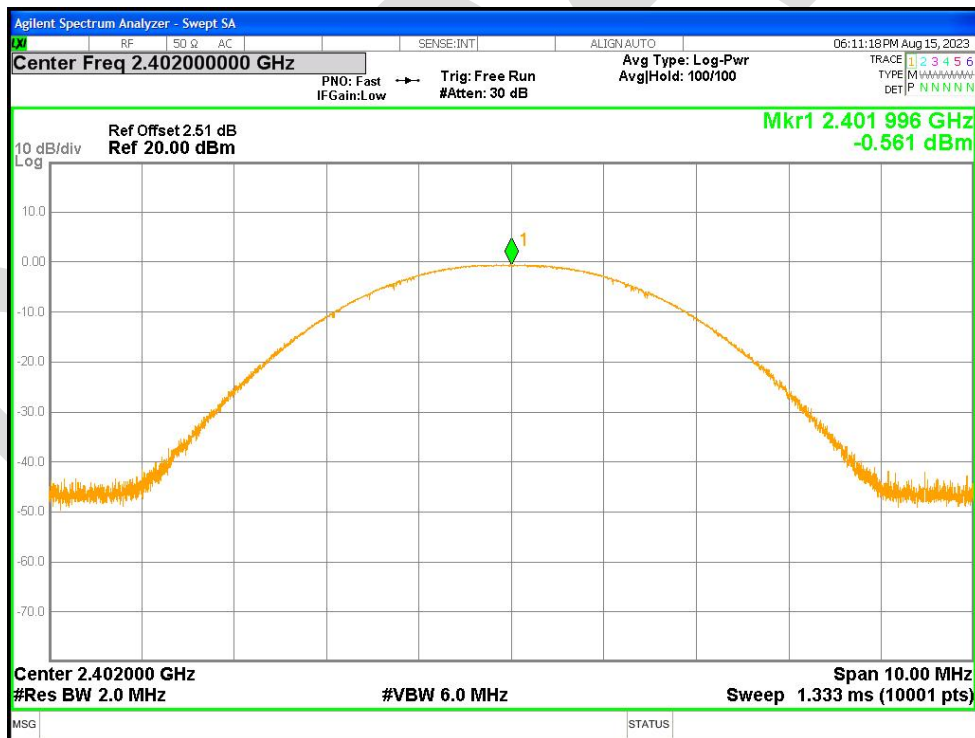

Power NVNT 3-DH1 2441MHz Ant1

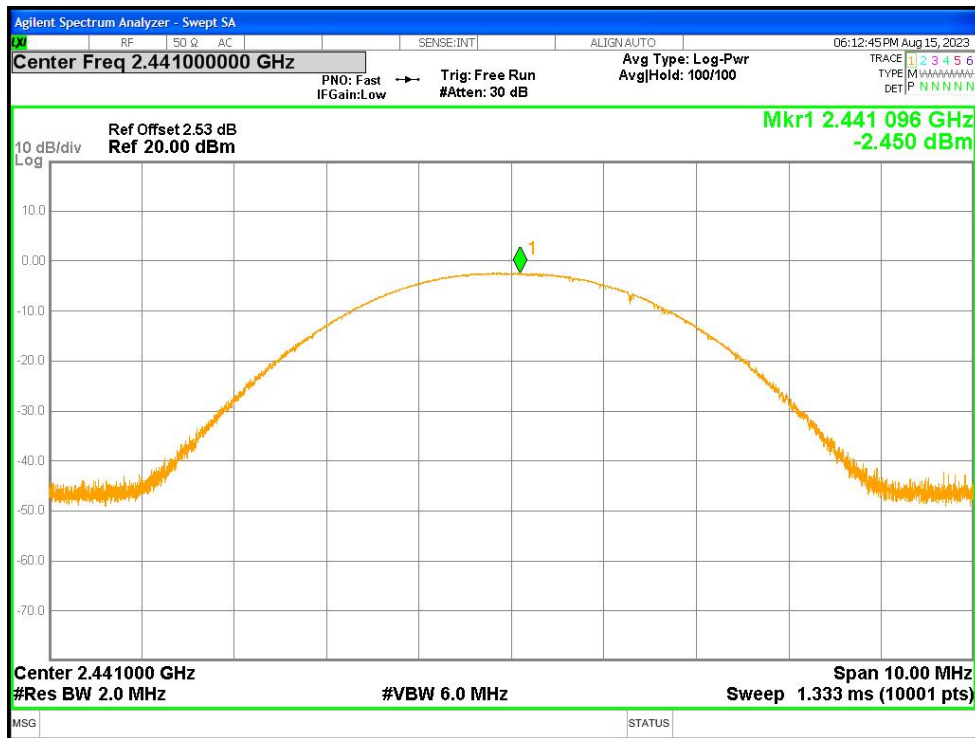

Power NVNT 3-DH1 2480MHz Ant1

