

Thank you for choosing a Transmitter Solutions product .  
Please read this manual carefully before using the product.  
Made in Italy. Copyright © 2006 by Transmitter Solutions

## CONTENTS

### 1 - TRANSMITTER OVERVIEW

- 1A - General information
- 1B - Technical specifications
- 1C - Main components

### 2 - NUMBERING

### 3 - PROGRAMMING

### 4 - OPERATION

### 5 - BATTERY ACCESS

### 6 - TROUBLESHOOTING

#### 1A - General information

The Transmitter Solutions - Monarch 318LIPW1K transmitter is a key chain style mini transmitter operating at 318 MHz. It has been designed for use with programmable telephone entry, security, and access control systems operating with a 318 MHz frequency receiver. The code sent by the transmitter includes a 16 bit security code which allows up to 65,536 code combinations and 4 bits of facility code which allows up to 16 facility codes .

The Transmitter Solutions - 318R receiver which operates with this transmitter has a Wiegand 26 bit output and can operate any type of access control system equipped with the same protocol. The CR 2016 lithium batteries of the transmitter have a shelf life of about 6 months. The product fully complies with Part 15 of FCC Regulations and the European Directives 99/5/CE, 89/336/CEE, 73/23/CEE.

#### 1B - Technical specifications

|                            |                                 |
|----------------------------|---------------------------------|
| Operating frequency        | 318 MHz                         |
| Number of keys:            | 1                               |
| Battery :                  | 2 x 3V lithium batteries CR2016 |
| Battery life:              | 18 ÷ 24 months                  |
| Number combinations :      | 65,536                          |
| Protocol :                 | Linear compatible               |
| Different Facilities codes | 16                              |
| Operating temperature:     | -20°F ÷ +131°F (-20°C ÷ +55°C)  |
| Overall dimensions:        | 2.4"x1.4"x0.51" (61x36x13 mm)   |
| Weight:                    | 0.49 oz. (14 gr.)               |

#### 1C - Main components

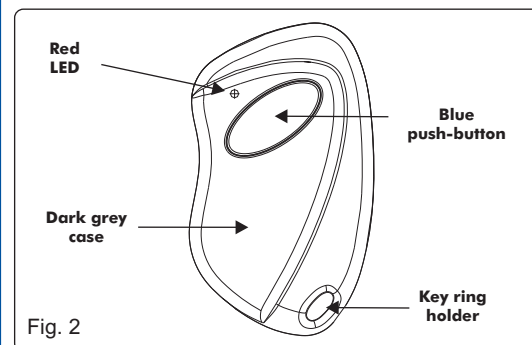


Fig. 2

## 2 - NUMBERING

Each transmitter is manufactured and sold with a different factory-set serial number.

## 3 - PROGRAMMING

The transmitter must be programmed into your system memory. Your own installer or reseller will provide you the necessary instructions for your system.


## 4 - OPERATION

A - Firmly depress the button until the small red LED illuminates.  
B - After the LED has illuminated, release the button.  
If the device you are attempting to activate does not respond, repeat steps A and B or consult section 6 ( Troubleshooting ) of this manual.

## 5 - BATTERY ACCESS

To access the battery open the case with a screwdriver acting on the slot between the cover and the bottom and remove the bottom, as shown in fig. 3a and 3b. Slide out the old batteries and replace them with the new ones [CR2016] respecting the polarity, with the positive (+) side upward.  
*NOTE: Please dispose of the batteries properly according to local laws and regulations.*

*Test proper battery installation by verifying that the red LED illuminates when the button is pushed.*

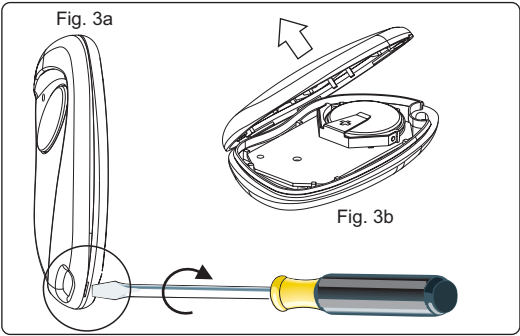

## 6 - TROUBLESHOOTING

| PROBLEM                                                                                    | SOLUTION                                                       |
|--------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| The system does not receiver the transmitter signal.<br>The transmitter LED will not light | Replace the transmitter batteries                              |
| The system does not receiver the transmitter signal.<br>The transmitter LED is ON          | Check to verify the transmitter is programmed into your system |
| The operating range is reduced                                                             | Replace the transmitter batteries                              |

### Transmitter Solutions - Type : 318LIPW1K

#### FCC ID : SU7318LIPW1K

This device complies with Part. 15 of the FCC Rules

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept interference received, including interference that may cause undesired operation.

### Notice

Any changes or modification to Transmitter Solutions equipment not expressly approved by Transmitter Solutions could void the manufacturer's warranty.


### WARRANTY

The warranty period of Transmitter Solutions 318 transmitters is 24 months, beginning from the manufacturing date of the transmitter. During this period, if the product does operate correctly, due to a defective component, the product will be repaired or replaced at the sole discretion of Transmitter Solutions.

The warranty does not extend to the transmitter case which can be damaged by conditions outside the control of Transmitter Solutions or to battery life.

TRANSMITTER SOLUTIONS  
2505 Chandler Avenue, Suite, 1  
Las Vegas, NV 89120 -  
(866)975-0101 - (866) 975-0404 Fax  
sales@transmittersolutions.com

IS-TM13LCCUK Rev. 1 del 22.03.2006

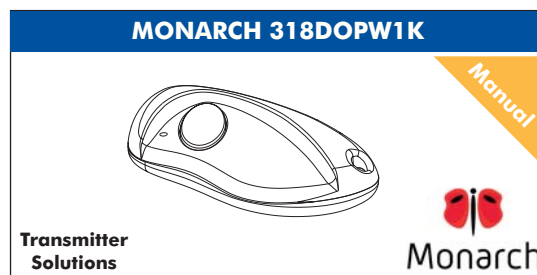

Thank you for choosing a Transmitter Solutions product .  
Please read this manual carefully before using the product.

Made in Italy. Copyright © 2006 by Transmitter Solutions

## CONTENTS

### 1 - TRANSMITTER OVERVIEW

- 1A - General information
- 1B - Technical specifications
- 1C - Main components

### 2 - NUMBERING

### 3 - PROGRAMMING

### 4 - OPERATION

### 5 - BATTERY ACCESS

### 6 - TROUBLESHOOTING

#### 1A - General information


The Transmitter Solutions - Monarch 318DOPW1K transmitter is a key chain style mini transmitter operating at 318 MHz. It has been designed for use with programmable telephone entry, security, and access control systems operating with a 318 MHz frequency receiver. The protocol is MicroCLIK® compatible and the code sent by the transmitter includes a 14 bit security code which allows up to 16384 code combinations and 6 bits of facility code, which allows up to 64 facility codes .

The Transmitter Solutions - 318R receiver which operates with this transmitter has a Wiegand 26 bit output and can operate any type of access control system equipped with the same protocol. The CR 2016 lithium batteries of the transmitter have a shelf life of about 6 months. The product fully complies with Part 15 of FCC Regulations and the European Directives 99/5/CE, 89/336/CEE, 73/23/CEE.

#### 1B - Technical specifications

|                            |                                 |
|----------------------------|---------------------------------|
| Operating frequency        | 318 MHz                         |
| Number of keys:            | 1                               |
| Battery :                  | 2 x 3V lithium batteries CR2016 |
| Battery life:              | 18 ÷ 24 months                  |
| Number combinations :      | 16,384                          |
| Protocol :                 | MicroCLIK® compatible           |
| Different Facilities codes | 64                              |
| Operating temperature:     | -20°F ÷ +131°F (-20°C ÷ +55°C)  |
| Overall dimensions:        | 2.4"x1.4"x0.51" (61x36x13 mm)   |
| Weight:                    | 0.49 oz. (14 gr.)               |

#### 1C - Main components

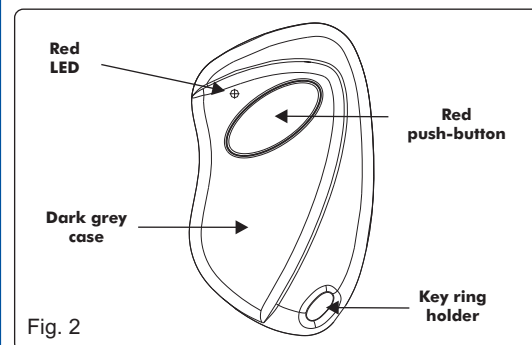

## 2 - NUMBERING

Each transmitter is manufactured and sold with a different factory-set serial number.

## 3 - PROGRAMMING

The transmitter must be programmed into your system memory. Your own installer or reseller will provide you the necessary instructions for your system.

## 4 - OPERATION


A - Firmly depress the button until the small red LED illuminates.  
B - After the LED has illuminated, release the button.  
If the device you are attempting to activate does not respond, repeat steps A and B or consult section 6 ( Troubleshooting ) of this manual.

## 5 - BATTERY ACCESS

To access the battery open the case with a screwdriver acting on the slot between the cover and the bottom and remove the bottom, as shown in fig. 3a and 3b. Slide out the old batteries and replace them with the new ones [CR2016] respecting the polarity, with the positive (+) side upward.

*NOTE: Please dispose of the batteries properly according to local laws and regulations.*

*Test proper battery installation by verifying that the red LED illuminates when the button is pushed.*

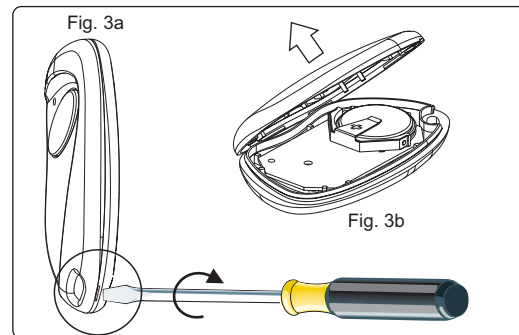

## 6 - TROUBLESHOOTING

| PROBLEM                                                                                    | SOLUTION                                                       |
|--------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| The system does not receiver the transmitter signal.<br>The transmitter LED will not light | Replace the transmitter batteries                              |
| The system does not receiver the transmitter signal.<br>The transmitter LED is ON          | Check to verify the transmitter is programmed into your system |
| The operating range is reduced                                                             | Replace the transmitter batteries                              |

### Transmitter Solutions - Type : 318DOPW1K

#### FCC ID : SU7318LIPW1K

This device complies with Part. 15 of the FCC Rules

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept interference received, including interference that may cause undesired operation.

#### Notice

Any changes or modification to Transmitter Solutions equipment not expressly approved by Transmitter Solutions could void the manufacturer's warranty.

® : "Doorking" and "MicroCLIK" are registered trademarks of Doorking, Inc."

#### WARRANTY

The warranty period of Transmitter Solutions 318 transmitters is 24 months, beginning from the manufacturing date of the transmitter. During this period, if the product does operate correctly, due to a defective component, the product will be repaired or replaced at the sole discretion of Transmitter Solutions.

The warranty does not extend to the transmitter case which can be damaged by conditions outside the control of Transmitter Solutions or to battery life.



TRANSMITTER SOLUTIONS  
2505 Chandler Avenue, Suite, 1  
Las Vegas, NV 89120 -  
(866) 975-0101 - (866) 975-0404 Fax  
sales@transmittersolutions.com  
IS-TM13DCCUK Rev. 4 del 06.06.2006