

APPLICATION FOR CERTIFICATION

On Behalf of  
Zhuhai Roule Electric Co., Ltd.

Monitor

Model Number: RL-01CRT

Prepared for : Zhuhai Roule Electric Co., Ltd.  
No.12, Pingdong RD.3 Nanping Industry Community,  
Zhuhai, China.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F04372  
Date of Test : Nov.28~30, 2004  
Date of Report : Dec.28, 2004

## TABLE OF CONTENTS

| Description                                                      | Page       |
|------------------------------------------------------------------|------------|
| Test Report Declaration                                          |            |
| <b>1. GENERAL INFORMATION .....</b>                              | <b>1-1</b> |
| 1.1. Description of Device (EUT) .....                           | 1-1        |
| 1.2. Tested Supporting System Details .....                      | 1-1        |
| 1.3. Test Facility .....                                         | 1-2        |
| 1.4. Measurement Uncertainty .....                               | 1-2        |
| <b>2. POWER LINE CONDUCTED EMISSION TEST .....</b>               | <b>2-1</b> |
| 2.1. Test Equipment.....                                         | 2-1        |
| 2.2. Block Diagram of Test Setup .....                           | 2-1        |
| 2.3. Power Line Conducted Emission Limit .....                   | 2-1        |
| 2.4. EUT Configuration on Test.....                              | 2-2        |
| 2.5. Operating Condition of EUT .....                            | 2-2        |
| 2.6. Test Procedure .....                                        | 2-2        |
| 2.7. Power Line Conducted Emission Test Results .....            | 2-3        |
| <b>3. RADIATED EMISSION TEST.....</b>                            | <b>3-1</b> |
| 3.1. Test Equipment.....                                         | 3-1        |
| 3.2. Block Diagram of Test Setup .....                           | 3-1        |
| 3.3. Radiated Emission Limit .....                               | 3-2        |
| 3.4. EUT Configuration on Test.....                              | 3-3        |
| 3.5. Operating Condition of EUT .....                            | 3-3        |
| 3.6. Test Procedure .....                                        | 3-3        |
| 3.7. Radiated Emission Test Results .....                        | 3-4        |
| <b>4. BANDWIDTH TEST.....</b>                                    | <b>4-1</b> |
| 4.1. Test Equipment.....                                         | 4-1        |
| 4.2. Test Standard.....                                          | 4-1        |
| 4.3. Bandwidth Limit.....                                        | 4-1        |
| 4.4. Test Procedure .....                                        | 4-1        |
| <b>5. PHOTOGRAPH.....</b>                                        | <b>5-1</b> |
| 5.1. Photos of Power Line Conducted Emission Test .....          | 5-1        |
| 5.2. Photos of Radiated Emission Test (In Anechoic Chamber)..... | 5-2        |

APPENDIX I  
APPENDIX II

(9 pages)  
(25 pages)

## TEST REPORT DECLARATION

Applicant : Zhuhai Roule Electric Co., Ltd.  
 Manufacturer : Zhuhai Roule Electric Co., Ltd.  
 EUT Description : Monitor  
 (A) MODEL NO. : RL-01CRT  
 (B) SERIAL NO. : F2004122801  
 (C) POWER SUPPLY : DC 9V Adaptor AC Input 120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart B Apr. 2004.

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.  
 This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Nov.28~30, 2004

Prepared by : Elsa Wu  
 Elsa Wu / Assistant  
Lake Wang  
 Lake Wang / Supervisor

Reviewer :



Approved & Authorized Signer :

Name of the Representative of the Responsible Party : \_\_\_\_\_

Signature : \_\_\_\_\_

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

|              |   |                                                                                                                            |
|--------------|---|----------------------------------------------------------------------------------------------------------------------------|
| Description  | : | Monitor<br>This report is about transmitter FCC ID and the Receiver FCC DOC report please refer to AUDIX Number ACS-F04374 |
| Model Number | : | RL-01CRT                                                                                                                   |
| Applicant    | : | Zhuhai Roule Electric Co., Ltd.<br>No.12, Pingdong RD.3 Nanping Industry Community, Zhuhai, China..                        |
| Manufacturer | : | Zhuhai Roule Electric Co., Ltd.<br>No.12, Pingdong RD.3 Nanping Industry Community, Zhuhai, China.                         |
| Date of Test | : | Nov.28~30, 2004                                                                                                            |

### 1.2. Tested Supporting System Details

#### 1.2.1. Power Adaptor

|              |   |                                |
|--------------|---|--------------------------------|
| Model Number | : | B152DM090030                   |
| Cable        | : | Unshielded, Undetachable, 1.8m |

### 1.3. Test Facility

#### Site Description

- 3m Anechoic Chamber : Certificated by FCC, USA  
Registration Number: 90454  
Aug. 15, 2003
- 3m & 10m Anechoic Chamber : Certificated by FCC, USA  
Registration Number: 794232  
Mar. 15, 2004
- EMC Lab. : Certificated by DATech, German  
Registration Number: DAT-P-091/99-01  
Feb. 02, 2004
- Certificated by NVLAP, USA  
NVLAP Code: 200372-0  
Mar. 31, 2004
- Certificated by Nemko, Norway  
Aut. No.: ELA135  
April. 22, 2004
- Certificated by Industry Canada  
Registration Number: IC 5183  
Jul. 28, 2004
- Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
- Site Location : No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

### 1.4. Measurement Uncertainty

| No. | Item                                    | Uncertainty | Remark      |
|-----|-----------------------------------------|-------------|-------------|
| 1.  | Uncertainty for Conducted Emission Test | 1.22dB      |             |
| 2.  | Uncertainty for Radiated Emission Test  | 3.14dB      | 3m Chamber  |
| 3.  | Uncertainty for Radiated Emission Test  | 3.18dB      | 10m Chamber |
| 4.  | Uncertainty for Power Clamp Test        | 1.38dB      |             |


## 2. POWER LINE CONDUCTED EMISSION TEST

### 2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

| Item | Equipment      | Manufacturer    | Model No.    | Serial No.    | Last Cal.   | Cal. Interval |
|------|----------------|-----------------|--------------|---------------|-------------|---------------|
| 1.   | Test Receiver  | Rohde & Schwarz | ESHS10       | 838693/001    | May 24, 04  | 1 Year        |
| 2.   | L.I.S.N.#1     | Rohde & Schwarz | ESH2-Z5      | 834066/011    | May 24, 04  | 1 Year        |
| 3.   | L.I.S.N.#2     | Kyoritsu        | KNW-407      | 8-541-4       | May 24, 04  | 1 Year        |
| 4.   | L.I.S.N.#3     | EMCO            | 3825/2       | 9006-1660     | May 24, 04  | 1 Year        |
| 5.   | Terminator     | Hubersuhner     | 50Ω          | No. 1         | May 24, 04  | 1 Year        |
| 6.   | Terminator     | Hubersuhner     | 50Ω          | No. 2         | May 24, 04  | 1 Year        |
| 7.   | RF Cable       | MIYAZAKI        | 5D-2W        | LISN Cable 1# | Aug. 19, 04 | 1/2 Year      |
| 8.   | Passive Probe  | Rohde & Schwarz | ESH2-Z3      | 299.7810.52   | May 24, 04  | 1 Year        |
| 9.   | Coaxial Switch | Anritsu         | MP59B        | M55367        | Nov. 28, 04 | 1/2 Year      |
| 10.  | Pulse Limiter  | Rohde & Schwarz | ESH3-Z2      | 100340        | Aug. 19, 04 | 1/2 Year      |
| 11.  | PC             | N/A             | 586ATXS      | N/A           | N/A         | N/A           |
| 12.  | Printer        | HP              | Laserjet2100 | SGGJ092351    | N/A         | N/A           |

### 2.2. Block Diagram of Test Setup

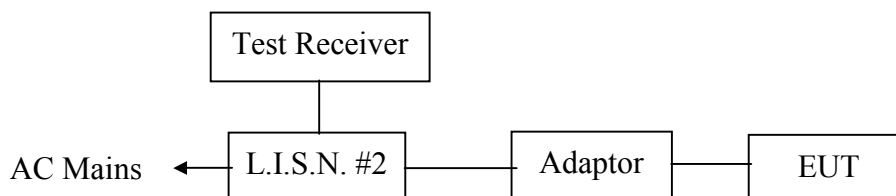

(EUT: Monitor)

### 2.3. Power Line Conducted Emission Limit

| Frequency       | Maximum RF Line Voltage    |                         |
|-----------------|----------------------------|-------------------------|
|                 | Quasi-Peak Level<br>dB(μV) | Average Level<br>dB(μV) |
| 150KHz ~ 500KHz | 66 ~ 56*                   | 56 ~ 46*                |
| 500KHz ~ 5MHz   | 56                         | 46                      |
| 5MHz ~ 30MHz    | 60                         | 50                      |

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

## 2.4. EUT Configuration on Test

The following equipments are installed on RF LINE VOLTAGE Test to meet the Commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

### 2.4.1. Monitor (EUT)

|               |   |                                 |
|---------------|---|---------------------------------|
| Model Number  | : | RL-01CRT                        |
| Serial Number | : | F2004122801                     |
| Manufacturer  | : | Zhuhai Roule Electric Co., Ltd. |

## 2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown on Section 2.2.

2.5.2. Turn on the power of all equipment.

2.5.3. Let the EUT work in test mode (TX Channel 1/TX Channel 2/TX Channel 3/TX Channel 4) and measure it.

## 2.6. Test Procedure

The EUT is put on the table which is 0.8m above the ground and away from other metallic surface at least 0.4m. The EUT is connected to the AC/DC Adapter. The AC/DC Adapter power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the testing equipment; and the peripheral equipment powers form other L.I.S.N.. Please refer to the block diagram of the test setup and photographs. Both sides of AC line(Line & Neutral) are checked for maximum conducted interference. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables must be changed according to ANSI / IEEE Standard 213-2001 on Conducted Emission Test.

The bandwidth of the field strength meter (R & S Test Receiver ESHS20) is set at 10KHz.

The frequency range from 150KHz to 30MHz is checked.

The details of test modes are as the followings, and the test data please see APPENDIX I.

## 2.7. Power Line Conducted Emission Test Results

**PASS.**

The frequency range from 150KHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.

|               |                |             |                |
|---------------|----------------|-------------|----------------|
| Date of Test  | : Nov.30, 2004 | Temperature | : 23°C         |
| EUT           | : Monitor      | Humidity    | : 54%          |
| Model No.     | : RL-01CRT     | Test Mode   | : TX Channel 4 |
| Test Engineer | : Seco         |             |                |

| Frequency<br>(MHz) | Reading (dBμV) |         |            |         | Limit<br>(dBμV) |         |
|--------------------|----------------|---------|------------|---------|-----------------|---------|
|                    | VA             |         | VB         |         | Quasi-Peak      | Average |
|                    | Quasi-Peak     | Average | Quasi-Peak | Average |                 |         |
| 0.167              | 40.10          | 37.10   | 38.92      | 34.92   | 65.11           | 55.11   |
| 0.206              | 39.93          | 36.93   | 39.35      | 35.35   | 63.37           | 53.37   |
| 0.255              | 37.83          | 34.83   | N/A        | N/A     | 61.59           | 51.59   |
| 0.283              | N/A            | N/A     | 37.27      | 34.27   | 60.73           | 50.73   |
| 0.350              | 39.21          | 36.21   | 36.95      | 32.95   | 58.96           | 48.96   |
| 0.433              | 32.27          | 29.27   | 28.62      | 25.62   | 57.19           | 47.19   |
| 0.535              | N/A            | N/A     | 18.04      | 16.04   | 56.00           | 46.00   |
| 0.595              | 29.01          | 27.01   | N/A        | N/A     | 56.00           | 46.00   |

Remark: 1) If the data table appeared symbol of “N/A” means the value was too low to be measured.

2) If the data table appeared symbol of “\*” means the Q.P. value is under the limit for average, so, the average value had been omitted.

Reviewer: Cake Wang

### 3. RADIATED EMISSION TEST

#### 3.1. Test Equipment


The following test equipments are used during the radiated emission Test :

##### 3.1.1. For Anechoic Chamber

| Item | Equipment      | Manufacturer    | Model No.  | Serial No.      | Last Cal.   | Cal. Interval |
|------|----------------|-----------------|------------|-----------------|-------------|---------------|
| 1.   | EMI Spectrum   | HP              | 85422E     | 3625A00181      | May 24, 04  | 1 Year        |
| 2.   | Test Receiver  | Rohde & Schwarz | ESVS10     | 834468/011      | May 24, 04  | 1 Year        |
| 3.   | Amplifier      | HP              | 8447D      | 2944A07794      | Sep.16, 04  | 1/2 Year      |
| 4.   | Bilog Antenna  | Schaffner       | CBL6111C   | 2598            | Jan. 13, 04 | 1 Year        |
| 5.   | PC             | N/A             | 586ATX3    | N/A             | N/A         | N/A           |
| 6.   | Printer        | HP              | Laserjet6P | SGCF019673      | N/A         | N/A           |
| 7.   | RF Cable       | MIYAZAKI        | 5D-2W      | 3# Chamber No.1 | July 31, 04 | 1/2 Year      |
| 8.   | RF Cable       | MIYAZAKI        | 5D-2W      | 3# Chamber No.2 | July 31, 04 | 1/2 Year      |
| 9.   | RF Cable       | FUJIKURA        | RG-55/U    | 3# Chamber No.3 | July 31, 04 | 1/2 Year      |
| 10.  | RF Cable       | FUJIKURA        | RG-55/U    | 3# Chamber No.4 | July 31, 04 | 1/2 Year      |
| 11.  | Coaxial Switch | Anritsu         | MP59B      | M73989          | Nov.26, 04  | 1/2 Year      |
| 12.  | Spectrum       | Agilent         | E4407B     | MY41440292      | May 24, 04  | 1 Year        |
| 13.  | Amp            | HP              | 8449B      | 3008A00863      | May 24, 04  | 1 Year        |
| 14.  | Antenna        | EMCO            | 3115       | 9607-4877       | Jun. 15, 04 | 1.5 Year      |

#### 3.2. Block Diagram of Test Setup


##### 3.2.1. Block Diagram of connection between EUT and simulators



*(EUT: Monitor)*

### 3.2.2. Anechoic Chamber Setup Diagram

#### ANTENNA TOWER

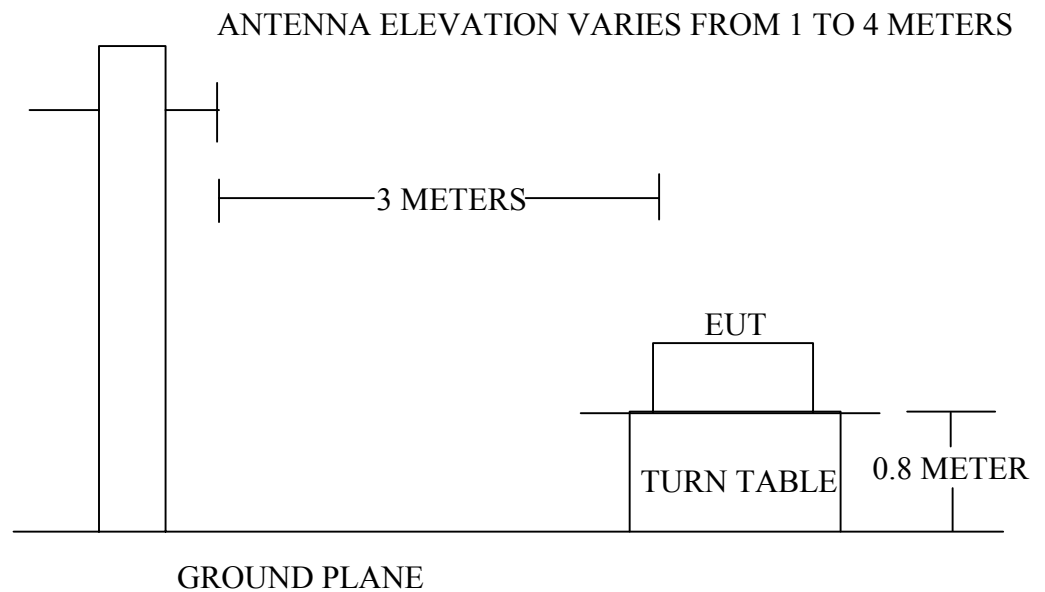

### 3.3. Radiated Emission Limit

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                                                                                                                                                                                                                  |                                   |
|------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
|                  |                    | $\mu\text{V/m}$                                                                                                                                                                                                                        | $\text{dB}(\mu\text{V})/\text{m}$ |
| 30 ~ 88          | 3                  | 100                                                                                                                                                                                                                                    | 40.0                              |
| 88 ~ 216         | 3                  | 150                                                                                                                                                                                                                                    | 43.5                              |
| 216 ~ 960        | 3                  | 200                                                                                                                                                                                                                                    | 46.0                              |
| 960 ~ 1000       | 3                  | 500                                                                                                                                                                                                                                    | 54.0                              |
| Above 1000       | 3                  | Local Oscillator:<br>114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)<br>94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)<br>Other:<br>74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)<br>54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) |                                   |

- Remark :
- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log$  Emission level  $\mu\text{V/m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 3.4.1. Monitor (EUT)

|               |   |                                 |
|---------------|---|---------------------------------|
| Model Number  | : | RL-01CRT                        |
| Serial Number | : | F2004122801                     |
| Manufacturer  | : | Zhuhai Roule Electric Co., Ltd. |

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (TX Channel 1/TX Channel 2/TX Channel 3/TX Channel 4) and test it.

### 3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2001 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz.

The frequency range from 30MHz to 24.44GHz are checked.

The test modes (TX Channel 1/TX Channel 2/TX Channel 3/TX Channel 4) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

### 3.7. Radiated Emission Test Results

**PASS.**

The frequency range from 30MHz to 1000MHz is investigated.  
Please see the following pages.

|                |              |               |              |
|----------------|--------------|---------------|--------------|
| Date of Test : | Nov.28, 2004 | Temperature : | 24°C         |
| EUT :          | Monitor      | Humidity :    | 54%          |
| Model No. :    | RL-01CRT     | Test Mode :   | TX Channel 4 |
| Test Engineer: | Seco         |               |              |

| Frequency<br>MHz | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Horizontal<br>dBμV | Emission Level<br>Horizontal<br>dBμV/m | Over<br>Limits<br>dB | Limits<br>dBμV/m |
|------------------|---------------------------|---------------------|-------------------------------------|----------------------------------------|----------------------|------------------|
| <b>33.880</b>    | <b>19.18</b>              | <b>1.14</b>         | <b>6.20</b>                         | <b>26.52</b>                           | <b>-13.48</b>        | <b>40.00</b>     |
| 41.640           | 15.05                     | 1.21                | 9.92                                | 26.19                                  | -13.81               | 40.00            |
| 58.130           | 5.44                      | 1.48                | 11.45                               | 18.37                                  | -21.63               | 40.00            |
| 135.730          | 12.21                     | 2.35                | 4.57                                | 19.13                                  | -24.37               | 43.50            |
| 262.800          | 13.51                     | 3.52                | 5.65                                | 22.68                                  | -23.32               | 46.00            |
| 368.530          | 15.56                     | 4.36                | 4.79                                | 24.71                                  | -21.29               | 46.00            |

- Remark: 1. All readings are Quasi-Peak values.  
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading  
 3. The worst emission was detected at 33.880MHz with corrected signal level of 26.52dBμV/m (Limit is 40.00dBμV/m) when the antenna was at horizontal polarization and at 1.1m high and the turn table was at 360 ° .  
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:


Cahe Wang

|                |              |               |              |
|----------------|--------------|---------------|--------------|
| Date of Test : | Nov.28, 2004 | Temperature : | 24°C         |
| EUT :          | Monitor      | Humidity :    | 54%          |
| Model No. :    | RL-01CRT     | Test Mode :   | TX Channel 4 |
| Test Engineer: | Seco         |               |              |

| Frequency<br>MHz | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Vertical<br>dBμV | Emission Level<br>Vertical<br>dBμV/m | Over<br>Limits<br>dB | Limits<br>dBμV/m |
|------------------|---------------------------|---------------------|-----------------------------------|--------------------------------------|----------------------|------------------|
| 33.880           | 12.90                     | 1.14                | 7.18                              | 21.22                                | -18.78               | 40.00            |
| <b>42.610</b>    | <b>9.37</b>               | <b>1.23</b>         | <b>11.61</b>                      | <b>22.21</b>                         | <b>-17.79</b>        | <b>40.00</b>     |
| 59.100           | 6.93                      | 1.49                | 10.55                             | 18.97                                | -21.03               | 40.00            |
| 136.700          | 11.30                     | 2.37                | 3.51                              | 17.18                                | -26.32               | 43.50            |
| 272.500          | 12.47                     | 3.57                | 4.34                              | 20.37                                | -25.63               | 46.00            |
| 408.300          | 15.94                     | 4.67                | 4.01                              | 24.62                                | -21.38               | 46.00            |

- Remark: 1. All readings are Quasi-Peak values.  
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading  
 3. The worst emission was detected at 42.610MHz with corrected signal level of 22.21dBμV/m (Limit is 40.00dBμV/m) when the antenna was at vertical polarization and at 1.1m high and the turn table was at 312 ° .  
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:



|                |              |               |              |
|----------------|--------------|---------------|--------------|
| Date of Test : | Nov.29, 2004 | Temperature : | 24°C         |
| EUT :          | Monitor      | Humidity :    | 54%          |
| Model No. :    | RL-01CRT     | Test Mode :   | TX Channel 1 |
| Test Engineer: | Seco         |               |              |


| Frequency | Antenna | Cable | Meter Reading | Emission Level | Over   | Limits |         |
|-----------|---------|-------|---------------|----------------|--------|--------|---------|
| MHz       | Factor  | Loss  | Horizontal    | Horizontal     | Limits |        | Remark  |
|           | dB/m    | dB    | dBμV          | dBμV/m         | dBμV/m | dBμV/m |         |
| 2414.000  | 29.03   | 3.45  | 43.92         | 76.40          | -17.60 | 94.00  | Average |
| 2414.000  | 29.03   | 3.45  | 54.92         | 87.40          | -26.60 | 114.00 | Peak    |

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss  
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

| Frequency | Antenna | Cable | Meter Reading | Emission Level | Over   | Limits |         |
|-----------|---------|-------|---------------|----------------|--------|--------|---------|
| MHz       | Factor  | Loss  | Vertical      | Vertical       | Limits |        | Remark  |
|           | dB/m    | dB    | dBμV          | dBμV/m         | dBμV/m | dBμV/m |         |
| 2414.000  | 29.03   | 3.45  | 47.85         | 80.33          | -13.67 | 94.00  | Average |
| 7242.000  | 37.39   | 7.14  | 2.21          | 46.74          | -7.26  | 54.00  | Average |
| 2414.000  | 29.03   | 3.45  | 67.45         | 99.93          | -14.07 | 114.00 | Peak    |
| 7242.000  | 37.39   | 7.14  | 10.21         | 54.74          | -19.26 | 74.00  | Peak    |

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss  
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Reviewer:



|                |              |               |              |
|----------------|--------------|---------------|--------------|
| Date of Test : | Nov.29, 2004 | Temperature : | 24°C         |
| EUT :          | Monitor      | Humidity :    | 54%          |
| Model No. :    | RL-01CRT     | Test Mode :   | TX Channel 2 |
| Test Engineer: | Seco         |               |              |

| Frequency | Antenna | Cable | Meter Reading | Emission Level | Over   | Limits | Remark  |
|-----------|---------|-------|---------------|----------------|--------|--------|---------|
| MHz       | Factor  | Loss  | Horizontal    | Horizontal     | Limits |        |         |
|           | dB/m    | dB    | dBμV          | dBμV/m         | dBμV/m | dBμV/m |         |
| 2432.000  | 29.07   | 3.57  | 44.57         | 77.21          | -16.79 | 94.00  | Average |
| 2432.000  | 29.07   | 3.57  | 55.57         | 88.21          | -25.79 | 114.00 | Peak    |

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss  
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

| Frequency | Antenna | Cable | Meter Reading | Emission Level | Over   | Limits | Remark  |
|-----------|---------|-------|---------------|----------------|--------|--------|---------|
| MHz       | Factor  | Loss  | Vertical      | Vertical       | Limits |        |         |
|           | dB/m    | dB    | dBμV          | dBμV/m         | dBμV/m | dBμV/m |         |
| 2432.000  | 29.07   | 3.57  | 47.25         | 79.89          | -14.11 | 94.00  | Average |
| 2432.000  | 29.07   | 3.57  | 60.25         | 92.89          | -21.11 | 114.00 | Peak    |

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss  
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Reviewer: Cake Wang

|                |              |               |              |
|----------------|--------------|---------------|--------------|
| Date of Test : | Nov.29, 2004 | Temperature : | 24°C         |
| EUT :          | Monitor      | Humidity :    | 54%          |
| Model No. :    | RL-01CRT     | Test Mode :   | TX Channel 3 |
| Test Engineer: | Seco         |               |              |

| Frequency | Antenna | Cable | Meter Reading | Emission Level | Over   | Limits |         |
|-----------|---------|-------|---------------|----------------|--------|--------|---------|
| MHz       | Factor  | Loss  | Horizontal    | Horizontal     | Limits |        | Remark  |
|           | dB/m    | dB    | dBμV          | dBμV/m         | dBμV/m | dBμV/m |         |
| 2450.000  | 29.11   | 3.68  | 44.99         | 77.78          | -16.22 | 94.00  | Average |
| 2450.000  | 29.11   | 3.68  | 52.99         | 85.78          | -28.22 | 114.00 | Peak    |

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss  
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

| Frequency | Antenna | Cable | Meter Reading | Emission Level | Over   | Limits |         |
|-----------|---------|-------|---------------|----------------|--------|--------|---------|
| MHz       | Factor  | Loss  | Vertical      | Vertical       | Limits |        | Remark  |
|           | dB/m    | dB    | dBμV          | dBμV/m         | dBμV/m | dBμV/m |         |
| 2450.000  | 29.11   | 3.68  | 43.73         | 76.52          | -17.48 | 94.00  | Average |
| 2450.000  | 29.11   | 3.68  | 55.73         | 88.52          | -25.48 | 114.00 | Peak    |

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss  
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Reviewer: Cake Wang

|                |              |               |              |
|----------------|--------------|---------------|--------------|
| Date of Test : | Nov.29, 2004 | Temperature : | 24°C         |
| EUT :          | Monitor      | Humidity :    | 54%          |
| Model No. :    | RL-01CRT     | Test Mode :   | TX Channel 4 |
| Test Engineer: | Seco         |               |              |


| Frequency | Antenna | Cable | Meter Reading | Emission Level | Over   | Limits |         |
|-----------|---------|-------|---------------|----------------|--------|--------|---------|
| MHz       | Factor  | Loss  | Horizontal    | Horizontal     | Limits |        | Remark  |
|           | dB/m    | dB    | dBμV          | dBμV/m         | dBμV/m | dBμV/m |         |
| 2468.000  | 29.15   | 3.80  | 44.47         | 77.42          | -16.58 | 94.00  | Average |
| 2468.000  | 29.15   | 3.80  | 59.47         | 92.42          | -21.58 | 114.00 | Peak    |

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss  
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

| Frequency | Antenna | Cable | Meter Reading | Emission Level | Over   | Limits |         |
|-----------|---------|-------|---------------|----------------|--------|--------|---------|
| MHz       | Factor  | Loss  | Vertical      | Vertical       | Limits |        | Remark  |
|           | dB/m    | dB    | dBμV          | dBμV/m         | dBμV/m | dBμV/m |         |
| 2468.000  | 29.15   | 3.80  | 46.78         | 79.73          | -14.27 | 94.00  | Average |
| 2468.000  | 29.15   | 3.80  | 61.76         | 94.71          | -19.29 | 114.00 | Peak    |

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss  
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Reviewer:





AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 28 File#: Roule.EMI

Date: 2004-11-28 Time: 12:04:40

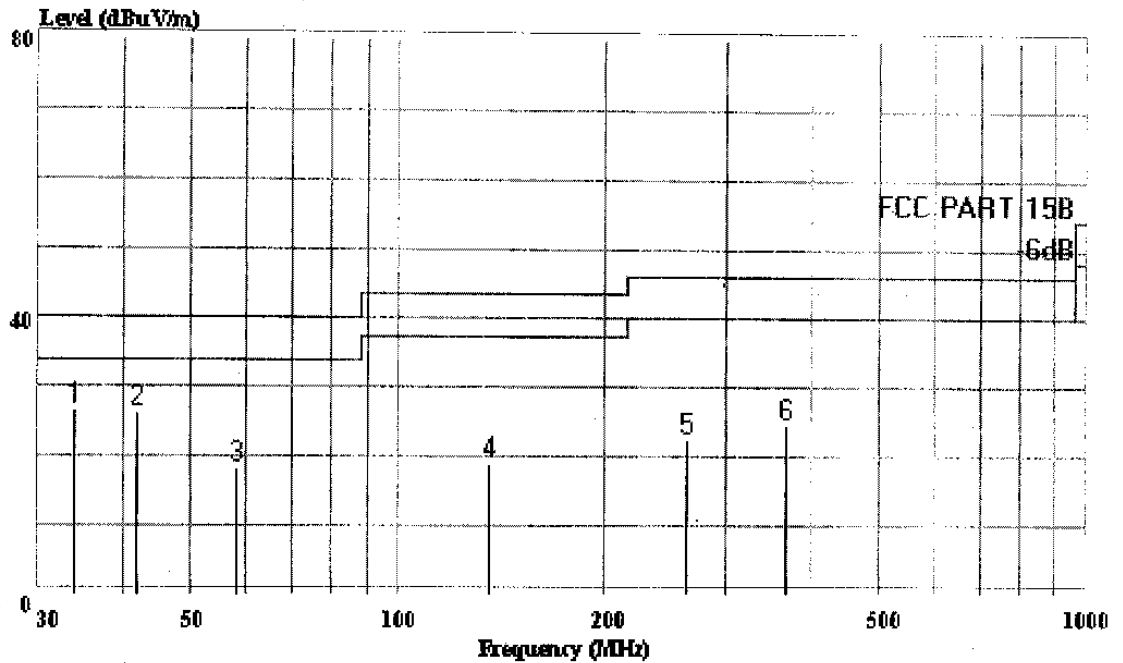

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 4

: Antpos:1.1m Tablepos:360'

Page: 1

|   |         |        | Over   | Limit  | Read  | Probe  | Cable |
|---|---------|--------|--------|--------|-------|--------|-------|
|   | Freq    | Level  | Limit  | Line   | Level | Factor | Loss  |
|   | MHz     | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |
| 1 | 33.880  | 26.52  | -13.48 | 40.00  | 6.20  | 19.18  | 1.14  |
| 2 | 41.640  | 26.19  | -13.81 | 40.00  | 9.92  | 15.05  | 1.21  |
| 3 | 58.130  | 18.37  | -21.63 | 40.00  | 11.45 | 5.44   | 1.48  |
| 4 | 135.730 | 19.13  | -24.37 | 43.50  | 4.57  | 12.21  | 2.35  |
| 5 | 262.800 | 22.68  | -23.32 | 46.00  | 5.65  | 13.51  | 3.52  |
| 6 | 368.530 | 24.71  | -21.29 | 46.00  | 4.79  | 15.56  | 4.36  |



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 30 File#: Roule.EMI

Date: 2004-11-28 Time: 12:06:46

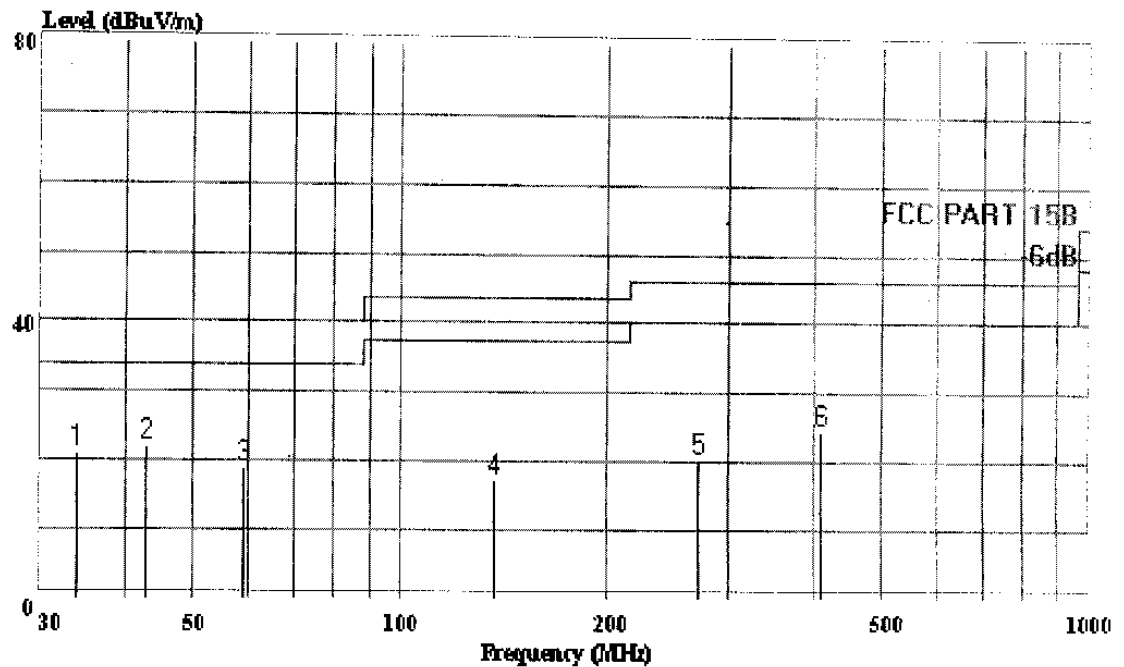

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 4

: Antpos:1.1m Tablepos:312'

Page: 1

|   | Freq    | Level  | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss |
|---|---------|--------|------------|------------|------------|--------------|------------|
|   | MHz     | dBuV/m | dB         | dBuV/m     | dBuV       | dB           | dB         |
| 1 | 33.880  | 21.22  | -18.78     | 40.00      | 7.18       | 12.90        | 1.14       |
| 2 | 42.610  | 22.21  | -17.79     | 40.00      | 11.61      | 9.37         | 1.23       |
| 3 | 59.100  | 18.97  | -21.03     | 40.00      | 10.55      | 6.93         | 1.49       |
| 4 | 136.700 | 17.18  | -26.32     | 43.50      | 3.51       | 11.30        | 2.37       |
| 5 | 272.500 | 20.37  | -25.63     | 46.00      | 4.34       | 12.47        | 3.57       |
| 6 | 408.300 | 24.62  | -21.38     | 46.00      | 4.01       | 15.94        | 4.67       |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 64 File#: C:\EMI TEST DATA\O\Boule.EMI

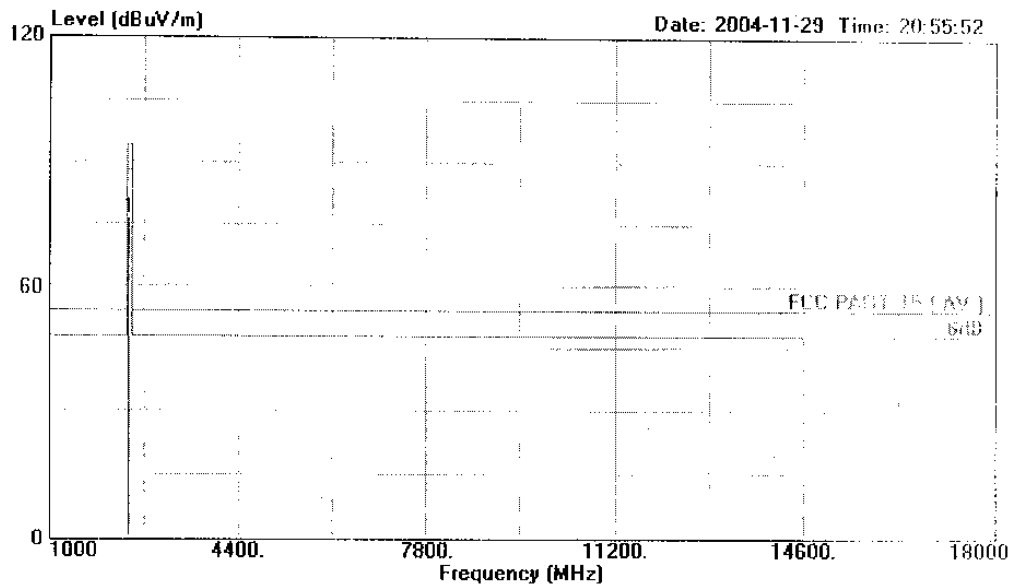

Site : 1# Chamber  
Condition : FCC PART 15 ( AV ) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 1

|      |          |       | Over   | Limit | Read   | Probe | Cable  |         |
|------|----------|-------|--------|-------|--------|-------|--------|---------|
| Freq | Level    | Limit | Line   | Level | Factor | Loss  | Remark |         |
| MHz  | dBuV/m   | dB    | dBuV/m | dBuV  | dB     | dB    |        |         |
| 1    | 2414.000 | 76.40 | -17.60 | 94.00 | 43.92  | 29.03 | 3.45   | Average |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 63 File#: C:\EMI-TEST DATA\O\Roule.EMI

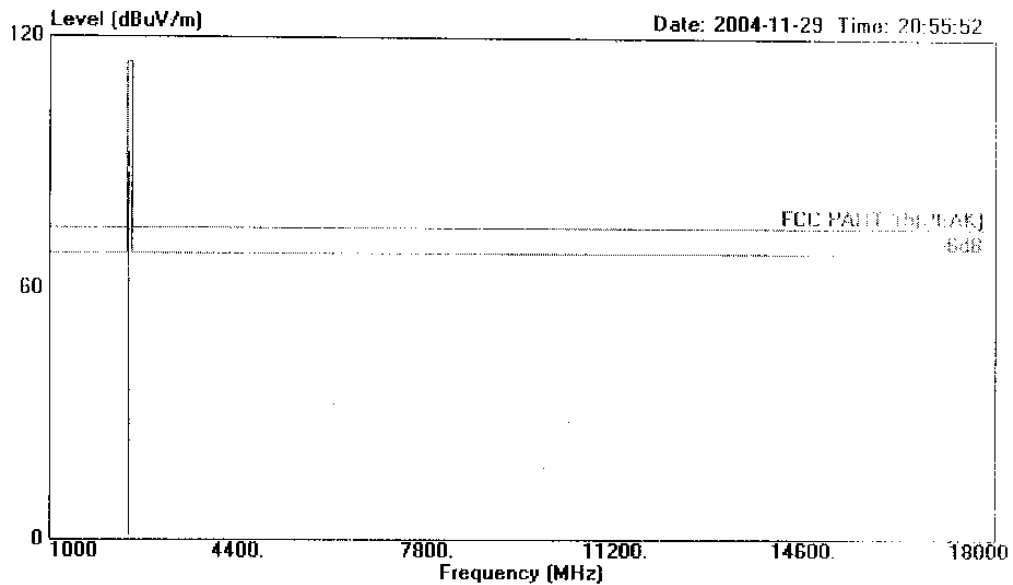

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 1

|            | Over   | Limit  | Read   | Probe | Cable  |           |
|------------|--------|--------|--------|-------|--------|-----------|
| Freq       | Level  | Limit  | Line   | Level | Factor | Loss      |
| MHz        | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB        |
| 1 2414.000 | 87.40  | -26.60 | 114.00 | 54.92 | 29.03  | 3.45 Peak |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 61 File#: C:\EMI TEST DATA\O\Route.EMI

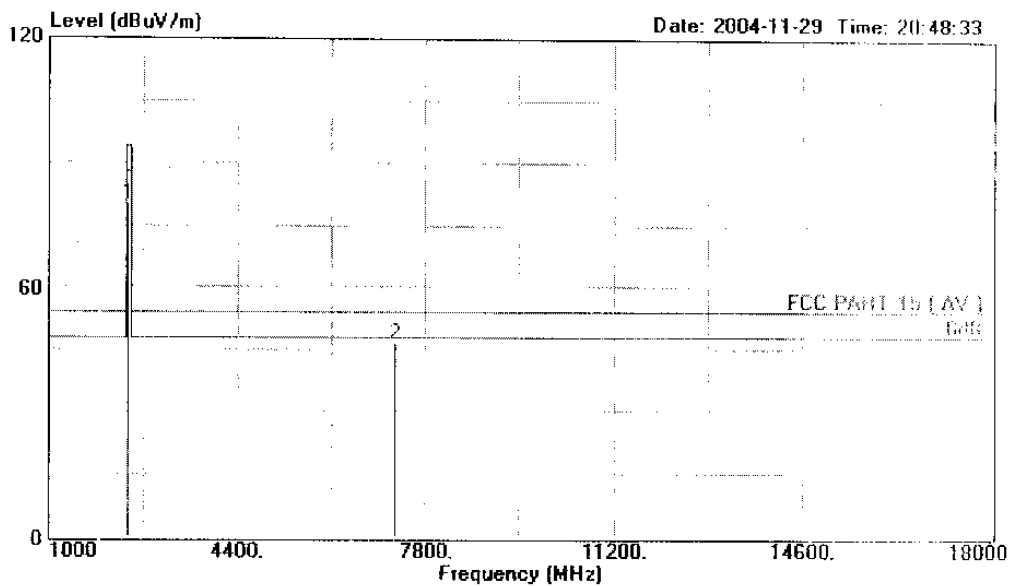

Site : 1# Chamber  
Condition : FCC PART 15 ( AV ) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
 : TX Channel 1

|   |          |        | Over   | Limit  | Read  | Probe  | Cable |         |
|---|----------|--------|--------|--------|-------|--------|-------|---------|
|   | Freq     | Level  | Limit  | Line   | Level | Factor | Loss  | Remark  |
|   | MHz      | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |         |
| 1 | 2414.000 | 80.33  | -13.67 | 94.00  | 47.85 | 29.03  | 3.45  | Average |
| 2 | 7242.000 | 46.74  | -7.26  | 54.00  | 2.21  | 37.39  | 7.14  | Average |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 60 File#: C:\EMI TEST DATA\O\Roule.EMI

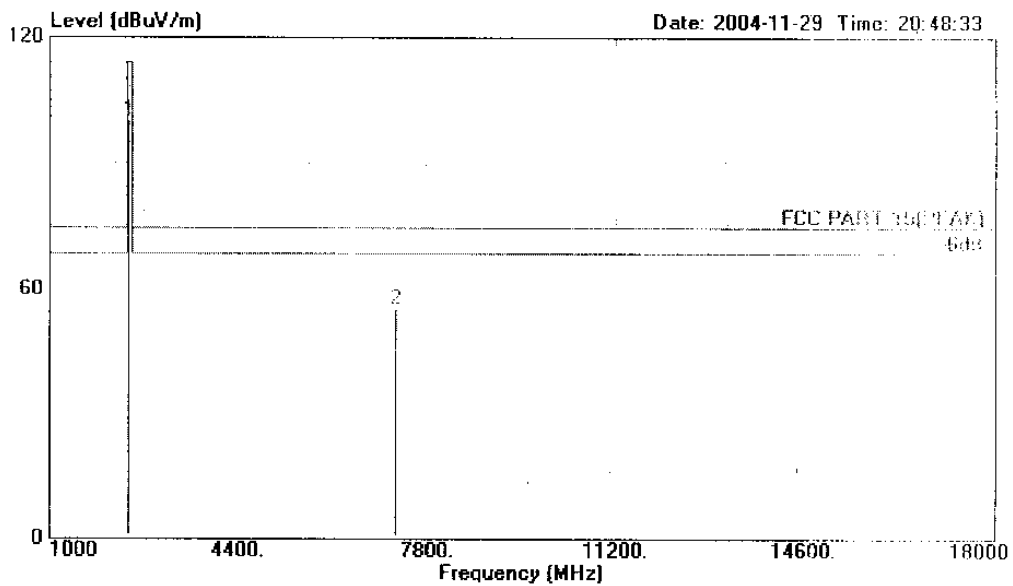

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
TX Channel 1

|   |          |        | Over   | Limit  | Read  | Probe  | Cable |        |
|---|----------|--------|--------|--------|-------|--------|-------|--------|
|   | Freq     | Level  | Limit  | Line   | Level | Factor | Loss  | Remark |
|   | MHz      | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |        |
| 1 | 2414.000 | 99.93  | -14.07 | 114.00 | 67.45 | 29.03  | 3.45  | Peak   |
| 2 | 7242.000 | 54.74  | -19.26 | 74.00  | 10.21 | 37.39  | 7.14  | Peak   |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Mantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 67 File#: C:\EMI TEST DATA\O\Role.EMI

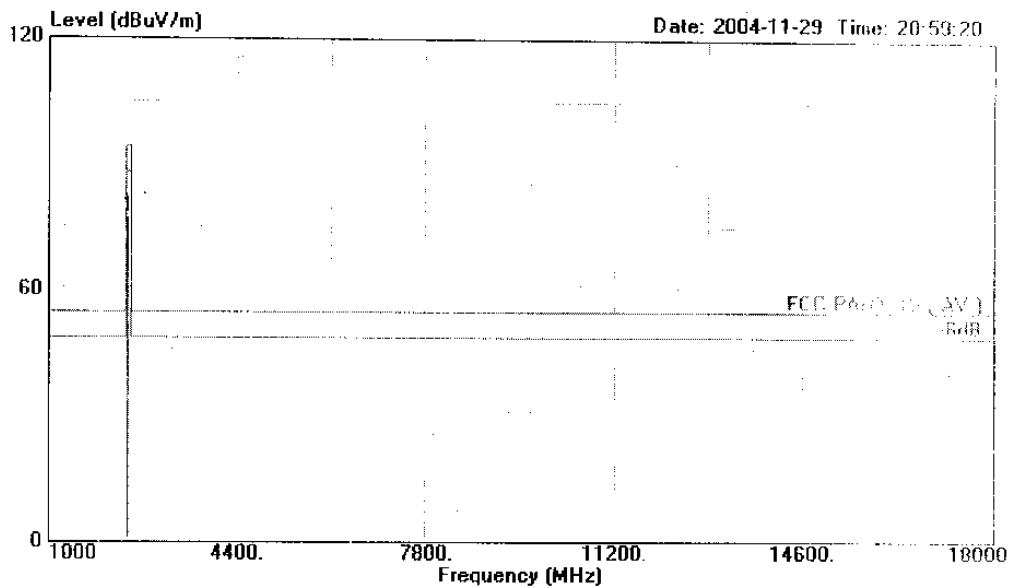

Site : 1# Chamber  
Condition : FCC PART 15 ( AV ) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 2

|            | Over   | Limit  | Read   | Probe | Cable  |      |
|------------|--------|--------|--------|-------|--------|------|
| Freq       | Level  | Limit  | Line   | Level | Factor | Loss |
| MHz        | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB   |
| 1 2432.000 | 77.21  | -16.79 | 94.00  | 44.57 | 29.07  | 3.57 |

Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd

No. 6, Ke Feng Road, Block S2,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 66 File#: C:\EMI TEST DATA\O\Roule.EMI

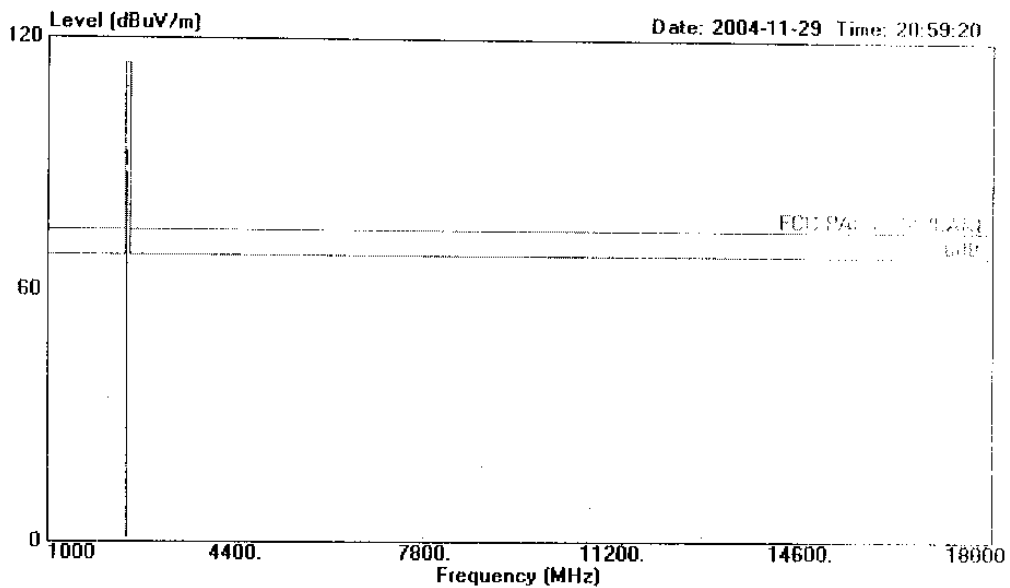

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 2

|   | Freq     | Level  | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Remark |
|---|----------|--------|------------|------------|------------|--------------|------------|--------|
|   | MHz      | dBuV/m | dB         | dBuV/m     | dBuV       | dB           | dB         |        |
| 1 | 2432.000 | 88.21  | -25.79     | 114.00     | 55.57      | 29.07        | 3.57       | Peak   |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 70 File#: C:\EMI TEST DATA\O\Roule.EMI

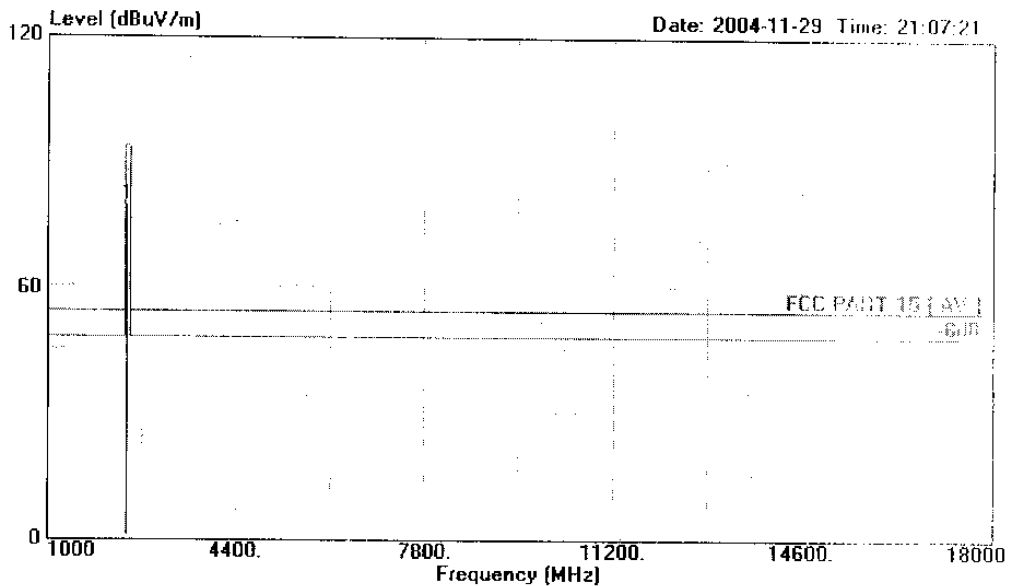

Site : 1# Chamber  
Condition : FCC PART 15 ( AV ) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
: TX Channel 2

|   |          |        | Over   | Limit  | Read  | Probe  | Cable |         |
|---|----------|--------|--------|--------|-------|--------|-------|---------|
|   | Freq     | Level  | Limit  | Line   | Level | Factor | Loss  | Remark  |
|   | MHz      | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |         |
| 1 | 2432.000 | 79.89  | -14.11 | 94.00  | 47.25 | 29.07  | 3.57  | Average |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 69 File#: C:\EMI TEST DATA\O\Role.EMI

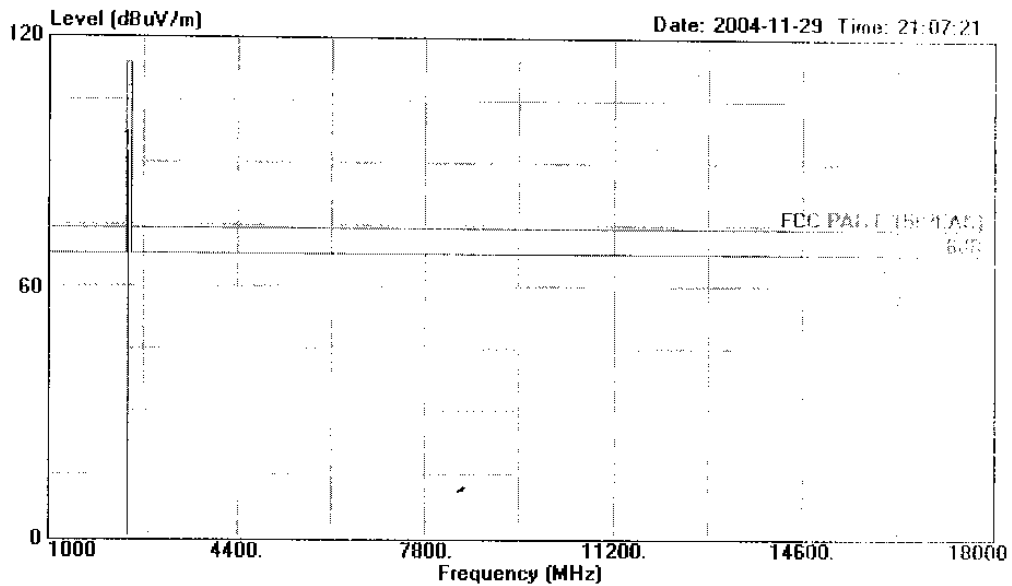

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
 : TX Channel 2

|   | Freq     | Level  | Over   | Limit  | Read  | Probe  | Cable | Remark |
|---|----------|--------|--------|--------|-------|--------|-------|--------|
|   |          |        | Limit  | Line   | Level | Factor | Loss  |        |
|   | MHz      | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |        |
| 1 | 2432.000 | 92.89  | -21.11 | 114.00 | 60.25 | 29.07  | 3.57  | Peak   |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,  
Shenzhen Science & Industry Park  
Mantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 76 File#: C:\EMI TEST DATA\O\Roule.EMI

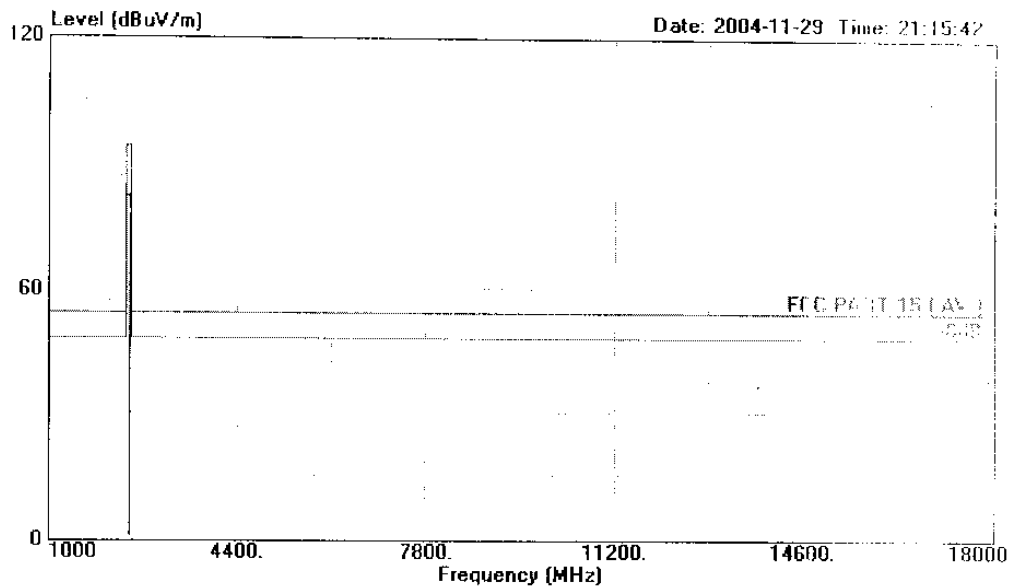

Site : 1# Chamber  
Condition : FCC PART 15 ( AV ) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 3

|            |        | Over   | Limit  | Read  | Probe  | Cable |         |
|------------|--------|--------|--------|-------|--------|-------|---------|
| Freq       | Level  | Limit  | Line   | Level | Factor | Loss  | Remark  |
| MHz        | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |         |
| 1 2450.000 | 77.78  | -16.22 | 94.00  | 44.99 | 29.11  | 3.68  | Average |




信维科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S3,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 75 File#: C:\EMI TEST DATA\O\Route.EMI

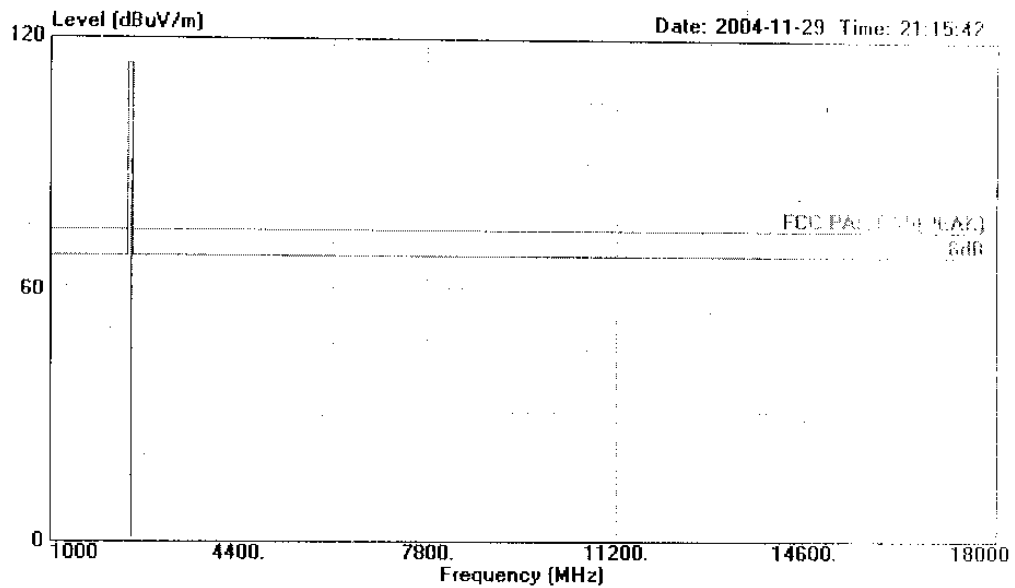

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
: TX Channel 3

|   | Freq     | Level  | Over Limit | Limit  | Read  | Probe | Cable |        |
|---|----------|--------|------------|--------|-------|-------|-------|--------|
|   | MHz      | dBuV/m | dB         | dBuV/m | dBuV  | dB    | dB    | Remark |
| 1 | 2450.000 | 85.78  | -28.22     | 114.00 | 52.99 | 29.11 | 3.66  | Peak   |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Fang Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632677

Data#: 73 File#: C:\EMI TEST DATA\O\Roule.EMI

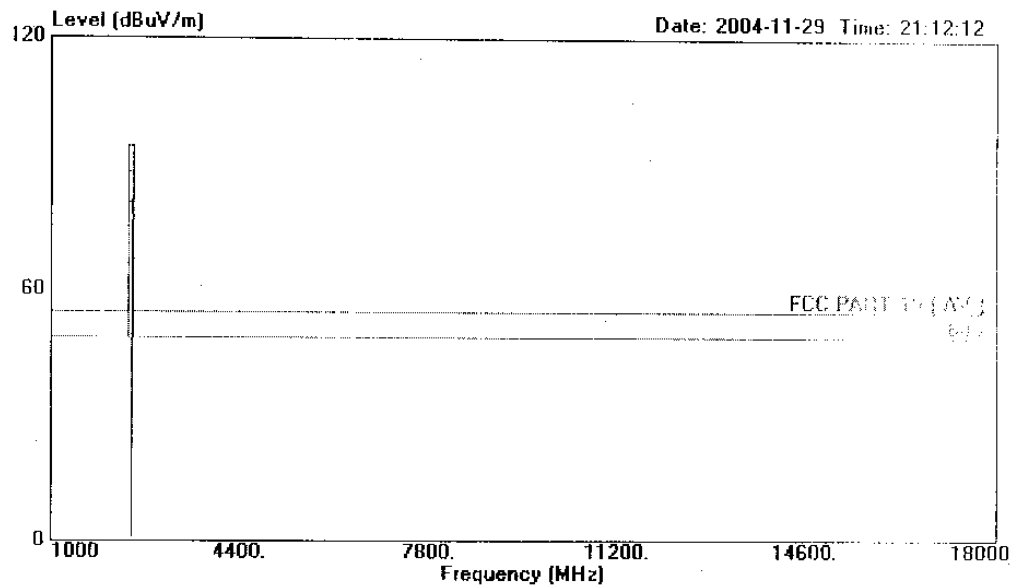

Site : 1# Chamber  
Condition : FCC PART 15 ( AV ) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
: TX Channel 3

|            |        |        | Over   | Limit | Read   | Probe | Cable   |  |
|------------|--------|--------|--------|-------|--------|-------|---------|--|
| Freq       | Level  | Limit  | Line   | Level | Factor | Loss  | Remark  |  |
| MHz        | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |         |  |
| 1 2450.000 | 76.52  | -17.48 | 94.00  | 43.73 | 29.11  | 3.68  | Average |  |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 72 File#: C:\EMI TEST DATA\O\Route.EMI

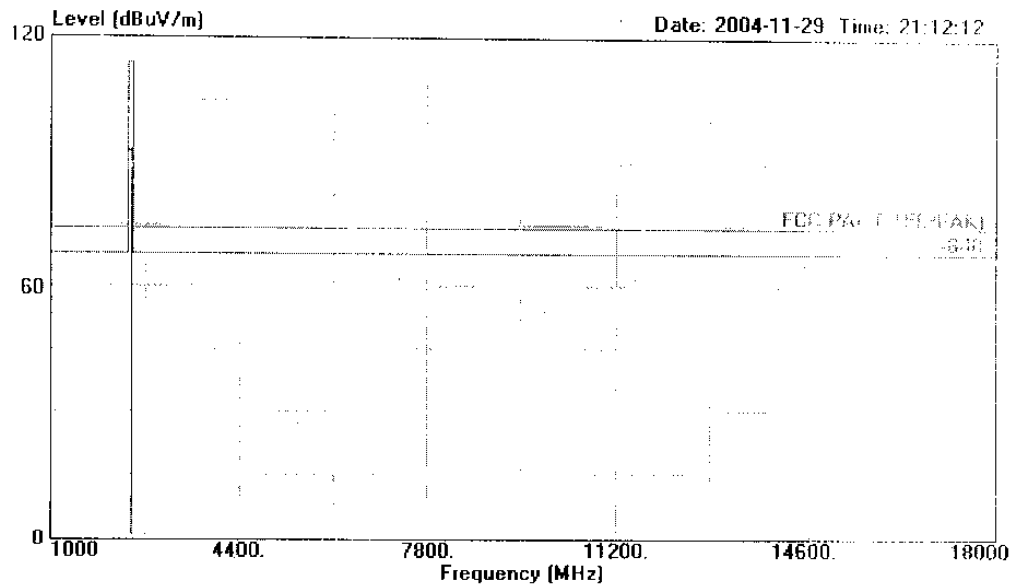

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 3

|   | Freq     | Level  | Over Limit | Limit  | Read  | Probe | Cable |        |
|---|----------|--------|------------|--------|-------|-------|-------|--------|
|   | MHz      | dBuV/m | dB         | dBuV/m | dBuV  | dB    | dB    | Remark |
| 1 | 2450.000 | 88.52  | -25.48     | 114.00 | 55.73 | 29.11 | 3.68  | Peak   |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 79 File#: C:\EMI TEST DATA\O\Roule.EMI

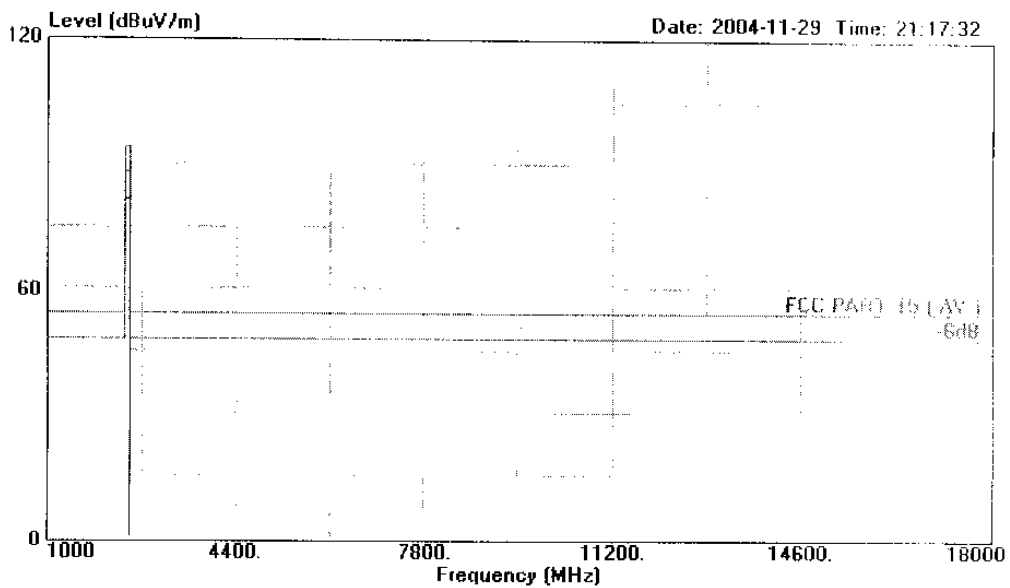

Site : 1# Chamber  
Condition : FCC PART 15 ( AV ) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
: TX Channel 4

|   |          |        | Over   | Limit  | Read  | Probe  | Cable |         |
|---|----------|--------|--------|--------|-------|--------|-------|---------|
|   | Freq     | Level  | Limit  | Line   | Level | Factor | Loss  | Remark  |
|   | MHz      | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |         |
| 1 | 2468.000 | 77.42  | -16.58 | 94.00  | 44.47 | 29.15  | 3.60  | Average |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632677

Data#: 78 File#: C:\EMI TEST DATA\O\Route.EMI

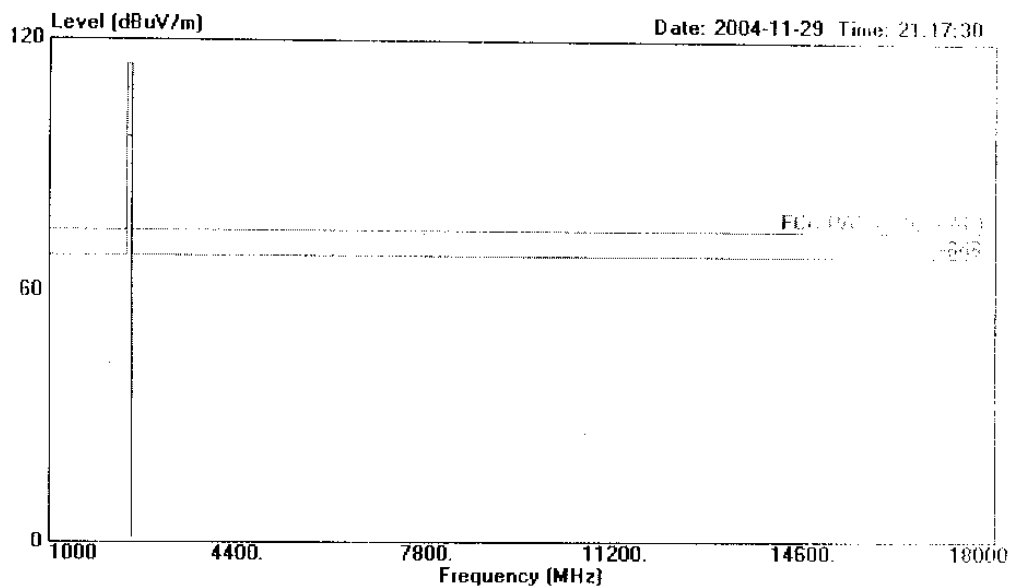

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120W/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 4

|            |        | Over   | Limit  | Read  | Probe  | Cable |        |
|------------|--------|--------|--------|-------|--------|-------|--------|
| Freq       | Level  | Limit  | Line   | Level | Factor | Loss  | Remark |
| MHz        | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |        |
| 1 2468.000 | 92.42  | -21.58 | 114.00 | 59.47 | 29.15  | 3.80  | Peak   |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 82 File#: C:\EMI TEST DATA\O\Route.EMI

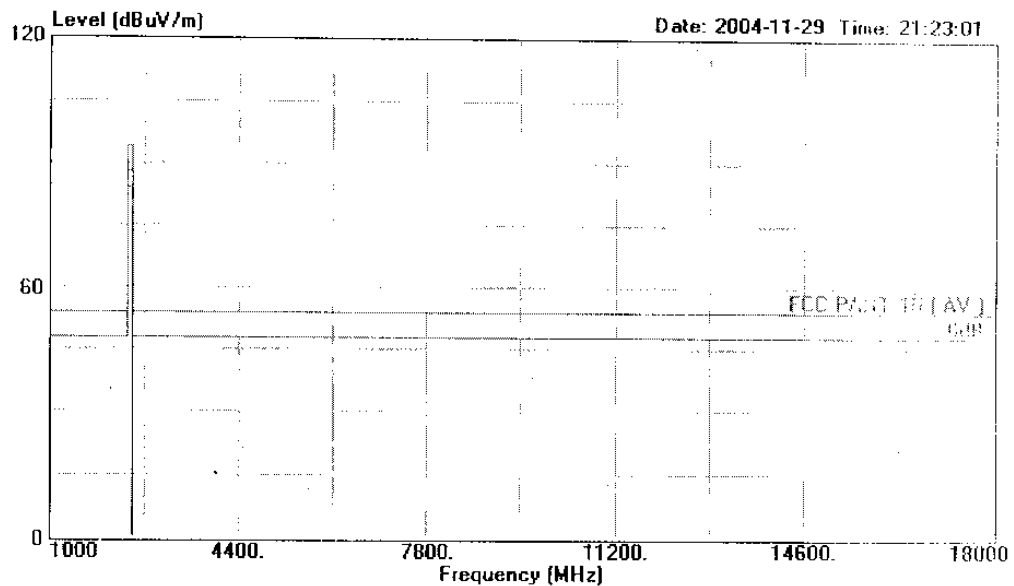

Site : 1# Chamber  
Condition : FCC PART 15 ( AV ) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 4

|   |          |        | Over   | Limit  | Read  | Probe  | Cable |         |
|---|----------|--------|--------|--------|-------|--------|-------|---------|
|   | Freq     | Level  | Limit  | Line   | Level | Factor | Loss  | Remark  |
|   | MHz      | dBuV/m | dB     | dBuV/m | dBuV  | dB     | dB    |         |
| 1 | 2468.000 | 79.73  | -14.27 | 94.00  | 46.78 | 29.15  | 3.80  | Average |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 81 File#: C:\EMI TEST DATA\O\Route.EMI

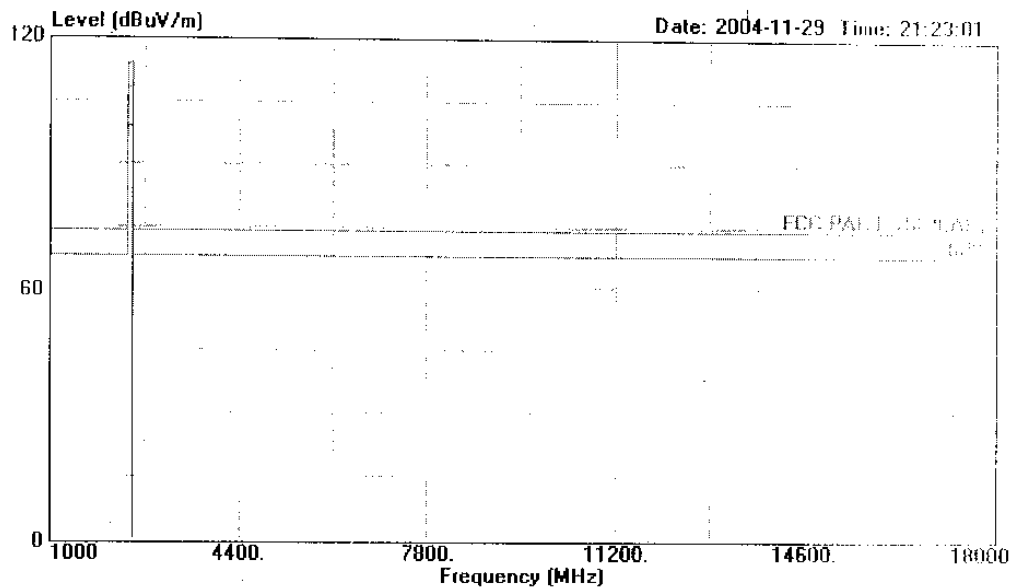

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 4

|   | Freq     | Level  | Over Limit | Limit  | Read  | Probe | Cable |        |
|---|----------|--------|------------|--------|-------|-------|-------|--------|
|   | MHz      | dBuV/m | dB         | dBuV/m | dBuV  | dB    | dB    | Remark |
| 1 | 2468.000 | 94.71  | -19.29     | 114.00 | 61.76 | 29.15 | 3.80  | Peak   |

## 4. BANDWIDTH TEST

### 4.1. Test Equipment

The following test equipments are used during the bandwidth test:

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal.  | Cal. Interval |
|------|-----------|--------------|-----------|------------|------------|---------------|
| 1.   | Spectrum  | Agilent      | E4407B    | MY41440292 | May 24,04  | 1 Y           |
| 2.   | Antenna   | EMCO         | 3115      | 9607-4877  | Jun 15, 04 | 1.5 Y         |

### 4.2. Test Standard

The test completeness FCC 15C (249).

### 4.3. Bandwidth Limit

200KHz wide centered on the operation frequency.

### 4.4. Test Procedure

**PASS.**




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 91 File#: C:\EMI TEST DATA\O\Roule.EMI

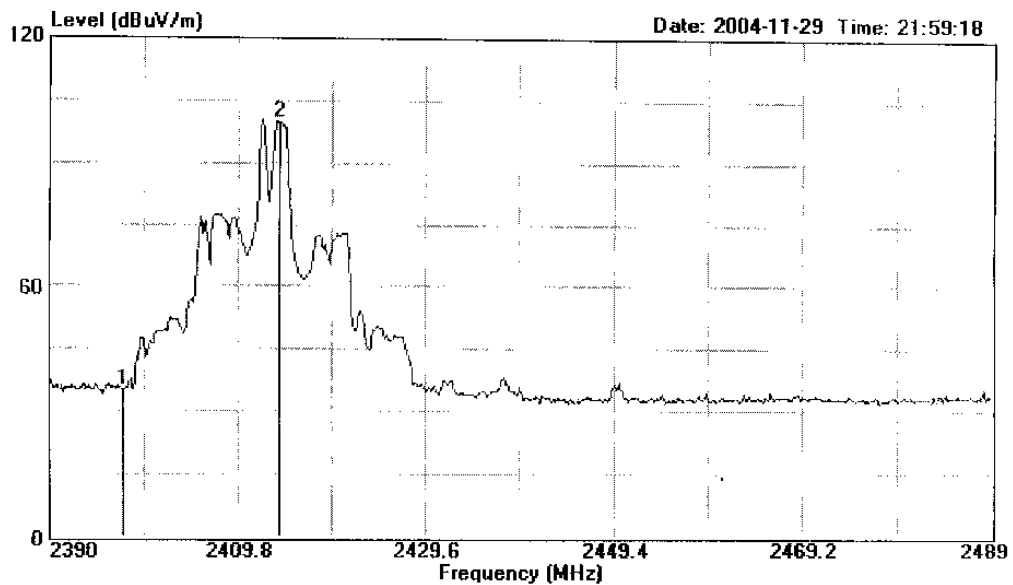

Site : 1# Chamber  
Condition : 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
: Band Edge Plots:TX Channel 1

|   |          |        | Over  | Limit  | Read  | Probe  | Cable |        |
|---|----------|--------|-------|--------|-------|--------|-------|--------|
|   | Freq     | Level  | Limit | Line   | Level | Factor | Loss  | Remark |
|   | MHz      | dBuV/m | dB    | dBuV/m | dBuV  | dB     | dB    |        |
| 1 | 2397.720 | 35.39  | ----- | -----  | 2.97  | 29.01  | 3.41  | Peak   |
| 2 | 2414.000 | 99.93  | ----- | -----  | 67.34 | 29.06  | 3.53  | Peak   |




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 92 File#: C:\EMI TEST DATA\O\Roule.EMI

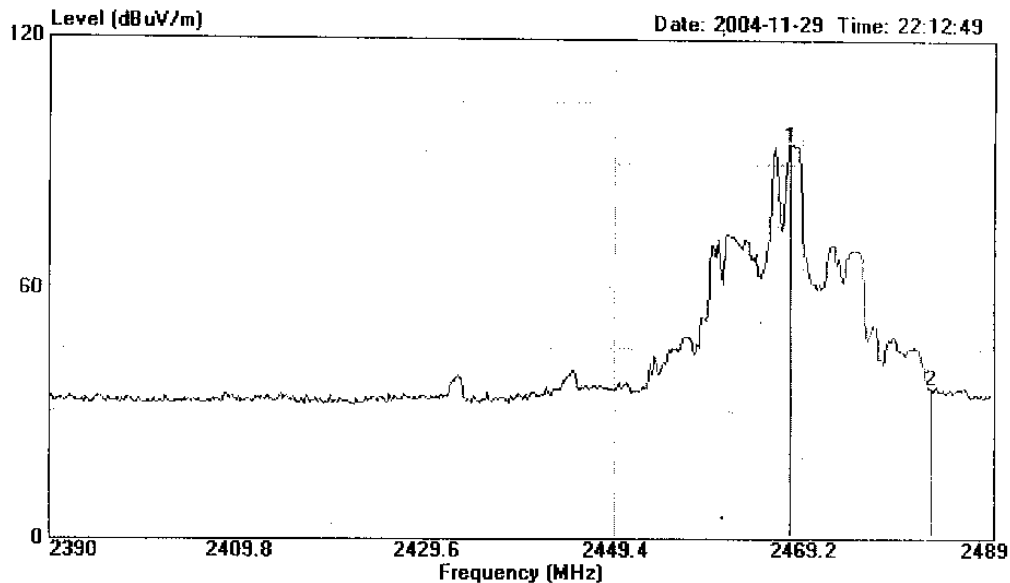

Site : 1# Chamber  
Condition : 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
.: Band Edge Plots:TX Channel 4

|      |          |       | Over   | Limit | Read   | Probe | Cable  |      |
|------|----------|-------|--------|-------|--------|-------|--------|------|
| Freq | Level    | Limit | Line   | Level | Factor | Loss  | Remark |      |
| MHz  | dBuV/m   | dB    | dBuV/m | dBuV  | dB     | dB    |        |      |
| 1    | 2468.000 | 94.71 | -----  | ----- | 61.63  | 29.18 | 3.90   | Peak |
| 2    | 2482.660 | 35.83 | -----  | ----- | 2.61   | 29.22 | 4.00   | Peak |


# **APPENDIX I**



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
Tel:0755-26639496  
Fax:26632877

Data#: 11 File#: Roule.EMI Date: 2004-11-30 Time: 00:49:23

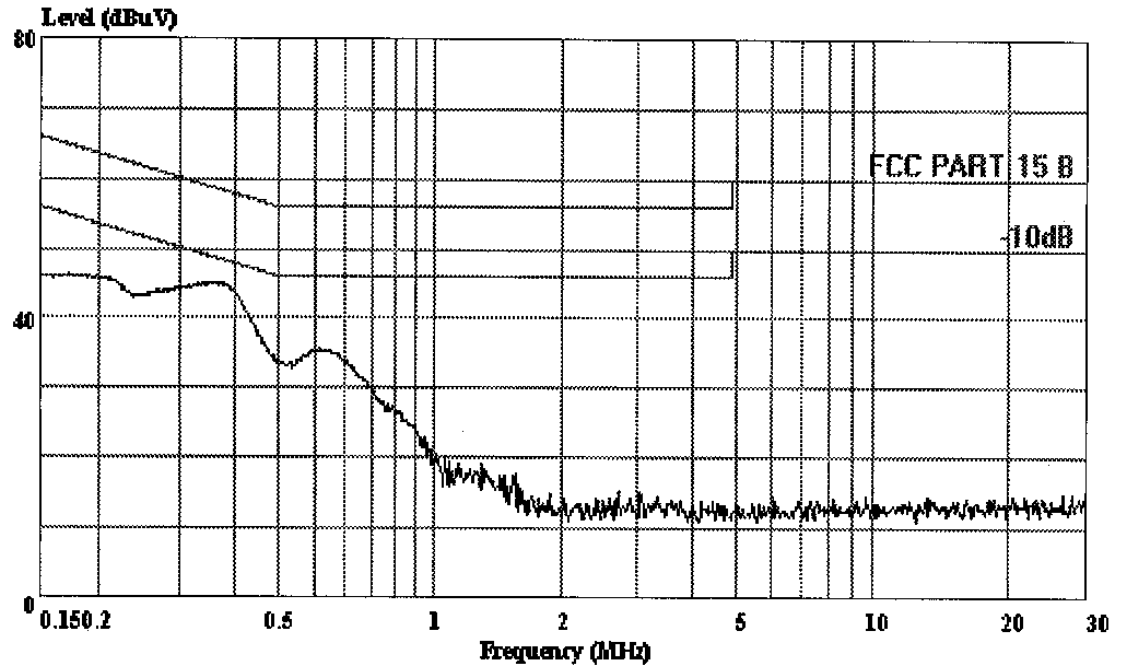

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407  
EUT : monitor  
M/N : RL-01CRT  
OP Condition : TX Channel 1  
Test Spec : DC 9V Adaptor AC Input 120V/60Hz  
Test Engineer: Seco  
Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
Tel:0755-26639496  
Fax:26632877

Data#: 12 File#: Roule.EMI

Date: 2004-11-30 Time: 00:49:54

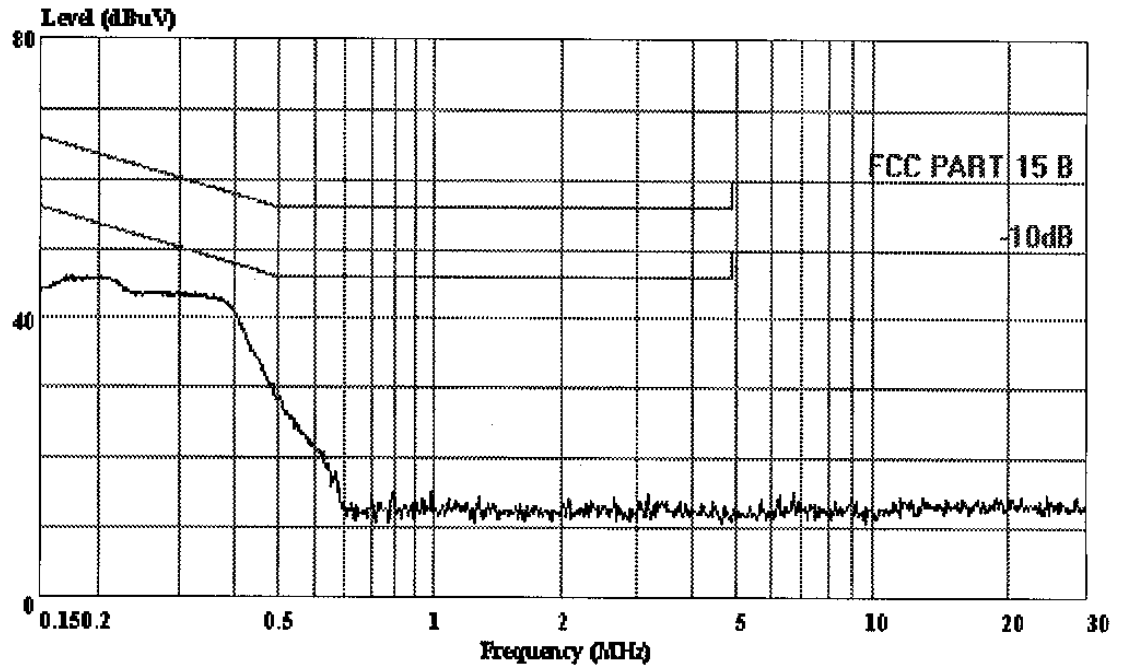

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 1

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco


Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
Tel:0755-26639496  
Fax:26632877

Data#: 14 File#: Roule.EMI Date: 2004-11-30 Time: 00:50:55

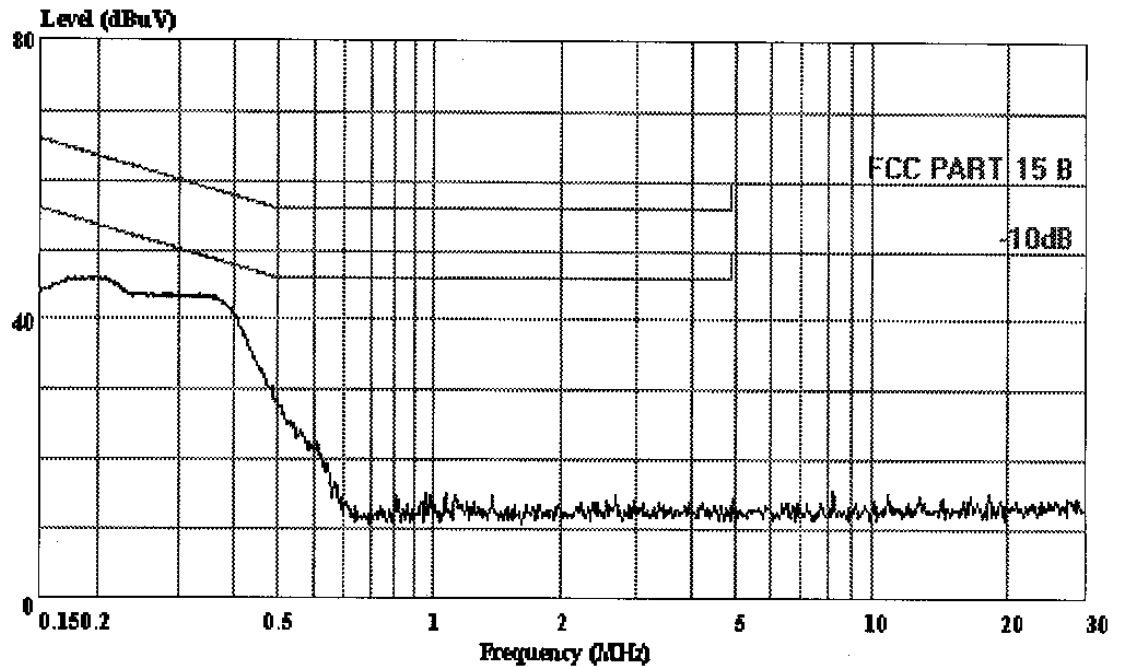

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 2

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
Tel:0755-26639496  
Fax:26632877

Data#: 13 File#: Roule.EMI

Date: 2004-11-30 Time: 00:50:24

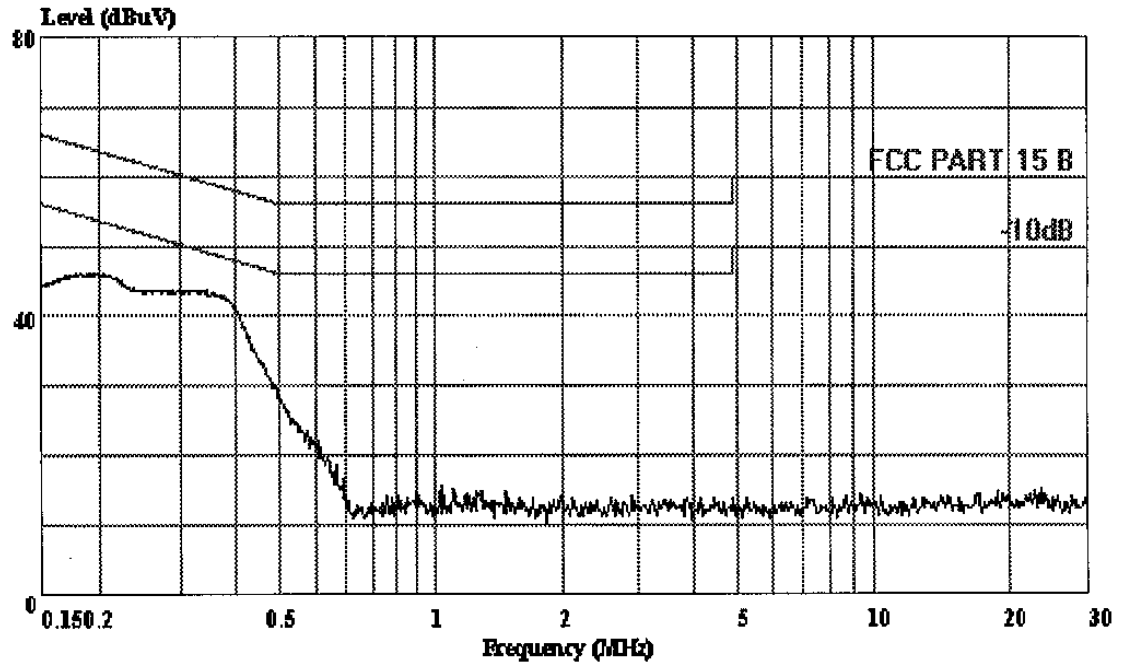

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 2

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
Tel:0755-26639496  
Fax:26632877

Data#: 15 File#: Roule.EMI

Date: 2004-11-30 Time: 00:51:25

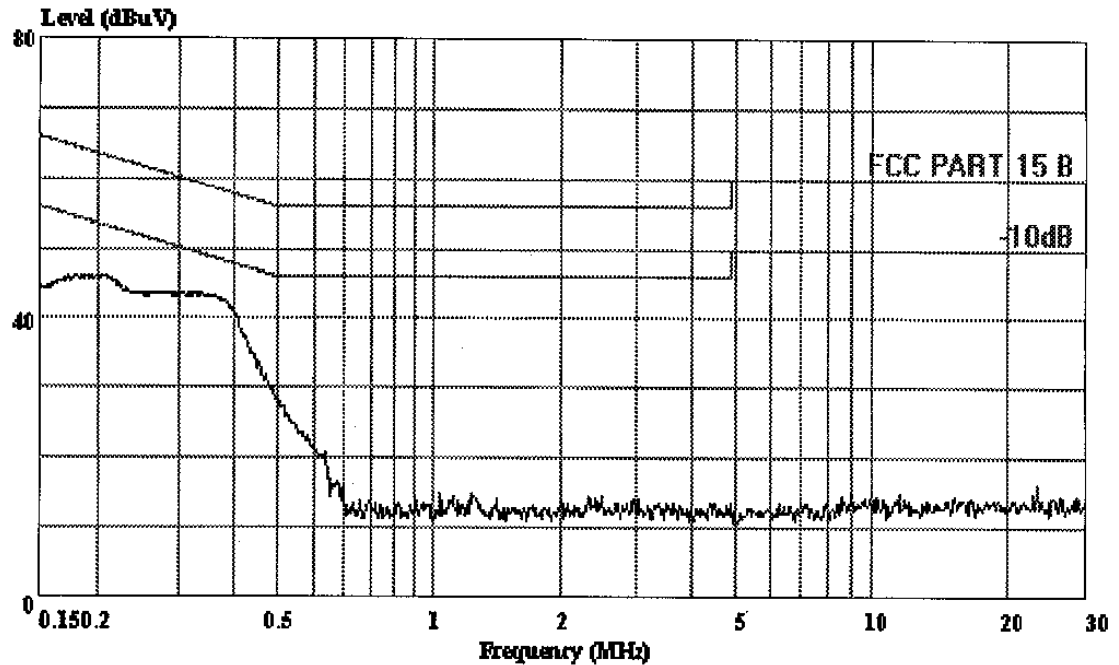

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 3

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
Tel:0755-26639496  
Fax:26632877

Data#: 16 File#: Roule.EMI

Date: 2004-11-30 Time: 00:51:55

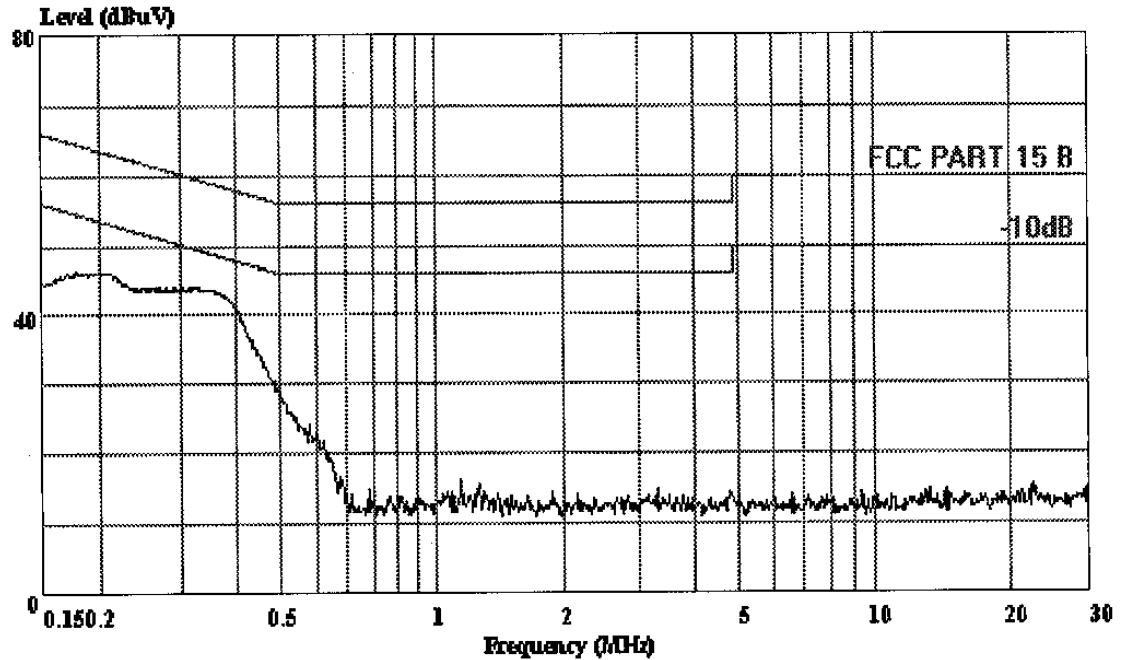

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 3

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
Tel: 0755-26639496  
Fax: 26632877

Data#: 19 File#: Roule.EMI

Date: 2004-11-30 Time: 00:56:01

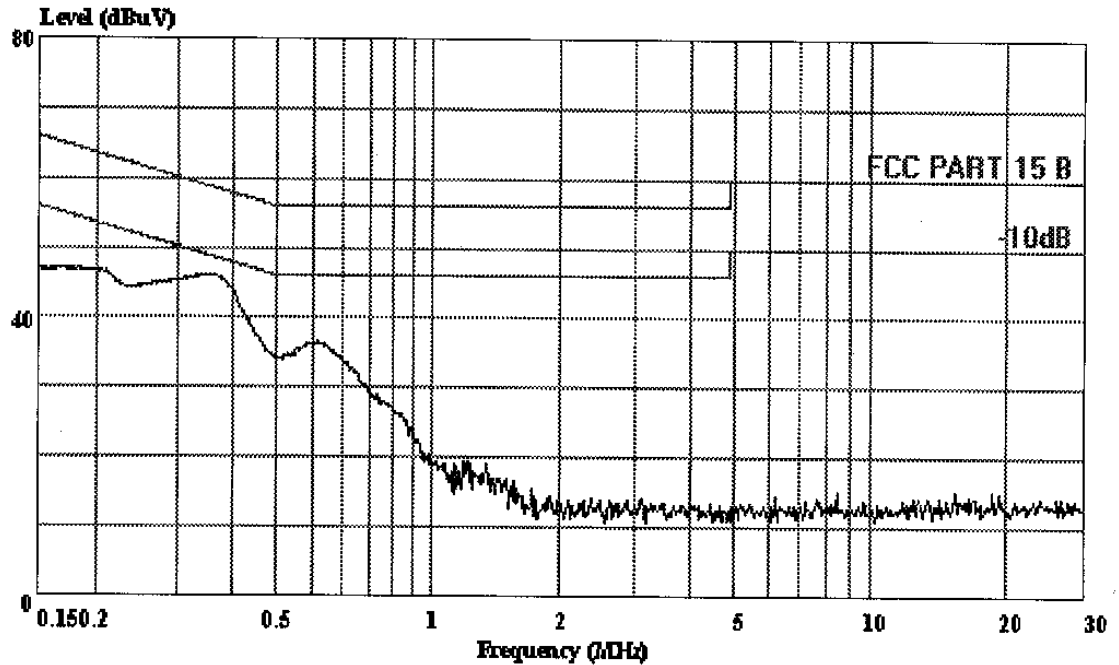

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 4

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
Tel:0755-26639496  
Fax:26632877

Data#: 17 File#: Roule.EMI

Date: 2004-11-30 Time: 00:52:44

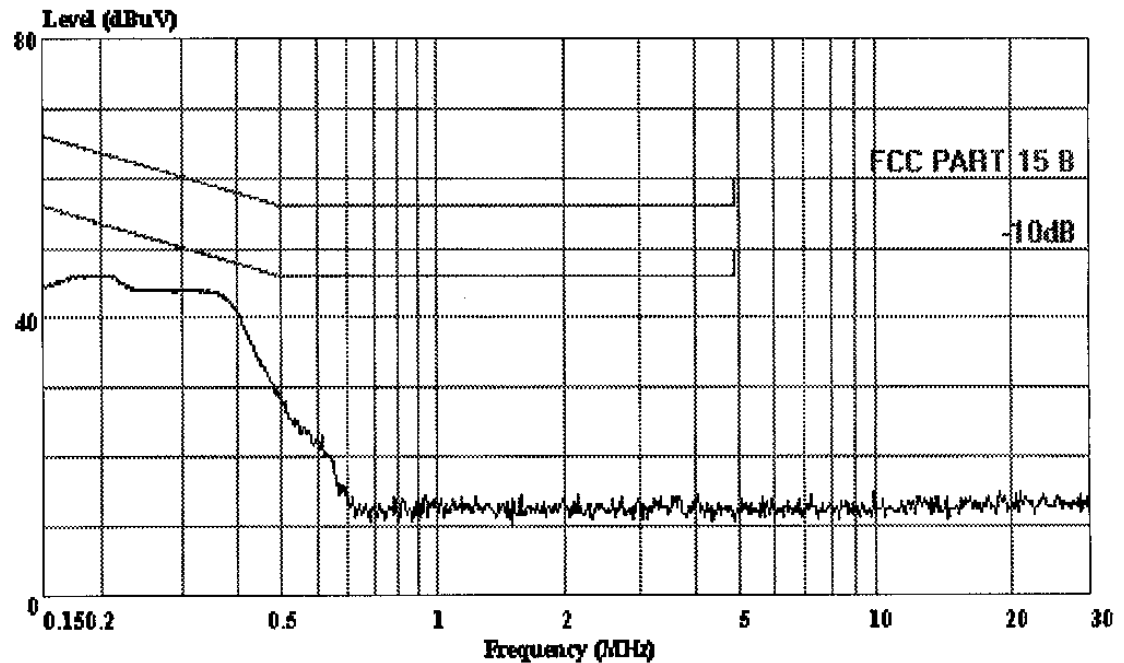

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 4

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%

# **APPENDIX II**



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 22 File#: Roule.EMI

Date: 2004-11-28 Time: 12:02:11

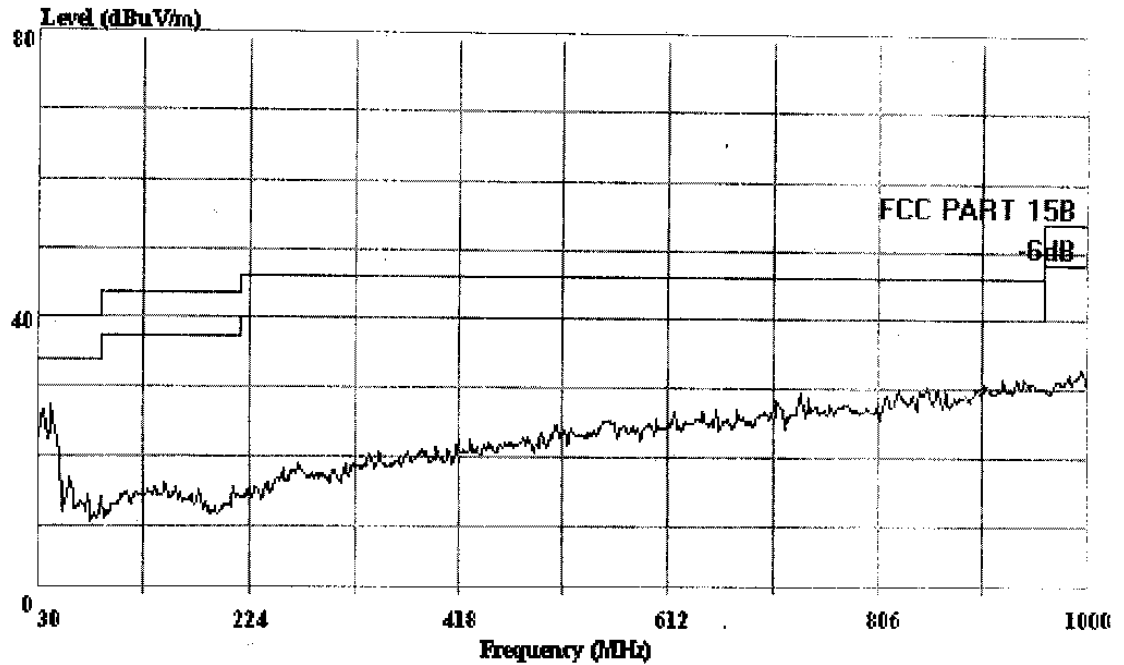

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 1



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 21 File#: Roule.EMI

Date: 2004-11-28 Time: 12:01:53

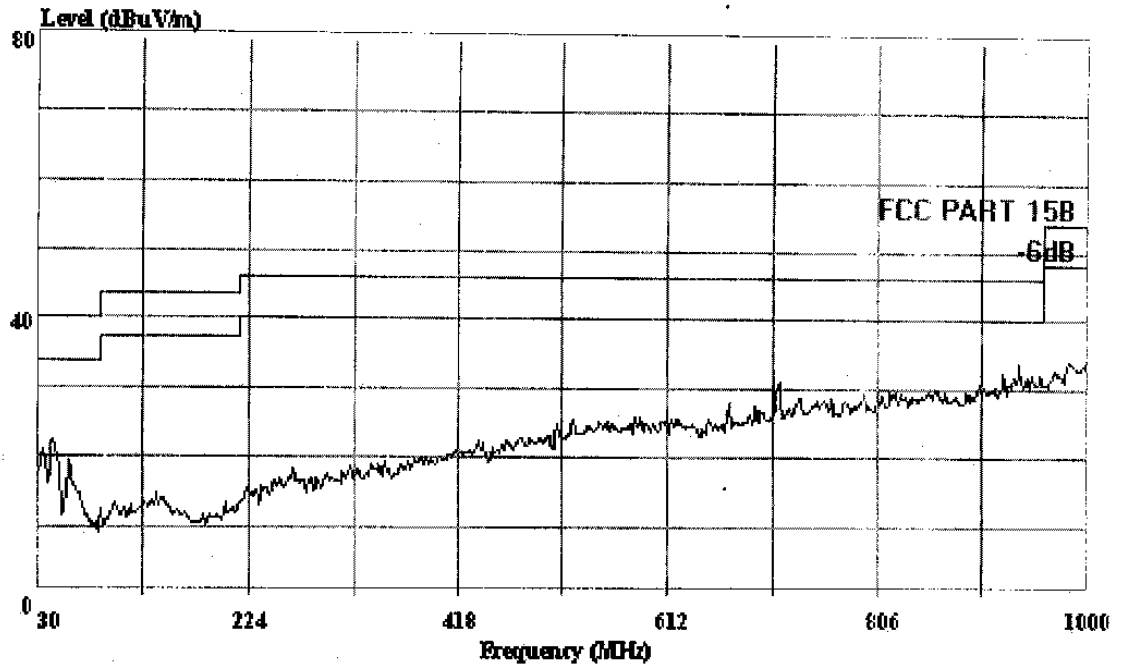

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 1



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 23 File#: Roule.EMI

Date: 2004-11-28 Time: 12:02:27

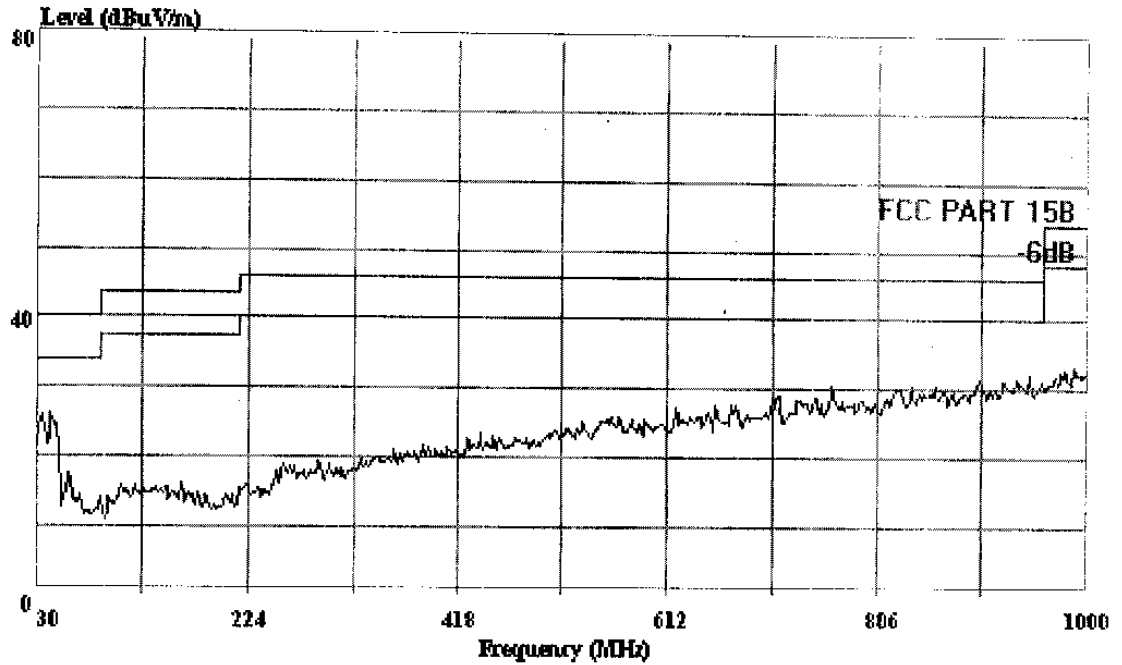

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RI-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 2



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 24 File#: Roule.EMI

Date: 2004-11-28 Time: 12:02:43

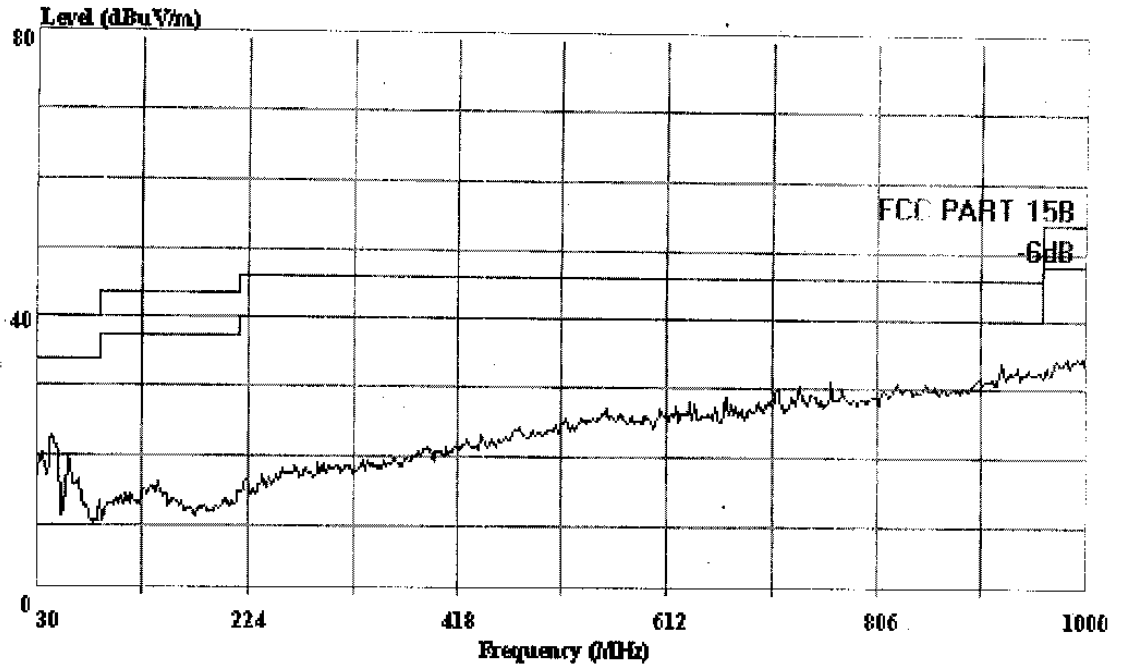

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 2



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 26 File#: Roule.EMI

Date: 2004-11-28 Time: 12:03:24

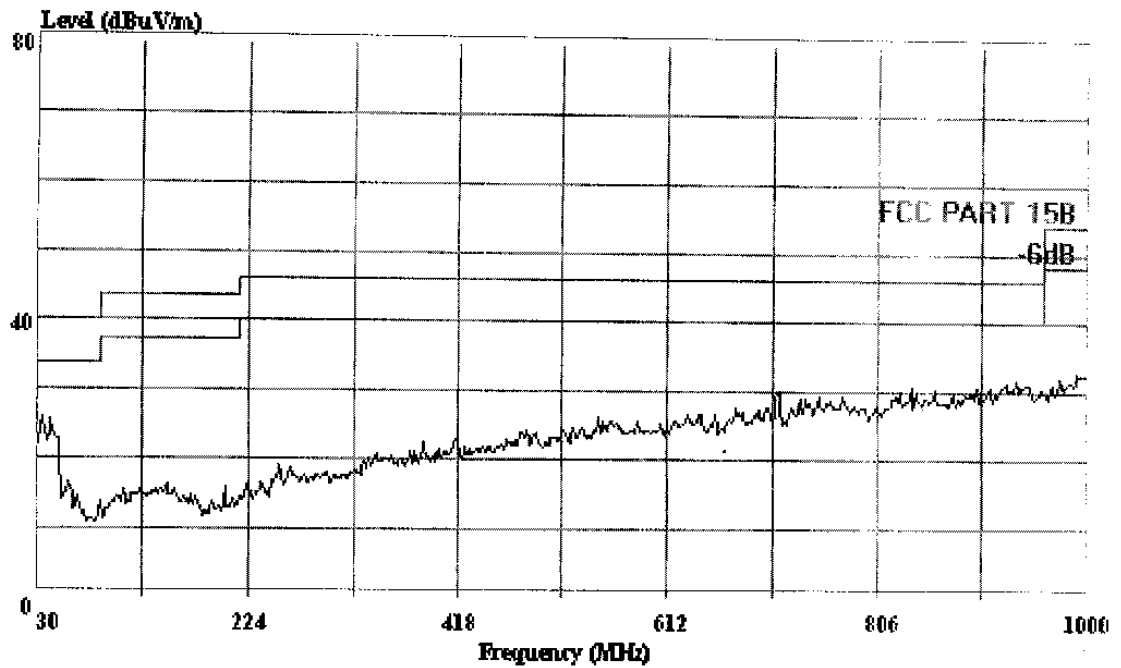

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 3



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 25 File#: Roule.EMI

Date: 2004-11-28 Time: 12:03:01

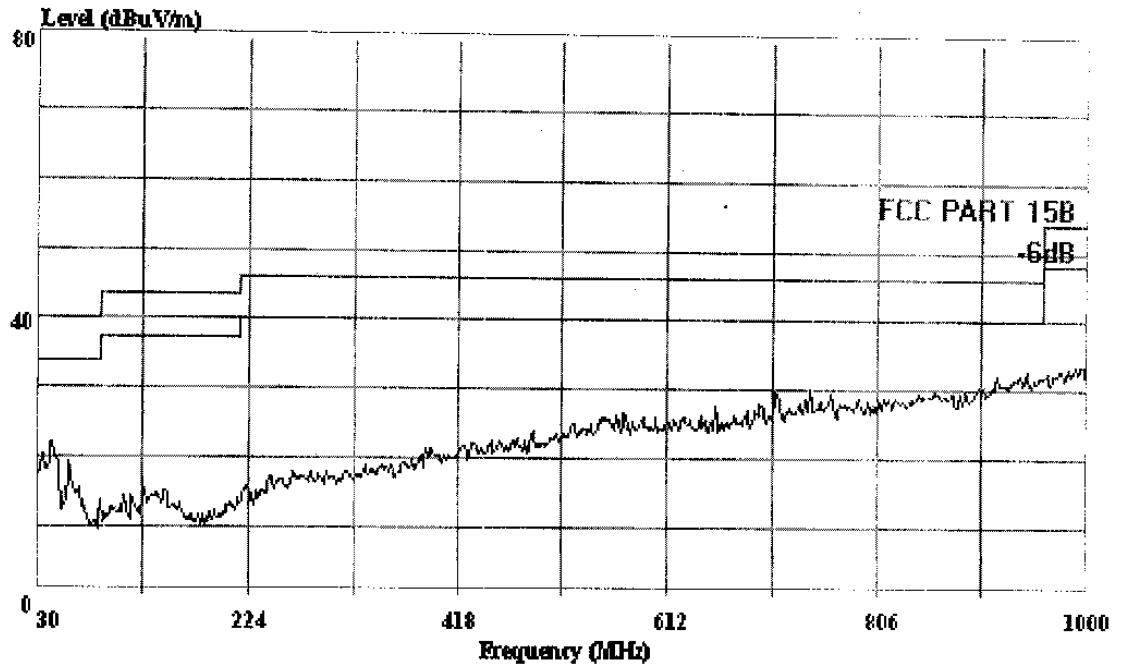

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 3



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 27 File#: Roule.EMI

Date: 2004-11-28 Time: 12:04:05

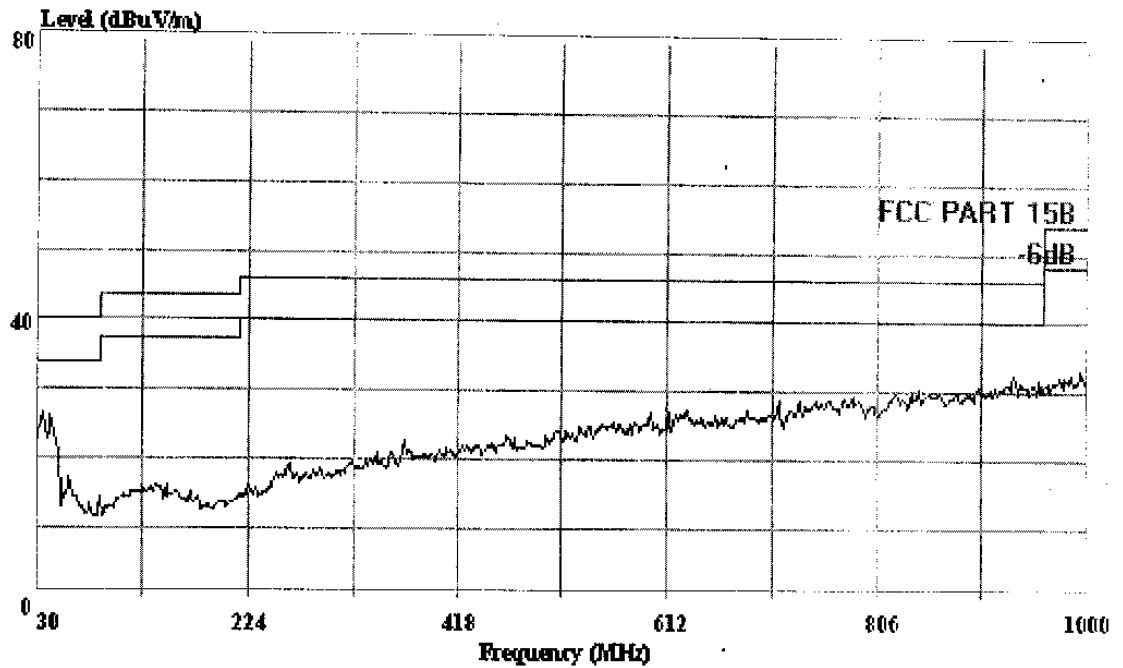

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 4



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science &amp; Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 29 File#: Roule.EMI

Date: 2004-11-28 Time: 12:06:07

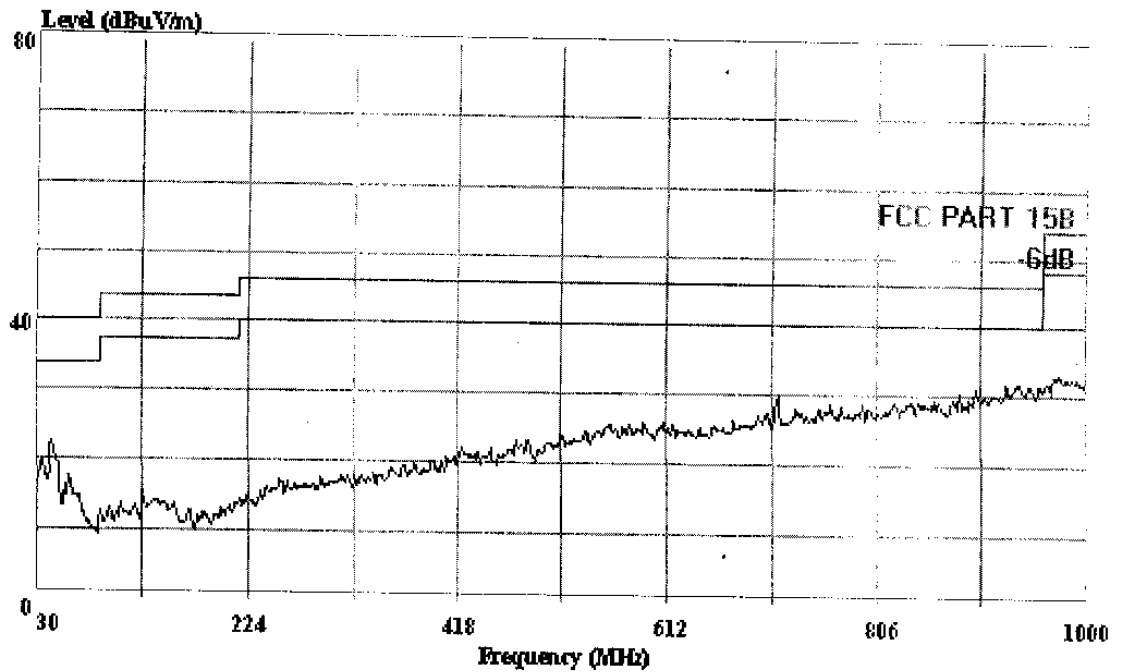

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 62 File#: C:\EMI TEST DATA\O\Route.EMI

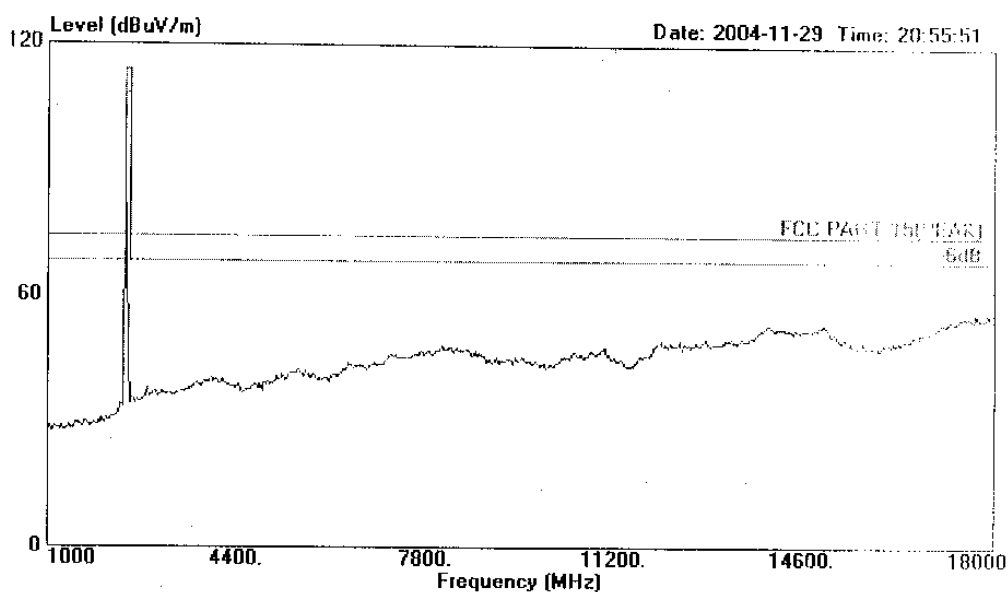

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
: TX Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632677

Data#: 59 File#: C:\EMI TEST DATA\O\Roule.EMI

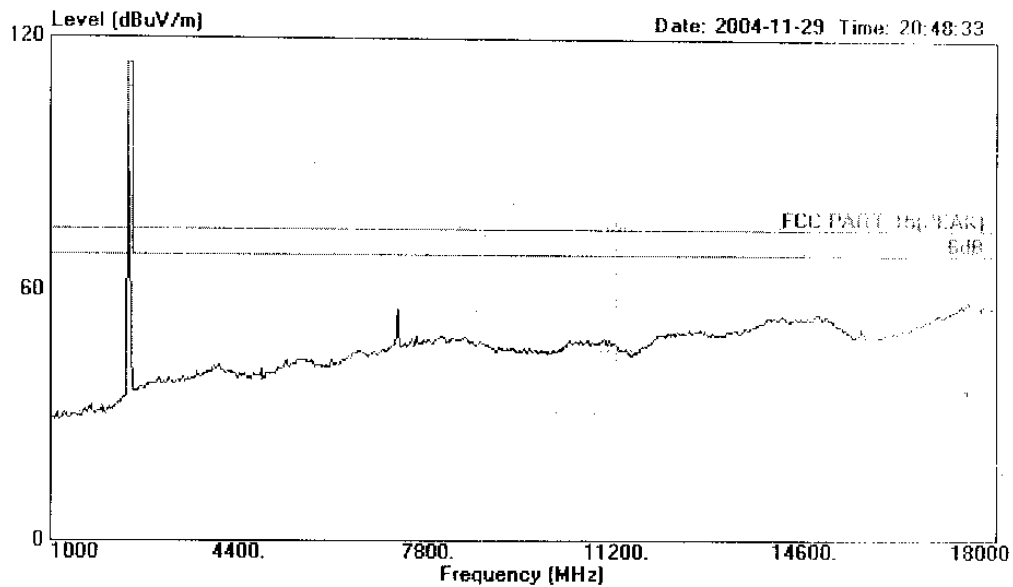

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 65 File#: C:\EMI TEST DATA\O\Roule.EMI

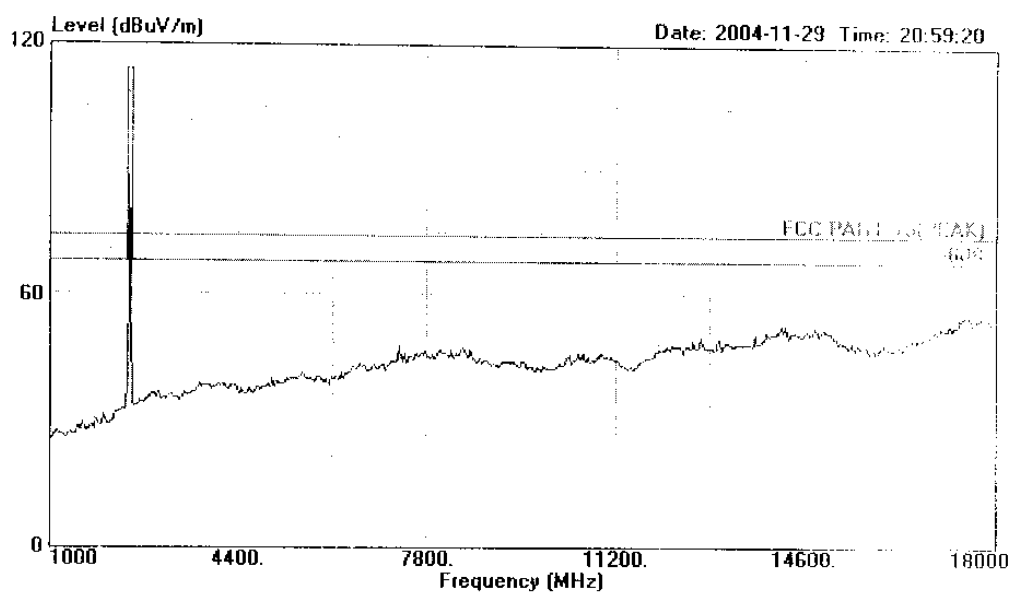

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632377

Data#: 68 File#: C:\EMI TEST DATA\O\Roule.EMI

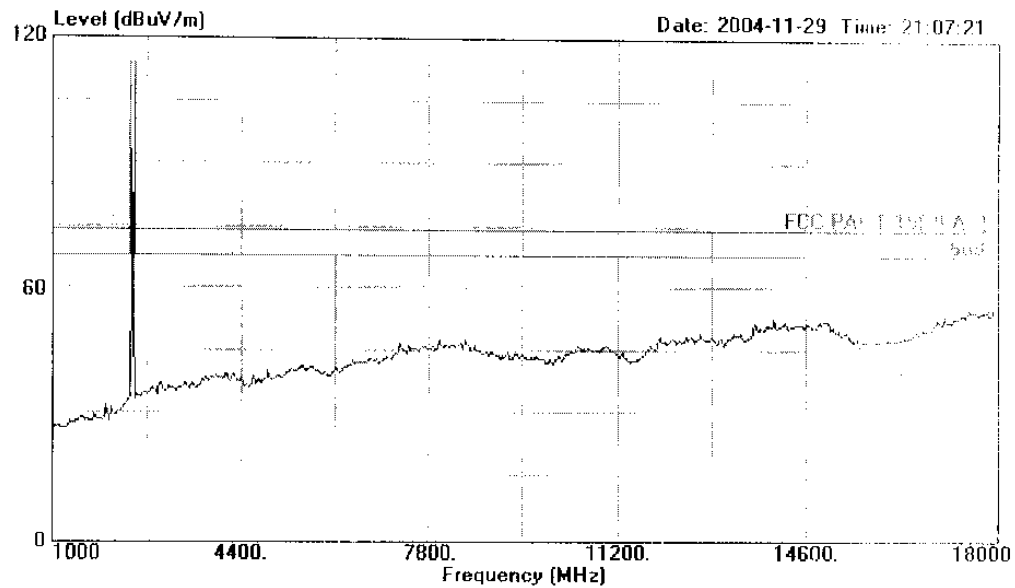

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ka Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 74 File#: C:\EMI TEST DATA\O\Roule.EMI

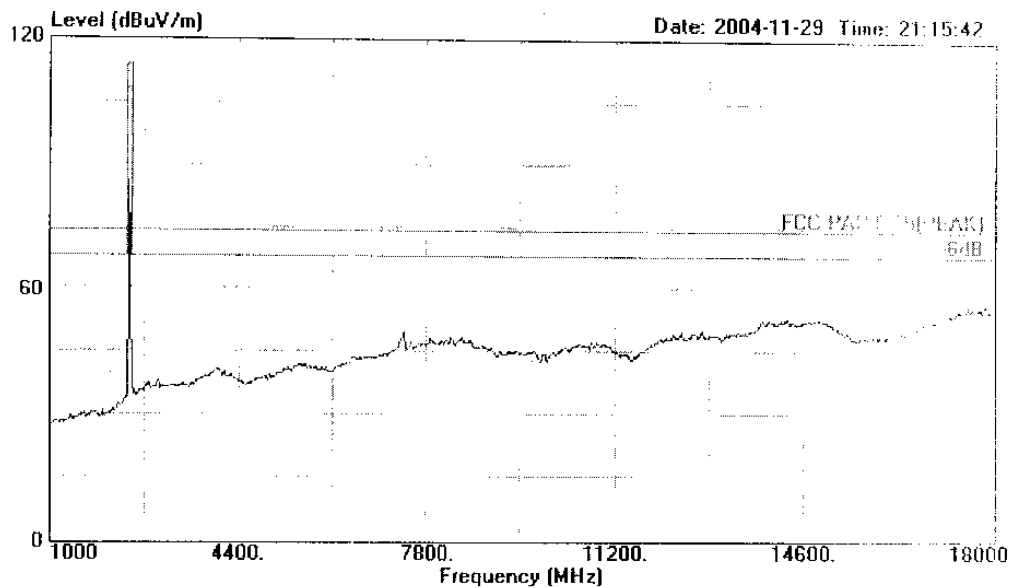

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120W/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 71 File#: C:\EMI TEST DATA\O\Roule.EMI

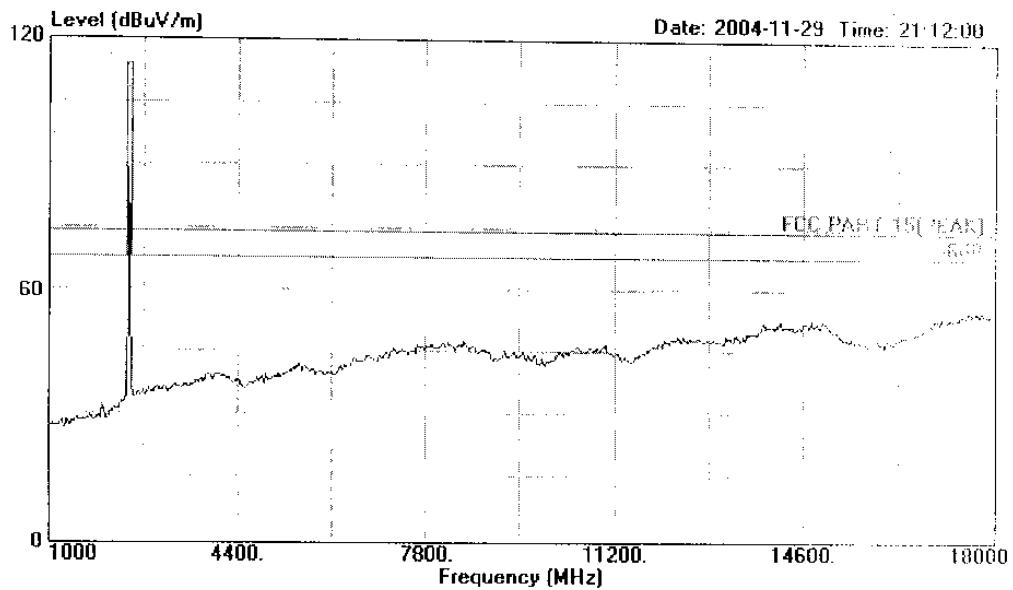

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 77 File#: C:\EMI TEST DATA\O\Roule.EMI

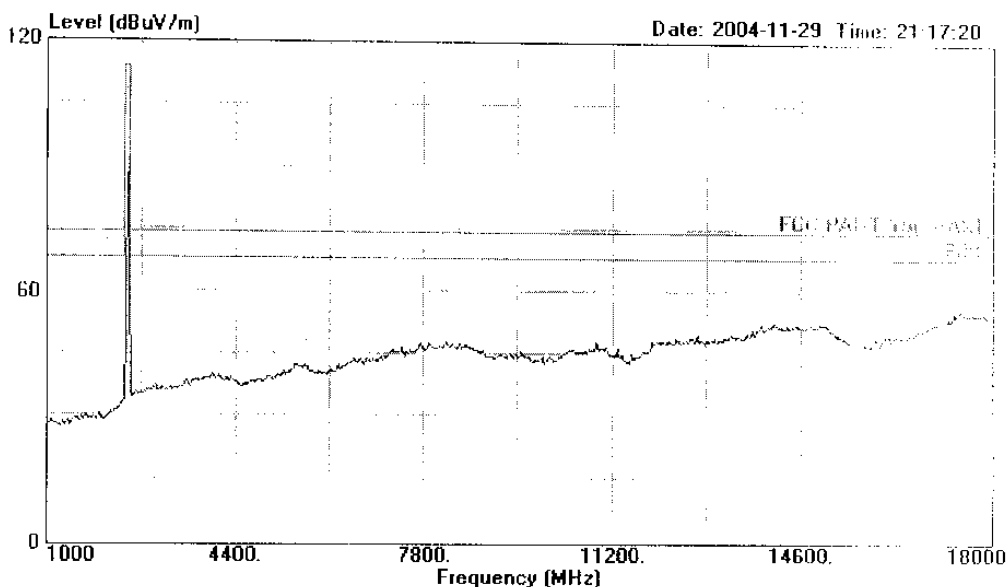

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
: TX Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Fang Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 80 File#: C:\EMI TEST DATA\O\Roule.EMI

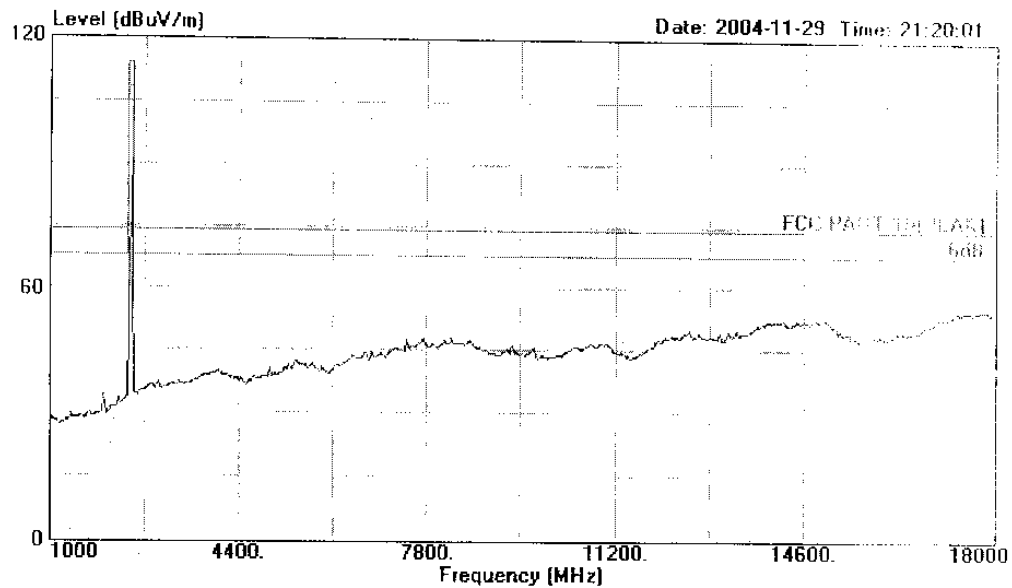

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp: 24° Humi: 54%  
: TX Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 84 File#: C:\EMI TEST DATA\O\Roule.EMI

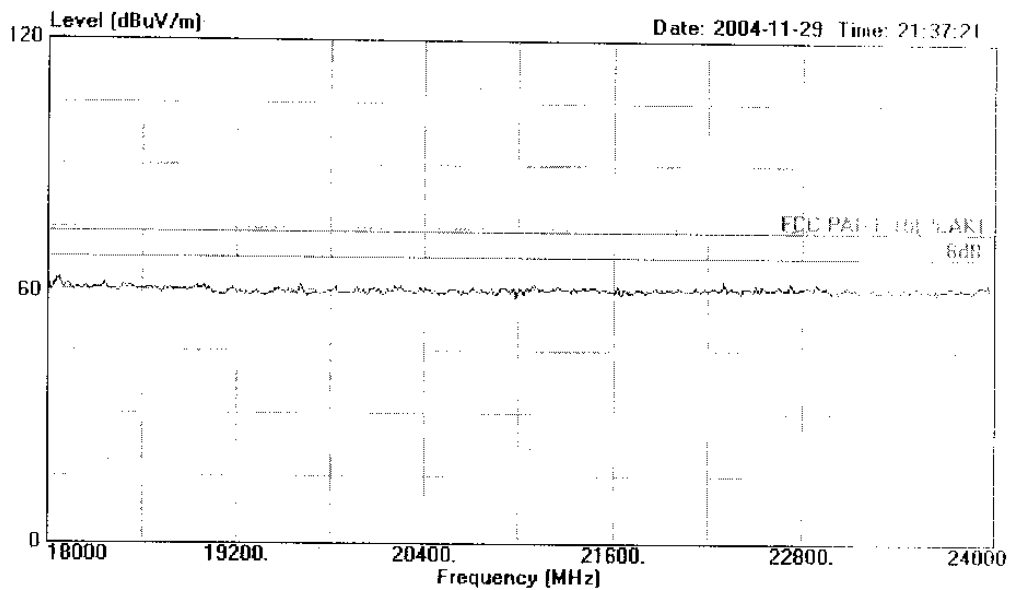

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp: 24° Humi: 54%  
: TX Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 83 File#: C:\EMI TEST DATA\04Roule.EMI

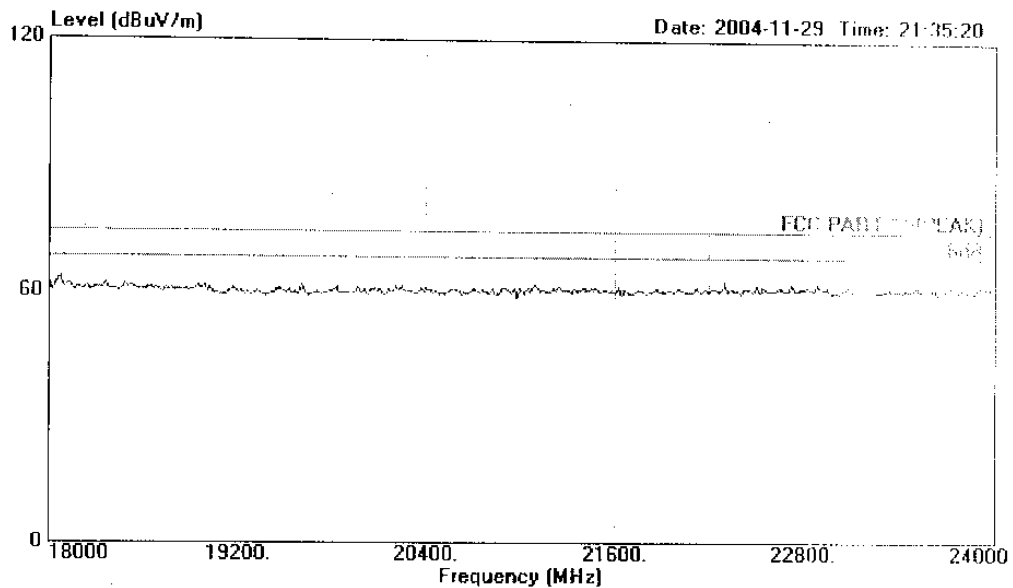

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
: TX Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 85 File#: C:\EMI TEST DATA\O\Roule.EMI

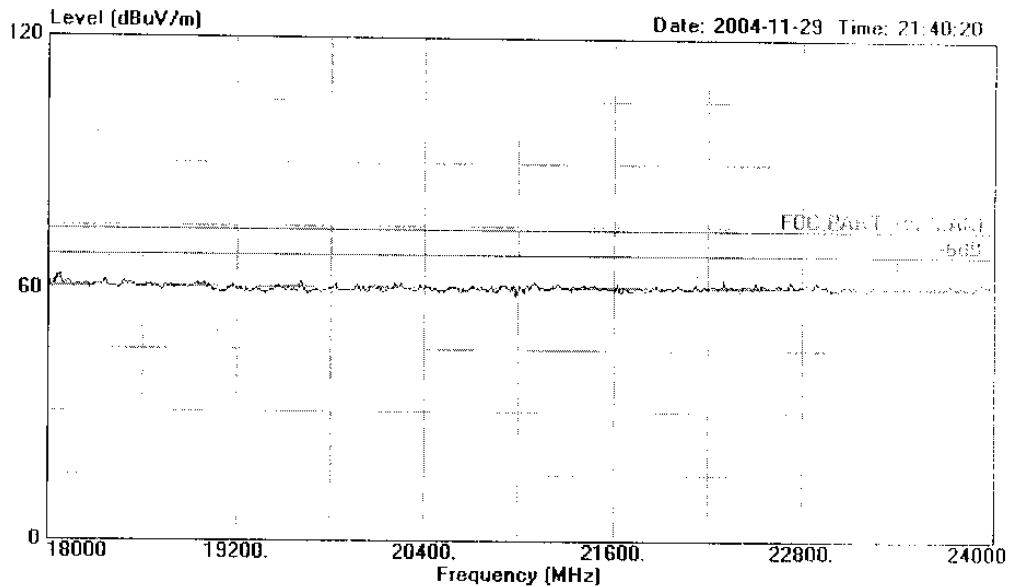

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Soco  
Memo : Temp:24° Humi:54%  
: TX Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,  
Shenzhen Science & Industry Park  
Mantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 86 File#: C:\EMI TEST DATA\O\Roule.EMI

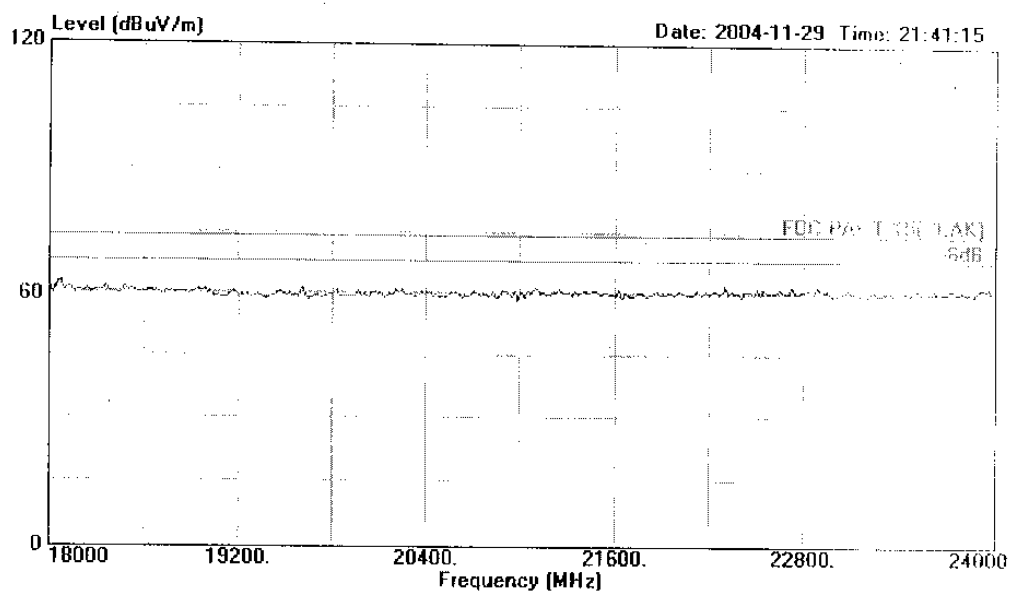

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Mantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 88 File#: C:\EMI TEST DATA\O\Roule.EMI

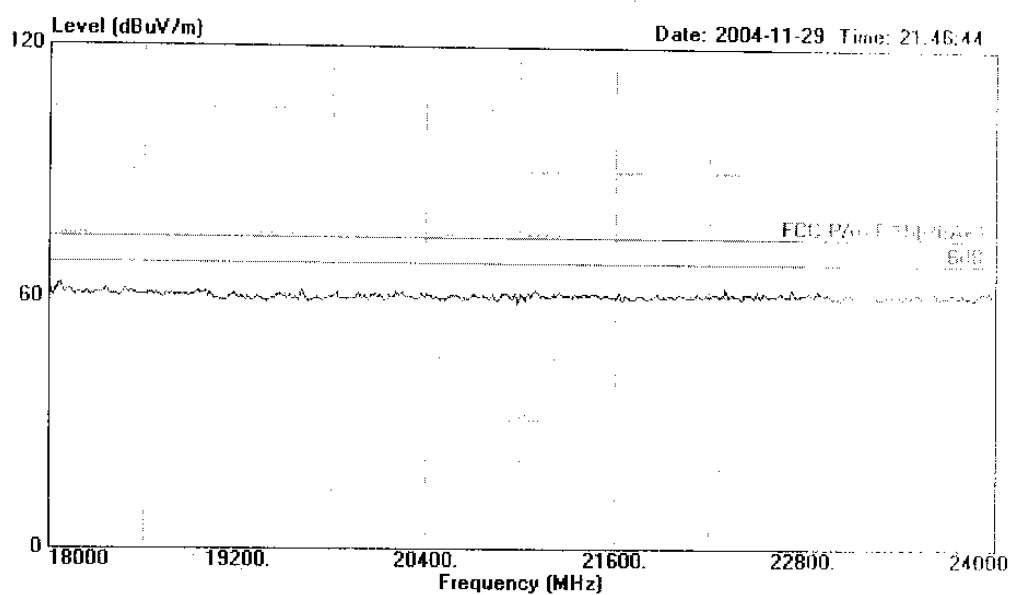

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24' Humi:54%  
: TX Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 87 File#: C:\EMI TEST DATA\O\Roule.EMI

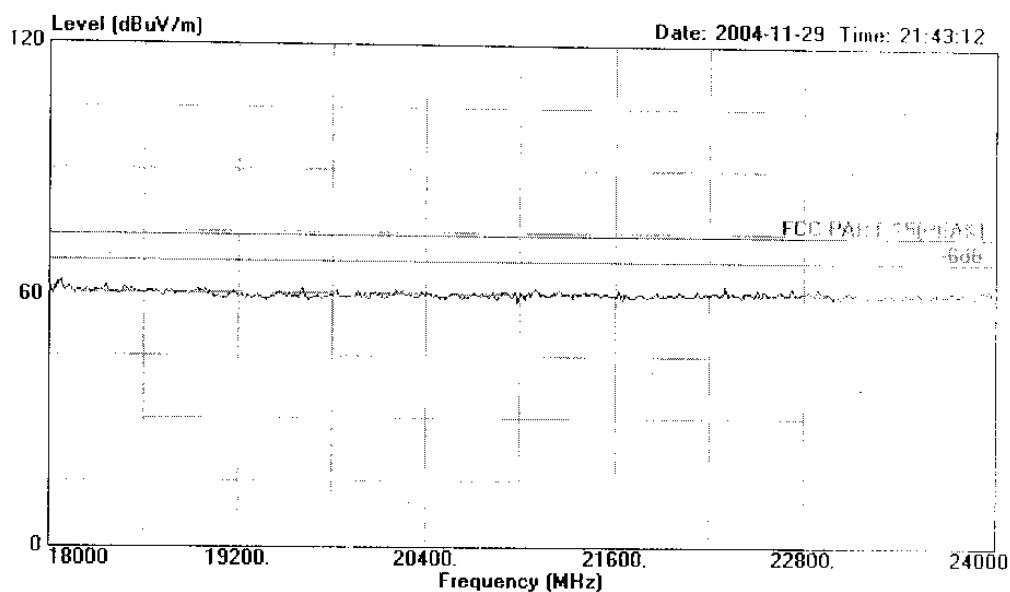

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632677

Data#: 89 File#: C:\EMI TEST DATA\O\Boule.EMI

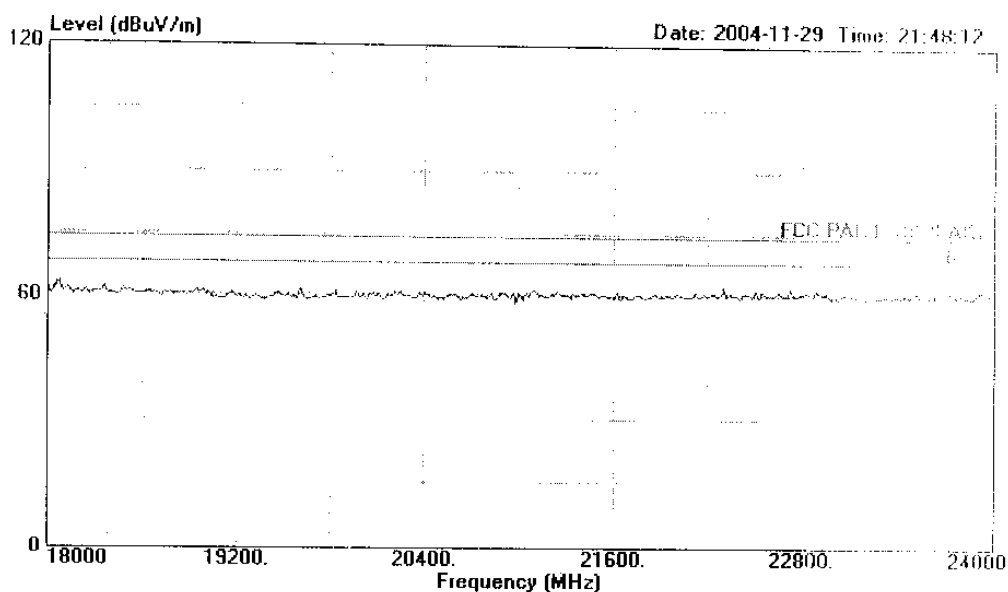

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 90 File#: C:\EMI TEST DATA\O\Boule.EMI

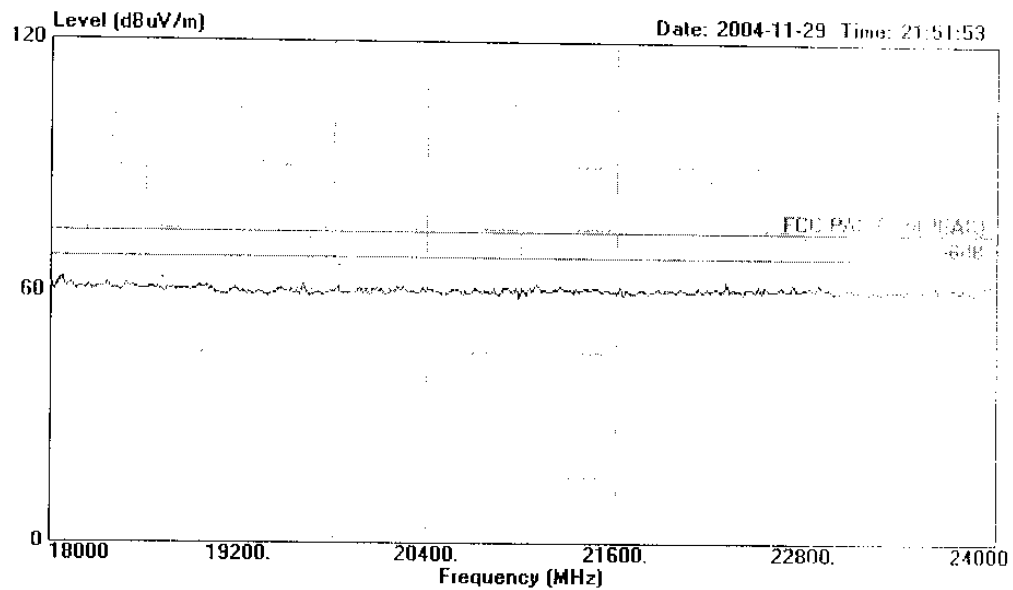

Site : 1# Chamber  
Condition : FCC PART 15 (PEAK) 3m 311SFACITOR VERTICAL  
EUT : monitor  
M/N : RL-01CRT  
Power : DC 9V With Adaptor AC Input 120V/60Hz  
Test Engineer : Seco  
Memo : Temp:24° Humi:54%  
: TX Channel 4