


Attachment - C

Hopping Channel Carrier Frequency Separated

Hopping Channel Carrier Frequency Separated

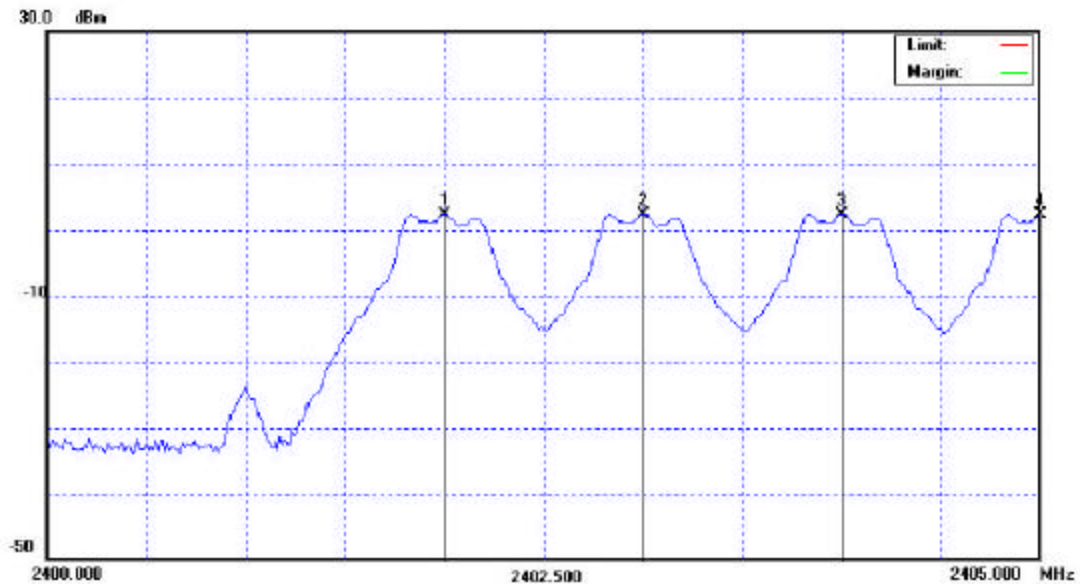

Site CB03

Polarization:

Temperature: 25 °C

Limit:

Power:

Humidity: 60 %

EUT: Bluetooth Headset

Distance:

RBW: 100 KHz

Air Pressure: 1023 hpa

M/N: WDT-JD-100

VBW: 100 KHz

Sweep Time: 20 ms

Mode: Hopping Channel Carrier Frequency Separation

Note:


No.	Mk.	Freq. MHz	Reading Level dBm	Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		2402.000	2.32	0.00	2.32					peak	
2	*	2403.000	2.34	0.00	2.34					peak	
3		2404.000	2.33	0.00	2.33					peak	
4		2405.000	2.31	0.00	2.31					peak	



Attachment - D

Number of Hopping Channel

Number of Hopping Channel

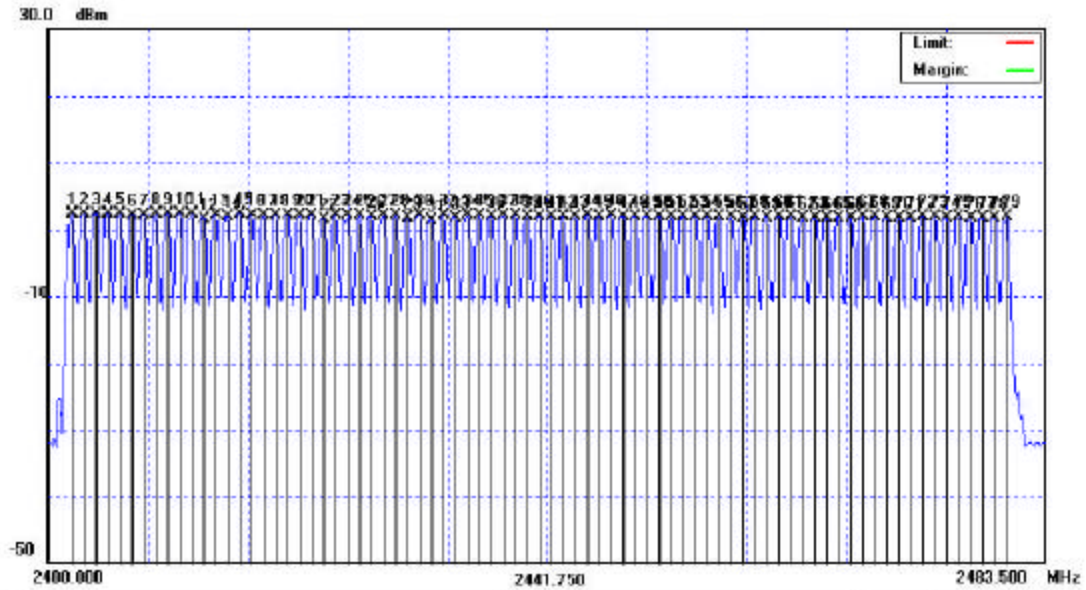

Site CB03

Polarization:

Temperature: 25 °C

Limit:

Power:

Humidity: 60 %

EUT: Bluetooth Headset

Distance:

RBW: 100 KHz

Air Pressure: 1023 hpa

M/N: WDT-JD-100

VBW: 100 KHz

Sweep Time: 200 ms

Mode: Number of Hopping Frequency

Note:

No.	Mk.	Freq.	Reading	Factor	Measure-	Limit	Over	Antenna	Table	
		MHz	dBm	dB	ment	dBm	dB	Height	Degree	
					dBm			cm	degree	Comment
1		2402.004	2.37	0.00	2.37			peak		
2		2403.000	2.32	0.00	2.32			peak		
3		2404.000	2.37	0.00	2.37			peak		
4	*	2405.000	2.39	0.00	2.39			peak		
5		2406.000	2.26	0.00	2.26			peak		
6		2407.000	2.10	0.00	2.10			peak		
7		2408.000	2.12	0.00	2.12			peak		
8		2409.000	2.26	0.00	2.26			peak		
9		2410.000	2.26	0.00	2.26			peak		
10		2411.000	2.22	0.00	2.22			peak		
11		2412.000	2.24	0.00	2.24			peak		
12		2413.000	1.51	0.00	1.51			peak		


No. Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
	MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree
13	2414.000	2.18	0.00	2.18			peak		
14	2415.000	1.99	0.00	1.99			peak		
15	2416.000	2.22	0.00	2.22			peak		
16	2417.000	2.18	0.00	2.18			peak		
17	2418.000	2.18	0.00	2.18			peak		
18	2419.000	2.08	0.00	2.08			peak		
19	2420.000	2.16	0.00	2.16			peak		
20	2421.000	2.18	0.00	2.18			peak		
21	2422.000	2.20	0.00	2.20			peak		
22	2423.000	1.59	0.00	1.59			peak		
23	2424.000	2.15	0.00	2.15			peak		
24	2425.000	2.13	0.00	2.13			peak		
25	2426.000	2.14	0.00	2.14			peak		
26	2427.000	1.99	0.00	1.99			peak		
27	2428.000	2.09	0.00	2.09			peak		
28	2429.000	2.07	0.00	2.07			peak		
29	2430.000	1.71	0.00	1.71			peak		
30	2431.000	2.08	0.00	2.08			peak		
31	2432.000	1.37	0.00	1.37			peak		
32	2433.000	2.08	0.00	2.08			peak		
33	2434.000	1.80	0.00	1.80			peak		
34	2435.000	2.05	0.00	2.05			peak		
35	2436.000	2.04	0.00	2.04			peak		
36	2437.000	1.99	0.00	1.99			peak		
37	2438.000	2.03	0.00	2.03			peak		
38	2439.000	2.02	0.00	2.02			peak		
39	2440.000	1.89	0.00	1.89			peak		
40	2441.000	1.95	0.00	1.95			peak		
41	2442.000	1.96	0.00	1.96			peak		
42	2443.000	1.96	0.00	1.96			peak		
43	2444.000	1.98	0.00	1.98			peak		

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree	Comment
44		2445.000	2.03	0.00	2.03			peak			
45		2446.000	2.00	0.00	2.00			peak			
46		2447.000	2.02	0.00	2.02			peak			
47		2448.000	1.95	0.00	1.95			peak			
48		2449.000	1.98	0.00	1.98			peak			
49		2450.000	1.92	0.00	1.92			peak			
50		2451.000	1.98	0.00	1.98			peak			
51		2452.000	1.97	0.00	1.97			peak			
52		2453.000	1.94	0.00	1.94			peak			
53		2454.000	1.93	0.00	1.93			peak			
54		2455.000	1.89	0.00	1.89			peak			
55		2456.000	1.86	0.00	1.86			peak			
56		2457.000	1.84	0.00	1.84			peak			
57		2458.000	1.79	0.00	1.79			peak			
58		2459.000	1.83	0.00	1.83			peak			
59		2460.000	1.79	0.00	1.79			peak			
60		2461.000	1.84	0.00	1.84			peak			
61		2462.000	1.82	0.00	1.82			peak			
62		2463.000	1.80	0.00	1.80			peak			
63		2464.000	1.73	0.00	1.73			peak			
64		2465.000	1.80	0.00	1.80			peak			
65		2466.000	1.79	0.00	1.79			peak			
66		2467.000	1.80	0.00	1.80			peak			
67		2468.000	1.83	0.00	1.83			peak			
68		2469.000	1.86	0.00	1.86			peak			
69		2470.000	1.76	0.00	1.76			peak			
70		2471.000	1.74	0.00	1.74			peak			
71		2472.000	1.79	0.00	1.79			peak			
72		2473.000	1.88	0.00	1.88			peak			
73		2474.000	1.83	0.00	1.83			peak			
74		2475.000	1.79	0.00	1.79			peak			
75		2476.000	1.84	0.00	1.84			peak			
76		2477.000	1.79	0.00	1.79			peak			
77		2478.000	1.75	0.00	1.75			peak			
78		2479.000	1.77	0.00	1.77			peak			
79		2480.160	1.82	0.00	1.82			peak			

Attachment - E

Average Time of Occupancy

Average Time of Occupancy

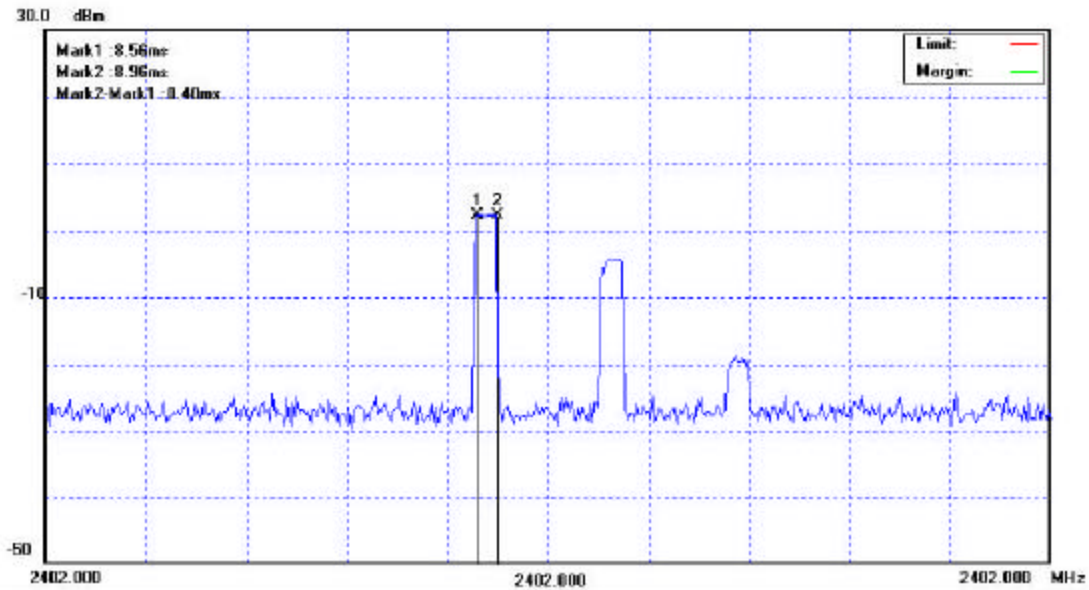

Site CB03

Polarization:

Temperature: 25 °C

Limit:

Power:

Humidity: 60 %

EUT: Bluetooth Headset

Distance:

RBW: 1000 KHz

Air Pressure: 1023 hpa

M/N: WDT-JD-100

VBW: 1000 KHz

Sweep Time: 20 ms

Mode: Average Timeof Occupancy

Note:

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1		8.5600	2.24	0.00	2.24			peak		
2	*	8.9600	2.37	0.00	2.37			peak		




Attachment - F

Bandwidth

Bandwidth

CH 1

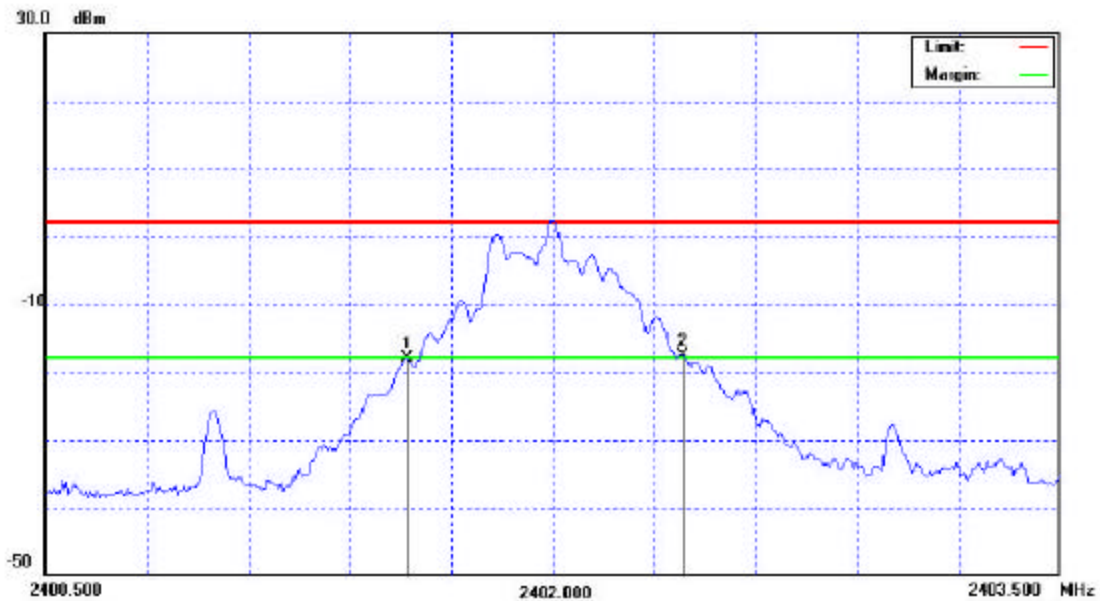

Site CB03

Polarization:

Temperature: 25 °C

Limit:

Power:

Humidity: 60 %

EUT: Bluetooth Headset

Distance:

RBW: 30 KHz

Air Pressure: 1023 hpa

M/N: WDT-JD-100

VBW: 30 KHz


Sweep Time: 20 ms

Mode: Channel Bandwidth-CH1

Note: 2402.384MHz-2401.568MHz=816kHz

No.	Mk.	Freq. MHz	Reading Level dBm	Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2401.568	-17.99	0.00	-17.99	2.27	-20.26	peak		
2	*	2402.384	-17.53	0.00	-17.53	2.33	-19.86	peak		

CH 40

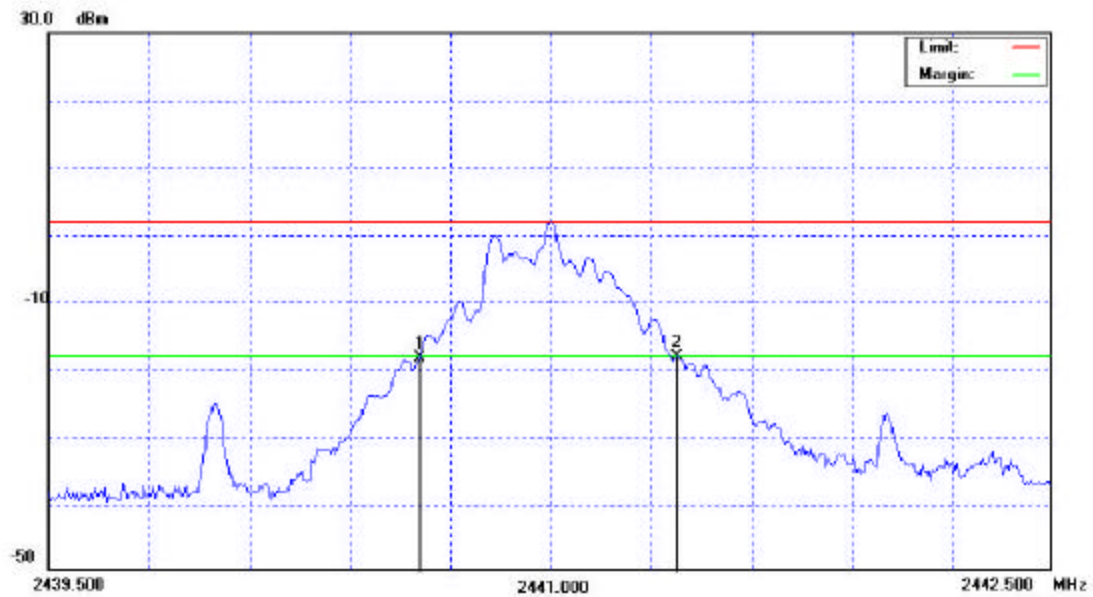

Site CB03

Polarization:

Temperature: 25 °C

Limit:

Power:

Humidity: 60 %

EUT: Bluetooth Headset

Distance:

RBW: 30 KHz

Air Pressure: 1023 hpa

M/N: WDT-JD-100

VBW: 30 KHz


Sweep Time: 20 ms

Mode: Channel Bandwidth-CH40

Note: 2441.378MHz-2440.61MHz=768kHz

No.	Mk.	Freq. MHz	Reading Level dBm	Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		2440.610	-18.36	0.00	-18.36	2.00	-20.36			peak	
2	*	2441.378	-18.02	0.00	-18.02	2.00	-20.02			peak	

CH 79

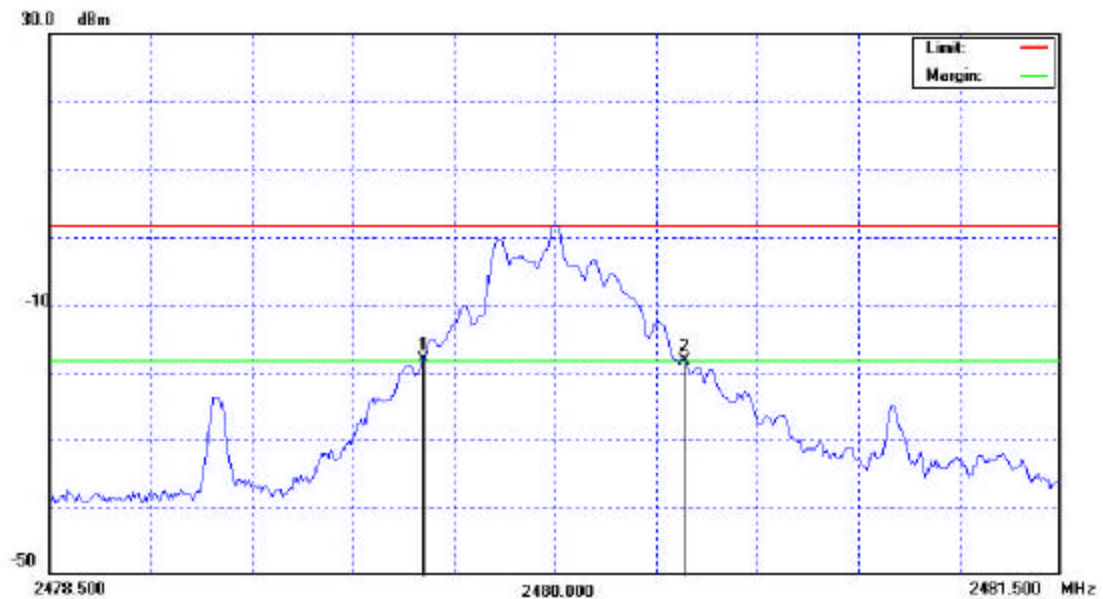

Site CB03
Limit:
EUT: Bluetooth Headset
M/N: WDT-JD-100
Mode: Channel Bandwidth-CH79
Note: 2480.384MHz-2479.61MHz=774kHz

Polarization:
Power:
Distance: RBW: 30 KHz
VBW: 30 KHz

Temperature: 25 °C
Humidity: 60 %
Air Pressure: 1023 hpa
Sweep Time: 20 ms


No.	Mk.	Freq. MHz	Reading Level dBm	Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	2479.610	-18.18	0.00	-18.18	1.67	-19.85			peak	
2	!	2480.384	-18.23	0.00	-18.23	1.73	-19.96			peak	

Attachment - G

Peak Output Power

Peak Output Power

CH 1

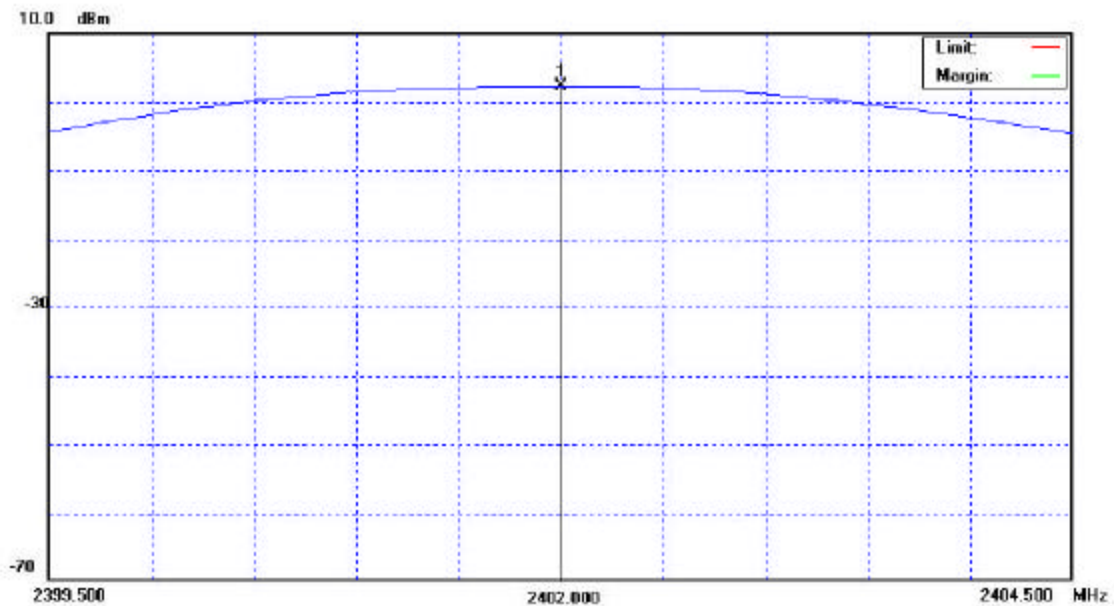

Site: CB03

Polarization:

Temperature: 25 °C

Limit:

Power:

Humidity: 60 %

EUT: Bluetooth Headset

Distance:

RBW: 3000 KHz

Air Pressure: 1023 hpa

M/N: WDT-JD-100

VBW: 3000 KHz


Sweep Time: 200 ms

Mode: Peak Output Power-CH1

Note:

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	Detector	cm	degree
1	*	2402.000	2.39	0.00	2.39			peak		Comment

CH 40

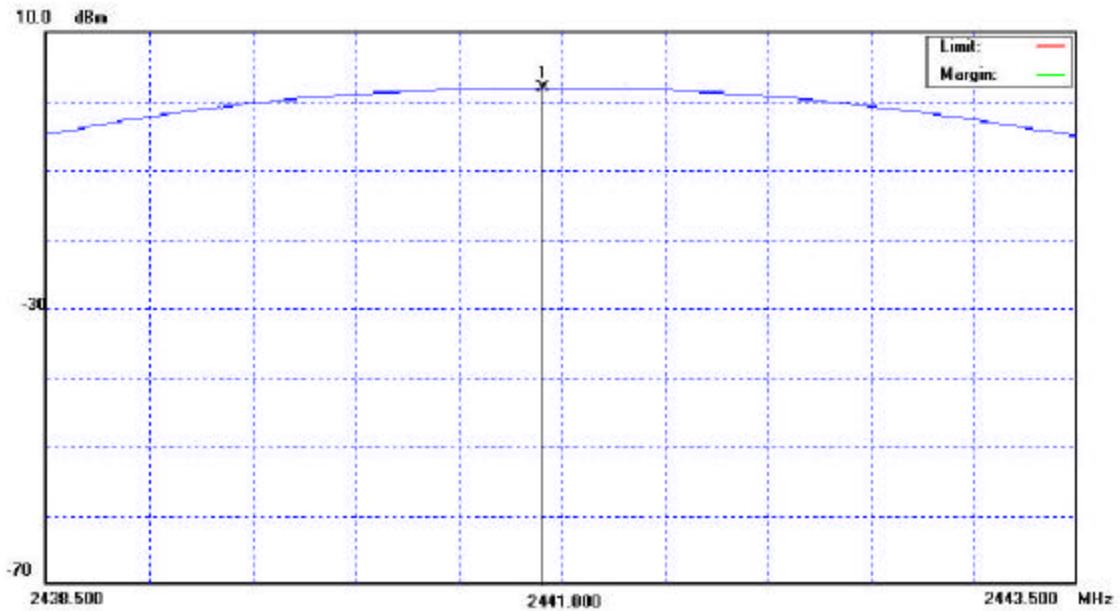

Site CB03

Polarization:

Temperature: 25 °C

Limit:

Power:

Humidity: 60 %

EUT: Bluetooth Headset

Distance:

RBW: 3000 KHz

Air Pressure: 1023 hpa

M/N: WDT-JD-100

VBW: 3000 KHz


Sweep Time: 200 ms

Mode: Peak Output Power-CH40

Note:

No.	Mk.	Freq.	Reading	Factor	Measure-	Limit	Over	Antenna	Table	
		MHz	Level		ment			Height	Degree	
			dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	2440.910	1.96	0.00	1.96			peak		

CH 79

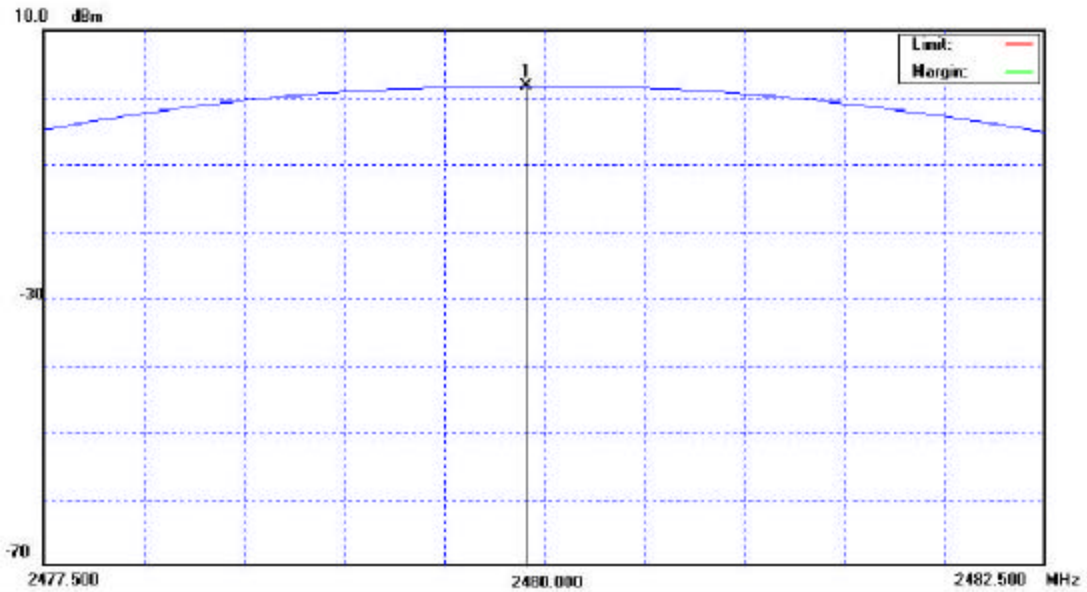

Site CB03
Limit:
EUT: Bluetooth Headset
M/N: WDT-JD-100
Mode: Peak Output Power-CH79
Note:


Polarization:
Power:
Distance: RBW: 3000 KHz
VBW: 3000 KHz
Temperature: 25 °C
Humidity: 60 %
Air Pressure: 1023 hpa
Sweep Time: 200 ms

No.	Mk.	Freq.	Reading	Factor	Measure-	Limit	Over	Antenna	Table	
		MHz	Level		ment			Height	Degree	
			dBm	dB	dBm	dBm	dB	Detector	cm	degree
1	*	2479.910	1.72	0.00	1.72			peak		Comment

Attachment - H

Antenna conducted Spurious Emission

Antenna conducted Spurious Emission

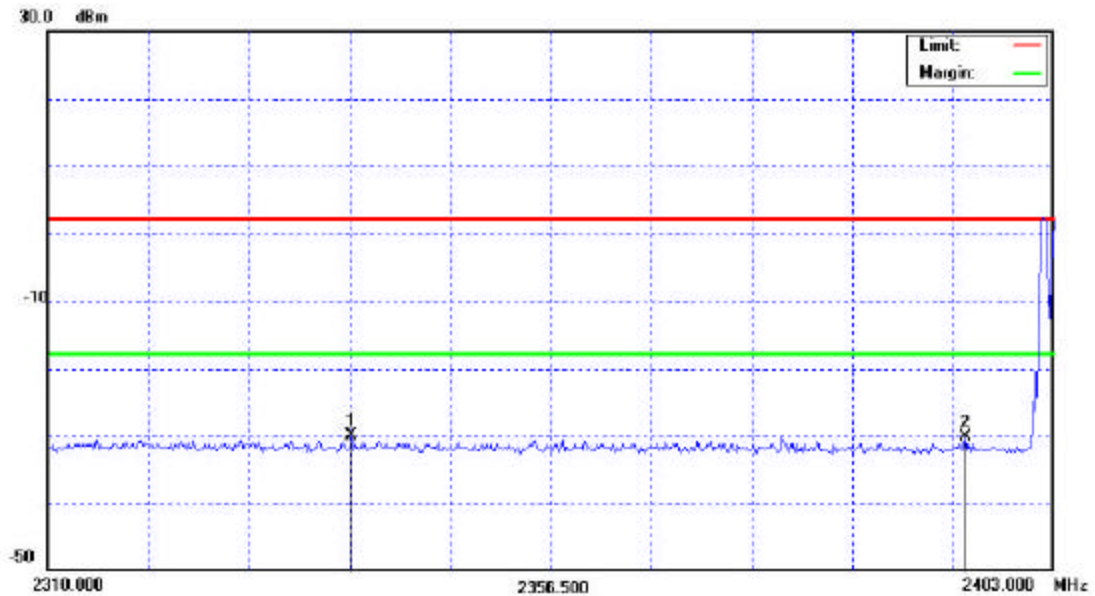

Site CB03

Polarization:

Temperature: 25 °C

Limit:

Power:

Humidity: 60 %

EUT: Bluetooth Headset

Distance:

RBW: 100 KHz

Air Pressure: 1023 hpa

M/N: WDT-JD-100


VBW: 100 KHz

Sweep Time: 100 ms

Mode: 100kHz Bandwidth of Frequency Band Edges

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	2338.086	-29.99	0.00	-29.99	2.20	-32.19	peak			
2		2394.816	-30.15	0.00	-30.15	2.20	-32.35	peak			

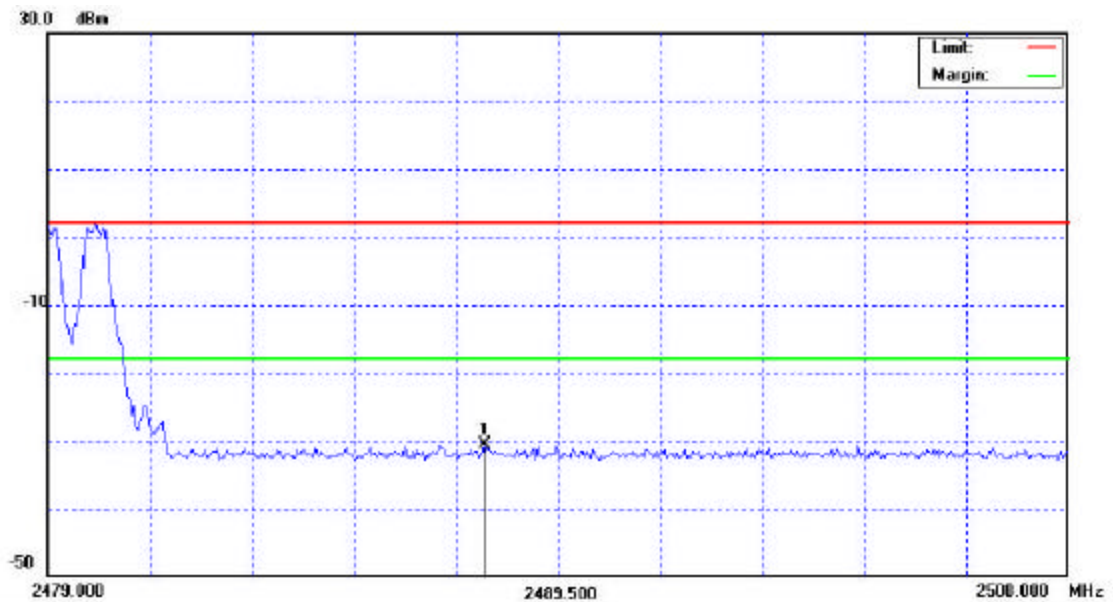

Site CB03

Limit:

EUT: Bluetooth Headset

M/N: WDT-JD-100

Mode: 100kHz Bandwidth of Frequency Band Edges

Note:

Polarization:

Power:

Distance:

RBW: 100 KHz

VBW: 100 KHz

Temperature: 25 °C

Humidity: 60 %

Air Pressure: 1023 hpa


Sweep Time: 100 ms

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBm	dB	dBm	dBm	dB	cm	degree	Comment
1	*	2487.988	-30.52	0.00	-30.52	2.20	-32.72	peak		

Attachment - I

Restricted Bands Requirements

Restricted Bands Requirements

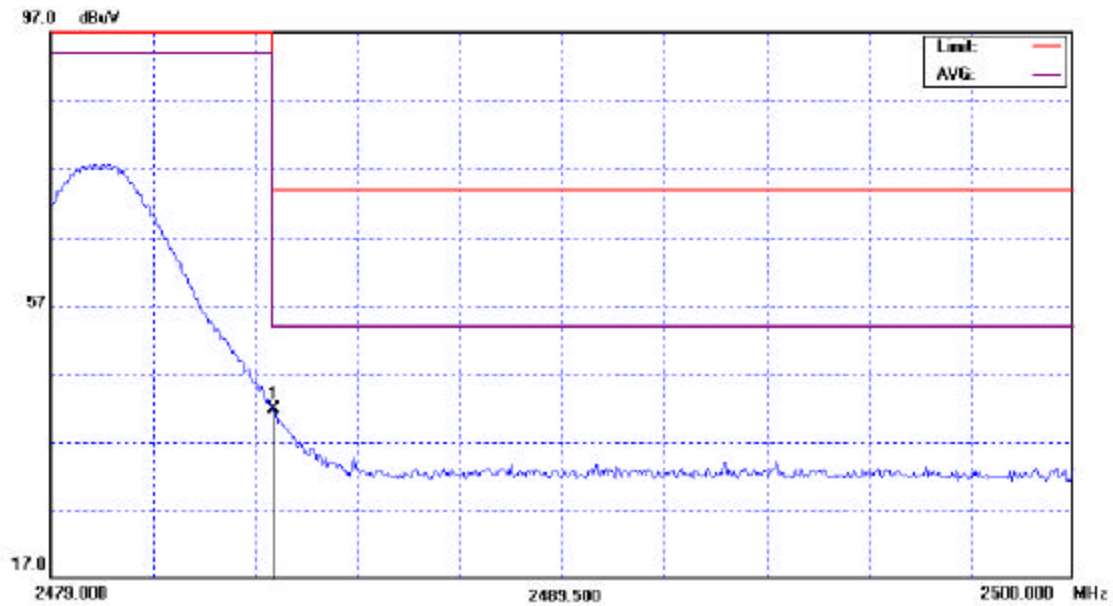

Site CB03

Limit: RF2.4G Radiation(PEAK)

EUT: Bluetooth Headset

M/N: WDT-JD-100

Mode: Restricted Bands Requirements

Note:

Polarization: *Vertical*

Power:


Distance: 3m

Temperature: 25 °C

Humidity: 60 %

Air Pressure: 1023 hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	2483.578	53.32	-11.44	41.88	74.00	-32.12	peak	

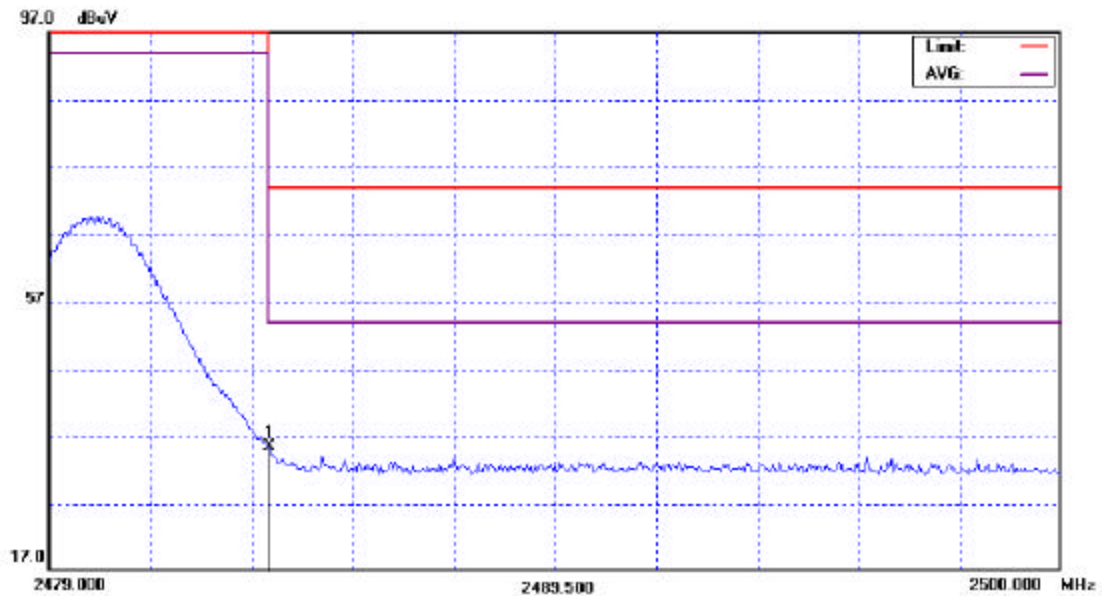

Site CB03

Polarization: *Horizontal*

Temperature: 25 °C

Limit: RF2.4G Radiation(PEAK)

Power:

Humidity: 60 %

EUT: Bluetooth Headset

Distance: 3m


Air Pressure: 1023 hpa

M/N: WDT-JD-100

Mode: Restricted Bands Requirements

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	2483.578	46.92	-11.44	35.48	74.00	-38.52	peak	

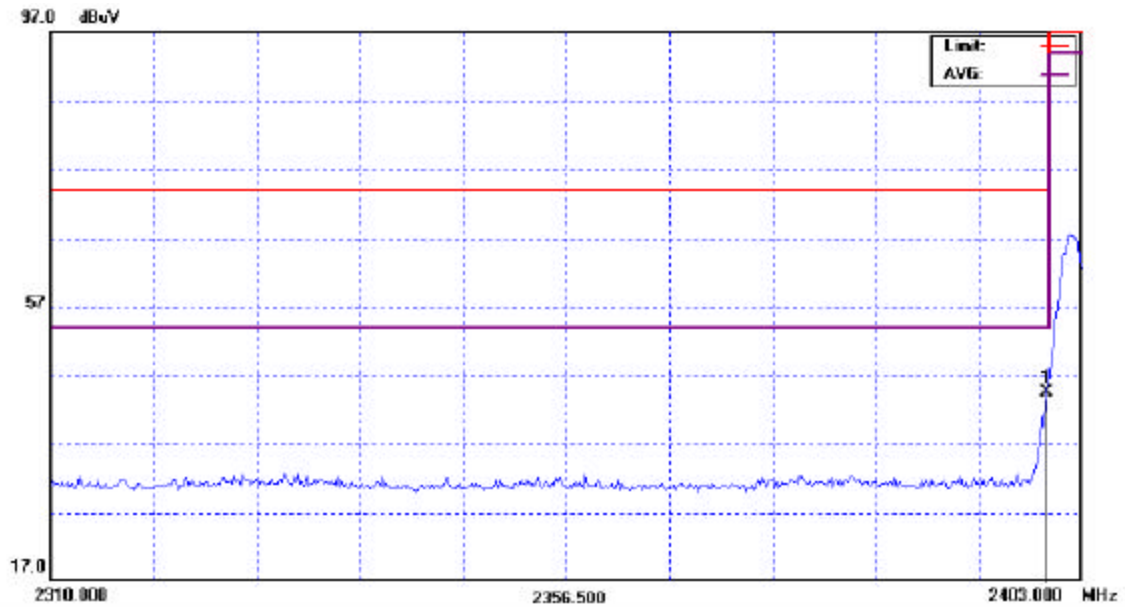


Site: CB03
Limit: RF2.4G Radiation(PEAK)
EUT: Bluetooth Headset
M/N: WDT-JD-100
Mode: Restricted Bands Requirements
Note:

Polarization: *Vertical*
Power:
Distance: 3m

Temperature: 25 °C
Humidity: 60 %
Air Pressure: 1023 hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	2399.838	56.38	-11.89	44.49	74.00	-29.51	peak	

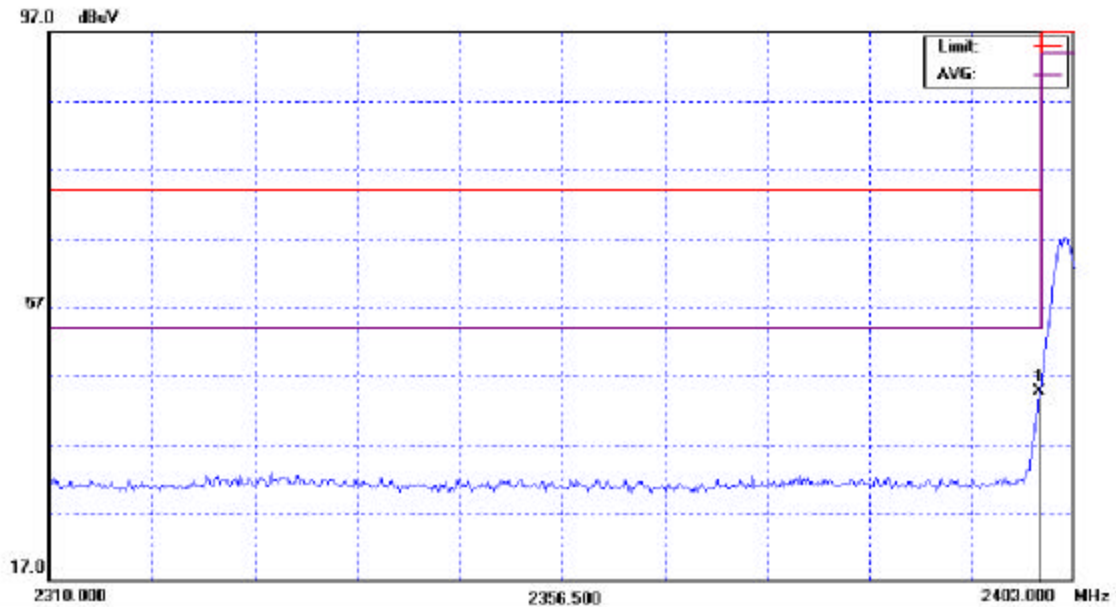

Site CB03

Limit: RF2.4G Radiation(PEAK)

EUT: Bluetooth Headset

M/N: WDT-JD-100

Mode: Restricted Bands Requirements

Note:

Polarization: *Horizontal*

Power:

Distance: 3m

Temperature: 25 °C

Humidity: 60 %

Air Pressure: 1023 hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	2399.838	56.54	-11.89	44.65	74.00	-29.35	peak	