



RF MEASUREMENT REPORT

FCC ID: SVC-BLSP43B

Applicant: Lenbrook Industries Limited

Product: Wireless Streaming Sound System

Model No.: PULSE SOUNDBAR+

Brand Name: BLUESOUND

FCC Classification: FCC Part 15 Spread Spectrum Transmitter (DSS)

FCC Rule Part(s): Part15 Subpart C (Section 15.247)

Result: Complies

Test Date: 2021-07-29 ~ 2022-02-25

Reviewed By:

Kevin Guo

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2105RSU032-U1	Rev. 01	Initial Report	2022-08-01	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification	7
1.6. Working Frequencies	8
1.7. Pseudorandom Frequency Hopping Sequence	9
1.8. Description of Operating Paths	10
2. Test Configuration	11
2.1. Test Mode	11
2.2. Test System Connection Diagram	11
2.3. Test Software	11
2.4. Power Setting	12
2.5. Applied Standards	12
2.6. Test Environment Condition	12
3. Antenna Requirement	13
4. Measuring Instrument	14
5. Decision Rules and Measurement Uncertainty	16
5.1. Decision Rules	16
5.2. Measurement Uncertainty	16
6. Test Result	17
6.1. Summary	17
6.2. Occupied Bandwidth	18
6.2.1. Test Limit	18
6.2.2. Test Procedure used	18
6.2.3. Test Setting	18
6.2.4. Test Setup	18
6.2.5. Test Result	18
6.3. Output Power	19
6.3.1. Test Limit	19
6.3.2. Test Procedure Used	19
6.3.3. Test Setting	19
6.3.4. Test Setup	19
6.3.5. Test Result	19
6.4. Carrier Frequency Separation	20

6.4.1.	Test Limit	20
6.4.2.	Test Procedure Used	20
6.4.3.	Test Setting	20
6.4.4.	Test Setup	20
6.4.5.	Test Result	20
6.5.	Number of Hopping Channels	21
6.5.1.	Test Limit	21
6.5.2.	Test Procedure Used	21
6.5.3.	Test Settintg	21
6.5.4.	Test Setup	21
6.5.5.	Test Result	21
6.6.	Time of Occupancy Measurement	22
6.6.1.	Test Limit	22
6.6.2.	Test Procedure Used	22
6.6.3.	Test Settintg	22
6.6.4.	Test Setup	22
6.6.5.	Test Result	22
6.7.	Band-edge Compliance	23
6.7.1.	Test Limit	23
6.7.2.	Test Procedure Used	23
6.7.3.	Test Setting	23
6.7.4.	Test Setup	23
6.7.5.	Test Result	24
6.8.	Conducted Spurious Emissions	25
6.8.1.	Test Limit	25
6.8.2.	Test Procedure Used	25
6.8.3.	Test Setting	25
6.8.4.	Test Setup	26
6.8.5.	Test Result	26
6.9.	Radiated Spurious Emission	27
6.9.1.	Test Limit	27
6.9.2.	Test Procedure Used	27
6.9.3.	Test Setting	27
6.9.4.	Test Setup	29
6.9.5.	Test Result	29
6.10.	Radiated Restricted Band Edge	30
6.10.1.	Test Limit	30
6.10.2.	Test Procedure Used	31
6.10.3.	Test Setting	31

6.10.4. Test Setup	32
6.10.5. Test Result	32
6.11. AC Conducted Emissions	33
6.11.1. Test Limit	33
6.11.2. Test Setup	33
6.11.3. Test Result	33
Appendix A - Test Result.....	34
A.1 Duty Cycle Test Result	34
A.2 20dB Bandwidth Test Result	35
A.3 Output Power Test Result	37
A.4 Carrier Frequency Separation Test Result.....	40
A.5 Number of Hopping Channels Test Result.....	43
A.6 Time of Occupancy Test Result	45
A.7 Band-edge Compliance Test Result.....	48
A.8 Conducted Spurious Emissions Test Result	51
A.9 Radiated Spurious Emission Test Result.....	55
A.10 Radiated Restricted Band Edge Test Result.....	60
A.11 AC Conducted Emissions Test Result	84
Appendix B - Test Setup Photograph	86
Appendix C - EUT Photograph	87

1. General Information

1.1. Applicant

Lenbrook Industries Limited
633 Granite Court Pickering, L1W 3K1 Canada

1.2. Manufacturer

Lenbrook Industries Limited
633 Granite Court Pickering, L1W 3K1 Canada

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Wireless Streaming Sound System
Model No.	PULSE SOUNDBAR+
Serial No.	H211P430BP01023, H215P430B04504, H211P430BP01011
Wi-Fi Specification	802.11a/b/g/n/ac
Bluetooth Specification	V4.2 single mode for BR/EDR
Working Voltage	AC100-240V ~ 50/60Hz, 80W
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification

Operating Frequency	2402 ~ 2480MHz
Channel Number	79
Type of modulation	GFSK, Pi/4 DQPSK, 8DPSK
Data Rate	1Mbps, 2Mbps, 3Mbps
Antenna Type	PIFA Antenna
Antenna Gain	0dBi

Note:

1. For other features of this EUT, test report will be issued separately.
 2. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
 - 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
 - 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.


1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz
03	2405 MHz	04	2406 MHz	05	2407 MHz
06	2408 MHz	07	2409 MHz	08	2410 MHz
09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz
15	2417 MHz	16	2418 MHz	17	2419 MHz
18	2420 MHz	19	2421 MHz	20	2422 MHz
21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz
27	2429 MHz	28	2430 MHz	29	2431 MHz
30	2432 MHz	31	2433 MHz	32	2434 MHz
33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz
39	2441 MHz	40	2442 MHz	41	2443 MHz
42	2444 MHz	43	2445 MHz	44	2446 MHz
45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz
51	2453 MHz	52	2454 MHz	53	2455 MHz
54	2456 MHz	55	2457 MHz	56	2458 MHz
57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz
63	2465 MHz	64	2466 MHz	65	2467 MHz
66	2468 MHz	67	2469 MHz	68	2470 MHz
69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz
75	2477 MHz	76	2478 MHz	77	2479 MHz
78	2480 MHz	-	-	-	-

1.7. Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

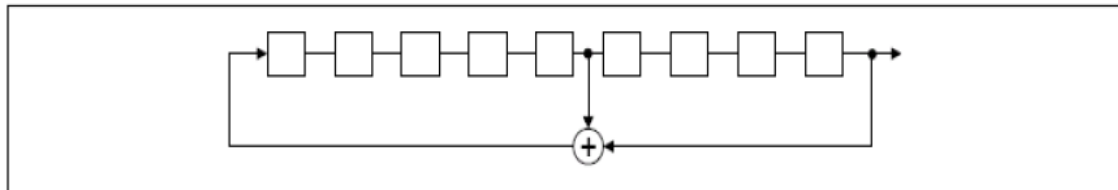

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

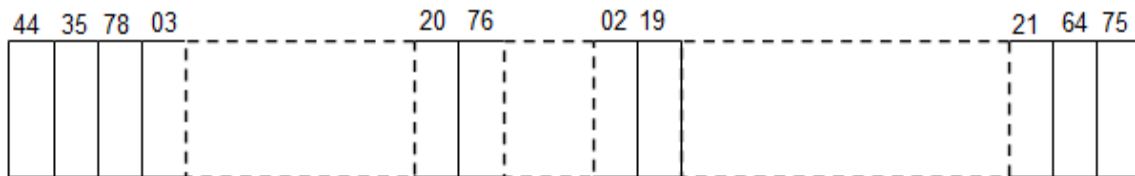


Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

1.8. Description of Operating Paths

Operating Mode	Radio 1 (CSR8675)	Radio 2 (19SoM with FC20)	Radio 3 (FC20)
DSS (2402 ~ 2480MHz)	√	×	×
DTS (2412 ~ 2462MHz)	×	√	√
NII (5180 ~ 5240MHz)	×	√	√
NII (5260 ~ 5320MHz)	×	√	×
NII (5500 ~ 5720MHz)	×	√	×
NII (5745 ~ 5825MHz)	×	√	√

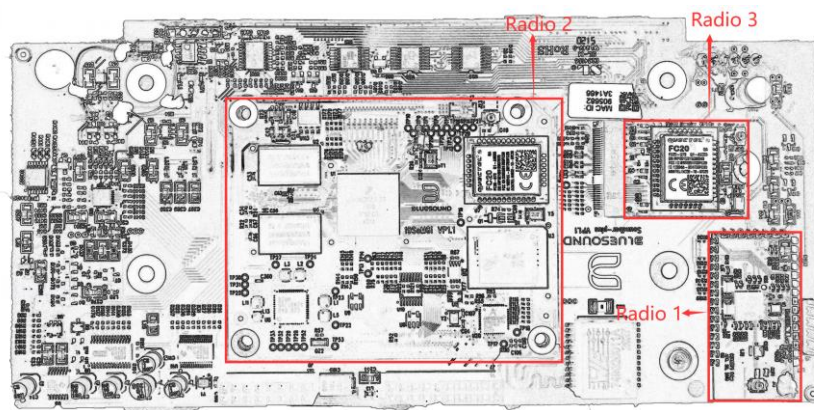

Remark:

1. “√” means “Support”, “X” means “Not support”.
2. Radio 1, Radio 2 and Radio 3 can transmit simultaneously, but Radio 2 and Radio 3 will not work at the same frequency, such as Radio 2 works at Wi-Fi 2.4G, Radio will work at Wi-Fi 5G automatically at this time.
3. Wi-Fi 2.4G and 5G of Radio 2 or Radio 3 cannot transmit simultaneously.


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by DH5
Mode 2: Transmit by 2DH5
Mode 3: Transmit by 3DH5

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

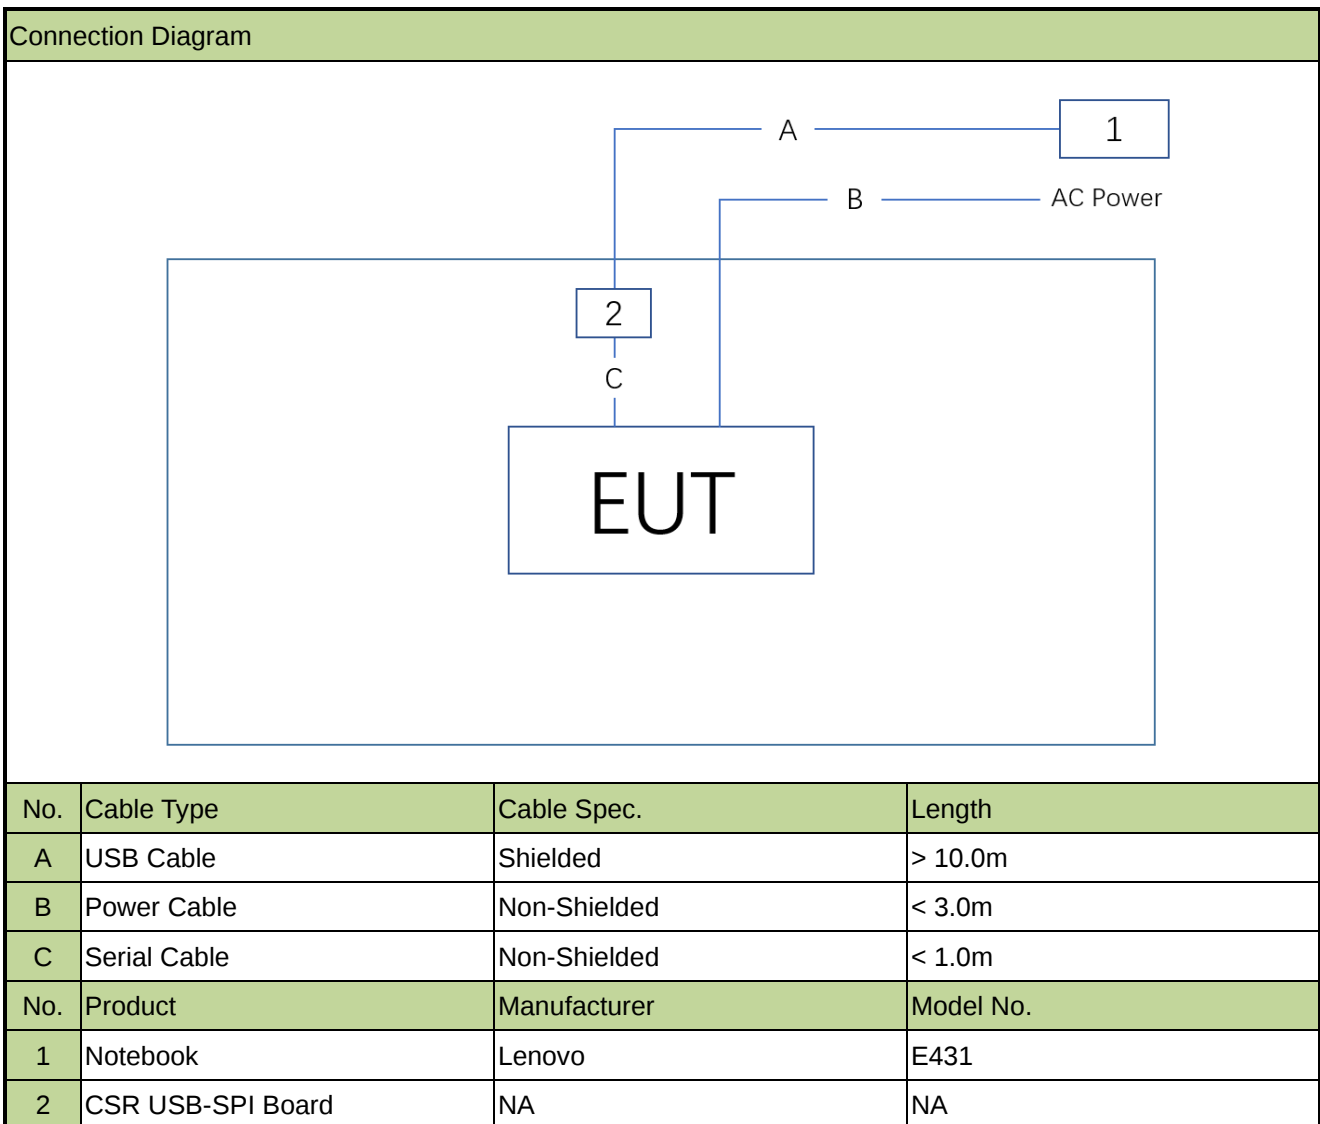

2.3. Test Software

The test utility software used during testing was “BlueTest3”, and the version was 2.5.0

2.4. Power Setting

Test Mode	Channel No.	Frequency (MHz)	Power Setting
DH5	00	2402	Default (50)
	39	2441	Default (50)
	78	2480	Default (50)
2DH5	00	2402	Default (50)
	39	2441	Default (50)
	78	2480	Default (50)
3DH5	00	2402	Default (50)
	39	2441	Default (50)
	78	2480	Default (50)

2.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.6. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~75 %RH

3. Antenna Requirement

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022-12-29	WZ-AC1
				1 year	2021-12-31	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2022-06-21	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2022-04-21	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2022-06-06	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022-12-29	WZ-AC1
				1 year	2021-12-31	WZ-AC1
Thermohygrometer	testo	Testo 608-H1	MRTSUE11039	1 year	2022-11-11	WZ-AC1
				1 year	2021-11-15	WZ-AC1
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2022-10-28	WZ-AC1
				1 year	2021-10-30	WZ-AC1
Horn Antenna	ETS	3117	MRTSUE06257	1 year	2022-09-25	WZ-AC2
				1 year	2022-09-28	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022-12-01	WZ-AC2
				1 year	2021-12-05	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2023-01-13	WZ-AC2
				1 year	2022-01-16	WZ-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2022-09-09	WZ-AC2
				1 year	2021-09-11	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2022-12-01	WZ-AC2
				1 year	2021-12-04	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2022-10-21	WZ-AC2
				1 year	2021-10-24	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2022-11-12	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2022-04-21	WZ-AC2
Thermohygrometer	testo	Testo 608-H1	MRTSUE11038	1 year	2022-11-11	WZ-AC2
				1 year	2021-11-15	WZ-AC2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2022-06-04	WZ-SR2
CDN	Teseq	ISN PLT-A	MRTSUE06007	1 year	2022-03-28	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2022-06-06	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2022-11-01	WZ-SR2
				1 year	2021-11-09	WZ-SR2
USB Power Sensor	Agilent	U2021XA	MRTSUE06030	1 year	2022-10-10	WZ-SR5
				1 year	2021-10-18	WZ-SR5

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
USB Power Sensor	Boonton	55006	MRTSUE06109	1 year	2022-04-06	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2022-06-04	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06447	1 year	2022-06-04	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06582	1 year	2022-08-08	WZ-SR5
				1 year	2021-08-10	WZ-SR5
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2022-04-06	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2022-06-06	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2022-06-04	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11071	1 year	2022-06-09	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11072	1 year	2022-06-09	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11073	1 year	2022-06-09	WZ-SR5

Software	Version	Function
EMI Software	V3	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable
Controller_MF 7802	1.02	RE Antenna & Turntable
Agilent Power Panel	V 3.9	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~25GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~25GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.28%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(1)	20dB Bandwidth	Conducted	Pass
15.247(b)(1)	Peak Transmitter Output Power		Pass
15.247(a)(1)	Channel Separation		Pass
15.247(a)(1)(iii)	Number of Channels		Pass
15.247(a)(1)(iii)	Time of Occupancy		Pass
15.247(d)	Band Edge / Out- of-Band Emissions		Pass
15.205, 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

6.2. Occupied Bandwidth

6.2.1. Test Limit

N/A


6.2.2. Test Procedure used

ANSI C63.10-2013 - Section 6.9.2 (20dB Bandwidth)

6.2.3. Test Setting

1. Set RBW $\geq$ 1% to 5% of the 20dB bandwidth
2. VBW = approximately three times RBW
3. Span = approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.2.4. Test Setup

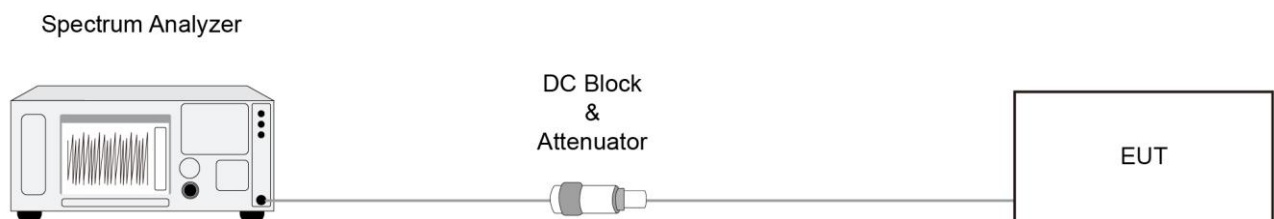

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power

6.3.1. Test Limit

For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 non-overlapping hopping channels: 1watt (30dBm). For all other frequency hopping systems in the 2400 - 2483.5MHz band: 0.125 watt (21dBm).

6.3.2. Test Procedure Used


ANSI C63.10-2013 - Section 7.8.5

6.3.3. Test Setting

1. Set RBW > 20 dB bandwidth of the emission being measured.
2. VBW $\geq$ RBW
3. Span = approximately five times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize, Use the marker-to-peak function to set the marker to the peak of the emission.

The indicated level is the peak output power (don't forget added the external attenuation and cable loss)

6.3.4. Test Setup

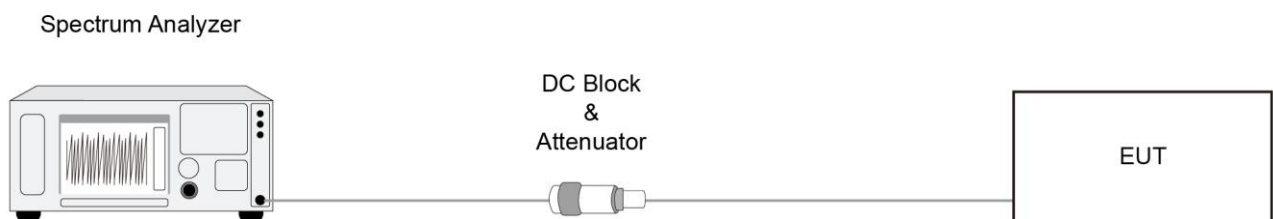

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Carrier Frequency Separation

6.4.1. Test Limit

The minimum permissible channel separation for this system is $\frac{2}{3}$ the value of the 20dB BW.


6.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.2.

6.4.3. Test Setting

1. Span = wide enough to capture the peaks of two adjacent channels.
2. Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
3. VBW $\geq$ RBW
4. Sweep time = Auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. Allowed the trace to stabilize
8. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

6.4.4. Test Setup

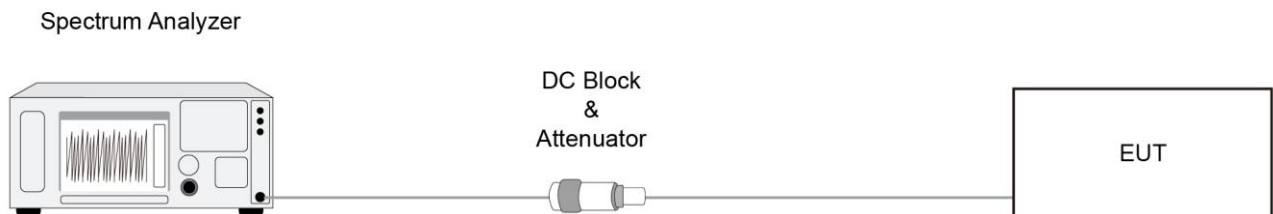

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Number of Hopping Channels

6.5.1. Test Limit

This frequency hopping system must employ a minimum of 15 hopping channels.


6.5.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.3.

6.5.3. Test Setting

1. Span = the frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. $VBW \geq RBW$
4. Sweep time = Auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. Allow the trace to stabilize

6.5.4. Test Setup

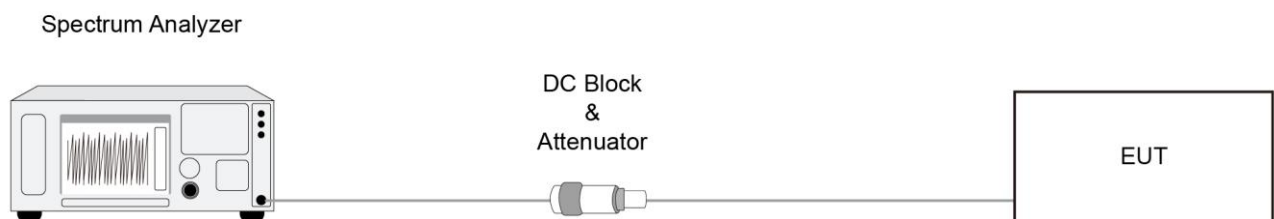

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Time of Occupancy Measurement

6.6.1. Test Limit

The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.


6.6.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.4.

6.6.3. Test Setting

1. Span = zero span, centered on a hopping channel.
2. RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
3. VBW $\geq$ RBW
4. Sweep time = as necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = max hold
7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

6.6.4. Test Setup

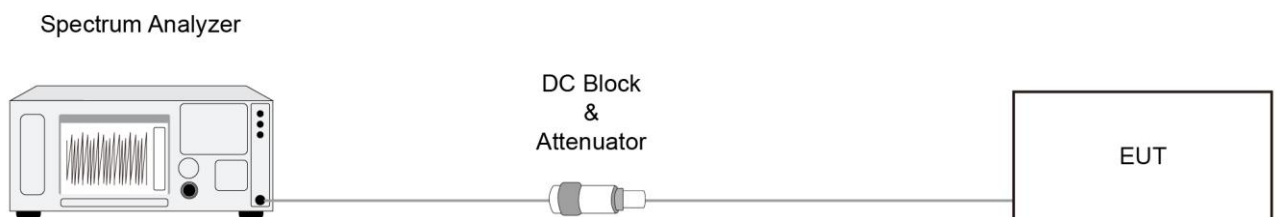

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Band-edge Compliance

6.7.1. Test Limit

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.


6.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.10.4.

6.7.3. Test Setting

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

6.7.4. Test Setup

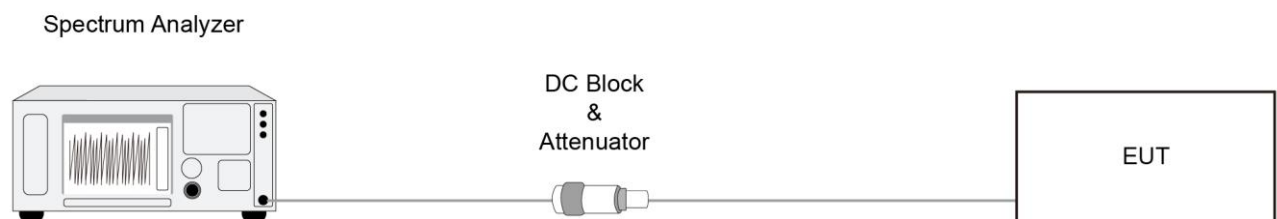

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Conducted Spurious Emissions

6.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


6.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8.

6.8.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100KHz
3. VBW = 300KHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

6.8.4. Test Setup

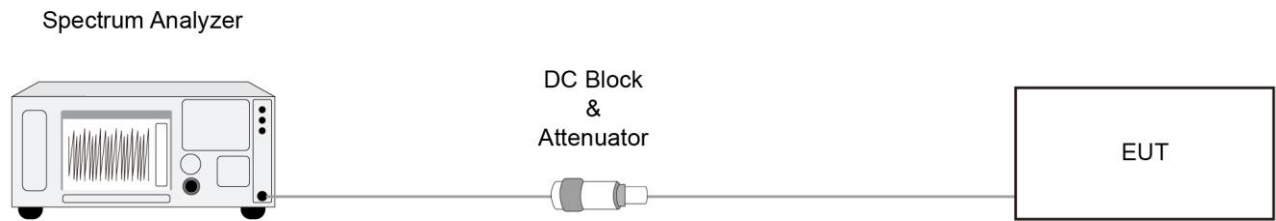

6.8.5. Test Result

Refer to Appendix A.8.

6.9. Radiated Spurious Emission

6.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

6.9.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.9.4. Test Setup

Below 1GHz Test Setup:

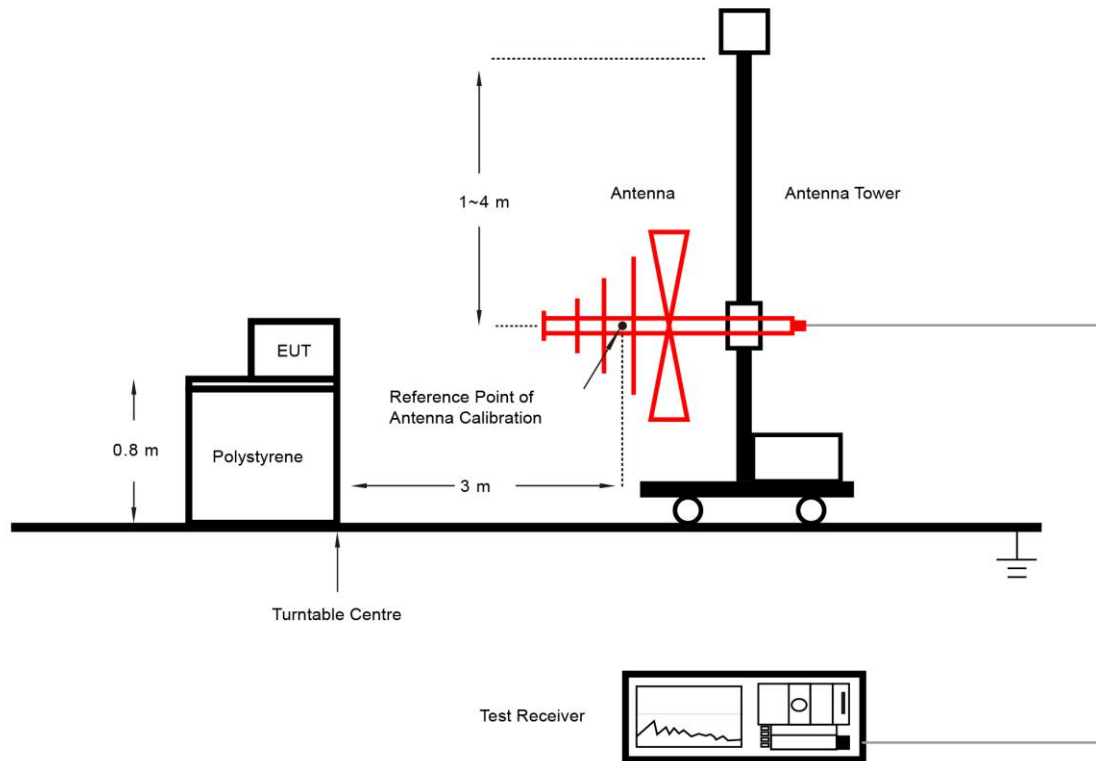

Above 1GHz Test Setup:

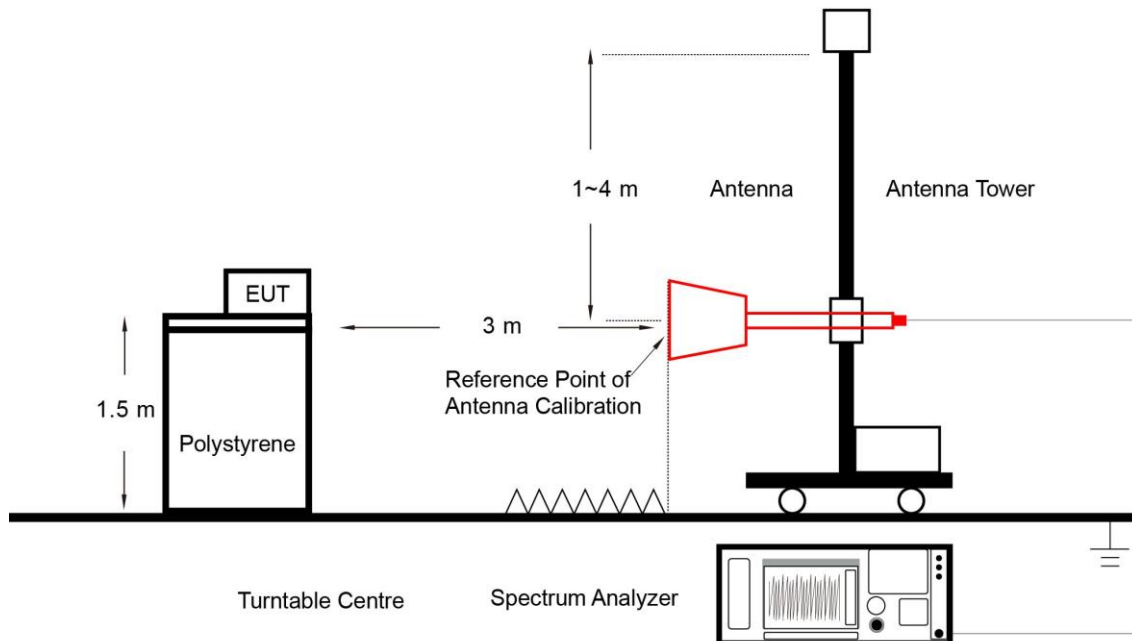

6.9.5. Test Result

Refer to Appendix A.9.

6.10. Radiated Restricted Band Edge

6.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.10.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

6.10.3. Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.10.4. Test Setup

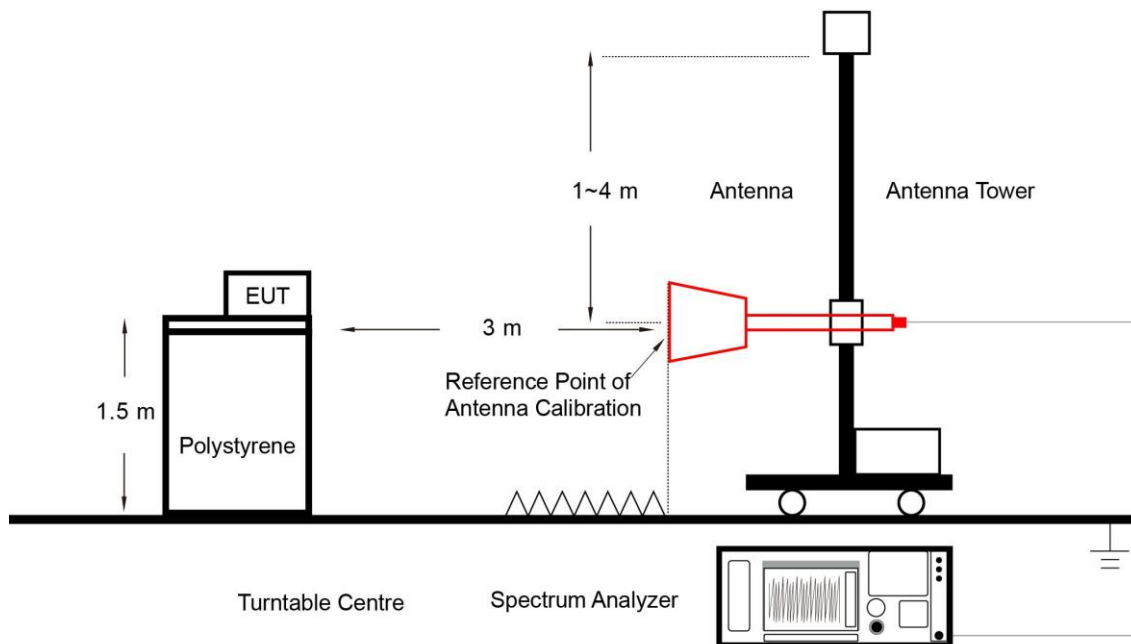

6.10.5. Test Result

Refer to Appendix A.10.

6.11. AC Conducted Emissions


6.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.11.2. Test Setup

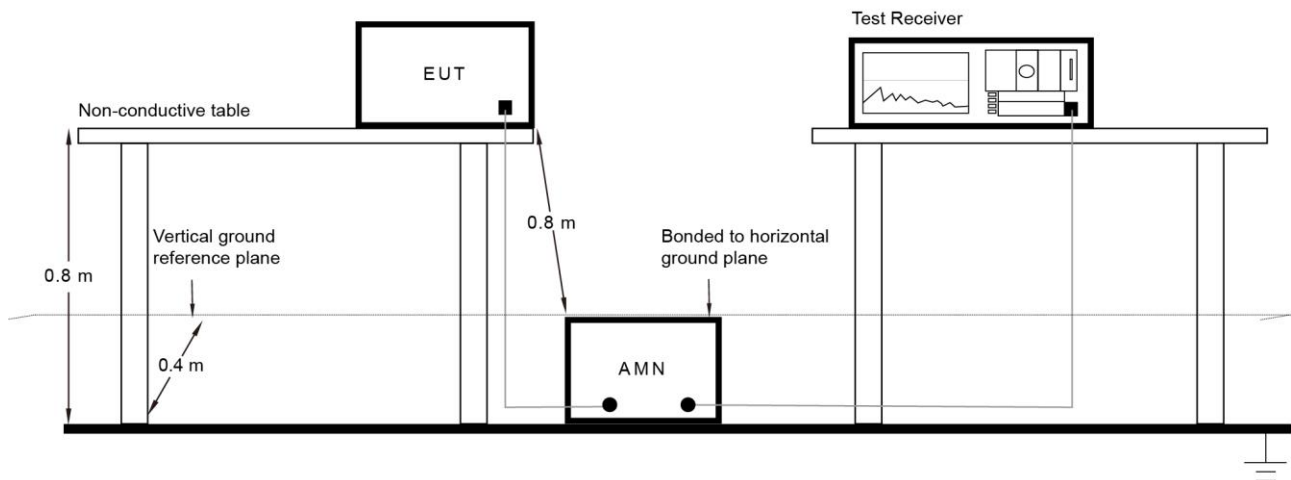

6.11.3. Test Result

Refer to Appendix A.11.



Appendix A - Test Result

A.1 Duty Cycle Test Result


Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2021/08/04		

Test Mode	Duty Cycle
DH5	77.29%
2DH5	77.51%
3DH5	77.51%

Duty Cycle	
DH5 (T = 2.900ms)	2DH5 (T = 2.908ms)

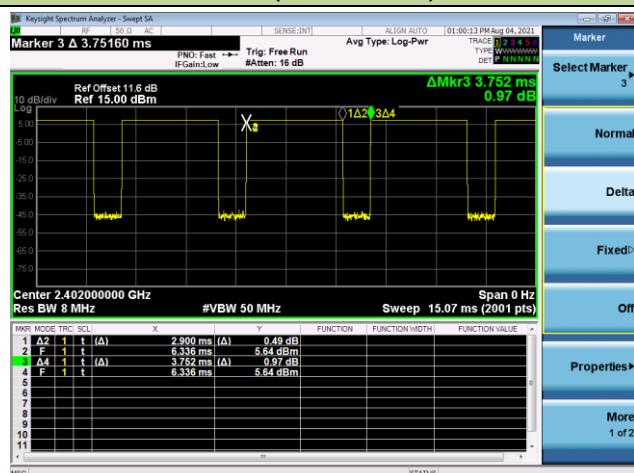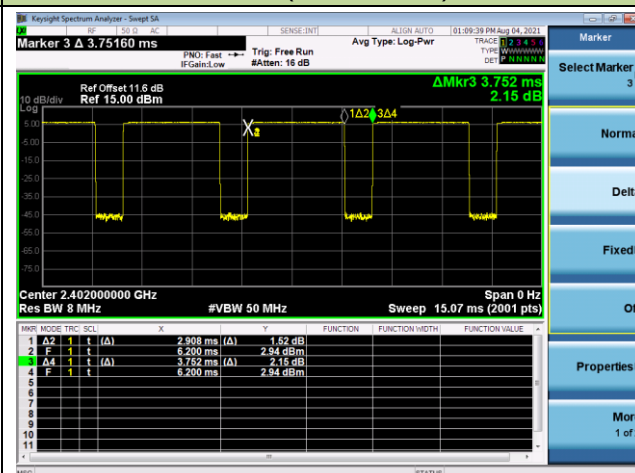 Marker 3 Δ 3.75160 ms Ref Offset 11.6 dB Ref 15.00 dBm ΔMkr3 3.752 ms 0.97 dB Center 2.402000000 GHz Res BW 8 MHz #VBW 50 MHz Sweep 15.07 ms (2001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(A)</td><td>2.900 ms</td><td>(A)</td><td>0.49 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(A)</td><td>6.336 ms</td><td>(A)</td><td>5.64 dBm</td><td></td></tr><tr><td>3</td><td>A4</td><td>1</td><td>t</td><td>(A)</td><td>3.752 ms</td><td>(A)</td><td>0.97 dB</td><td></td></tr><tr><td>4</td><td>F</td><td>1</td><td>t</td><td>(A)</td><td>6.336 ms</td><td>(A)</td><td>5.64 dBm</td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.900 ms	(A)	0.49 dB		2	F	1	t	(A)	6.336 ms	(A)	5.64 dBm		3	A4	1	t	(A)	3.752 ms	(A)	0.97 dB		4	F	1	t	(A)	6.336 ms	(A)	5.64 dBm		 Marker 3 Δ 3.75160 ms Ref Offset 11.6 dB Ref 15.00 dBm ΔMkr3 3.752 ms 2.15 dB Center 2.402000000 GHz Res BW 8 MHz #VBW 50 MHz Sweep 15.07 ms (2001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(A)</td><td>2.908 ms</td><td>(A)</td><td>1.52 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(A)</td><td>6.200 ms</td><td>(A)</td><td>2.94 dBm</td><td></td></tr><tr><td>3</td><td>A4</td><td>1</td><td>t</td><td>(A)</td><td>3.752 ms</td><td>(A)</td><td>2.15 dB</td><td></td></tr><tr><td>4</td><td>F</td><td>1</td><td>t</td><td>(A)</td><td>6.200 ms</td><td>(A)</td><td>2.94 dBm</td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.908 ms	(A)	1.52 dB		2	F	1	t	(A)	6.200 ms	(A)	2.94 dBm		3	A4	1	t	(A)	3.752 ms	(A)	2.15 dB		4	F	1	t	(A)	6.200 ms	(A)	2.94 dBm	
MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																			
1	A2	1	t	(A)	2.900 ms	(A)	0.49 dB																																																																																				
2	F	1	t	(A)	6.336 ms	(A)	5.64 dBm																																																																																				
3	A4	1	t	(A)	3.752 ms	(A)	0.97 dB																																																																																				
4	F	1	t	(A)	6.336 ms	(A)	5.64 dBm																																																																																				
MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																			
1	A2	1	t	(A)	2.908 ms	(A)	1.52 dB																																																																																				
2	F	1	t	(A)	6.200 ms	(A)	2.94 dBm																																																																																				
3	A4	1	t	(A)	3.752 ms	(A)	2.15 dB																																																																																				
4	F	1	t	(A)	6.200 ms	(A)	2.94 dBm																																																																																				


3DH5 (T = 2.908ms)

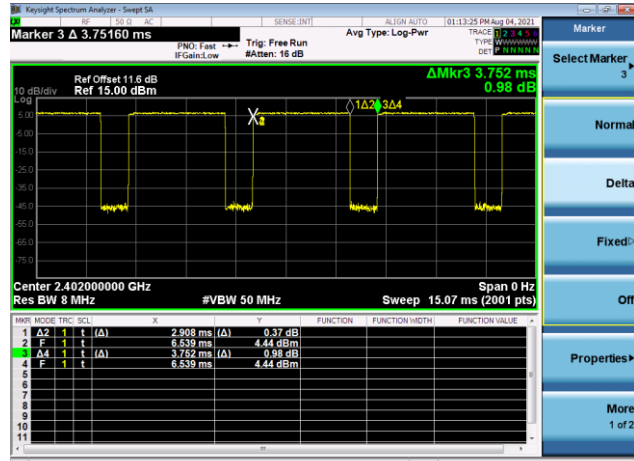 Marker 3 Δ 3.75160 ms Ref Offset 11.6 dB Ref 15.00 dBm ΔMkr3 3.752 ms 0.98 dB Center 2.402000000 GHz Res BW 8 MHz #VBW 50 MHz Sweep 15.07 ms (2001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(A)</td><td>2.908 ms</td><td>(A)</td><td>0.37 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(A)</td><td>6.539 ms</td><td>(A)</td><td>4.44 dBm</td><td></td></tr><tr><td>3</td><td>A4</td><td>1</td><td>t</td><td>(A)</td><td>3.752 ms</td><td>(A)</td><td>0.98 dB</td><td></td></tr><tr><td>4</td><td>F</td><td>1</td><td>t</td><td>(A)</td><td>6.539 ms</td><td>(A)</td><td>4.44 dBm</td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.908 ms	(A)	0.37 dB		2	F	1	t	(A)	6.539 ms	(A)	4.44 dBm		3	A4	1	t	(A)	3.752 ms	(A)	0.98 dB		4	F	1	t	(A)	6.539 ms	(A)	4.44 dBm	
MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	A2	1	t	(A)	2.908 ms	(A)	0.37 dB																																						
2	F	1	t	(A)	6.539 ms	(A)	4.44 dBm																																						
3	A4	1	t	(A)	3.752 ms	(A)	0.98 dB																																						
4	F	1	t	(A)	6.539 ms	(A)	4.44 dBm																																						

A.2 20dB Bandwidth Test Result


Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2021/07/29		

Test Mode	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Result
DH5	00	2402	935.0	Pass
DH5	39	2441	931.8	Pass
DH5	78	2480	927.6	Pass
2DH5	00	2402	1307.0	Pass
2DH5	39	2441	1312.0	Pass
2DH5	78	2480	1309.0	Pass
3DH5	00	2402	1272.0	Pass
3DH5	39	2441	1273.0	Pass
3DH5	78	2480	1268.0	Pass

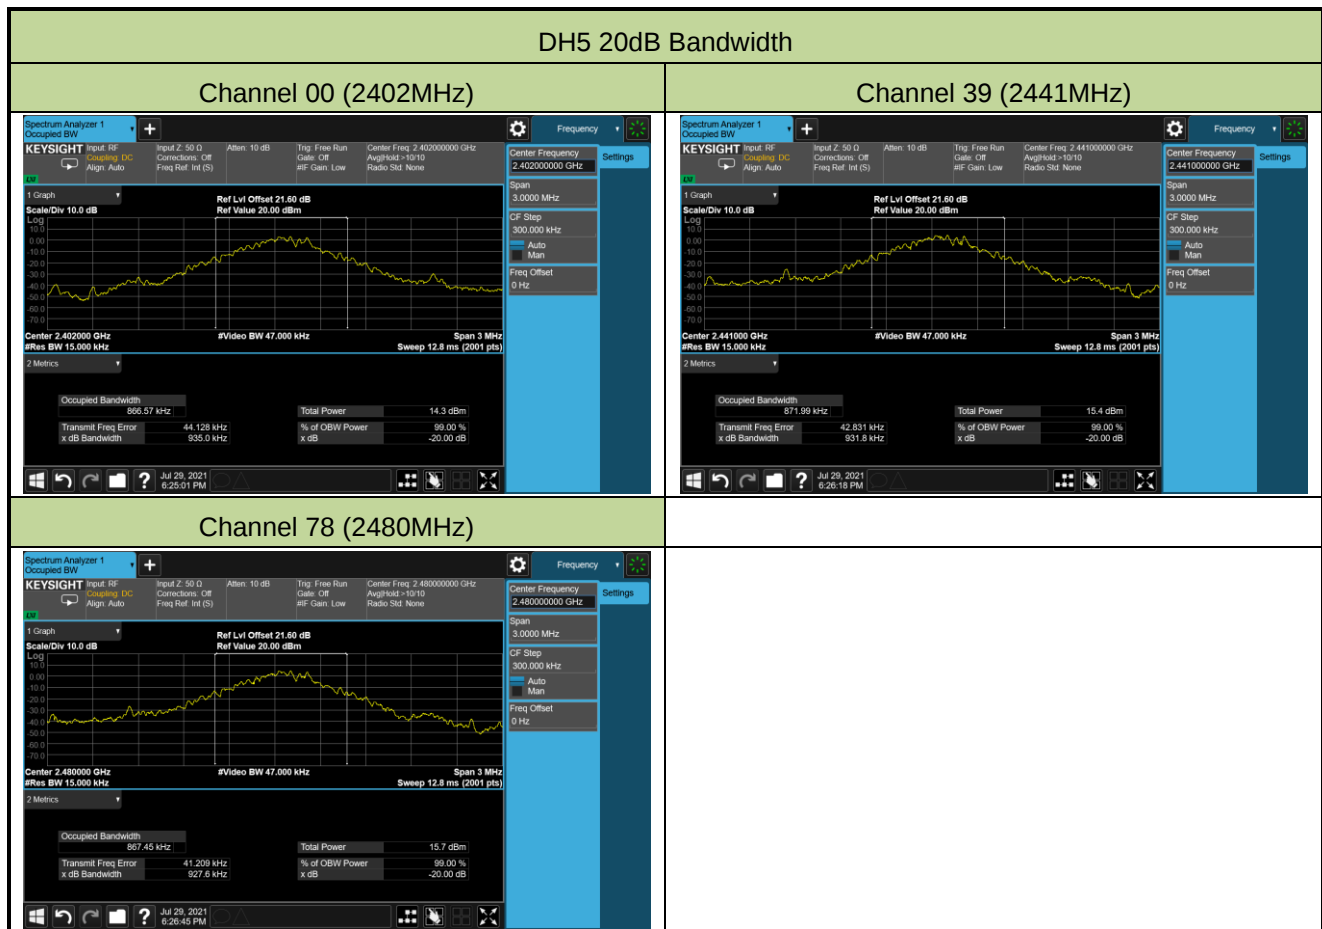

2DH5 20dB Bandwidth


Channel 00 (2402MHz)

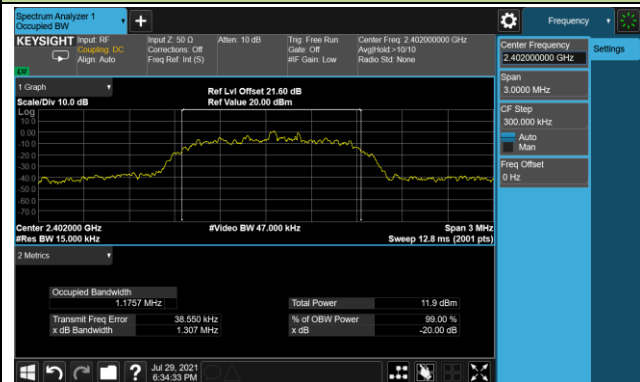

Channel 39 (2441MHz)



Channel 78 (2480MHz)

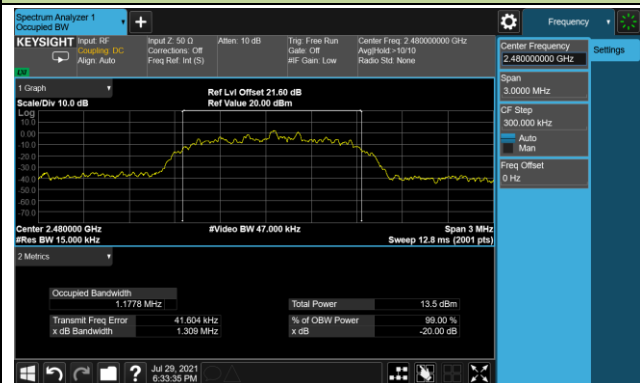

3DH5 20dB Bandwidth

Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)




A.3 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2021/07/29		


Test Mode	Channel No.	Frequency (MHz)	Output Power (dBm)	Power Limit (dBm)
DH5	00	2402	7.33	≤ 30
DH5	39	2441	8.68	≤ 30
DH5	78	2480	8.88	≤ 30
2DH5	00	2402	6.24	≤ 30
2DH5	39	2441	7.83	≤ 30
2DH5	78	2480	7.80	≤ 30
3DH5	00	2402	6.52	≤ 30
3DH5	39	2441	8.06	≤ 30
3DH5	78	2480	8.05	≤ 30

DH5 Output Power


Channel 00 (2402MHz)

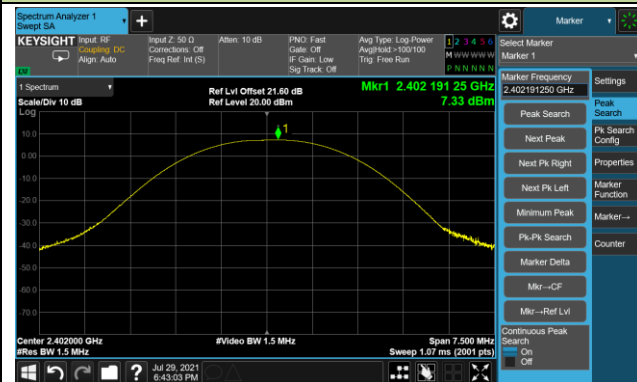

Channel 39 (2441MHz)

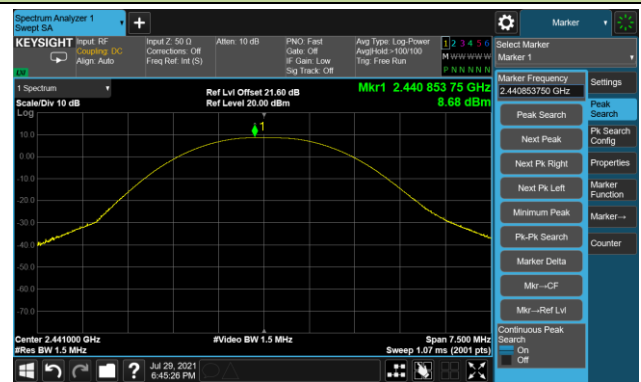


Channel 78 (2480MHz)

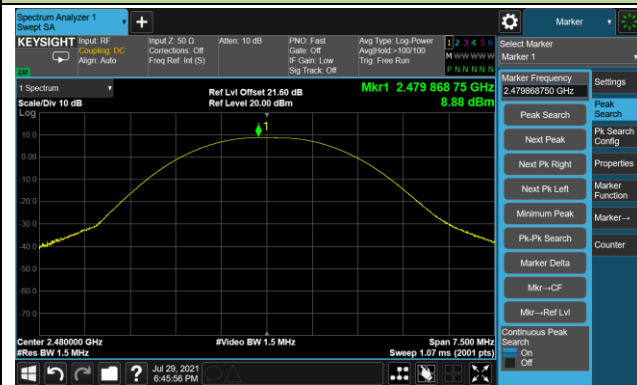


2DH5 Output Power


Channel 00 (2402MHz)

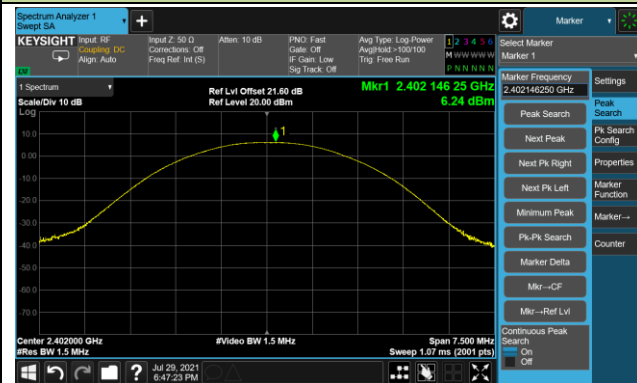

Channel 39 (2441MHz)

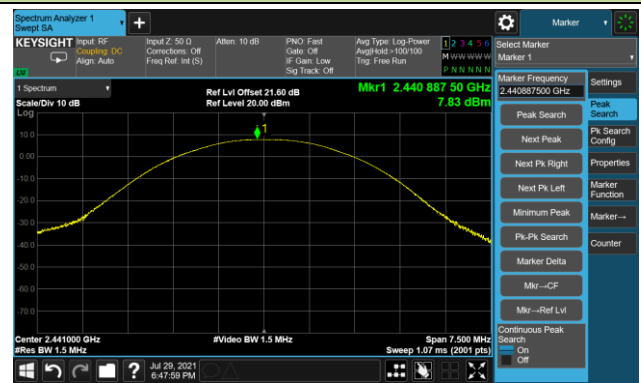


Channel 78 (2480MHz)

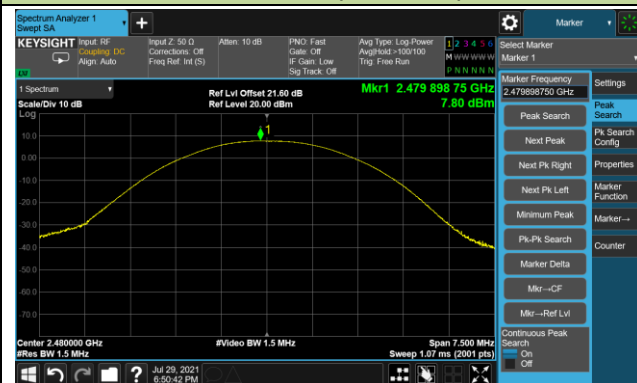


3DH5 Output Power


Channel 00 (2402MHz)

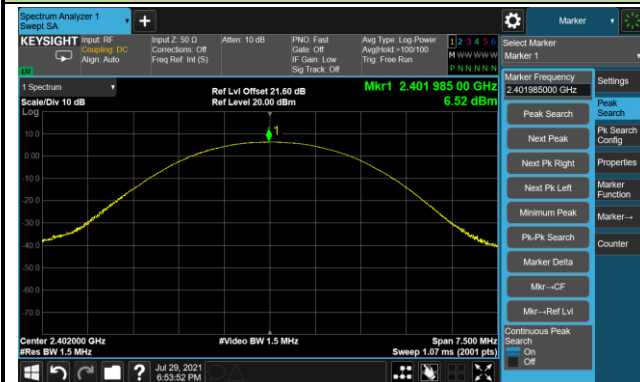

Channel 39 (2441MHz)

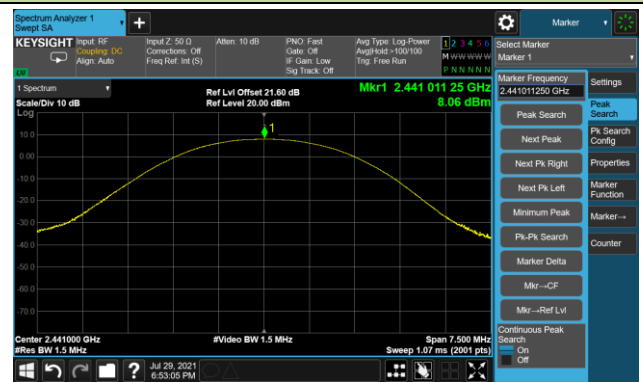

Channel 78 (2480MHz)

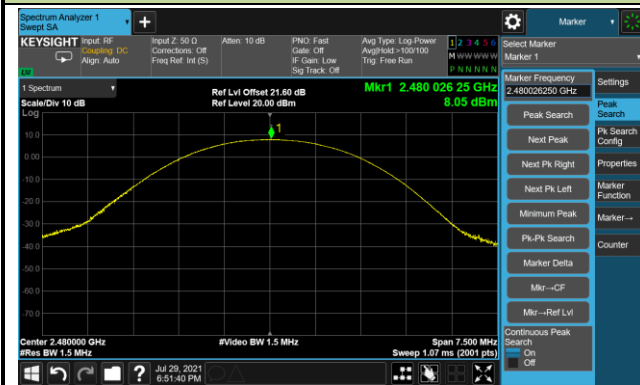

A.4 Carrier Frequency Separation Test Result


Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2021/07/29		

Test Mode	Channel No.	Frequency (MHz)	Limit (kHz)	Result
DH5	00	2402	≥ 623.33	Pass
DH5	39	2441	≥ 621.20	Pass
DH5	78	2480	≥ 618.40	Pass
2DH5	00	2402	≥ 871.33	Pass
2DH5	39	2441	≥ 874.67	Pass
2DH5	78	2480	≥ 872.67	Pass
3DH5	00	2402	≥ 848.00	Pass
3DH5	39	2441	≥ 848.67	Pass
3DH5	78	2480	≥ 845.33	Pass


Note: The Limit is 2/3 the value of the 20dB BW.

DH5 Carrier Frequency Separation


Channel 00 (2402MHz)

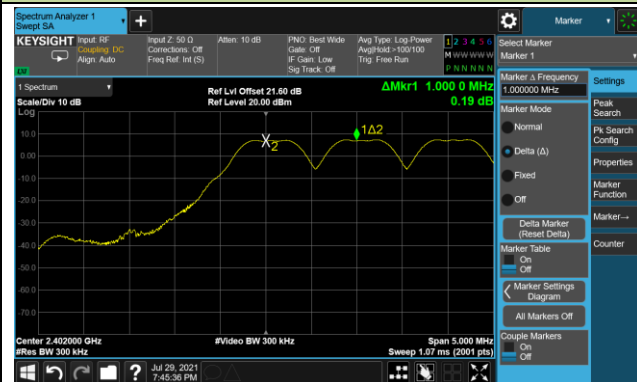

Channel 39 (2441MHz)

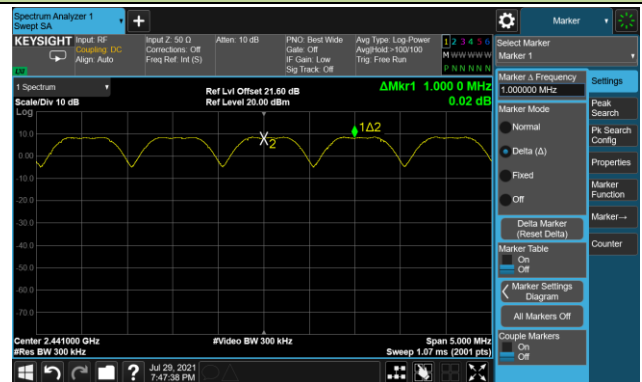


Channel 78 (2480MHz)

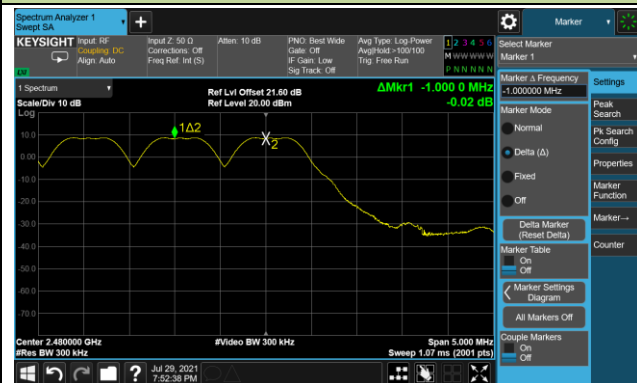


2DH5 Carrier Frequency Separation


Channel 00 (2402MHz)

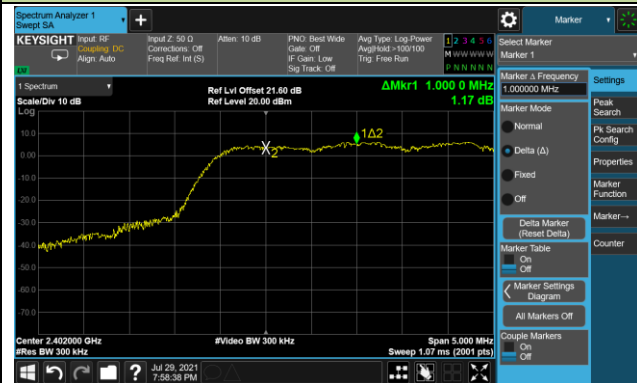

Channel 39 (2441MHz)

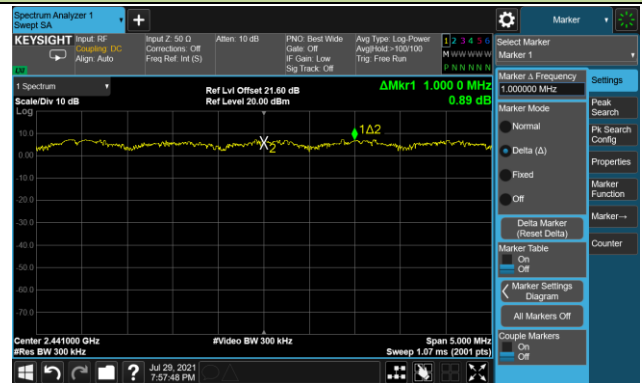


Channel 78 (2480MHz)

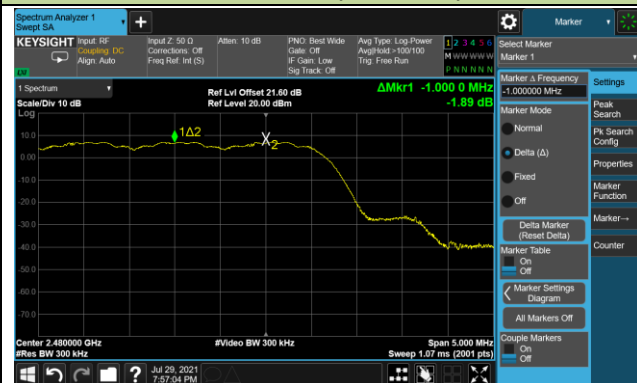


3DH5 Carrier Frequency Separation

Channel 00 (2402MHz)

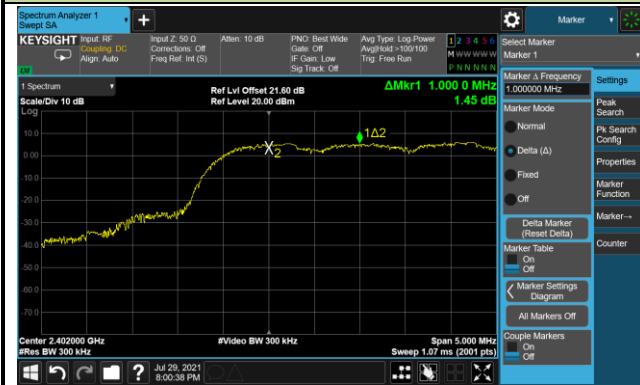

Channel 39 (2441MHz)

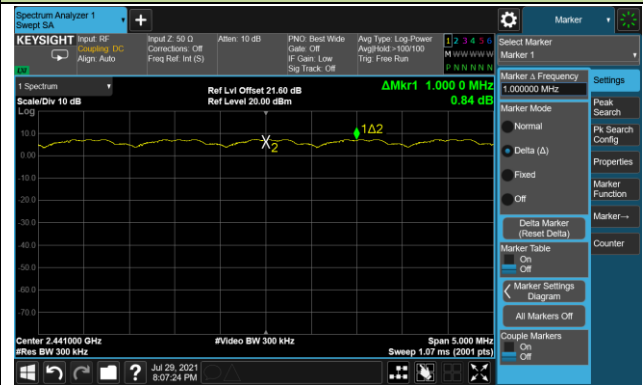


Channel 78 (2480MHz)



A.5 Number of Hopping Channels Test Result


Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2021/07/29		

Test Mode (Hopping)	Channel Numbers	Frequency (MHz)	Limit (Hopping Channels)	Result
DH5	79	2402 ~ 2480	≥ 15	Pass
2DH5	79	2402 ~ 2480	≥ 15	Pass
3DH5	79	2402 ~ 2480	≥ 15	Pass

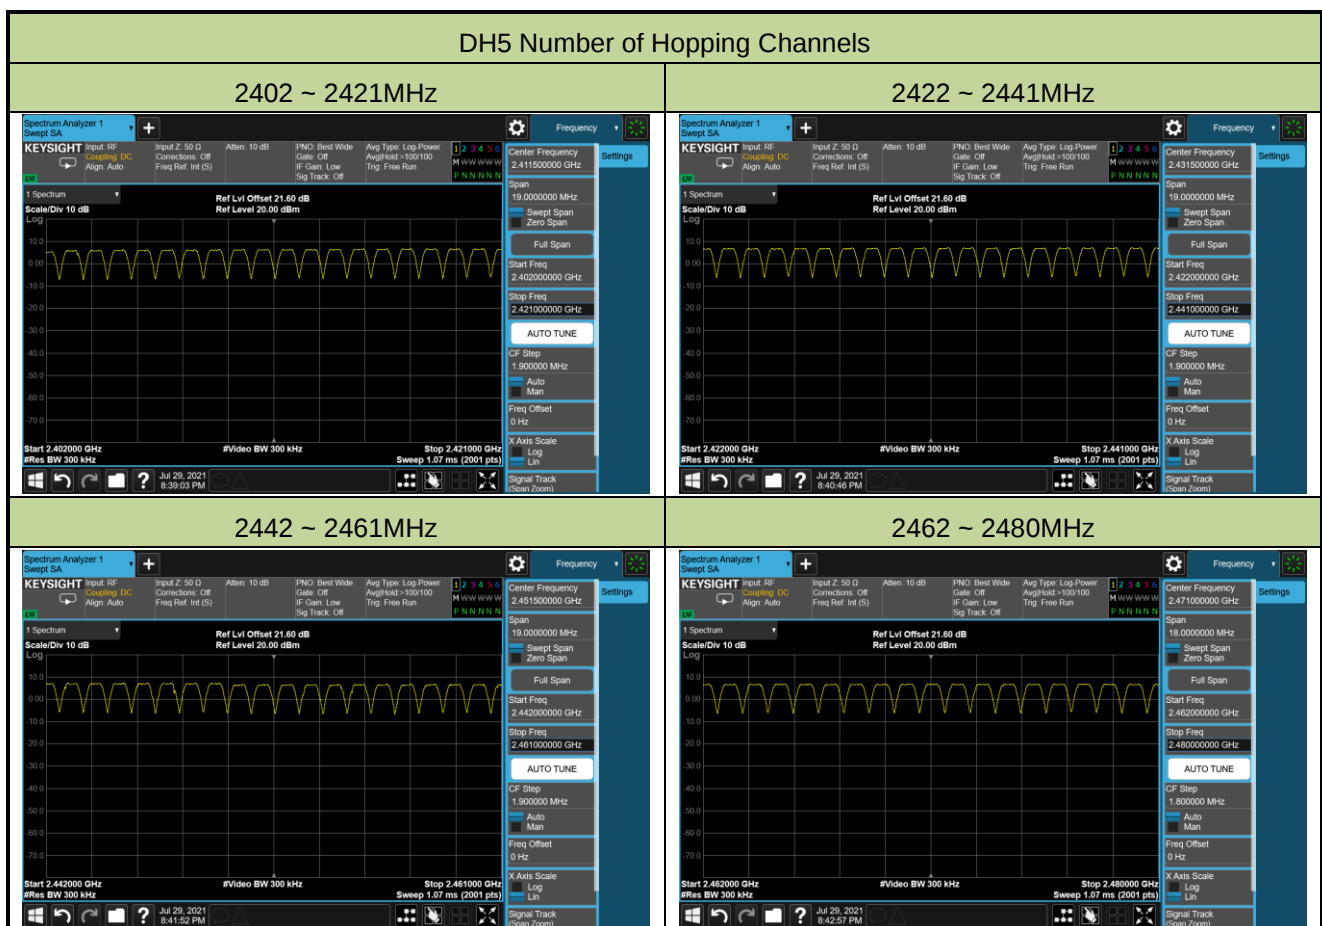


2DH5 Number of Hopping Channels


2402 ~ 2421MHz

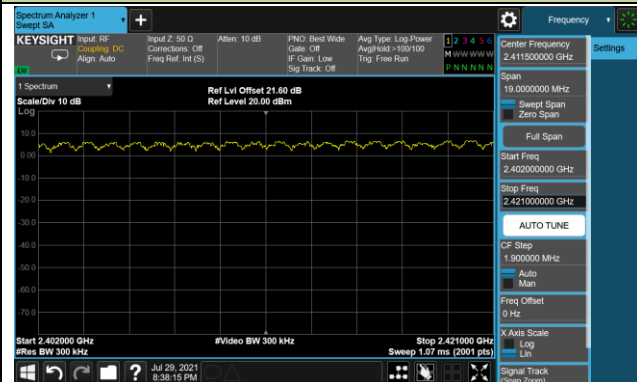


2422 ~ 2441MHz

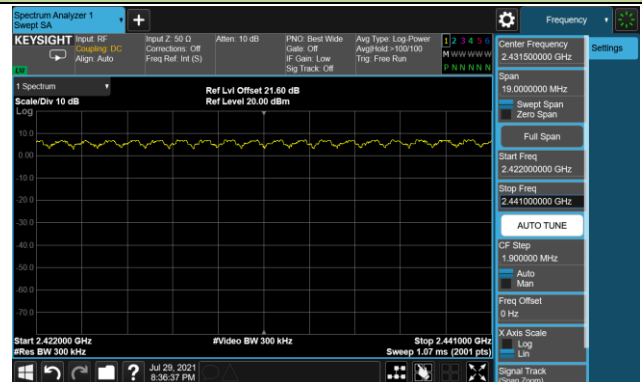

2442 ~ 2461MHz

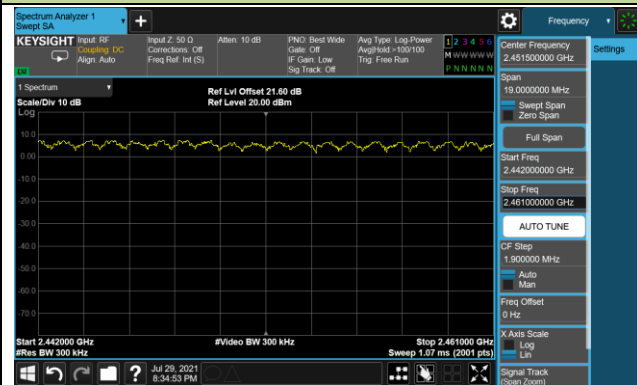


2462 ~ 2480MHz

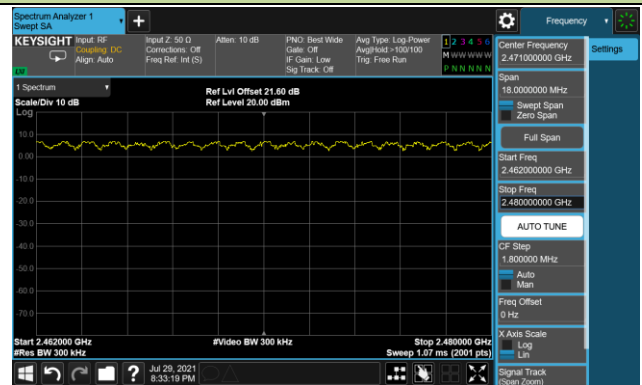


3DH5 Number of Hopping Channels


2402 ~ 2421MHz

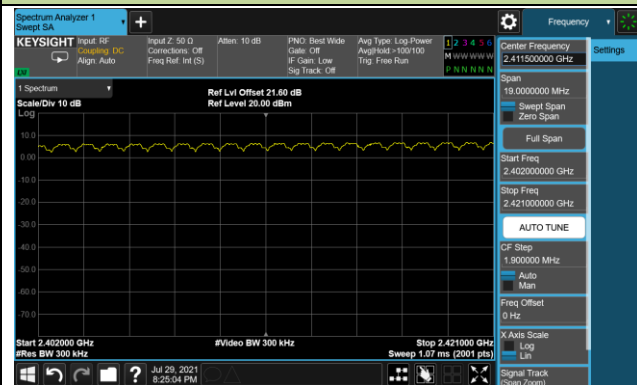


2422 ~ 2441MHz

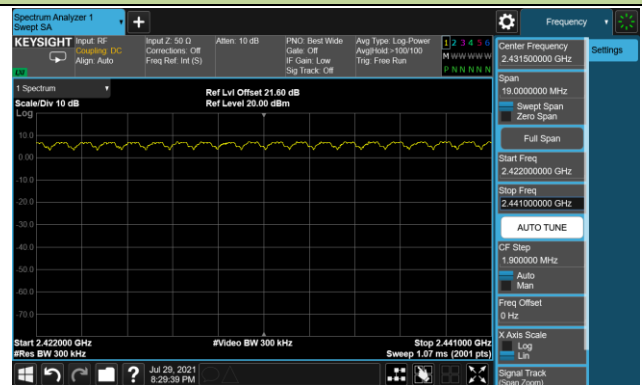

2442 ~ 2461MHz

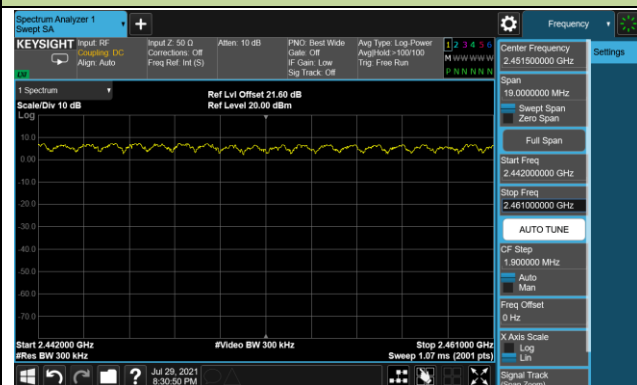

2462 ~ 2480MHz

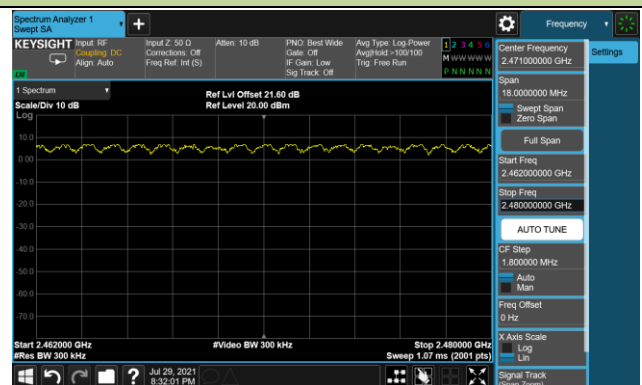

A.6 Time of Occupancy Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2021/08/04		


Test Mode	Channel No.	Frequency (MHz)	Transmit Time Per Hop (ms)	Observation Period (s)	Number of Hops in Sweep Time	Number of Hops in Observation Period	Time of Occupancy (ms)	Limit (ms)	Result
3DH1	00~78	2402~2480	0.4043	31.6	60	316	127.76	≤ 400	Pass
3DH3	00~78	2402~2480	1.6520	31.6	30	158	261.02	≤ 400	Pass
3DH5	00~78	2402~2480	2.9040	31.6	20	106	307.82	≤ 400	Pass

Note:


1. Number of Hops in Observation Period = Number of Hops in Sweep Time * (Observation Period / Sweep Time), Sweep Time = 6s.
2. Time of Occupancy (ms) = Transmit Time Per Hop (ms) * Number of Hops in Observation Period

Transmit Time Per Hop


3DH1

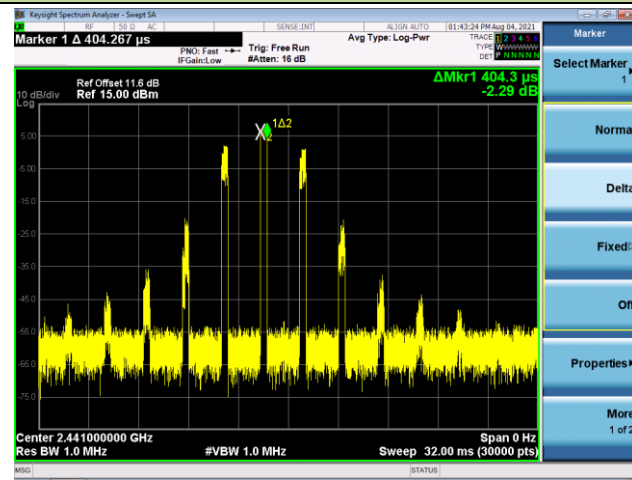

3DH3

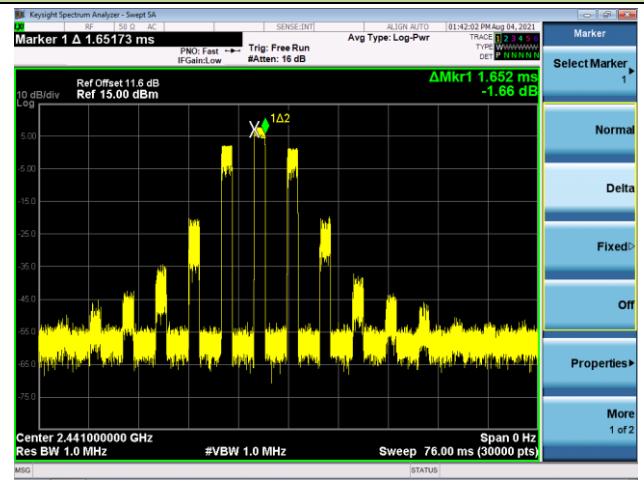


3DH5

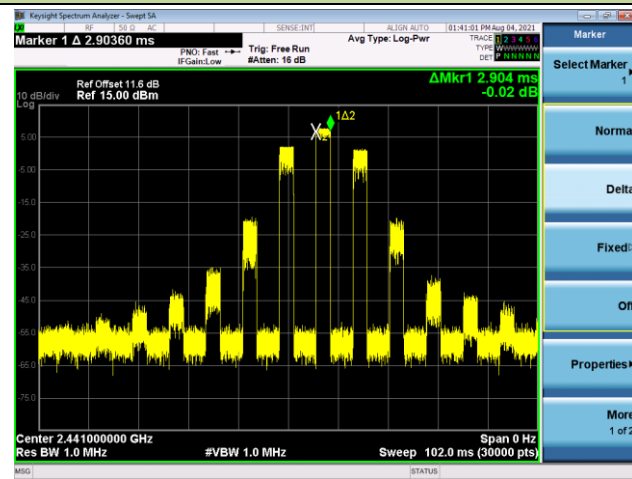


Number of Hops in Sweep Time


3DH1

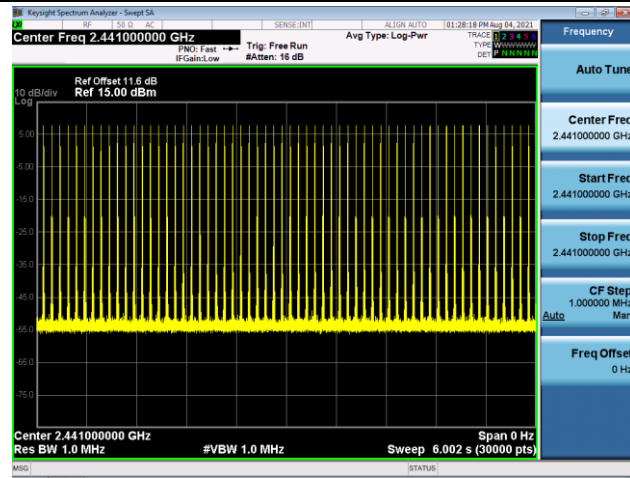

3DH3

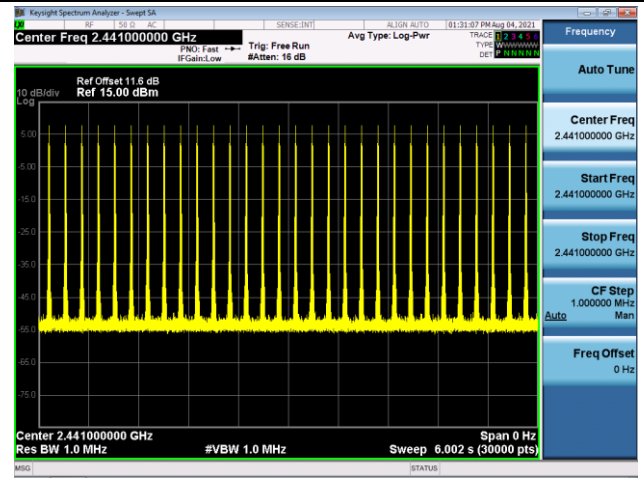

3DH5

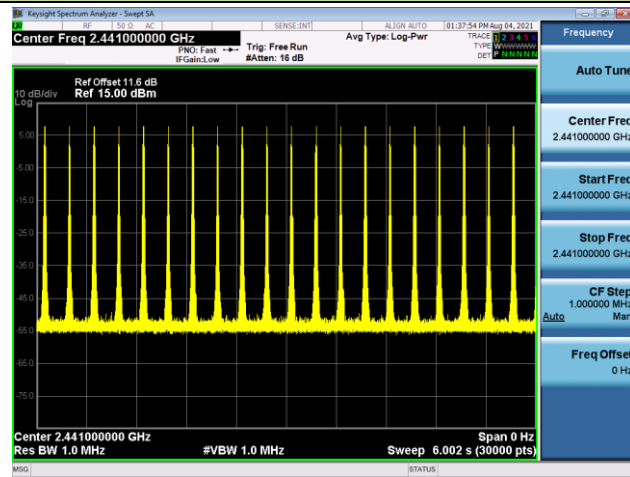


A.7 Band-edge Compliance Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2021/08/04		


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
DH5	00	2402	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	78	2480	20dBc	Pass

Band-edge Compliance


DH5 - Channel 00 (2402MHz)

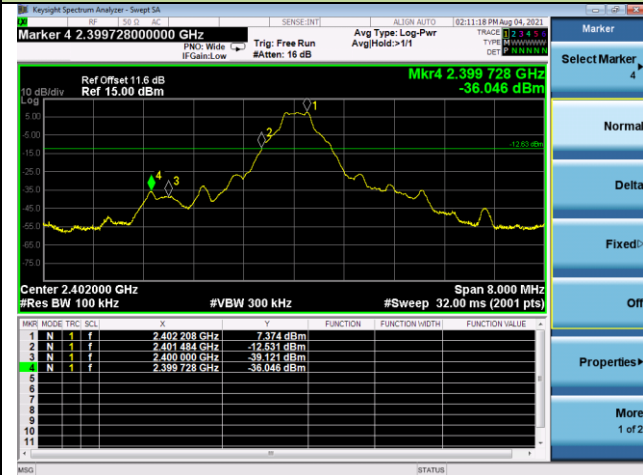

DH5 - Channel 78 (2480MHz)

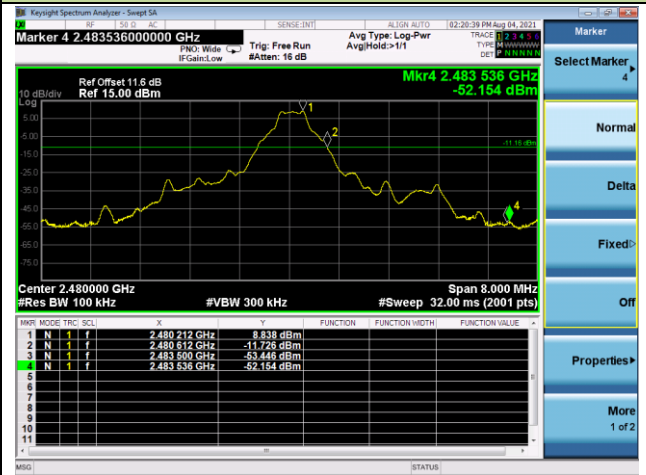


2DH5 - Channel 00 (2402MHz)

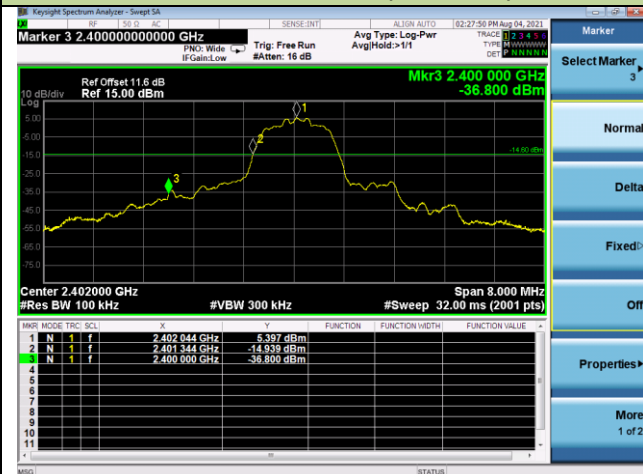

2DH5 - Channel 78 (2480MHz)



3DH5 - Channel 00 (2402MHz)

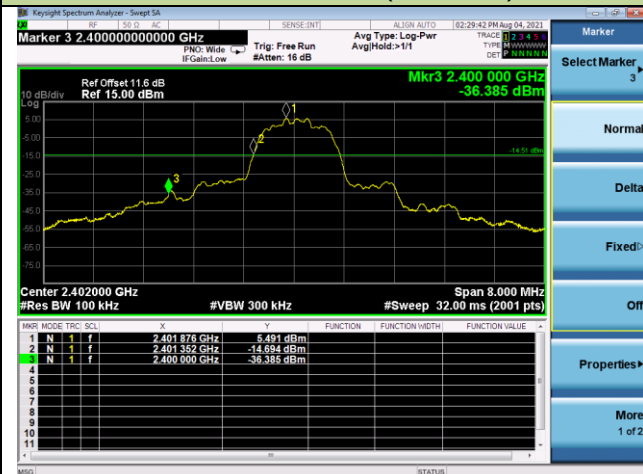


3DH5 - Channel 78 (2480MHz)




Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

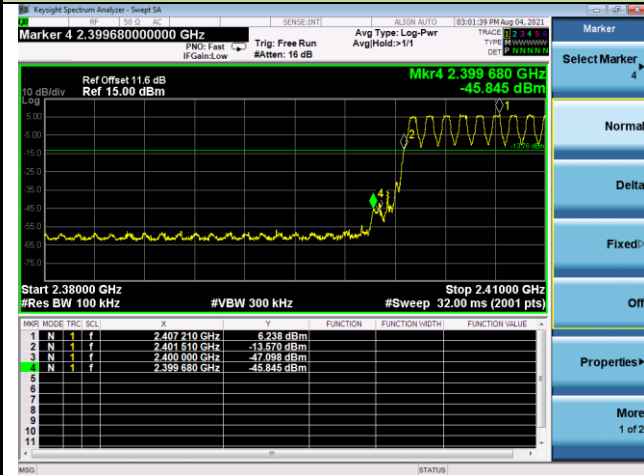


DH5 - Channel 78 (2480MHz)

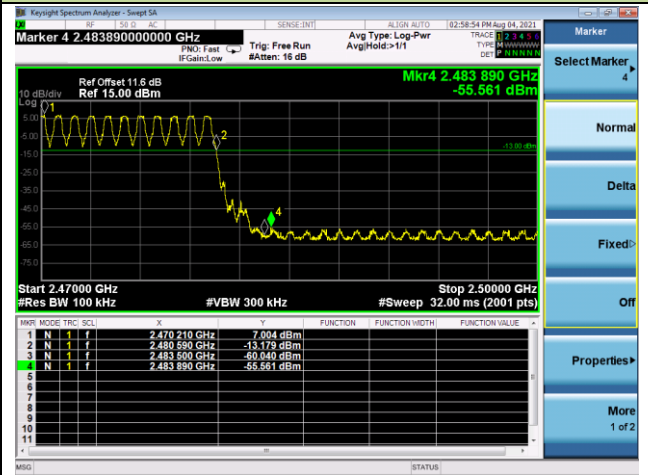


2DH5 - Channel 00 (2402MHz)

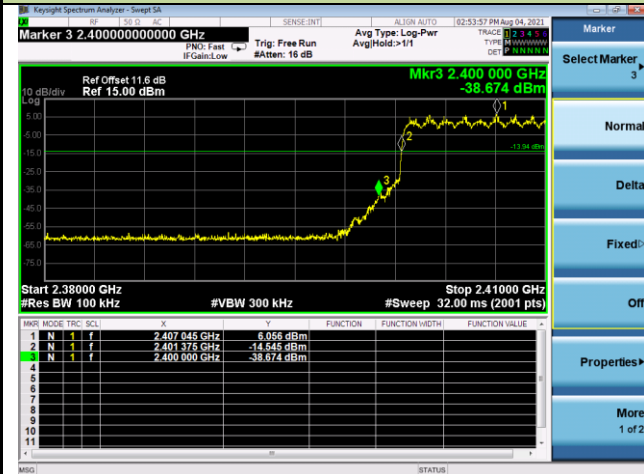


2DH5 - Channel 78 (2480MHz)

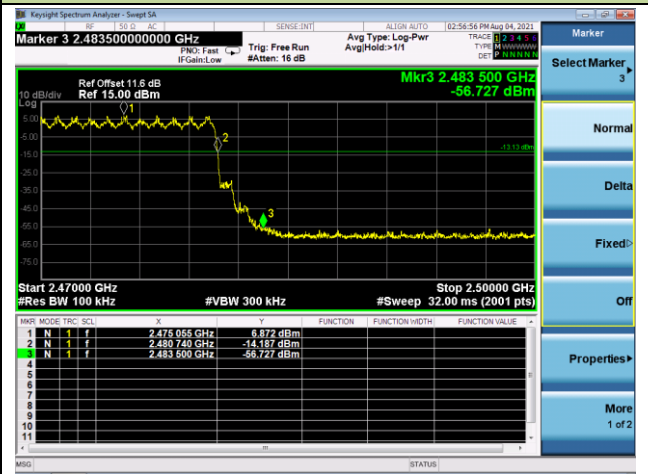

3DH5 - Channel 00 (2402MHz)

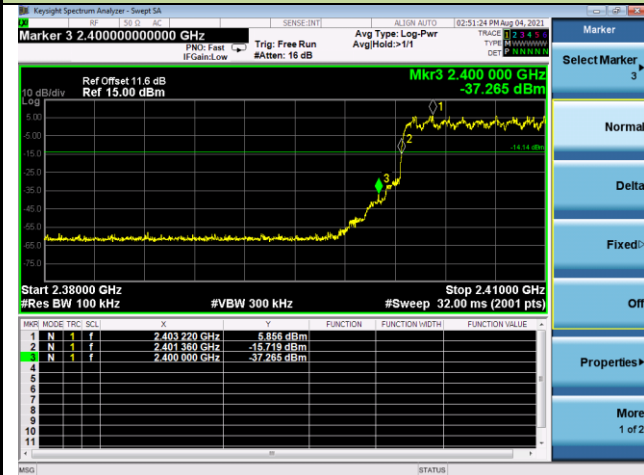

3DH5 - Channel 78 (2480MHz)

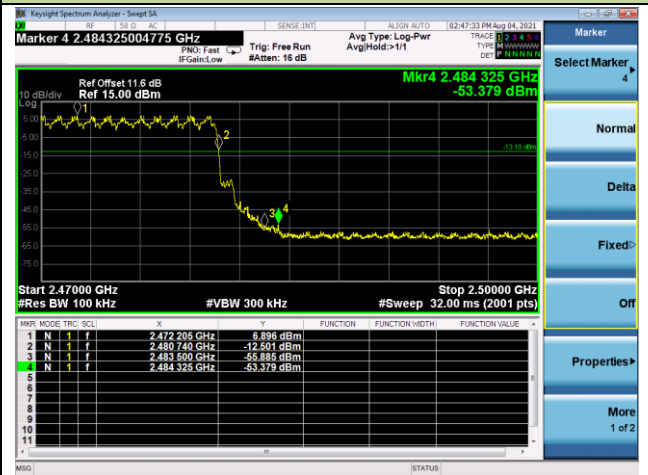

A.8 Conducted Spurious Emissions Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2021/08/04		

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass