

Face Recognition Time & Attendance

User's Manual



V1.0.0

Foreword

General

This manual introduces the functions and operations of the Face Recognition Time & Attendance (hereinafter referred to as the "Time & Attendance"). Read carefully before using the device, and keep the manual safe for future reference.

Safety Instructions

The following signal words might appear in the manual.

Signal Words	Meaning
 DANGER	Indicates a high potential hazard which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury.
 CAUTION	Indicates a potential risk which, if not avoided, could result in property damage, data loss, reductions in performance, or unpredictable results.
 TIPS	Provides methods to help you solve a problem or save time.
 NOTE	Provides additional information as a supplement to the text.

Revision History

Version	Revision Content	Release Time
V1.0.0	First Release.	June 2022

Privacy Protection Notice

As the device user or data controller, you might collect the personal data of others such as their face, fingerprints, and license plate number. You need to be in compliance with your local privacy protection laws and regulations to protect the legitimate rights and interests of other people by implementing measures which include but are not limited: Providing clear and visible identification to inform people of the existence of the surveillance area and provide required contact information.

About the Manual

- The manual is for reference only. Slight differences might be found between the manual and the product.
- We are not liable for losses incurred due to operating the product in ways that are not in compliance with the manual.
- The manual will be updated according to the latest laws and regulations of related jurisdictions. For detailed information, see the paper user's manual, use our CD-ROM, scan the QR code or visit our official website. The manual is for reference only. Slight differences might be found between the electronic version and the paper version.
- All designs and software are subject to change without prior written notice. Product updates

might result in some differences appearing between the actual product and the manual. Please contact customer service for the latest program and supplementary documentation.

- There might be errors in the print or deviations in the description of the functions, operations and technical data. If there is any doubt or dispute, we reserve the right of final explanation.
- Upgrade the reader software or try other mainstream reader software if the manual (in PDF format) cannot be opened.
- All trademarks, registered trademarks and company names in the manual are properties of their respective owners.
- Please visit our website, contact the supplier or customer service if any problems occur while using the device.
- If there is any uncertainty or controversy, we reserve the right of final explanation.

Important Safeguards and Warnings

This section introduces content covering the proper handling of the Time & Attendance, hazard prevention, and prevention of property damage. Read carefully before using the Time & Attendance, and comply with the guidelines when using it.

Transportation Requirement



Transport, use and store the Time & Attendance under allowed humidity and temperature conditions.

Storage Requirement



Store the Time & Attendance under allowed humidity and temperature conditions.

Installation Requirements



WARNING

- Do not connect the power adapter to the Time & Attendance while the adapter is powered on.
- Strictly comply with the local electric safety code and standards. Make sure the ambient voltage is stable and meets the power supply requirements of the Time & Attendance.
- Do not connect the Time & Attendance to two or more kinds of power supplies, to avoid damage to the Time & Attendance.
- Improper use of the battery might result in a fire or explosion.



- Personnel working at heights must take all necessary measures to ensure personal safety including wearing a helmet and safety belts.
- Do not place the Time & Attendance in a place exposed to sunlight or near heat sources.
- Keep the Time & Attendance away from dampness, dust, and soot.
- Install the Time & Attendance on a stable surface to prevent it from falling.
- Install the Time & Attendance in a well-ventilated place, and do not block its ventilation.
- Use an adapter or cabinet power supply provided by the manufacturer.
- Use the power cords that are recommended for the region and conform to the rated power specifications.
- The power supply must conform to the requirements of ES1 in IEC 62368-1 standard and be no higher than PS2. Please note that the power supply requirements are subject to the Time & Attendance label.
- The Time & Attendance is a class I electrical appliance. Make sure that the power supply of the Time & Attendance is connected to a power socket with protective earthing.

Operation Requirements



- Check whether the power supply is correct before use.

- Do not unplug the power cord on the side of the Time & Attendance while the adapter is powered on.
- Operate the Time & Attendance within the rated range of power input and output.
- Use the Time & Attendance under allowed humidity and temperature conditions.
- Do not drop or splash liquid onto the Time & Attendance, and make sure that there is no object filled with liquid on the Time & Attendance to prevent liquid from flowing into it.
- Do not disassemble the Time & Attendance without professional instruction.
- This product is professional equipment.

Table of Contents

Foreword	I
Important Safeguards and Warnings.....	III
1 Overview	1
1.1 Introduction	1
1.2 Features.....	1
1.3 Application.....	1
2 Local Operations	3
2.1 Basic Configuration Procedure.....	3
2.2 Common Icons.....	3
2.3 Standby Screen	3
2.4 Initialization	4
2.5 Logging In.....	4
2.6 Network Communication	5
2.6.1 Active Register	5
2.6.2 Configuring Wi-Fi.....	6
2.7 User Management	6
2.7.1 Adding New Users	6
2.7.2 Viewing User Information	8
2.8 Attendance Management.....	8
2.8.1 Configuring Attendance Checking Modes.....	8
2.8.2 Configuring Shifts	9
2.8.3 (Optional) Configuring Holiday Plans	10
2.8.4 (Optional) Configuring Departments	11
2.8.5 Configuring Work Schedules	11
2.8.6 (Optional) Configuring Verification Interval Time.....	12
2.8.7 (Optional) Configuring Attendance Modes.....	13
2.9 System.....	15
2.9.1 Configuring Time	15
2.9.2 Configuring Face Parameters	16
2.9.3 Setting Volume	18
2.9.4 Screen Settings	18
2.9.5 Restoring Factory Defaults	18
2.9.6 Restart the Device	18
2.9.7 Configuring the Language.....	18
2.10 USB Management	19

2.10.1 Exporting to USB	19
2.10.2 Importing From USB	19
2.10.3 Updating System	20
2.11 Configuring Features	20
2.12 Viewing Attendance Logs	21
2.13 System Information	21
2.13.1 Viewing Data Capacity	22
2.13.2 Viewing Device Version	22
3 Web Operations.....	23
3.1 Initialization	23
3.2 Logging In.....	23
3.3 Resetting the Password	24
3.4 Data Capacity.....	25
3.5 Configuring Video and Image	26
3.5.1 Configuring Video	26
3.5.1.1 Configuring Channel 1	26
3.5.1.2 Configuring Channel 2	30
3.5.2 Setting Volume	32
3.6 Configuring Face Detection.....	32
3.7 Configuring Network	35
3.7.1 Configuring Port	35
3.7.2 Configuring Automatic Registration	36
3.8 Safety Management	36
3.8.1 Configuring IP Authority.....	36
3.8.1.1 Network Access	37
3.8.1.2 Prohibit PING	38
3.8.1.3 Anti Half Connection	38
3.8.2 Configuring System	38
3.8.2.1 Creating Server Certificate.....	40
3.8.2.2 Downloading Root Certificate	40
3.9 User Management	43
3.9.1 Adding Users	43
3.9.2 Adding ONVIF Users	44
3.9.3 Viewing Online Users.....	45
3.10 Maintenance.....	45
3.11 Configuration Management.....	46
3.11.1 Exporting/Importing Configuration Files.....	46
3.11.2 Restoring Factory Defaults.....	46

3.12 Upgrading System	47
3.12.1 File Update	47
3.12.2 Online Update	47
3.13 Viewing Version Information	47
3.14 Viewing Logs	47
3.14.1 System Logs	47
3.14.2 Admin Logs	48
3.14.3 Attendance Logs	48
4 Smart PSS Lite Configuration	49
4.1 Installing and Logging In	49
4.2 Adding Devices	49
4.2.1 Adding Individually	49
4.2.2 Adding in Batches	50
4.3 User Management	51
4.3.1 Configuring Card Type	51
4.3.2 Adding Users	52
4.3.2.1 Adding Individually	52
4.3.2.2 Adding in Batches	53
4.3.3 Assigning Attendance Permissions	54
Appendix 1 Important Points of Face Registration	57
Appendix 2 Cybersecurity Recommendations	60

1 Overview

1.1 Introduction


1.2 Features

- The housing is built of PC and ABS material, making it ideal for use indoors.
- 4.3 inch glass touch screen with a resolution of 480×272 .
- 2-MP wide-angle dual-lens camera with IR illumination and DWDR.
- Supports mask detection.
- Verification Methods including face and password unlock.
- Recognizes faces 0.3 m to 1.5 m away (0.98 ft-4.92 ft), and detects persons between the height of 1.1 m and 2.0 m (3.61 ft-6.56 ft) when the camera is installed at 1.4 m (4.5 ft).
- Supports 2,000 users, 2,000 faces, 2,000 passwords, 50 administrators, and 300,000 records.
- Liveness detection has a face recognition accuracy rate of 99.9% and the 1:N comparison time is 0.2 s per person.
- Up to 128 periods and 128 holiday plans are configurable.
- Wi-Fi connection, auto registration, P2P registration, and DHCP.
- Supports customization of voice prompts.
- Online update and update through USB.
- Works while offline, and communicates with the management platform when connected to a network.
- Supports watchdog to protect the system from software and hardware failures.
- Supports SDK.
- Connects to SmartPSS Lite.

1.3 Application

It is widely used in parks, communities, business centers and factories, and ideal for places such as office buildings, government buildings, schools and stadiums.


Figure 1-1 Networking

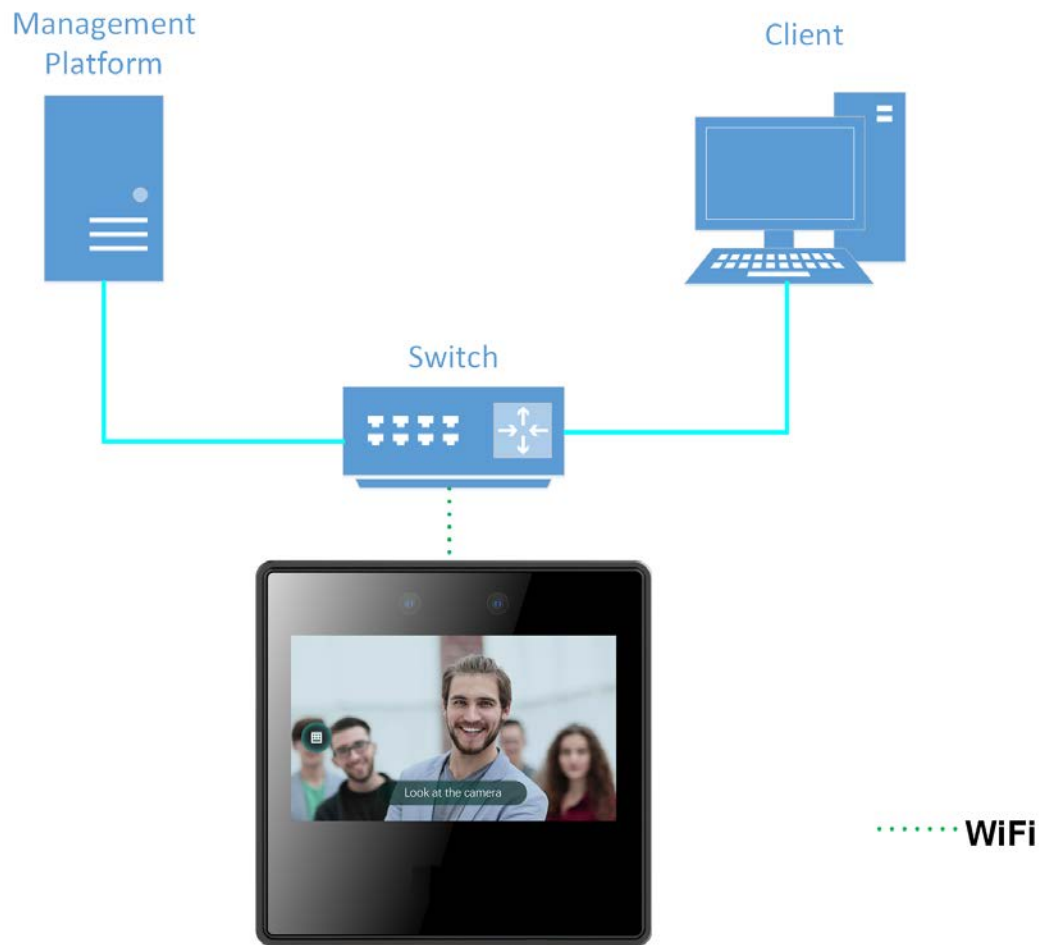

2 Local Operations

2.1 Basic Configuration Procedure

Figure 2-1 Basic configuration procedure

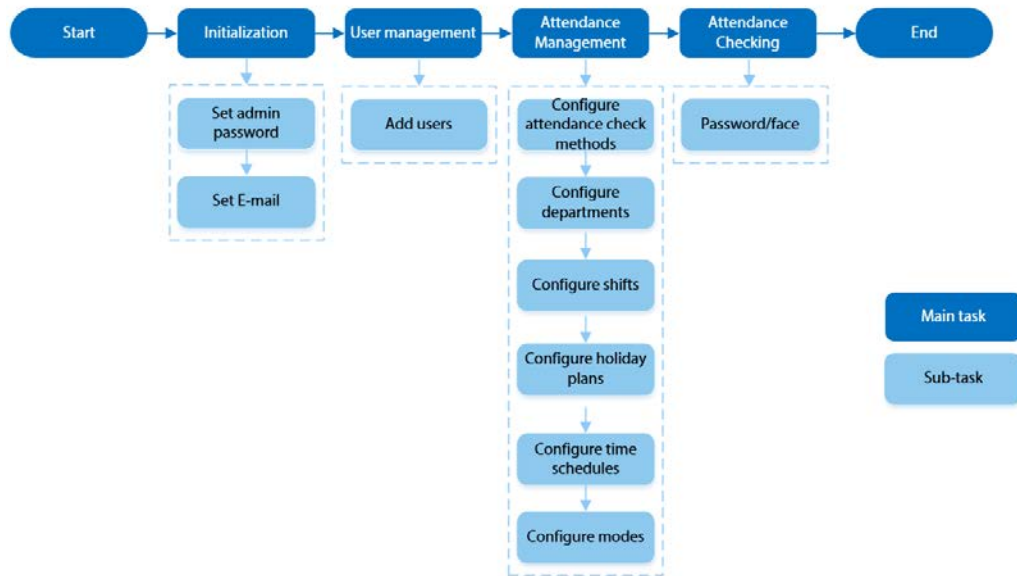

2.2 Common Icons

Table 2-1 Description of icons

Icon	Description
	Main menu icon.
	Confirm icon.
	Turn to the first page of the list.
	Turn to the last page of the list.
	Turn to the previous page of the list.
	Turn to the next page of the list.
	Return to the previous menu.
	Turned on.
	Turned off.
	Delete
	Search

2.3 Standby Screen

You can unlock the door through faces, passwords, and QR code. You can also make calls through

the intercom function.



- If there is no operation in 30 seconds, the Time & Attendance will go to the standby mode.
- This manual is for reference only. Slight differences might be found between the standby screen in this manual and the actual device.

Figure 2-2 Homepage

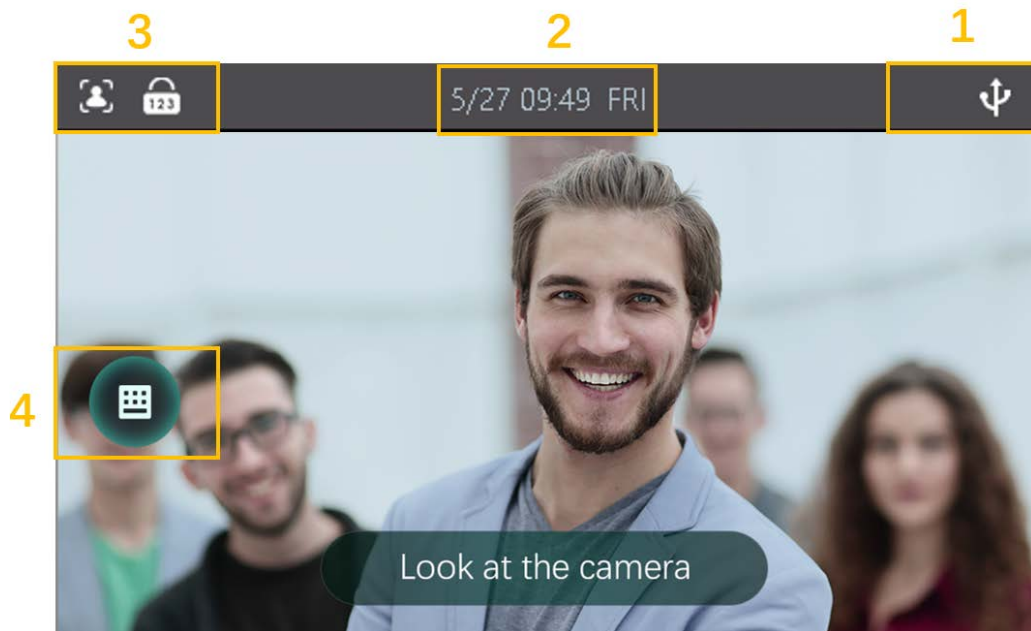


Table 2-2 Home screen description

No.	Name	Description
1	Status display	Displays status of Wi-Fi, network and USB, and more.
2	Date and time	Displays the current date and time.
3	Verification methods	Displays available verification methods.
4	Password	Enter user ID and password to punch in or punch out.

2.4 Initialization

For the first-time use or after restoring factory defaults, you need to select a language on Time & Attendance, and then set the password and email address for the admin account. You can use the admin account to log in to the main menu of the Time & Attendance and the webpage.



- If you forget the administrator password, send a reset request to your registered e-mail address.
- The password must consist of 8 to 32 non-blank characters and contain at least two types of characters among upper case, lower case, number, and special character (excluding ' " ; : &).

2.5 Logging In

Log in to the main menu to configure the Time & Attendance. Only admin account and administrator

account can enter the main menu of the Time & Attendance. For the first-time use, use the admin account to enter the main menu screen and then you can create the other administrator accounts.

- admin account: Can log in to the main menu screen of the Time & Attendance, but has no door access permission.
- Administration account: Can log in to the main menu of the Time & Attendance and has door access permissions.

Step 1 Press and hold the standby screen for 3 seconds.

Step 2 select a verification method to enter the main menu.

- Face: Enter the main menu by face recognition.
- PWD: Enter the user ID and password of the administrator account.
- admin: Enter the admin password to enter the main menu.

2.6 Network Communication

Configure the network, serial port and Wiegand port to connect the Time & Attendance to the network.



The serial port and the wiegand port might differ depending on models of Time & Attendance.

2.6.1 Active Register

You can turn on the automatic registration function to access the Time & Attendance through the management platform.



The management platform can clear all personnel configurations and initialize the Time & Attendance. To avoid data loss, keep the management platform permissions properly.

Step 1 On the **Main Menu**, select **Connection > Network > Active Register**.

Figure 2-3 Auto register

Step 2 Turn on the automatic registration function and set the parameters.

Table 2-3 Auto registration

Parameter	Description
Server Address	The IP address of the management platform.
Port	The port No. of the management platform.
Device ID	Enter the device ID (user defined).  When you add the Time & Attendance to the management platform, the device ID on the management platform must conform to the defined device ID on the Time & Attendance.

Step 3 Enable the active register function.

2.6.2 Configuring Wi-Fi

You can connect the Time & Attendance to the network through Wi-Fi network.



Wi-Fi function is only available for certain models of the Time & Attendance.

Step 1 On the **Main Menu**, select **Connection > Network > WiFi**.

Step 2 Turn on Wi-Fi.

Step 3 Tap  to search available wireless networks.

Step 4 Select a wireless network and enter the password.

If no Wi-Fi is searched, tap **SSID** to enter the name of Wi-Fi.

Step 5 Tap .

2.7 User Management

You can add new users, view user/admin list and edit user information.



The pictures in this manual are for reference only, and might differ from the actual product.

2.7.1 Adding New Users

Step 1 On the **Main Menu**, select **User > New User**.

Step 2 Configure the parameters on the interface.

Figure 2-4 New user (1)

The screenshot shows a mobile application interface for creating a new user. At the top, there is a back arrow on the left, the title 'New User' in the center, and three navigation buttons (up, down, and checkmark) on the right. Below the header, there are six input fields arranged vertically. The first field is 'User ID' with the value '2'. The second field is 'Name'. The third field is 'Face' with the value '0'. The fourth field is 'PWD'. The fifth field is 'User Level' with the value 'User'. The sixth field is 'Valid Date' with the value '2037-12-31'.

Figure 2-5 New user (2)

The screenshot shows the same 'New User' form as Figure 2-4, but with different values. The 'Dept.' field has the value '1-Default'. The 'Shift Mode' field has the value 'Dept. Schedule'. The other fields are not visible in this view.

Table 2-4 Description of new user parameters

Parameter	Description
User ID	Enter user IDs. The IDs can be numbers, letters, and their combinations, and the maximum length of the ID is 32 characters. Each ID is unique.
Name	Enter name with at most 32 characters (including numbers, symbols, and letters).
Face	Make sure that your face is centered on the image capturing frame, and an image of the face will be captured and analyzed automatically.
PWD	Enter the user password. The maximum length of the password is 8 digits.
User Level	You can select a user level for new users. • User: Users only have door access permission. • Admin: Administrators can unlock the door and configure the Time & Attendance.

Parameter	Description
Valid Date	Set a date on which the access permissions of the person will be expired.
Dept.	Set departments.
Shift Mode	Select shift modes.

Step 3 Tap .

2.7.2 Viewing User Information

You can view user/admin list and edit user information.

Step 1 On the **Main Menu**, select **User** > **User List**, or select **User** > **Admin List**.

Step 2 View all added users and admin accounts.

- : Unlock through password.
- : Unlock through face recognition.

Related Operations


On the **User** screen, you can manage the added users.

- Search for users: Tap  and then enter the username.
- Edit users: Tap the user to edit user information.
- Delete users
 - ◇ Delete individually: Select a user, and then tap .
 - ◇ Delete in batches:
 - On the **User List** screen, tap  to delete all users.
 - On the **Admin List** screen, tap  to delete all admin users.

2.8 Attendance Management

The Time Attendance supports attendance management both on the local device or on the Smart PSS Lite. This section only takes configuring attendance on the local device as an example.

Figure 2-6 Configuration flow chart of time attendance

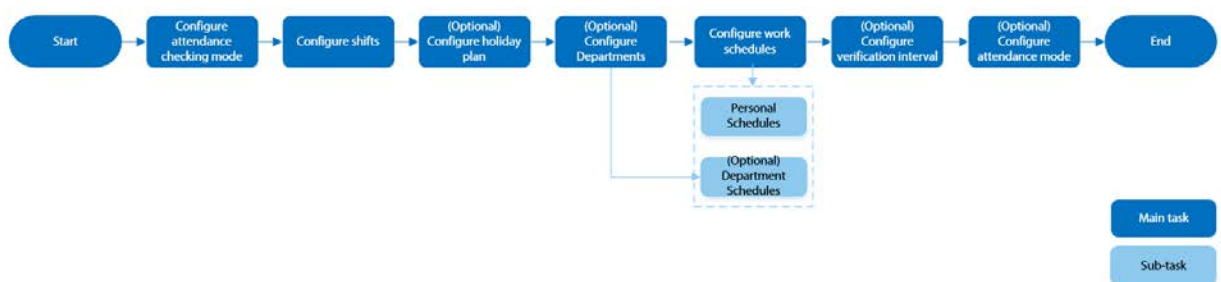

2.8.1 Configuring Attendance Checking Modes

Use face or password, or their combinations to punch in/out.

Step 1 Select **Attendance** > **Atten Type**.

Step 2 Select the attendance checking methods.




To cancel your selection, tap the selected method again.

Step 3 Tap **+And** or **/Or** to configure combinations.

- **+And:** Verify all the selected methods to punch in/out.
- **/Or:** Verify one of the selected unlocking methods to punch in/out.

Figure 2-7 Element (multiple choice)

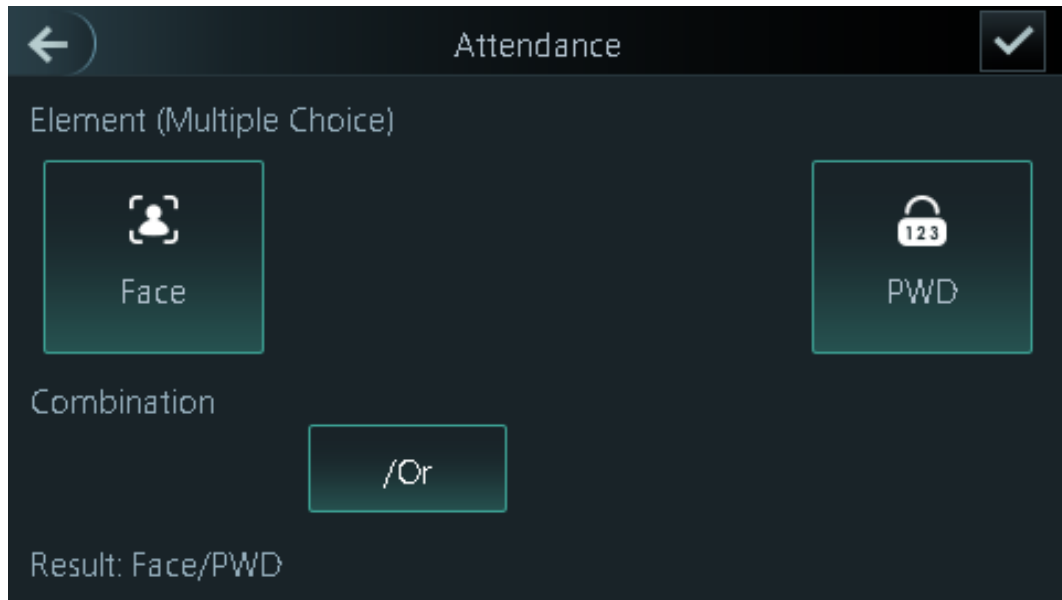

Step 4 Tap  to save changes.

2.8.2 Configuring Shifts

Configure shifts to define time attendance rules. Employee need to come to work at the scheduled shift start time, and leave at the scheduled shift end time except when they work overtime.


Step 1 Select **Attendance > Shift Setting > Shift Setting**.

Step 2 Select the number of the shift.

Tap  to view more shifts. You can configure up to 24 shifts.

Step 3 Configure the parameters of the shift.

Figure 2-8 Element (multiple choice)

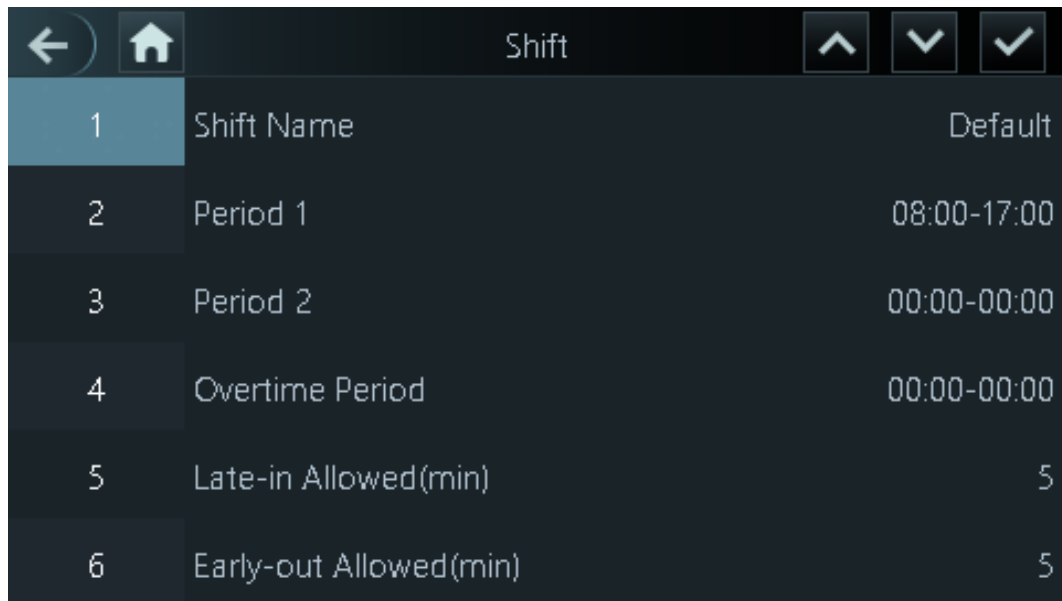

Index	Parameter	Value
1	Shift Name	Default
2	Period 1	08:00-17:00
3	Period 2	00:00-00:00
4	Overtime Period	00:00-00:00
5	Late-in Allowed(min)	5
6	Early-out Allowed(min)	5

Table 2-5 Shift parameters description

Parameter	Description
Shift Name	Enter the name of the shift.
Period 1	Set the time attendance periods. If you set 08:00 —17:00, you need to punch in before 08:00 or earlier, and punch out at 17:00 or later, otherwise the abnormal attendance is abnormal. You can set two periods at the same time, the two periods cannot overlap. People must punch in and punch out in the both defined periods, and make sure their attendance is normal.
Period 2	
Overtime Period	People who punch in/out in the defined overtime period works beyond normal working hours.
Late-in Allowed(min)	The late-in and early-out allowed time is used mainly to give the employee a little flexibility to come a little late or leave a little early from work. For example, if the normal punch-in time is 8:00, and the late-in allowed time is set to 5 minutes, the employee who arrives at 8: 06 AM will be marked late by 1 minute.
Early-out Allowed(min)	



All attendance times are precise down to the second level, for example, if the punch-time is set to 8:05 AM, the employee who punches in at 8:05:59 AM will be marked normal attendance. If the employee who arrives at 8: 06 AM, they will be marked late by 1 minute.

Step 4 Tap .

2.8.3 (Optional) Configuring Holiday Plans


Configure holiday plans during which the time attendance will not tracked.

Step 1 Select **Attendance > Shift Setting > Holiday**.

Step 2 Click  to add holiday plans.

Step 3 Configure the parameters.

Figure 2-9 Holiday Plan

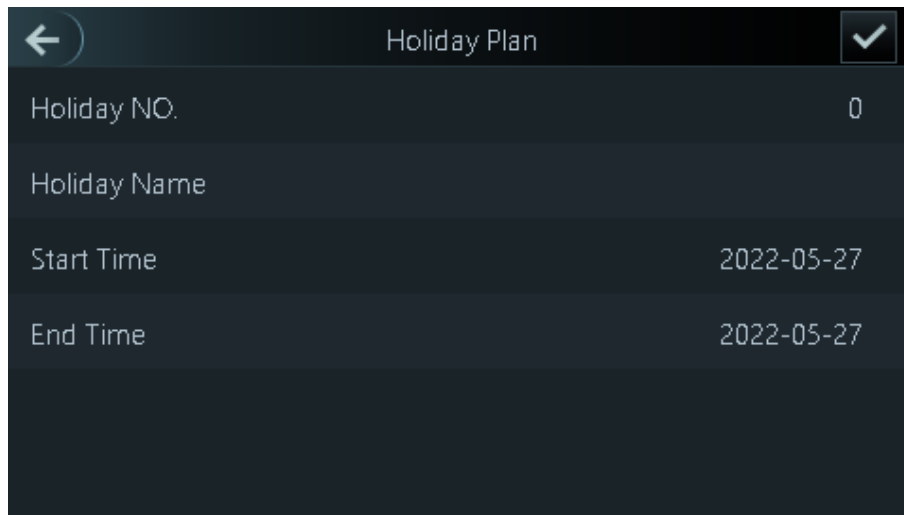

Holiday Plan	
Holiday NO.	0
Holiday Name	
Start Time	2022-05-27
End Time	2022-05-27

Step 4 Tap .

2.8.4 (Optional) Configuring Departments

Define departments.

Step 1 Select **Attendance** > **Dep. Set**.

Step 2 Select a department, and then rename it.

There are existing 20 default departments. We recommend you rename them.

Figure 2-10 Element (multiple choice)



Dept.ID	Dept.Name
1	Default
2	Default
3	Default
4	Default
5	Default

Step 3 Tap .

2.8.5 Configuring Work Schedules

A work schedule generally refers to the days per month and the hours per day that an employee is expected to be at their job. You can create different types of work schedules based on different individuals or departments, and then employees must follow the established work schedules.

Step 1 Select **Attendance** > **Schedule** > **Personal Schedule** > **Dept Schedule**.


Step 2 Set works schedules for individuals.

1. Tap **Personal Schedule**
2. enter the user ID, and then tap .
3. On the calendar, select the date, and then configure shifts.
You can only set work schedules for the current month and the next month.
 - 0 indicates break.
 - 1 to 24 indicates the number of the pre-defined shifts. For how to configure shifts, see "2.8.2 Configuring Shifts".
 - 25 indicates the business trip.
 - 26 indicates the leave of absence.
4. Tap .

Step 3 Set works schedules for the department.

1. Tap **Dept Schedule**.
2. Tap a department, set shifts for a week.
 - 0 indicates break.
 - 1 to 24 indicates the number of the pre-defined shifts. For how to configure shifts, see "2.8.2 Configuring Shifts".
 - 25 indicates the business trip.
 - 26 indicates the leave of absence.

Figure 2-11 Department shifts

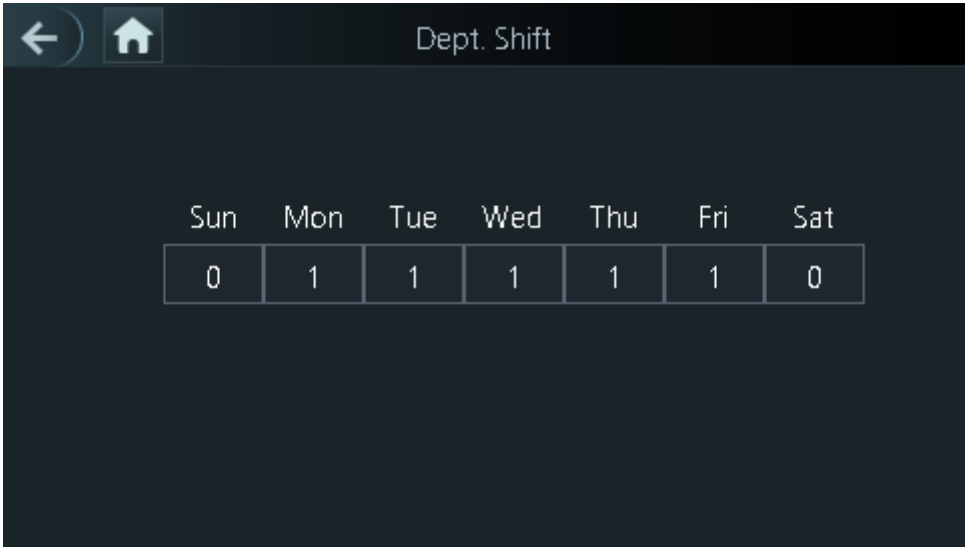

The screenshot shows a mobile application interface titled "Dept. Shift". At the top, there are navigation icons: a back arrow and a home icon. Below the title, there is a table representing a weekly shift schedule. The table has seven columns labeled "Sun", "Mon", "Tue", "Wed", "Thu", "Fri", and "Sat". Each column contains a numerical value in a box: Sun (0), Mon (1), Tue (1), Wed (1), Thu (1), Fri (1), and Sat (0).

Sun	Mon	Tue	Wed	Thu	Fri	Sat
0	1	1	1	1	1	0



The defined work schedule is in one-week cycle and will be applied to all employees in the department.

Step 4 Tap .

2.8.6 (Optional) Configuring Verification Interval Time

the employee repeats punch-in/out within a set time, the earliest punch-in/out will be recorded.

Step 1 Select **Attendance > Schedule > Verification Interval Time(s)**.

Step 2 enter the time interval, and then tap .

2.8.7 (Optional) Configuring Attendance Modes

When you punch in or punch out, you can set the attendance modes to define the time attendance status.

Step 1 On the main menu, tap **Attendance** and then tap to move to the next page and then turn on **Local /Remote**.

You can set the attendance mode only after the **Local /Remote** function is turned on, and time local attendance records will be uploaded to Smart PSS Lite.

Step 2 On the main menu screen, select **Attendance > Mode Set**.

Figure 2-12 Attendance mode

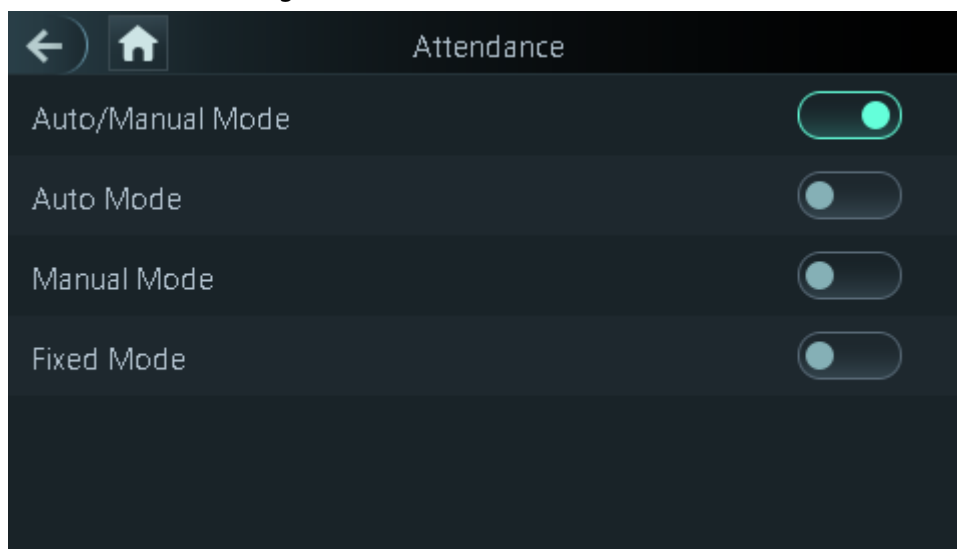


Table 2-6 Attendance mode

Parameter	Description
Auto/Manual Mode	After you punch in/out, you can manually select the attendance status or the screen displays the time attendance status automatically.
Auto Mode	The screen displays attendance status automatically after you punch in/out.
Manual Mode	Punch in/out and then tap Attendance status to manually select the attendance status.
Fixed Mode	When you punch in/out, the screen will display the pre-configured attendance status all the time.

Step 3 Select an attendance mode.

Step 4 Configure the parameters for the attendance mode.

Figure 2-13 Auto Mode/manual mode

Auto Mode	
Check In	06:00-09:59
Break Out	10:00-12:59
Break In	13:00-15:59
Check Out	16:00-20:59
OT-In	00:00-00:00
OT-Out	00:00-00:00

Figure 2-14 Fixed mode

Fixed Mode	
Check In	✓
Break Out	
Break In	
Check Out	
OT-In	
OT-Out	

Table 2-7 Attendance mode parameters

Parameters	Description
Check In	Punch in when your normal workday starts.
Break Out	Punch out when your leave of absence ends.
Break In	Punch in when your leave of absence starts.
Check Out	Punch out when your normal workday starts.
OT-In	Punch-in when your overtime working hours starts.
OT-Out	Punch out when your overtime working hours ends.

2.9 System

2.9.1 Configuring Time

Configure system time, such as date, time, and NTP.

Step 1 On the **Main Menu**, select **System** > **Time**.

Step 2 Configure system time.

Figure 2-15 Time

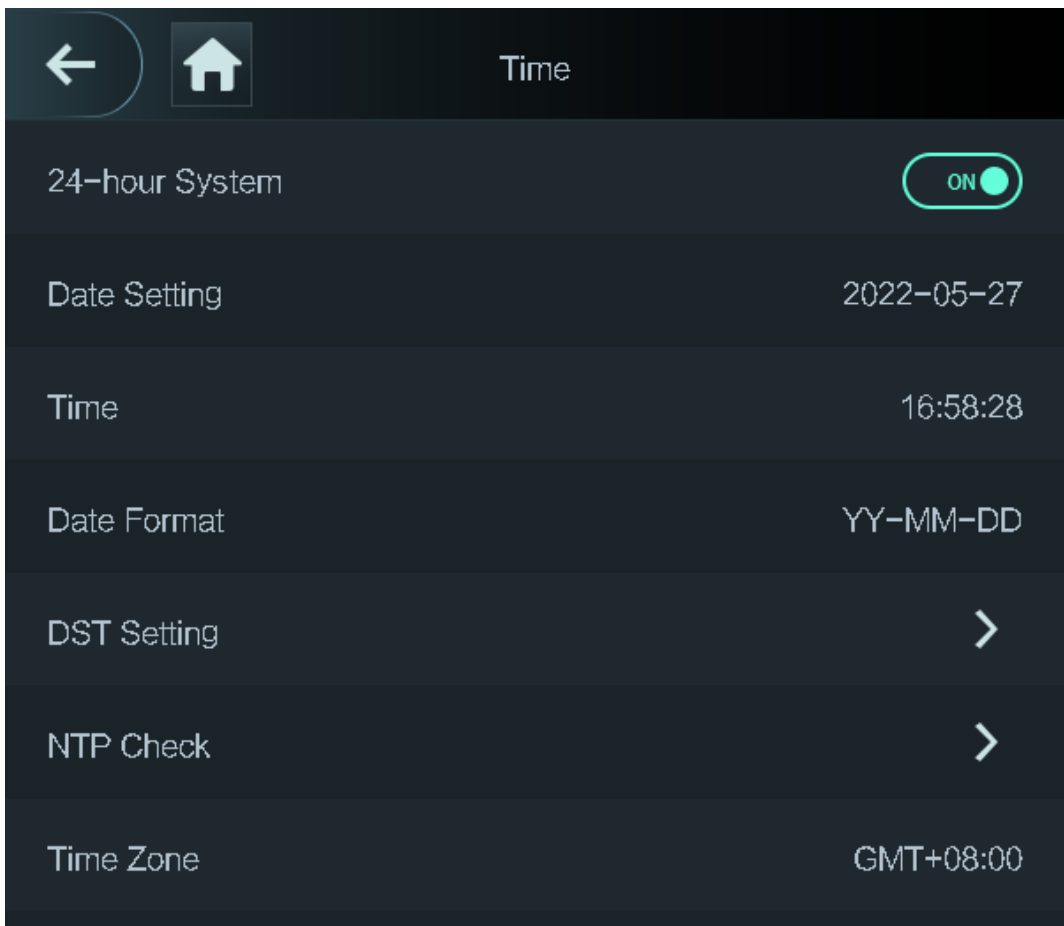


Table 2-8 Description of time parameters

Parameter	Description
24-hour System	The time is displayed in 24-hour format.
Date Setting	Set up the date.
Time	Set up the time.
Date Format	Select a date format.
DST Setting	1. Tap DST Setting 2. Enable DST. 3. Select Date or Week from the DST Type list. 4. Enter start time and end time. 5. tap ☒.

Parameter	Description
NTP Check	A network time protocol (NTP) server is a machine dedicated as the time sync server for all client computers. If your computer is set to sync with a time server on the network, your clock will show the same time as the server. When the administrator changes the time (for daylight savings), all client machines on the network will also update. 1. Tap NTP Check. 2. Turn on the NTP check function and configure parameters. • Server IP Address: Enter the IP address of the NTP server, and the Time & Attendance will automatically sync time with NTP server. • Port: Enter the port of the NTP server. • Interval (min): Enter the time synchronization interval.
Time Zone	Select the time zone.

2.9.2 Configuring Face Parameters

Step 1 On the main menu, select **System > Face Parameter**.

Step 2 Configure the face parameters, and then tap .

Figure 2-16 Face parameter (01)



Figure 2-17 Face parameter (02)

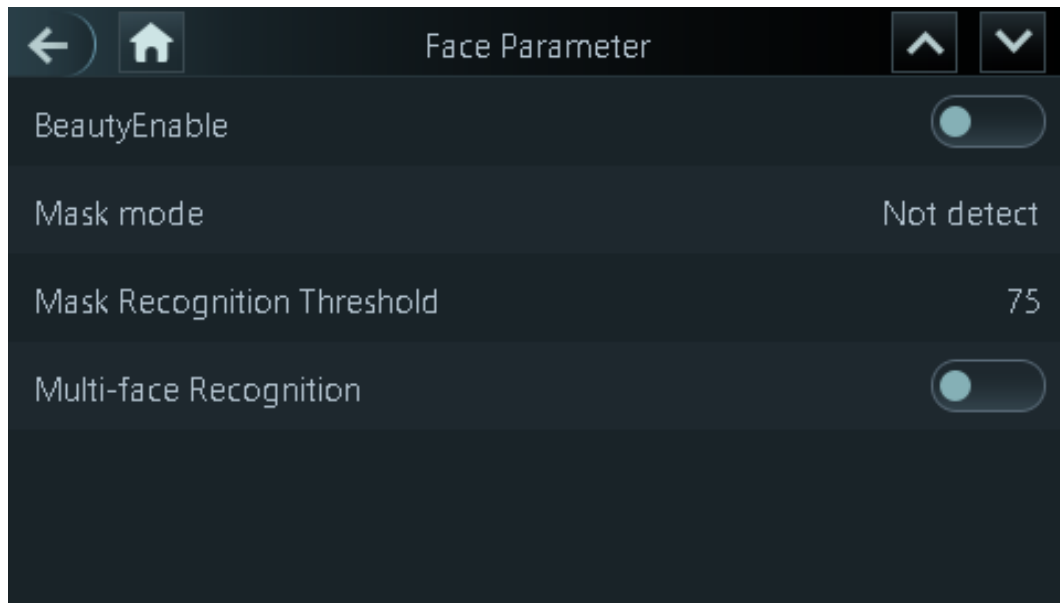


Table 2-9 Description of face parameters

Name	Description
Face Threshold	Adjust the face recognition accuracy. Higher threshold means higher accuracy.
Max. Angle of Face	Set the maximum face pose angle for face detection. Larger value means larger face angle range. If the face pose angle is out of the defined range, the face detection box will not appear.
Pupillary Distance	Face images require desired pixels between the eyes (called pupillary distance) for successful recognition. The default pixel is 45. The pixel changes according to the face size and the distance between faces and the lens. If an adult is 1.5 meters away from the lens, the pupillary distance can be 50 px-70 px.
Recognition Timeout (S)	If a person with access permission has their face successfully recognized, the Time & Attendance will prompt face recognition success. You can enter the prompt interval time.
Invalid Face Prompt Interval (S)	If a person without access permission attempts to unlock the door for several times in the defined interval, the Time & Attendance will prompt face recognition failure. You can enter the prompt interval time.
Anti-fake Threshold	Avoid false face recognition by using a photo, video, mask or a different substitute for an authorized person's face. ● Close: Turns off this function. ● General: Normal level of anti-spoofing detection means higher door access rate for people with face masks. ● High: Higher level of anti-spoofing detection means higher accuracy and security. ● Extremely High: Extremely high level of anti-spoofing detection means extremely high accuracy and security.
BeautyEnable	Beautify captured face images.

Name	Description
Mask Parameters	- Mask mode: No detect: Mask is not detected during face recognition. Mask reminder: Mask is detected during face recognition. If the person is not wearing a mask, the system will remind them to wear masks, and access is allowed. Mask intercept: Mask is detected during face recognition. If a person is not wearing a mask, the system will remind them to wear masks, and access is denied. - Mask Recognition Threshold: Higher threshold means higher mask detection accuracy.
Multi-face Recognition	Supports detecting 4 face images at the same time, and the unlock combinations mode become invalid. The door is unlocked after any one of them gain access.

2.9.3 Setting Volume

You can adjust the volume of the speaker and microphone.

Step 1 On the **Main Menu**, select **System > Volume**.

Step 2 Tap **+** or **-** to adjust the volume.

2.9.4 Screen Settings

Configure screen off time and logout time.

Step 1 On the **Main Menu**, select **System > Screen settings**.

Step 2 Tap **Logout Time** or **Screen Off Timeout**, and then tap **+** or **-** to adjust the time.

2.9.5 Restoring Factory Defaults

Step 1 On the **Main Menu**, select **System > Restore Factory**.

Step 2 Restore factory defaults if necessary.

- Restore Factory:** Resets all configurations and data.
- Restore Factory (Save user & log):** Resets configurations except for user information and logs.

2.9.6 Restart the Device

On the **Main Menu**, select **System > Reboot**, and the Time & Attendance will be restarted.

2.9.7 Configuring the Language

Change the language on the Time & Attendance.

On the **Main Menu**, select **System > Language**, select the language for the Time & Attendance.

2.10 USB Management

You can use a USB to update the Time & Attendance, and export or import user information through USB.



- Make sure that a USB is inserted to the Time & Attendance before you export data or update the system. To avoid failure, do not pull out the USB or perform any operation of the Time & Attendance during the process.
- You have to use a USB to export the information from the Time & Attendance to other devices. Face images are not allowed to be imported through USB.


2.10.1 Exporting to USB

You can export data from the Time & Attendance to a USB. The exported data is encrypted and cannot be edited.

Step 1 On the **Main Menu**, select **USB > USB Export**.

Step 2 Select the data type you want to export, and then tap **OK**.

Figure 2-18 USB export

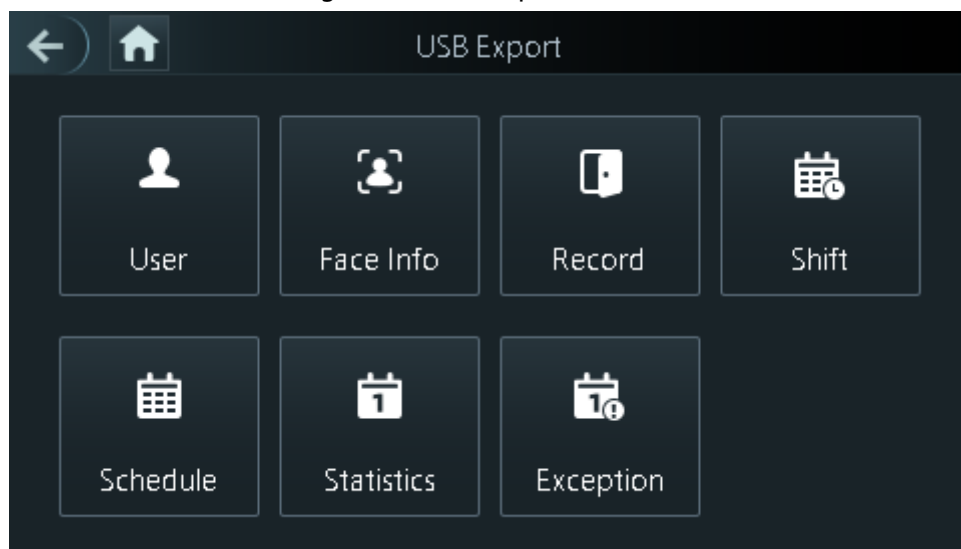


2.10.2 Importing From USB

You can import data from USB to the Time & Attendance.

Step 1 On the **Main Menu**, select **USB > USB Import**.

Step 2 Select the data type that you want to export, and then tap **OK**.

Figure 2-19 USB import

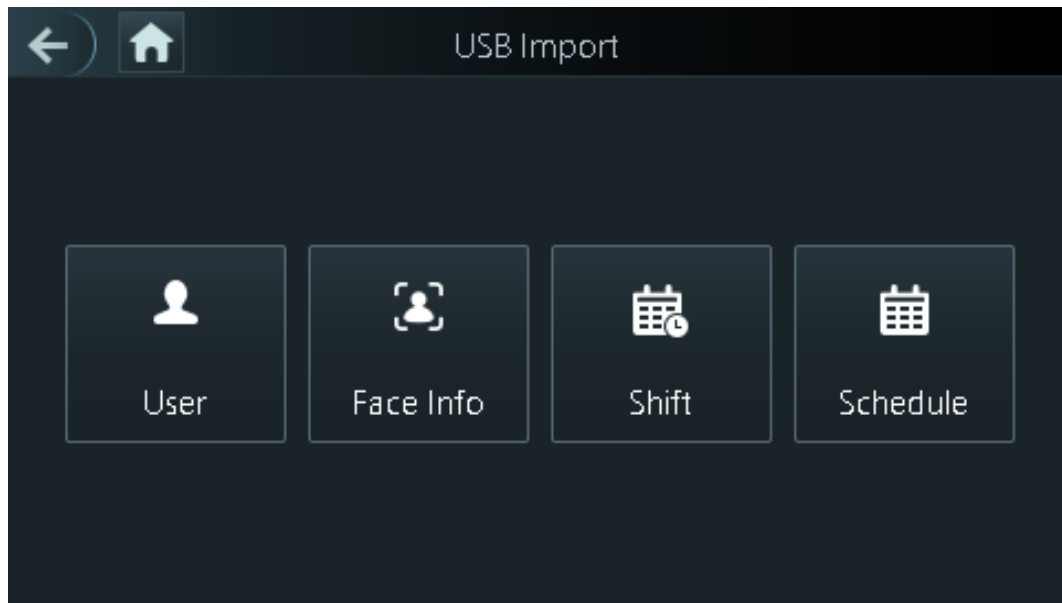

2.10.3 Updating System

Use a USB to update the system of the Time & Attendance.

Step 1 Rename the update file to "update.bin", put it in the root directory of the USB, and then insert the USB to the Time & Attendance.

Step 2 On the **Main Menu**, select **USB > USB Update**.

Step 3 Tap **OK**.

The Time & Attendance will restart when the updating completes.

2.11 Configuring Features

On the **Main Menu** screen, select **Features**.

Figure 2-20 Features

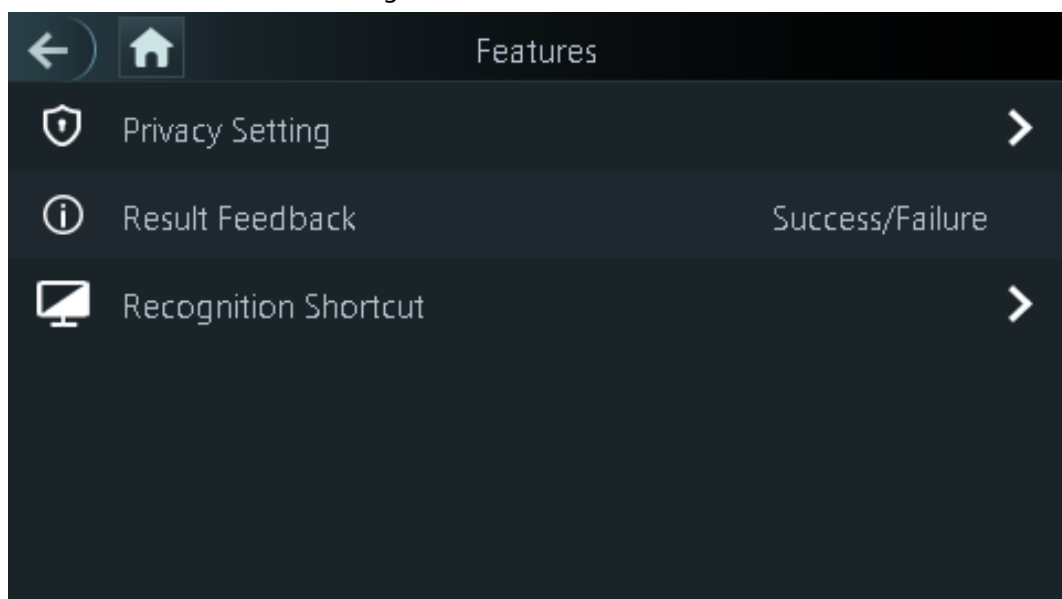


Table 2-10 Description of features

Parameter	Description
Private Setting	• PWD Reset Enable: You can enable this function to reset password. The PWD Reset function is enabled by default. • HTTPS: Hypertext Transfer Protocol Secure (HTTPS) is a protocol for secure communication over a computer network. When HTTPS is enabled, HTTPS will be used to access CGI commands; otherwise HTTP will be used.  When HTTPS is enabled, the Time & Attendance will restart automatically. • CGI: Common Gateway Interface (CGI) offers a standard protocol for web servers to execute programs similarly to console applications running on a server that dynamically generates web pages. The CG I is enabled by default. • SSH: Secure Shell (SSH) is a cryptographic network protocol for operating network services securely over an unsecured network. • Capture Photos: Face images will be captured automatically when people unlock the door. The function is enabled by default. • Clear Captured Photos: Delete all automatically captured photos.
Result Feedback	• Success/Failure: Only displays success or failure on the standby screen. • Only Name: Displays user ID, name and authorization time after access granted; displays not authorized message and authorization time after access denied. • Photo&Name: Displays user's registered face image, user ID, name and authorization time after access granted; displays not authorized message and authorization time after access denied. • Photos&Name: Displays the captured face image and a registered face image of a user, user ID, name and authorization time after access granted; displays not authorized message and authorization time after access denied.
Recognition shortcut	Password: when it is turn on, the icon of the password unlock method is displayed on the standby screen.

2.12 Viewing Attendance Logs

View or search time attendance logs. On the main menu, tap **Record Search> Attendance Records**.

2.13 System Information

You can view data capacity and device version.

2.13.1 Viewing Data Capacity

On the **Main Menu**, select **System Info** > **Data Capacity**, you can view storage capacity of each data type.

2.13.2 Viewing Device Version

On the **Main Menu**, select **System Info** > **Data Capacity**, you can view the device version, such as serial No., software version and more.

3 Web Operations

On the webpage, you can also configure and update the Time & Attendance.



Web configurations differ depending on models of the Time & Attendance.

3.1 Initialization

Initialize the Time & Attendance when you log in to the webpage for the first time or after the Time & Attendance is restored to the factory defaults.

Prerequisites

Make sure that the computer used to log in to the webpage is on the same LAN as the Time & Attendance.

Set a password and an email address before logging in to the webpage for the first time.

Step 1 Open a browser, go to the IP address (the default address is 192.168.1.108) of the Time & Attendance.



We recommend you use the latest version of Chrome or Firefox.

Step 2 Set the password and email address according to the screen instructions.




- The password must consist of 8 to 32 non-blank characters and contain at least two types of the following characters: upper case, lower case, numbers, and special characters (excluding ' " ; : &). Set a high-security password by following the password strength prompt.
- Keep the password safe after initialization and change the password regularly to improve security.

3.2 Logging In

Step 1 Open a browser, enter the IP address of the Time & Attendance in the **Address** bar, and press the Enter key.

Figure 3-1 Login

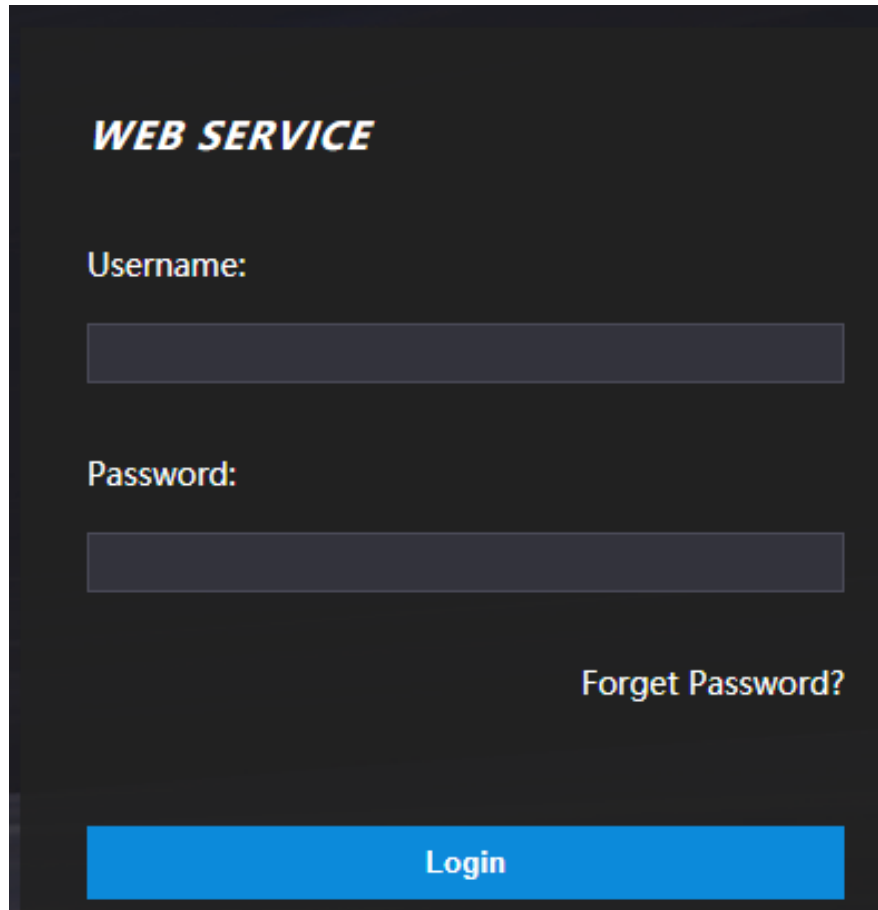

Step 2 Enter the user name and password.



- The default administrator name is admin, and the password is the one you set up during initialization. We recommend you change the administrator password regularly to increase security.
- If you forget the administrator login password, you can click **Forget password?** For details, see "3.3 Resetting the Password".

Step 3 Click **Login**.

3.3 Resetting the Password

Reset the password through the linked e-mail when you forget the admin password.

Step 1 On the login page, click **Forgot password**.

Step 2 Read the on-screen prompt carefully, and then click **OK**.

Step 3 Scan the QR code, and you will get the security code.

Figure 3-2 Reset password

Reset Password (1/2)

Please scan QR code:

Note:
Please send the scan result to support_rpwd@[redacted].com

Security code will be sent to your email: [redacted]

Please input security code: [input field]

Cancel Next



- Up to two security codes will be generated when the same QR code is scanned. If the security code becomes invalid, refresh the QR code and scan again.
- After you scan the QR code, you will receive a security code in your linked e-mail address. Use the security code within 24 hours after you receive it. Otherwise, it will become invalid.
- If the wrong security code is entered in a row, the administrator account will be frozen for 5 minutes.

- Step 4 Enter the security code.
- Step 5 Click **Next**.
- Step 6 Reset and confirm the new password.



The password should consist of 8 to 32 non-blank characters and contain at least two of the following types of characters: upper case, lower case, number, and special character (excluding ' " ; : &).

- Step 7 Click **OK**.

3.4 Data Capacity

You can see how many users, cards and face images that the Time & Attendance can store. Log in to the webpage and select **Data Capacity**.

3.5 Configuring Video and Image

Configure video and image parameters, such as stream and brightness.



We recommend you use the default parameters in this section.

3.5.1 Configuring Video

On the home page, select **Video Setting**, and then configure the video stream, status, image and exposure.

- Video Standard: Select **NTSC**.
- Channel Id: Channel 1 is for configurations of visible light image. Channel 2 is for configurations of infrared light image.
- Default: Restore to defaults settings.
- Capture: Take a snapshot of the current image.



PAL video standard is 25 fps and the NTSC video standard is 30 fps.

3.5.1.1 Configuring Channel 1

Step 1 Select **Video Setting** > **Video Setting**.

Step 2 Select **1** from the **Channel No.** list.

Step 3 Configure the data rate.

Figure 3-3 Date rate

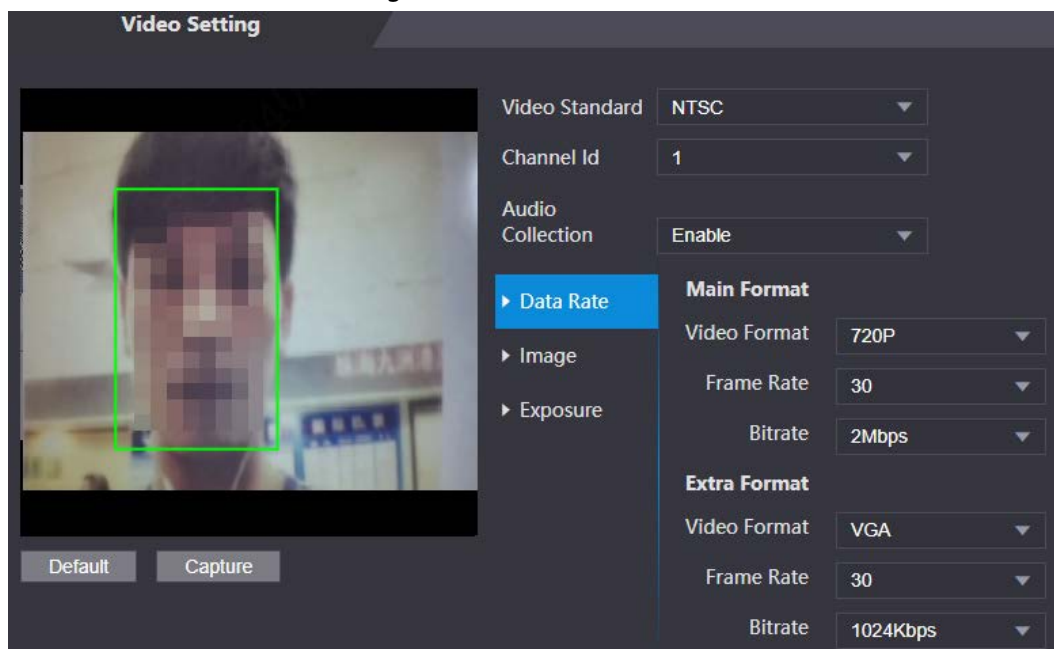


Table 3-1 Date rate description

Parameter		Description
Main Format	Video Format	 When the Time & Attendance functions as the a VTO and connects the VTH, the acquired stream limit of VTH is 720p. When resolution is changed to 1080p, the call and monitor function might be affected.
	Frame Rate	The number of frames (or images) per second. The frame rate range is 1–25 fps.
	Bitrate	It indicates the amount of data transmitted over an internet connection in a given amount of time. Select a proper bandwidth based on your network speed.
Sub Stream	Video Format	The sub-stream supports D1, VGA and QVGA.
	Frame Rate	The number of frames (or images) per second. The frame rate range is 1–25 fps.
	Bitrate	It indicates the amount of data transmitted over an internet connection in a given amount of time.

Step 4 Configure the image.

Figure 3-4 Image

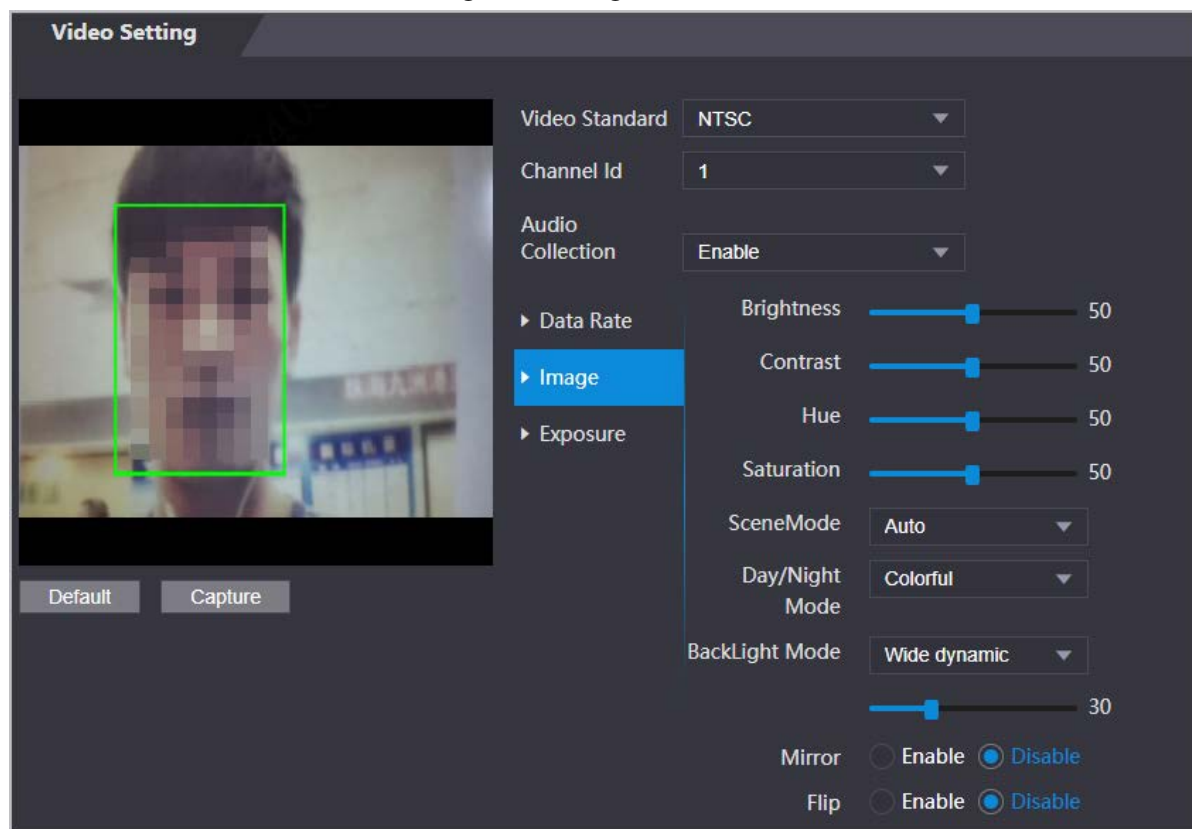


Table 3-2 Image description

Parameter	Description
Contrast	Contrast is the difference in the luminance or color that makes an object distinguishable. The larger the contrast value is, the greater the color contrast will be.
Hue	Refers to the strength or saturation of a color. It describes the color intensity, or how pure it is.
Saturation	Color saturation indicates the intensity of color in an image. As the saturation increases, the appear stronger, for example being more red or more blue.  The saturation value does not change image brightness.
Scene Mode	The image hue is different in different scene mode. • Close: Scene mode function is turned off. • Auto: The system automatically adjusts the scene mode based on the photographic sensitivity. • Sunny: In this mode, image hue will be reduced. • Night: In this mode, image hue will be increased.
Day/Night	Day/Night mode affects light compensation in different situations. • Auto: The system automatically adjusts the day/night mode based on the photographic sensitivity. • Colorful: In this mode, images are colorful. • Black and white: In this mode, images are in black and white.
Backlight Mode	• Close: Backlight compensation is turned off. • Backlight: Backlight compensation automatically brings more light to darker areas of an image when bright light shining from behind obscures it. • Wide dynamic: The system dims bright areas and compensates for dark areas to create a balance to improve the overall image quality. • Inhibition: Highlight compensation (HLC) is a technology used in CCTV/IP security cameras to deal with images that are exposed to lights like headlights or spotlights. The image sensor of the camera detects strong lights in the video and reduces exposure in these spots to enhance the overall quality of the image.
Mirror	When the function is turned on, images will be displayed with the left and right side reversed.
Flip	When this function is turned on, images can be flipped over.

Step 5 Configure the exposure parameters.

Figure 3-5 Exposure

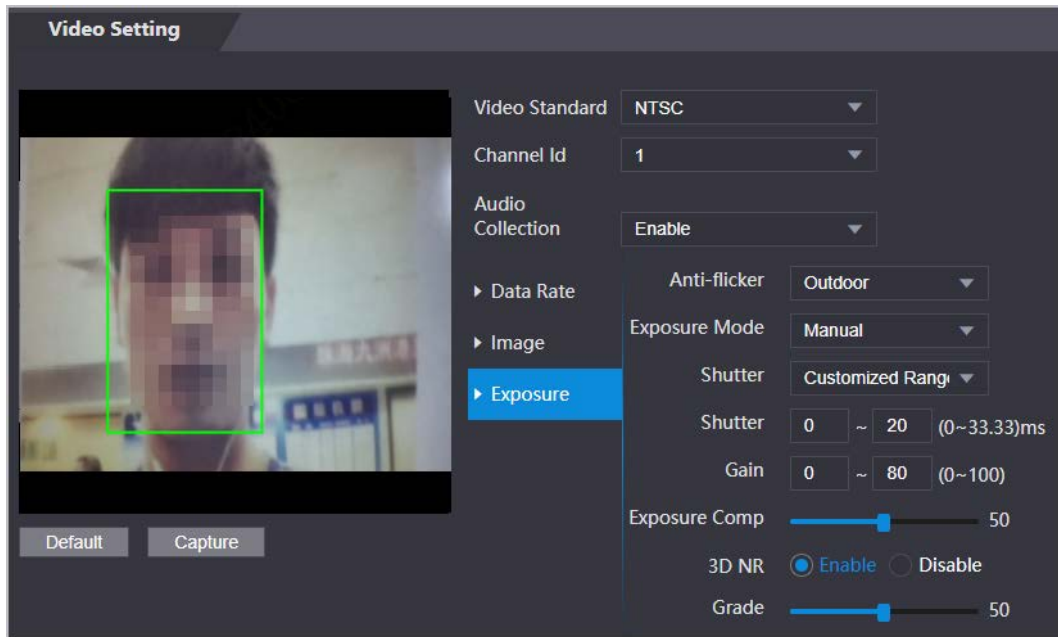


Table 3-3 Exposure parameter description

Parameter	Description
Anti-flicker	Set anti-flicker to reduce flicker and decrease or reduce uneven colors or exposure. • 50Hz: When the mains power supply is 50 Hz, the exposure is automatically adjusted to prevent the appearance of horizontal lines. • 60Hz: When the mains power supply is 60 Hz, the exposure is automatically adjusted to reduce the appearance of horizontal lines. • Outdoor: When Outdoor is selected, the exposure mode can be switched.
Exposure Mode	You can set the exposure to adjust image brightness. • Auto: The Time & Attendance automatically adjusts the brightness of images. • Shutter Priority: The Access Terminal will adjust image brightness according to shutter exposure range. If the image brightness is not enough and the shutter value has reached its upper or lower limit, the Time & Attendance will adjust the gain value automatically for ideal brightness level. • Manual: You can configure gain and shutter value manually to adjust image brightness.  ◇ When you select Outdoor from the Anti-flicker list, you can select Shutter Priority as the exposure mode. ◇ Exposure mode might differ depending on different models of Time & Attendance.

Parameter	Description
Shutter	Shutter is a component that allows light to pass for a determined period. The higher the shutter speed, the shorter the exposure time, and the darker the image.
Gain	When the gain value range is set, video quality will be improved.
Exposure Compensation	You can make a photo brighter or darker by adjusting exposure compensation value.
3D NR	When 3D Noise Reduction (RD) is turned on, video noise can be reduced to ensure high definition videos. You can set its grade when this function is turned on.
Grade	

3.5.1.2 Configuring Channel 2

Step 1 Select **Video Setting** > **Video Setting**.

Step 2 Select 2 from the **Channel No.**

Step 3 Configure the video status.



We recommend you turn on the WDR function when the face is in back-lighting.

Figure 3-6 Image

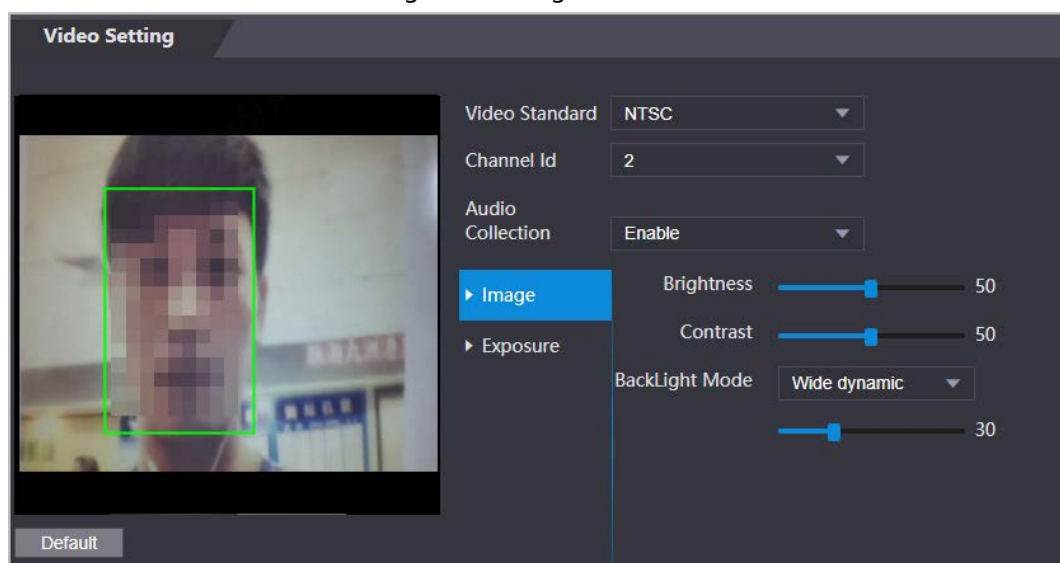


Table 3-4 Image description

Parameter	Description
Brightness	Brightness is the relative lightness or darkness of a particular color. The larger the value is, the brighter the image will be.
Contrast	Contrast is the difference in the luminance or color that makes an object distinguishable. The larger the contrast value is, the greater the color contrast will be.

Parameter	Description
Backlight Mode	• Close: Back-light compensation is turned off. • Backlight: Black-light compensation automatically brings more light to darker areas of an image when bright light shining from behind obscures it. • Wide dynamic: The system dims bright areas and compensates for dark areas to ensure to create a balance to improve the overall image quality. • Inhibition: Highlight compensation (HLC) is a technology used in CCTV/IP security cameras to deal with images that are exposed to lights like headlights or spotlights. The image sensor of the camera detects strong lights in the video and reduce exposure in these spots to enhance the overall quality of the image.

Step 4 Configure the exposure parameters.

Figure 3-7 Exposure parameter

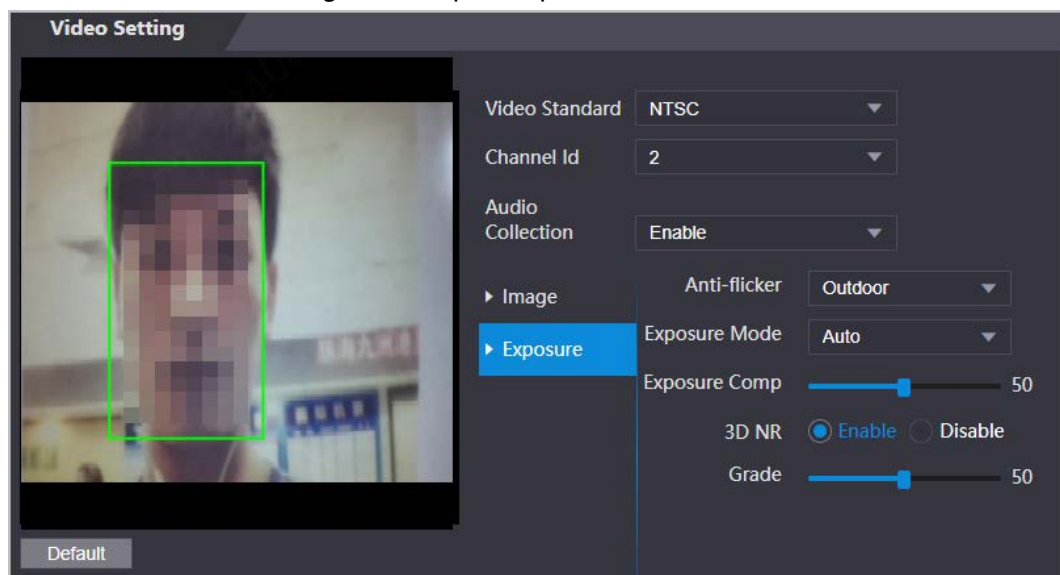


Table 3-5 Exposure parameter description

Parameter	Description
Anti-flicker	Set anti-flicker to reduce flicker and decrease or eliminate uneven colors or exposure. • 50Hz: When the mains power supply is 50 Hz, the exposure is automatically adjusted to prevent the appearance of horizontal lines. • 60 Hz: When the mains power supply is 60 Hz, the exposure is automatically adjusted to reduce the appearance of horizontal lines. • Outdoor: When Outdoor is selected, the exposure mode can be switched.

Parameter	Description
Exposure Mode	You can set the exposure to adjust image brightness. • Auto: The Time & Attendance automatically adjusts the brightness of images. • Shutter Priority: The Access Terminal will adjust image brightness according to shutter exposure range. If the image brightness is not enough and the shutter value has reached its upper or lower limit, the Time & Attendance will adjust the gain value automatically for ideal brightness level. • Manual: You can configure gain and shutter value manually to adjust image brightness.  ◇ When you select Outdoor from the Anti-flicker list, you can select Shutter Priority as the exposure mode. ◇ Exposure model might differ depending on different models of Time & Attendance.
Shutter	Shutter is a device that allows light to pass for a determined period. The higher the shutter speed, the shorter the exposure time, and the darker the image.
Gain	When the gain value range is set, video quality will be improved.
Exposure Compensation	You can make a photo brighter or darker by adjusting exposure compensation value.
3D NR	When 3D Noise Reduction (RD) is turned on, video noise can be reduced to ensure high definition videos.
Grade	
	You can set its grade when this function is turned on.

3.5.2 Setting Volume

You can adjust the volume of the speaker.


- Step 1 Log in to the webpage.
- Step 2 Select **Video Setting** > **Volume Setting**.
- Step 3 Drag the slider the adjust the volume.
- Step 4 Click **OK**.

3.6 Configuring Face Detection

You can configure human face related parameters on this interface to increase the accuracy of the face recognition.

- Step 1 Log in to the webpage.
- Step 2 Select **Face Detect**.

Figure 3-8 Face detect

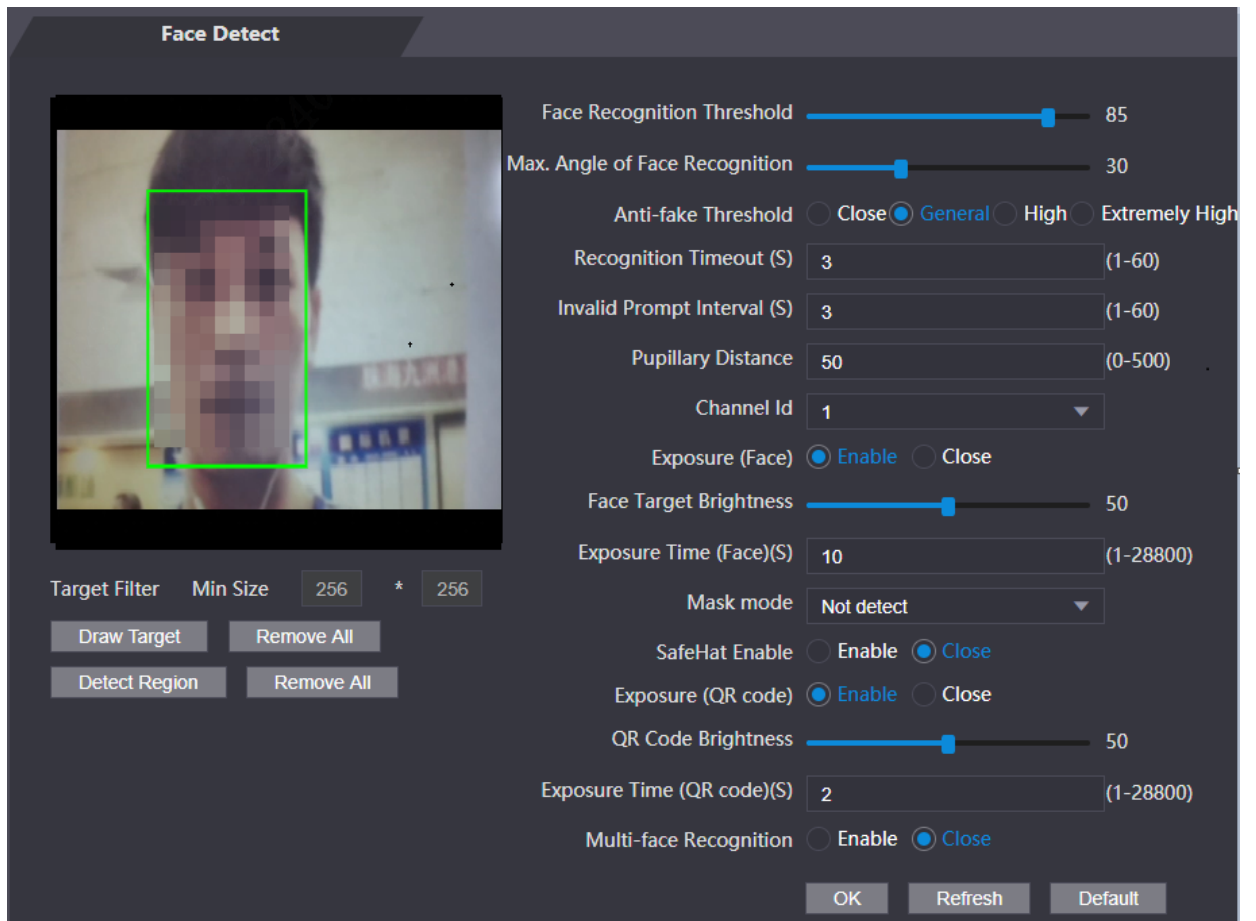

Step 3 Configure the parameters.

Table 3-6 Description of face detection parameters

Parameter	Description
Face Threshold	Adjust the face recognition accuracy. Higher threshold means higher accuracy.
Max. Angle of Face	Set the maximum face pose angle for face detection. Larger value means larger face angle range. If the face pose angle is out of the defined range, the face detection box will not appear.
Anti-fake Threshold	Avoid false face recognition by using a photo, video, mask or a different substitute for an authorized person's face. - Close: Turns off this function. - General: Normal level of anti-spoofing detection means higher door access rate for people with face masks. - High: Higher level of anti-spoofing detection means higher accuracy and security. - Extremely High: Extremely high level of anti-spoofing detection means extremely high accuracy and security.
Recognition Timeout (S)	If a person with access permission has their face successfully recognized, the Time & Attendance will prompt face recognition success. You can enter the prompt interval time.

Parameter	Description
Invalid Face Prompt Interval (S)	If a person without access permission attempts to unlock the door for several times in the defined interval, the Time & Attendance will prompt face recognition failure. You can enter the prompt interval time.
Pupillary Distance	Face images require desired pixels between the eyes (called pupillary distance) for successful recognition. The default pixel is 45. The pixel changes according to the face size and the distance between faces and the lens. If an adult is 1.5 meters away from the lens, the pupillary distance can be 50 px-70 px.
Channel Id	1 is for the white light camera and 2 is for the IR light camera.
Exposure (Face)	After face exposure is enabled, human faces will be clearer when the Time & Attendance is installed outdoors.
Face Target Brightness	The default value is 50. Adjust the brightness as needed.
Exposure Time	After a face is detected, the Time & Attendance will give out light to illuminate the face, and the Time & Attendance will not give out light again until the interval you set has passed.
Mask Mode	• No detect: Mask is not detected during face recognition. • Mask reminder: Mask is detected during face recognition. If the person does not wear a mask, the system will give them a reminder to wear masks, and access is allowed. • Mask intercept: Mask is detected during face recognition. If a person is not wearing a mask, the system will give them a reminder to wear masks, and access is denied.
Exposure (QR code)	When the Time & Attendance is installed outdoors, the QR code will be clearer based on the defined QR code brightness when you scan it.
QR code Brightness	
Exposure Time (QR code) (S)	After a QR code is scanned, the Time & Attendance will give out light to illuminate the QR code, and the Time & Attendance will not give out light again until the defined exposure time has passed.
Multi-face Recognition	Supports detecting 4 face images at the same time, and the unlock combinations mode become invalid. The door is unlocked after any one of them gain access.

Step 4 Draw the face detection area.

1. Click **Detect Region**,
2. Right-click to draw the detection area, and then release the left button of the mouse to complete drawing.
The face in the defined area will be detected.

Step 5 Draw the target size.

- 1) Click **Draw target**
- 2) Right-click to draw the face recognition box to define the minimum size of detected face.

Only when the size of the face is larger than the defined size, the face can be detected by the Time & Attendance.

Step 6 Click **OK**.

3.7 Configuring Network


3.7.1 Configuring Port

You can limit access to the Time & Attendance at the same through web, desktop client and phone.

Step 1 Select **Network Setting > Port**.

Step 2 Configure port numbers.

Figure 3-9 Configure ports

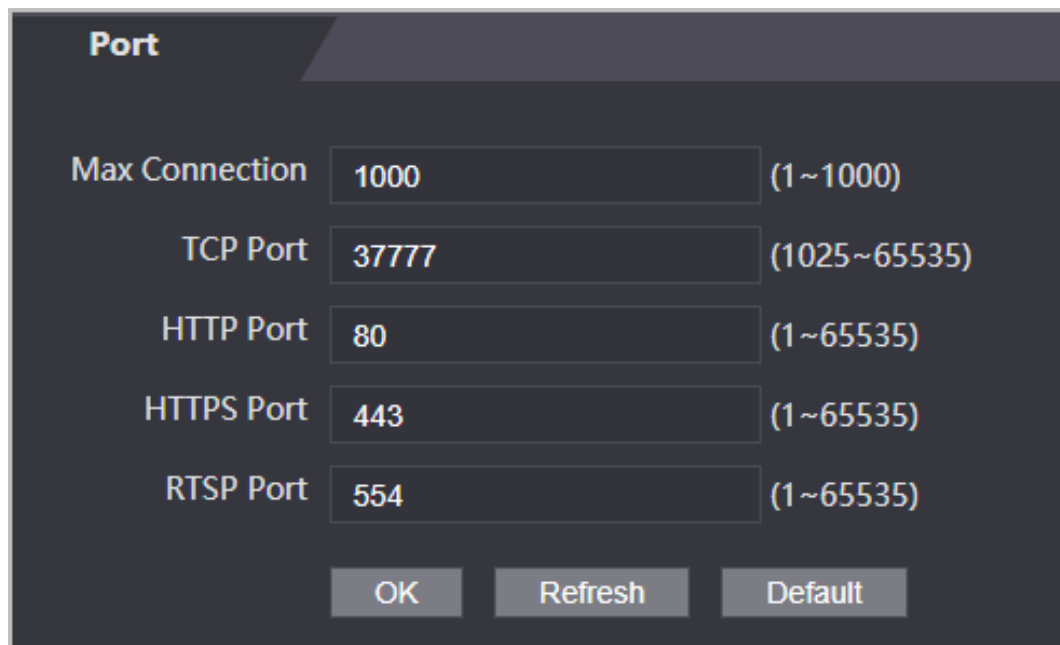

Port

Max Connection	1000	(1~1000)
TCP Port	37777	(1025~65535)
HTTP Port	80	(1~65535)
HTTPS Port	443	(1~65535)
RTSP Port	554	(1~65535)

OK Refresh Default



Except **Max Connection** and **RTSP Port**, you need to restart the Time & Attendance to make the configurations effective after you change other parameters.

Table 3-7 Description of ports

Parameter	Description
Max Connection	You can set the maximum number of clients (such as web, desktop client and phone) that can access the Time & Attendance at the same time.
TCP Port	Default value is 37777.
HTTP Port	Default value is 80. If you want to change the port number, add the new port number after the IP address when you log in to the webpage.
HTTPS Port	Default value is 443.
RTSP Port	Default value is 554.

Step 3 Click **OK**.

3.7.2 Configuring Automatic Registration

The Time & Attendance reports its address to the designated server so that you can get access to the Time & Attendance through the management platform.

Step 1 On the home page, select **Network Setting > Register**.

Step 2 Enable the automatic registration function and configure the parameters.

Figure 3-10 Register

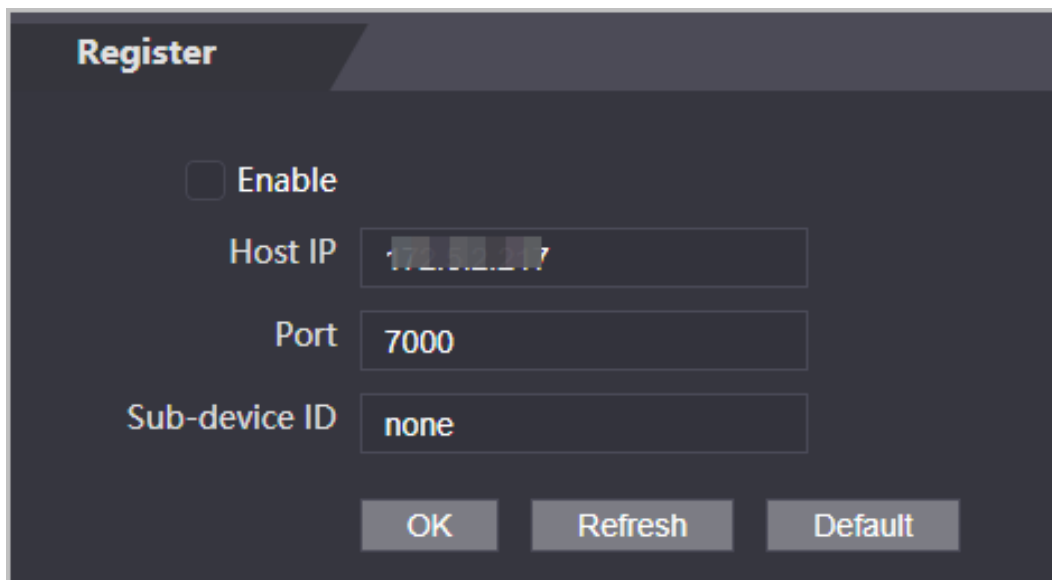


Table 3-8 Automatic registration description

Parameter	Description
Host IP	The IP address or the domain name of the server.
Port	The port of the server used for automatic registration.
Sub-Device ID	Enter the sub-device ID (user defined).  When you add the Time & Attendance to the management platform, the sub-device ID on the management platform must conform to the defined sub-device ID on the Time & Attendance.

Step 3 Click **Apply**.

3.8 Safety Management

3.8.1 Configuring IP Authority

Step 1 Log in to the webpage.

Step 2 Click **Safety Mgmt. > IP Authority**.

Step 3 Select a cybersecurity mode from the **Type** list.

- **Network Access:** Set allowlist and blocklist to control access to the Time & Attendance.
- **Prohibit PING:** Enable **PING prohibited** function, and the Time & Attendance will not respond to the Ping request.

- **Anti Half Connection:** Enable **Anti Half Connection** function, and the Time & Attendance can still function properly under half connection attack.

3.8.1.1 Network Access

Step 1 Select **Network Access** from the **Type** list.

Step 2 Select the **Enable** check box.

Figure 3-11 Network access

The screenshot shows the 'IP Authority' configuration window. The 'Type' dropdown is set to 'Network Access'. The 'Enable' checkbox is checked. The 'Mode' section has two radio buttons: 'Allow List' (selected) and 'Block List'. Below the mode selection are two tabs: 'Allow List' (active) and 'Block List'. A table with columns 'IP Address', 'MAC Address', 'Port', 'Modify', and 'Delete' is shown, but it is empty with the text 'No data...' in the center. At the bottom, there is a red warning message: 'Only the listed IP addresses/MAC are allowed to visit corresponding ports of the device.' Below the message are buttons for 'Add', 'Default', 'Refresh', and 'OK'.

Step 3 Select **Allow List** or **Block List**.

Step 4 Click **Add**.

Figure 3-12 Add IP

The screenshot shows the 'Add' configuration window. It has a title bar with 'Add' and a close button. The 'Type' dropdown is set to 'IP Address'. The 'IP Version' dropdown is set to 'IPv4'. The 'IPv4' text field contains '1.0.0.1'. The 'All Ports' checkbox is unchecked. The 'Device Start Port' text field contains '1'. The 'Device End Port' text field contains '1'. At the bottom, there are 'Save' and 'Cancel' buttons.

Step 5 Configure parameters.

Table 3-9 Description of adding IP parameters

Parameter	Description
Type	Select the address type from the Type list.
IP Version	IPv4 by default.
All Ports	Select All Ports check box, and your settings will apply to all ports.
Device Start Port	If you clear All Ports check box, set the device start port and device end port.
Device End Port	

Step 6 Click **Save**, and the **IP Authority** interface is displayed.

Step 7 Click **OK**.


- Click  to edit the allowlist or blocklist.
- Click  to delete the allowlist or blocklist

3.8.1.2 Prohibit PING

Step 1 Select **Prohibit PING** from the **Type** list.

Step 2 Select the **Enable** check box.

Figure 3-13 Prohibit PING

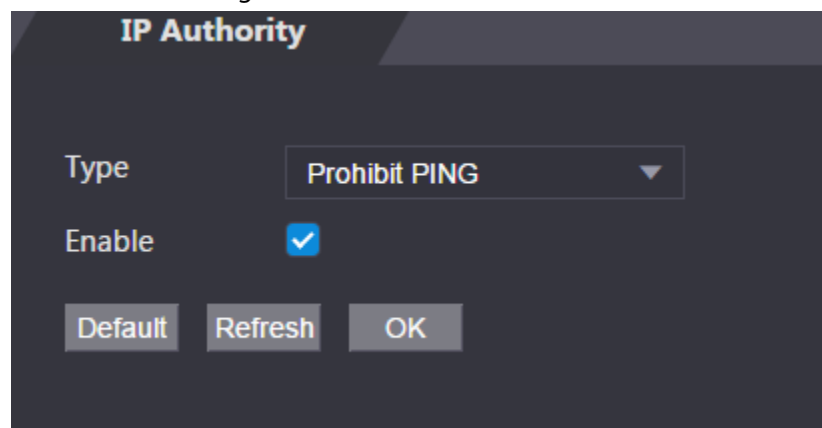

Step 3 Click **OK**.

3.8.1.3 Anti Half Connection

Step 1 Select the **Anti Half Connection** from the **Type** list.

Step 2 Select the **Enable** check box.

Step 3 Click **OK**.

3.8.2 Configuring System

Step 1 Log in to the web interface.

Step 2 Select **Safety Mgmt.** > **System Service**.

Step 3 Enable or disable the system services as needed.

Figure 3-14 System service

System Service

- ☒ SSH
- ☒ PWD Reset Enable
- ☒ CGI
- ☒ ONVIF
- ☐ Audio and Video Transmission Encryption
- ☐ RTSP Over TLS
- ☐ HTTPS

Warning:Disabling HTTPS may be at risk

☐ Compatible with TLSv1.1 and earlier versions

☒ Emergency Maintenance

Auth Method ☒ Security Mode (Recommended) ☐ Compatible Mode

Password Expires in Never

Create Server Certificate Download Root Certificate

Details Delete

OK Refresh Default

Table 3-10 Description of system service

Parameter	Description
SSH	Secure Shell (SSH) is a cryptographic network protocol for operating network services securely over an unsecured network. When SSH is enabled, SSH provides cryptographic service for the data transmission.
PWD Reset Enable	If enabled, you can reset the password. This function is enabled by default.
CGI	Common Gateway Interface (CGI) offers a standard protocol for web servers to execute programs similarly to console applications running on a server that dynamically generates web pages. When CGI is enabled, CGI commands can be used. The CGI is enabled by default.
ONVIF	Enable other devices to pull the video stream of the VTO via the ONVIF protocol.
Audio and Video Transmission Encryption	If this function is enabled, audio and video transmission is automatically encrypted.
RTSP Over TLS	If this function is enabled, audio and video transmission is encrypted via THE RTSP protocol.
HTTPS	Hypertext Transfer Protocol Secure (HTTPS) is a protocol for secure communication over a computer network. When HTTPS is enabled, HTTPS will be used to access CGI commands; otherwise HTTP will be used.

Parameter	Description
Compatible with TLSv1.1 and earlier versions	Enable this function if your browser is using TLS V1.1 or earlier versions.
Emergency Maintenance	Enable it for faults analysis and maintenance.
Auth Method	We recommend you select the security mode .

Step 4 Click **OK**.

3.8.2.1 Creating Server Certificate

Configure HTTPS server to improve your website security with server certificate.



- If you use HTTPS for the first time or the IP address of the Time & Attendance is changed, create a server certificate and install a root certificate.
- If you use another computer to log in to the webpage of the Time & Attendance, you need to download and install the root certificate again on the new computer or copy the root certificate to the it.

Step 1 On the **System Service** page, click **Create Server Certificate**.

Step 2 Enter information and click **OK**.

The Time & Attendance will restart.


Figure 3-15 Create Server Certificate

3.8.2.2 Downloading Root Certificate

Step 1 On the **System Service** page, click **Download Root Certificate**.


Step 2 Double-click the file that you have downloaded, and then click **Open**.

Figure 3-16 File download

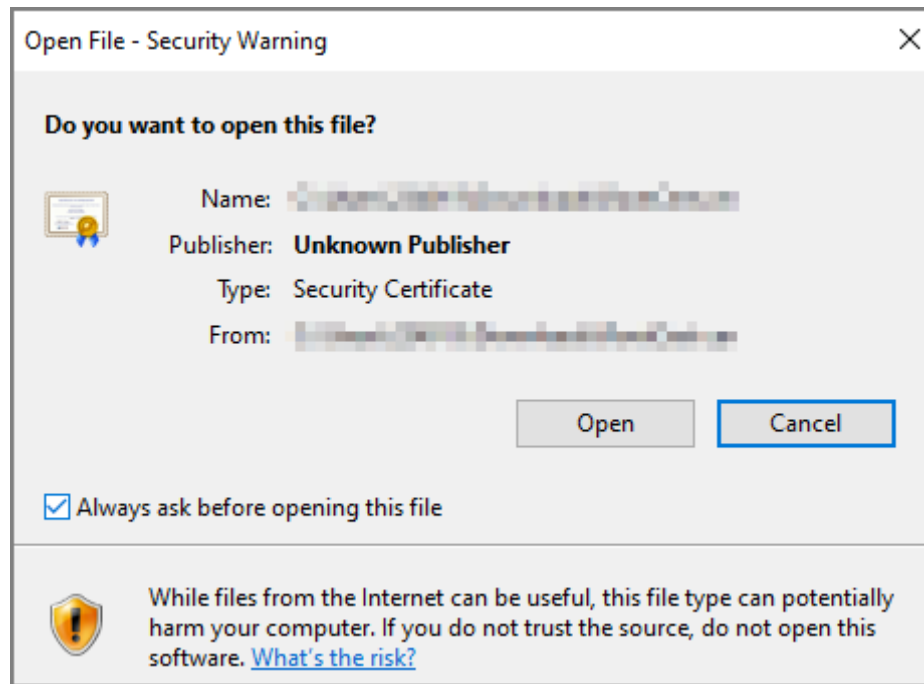


Step 3 Click **Install Certificate**.

Figure 3-17 Certificate information

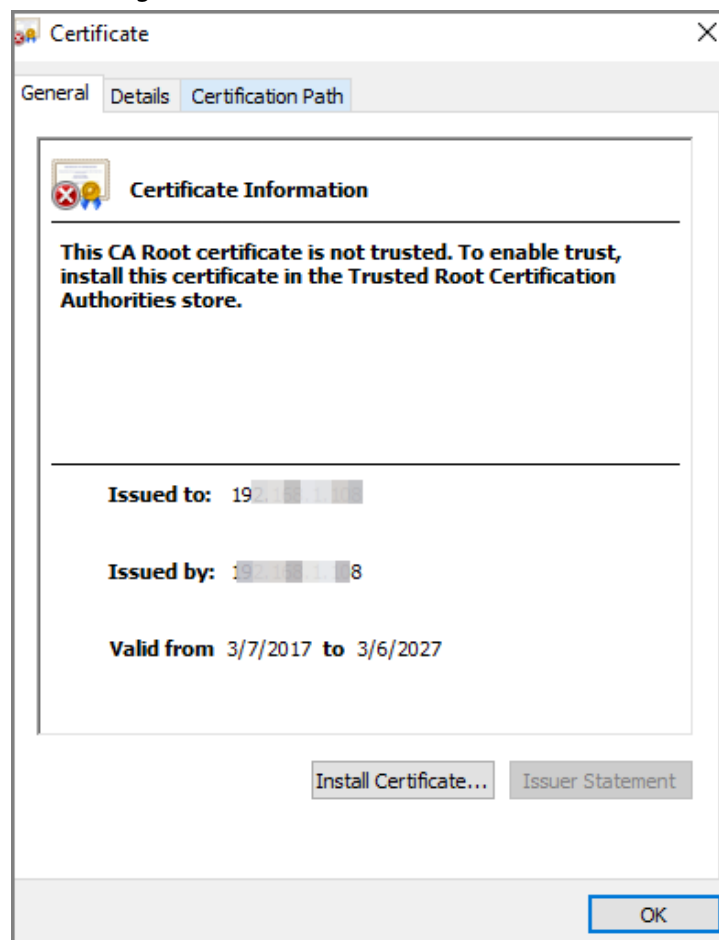

Step 4 Select **Current User** or **Local Machine**, and then click **Next**.


Figure 3-18 Certificate import wizard (1)

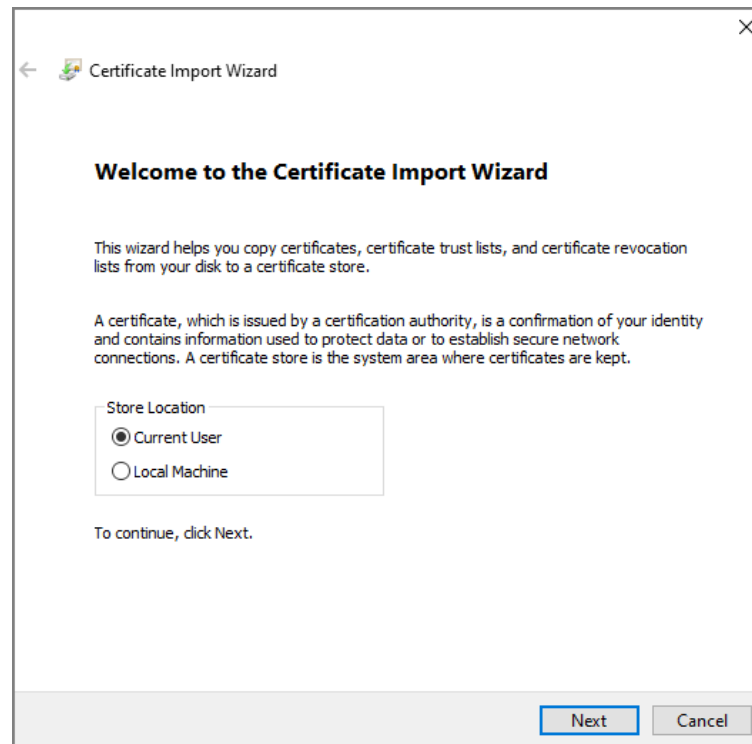

Step 5 Select the appropriate storage location.


- 1) Select **Place all certificates in the following store**.
- 2) Click **Browse** to import the certificate to the **Trusted Root Certification Authorities** store, and then click **Next**.

Figure 3-19 Certificate Import Wizard (2)

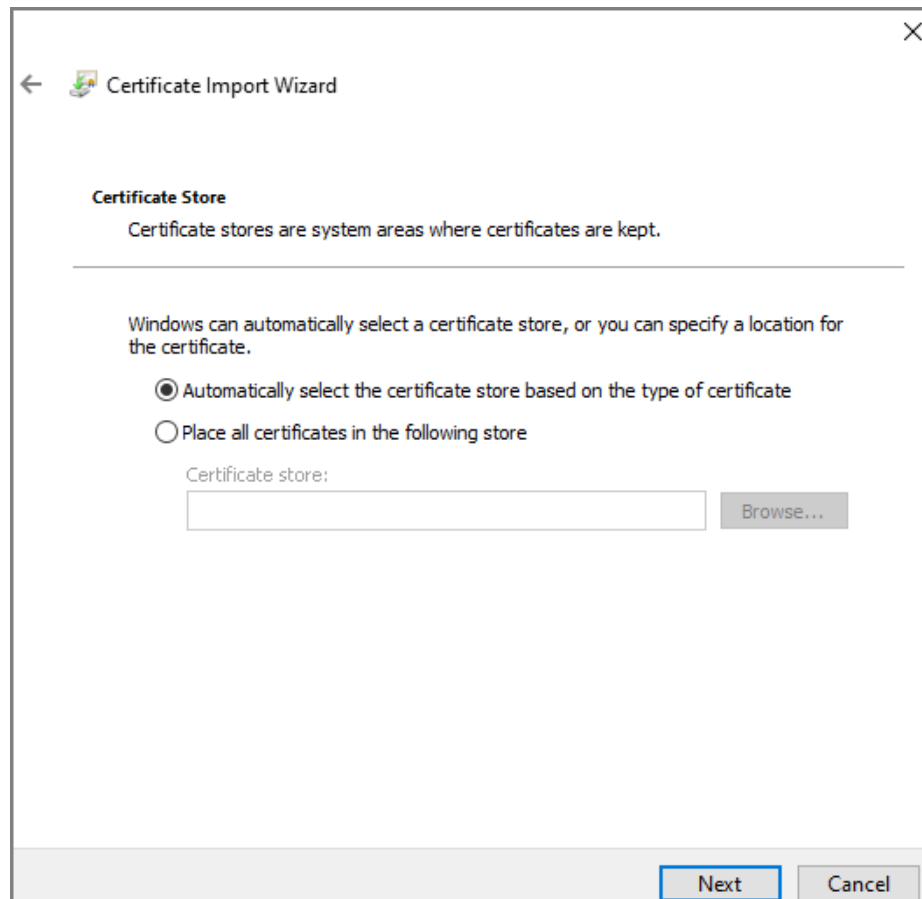

Step 6 Click **Finish**.

Figure 3-20 Certificate import wizard (3)

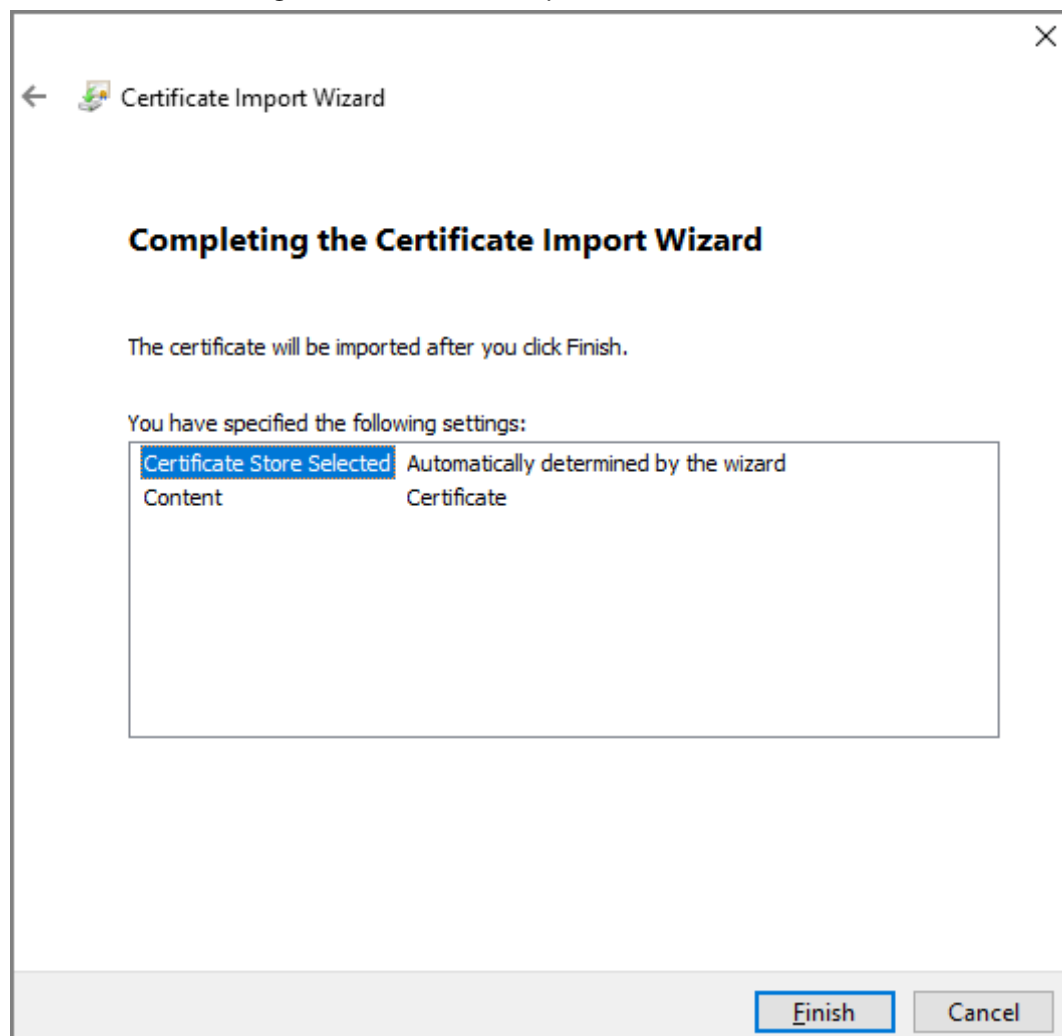

3.9 User Management

You can add or delete users, change users' passwords, and enter an email address for resetting the password when you forget your password.

3.9.1 Adding Users

You can add new users and then they can log in to the webpage of the Time & Attendance.

Procedure

- Step 1 On the home page, select **User Mgmt. > User Mgmt..**
- Step 2 Click **Add**, and enter the user information.



- The username cannot be the same with existing account. The username consists of up to 31 characters and only allows for numbers, letters, underscores, midlines, dots, or @.
 - The password must consist of 8 to 32 non-blank characters and contain at least two types of the following characters: Upper case, lower case, numbers, and special characters (excluding ' " ; : &).
- Set a high-security password by following the password strength prompt.

Figure 3-21 Add user

The screenshot shows a dark-themed dialog box titled "Add". It contains the following elements:

- Username:** A text input field.
- Password:** A text input field.
- Strength Indicators:** Three buttons labeled "Low", "Medium", and "High" are positioned below the Password field.
- Confirm Password:** A text input field.
- Remark:** A text input field.
- Buttons:** "OK" and "Cancel" buttons are located at the bottom right of the dialog.

Step 3 Click **OK**.



Only admin account can change password and admin account cannot be deleted.


3.9.2 Adding ONVIF Users

Open Network Video Interface Forum (ONVIF), a global and open industry forum that is established for the development of a global open standard for the interface of physical IP-based security products, which allows the compatibility from different manufactures. ONVIF users have their identities verified through ONVIF protocol. The default ONVIF user is admin.

Procedure

- Step 1 On the home page, select **User Mgmt. > Onvif User**.
- Step 2 Click **Add** and then configure parameters.

Figure 3-22 Add ONVIF user

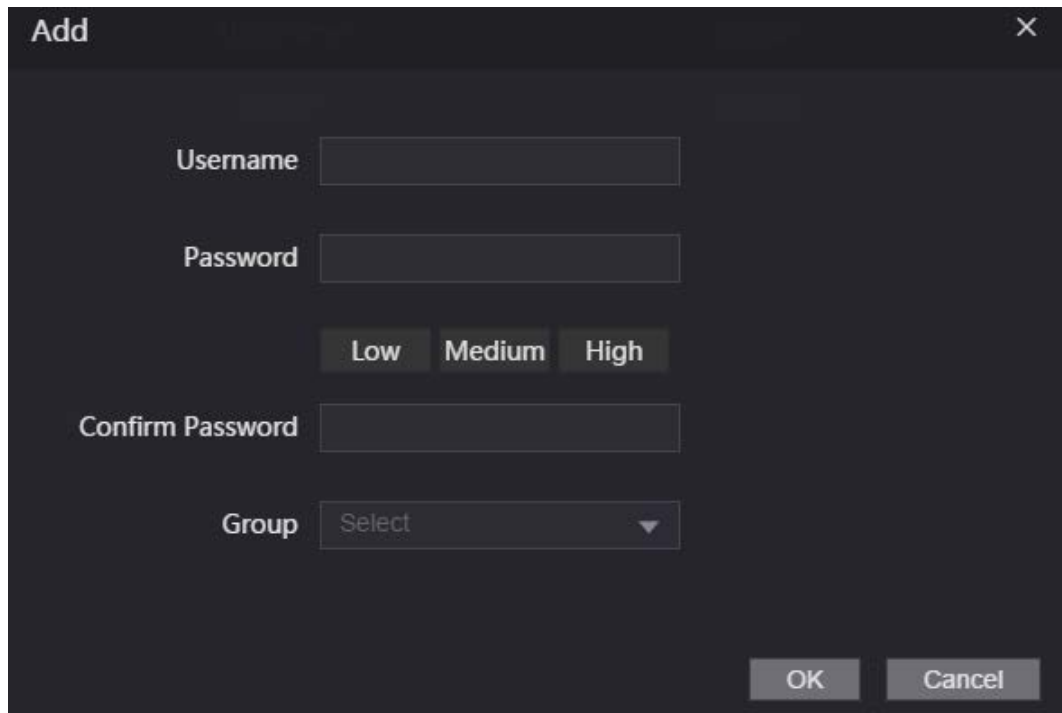

Step 3 Click **OK**.

3.9.3 Viewing Online Users

You can view online users who currently log in to the webpage.
On the home page, select **Online User**.


3.10 Maintenance

You can regularly restart the Time & Attendance during the idle time to improve its performance.

Step 1 Log in to the webpage.

Step 2 Select **Maintenance**.

Figure 3-23 Maintenance

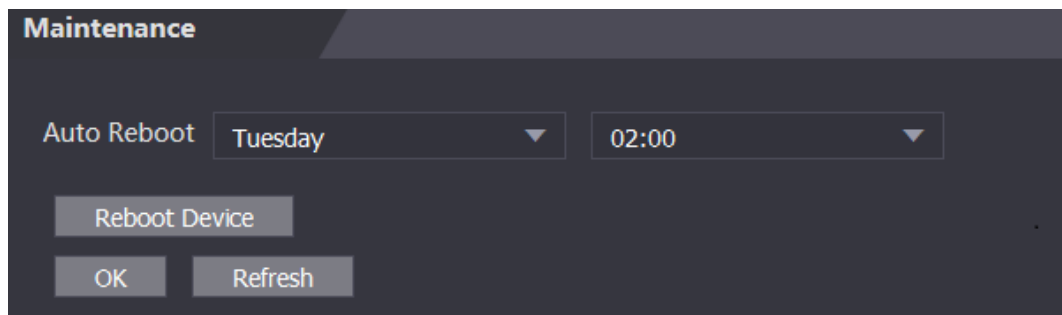

Step 3 Set the time, and then click **OK**.

Step 4 (Optional) Click **Reboot Device**, the Time & Attendance will restart immediately.

3.11 Configuration Management

When more than one Time & Attendance need the same configurations, you can configure parameters for them by importing or exporting configuration files.


3.11.1 Exporting/Importing Configuration Files

You can import or export the configuration file of the Time & Attendance. When you want to apply the same configurations to multiple devices, you can import the configuration file to them.

Step 1 Log in to the webpage.

Step 2 Select **Config Mgmt.** > **Config Mgmt.**.

Figure 3-24 Configuration management

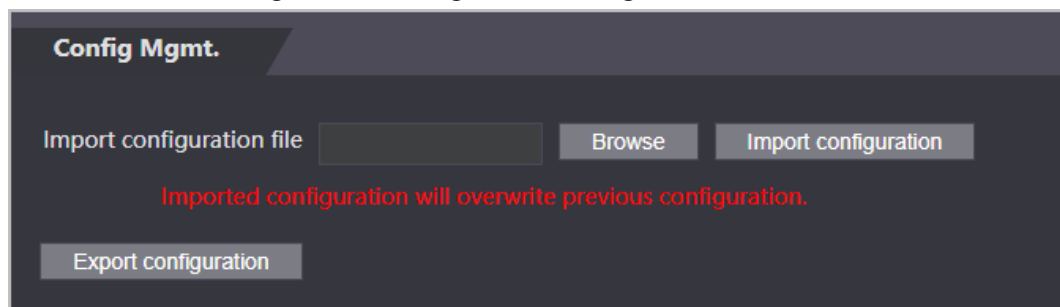

Step 3 Export or import configuration files.

- Export configuration file.
Click **Export Configuration** to download the file to the local.



IP will not be exported.

- Import configuration file.
 1. Click **Browse** to select the configuration file.
 2. Click **Import configuration**.



Configuration file can only be imported to the device with the same model.

3.11.2 Restoring Factory Defaults



Restoring the **Time & Attendance** to default configurations will cause data loss. Please be advised.

Step 1 Select **Config Mgmt.** > **Default**

Step 2 Restore factory defaults if necessary.

- **Restore Factory**: Resets configurations of the Time & Attendance and delete all data.
- **Restore Factory (Save user & log)**: Resets configurations of the Time & Attendance and deletes all data except for user information and logs.

3.12 Upgrading System



- Use the correct update file. Make sure you get the correct update file from the technical support.
- Do not disconnect the power supply or network, or restart or shut down the Time & Attendance during the update.

3.12.1 File Update

Step 1 On the home page, select **Upgrade**.

Step 2 In the **File Upgrade** area, click **Browse**, and then upload the update file.



The upgrade file should be a .bin file.

Step 3 Click **Update**.

The Time & Attendance will restart after update completes.

3.12.2 Online Update

Step 1 On the home page, select **Upgrade**.

Step 2 In the **Online Upgrade** area, select an update method.

- Select **Auto Check**, the Time & Attendance will automatically check whether the its latest version is available.
- Select **Manual Check**, and you can immediately check whether the latest version is available.

Step 3 Update the Time & Attendance when the latest version is available.

3.13 Viewing Version Information

On the home page, select **Version Info**, and you can view version information, such as device model, serial number, hardware version, legal information and more.

3.14 Viewing Logs

View logs such as system logs, admin logs, and unlock records.

3.14.1 System Logs

View and search for system logs.

Step 1 Log in to the webpage.

Step 2 Select **System Log** > **System Log**.

Step 3 Select the time range and the log type, and then click **Query**.
Click **Backup** to download the system log.

3.14.2 Admin Logs

Search for admin logs by using admin ID.

Step 1 Log in to the webpage.

Step 2 Select **System Log > Admin Log**.

Step 3 Enter the admin ID, and then click **Query**.

3.14.3 Attendance Logs

Search for time attendance records and export them.

Step 1 Log in to the webpage.

Step 2 Select **System Log > Search Records**.

Step 3 Select the time range and the log type, and then click **Query**.

You can click **Export Data** to download the log.



Face images will not be exported.

4 Smart PSS Lite Configuration

This section introduces how to manage and configure the Time & Attendance through Smart PSS Lite. You can also configure time attendance rules on the platform, such as shifts, modes, schedules and more. For details, see the user's manual of Smart PSS Lite.

4.1 Installing and Logging In

Install and log in to Smart PSS Lite. For details, see the user manual of Smart PSS Lite.

- Step 1 Get the software package of the Smart PSS Lite from the technical support, and then install and run the software according to instructions.
- Step 2 Initialize Smart PSS Lite when you log in for the first time, including setting password and security questions.



Set the password is for the first-time use, and then set security questions to reset your password when you forgot it.

- Step 3 Enter your username and password to log in to Smart PSS Lite.

4.2 Adding Devices

You need to add the Time & Attendance to Smart PSS Lite. You can add them in batches or individually.

4.2.1 Adding Individually

You can add Time & Attendance individually by entering their IP addresses or domain names.

- Step 1 Log in to Smart PSS Lite.
- Step 2 Click **Device Manager** and click **Add**.
- Step 3 Enter the device information.

Figure 4-1 Device information

The screenshot shows a web form titled 'Device information'. It has two columns of input fields. The first column contains 'Device Name' with the value 'Access Terminal', 'IP' with a masked address, and 'User Name' with the value 'admin'. The second column contains 'Method to add' with a dropdown menu set to 'IP', 'Port' with the value '37777', and 'Password' with a masked password. At the bottom right, there are three buttons: 'Add and Continue' (blue), 'Add' (blue), and 'Cancel' (grey).

Table 4-1 Device parameters Description

Parameter	Description
Device Name	Enter a name of the Time & Attendance. We recommend you name it after its installation area.
Method to add	Select IP to add the Access Terminal by entering its IP Address.
IP	Enter IP address of the Time & Attendance.
Port	The port number is 37777 by default.
User Name/Password	Enter the username and password of the Access Terminal.

Step 4 Click **Add**.

The added Time & Attendance displays on the **Devices** page. You can click **Add and Continue** to add more Time & Attendances.

4.2.2 Adding in Batches

We recommend you use the auto-search function when you add want to Time & Attendances in batches. Make sure the Time & Attendances you add must be on the same network segment.

Step 1 Log in to Smart PSS Lite.

Step 2 Click **Device Manager** and search for devices.

- Click **Auto Search**, to search for devices on the same LAN.
- Enter the network segment range, and then click **Search**.

Figure 4-2 Auto search

Auto Search

Auto Search Device Segment: 1 - 10 Search

Modify IP Initialization Search Device Number: 1

No.	IP	Device Type	MAC Address	Port	Initialization Status
1	10.34.30.30	DSS V8	2-00-00-00-00-00c	443	✓ Initialized

Add Cancel

A device list will be displayed.



Select a device, and then click **Modify IP** to modify its IP address.

Step 3 Select the Time & Attendance that you want to add to Smart PSS Lite, and then click **Add**.

Step 4 Enter the username and the password of the Time & Attendance.
You can view the added Time & Attendance on the **Devices** page.



The Time & Attendance automatically logs in to Smart PSS Lite after being added. **Online** is displayed after successful login.

4.3 User Management

Add users, assign cards to them, and configure their access permissions.

4.3.1 Configuring Card Type

Set the card type before you assign cards to users. For example, if the assigned card is an ID card, set card type to ID card.

Step 1 Log in to Smart PSS Lite.

Step 2 Click **Access Solution > Personnel Manager > User**.

Step 3 On the **Card Issuing Type** and then select a card type.



Make sure that the card type is same to the actually assigned card; otherwise, the card number cannot be read.

Step 4 Click **OK**.

4.3.2 Adding Users

4.3.2.1 Adding Individually

You can add users individually.

Step 1 Log in to Smart PSS Lite.

Step 2 Click **Access Solution** > **Personnel Manger** > **User** > **Add**.

Step 3 Click **Basic Info** tab, and enter the basic information of the user, and then import the face image.

Figure 4-3 Add basic information

The screenshot shows the 'Add basic information' form in the Smart PSS Lite software. The form is divided into three tabs: 'Basic Info', 'Certification', and 'Permission configuration'. The 'Basic Info' tab is active. It contains the following fields and options:

- User ID: *
- Name: *
- Department: Default Company
- User Type: General
- Valid Time: 2022/6/9 0:00:00
- Number of use: Limitless
- Details section:
 - Gender: ☒ Male ☐ Female
 - Title: Mr
 - DOB: 1985/3/15
 - Tel:
 - Email:
 - Mailing Address:
 - Administrator: ☒
 - Remark:
 - ID Type: ID
 - ID No.:
 - Company:
 - Occupation:
 - Entry Time: 2022/6/8 20:18:31
 - Resign Time: 2031/6/9 20:18:31
- Image upload section: A placeholder for a face image with a 'Next' button, 'Take Snapshot', and 'Upload Picture' options. Image Size: 0 ~ 100KB.

At the bottom of the form are three buttons: 'Continue', 'Finish', and 'Cancel'.


Step 4 Click the **Certification** tab to add certification information of the user.

- Configure password: The password must consist of 6–8 digits.
- Configure card: The card number can be read automatically or entered manually. To read the card number automatically, select a card reader, and then place the card on the card reader.
 1. On the **Card** area, click  and select **Card issuer**, and then click **OK**.
 2. Click **Add**, swipe a card on the card reader.
The card number is displayed.
 3. Click **OK**.

After adding a card, you can set the card to main card or duress card, or replace the card with a new one, or delete the card.

- Configure fingerprint.
 1. On the **Fingerprint** area, click  and select **Fingerprint Scanner**, and then click **OK**.
 2. Click **Add Fingerprint**, press your finger on the scanner three times in a row.

Figure 4-4 Add password, card, and fingerprint

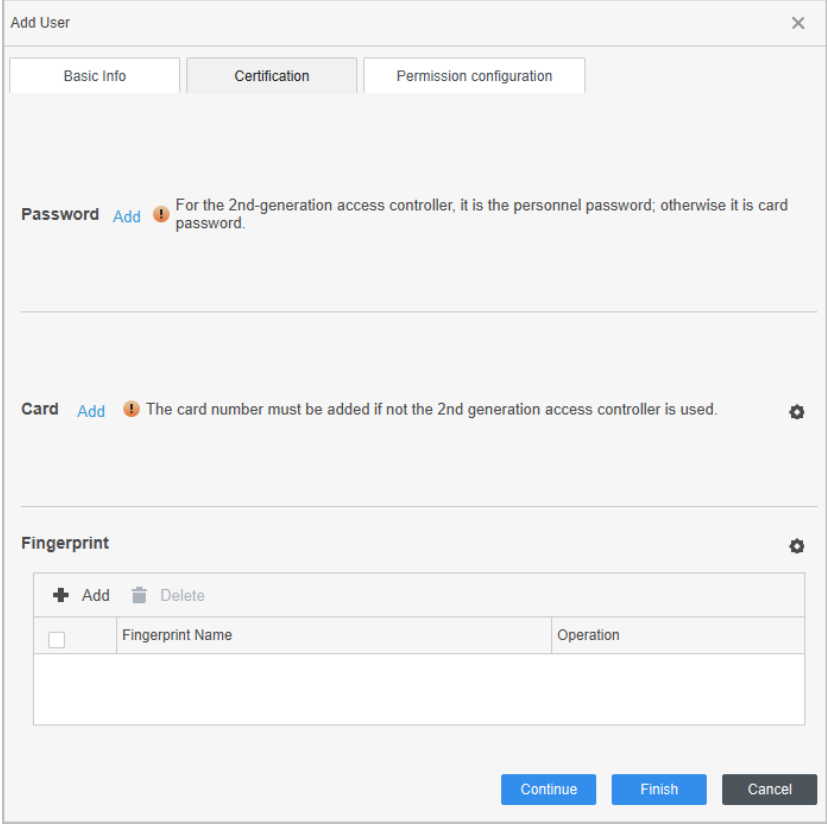

Basic Info Certification Permission configuration

Password Add  For the 2nd-generation access controller, it is the personnel password; otherwise it is card password.

Card Add  The card number must be added if not the 2nd generation access controller is used. 

Fingerprint 

+ Add  Delete

☐	Fingerprint Name	Operation

Continue Finish Cancel

Step 5 Configure permissions for the user. For details, see #d894e6a1026.

Step 6 Click **Finish**.

4.3.2.2 Adding in Batches

You can add users in batches.

Step 1 Log in to Smart PSS Lite.

Step 2 Click **Personnel Manger** > **User** > **Batch Add**.

Step 3 Select **Card issuer** from the **Device** list, and then configure the parameters.

Figure 4-5 Add users in batches

Device
Card issuer

Issue

Start No.:
* 1

Quantity:
* 30

Department:
Default Company

Effective Time:
2022/4/1 0:00:00

Expired Time:
2032/4/1 23:59:59

Issue Card

ID	Card No.
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	

OK

Cancel

Table 4-2 Add users in batches parameters

Parameter	Description
Start No.	The user ID starts with the number you defined.
Quantity	The number of users you want to add.
Department	Select the department that the user belongs to.
Effective Time/Expired Time	The users can unlock the door within the defined period.

Step 4 Click **Issue**.

The card number will be read automatically.

Step 5 Click **OK**.

Step 6 On the **User** page, click  to complete user information.

4.3.3 Assigning Attendance Permissions

Create a permission group that is a collection of time attendance permissions, and then associate employees with the group so that they can punch in/out through defined verification methods.

Step 1 Log in to the Smart PSS Lite.

- Step 2 Click **Access Solution > Personnel Manger > Permission configuration.**
- Step 3 Click + .
- Step 4 Enter the group name, remarks (optional), and select a time template.
- Step 5 Select the access control device.
- Step 6 Click **OK.**

Figure 4-6 Create a permission group



The Time & Attendance only supports punch-in/out through password and face attendance.

- Step 7 Click of the permission group you added.
- Step 8 Select users to associate them with the permission group.

Figure 4-7 Add users to a permission group

Add Person

Permission Group2

Person list

Search..

Q

▼ ☒ Company(10)

☐ DepartmentA(6)

▼ ☒ DepartmentB(3)

☒ 10

Selected (1)

ID	VT Name
10	10

Step 9 Click **OK**.

56

Appendix 1 Important Points of Face Registration

Before Registration

- Glasses, hats, and beards might influence face recognition performance.
- Do not cover your eyebrows when wearing hats.
- Do not change your beard style greatly if you use the Time & Attendance; otherwise face recognition might fail.
- Keep your face clean.
- Keep the Time & Attendance at least two meters away from light source and at least three meters away from windows or doors; otherwise backlight and direct sunlight might influence face recognition performance of the Time & Attendance.

During Registration

- You can register faces through the Time & Attendance or through the platform. For registration through the platform, see the platform user manual.
- Make your head center on the photo capture frame. The face image will be captured automatically.




- Do not shake your head or body, otherwise the registration might fail.
- Avoid two faces appear in the capture frame at the same time.

Face Position

If your face is not at the appropriate position, face recognition accuracy might be affected.

Appendix Figure 1-1 Appropriate face position

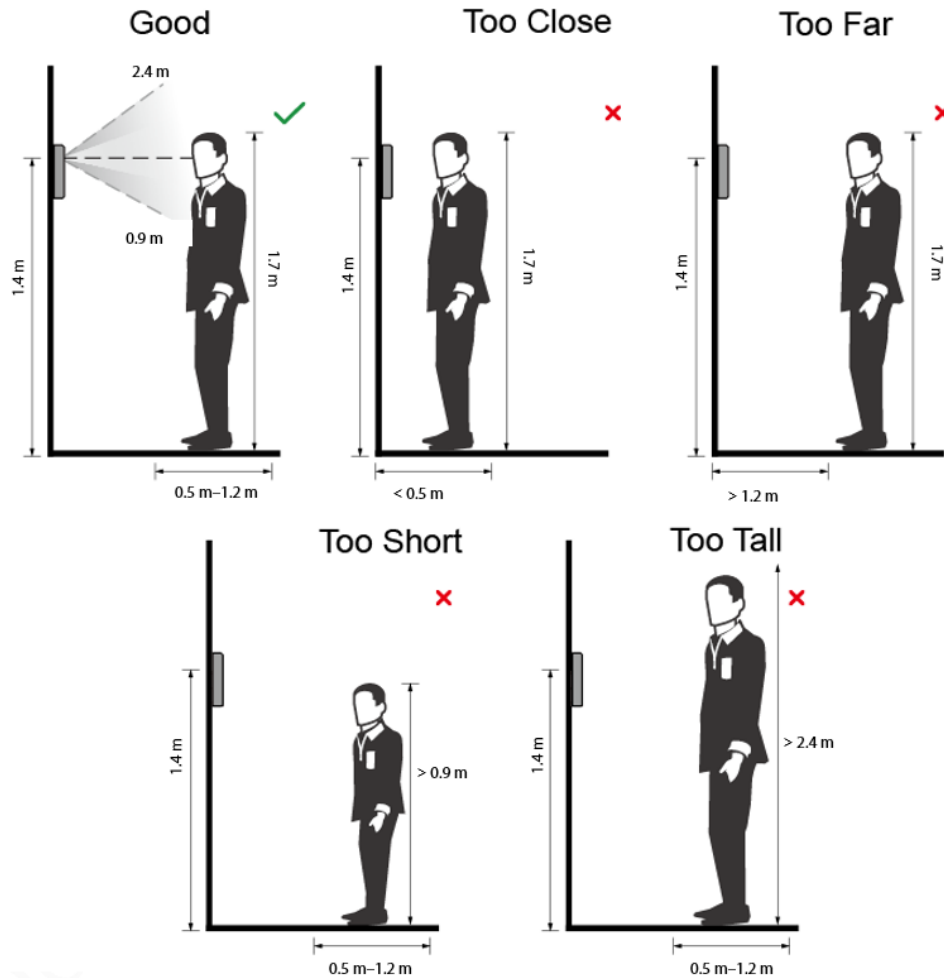

Requirements of Faces

- Make sure that the face is clean and forehead is not covered by hair.
- Do not wear glasses, hats, heavy beards, or other face ornaments that influence face image recording.
- With eyes open, without facial expressions, and make your face toward the center of camera.
- When recording your face or during face recognition, do not keep your face too close to or too far from the camera.

Appendix Figure 1-2 Head position



Appendix Figure 1-3 Face distance



- When importing face images through the management platform, make sure that image resolution is within the range 150×300 pixels– 600×1200 pixels; image pixels are more than 500×500 pixels; image size is less than 100 KB, and image name and person ID are the same.
- Make sure that the face takes up more than $1/3$ but no more than $2/3$ of the whole image area, and the aspect ratio does not exceed 1:2.

Appendix 2 Cybersecurity Recommendations

Mandatory actions to be taken for basic device network security:

1. Use Strong Passwords

Please refer to the following suggestions to set passwords:

- The length should not be less than 8 characters.
- Include at least two types of characters; character types include upper and lower case letters, numbers and symbols.
- Do not contain the account name or the account name in reverse order.
- Do not use continuous characters, such as 123, abc, etc.
- Do not use overlapped characters, such as 111, aaa, etc.

2. Update Firmware and Client Software in Time

- According to the standard procedure in Tech-industry, we recommend to keep your device (such as NVR, DVR, IP camera, etc.) firmware up-to-date to ensure the system is equipped with the latest security patches and fixes. When the device is connected to the public network, it is recommended to enable the "auto-check for updates" function to obtain timely information of firmware updates released by the manufacturer.
- We suggest that you download and use the latest version of client software.

"Nice to have" recommendations to improve your device network security:

1. Physical Protection

We suggest that you perform physical protection to device, especially storage devices. For example, place the device in a special computer room and cabinet, and implement well-done access control permission and key management to prevent unauthorized personnel from carrying out physical contacts such as damaging hardware, unauthorized connection of removable device (such as USB flash disk, serial port), etc.

2. Change Passwords Regularly

We suggest that you change passwords regularly to reduce the risk of being guessed or cracked.

3. Set and Update Passwords Reset Information Timely

The device supports password reset function. Please set up related information for password reset in time, including the end user's mailbox and password protection questions. If the information changes, please modify it in time. When setting password protection questions, it is suggested not to use those that can be easily guessed.

4. Enable Account Lock

The account lock feature is enabled by default, and we recommend you to keep it on to guarantee the account security. If an attacker attempts to log in with the wrong password several times, the corresponding account and the source IP address will be locked.

5. Change Default HTTP and Other Service Ports

We suggest you to change default HTTP and other service ports into any set of numbers between 1024–65535, reducing the risk of outsiders being able to guess which ports you are using.

6. Enable HTTPS

We suggest you to enable HTTPS, so that you visit Web service through a secure communication channel.

7. MAC Address Binding

We recommend you to bind the IP and MAC address of the gateway to the device, thus reducing the risk of ARP spoofing.

8. Assign Accounts and Privileges Reasonably

According to business and management requirements, reasonably add users and assign a minimum set of permissions to them.

9. Disable Unnecessary Services and Choose Secure Modes

If not needed, it is recommended to turn off some services such as SNMP, SMTP, UPnP, etc., to reduce risks.

If necessary, it is highly recommended that you use safe modes, including but not limited to the following services:

- SNMP: Choose SNMP v3, and set up strong encryption passwords and authentication passwords.
- SMTP: Choose TLS to access mailbox server.
- FTP: Choose SFTP, and set up strong passwords.
- AP hotspot: Choose WPA2-PSK encryption mode, and set up strong passwords.

10. Audio and Video Encrypted Transmission

If your audio and video data contents are very important or sensitive, we recommend that you use encrypted transmission function, to reduce the risk of audio and video data being stolen during transmission.

Reminder: encrypted transmission will cause some loss in transmission efficiency.

11. Secure Auditing

- Check online users: we suggest that you check online users regularly to see if the device is logged in without authorization.
- Check device log: By viewing the logs, you can know the IP addresses that were used to log in to your devices and their key operations.

12. Network Log

Due to the limited storage capacity of the device, the stored log is limited. If you need to save the log for a long time, it is recommended that you enable the network log function to ensure that the critical logs are synchronized to the network log server for tracing.

13. Construct a Safe Network Environment

In order to better ensure the safety of device and reduce potential cyber risks, we recommend:

- Disable the port mapping function of the router to avoid direct access to the intranet devices from external network.
- The network should be partitioned and isolated according to the actual network needs. If there are no communication requirements between two sub networks, it is suggested to use VLAN, network GAP and other technologies to partition the network, so as to achieve the network isolation effect.
- Establish the 802.1x access authentication system to reduce the risk of unauthorized access to private networks.
- Enable IP/MAC address filtering function to limit the range of hosts allowed to access the device.

Legal and Regulatory Information

Legal Considerations

Video surveillance can be regulated by laws that vary from country to country. Check the laws in your local region before using this product for surveillance purposes.

Disclaimer

Every care has been taken in the preparation of this document. Please inform your nearest Dahua office of any inaccuracies or omissions. Dahua Technology shall not be held responsible for any technical or typographical errors and reserves the right to make changes to the product and manuals without prior notice. Dahua Technology makes no warranty of any kind with regard to the material contained within this document, including, but not limited to, the implied warranty of merchantability and fitness for a particular purpose. Dahua Technology shall not be liable or responsible for incidental or consequential damages in connection with the furnishing, performance or use of this material. This product is only to be used for its intended purpose.

Intellectual Property Rights

Dahua Technology retains all intellectual property rights relating to technology embodied in the product described in this document.

Equipment Modifications

This equipment must be installed and used in strict accordance with the instructions given in the user documentation. This equipment contains no user-serviceable components. Unauthorized equipment changes or modifications will invalidate all applicable regulatory certifications and approvals.

Trademark Acknowledgments

  are registered trademarks or trademark applications of Dahua Technology in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies.

Regulatory Information

European Directives Compliance

-  This product complies with the applicable CE marking directives and standards:
- Low Voltage (LVD) Directive 2014/35/EU.
 - Electromagnetic Compatibility (EMC) Directive 2014/30/EU.

- Restrictions of Hazardous Substances (RoHS) Directive 2011/65/EU and its amendment Directive (EU) 2015/863.

A copy of the original declaration of conformity may be obtained from Dahua Technology.

The most up to date copy of the signed EU Declaration of Conformity (DoC) can be downloaded from: www.dahuasecurity.com/support/notice/

CE-Electromagnetic Compatibility (EMC)

This digital equipment is compliant with Class B according to EN 55032.

CE-Safety

This product complies with IEC/EN/UL 60950-1 or IEC/EN/UL 62368-1, Safety of Information Technology Equipment.

Declaration of Conformity CE

(Only for the product has RF function)

Hereby, Dahua Technology declares that the radio equipment is compliant with Radio Equipment Directive (RED) 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.dahuasecurity.com/support/notice/

USA Regulatory Compliance

FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

Attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This product has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This product generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this product does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC SDOC Statement can be downloaded from: <https://us.dahuasecurity.com/support/notices/>

01

Privacy Protection Notice

As the device user or data controller, you might collect personal data of others such as face, fingerprints, car plate number, Email address, phone number, GPS and so on. You need to be in compliance with the local privacy protection laws and regulations to protect the legitimate rights and interests of other people by implementing measures, including but not limited to: providing clear and visible identification to inform data subject the existence of surveillance area and providing related contact.

About the Manual

- The manual is for reference only. If there is inconsistency between the manual and the actual product, the actual product shall prevail.
- We are not liable for any loss caused by the operations that do not comply with the manual.
- The manual would be updated according to the latest laws and regulations of related jurisdictions. For detailed information, refer to the paper manual, CD-ROM, QR code or our official website. If there is inconsistency between paper manual and the electronic version, the electronic version shall prevail.
- All the designs and software are subject to change without prior written notice.
- The product updates might cause some differences between the actual product and the manual. Please contact the customer service for the latest program and supplementary documentation.
- There still might be deviation in technical data, functions and operations description, or errors in print. If there is any doubt or dispute, we reserve the right of final explanation.
- Upgrade the reader software or try other mainstream reader software if the manual (in PDF format) cannot be opened.
- All trademarks, registered trademarks and the company names in the manual are for the respective owners.
- Please visit our website, contact the supplier or customer service if there is any problem occurring when using the device.
- If there is any uncertainty or controversy, we reserve the right of final explanation.

Support

Should you require any technical assistance, please contact your Dahua distributor. If your questions cannot be answered immediately, your distributor will forward your queries through the appropriate channels to ensure a rapid response. If you are connected to the Internet, you can:

- Download user documentation and software updates.
- Search by product, category, or phrase.
- Report problems to Dahua support staff by logging in to your private support area.
- Chat with Dahua support staff.
- Visit Dahua Support at www.dahuasecurity.com/support/.

Contact Information

ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.
Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

Postcode: 310053
Tel: +86-571-87688883
Fax: +86-571-87688815
Email: overseas@dahuatech.com
Website: www.dahuasecurity.com

English

Important Safeguards and Warnings

This Chapter describes the contents covering proper handling of the device, hazard prevention, and prevention of property damage. Read these contents carefully before using the device, comply with them when using, and keep it well for future reference.

Safety Instructions

The following categorized signal words with defined meaning might appear in the manual

Signal Words	Meaning
 DANGER	Indicates a high potential hazard which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury.
 CAUTION	Indicates a potential risk which, if not avoided, could result in property damage, data loss, lower performance, or unpredictable result.
 TIPS	Provides methods to help you solve a problem or save you time.
 NOTE	Provides additional information as the emphasis and supplement to the text.

Safety Requirement

- Abide by local electrical safety standards to ensure that the voltage is stable and complies with the power supply requirement of the device.
- Transport, use, and store the device under the allowed humidity and temperature conditions. Refer to the corresponding technical specifications of device for specific working temperature and humidity.
- Do not place the device in a location exposed to dampness, dust, extreme hot or cold, strong electronic radiation, or unstable lighting conditions.
- Do not install the device in a place near the heat source, such as radiator, heater, furnace, or other heat generating device to avoid fire.
- Prevent liquid from flowing into the device to avoid damage to internal components.
- Install the device horizontally or install on the stable plane to prevent it from falling.
- Install the device in a well-ventilated place, and do not block the ventilation of the device.

02

RF exposure warning (Only for the product has RF communication function)

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

This equipment should be installed and operated with a minimum distance 20cm between the radiator and your body.

Canada Regulatory Compliance

ICES-003

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- This device may not cause interference, and
- This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- l'appareil ne doit pas produire de brouillage, et
- l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RF exposure warning (Only for the product has RF communication function)

This equipment should be installed and operated with a minimum distance 20cm between the radiator and your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'attention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

03

- Do not disassemble the device arbitrarily.
- Avoid heavy stress, violent vibration, and soaking during transportation, storage, and installation. Complete package is necessary during the transportation.
- Use the factory package or the equivalent for transportation.

Battery

Low battery power affects the operation of the RTC, causing it to reset at every power-up. When the battery needs replacing, a log message will appear in the product's server report. For more information about the server report, see the product's setup pages or contact Dahua support.

-  **WARNING**
- Risk of explosion if the battery is incorrectly replaced.
 - Replace only with an identical battery or a battery which is recommended by Dahua.
 - Dispose of used batteries according to local regulations or the battery manufacturer's instructions.

Polski

Ważne środki ostrożności i ostrzeżenia

Niniejszy rozdział opisuje właściwe sposoby korzystania z urządzenia, sposoby zapobiegania zagrożeniom, a także sposoby zapobiegania uszkodzeniu mienia. Przed rozpoczęciem korzystania z urządzenia zapoznaj się dokładnie z tymi informacjami i zachowaj je na przyszłość do celów referencyjnych.

Instrukcje dot. bezpieczeństwa

W podręczniku mogą pojawić się następujące symbole. Ich znaczenie wyjaśnia poniższa tabela.

Symbol	Znaczenie
 ZAGROZENIE	Oznacza potencjalne zagrożenie wysokiego stopnia, którego nieuwzględnienie może skutkować poważnymi urazami lub śmiercią.
 OSTRZEZENIE	Oznacza potencjalne zagrożenie średniego lub niskiego stopnia, którego nieuwzględnienie może skutkować pomniejszonymi lub średnimi urazami.
 UWAGA	Oznacza potencjalne zagrożenie, którego nieuwzględnienie może skutkować zniszczeniem mienia, utratą danych, spadkiem wydajności lub mieć inne nieprzewidziane skutki.
 WSKAZÓWKI	Oznacza wskazówki pozwalające na rozwiązanie problemu lub oszczędność czasu.
 UWAGA	Oznacza informacje uzupełniające tekst główny.

Japan Regulatory Compliance VCCI

These products comply with the requirements of VCCI Class B Information Technology Equipment.

Batteries

Correct disposal of batteries in this product

 This marking on the battery indicates that the batteries in this product should not be disposed of with other household waste at the end of their working life. Where marked, the chemical symbols Hg, Cd or Pb indicate that the battery contains mercury, cadmium or lead above the reference levels in Directive 2006/66/EC and its amending Directive 2013/56/EU. If batteries are not properly disposed of, these substances can cause harm to human health or the environment.

CAUTION

Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

Safety

The product complies with IEC/EN/UL 60950-1, Information Technology Equipment – Safety – Part 1: General Requirements; or complies with IEC/EN/UL 62368-1, Audio/video, information and communication technology equipment – Part 1: Safety requirements.

If the power supply to the product is from external power adaptor without connecting to AC Mains, and the product is not shipped with power adaptor, customers are required to use the external power adaptor that must fulfill the requirements for Safety Extra Low Voltage (SELV) and Limited Power Source (LPS).

Waste Electrical and Electronic Equipment (WEEE) statements

Disposal and Recycling

When this product has reached the end of its useful life, dispose of it according to local laws and regulations. For information about your nearest designated collection point, contact your local authority responsible for waste disposal. In accordance with local legislation, penalties may be applicable for incorrect disposal of this waste.

 This symbol means that the product shall not be disposed of together with household or commercial waste. Directive 2012/19/EU on waste electrical and electronic equipment (WEEE) is applicable in the European Union member states. To prevent potential harm to human health and the environment, the product must be disposed of in an approved and environmentally safe recycling process. For information about your nearest designated collection point, contact your local authority responsible for waste disposal. Businesses should contact the product supplier for information about how to dispose of this product correctly.

04

Wymogi dot. Bezpieczeństwa

- Przeznaczony lokalnych standardów bezpieczeństwa elektrycznego celem uwzględnienia, że źródło napięcia jest stabilne i zgodnie z wymogami określonymi dla urządzeń.
- Urządzenie należy transportować, używać i przechowywać w warunkach o dozwolonym poziomie wilgotności i temperatury. Szczegółowe informacje na temat wilgotności i temperatury roboczej znaleźć można w odpowiedniej specyfikacji technicznej urządzenia.
- Nie umieszczaj urządzenia w miejscach narażonych na wilgoc, kurz, ekstremalne temperatury, silne promieniowanie elektryczne oraz nieistabne warunki oświetlenia.
- Nie instaluj urządzenia w pobliżu źródeł ciepła, takich jak kaloryfery, grzałki, piece bądź inne urządzenia generujące ciepło, aby zapobiegać wystąpieniu pożaru.
- Zabezpiecz urządzenie przed dostaniem się do jego wnętrza cieczy, ponieważ może to spowodować uszkodzenie komponentów wewnętrznych.
- Zamontuj urządzenie poziomo lub wybierz stabilne miejsce, tak aby wyeliminować ryzyko upadku.
- Zamontuj urządzenie w dobrze wentylowanym miejscu i upewnij się, że jego otwory wentylacyjne nie są zablokowane.
- Ne rozmontowyj urządzenia samodzielnie.
- Chroń urządzenie przed dużymi obciążeniami i naprężeniami, silnymi wibracjami oraz zaniemieniem zarówno podczas transportu, przechowywania, jak i montażu. Na potrzeby transportu wymagane jest korzystanie z kompletnego opakowania.
- Do transportu używaj oryginalnego opakowania lub innego zapewniającego podobny poziom ochrony.

Akumulator

Niski poziom naładowania akumulatora wpływa na działanie zegara czasu rzeczywistego, powodując jego resetowanie przy każdym włączeniu. Gdy akumulator wymaga wymiany, w raporcie serwerowym dla produktu pojawi się stosowna wiadomość. Aby uzyskać więcej informacji na temat raportu serwerowego, zapoznaj się z instrukcjami konfiguracji urządzenia lub skontaktuj się z personelem pomocy technicznej firmy Dahua.

OSTRZEŻENIE

- W przypadku niewłaściwej wymiany akumulatora występuje zagrożenie wybuchem.
- Akumulator należy zastępować wyłącznie takim samym typem lub innym typem zalecanym przez firmę Dahua.
- Akumulatory należy utylizować zgodnie z lokalnymi regulacjami lub instrukcjami producenta akumulatora.

Dansk

Vigtige sikkerhedsanvisninger og advarsler

Kapitlet beskriver korrekt håndtering af produktet, undgåelse af risici og undgåelse af skader på ejendommen. Læs kapitlet omhyggeligt, før du bruger produktet, overhold alle anvisninger og advarsler under brugen, og gem kapitlet til senere brug.

Sikkerhedsanvisninger

Følgende signalord med beskrivelse kan forekomme i vejledningen.

Signalord	Beskrivelse
-----------	-------------

07

Signalord	Beskrivelse
 FARE	Angiver høj risiko, som, hvis den ikke undgås, kan medføre død eller alvorlig personskade.
 ADVARSEL	Angiver middel eller lav risiko, som, hvis den ikke undgås, kan medføre lettere til moderat personskade.
 FORSIGTIG	Angiver mulig risiko, som hvis den ikke undgås, kan resultere i skade på ejendom, tab af data, reduceret ydelse eller uforudsigelige resultater.
 TIPS	Indeholder forslag, som hjælper dig med at løse et problem eller spare tid.
 BEMÆRK	Indeholder yderligere oplysninger, som understreger og supplerer teksten.

Sikkerhedskrav

- Følg lokale standarder for sikkerhed for at sikre, at spændingen er stabil og i overensstemmelse med produktets krav til strømforsyning.
- Transporter, brug og opbevar produktet i henhold til de tilladte klimatiske forhold (temperatur og luftfugtighed). Se produktets tekniske specifikationer for specifik temperatur og luftfugtighed ved drift.
- Placer ikke produktet et sted med fugt, støv, stærk varme eller kulde, stærk elektronisk udstråling eller ustabile lysforhold.
- Installer ikke produktet i nærheden af en varmekilde, såsom en radiator, et varmeapparat, et centralfyr eller andre varmeafgivende enheder, for at undgå ildbrand.
- Undgå, at væske løber ind i produktet og dermed forårsager skade på de væsentlige komponenter.
- Installer produktet vandret, eller installer det et stabilt sted for at undgå, at det falder ned.
- Installer produktet et sted med god udluftning og bloker ikke produktets ventilationsåbninger.
- Adskil ikke produktet.
- Undgå stærkt tryk, kraftige vibrationer og gennemblending under transport, opbevaring og installation. Produktet skal være fuldt emballeret under transport.
- Brug fabriksemballagen eller tilsvarende til transporten.

Batteri

Lav batterispænding påvirker driften af realtidsuret og får uret til at nulstille, hver gang produktet tændes. Der vises en logbesked i produktets serverraport, når batteriet skal udskiftes. Se konfigurationsiderne til produktet, eller kontakt Dahuas supportteam for at få flere oplysninger om serverraporten.

ADVARSEL

- Der er risiko for eksplosion, hvis batteriet udskiftes forkert.
- Udfør kun met til el-tilslutning af batterier eller et anbefales af Dahua.
- Bortskaf brugte batterier i overensstemmelse med lokale bestemmelser eller batteriproducentens anvisninger.

Suomi

Tärkeitä varoitoimenpiteitä ja varoituksia

Tässä luvussa kuvataan laitteen asianmukainen käsittely, vaarojen torjunta ja omaisuusvahinkojen estäminen. Lue tämä sisälu huolellisesti ennen laitteen käyttämistä ja noudata näitä ohjeita, kun käytät laitetta. Säilytä ohjeet tulevia tarpeita varten.

Turvallisuusohje

Suuraavat luokitellut huomoisanat kuvattulla merkityksellä saatavat esiintyä ohjeissa.

Huomiosanat	Merkitys
 VAARA	Ilmaisee suuren potentiaalisen vaaran, joka johtaa kuolemaan tai vakavaan loukkaantumiseen, jos sitä ei vältetä.
 VAROITUS	Ilmaisee keskiuuden tai pienen potentiaalisen vaaran, joka saattaa johtaa lievään tai korjaalliseen loukkaantumiseen, jos sitä ei vältetä.
 HUOMIO	Ilmaisee mahdollisen vaarallisen tilanteen, joka saattaa johtaa omaisuusvahinkoon, tietojen menetykseen, suoritusstehon heikkenemiseen tai odottamattomiin tuloksiin, jos sitä ei vältetä.
 VINKKI	Tarjoavat apua ongelmien ratkaisemiseen tai säästävät aikaa.
 HUOMAUTUS	Tarjoaa lisätietoa, joka korostaa tai täydentää tekstiä.

Turvallisuusvaatimus

- Noudatta paikallisia sähköturvallisuusstandardeja varmistaksesi, että jännite on vakaa ja vastaa laitteen virtajännitteelle asetettuja vaatimuksia.
- Kuljeta, käytä ja säilytä laitetta sallituissa kosteus- ja lämpötilaolosuhteissa. Käsitä laitteen erityyinen käyttötila-tilaja -kosteus laitteen vastaavista oimistustiedoista.
- Älä sijaita laitetta paikkaan, jossa se altistuu kosteudelle, pölylle, erittäin kuivalle tai kylmälle lämpötilalle, voimakkaalle sähkömagneettisille tai epävakaille tilaolosuhteille.
- Älä asenna laitetta lähelle lämmönlähdettä, kuten lämpöpatteria, lämmitintä, uunia tai muuta lämpöä tuottavaa laitetta, tulipalon välttämiseksi.
- Vältä nesteen pääsyä laitteen sisälle sisäisten komponenttien vahingoittumisen estämiseksi.
- Asenna laite vaakasoraan tai asenna se vaakaaseen paikkaan estääksesi sen kaatumisen.
- Asenna laite hyvin ilmastoituihin paikkaihin äläkä peitä laitteen tuuletusaukkoja.
- Älä pura laitetta omavaltaisesti.
- Vältä kovaa rasitusta, voimakasta tärinää ja kosteusta kuljetuksen, säilytyksen ja asennuksen aikana. Kuljetus vaatii täydellisen pakkaamisen.
- Käytä tehtaan pakkausta tai vastaavaa kuljetuksen aikana.

Paristo

Aihainen pariston varustaus vaikuttaa tosiaikakellon (RTC:n) toimintaan nolaten sen jokaisella käynnistyskerralla. Luvioviesi ilmeisty tuotteen palvelinraporttiin, kun paristo on vaihdettava. Lisätietoa palvelinraportista saat tuotteen

10

Signal Words	Meaning
 AVERTIZARE	Indică un pericol potențial mediu sau scăzut care, dacă nu este evitat, poate duce la răni ușoare sau moderate.
 ATENȚIE	Indică un risc potențial care, dacă nu este evitat, ar putea duce la daune materiale, pierderi de date, performanțe mai scăzute sau rezultate imprevizibile.
 SFATURİ	Offeră metode care să vă ajute să rezolvați o problemă sau să economisiți timp.
 NOTA	Offeră informații suplimentare ca accent și supliment la text.

Cerinte de siguranta

- Respectați standardele locale de siguranță electrică pentru a vă asigura că tensiunea este stabilă și respectă cerințele de alimentare ale dispozitivului.
- Transportați, utilizați și depozitați dispozitivul sub condițiile de umiditate și temperatură admise. Consultați specificațiile tehnice corespunzătoare ale dispozitivului pentru temperatură și umiditate specifice de lucru.
- Nu așezați dispozitivul într-o locație expusă la umezeală, praf, extrem de caldă sau rece, de radiații electronice puternice sau de condiții de iluminare instabile.
- Nu instalați dispozitivul într-un loc în apropierea sursei de căldură, cum ar fi radiatorul, încălzitorul, cuptorul sau al dispozitiv generator de căldură, pentru a evita incendii.
- Impedicați curgerea lichidului în dispozitiv pentru a evita deteriorarea componentelor interne.
- Instalați dispozitivul în poziție orizontală sau instalați-l pe un loc stabil pentru a preveni căderea acestuia.
- Instalați aparatul într-un loc bine ventilat și nu blocați ventilația aparatului.
- Nu dezasamblați dispozitivul voi.
- Evitați loviturile puternice, vibrațiile violente și umiditatea în timpul transportului, depozitării și instalării. Este necesar un pachet complet în timpul transportului.
- Utilizați pachetul de fabrica sau echivalent în timpul transportului.

Baterie

Puterea redusă a bateriei afectează funcționarea RTC, determinând resetarea la fiecare pornire. Când bateria are nevoie de înlocuire, în raportul serverului produsului va apărea un mesaj de jurnal. Pentru mai multe informații despre raportul serverului, consultați paginile de configurare ale produsului sau contactați asistentul Dahua.

AVERTIZARE

- Risc de explozie dacă bateria este înlocuită incorect.
- Înlocuiți numai cu o baterie identică sau cu o baterie recomandată de Dahua.
- Anuncați baterie înlocuite în conformitate cu reglementările locale sau cu instrucțiunile producătorului bateriei.

Čeština

Důležitá bezpečnostní opatření a varování

Tato kapitola popisuje obsah vztahující se na správnou manipulaci se zařízením, prevenci poruch a prevenci škod na majetku. Pečlivě si tyto informace přečtěte před použitím zařízení, během používání zařízení je dodržujte a uchovávejte je pro budoucí použití.

####