

Face Recognition Access Controller

User's Manual



Foreword

General

This manual introduces the functions and operations of the Face Recognition Access Controller (hereinafter referred to as the "Access Controller"). Read carefully before using the device, and keep the manual safe for future reference.

Safety Instructions

The following signal words might appear in the manual.

Signal Words	Meaning
 DANGER	Indicates a high potential hazard which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury.
 CAUTION	Indicates a potential risk which, if not avoided, could result in property damage, data loss, reductions in performance, or unpredictable results.
 TIPS	Provides methods to help you solve a problem or save time.
 NOTE	Provides additional information as a supplement to the text.

Revision History

Version	Revision Content	Release Time
V1.0.0	First Release.	June 2022

Privacy Protection Notice

As the device user or data controller, you might collect the personal data of others such as their face, fingerprints, and license plate number. You need to be in compliance with your local privacy protection laws and regulations to protect the legitimate rights and interests of other people by implementing measures which include but are not limited: Providing clear and visible identification to inform people of the existence of the surveillance area and provide required contact information.

About the Manual

- The manual is for reference only. Slight differences might be found between the manual and the product.
- We are not liable for losses incurred due to operating the product in ways that are not in compliance with the manual.
- The manual will be updated according to the latest laws and regulations of related jurisdictions. For detailed information, see the paper user's manual, use our CD-ROM, scan the QR code or visit our official website. The manual is for reference only. Slight differences might be found between the electronic version and the paper version.
- All designs and software are subject to change without prior written notice. Product updates

might result in some differences appearing between the actual product and the manual. Please contact customer service for the latest program and supplementary documentation.

- There might be errors in the print or deviations in the description of the functions, operations and technical data. If there is any doubt or dispute, we reserve the right of final explanation.
- Upgrade the reader software or try other mainstream reader software if the manual (in PDF format) cannot be opened.
- All trademarks, registered trademarks and company names in the manual are properties of their respective owners.
- Please visit our website, contact the supplier or customer service if any problems occur while using the device.
- If there is any uncertainty or controversy, we reserve the right of final explanation.

Important Safeguards and Warnings

This section introduces content covering the proper handling of the Access Controller, hazard prevention, and prevention of property damage. Read carefully before using the Access Controller, and comply with the guidelines when using it.

Transportation Requirement



Transport, use and store the Access Controller under allowed humidity and temperature conditions.

Storage Requirement



Store the Access Controller under allowed humidity and temperature conditions.

Installation Requirements



- Do not connect the power adapter to the Access Controller while the adapter is powered on.
- Strictly comply with the local electric safety code and standards. Make sure the ambient voltage is stable and meets the power supply requirements of the Access Controller.
- Do not connect the Access Controller to two or more kinds of power supplies, to avoid damage to the Access Controller.
- Improper use of the battery might result in a fire or explosion.



- Personnel working at heights must take all necessary measures to ensure personal safety including wearing a helmet and safety belts.
- Do not place the Access Controller in a place exposed to sunlight or near heat sources.
- Keep the Access Controller away from dampness, dust, and soot.
- Install the Access Controller on a stable surface to prevent it from falling.
- Install the Access Controller in a well-ventilated place, and do not block its ventilation.
- Use an adapter or cabinet power supply provided by the manufacturer.
- Use the power cords that are recommended for the region and conform to the rated power specifications.
- The power supply must conform to the requirements of ES1 in IEC 62368-1 standard and be no higher than PS2. Please note that the power supply requirements are subject to the Access Controller label.
- The Access Controller is a class I electrical appliance. Make sure that the power supply of the Access Controller is connected to a power socket with protective earthing.

Operation Requirements



- Check whether the power supply is correct before use.
- Do not unplug the power cord on the side of the Access Controller while the adapter is powered

on.

- Operate the Access Controller within the rated range of power input and output.
- Use the Access Controller under allowed humidity and temperature conditions.
- Do not drop or splash liquid onto the Access Controller, and make sure that there is no object filled with liquid on the Access Controller to prevent liquid from flowing into it.
- Do not disassemble the Access Controller without professional instruction.
- This product is professional equipment.

Table of Contents

Foreword	I
Important Safeguards and Warnings.....	III
1 Overview	1
1.1 Introduction	1
1.2 Features.....	1
1.3 Application.....	2
2 Local Operations	3
2.1 Basic Configuration Procedure.....	3
2.2 Common Icons.....	3
2.3 Standby Screen	3
2.4 Initialization	4
2.5 Logging In.....	5
2.6 Network Communication	5
2.6.1 Configuring IP.....	5
2.6.2 Active Register	6
2.6.3 Configuring Wi-Fi.....	7
2.6.4 Configuring Serial Port	7
2.6.5 Configuring Wiegand	8
2.7 User Management.....	9
2.7.1 Adding New Users	9
2.7.2 Viewing User Information	11
2.7.3 Configuring Administrator Password	11
2.8 Access Management	12
2.8.1 Configuring Unlock Combinations	12
2.8.2 Configuring Alarm.....	13
2.8.3 Configuring Door Status	14
2.8.4 Configuring Lock Holding Time	14
2.9 Attendance Management.....	14
2.10 System	17
2.10.1 Configuring Time	17
2.10.2 Configuring Face Parameters	18
2.10.3 Setting Volume.....	20
2.10.4 (Optional) Configuring Fingerprint Parameters	20
2.10.5 Screen Settings.....	20
2.10.6 Restoring Factory Defaults.....	20

2.10.7 Restart the Device	21
2.10.8 Configuring the Language	21
2.11 USB Management	21
2.11.1 Exporting to USB	21
2.11.2 Importing From USB	22
2.11.3 Updating System	22
2.12 Configuring Features	23
2.13 Unlocking the Door	24
2.13.1 Unlocking by Cards	25
2.13.2 Unlocking by Face	25
2.13.3 Unlocking by User Password	25
2.13.4 Unlocking by Administrator Password	25
2.13.5 Unlocking by QR code	25
2.13.6 Unlocking by Fingerprint	25
2.14 Viewing Unlock Logs	26
2.15 System Information	26
2.15.1 Viewing Data Capacity	26
2.15.2 Viewing Device Version	26
3 Web Operations	27
3.1 Initialization	27
3.2 Logging In	27
3.3 Resetting the Password	28
3.4 Configuring Door Parameter	29
3.5 Intercom Configuration	32
3.5.1 Configuring SIP Server	32
3.5.2 Configuring Basic Parameters	35
3.5.3 Adding the VTO	37
3.5.4 Adding the VTH	37
3.5.5 Adding the VTS	39
3.5.6 Viewing Device Status	40
3.5.7 Viewing Call Logs	40
3.6 Configuring Time Sections	40
3.6.1 Configuring Time Sections	40
3.6.2 Configuring Holiday Groups	41
3.6.3 Configuring Holiday Plans	42
3.7 Data Capacity	42
3.8 Configuring Video and Image	43
3.8.1 Configuring Video	43

3.8.1.1 Configuring Channel 1	43
3.8.1.2 Configuring Channel 2	47
3.8.2 Setting Volume	49
3.9 Configuring Face Detection.....	49
3.10 Configuring Network	52
3.10.1 Configuring TCP/IP.....	52
3.10.2 Configuring Port.....	53
3.10.3 Configuring Automatic Registration.....	54
3.10.4 Configuring Cloud Service.....	54
3.10.5 Configuring Serial Port.....	55
3.10.6 Configuring Wiegand.....	56
3.11 Safety Management	57
3.11.1 Configuring IP Authority.....	57
3.11.1.1 Network Access	57
3.11.1.2 Prohibit PING.....	58
3.11.1.3 Anti Half Connection	59
3.11.2 Configuring System	59
3.11.2.1 Creating Server Certificate.....	60
3.11.2.2 Downloading Root Certificate	61
3.12 User Management	64
3.12.1 Adding Users	64
3.12.2 Adding ONVIF Users	64
3.12.3 Viewing Online Users	65
3.13 Configuring Voice Prompts.....	65
3.14 Maintenance.....	65
3.15 Configuration Management.....	66
3.15.1 Exporting/Importing Configuration Files.....	66
3.15.2 Restoring Factory Defaults.....	67
3.16 Upgrading System.....	67
3.16.1 File Update	67
3.16.2 Online Update.....	67
3.17 Viewing Version Information.....	68
3.18 Viewing Logs	68
3.18.1 System Logs	68
3.18.2 Admin Logs	68
3.18.3 Unlocking Logs.....	68
3.18.4 Alarm Logs.....	68
4 Smart PSS Lite Configuration	69

4.1 Installing and Logging In	69
4.2 Adding Devices	69
4.2.1 Adding Individually	69
4.2.2 Adding in Batches	70
4.3 User Management	71
4.3.1 Configuring Card Type	71
4.3.2 Adding Users	72
4.3.2.1 Adding Individually	72
4.3.2.2 Adding in Batches	73
4.3.3 Assigning Access Permission	74
4.4 Access Management	76
4.4.1 Remotely Opening and Closing Door	76
4.4.2 Setting Always Open and Always Close	77
4.4.3 Monitoring Door Status	77
Appendix 1 Important Points of Intercom Operation	79
Appendix 2 Important Points of QR Code Scanning	80
Appendix 3 Important Points of Fingerprint Registration Instructions	81
Appendix 4 Important Points of Face Registration	83
Appendix 5 Cybersecurity Recommendations	86

1 Overview

1.1 Introduction

The access controller is an access control panel that supports unlock through faces, passwords, fingerprint, cards, QR code, and their combinations. Based on the deep-learning algorithm, it features faster recognition and higher accuracy. It can work with management platform which meets various needs of customers.

1.2 Features


- The housing is built of PC and ABS material, making it ideal for use indoors.
- 4.3 inch glass touch screen with a resolution of 480 × 272.
- 2-MP wide-angle dual-lens camera with IR illumination and DWDR.
- Multiple unlock methods including fingerprint, face, IC card and password. You can also combine them to create your own personal unlock methods.
- Supports mask detection.
- Supports visitor QR code with DSS Pro Platform.
- Recognizes faces 0.3 m to 1.5 m away (0.98 ft-4.92 ft), and detects persons between the height of 1.1 m and 2.0 m (3.61 ft-6.56 ft) when the camera is installed at 1.4 m (4.5 ft).
- Supports 3,000 users, 3,000 faces, 3,000 passwords, 5,000 cards, 5,000 fingerprints, 50 administrators, and 300,000 records.
- Liveness detection has a face recognition accuracy rate of 99.9% and the 1:N comparison time is 0.2 s per person.
- Supports an RS-485 card reader, Wiegand card reader (26, 34, 66), exit button, door status detector, and a 100 Mbps Ethernet port.
- Up to 128 periods can be configured, along with 128 holiday plans, normally open period, normally closed periods, remote unlock periods, and first user unlock periods.
- Offers multiple types of alarms such as duress, tamper, intrusion, unlock timeout, and excessive use of illegal card.
- Supports general users, patrol users, blocklist users, VIP users, guest users, and the other users
- Features anti-passback, multiple verification methods, remote unlock, first user unlock, and supports videos being viewed on the platform.
- For improved security and to protect against the device being forcefully opened, security module expansion is supported.
- TCP/IP and Wi-Fi connection, auto registration, P2P registration, and DHCP.
- Supports making video calls and using the app to receive alarm notifications, remotely unlock doors and to perform other tasks.
- Supports customization of voice prompts.
- Online update and update through USB.
- Works while offline, and communicates with the management platform when connected to a network.
- Supports watchdog to protect the system from software and hardware failures.

- Supports SDK.
- Connects to DSS Pro and SmartPSS Lite.

1.3 Application

It is widely used in parks, communities, business centers and factories, and ideal for places such as office buildings, government buildings, schools and stadiums.


Figure 1-1 Networking

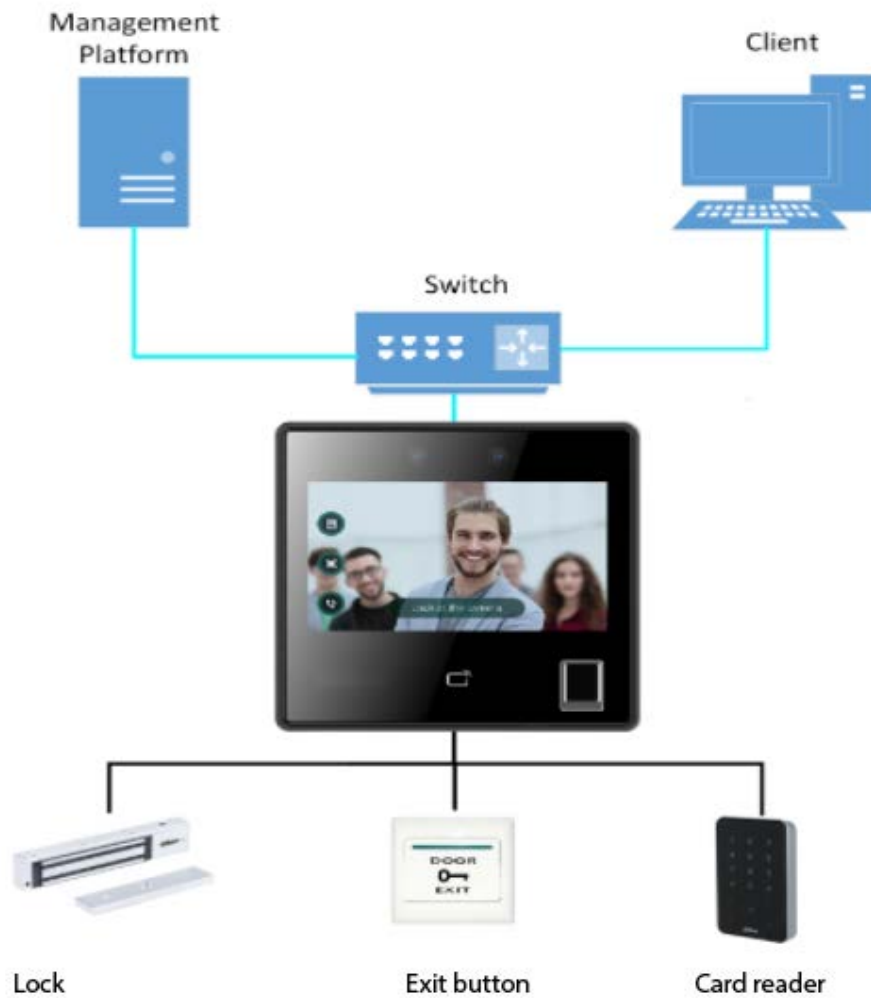

2 Local Operations

2.1 Basic Configuration Procedure

Figure 2-1 Basic configuration procedure

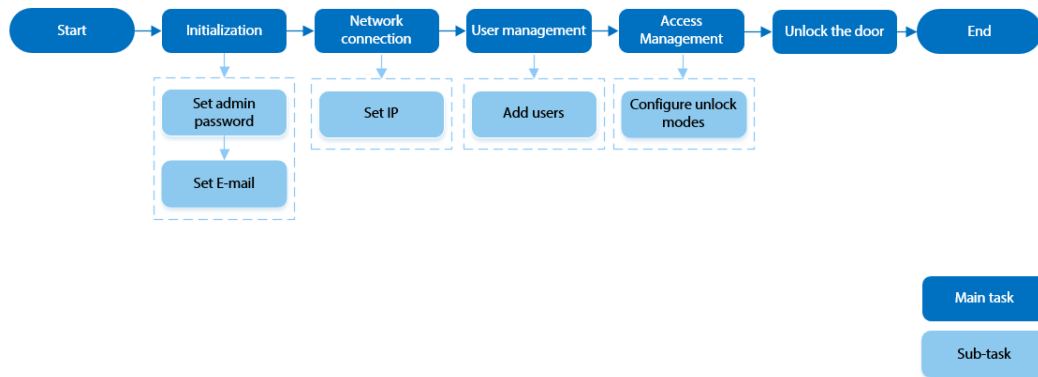

2.2 Common Icons

Table 2-1 Description of icons

Icon	Description
	Main menu icon.
	Confirm icon.
	Turn to the first page of the list.
	Turn to the last page of the list.
or	Turn to the previous page of the list.
or	Turn to the next page of the list.
	Return to the previous menu.
	Turned on.
	Turned off.
	Delete
	Search

2.3 Standby Screen

You can unlock the door through faces, passwords, and QR code. You can also make calls through the intercom function.



- If there is no operation in 30 seconds, the Access Controller will go to the standby mode.
- This manual is for reference only. Slight differences might be found between the standby screen in this manual and the actual device.

Figure 2-2 Homepage

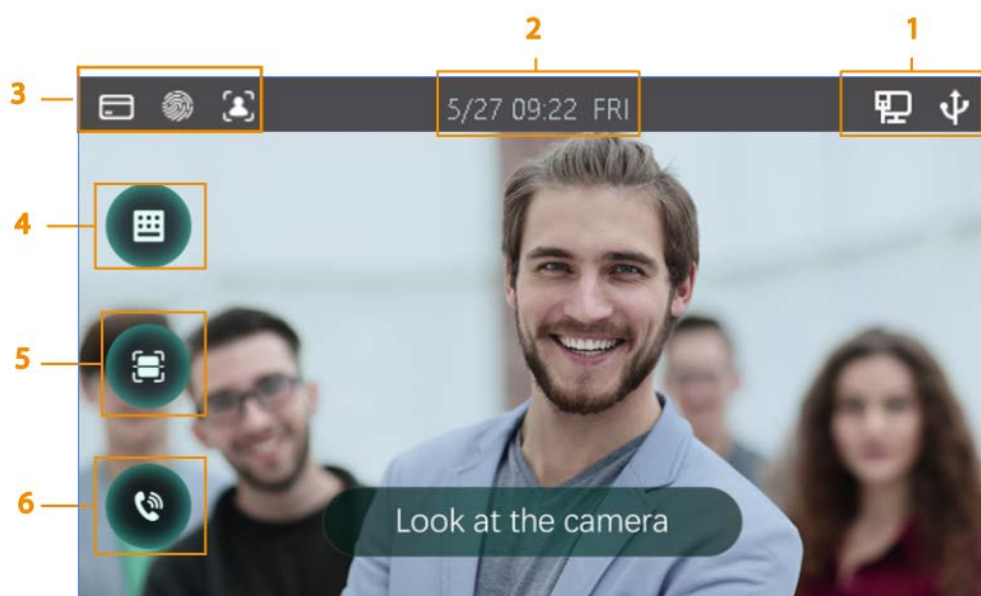


Table 2-2 Home screen description

No.	Name	Description
1	Status display	Displays status of Wi-Fi, network and USB, and more.
2	Date and time	Displays the current date and time.
3	Verification methods	Displays available verification methods.
4	Password	Enter user password or administrator password to unlock the door.
5	QR code	Tap the QR code icon and scan QR code to unlock the door.
6	Intercom	When the Access Controller functions as a server, it can call the VTO and VTH. When the DSS functions as a server, The Access Controller can call the VTO, VTS and DSS. Tap the icon, enter the room number to call the home owner.

2.4 Initialization

For the first-time use or after restoring factory defaults, you need to select a language on Access Controller, and then set the password and email address for the admin account. You can use the admin account to log in to the main menu of the Access Controller and the webpage.



- If you forget the administrator password, send a reset request to your registered e-mail address.
- The password must consist of 8 to 32 non-blank characters and contain at least two types of characters among upper case, lower case, number, and special character (excluding ' " ; : &).

2.5 Logging In

Log in to the main menu to configure the Access Controller. Only admin account and administrator account can enter the main menu of the Access Controller. For the first-time use, use the admin account to enter the main menu screen and then you can create the other administrator accounts.

- admin account: Can log in to the main menu screen of the Access Controller, but has no door access permission.
- Administration account: Can log in to the main menu of the Access Controller and has door access permissions.

Step 1 Press and hold the standby screen for 3 seconds.

Step 2 select a verification method to enter the main menu.

- Face: Enter the main menu by face recognition.
- Fingerprint: Enter the main menu by using fingerprint.



Fingerprint function is only available for the fingerprint model of Access Controller.

- Card Punch: Enter the main menu by swiping card.



Card Punch function is only available for the card swiping model of Access Controller.

- PWD: Enter the user ID and password of the administrator account.
- admin: Enter the admin password to enter the main menu.

2.6 Network Communication

Configure the network, serial port and Wiegand port to connect the Access Controller to the network.



The serial port and the wiegand port might differ depending on models of Access Controller.

2.6.1 Configuring IP

Set IP address for the Access Controller to connect it to the network. After that, you can log in to the webpage and the management platform to manage the Access Controller.

Step 1 On the **Main Menu**, select **Connection > Network > IP Address**.

Step 2 Configure IP Address.

Figure 2-3 IP address configuration

Table 2-3 IP configuration parameters

Parameter	Description
IP Address/Subnet Mask/Gateway Address	The IP address, subnet mask, and gateway IP address must be on the same network segment.
DHCP	It stands for Dynamic Host Configuration Protocol. When DHCP is turned on, the Access Controller will automatically be assigned with IP address, subnet mask, and gateway.
P2P	P2P (peer-to-peer) technology enables users to manage devices without applying for DDNS, setting port mapping or deploying transit server.

2.6.2 Active Register

You can turn on the automatic registration function to access the Access Controller through the management platform.



The management platform can clear all personnel configurations and initialize the Access Controller. To avoid data loss, keep the management platform permissions properly.

Step 1 On the **Main Menu**, select **Connection > Network > Active Register**.

Figure 2-4 Auto register

Step 2 Turn on the automatic registration function and set the parameters.

Table 2-4 Auto registration

Parameter	Description
Server Address	The IP address of the management platform.
Port	The port No. of the management platform.
Device ID	Enter the device ID (user defined).  When you add the Access Controller to the management platform, the device ID on the management platform must conform to the defined device ID on the Access Controller.

Step 3 Enable the active register function.

2.6.3 Configuring Wi-Fi

You can connect the Access Controller to the network through Wi-Fi network.



Wi-Fi function is only available for certain models of the Access Controller.

Step 1 On the **Main Menu**, select **Connection > Network > WiFi**.

Step 2 Turn on Wi-Fi.

Step 3 Tap  to search available wireless networks.

Step 4 Select a wireless network and enter the password.

If no Wi-Fi is searched, tap **SSID** to enter the name of Wi-Fi.

Step 5 Tap .

2.6.4 Configuring Serial Port

Step 1 On the **Main Menu**, select **Connection > Serial Port**.

Step 2 Select a port type.

- Select **Reader** when the Access Controller connects to a card reader.
 - Select **Controller** when the Access Controller functions as a card reader, and the Access Controller will send data to the Access Controller to control access.
- Output Data type:
- ◊ Card: Outputs data based on card number when users swipe card to unlock door; outputs data based on user's first card number when they use other unlock methods.
 - ◊ No.: Outputs data based on the user ID.
- Select **Reader (OSDP)** when the Access Controller is connected to a card reader based on OSDP protocol.
 - Security Module: When a security module is connected, the exit button, lock will be not effective.

2.6.5 Configuring Wiegand

The access controller allows for both Wiegand input and Output mode.

Step 1 On the **Main Menu**, select **Connection > Wiegand**.

Step 2 Select a Wiegand.

- Select **Wiegand Input** when you connect an external card reader to the Access Controller.
- Select **Wiegand Output** when the Access Controller functions as a card reader, and you need to connect it to a controller or another access terminal.

Figure 2-5 Wiegand output

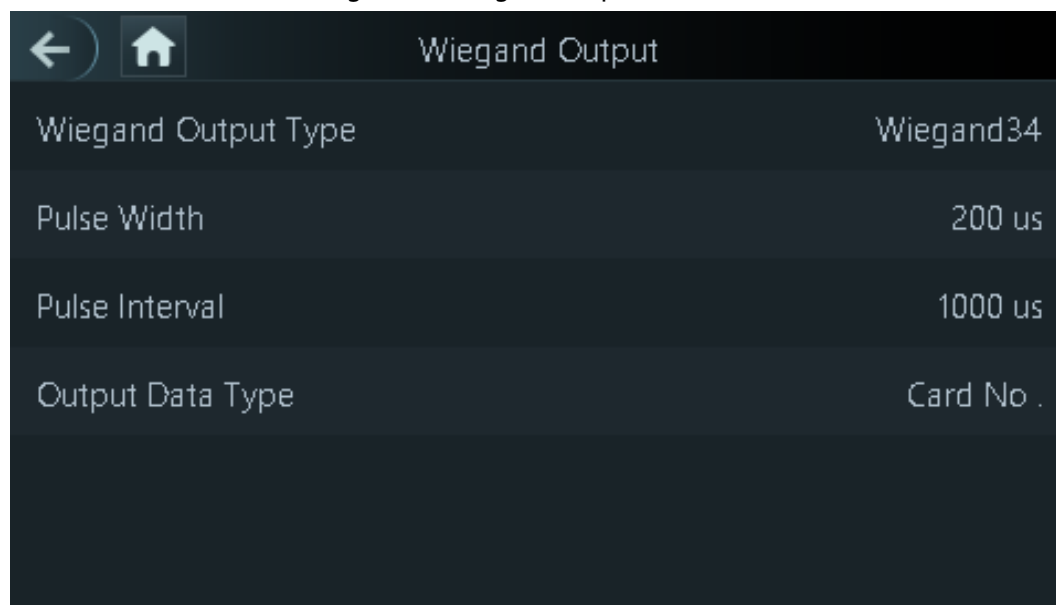


Table 2-5 Description of Wiegand output

Parameter	Description
Wiegand Output Type	Select a Wiegand format to read card numbers or ID numbers. • Wiegand26: Reads three bytes or six digits. • Wiegand34: Reads four bytes or eight digits. • Wiegand66: Reads eight bytes or sixteen digits.
Pulse Width	Enter the pulse width and pulse interval of Wiegand output.

Parameter	Description
Pulse Interval	
Output Data Type	Select the type of output data. • User ID: Outputs data based on user ID. • Card No.: Outputs data based on user's first card number, and the data format is hexadecimal or decimal.

2.7 User Management

You can add new users, view user/admin list and edit user information.



The pictures in this manual are for reference only, and might differ from the actual product.

2.7.1 Adding New Users

Step 1 On the **Main Menu**, select **User > New User**.

Step 2 Configure the parameters on the interface.

Figure 2-6 New user (1)

Parameter	Value
User ID	1
Name	
FP	0
Face	0
Card	0
PWD	

Figure 2-7 New user (2)

Parameter	Value
User Level	User
Period	255-Default
Holiday Plan	255-Default
Valid Date	2037-12-31
User Type	General

Table 2-6 Description of new user parameters

Parameter	Description
User ID	Enter user IDs. The IDs can be numbers, letters, and their combinations, and the maximum length of the ID is 32 characters. Each ID is unique.
Name	Enter name with at most 32 characters (including numbers, symbols, and letters).
FP	Register fingerprints. A user can register up to 3 fingerprints, and you can set a fingerprint to the duress fingerprint. An alarm will be triggered when the duress fingerprint is used to unlock the door.  Only certain models support fingerprint unlock.
Face	Make sure that your face is centered on the image capturing frame, and an image of the face will be captured and analyzed automatically.
Card	A user can register five cards at most. Enter your card number or swipe your card, and then the card information will be read by the access controller. You can enable the Duress Card function. An alarm will be triggered if a duress card is used to unlock the door.  Only certain models support card unlock.
PWD	Enter the user password. The maximum length of the password is 8 digits.
User Level	You can select a user level for new users. • User: Users only have door access permission. • Admin: Administrators can unlock the door and configure the access controller.
Period	People can unlock the door only during the defined period.
Holiday Plan	People can unlock the door only during the defined holiday plan.
Valid Date	Set a date on which the access permissions of the person will be expired.
User Type	• General: General users can unlock the door. • Blocklist: When users in the blocklist unlock the door, service personnel will receive a notification. • Guest: Guests can unlock the door within a defined period or for certain amount of times. After the defined period expires or the unlocking times runs out, they cannot unlock the door. • Patrol: Patrol users will have their attendance tracked, but they have no unlocking permissions. • VIP: When VIP unlock the door, service personnel will receive a notice. • Others: When they unlock the door, the door will stay unlocked for 5 more seconds. • Custom User 1/Custom User 2: Same with general users.

Step 3 Tap .


2.7.2 Viewing User Information

You can view user/admin list and edit user information.

Step 1 On the **Main Menu**, select **User > User List**, or select **User > Admin List**.

Step 2 View all added users and admin accounts.

Figure 2-8 Admin list

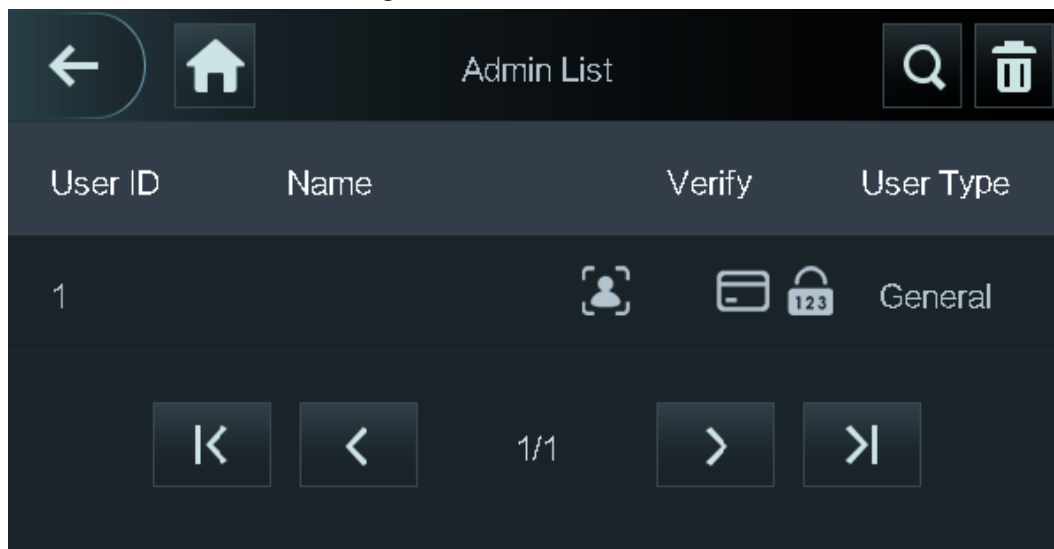

- : Unlock through password.
- : Unlock through swiping card.
- : Unlock through face recognition.
- : Unlock through fingerprint.

Related Operations

On the **User** screen, you can manage the added users.


- Search for users: Tap and then enter the username.
- Edit users: Tap the user to edit user information.
- Delete users
 - ◇ Delete individually: Select a user, and then tap .
 - ◇ Delete in batches:
 - On the **User List** screen, tap to delete all users.
 - On the **Admin List** screen, tap to delete all admin users.

2.7.3 Configuring Administrator Password

You can unlock the door by only entering the admin password. Admin password is not limited by user types. Only one admin password is allowed for one device.

Step 1 On the **Main Menu** screen, select **User > Administrator PWD**.

Figure 2-9 Set admin password

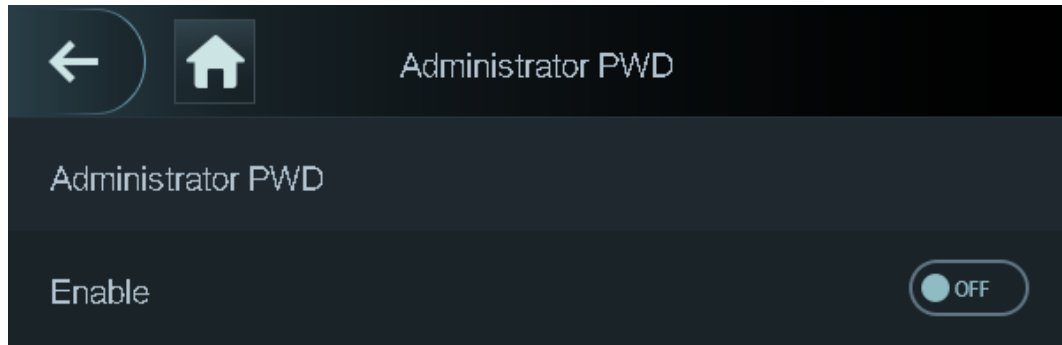

Step 2 Tap **Administrator PWD**, and then enter the administrator password.

Step 3 Tap ☒.

Step 4 Turn on the administrator function.

2.8 Access Management

You can configure door access parameters, such as unlocking modes, alarm linkage, door schedules.

2.8.1 Configuring Unlock Combinations

Use card, fingerprint, face or password or their combinations to unlock the door.

Unlock modes might differ depending on the actual product.

Step 1 Select **Access > Unlock Mode > Unlock Mode**.

Step 2 Select unlocking methods.




To cancel your selection, tap the selected method again.

Step 3 Tap **+And** or **/Or** to configure combinations.

- **+And:** Verify all the selected unlocking methods to open the door.
- **/Or:** Verify one of the selected unlocking methods to open the door.

Figure 2-10 Element (multiple choice)

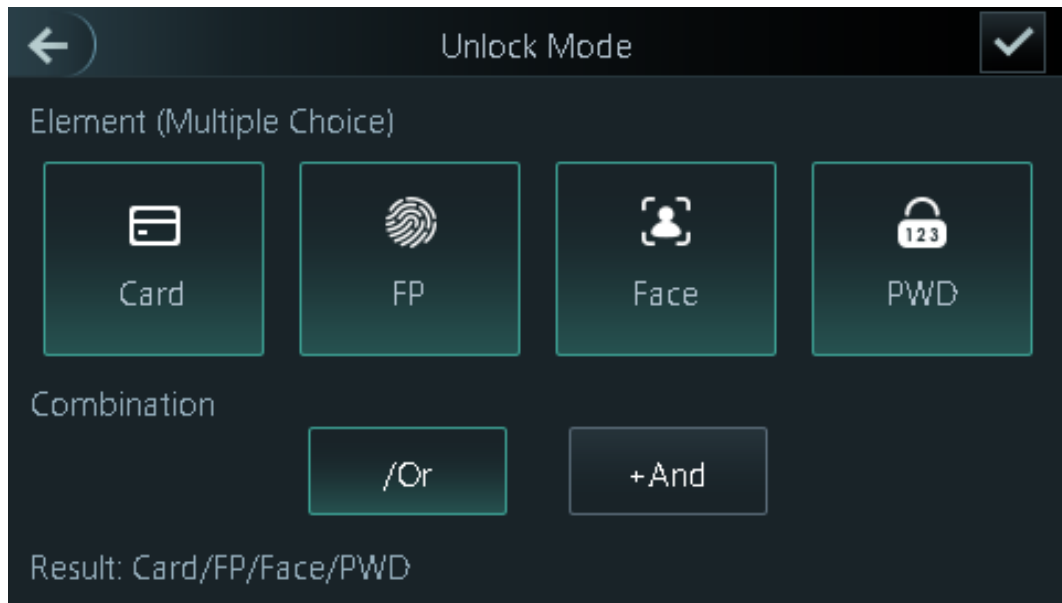

Step 4 Tap ☒ to save changes.

2.8.2 Configuring Alarm

An alarm will be triggered when abnormal access events occur.

Step 1 Select **Access** > **Alarm**.

Step 2 Enable the alarm type.

Figure 2-11 Alarm

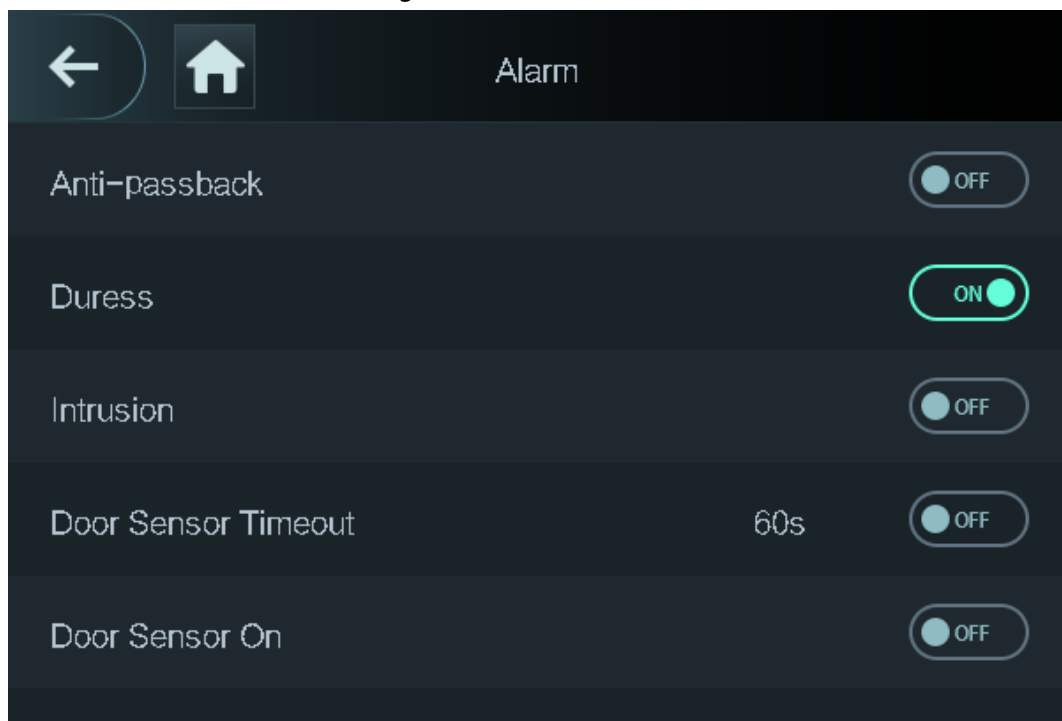


Table 2-7 Description of alarm parameters

Parameter	Description
Anti-passback	Users need to verify their identities both for entry and exit; otherwise an alarm will be triggered. It helps prevent a card holder from passing an access card back to another person so they gain entry. When anti-passback is enabled, the card holder must leave the secured area through an exit reader before system will grant another entry. • If a person enters after authorization and exits without authorization, an alarm will be triggered when they attempt to enter again, and access is denied at the same time. • If a person enters without authorization and exits after authorization, an alarm will be triggered when they attempt to enter again, and access is denied at the same time.
Duress	An alarm will be triggered when a duress card, duress password or duress fingerprint is used to unlock the door.
Intrusion	When door sensor is enabled, an intrusion alarm will be triggered if the door is opened abnormally.
Door Sensor Timeout	A timeout alarm will be triggered if the door remains unlocked longer than the defined door sensor timeout, which ranges from 1 to 9999 seconds.
Door Sensor On	Intrusion and timeout alarms can be triggered only after door sensor is enabled.

2.8.3 Configuring Door Status

Step 1 On the **Main Menu** screen, select **Access > Door Status**.

Step 2 Set door status.

- **NO**: The door remains unlocked all the time.
- **NC**: The door remains locked all the time.
- **Normal**: If **Normal** is selected, the door will be unlocked and locked according to your settings.

2.8.4 Configuring Lock Holding Time

After a person is granted access, the door will remain unlocked for a defined time for them to pass through.

Step 1 On the **Main Menu**, select **Access > Lock Holding Time**.

Step 2 Enter the unlock duration.

Step 3 Tap ☒ to save changes.

2.9 Attendance Management

You can turn on the time attendance function, and employee can make their attendance tracked by

the Access Controller at the same time when they unlock the door.

Prerequisites

On the main menu screen, tap **Attendance**, and then turn on the time & attendance function.

Procedure

Step 1 On the main menu screen, select **Attendance > Mode Set**.

Figure 2-12 Attendance mode

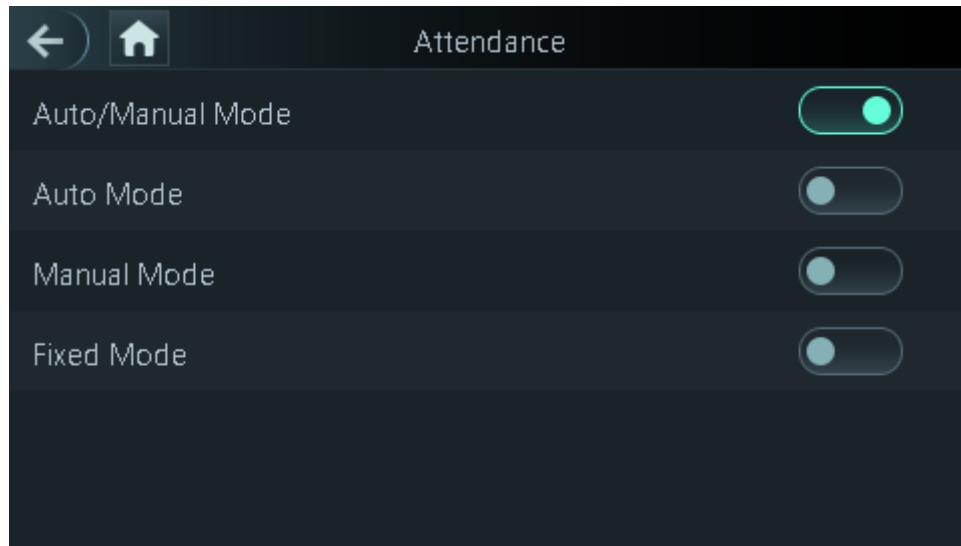


Table 2-8 Attendance mode

Parameter	Description
Auto/Manual Mode	After you punch in/out, you can manually select the attendance status or the screen displays the time attendance status automatically.
Auto Mode	The screen displays attendance status automatically after you punch in/out.
Manual Mode	Punch in/out and then tap Attendance status to manually select the attendance status.
Fixed Mode	When you punch in/out, the screen will display the pre-configured attendance status all the time.

Step 2 Select an attendance mode.

Step 3 Configure the parameters for the attendance mode.

Figure 2-13 Auto Mode/manual mode

Auto Mode	
Check In	06:00-09:59
Break Out	10:00-12:59
Break In	13:00-15:59
Check Out	16:00-20:59
OT-In	00:00-00:00
OT-Out	00:00-00:00

Figure 2-14 Fixed mode

Fixed Mode	
Check In	✓
Break Out	
Break In	
Check Out	
OT-In	
OT-Out	

Table 2-9 Attendance mode parameters

Parameters	Description
Check In	Punch in when your normal workday starts.
Break Out	Punch out when your leave of absence ends.
Break In	Punch in when your leave of absence starts.
Check Out	Punch out when your normal workday starts.
OT-In	Punch-in when your overtime working hours starts.
OT-Out	Punch out when your overtime working hours ends.

2.10 System

2.10.1 Configuring Time

Configure system time, such as date, time, and NTP.

Step 1 On the **Main Menu**, select **System** > **Time**.

Step 2 Configure system time.

Figure 2-15 Time

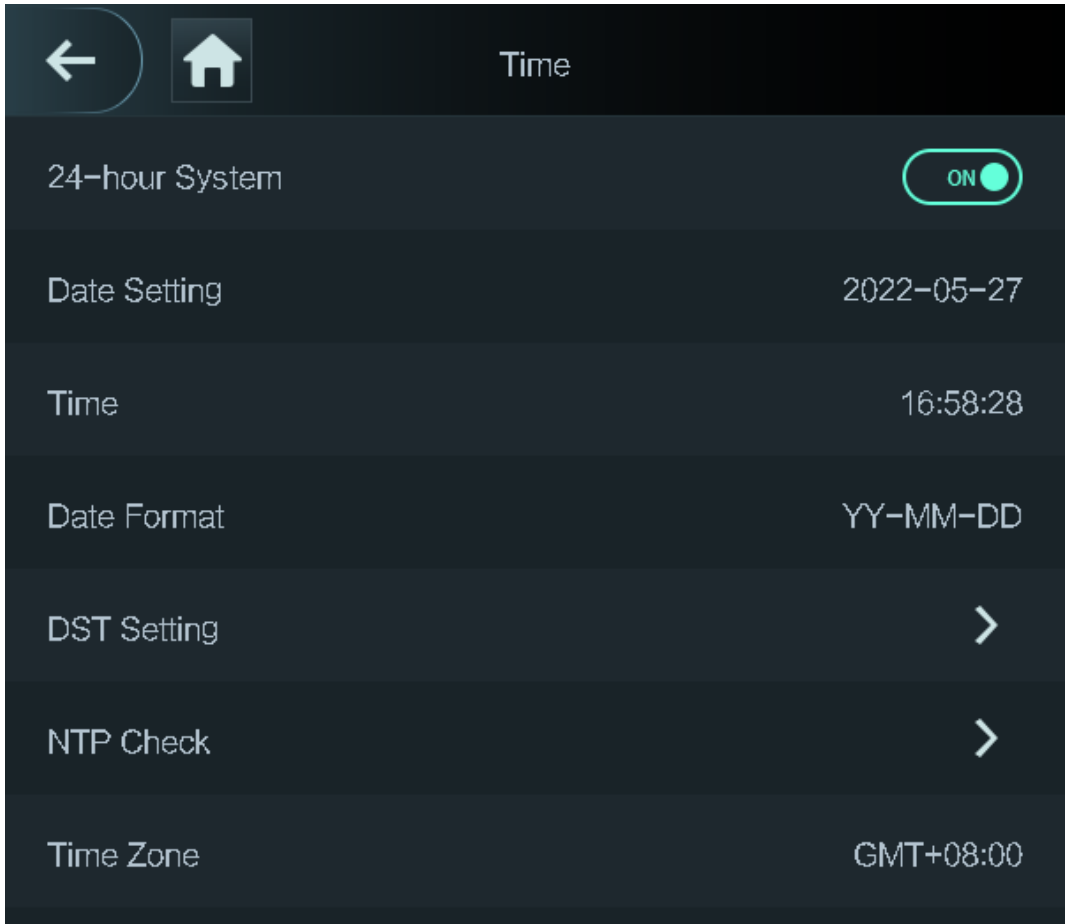


Table 2-10 Description of time parameters

Parameter	Description
24-hour System	The time is displayed in 24-hour format.
Date Setting	Set up the date.
Time	Set up the time.
Date Format	Select a date format.
DST Setting	1. Tap DST Setting 2. Enable DST. 3. Select Date or Week from the DST Type list. 4. Enter start time and end time. 5. tap ☒.

Parameter	Description
NTP Check	A network time protocol (NTP) server is a machine dedicated as the time sync server for all client computers. If your computer is set to sync with a time server on the network, your clock will show the same time as the server. When the administrator changes the time (for daylight savings), all client machines on the network will also update. 1. Tap NTP Check. 2. Turn on the NTP check function and configure parameters. • Server IP Address: Enter the IP address of the NTP server, and the Access Controller will automatically sync time with NTP server. • Port: Enter the port of the NTP server. • Interval (min): Enter the time synchronization interval.
Time Zone	Select the time zone.

2.10.2 Configuring Face Parameters

Step 1 On the main menu, select **System > Face Parameter**.

Step 2 Configure the face parameters, and then tap .

Figure 2-16 Face parameter (01)



Figure 2-17 Face parameter (02)



Table 2-11 Description of face parameters

Name	Description
Face Threshold	Adjust the face recognition accuracy. Higher threshold means higher accuracy.
Max. Angle of Face	Set the maximum face pose angle for face detection. Larger value means larger face angle range. If the face pose angle is out of the defined range, the face detection box will not appear.
Pupillary Distance	Face images require desired pixels between the eyes (called pupillary distance) for successful recognition. The default pixel is 45. The pixel changes according to the face size and the distance between faces and the lens. If an adult is 1.5 meters away from the lens, the pupillary distance can be 50 px-70 px.
Recognition Timeout (S)	If a person with access permission has their face successfully recognized, the Access Controller will prompt face recognition success. You can enter the prompt interval time.
Invalid Face Prompt Interval (S)	If a person without access permission attempts to unlock the door for several times in the defined interval, the Access Controller will prompt face recognition failure. You can enter the prompt interval time.
Anti-fake Threshold	Avoid false face recognition by using a photo, video, mask or a different substitute for an authorized person's face. • Close: Turns off this function. • General: Normal level of anti-spoofing detection means higher door access rate for people with face masks. • High: Higher level of anti-spoofing detection means higher accuracy and security. • Extremely High: Extremely high level of anti-spoofing detection means extremely high accuracy and security.
BeautyEnable	Beautify captured face images.

Name	Description
Mask Parameters	- Mask mode: ◇ No detect: Mask is not detected during face recognition. ◇ Mask reminder: Mask is detected during face recognition. If the person is not wearing a mask, the system will remind them to wear masks, and access is allowed. ◇ Mask intercept: Mask is detected during face recognition. If a person is not wearing a mask, the system will remind them to wear masks, and access is denied. - Mask Recognition Threshold: Higher threshold means higher mask detection accuracy.
Multi-face Recognition	Supports detecting 4 face images at the same time, and the unlock combinations mode become invalid. The door is unlocked after any one of them gain access.

2.10.3 Setting Volume

You can adjust the volume of the speaker and microphone.

Step 1 On the **Main Menu**, select **System > Volume**.

Step 2 Select **Beep Volume** or **Mic Volume**, and then tap **+** or **-** to adjust the volume.

2.10.4 (Optional) Configuring Fingerprint Parameters

Configure fingerprint detection accuracy. Higher value means that higher threshold of similarity and higher accuracy.



This function is only available on Access Controller that supports fingerprint unlock..

Step 1 On the **Main Menu**, select **System > FP Parameter**.

Step 2 Tap **+** or **-** to adjust the value.

2.10.5 Screen Settings

Configure screen off time and logout time.

Step 1 On the **Main Menu**, select **System > Screen settings**.

Step 2 Tap **Logout Time** or **Screen Off Timeout**, and then tap **+** or **-** to adjust the time.

2.10.6 Restoring Factory Defaults

Step 1 On the **Main Menu**, select **System > Restore Factory**.

Step 2 Restore factory defaults if necessary.

- **Restore Factory**: Resets all configurations and data.
- **Restore Factory (Save user & log)**: Resets configurations except for user information

and logs.

2.10.7 Restart the Device

On the **Main Menu**, select **System** > **Reboot**, and the Access Controller will be restarted.

2.10.8 Configuring the Language

Change the language on the Access Controller.

On the **Main Menu**, select **System** > **Language**, select the language for the Access Controller.

2.11 USB Management

You can use a USB to update the Access Controller, and export or import user information through USB.



- Make sure that a USB is inserted to the Access Controller before you export data or update the system. To avoid failure, do not pull out the USB or perform any operation of the Access Controller during the process.
- You have to use a USB to export the information from an Access Controller to other devices. Face images are not allowed to be imported through USB.


2.11.1 Exporting to USB

You can export data from the Access Controller to a USB. The exported data is encrypted and cannot be edited.

Step 1 On the **Main Menu**, select **USB** > **USB Export**.

Step 2 Select the data type you want to export, and then tap **OK**.

Figure 2-18 USB export

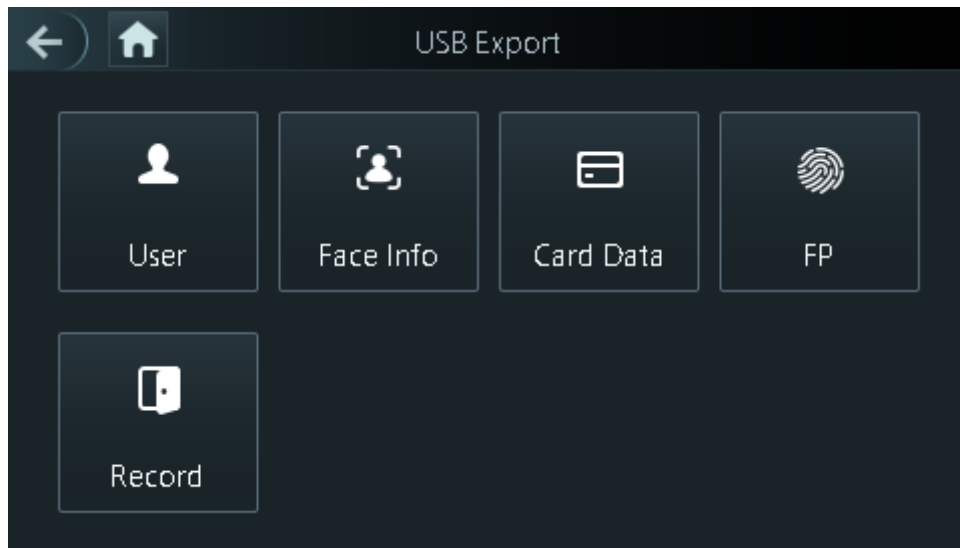


2.11.2 Importing From USB

You can import data from USB to the Access Controller.

Step 1 On the **Main Menu**, select **USB > USB Import**.

Step 2 Select the data type that you want to export, and then tap **OK**.

Figure 2-19 USB import

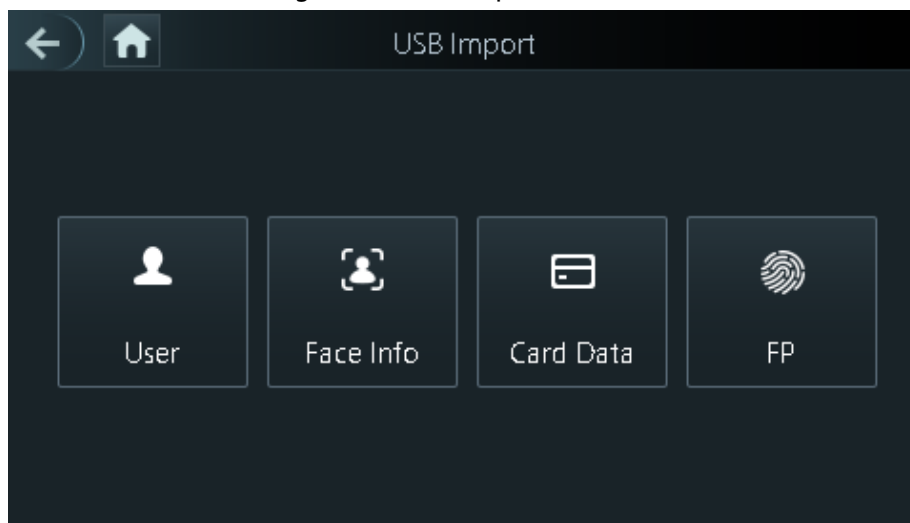

2.11.3 Updating System

Use a USB to update the system of the Access Controller.

Step 1 Rename the update file to "update.bin", put it in the root directory of the USB, and then insert the USB to the Access Controller.

Step 2 On the **Main Menu**, select **USB > USB Update**.

Step 3 Tap **OK**.

The Access Controller will restart when the updating completes.

2.12 Configuring Features

On the **Main Menu** screen, select **Features**.

Figure 2-20 Features

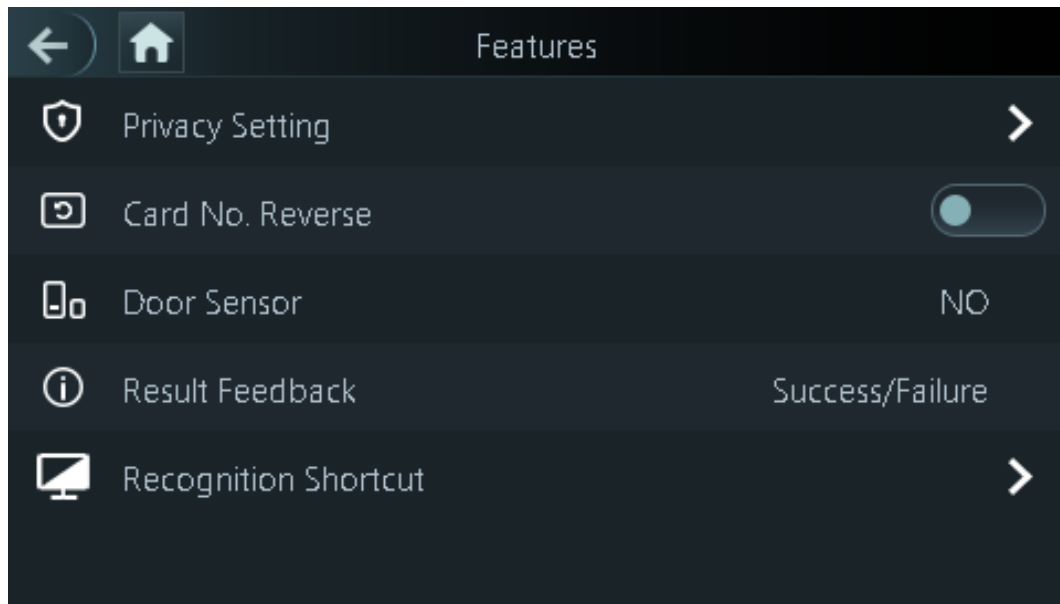


Table 2-12 Description of features

Parameter	Description
Private Setting	• PWD Reset Enable: You can enable this function to reset password. The PWD Reset function is enabled by default. • HTTPS: Hypertext Transfer Protocol Secure (HTTPS) is a protocol for secure communication over a computer network. When HTTPS is enabled, HTTPS will be used to access CGI commands; otherwise HTTP will be used.  When HTTPS is enabled, the access controller will restart automatically. • CGI: Common Gateway Interface (CGI) offers a standard protocol for web servers to execute programs similarly to console applications running on a server that dynamically generates web pages. The CG I is enabled by default. • SSH: Secure Shell (SSH) is a cryptographic network protocol for operating network services securely over an unsecured network. • Capture Photos: Face images will be captured automatically when people unlock the door. The function is enabled by default. • Clear Captured Photos:Delete all automatically captured photos.

Parameter	Description
Card No. Reverse	When the Access Terminal connects to a third-party device through Wiegand input, and the card number read by the Access Terminal is in the reserve order from the actual card number, you need to turn on the Card No. Reverse function.
Door Sensor	NC: When the door opens, the circuit of the door sensor circuit is closed. NO: When the door opens, the circuit of the door sensor circuit is open. Intrusion and overtime alarms are triggered only after door detector is turned on.
Result Feedback	• Success/Failure: Only displays success or failure on the standby screen. • Only Name: Displays user ID, name and authorization time after access granted; displays not authorized message and authorization time after access denied. • Photo&Name: Displays user's registered face image, user ID, name and authorization time after access granted; displays not authorized message and authorization time after access denied. • Photos&Name: Displays the captured face image and a registered face image of a user, user ID, name and authorization time after access granted; displays not authorized message and authorization time after access denied.
Recognition shortcut	Select identity verification methods on the standby screen. • Password: The icon of the password unlock method is displayed on the standby screen. • QR code: The icon of the QR code unlock method is displayed on the standby screen. • Call: The icon of call function is displayed on the standby screen. • Call Type: ◇ Call Room: Tap the call icon on the standby mode and enter the room number to make calls. ◇ Call Management Center: Tap the call icon on the standby mode, and then call the management center. ◇ Custom call room: Tap the call icon to call the defined room number. You need to define the number of room first on the Recognition shortcut screen.

2.13 Unlocking the Door

You can unlock the door through faces, passwords, fingerprint, cards, and more.

2.13.1 Unlocking by Cards

Place the card at the swiping area to unlock the door.

2.13.2 Unlocking by Face

Verify the identity of an individual by detecting their faces. Make sure that the face is centered on the face detection frame.

2.13.3 Unlocking by User Password

Enter the user ID and password to unlock the door.

Step 1 Tap  on the standby screen.

Step 2 tap **PWD Unlock**, and then enter the user ID and password.

Step 3 Tap **Yes**.

2.13.4 Unlocking by Administrator Password

Enter only the administrator password to unlock the door. The access controller only allows for one administrator password. Using administrator password to unlock the door without being subject to user levels, unlock modes, periods, holiday plans, and anti-passback except for normally closed door. One device allows for only one admin password.

Prerequisites

The administrator password was configured. For details, see "2.7.3 Configuring Administrator Password".



Administrator password cannot be used to unlock the door status is set to NC.

Procedure

Step 1 Tap  on the standby screen.

Step 2 Tap **Admin PWD**, and then enter the admin password.

Step 3 Tap .

2.13.5 Unlocking by QR code

Step 1 On the standby screen, tap .

Step 2 Place your QR code in front of the lens.

2.13.6 Unlocking by Fingerprint

Place you finger on the fingerprint scanner. This function is only available on the Access Controller

that supports fingerprint unlocking.

2.14 Viewing Unlock Logs

View or search door unlocking logs.

On the main menu, tap **Record**.

2.15 System Information

You can view data capacity and device version.

2.15.1 Viewing Data Capacity

On the **Main Menu**, select **System Info** > **Data Capacity**, you can view storage capacity of each data type.

2.15.2 Viewing Device Version

On the **Main Menu**, select **System Info** > **Data Capacity**, you can view the device version, such as serial No., software version and more.

3 Web Operations

On the webpage, you can also configure and update the Access Controller.



Web configurations differ depending on models of the Access Controller.

3.1 Initialization

Initialize the Access Controller when you log in to the webpage for the first time or after the Access Controller is restored to the factory defaults.

Prerequisites

Make sure that the computer used to log in to the webpage is on the same LAN as the Access Controller.

Set a password and an email address before logging in to the webpage for the first time.

Step 1 Open a browser, go to the IP address (the default address is 192.168.1.108) of the Access Controller.



We recommend you use the latest version of Chrome or Firefox.

Step 2 Set the password and email address according to the screen instructions.




- The password must consist of 8 to 32 non-blank characters and contain at least two types of the following characters: upper case, lower case, numbers, and special characters (excluding ' " ; : &). Set a high-security password by following the password strength prompt.
- Keep the password safe after initialization and change the password regularly to improve security.

3.2 Logging In

Step 1 Open a browser, enter the IP address of the Access Controller in the address bar, and press the Enter key.

Figure 3-1 Login

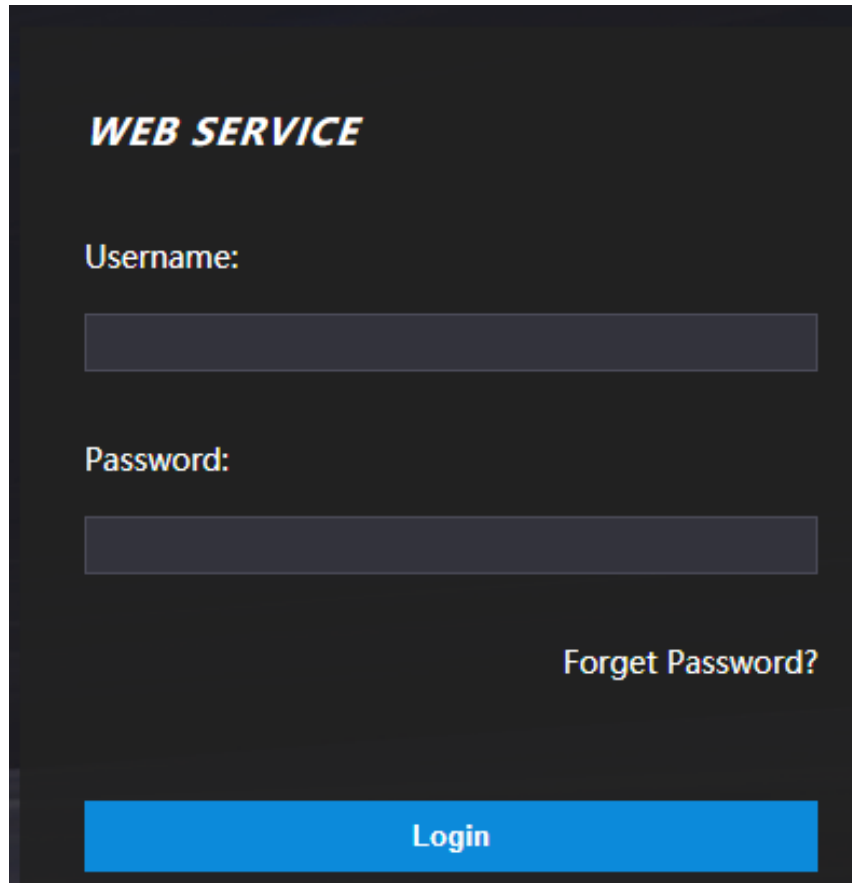

Step 2 Enter the user name and password.



- The default administrator name is admin, and the password is the one you set up during initialization. We recommend you change the administrator password regularly to increase security.
- If you forget the administrator login password, you can click **Forget password?** For details, see "3.3 Resetting the Password".

Step 3 Click **Login**.

3.3 Resetting the Password


Reset the password through the linked e-mail when you forget the admin password.

Step 1 On the login page, click **Forgot password**.

Step 2 Read the on-screen prompt carefully, and then click **OK**.

Step 3 Scan the QR code, and you will get the security code.

Figure 3-2 Reset password

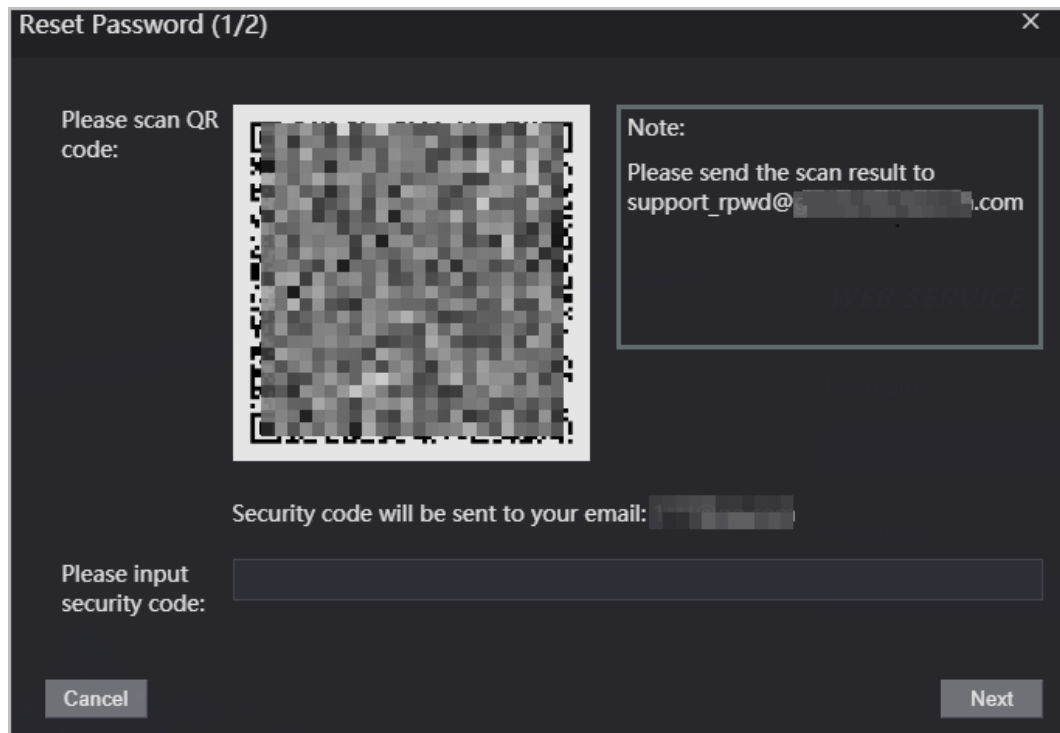

- Up to two security codes will be generated when the same QR code is scanned. If the security code becomes invalid, refresh the QR code and scan again.
- After you scan the QR code, you will receive a security code in your linked e-mail address. Use the security code within 24 hours after you receive it. Otherwise, it will become invalid.
- If the wrong security code is entered in a row, the administrator account will be frozen for 5 minutes.

- Step 4 Enter the security code.
- Step 5 Click **Next**.
- Step 6 Reset and confirm the new password.



The password should consist of 8 to 32 non-blank characters and contain at least two of the following types of characters: upper case, lower case, number, and special character (excluding ' " ; : &).

- Step 7 Click **OK**.

3.4 Configuring Door Parameter

Configure the access control parameters.

- Step 1 Log in to the webpage.
- Step 2 Select **Door Parameter**.

Figure 3-3 Door parameter

Door Parameter

Name

Door1

State

Normal

Opening Method

Unlock Mode

Combination

Or

Element (Multiple Choice)

☒ Card
☒ FP
☒ Face Recognition
☒ PWD

Hold Time (Sec.)

3.0

(0.2-600)

Normally Open Time

Disable

Normally Close Time

Disable

Timeout (Sec.)

60

(1-9999)

Open time with remote verification

Disable

Remote Verification

☐

Duress Alarm

☒

Door Sensor

☐

Intrusion Alarm

☐

Overtime Alarm

☐

Anti-passback Alarm

☐

OK

Refresh

Default

Table 3-1 Description of door parameters


Parameter	Description
Name	Enter a name of the door.
State	Set the door status. NO: The door remains unlocked all the time. NC: The door remains locked all the time. Normal: If Normal is selected, the door will be unlocked and locked according to your settings.
Opening Method	- Unlock by Period: Set different unlock methods for different periods. - Group Combination: The user can unlock the door only after defined users or user groups grant access. - Unlock Mode: Set unlock combinations.
Hold Time (Sec.)	After a person is granted access, the door will remain unlocked for a defined time for them to pass through. It ranges from 0.2 s to 600 s.
Normally Open Time	The door remains open or closed during the defined period.
Normally Close Time	
Timeout (Sec.)	A timeout alarm will be triggered if the door remains unlocked for longer time than this value.
Open with remote verification	Set the remote verification door opening period. After users gain access on the Access Controller, they must also be granted access from the management platform before the door unlocks.

Parameter	Description
Duress Alarm	An alarm will be triggered when a duress card or duress password is used to unlock the door.
Door Sensor	Intrusion and overtime alarms can be triggered only after Door Sensor is enabled.
Intrusion Alarm	When Door Sensor is enabled, an intrusion alarm will be triggered if the door is opened abnormally.
Overtime Alarm	A timeout alarm will be triggered if the door remains unlocked for longer time than the Timeout (Sec) .
Anti-passback Alarm	Users need to verify their identities both for entry and exit; otherwise an alarm will be triggered. It helps prevents a card holder from passing an access card back to another person so they gain entry. When anti-passback is enabled, the card holder must leave the secured area through an exit reader before system will grant another entry. • If a person enters after authorization and exits without authorization, an alarm will be triggered when they attempt to enter again, and access is denied at the same time. • If a person enters without authorization and exits after authorization, an alarm will be triggered when they attempt to enter again, and access is denied at the same time.

Step 3 Configure the opening method.

- Unlock by Period
 1. In the **Opening Method** list, select **Unlock by Period**, and then click .

Figure 3-4 Time section parameter

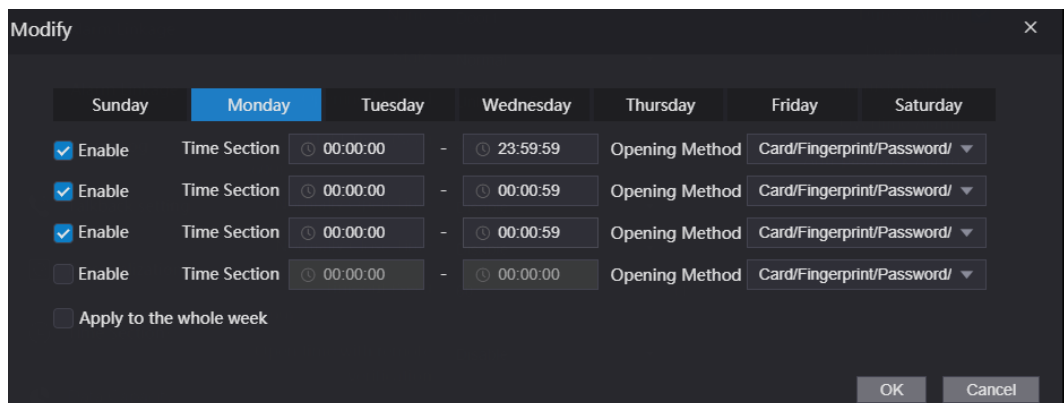

2. Configure the time and the opening method for a time section. You can configure up to four time sections for a single day.
 3. Select **Apply to the whole week** to copy the defined time to the rest of days.
- Group Combination
 1. In the **Opening Method** list, select **Group Combination**, and then click .
 2. Click **Add**.
 3. Select an unlocking method in the **Opening Method** list., and enter the number of valid users.
If the number of valid users is 2, and there are 3 users in the defined user list. Two users in the list are required to grant access.

Figure 3-5 Group Combination

The screenshot shows a dark-themed 'Add' dialog box. At the top right is a close button (X). Below it, 'Opening Method' is a dropdown menu showing 'Card'. To its right, 'Valid User' is a text box containing the number '2'. Below these is the 'User List' section. It contains three numbered entries: '1. 7849947784' with a red 'X' to its right, '2. 47884954' with a red 'X' to its right, and '3. 4344905' with a red 'X' to its right. The third entry's text box is currently active. Below the list is a grey 'Add User' button. At the bottom right are 'OK' and 'Cancel' buttons.

4. In the **User List** area, click **Add User**, enter the user ID of existing users.



- ◇ VIP, patrol, and blocklist users cannot be added.
- ◇ Valid users in all groups must verify their identities to grant access in the group order.

5. Click **OK**.

- **Unlock mode**

1. In the **Opening Method** list, select **Group Combination**, and then click .
2. In the **Combination** list, select **Or** or **And**.
 - ◇ **And** means you must use all the selected methods to open the door.
 - ◇ **Or** means you can open the door with any of the selected methods.
3. In the **Element** list, select the unlock method.

Step 4 Configure other parameters.

Step 5 Click **OK**.

3.5 Intercom Configuration

The Access Controller can function as a door station to realize video intercom function.

3.5.1 Configuring SIP Server

When connected to the same SIP server, all VTOs and VTHs can call each other. You can use the Access Controller or other VTOs or the management platform as the SIP server.



When the Access Controller functions as the SIP server, it can connect up to 500 access control devices and VTHs.

Step 1 Select **Intercom** > **SIP Server**.

Step 2 Select a server type.

- Use the Access Controller as the SIP server.

Turn on **SIP Server** and keep other parameters as default.

Figure 3-6 Use the Access Controller as the SIP server

The screenshot shows the 'SIP Server' configuration window. The 'SIP Server' checkbox is checked and labeled 'Enable'. The 'Server Type' dropdown is set to 'Express/DSS'. The 'IP Address' field is empty. The 'Port' is set to 5080. The 'Username' is set to 8001. The 'Password' field is masked with dots. The 'SIP Domain' is set to VDP. The 'SIP Server Username' and 'SIP Server Password' fields are also masked. On the right side, 'Alternate IP Addr.' is 0.0.0.0, 'Alternate Username' is empty, 'Alternate Password' is masked, 'Alternate VTS IP Addr.' is 0.0.0.0, and 'Alternate Server' is set to 'Enable'. At the bottom, there is a red warning message: 'Warning: The device needs reboot after modifying the SIP server enable.' and three buttons: 'OK', 'Refresh', and 'Default'.

- Use another VTO as the SIP server:
 1. Do not enable **SIP server**. Select **VTO** from the **Server Type**.
 2. Configure the parameters, and then click **Save**.

Figure 3-7 Use VTO as the SIP server

The screenshot shows the 'SIP Server' configuration window. The 'SIP Server' checkbox is unchecked and labeled 'Enable'. The 'Server Type' dropdown is set to 'VTO'. The 'IP Address' field is empty. The 'Port' is set to 5060. The 'Username' is set to 8001. The 'Password' field is masked with dots. The 'SIP Domain' is set to VDP. The 'SIP Server Username' and 'SIP Server Password' fields are also masked. At the bottom, there is a red warning message: 'Warning: The device needs reboot after modifying the SIP server enable.' and three buttons: 'OK', 'Refresh', and 'Default'.

Table 3-2 SIP server configuration

Parameter	Description
IP Address	IP address of the platform.
Port	• 5060 by default when VTO work as SIP server. • 5080 by default when the platform works as SIP server.
Username	Leave them as default.
Password	

Parameter	Description
SIP Domain	VDP.
SIP Server Username	The login username and password of the SIP server.
SIP Server Password	

- Use the DSS Express or DSS pro as the SIP server.
Do not enable **SIP server**. Select **Express/DSS** from the **Server Type**.

Figure 3-8 Use DSS Express or DSS pro as the SIP server

Table 3-3 SIP server configuration

Parameter	Description
IP Address	IP address of the platform.
Port	• 5060 by default when VTO work as SIP server. • 5080 by default when the platform works as SIP server.
Username	Leave them as default.
Password	
SIP Domain	Leave it as default.
SIP Server Username	The login username and password of the platform.
SIP Server Password	
Alternate IP Addr.	The alternate server will be used as the SIP server when DSS Express or DSS pro does not respond. We recommend you configure the alternate IP address.  • If you turn on the Alternate Server function, you will set the Access Controllers the alternate server. • If you want another VTO to function as the alternate server, you need to enter the IP address, username, password of the VTO. Do not enable Alternate Server in this case. • We recommend you set the main VTO as the alternate server.
Alternate Username	Used to log in to the alternate server.
Alternate Password	

Parameter	Description
Alternate VTS IP Addr.	Enter the IP address of the alternate VTS. When the management platform does not respond, the alternate VTS will be activated to make sure VTO, VTH and VTS can still realize video intercom function.

Step 3 Click **OK**.

3.5.2 Configuring Basic Parameters

Configure the basic information of VTO, such as device type and device number.

Step 1 Select **Talkback > Local**.

Step 2 Configure the parameters.

- Use the Access Controller as the SIP server.

Figure 3-9 Basic parameter

The screenshot shows the 'Local' configuration interface. It includes a 'Device Type' dropdown set to 'Unit Door Station', a 'Centre Call No.' field with '888888', a 'VTO No.' field with '8001', a 'Group Call' checkbox that is unchecked with a red warning message, and 'Transmission Mode' radio buttons with 'Mode1' selected. At the bottom are 'Confirm', 'Refresh', and 'Default' buttons.

Table 3-4 Basic parameter description

Parameter	Description
Device Type	Select Unit Door Station .
VTO No.	The number of the VTO, which cannot be configured.
Group Call	When you turn on the group call function, the VTO calls the main VTH and the extensions at the same time.
Centre Call No.	The default phone number is 888888+VTS No. when the VTO calls the VTS. You can check the number of the VTS from the Device screen of VTS.
Transmission Mode	Mode 1 is selected by default.

- Use other VTO as the SIP server.

Figure 3-10 Basic parameter

This is an identical screenshot to Figure 3-9, showing the 'Local' configuration page with the same settings: Device Type (Unit Door Station), VTO No. (8001), Centre Call No. (888888), Group Call (disabled), and Transmission Mode (Mode1).

Table 3-5 Basic parameter description

Parameter	Description
Device Type	Select Unit Door Station .

Parameter	Description
VTO No.	The number of the VTO.  - The number must have four digits. The first two digits are 80, and the last two digits start from 01. Take 8001 for example. - If multiple VTOs exist in the one unit, the VTO No. cannot be repeated.
Centre Call No.	The default phone number for the management center is 888888. Keep it as default.
Transmission Mode	Mode 1 is selected by default.

- Use the Platform (DSS Express or DSS Pro) as the SIP Server.

Figure 3-11 Basic parameter

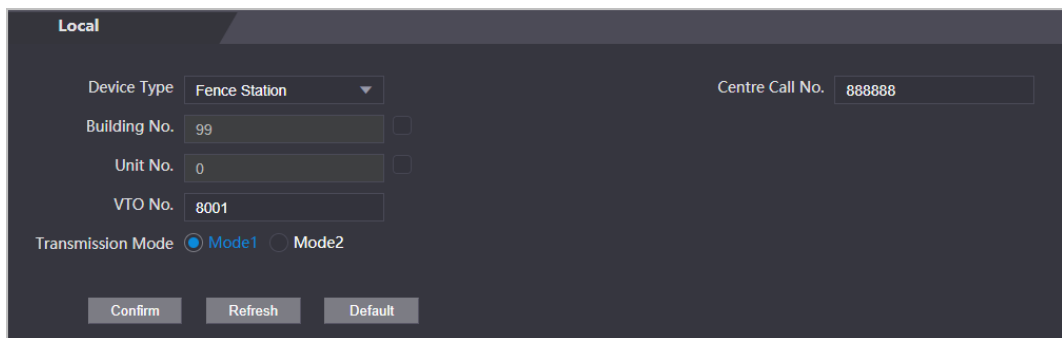


Table 3-6 Basic parameter description

Parameter	Description
Device Type	Select the device type based on the installation position.
Building No.	Select the checkbox and then enter the number of the building where the unit door station is installed.
Unit No.	Select the checkbox and then enter the number of the unit where the unit door station is installed.
VTO No.	The number of the unit door station.  If multiple VTOs exist in the one unit, the VTO No. cannot be repeated. If building and unit are enabled on DSS, enter the building number and unit number on the web page. The building number, unit number and VTO number must conform to the configured parameters on DSS.  Take room 1001, unit 2, and building 1 as an example. If building number is enabled on the DSS and the unit is not enabled, the room number is "1#1001". If building and unit are both enabled, the room number is "1#2#1001". If building is not enabled, and unit is not enabled either, the room number is "1001". For details, see the user manual of DSS.
Centre Call No.	The default phone number is 888888 when the VTO calls the VTS. Keep it as default.
Transmission Mode	Mode 1 is selected by default.

Step 3 Click **Confirm**.

3.5.3 Adding the VTO

When the Access Controller functions as the SIP Server and you have other VTOs, you need to add other VTOs to the SIP server to make sure they can call each other.

Step 1 On the webpage of the Access Controller, select **Talkback setting > VTO No. Management**.

Step 2 Click **Add**, and then configure the VTO.

Figure 3-12 Add VTO

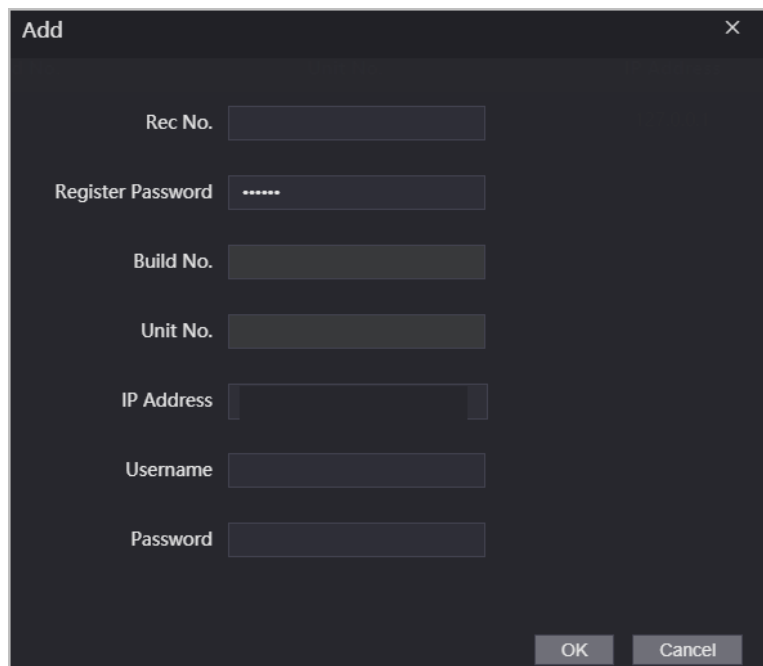


Table 3-7 Add VTO configuration

Parameter	Description
Rec No.	The number of the added VTO. You can check the number from the Device page on the webpage of the VTO.
Registration Password	Keep it default.
Build No.	Cannot be configured.
Unit No.	
IP Address	The IP address of the added VTO.
Username	The username and password used to log in to the webpage of the added VTO.
Password	

Step 3 Click **OK**.

3.5.4 Adding the VTH

When the Access Controller functions as the SIP Server, you can add all VTHs in the same unit to the

SIP server to make sure they can call each other.

Background Information



- When there are main VTH and extension, you need to turn on the group call function first and then add main VTH and extension on the **VTH Management** page. For how to turn on the group call function, refer to "3.5.2 Configuring Basic Parameters".
- Extension cannot be added when the main VTHs are not added.

Step 1 On the home page, select **Talkback setting** > **Room No. Management**.

Step 2 Add the VTH.

- Add individually
 1. Click **Add**.
 2. Configure parameters, and then click **OK**.

Figure 3-13 Add individually

Add [Close]

First Name [Text Box]

Last Name [Text Box]

Nick Name [Text Box]

Room No. [Text Box] *

Register Type [public] ▼

Register Password [Text Box with dots] *

[OK] [Cancel]

Table 3-8 Room information

Parameter	Description
Room No.	Enter the room number of the VTH. - The room number consists of 1-5 digits, and must conform to the configured room number on the VTH. - When there are main VTH and extensions, the room number of main VTH ends with -0 and the room number of extension ends with -1, -2 or -3. For example, the main VTH is 101-0, and the room number of the extension is 101-1, 101-2... - If the group call function is not turned on, room number in the format of 9901-xx cannot be set.
First Name	Enter the name of the VTH to help you differentiate VTHs.
Last Name	
Nick Name	
Register Type	Keep them as defaults.
Registered Password	

- Add in batches
 1. Click **Batch Add**
 2. Configure the parameters.

Figure 3-14 Batch add

The screenshot shows a dark-themed configuration window for batch adding VTHs. It contains four labeled input fields arranged in a 2x2 grid. The top-left field is 'Unit Layer Amount' with the value '5'. The top-right field is 'Room Amount in One Layer' with the value '4'. The bottom-left field is 'First Floor Number' with the value '101'. The bottom-right field is 'Second Floor Number' with the value '201'. A grey 'Add' button is positioned at the bottom left of the form area.

Table 3-9 Batch add

Parameter	Description
Unit Layer Amount	The number of floors of the building (ranging from 1-99).
Room Amount in One Layer	The number of rooms on each floor, which ranges from 1-99.
First Floor Number	The first room on the first floor.
Second Floor Number	The first room on the second floor, which equals the first room on the first floor plus the number of rooms on each floor.


3.5.5 Adding the VTS

When the Access Controller functions as the SIP Server, you can add VTSs to the SIP server to make sure they can call each other.

Step 1 On the Homepage, select **Talkback setting** > **VTS Management**.

Step 2 Click **Add** and set parameters.

Figure 3-15 VTS management

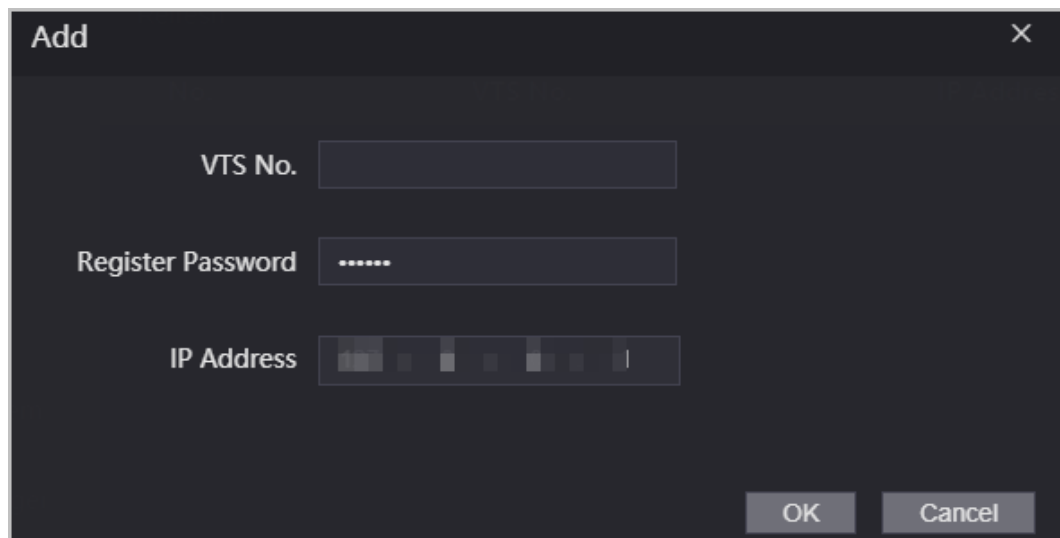

Step 3 Click **OK**.

3.5.6 Viewing Device Status

When the Access Controller works as the SIP Server, you can view the status of devices that are connected the SIP server.

On the Homepage, select **Talkback setting** > **Status**.

3.5.7 Viewing Call Logs

View all the record of outgoing calls and incoming calls.

On the Homepage, select **Talkback setting** > **Call**.

3.6 Configuring Time Sections

Configure time sections and holiday plans, and then you can define when a user has the permissions to unlock doors.

3.6.1 Configuring Time Sections

You can configure up to 128 groups (from No.0 through No.127) of time section. In each group, you need to configure door access schedules for a whole week. A user can only unlock the door during the scheduled time.

Step 1 Log in to the webpage.

Step 2 Select **Time Section** > **Time Section**.

Step 3 Click **Add**.

Figure 3-16 Time section parameters

- Step 4** Enter No. and name for the time section.
- **No.:** Enter a section number It ranges from 0 through 127.
 - **Name:** Enter a name for each time section. You can enter a maximum of 32 characters (contain number, special characters and English characters).
- Step 5** Configure time sections for each day.
- Step 6** You can configure up to four time sections for a single day.
- Step 7** (Optional) Click **Apply to the whole week** to copy the configuration to the rest of days.
- Step 8** Click **OK**.

3.6.2 Configuring Holiday Groups

Set time sections for different holiday groups. You can configure up to 128 holiday groups (from No.0 through No.127). and up to 16 time sections for a single holiday group. Users can unlock doors in the defined time sections.

- Step 1** Log in to the web page.
- Step 2** Select **Time Section > Holiday Group > Config**.
- Step 3** Click **Add**.

Figure 3-17 Add a holiday group

- Step 4** Set the name and the time for the holiday group.
- **Holiday Name:** Enter the name of the holiday group. Enter a name for each time

section. You can enter a maximum of 32 characters (contain numbers, special characters and English characters).

- **Time Section:** Select the start time and end time of the holiday.

Step 5 Click **OK**.



You can add multiple holidays in a holiday group.

Step 6 Click **OK**.

3.6.3 Configuring Holiday Plans

Assign the configured holiday groups to the holiday plan. Users can only unlock the door in the defined time in the holiday plan.

Step 1 Log in to the webpage.

Step 2 Select **Time Section > Holiday Plan Config**.

Step 3 Click **Add**.

Figure 3-18 Add holiday plan

No.	Name	Holiday Group No.	Holiday Period
1		1	☒ Enable Time Section: 00:00:00 - 23:59:59
			☒ Enable Time Section: 00:00:00 - 00:00:00
			☐ Enable Time Section: 00:00:00 - 00:00:00
			☐ Enable Time Section: 00:00:00 - 00:00:00

Step 4 Enter a number and name for the holiday plan.

- **No.:** Enter a section number. It ranges from 0 through 127.
- **Name:** Enter a name for each time section. You can enter a maximum of 32 characters (contain numbers, special characters and English characters).

Step 5 In the **Holiday Group No.** list, select the number of the defined holiday group.



Select **255** if you do not want to select a holiday group.

Step 6 In the **Holiday Period** area, configure time sections in the holiday group. You can configure up to four time sections.

Step 7 Click **OK**.

3.7 Data Capacity

You can see how many users, cards and face images that the Access Controller can store.

Log in to the webpage and select **Data Capacity**.

3.8 Configuring Video and Image

Configure video and image parameters, such as stream and brightness.



We recommend you use the default parameters in this section.

3.8.1 Configuring Video

On the home page, select **Video Setting**, and then configure the video stream, status, image and exposure.

- Video Standard: Select **NTSC**.
- Channel Id: Channel 1 is for configurations of visible light image. Channel 2 is for configurations of infrared light image.
- Default: Restore to defaults settings.
- Capture: Take a snapshot of the current image.



PAL video standard is 25 fps and the NTSC video standard is 30 fps.

3.8.1.1 Configuring Channel 1

Step 1 Select **Video Setting** > **Video Setting**.

Step 2 Select **1** from the **Channel No.** list.

Step 3 Configure the data rate.

Figure 3-19 Date rate

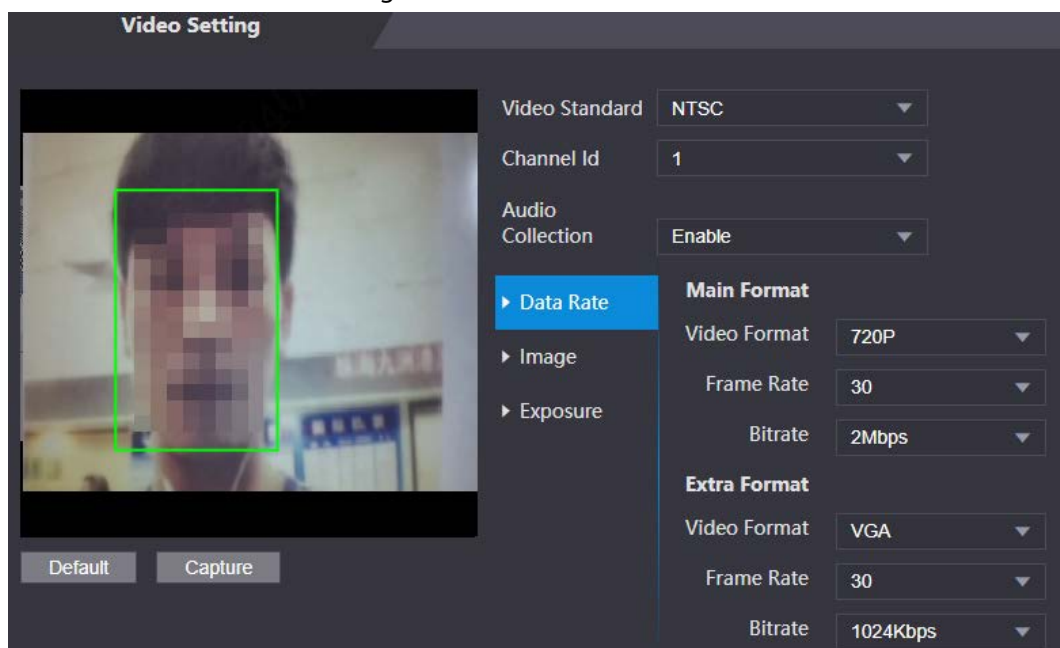


Table 3-11 Date rate description

Parameter		Description
Main Format	Video Format	 When the Access Controller functions as the a VTO and connects the VTH, the acquired stream limit of VTH is 720p. When resolution is changed to 1080p, the call and monitor function might be affected.
	Frame Rate	The number of frames (or images) per second. The frame rate range is 1–25 fps.
	Bitrate	It indicates the amount of data transmitted over an internet connection in a given amount of time. Select a proper bandwidth based on your network speed.
Sub Stream	Video Format	The sub-stream supports D1, VGA and QVGA.
	Frame Rate	The number of frames (or images) per second. The frame rate range is 1–25 fps.
	Bitrate	It indicates the amount of data transmitted over an internet connection in a given amount of time.

Step 4 Configure the image.

Figure 3-20 Image

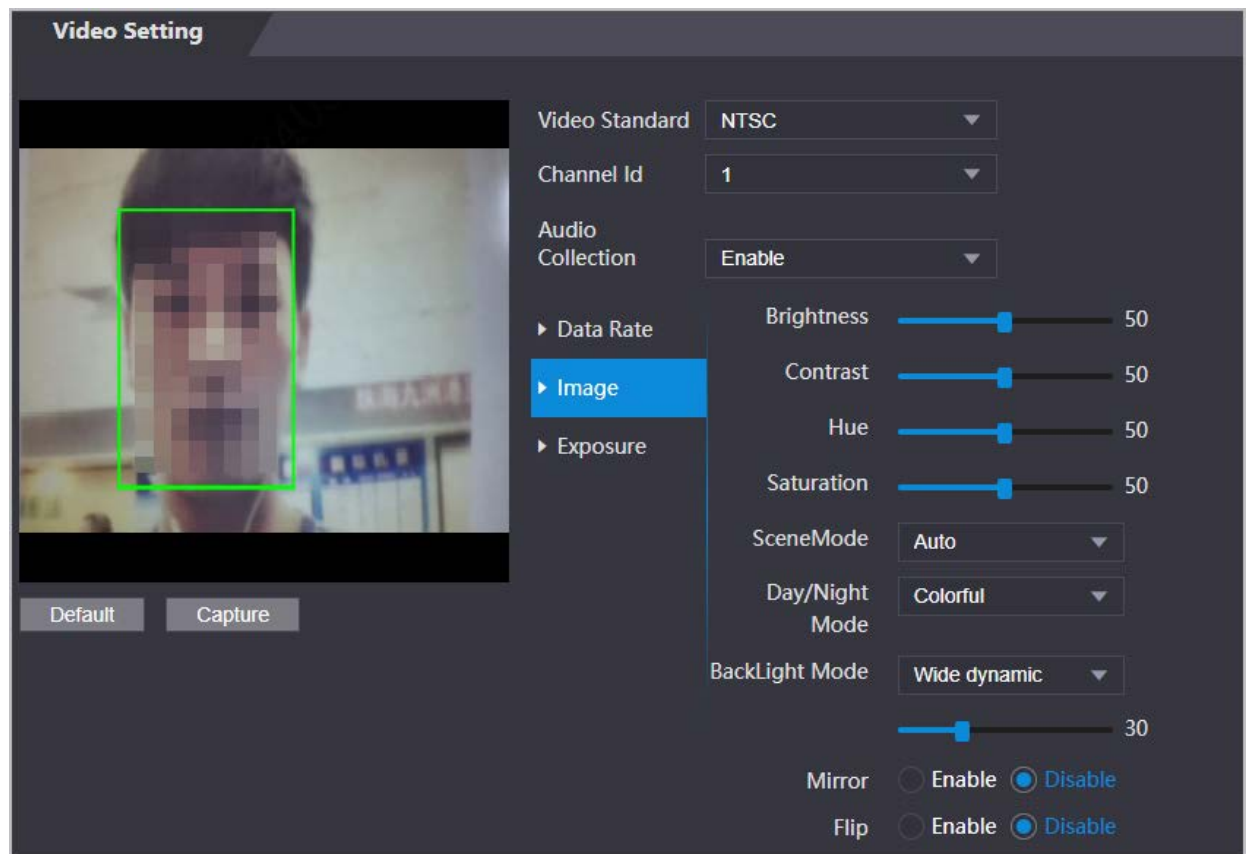


Table 3-12 Image description

Parameter	Description
Contrast	Contrast is the difference in the luminance or color that makes an object distinguishable. The larger the contrast value is, the greater the color contrast will be.
Hue	Refers to the strength or saturation of a color. It describes the color intensity, or how pure it is.
Saturation	Color saturation indicates the intensity of color in an image. As the saturation increases, the appear stronger, for example being more red or more blue.  The saturation value does not change image brightness.
Scene Mode	The image hue is different in different scene mode. • Close: Scene mode function is turned off. • Auto: The system automatically adjusts the scene mode based on the photographic sensitivity. • Sunny: In this mode, image hue will be reduced. • Night: In this mode, image hue will be increased.
Day/Night	Day/Night mode affects light compensation in different situations. • Auto: The system automatically adjusts the day/night mode based on the photographic sensitivity. • Colorful: In this mode, images are colorful. • Black and white: In this mode, images are in black and white.
Backlight Mode	• Close: Backlight compensation is turned off. • Backlight: Backlight compensation automatically brings more light to darker areas of an image when bright light shining from behind obscures it. • Wide dynamic: The system dims bright areas and compensates for dark areas to create a balance to improve the overall image quality. • Inhibition: Highlight compensation (HLC) is a technology used in CCTV/IP security cameras to deal with images that are exposed to lights like headlights or spotlights. The image sensor of the camera detects strong lights in the video and reduces exposure in these spots to enhance the overall quality of the image.
Mirror	When the function is turned on, images will be displayed with the left and right side reversed.
Flip	When this function is turned on, images can be flipped over.

Step 5 Configure the exposure parameters.

Figure 3-21 Exposure

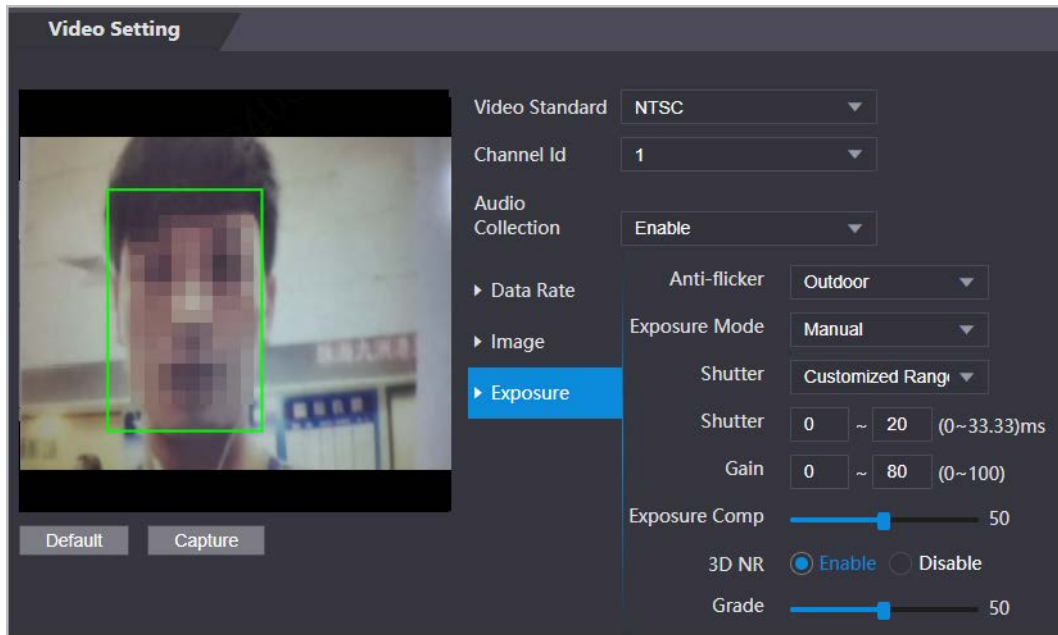


Table 3-13 Exposure parameter description

Parameter	Description
Anti-flicker	Set anti-flicker to reduce flicker and decrease or reduce uneven colors or exposure. • 50Hz: When the mains power supply is 50 Hz, the exposure is automatically adjusted to prevent the appearance of horizontal lines. • 60Hz: When the mains power supply is 60 Hz, the exposure is automatically adjusted to reduce the appearance of horizontal lines. • Outdoor: When Outdoor is selected, the exposure mode can be switched.
Exposure Mode	You can set the exposure to adjust image brightness. • Auto: The Access Controller automatically adjusts the brightness of images. • Shutter Priority: The Access Terminal will adjust image brightness according to shutter exposure range. If the image brightness is not enough and the shutter value has reached its upper or lower limit, the Access Controller will adjust the gain value automatically for ideal brightness level. • Manual: You can configure gain and shutter value manually to adjust image brightness.  ◇ When you select Outdoor from the Anti-flicker list, you can select Shutter Priority as the exposure mode. ◇ Exposure mode might differ depending on different models of Access Controller.

Parameter	Description
Shutter	Shutter is a component that allows light to pass for a determined period. The higher the shutter speed, the shorter the exposure time, and the darker the image.
Gain	When the gain value range is set, video quality will be improved.
Exposure Compensation	You can make a photo brighter or darker by adjusting exposure compensation value.
3D NR	When 3D Noise Reduction (RD) is turned on, video noise can be reduced to ensure high definition videos. You can set its grade when this function is turned on.
Grade	

3.8.1.2 Configuring Channel 2

Step 1 Select **Video Setting** > **Video Setting**.

Step 2 Select 2 from the **Channel No.**

Step 3 Configure the video status.



We recommend you turn on the WDR function when the face is in back-lighting.

Figure 3-22 Image

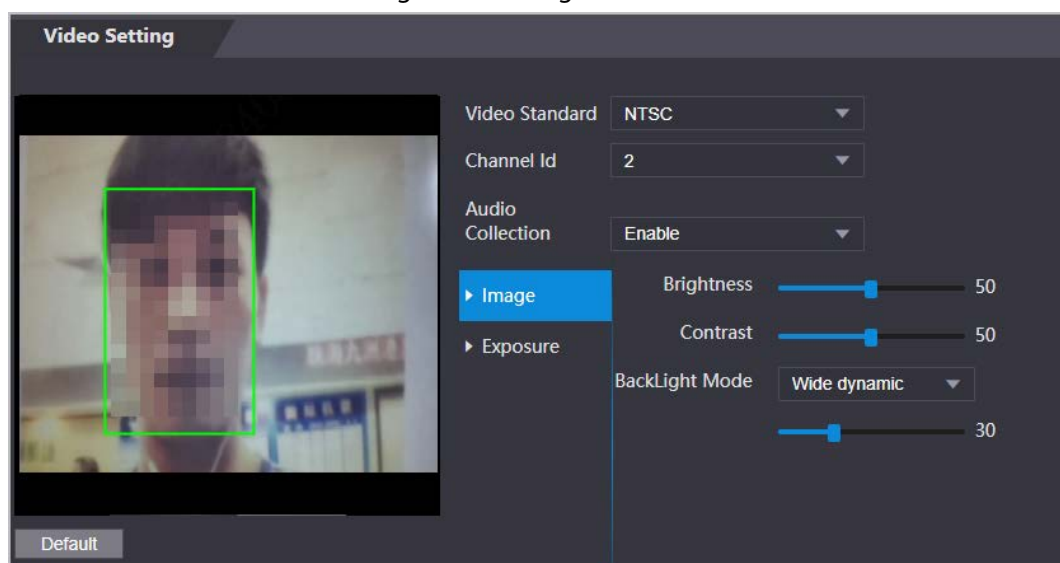


Table 3-14 Image description

Parameter	Description
Brightness	Brightness is the relative lightness or darkness of a particular color. The larger the value is, the brighter the image will be.
Contrast	Contrast is the difference in the luminance or color that makes an object distinguishable. The larger the contrast value is, the greater the color contrast will be.

Parameter	Description
Backlight Mode	• Close: Back-light compensation is turned off. • Backlight: Black-light compensation automatically brings more light to darker areas of an image when bright light shining from behind obscures it. • Wide dynamic: The system dims bright areas and compensates for dark areas to ensure to create a balance to improve the overall image quality. • Inhibition: Highlight compensation (HLC) is a technology used in CCTV/IP security cameras to deal with images that are exposed to lights like headlights or spotlights. The image sensor of the camera detects strong lights in the video and reduce exposure in these spots to enhance the overall quality of the image.

Step 4 Configure the exposure parameters.

Figure 3-23 Exposure parameter

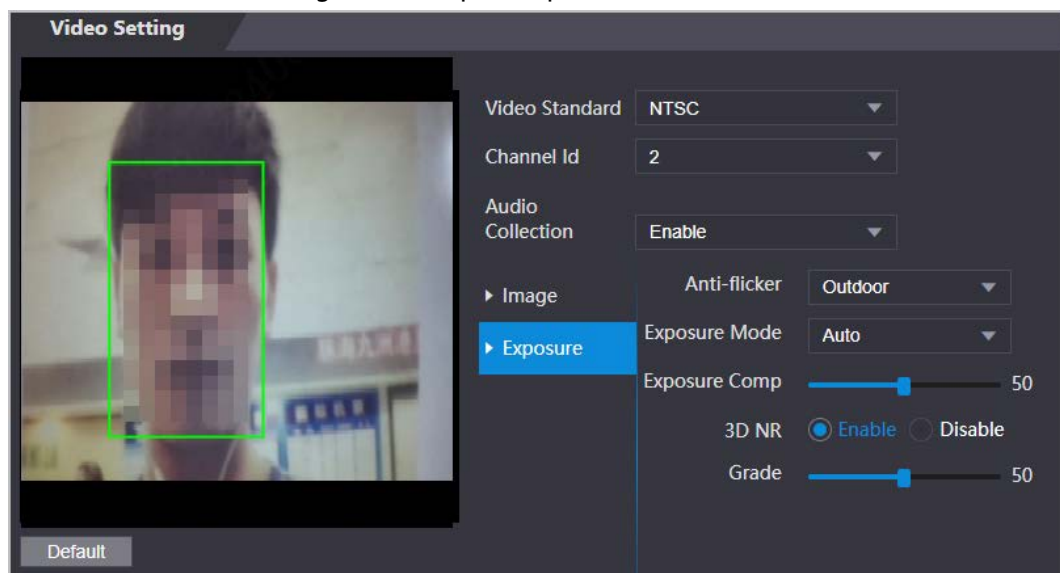


Table 3-15 Exposure parameter description

Parameter	Description
Anti-flicker	Set anti-flicker to reduce flicker and decrease or eliminate uneven colors or exposure. • 50Hz: When the mains power supply is 50 Hz, the exposure is automatically adjusted to prevent the appearance of horizontal lines. • 60 Hz: When the mains power supply is 60 Hz, the exposure is automatically adjusted to reduce the appearance of horizontal lines. • Outdoor: When Outdoor is selected, the exposure mode can be switched.

Parameter	Description
Exposure Mode	You can set the exposure to adjust image brightness. • Auto: The Access Controller automatically adjusts the brightness of images. • Shutter Priority: The Access Terminal will adjust image brightness according to shutter exposure range. If the image brightness is not enough and the shutter value has reached its upper or lower limit, the Access Controller will adjust the gain value automatically for ideal brightness level. • Manual: You can configure gain and shutter value manually to adjust image brightness.  ◇ When you select Outdoor from the Anti-flicker list, you can select Shutter Priority as the exposure mode. ◇ Exposure model might differ depending on different models of Access Controller.
Shutter	Shutter is a device that allows light to pass for a determined period. The higher the shutter speed, the shorter the exposure time, and the darker the image.
Gain	When the gain value range is set, video quality will be improved.
Exposure Compensation	You can make a photo brighter or darker by adjusting exposure compensation value.
3D NR	When 3D Noise Reduction (RD) is turned on, video noise can be reduced to ensure high definition videos. You can set its grade when this function is turned on.
Grade	

3.8.2 Setting Volume

You can adjust the volume of the speaker.


- Step 1 Log in to the webpage.
- Step 2 Select **Video Setting** > **Volume Setting**.
- Step 3 Drag the slider to adjust the volume.
- Step 4 Click **OK**.

3.9 Configuring Face Detection

You can configure human face related parameters on this interface to increase the accuracy of the face recognition.

- Step 1 Log in to the webpage.
- Step 2 Select **Face Detect**.

Figure 3-24 Face detect

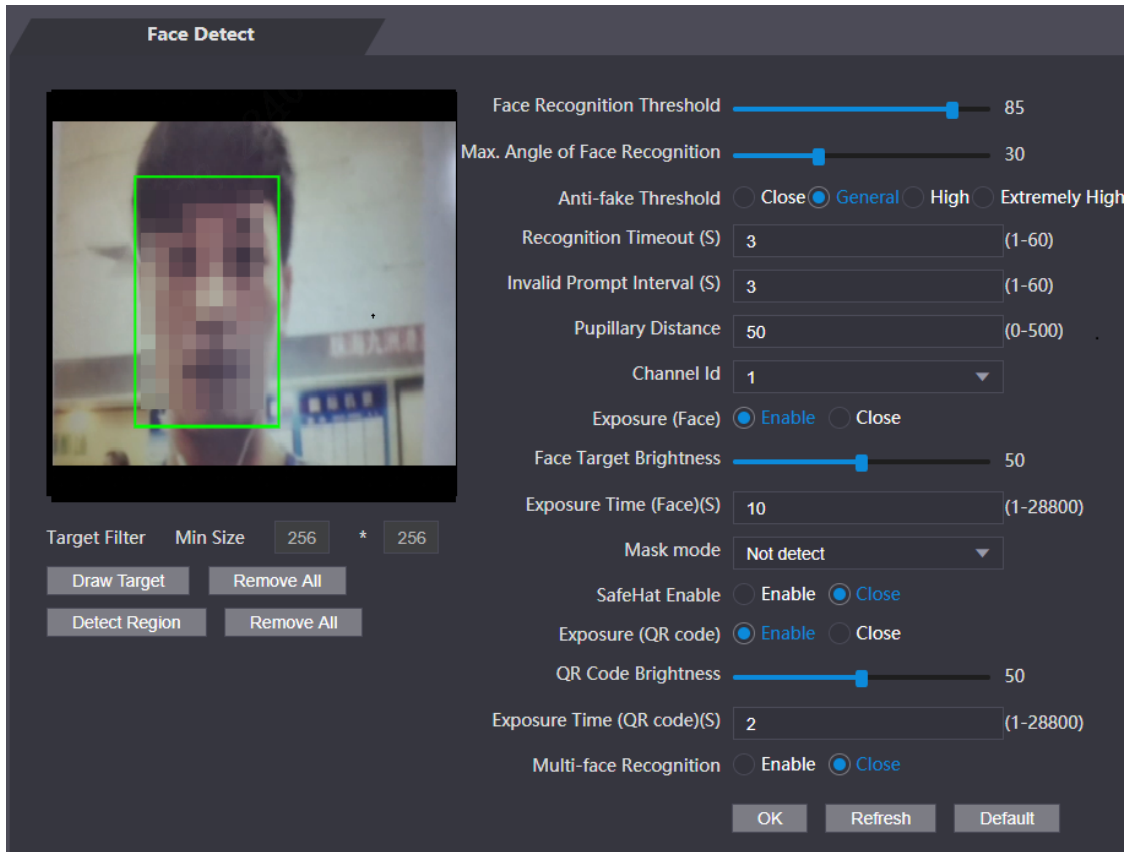

Step 3 Configure the parameters.

Table 3-16 Description of face detection parameters

Parameter	Description
Face Threshold	Adjust the face recognition accuracy. Higher threshold means higher accuracy.
Max. Angle of Face	Set the maximum face pose angle for face detection. Larger value means larger face angle range. If the face pose angle is out of the defined range, the face detection box will not appear.
Anti-fake Threshold	Avoid false face recognition by using a photo, video, mask or a different substitute for an authorized person's face. - Close: Turns off this function. - General: Normal level of anti-spoofing detection means higher door access rate for people with face masks. - High: Higher level of anti-spoofing detection means higher accuracy and security. - Extremely High: Extremely high level of anti-spoofing detection means extremely high accuracy and security.
Recognition Timeout (S)	If a person with access permission has their face successfully recognized, the Access Controller will prompt face recognition success. You can enter the prompt interval time.

Parameter	Description
Invalid Face Prompt Interval (S)	If a person without access permission attempts to unlock the door for several times in the defined interval, the Access Controller will prompt face recognition failure. You can enter the prompt interval time.
Pupillary Distance	Face images require desired pixels between the eyes (called pupillary distance) for successful recognition. The default pixel is 45. The pixel changes according to the face size and the distance between faces and the lens. If an adult is 1.5 meters away from the lens, the pupillary distance can be 50 px-70 px.
Channel Id	1 is for the white light camera and 2 is for the IR light camera.
Exposure (Face)	After face exposure is enabled, human faces will be clearer when the Access Controller is installed outdoors.
Face Target Brightness	The default value is 50. Adjust the brightness as needed.
Exposure Time	After a face is detected, the Access Controller will give out light to illuminate the face, and the Access Controller will not give out light again until the interval you set has passed.
Mask Mode	• No detect: Mask is not detected during face recognition. • Mask reminder: Mask is detected during face recognition. If the person does not wear a mask, the system will give them a reminder to wear masks, and access is allowed. • Mask intercept: Mask is detected during face recognition. If a person is not wearing a mask, the system will give them a reminder to wear masks, and access is denied.
Exposure (QR code)	When the Access Controller is installed outdoors, the QR code will be clearer based on the defined QR code brightness when you scan it.
QR code Brightness	
Exposure Time (QR code) (S)	After a QR code is scanned, the Access Controller will give out light to illuminate the QR code, and the Access Controller will not give out light again until the defined exposure time has passed.
Multi-face Recognition	Supports detecting 4 face images at the same time, and the unlock combinations mode become invalid. The door is unlocked after any one of them gain access.

Step 4 Draw the face detection area.

1. Click **Detect Region**,
2. Right-click to draw the detection area, and then release the left button of the mouse to complete drawing.
The face in the defined area will be detected.

Step 5 Draw the target size.

- 1) Click **Draw target**
- 2) Right-click to draw the face recognition box to define the minimum size of detected face.

Only when the size of the face is larger than the defined size, the face can be detected by the Access Controller.

Step 6 Click **OK**.

3.10 Configuring Network

3.10.1 Configuring TCP/IP

You need to configure IP address of Access Controller to make sure that it can communicate with other devices.

Step 1 Select **Network Setting** > **TCP/IP**.

Step 2 Configure parameters.

Figure 3-25 TCP/IP

The screenshot shows a configuration window titled "TCP/IP". It has several input fields and radio buttons. "IP Version" is a dropdown menu currently showing "IPv4". "MAC Address" is a text field. "Mode" has two radio buttons: "Static" (which is selected) and "DHCP". Below "Mode" are three text fields for "IP Address", "Subnet Mask", and "Default Gateway". There are also two text fields for "Preferred DNS Server" (containing "8 . 8 . 8 . 8") and "Alternate DNS Server" (containing "8 . 8 . 4 . 4"). At the bottom right, there are three buttons: "OK", "Refresh", and "Default".

Table 3-17 Description of TCP/IP

Parameter	Description
IP Version	IPv4
MAC Address	MAC address of the Access Controller.
Mode	• Static: Manually enter IP address, subnet mask, and gateway. • DHCP: It stands for Dynamic Host Configuration Protocol. When DHCP is turned on, the Access Controller will automatically be assigned with IP address, subnet mask, and gateway.
IP Address	If you select static mode, configure the IP address, subnet mask and gateway.
Subnet Mask	

Parameter	Description
Default Gateway	 IP address and gateway must be on the same network segment.
Preferred DNS	Set IP address of the preferred DNS server.
Alternate DNS	Set IP address of the alternate DNS server.

Step 3 Click **OK**.


3.10.2 Configuring Port

You can limit access to the Access Controller at the same through web, desktop client and phone.

Step 1 Select **Network Setting > Port**.

Step 2 Configure port numbers.

Figure 3-26 Configure ports

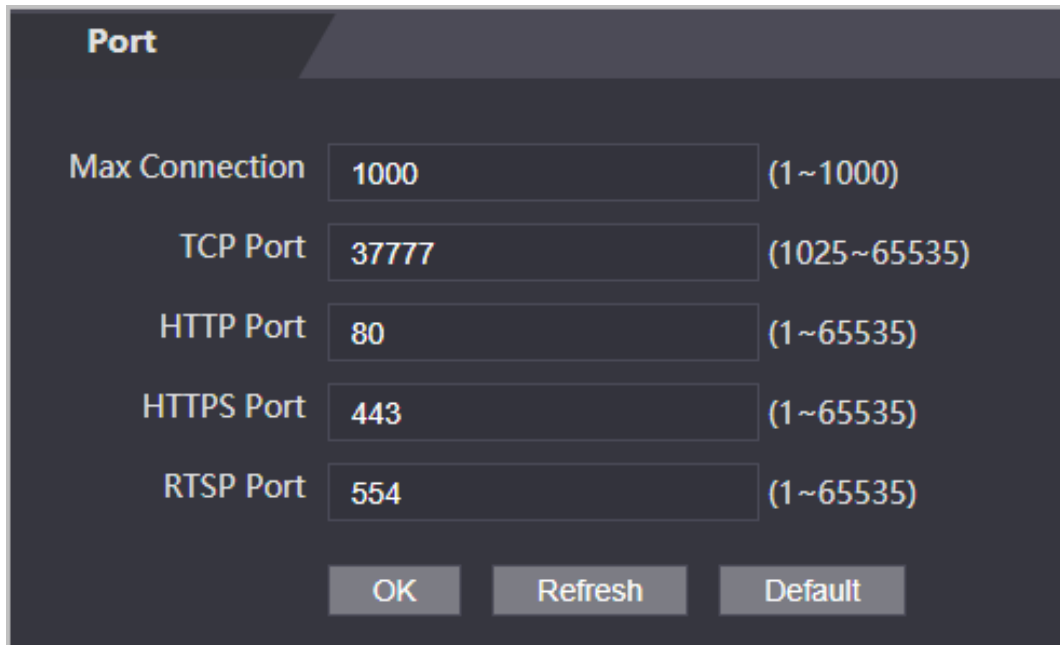


Except **Max Connection** and **RTSP Port**, you need to restart the Access Controller to make the configurations effective after you change other parameters.

Table 3-18 Description of ports

Parameter	Description
Max Connection	You can set the maximum number of clients (such as web, desktop client and phone) that can access the Access Controller at the same time.
TCP Port	Default value is 3777.
HTTP Port	Default value is 80. If you want to change the port number, add the new port number after the IP address when you log in to the webpage.
HTTPS Port	Default value is 443.
RTSP Port	Default value is 554.

Step 3 Click **OK**.

3.10.3 Configuring Automatic Registration

The Access Controller reports its address to the designated server so that you can get access to the Access Controller through the management platform.

Step 1 On the home page, select **Network Setting > Register**.

Step 2 Enable the automatic registration function and configure the parameters.

Figure 3-27 Register

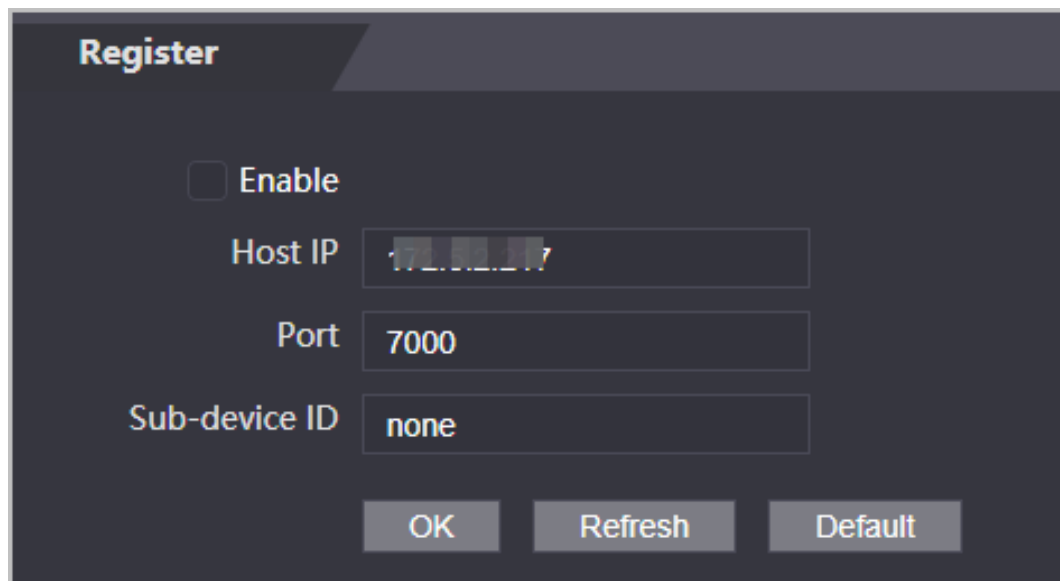


Table 3-19 Automatic registration description

Parameter	Description
Host IP	The IP address or the domain name of the server.
Port	The port of the server used for automatic registration.
Sub-Device ID	Enter the sub-device ID (user defined).  When you add the Access Controller to the management platform, the sub-device ID on the management platform must conform to the defined sub-device ID on the Access Controller.

Step 3 Click **Apply**.

3.10.4 Configuring Cloud Service


The cloud service provides a NAT penetration service. Users can manage multiple devices through DMSS. You do not have to apply for dynamic domain name, configuring port mapping or deploying server.

Procedure

Step 1 On the home page, select **Network Setting > Cloud Service**.

Step 2 Turn on the cloud service function.

Figure 3-28 Cloud service

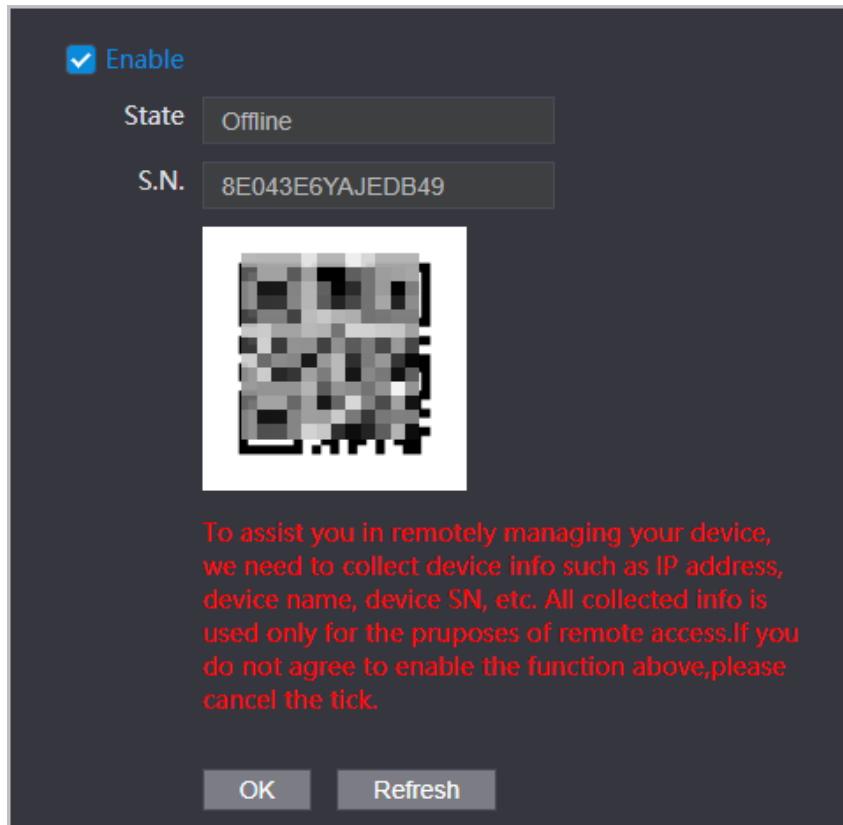

The interface shows a dark-themed window for cloud service configuration. At the top left, there is a checked checkbox labeled 'Enable'. Below it, the 'State' is set to 'Offline' and the 'S.N.' is '8E043E6YAJEDB49'. A QR code is displayed in the center. Below the QR code, a red text block explains that device information (IP, name, SN) is collected for remote management and that users should cancel the 'Enable' tick if they do not agree. At the bottom, there are 'OK' and 'Refresh' buttons.

☒ Enable

State Offline

S.N. 8E043E6YAJEDB49

To assist you in remotely managing your device, we need to collect device info such as IP address, device name, device SN, etc. All collected info is used only for the purposes of remote access. If you do not agree to enable the function above, please cancel the tick.

OK Refresh

Step 3 Click **OK**.

Related Operations


Download DMSS and sign up, you can scan the QR code through DMSS to add the Access Controller to it.

3.10.5 Configuring Serial Port

Step 1 On the home page, select **Network Setting** > **Wiegand serial port setting**.

Step 2 Select a port type.

Figure 3-29 Serial port

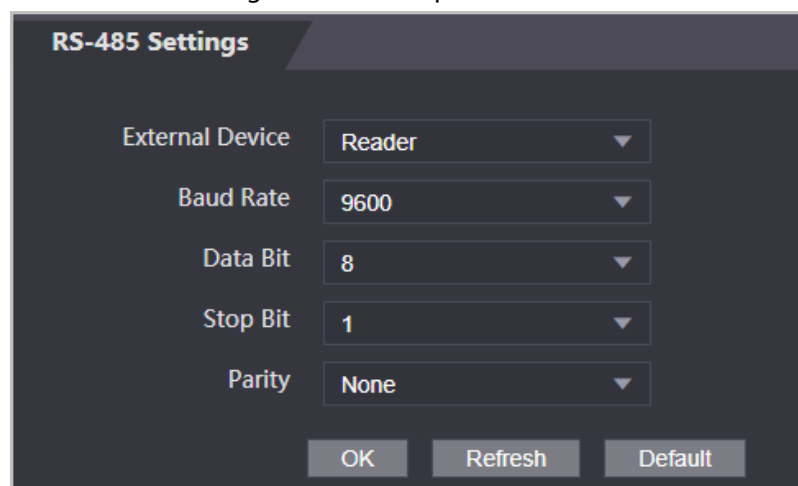

The 'RS-485 Settings' window has a dark background. It contains five dropdown menus: 'External Device' (set to 'Reader'), 'Baud Rate' (set to '9600'), 'Data Bit' (set to '8'), 'Stop Bit' (set to '1'), and 'Parity' (set to 'None'). At the bottom, there are three buttons: 'OK', 'Refresh', and 'Default'.

RS-485 Settings

External Device Reader

Baud Rate 9600

Data Bit 8

Stop Bit 1

Parity None

OK Refresh Default

- Select **Reader** when the Access Controller connects to a card reader.
- Select **Controller** when the Access Controller functions as a card reader, and the Access

Controller will send data to the Access Controller to control access.

Output Data type:

- ◇ Card: Outputs data based on card number when users swipe card to unlock door; outputs data based on user's first card number when they use other unlock methods.
- ◇ No.: Outputs data based on the user ID.
- Select **Reader (OSDP)** when the Access Controller is connected to a card reader based on OSDP protocol.
- Security Module: When a security module is connected, the exit button, lock will be not effective.

3.10.6 Configuring Wiegand

The Access Controller allows for both Wiegand input and Output mode.

Step 1 On the **Main Menu**, select **Connection > Wiegand**.

Step 2 Select a Wiegand.

Figure 3-30 Wiegand output

Wiegand ☐ Wiegand Input ☒ Wiegand Output

Wiegand Output Type: Wiegand34

Pulse Width(us): 200 (20 ~ 200)

Pulse Interval(us): 1000 (200 ~ 5000)

Pulse width is a multiple of 10, and pulse interval is a multiple of pulse width

Output Data Type: ☒ Card No. ☐ No.

OK Refresh Default

- Select **Wiegand Input** when you connect an external card reader to the Access Controller.
- Select **Wiegand Output** when the Access Controller functions as a card reader, and you need to connect it to a controller or another access terminal.

Table 3-20 Description of Wiegand output

Parameter	Description
Wiegand Output Type	Select a Wiegand format to read card numbers or ID numbers. ● Wiegand26: Reads three bytes or six digits. ● Wiegand34: Reads four bytes or eight digits. ● Wiegand66: Reads eight bytes or sixteen digits.
Pulse Width	Enter the pulse width and pulse interval of Wiegand output.
Pulse Interval	
Output Data Type	Select the type of output data. ● No.: Outputs data based on user ID. ● Card No.: Outputs data based on user's first card number.

3.11 Safety Management

3.11.1 Configuring IP Authority

- Step 1 Log in to the webpage.
- Step 2 Click **Safety Mgmt.** > **IP Authority**.
- Step 3 Select a cybersecurity mode from the **Type** list.
- **Network Access:** Set allowlist and blocklist to control access to the access controller.
 - **Prohibit PING:** Enable **PING prohibited** function, and the access controller will not respond to the Ping request.
 - **Anti Half Connection:** Enable **Anti Half Connection** function, and the access controller can still function properly under half connection attack.

3.11.1.1 Network Access

- Step 1 Select **Network Access** from the **Type** list.
- Step 2 Select the **Enable** check box.

Figure 3-31 Network access

The screenshot shows the 'IP Authority' configuration page. The 'Type' dropdown is set to 'Network Access'. The 'Enable' checkbox is checked. The 'Mode' section has two radio buttons: 'Allow List' (selected) and 'Block List'. Below the mode selection, there are two tabs: 'Allow List' (active) and 'Block List'. A table with the following headers is visible: 'IP Address', 'MAC Address', 'Port', 'Modify', and 'Delete'. The table body is empty, displaying 'No data...'. At the bottom, there is a red warning message: 'Only the listed IP addresses/MAC are allowed to visit corresponding ports of the device.' Below the message are three buttons: 'Add', 'Default', and 'Refresh'. An 'OK' button is also present at the bottom right.

- Step 3 Select **Allow List** or **Block List**.
- Step 4 Click **Add**.

Figure 3-32 Add IP

Add

Type

IP Address

IP Version

IPv4

IPv4

1.0.0.1

All Ports

☐

Device Start Port

1

Device End Port

1

Save

Cancel

Step 5 Configure parameters.

Table 3-21 Description of adding IP parameters

Parameter	Description
Type	Select the address type from the Type list.
IP Version	IPv4 by default.
All Ports	Select All Ports check box, and your settings will apply to all ports.
Device Start Port	If you clear All Ports check box, set the device start port and device end port.
Device End Port	

Step 6 Click **Save**, and the **IP Authority** interface is displayed.

Step 7 Click **OK**.

- Click  to edit the allowlist or blocklist.
- Click  to delete the allowlist or blocklist

3.11.1.2 Prohibit PING

Step 1 Select **Prohibit PING** from the **Type** list.

Step 2 Select the **Enable** check box.

Figure 3-33 Prohibit PING

The screenshot shows a configuration window titled "IP Authority". It has a "Type" dropdown menu set to "Prohibit PING". Below it, the "Enable" checkbox is checked with a blue checkmark. At the bottom, there are three buttons: "Default", "Refresh", and "OK".

Step 3 Click **OK**.

3.11.1.3 Anti Half Connection

Step 1 Select the **Anti Half Connection** from the **Type** list.

Step 2 Select the **Enable** check box.

Step 3 Click **OK**.

3.11.2 Configuring System

Step 1 Log in to the web interface.

Step 2 Select **Safety Mgmt.** > **System Service**.

Step 3 Enable or disable the system services as needed.

Figure 3-34 System service

The screenshot shows a configuration window titled "System Service". It contains several checkboxes for enabling or disabling services: SSH (checked), PWD Reset Enable (checked), CGI (checked), ONVIF (checked), Audio and Video Transmission Encryption (unchecked), RTSP Over TLS (unchecked), and HTTPS (unchecked). Below these, there is a warning message: "Warning:Disabling HTTPS may be at risk". There is also a checkbox for "Compatible with TLSv1.1 and earlier versions" which is unchecked. The "Emergency Maintenance" checkbox is checked. Under "Auth Method", the "Security Mode (Recommended)" radio button is selected, and the "Compatible Mode" radio button is unselected. The "Password Expires in" dropdown menu is set to "Never". At the bottom, there are buttons for "Create Server Certificate", "Download Root Certificate", "Details", "Delete", "OK", "Refresh", and "Default".

Table 3-22 Description of system service

Parameter	Description
SSH	Secure Shell (SSH) is a cryptographic network protocol for operating network services securely over an unsecured network. When SSH is enabled, SSH provides cryptographic service for the data transmission.
PWD Reset Enable	If enabled, you can reset the password. This function is enabled by default.
CGI	Common Gateway Interface (CGI) offers a standard protocol for web servers to execute programs similarly to console applications running on a server that dynamically generates web pages. When CGI is enabled, CGI commands can be used. The CGI is enabled by default.
ONVIF	Enable other devices to pull the video stream of the VTO via the ONVIF protocol.
Audio and Video Transmission Encryption	If this function is enabled, audio and video transmission is automatically encrypted.
RTSP Over TLS	If this function is enabled, audio and video transmission is encrypted via THE RTSP protocol.
HTTPS	Hypertext Transfer Protocol Secure (HTTPS) is a protocol for secure communication over a computer network. When HTTPS is enabled, HTTPS will be used to access CGI commands; otherwise HTTP will be used.
Compatible with TLSv1.1 and earlier versions	Enable this function if your browser is using TLS V1.1 or earlier versions.
Emergency Maintenance	Enable it for faults analysis and maintenance.
Auth Method	We recommend you select the security mode .

Step 4 Click **OK**.

3.11.2.1 Creating Server Certificate

Configure HTTPS server to improve your website security with server certificate.




- If you use HTTPS for the first time or the IP address of the Access Controller is changed, create a server certificate and install a root certificate.
- If you use another computer to log in to the webpage of the Access Controller, you need to download and install the root certificate again on the new computer or copy the root certificate to the it.

Step 1 On the **System Service** page, click **Create Server Certificate**.

Step 2 Enter information and click **OK**.

The Access Controller will restart.

Figure 3-35 Create Server Certificate

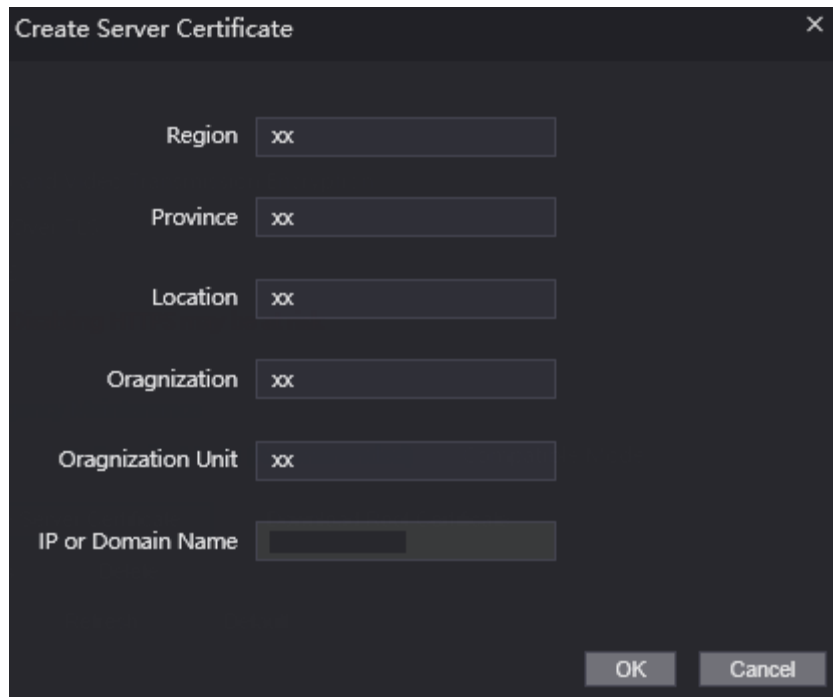


A dark-themed dialog box titled "Create Server Certificate" with a close button (X) in the top right corner. It contains six input fields, each with a label and a text box containing "xx": "Region", "Province", "Location", "Oragnization" (note the typo), "Oragnization Unit" (note the typo), and "IP or Domain Name". At the bottom right are "OK" and "Cancel" buttons.

3.11.2.2 Downloading Root Certificate


- Step 1 On the **System Service** page, click **Download Root Certificate**.
- Step 2 Double-click the file that you have downloaded, and then click **Open**.

Figure 3-36 File download

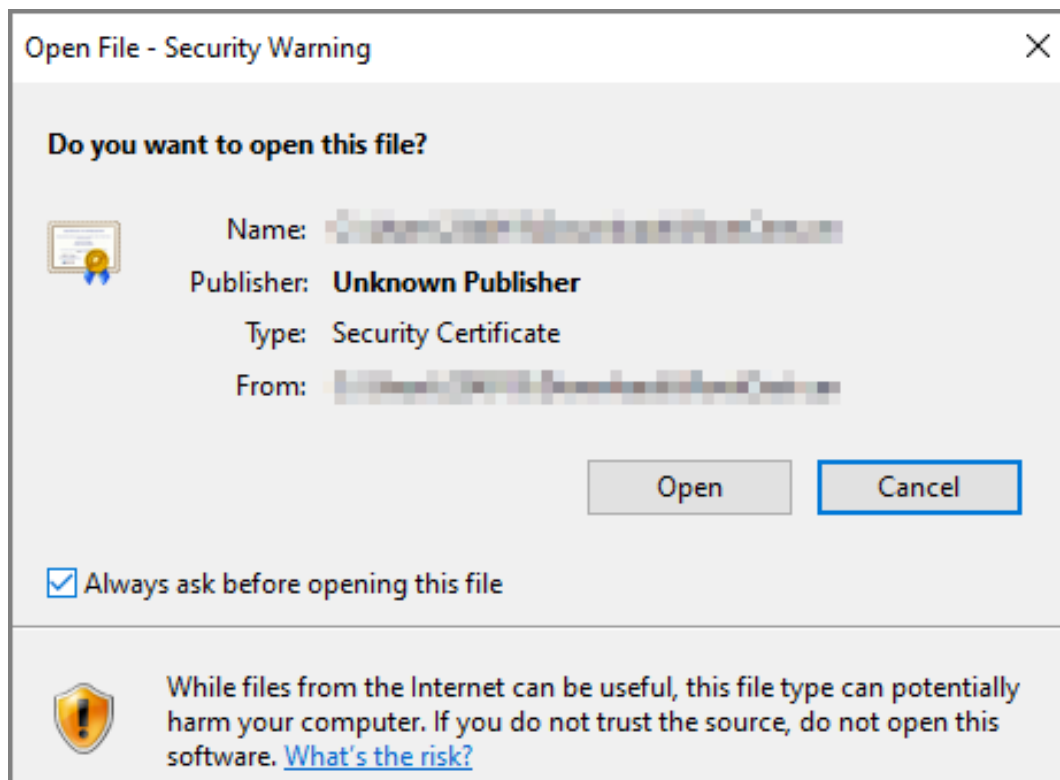


- Step 3 Click **Install Certificate**.

Figure 3-37 Certificate information

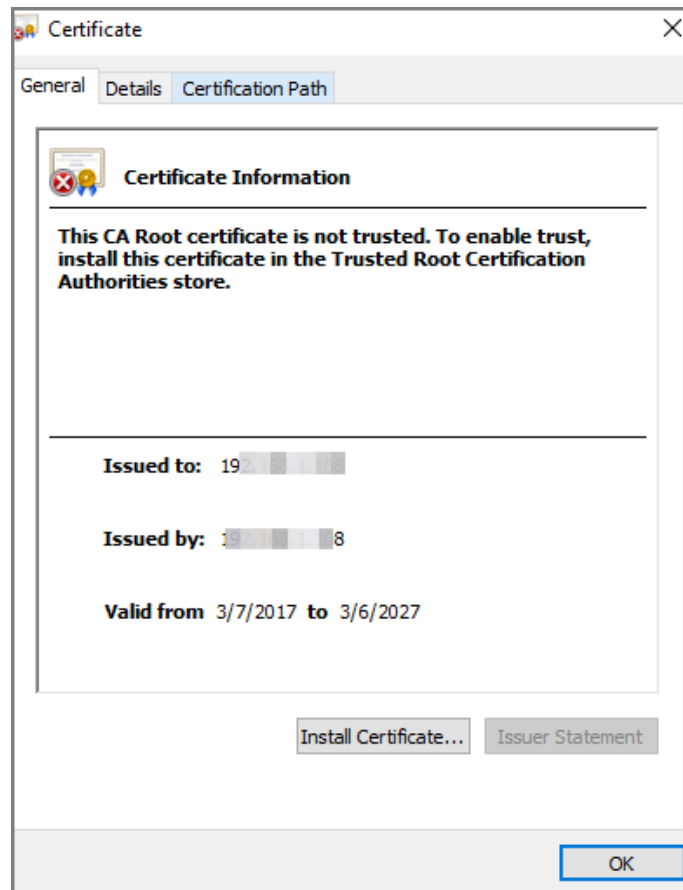

Step 4 Select **Current User** or **Local Machine**, and then click **Next**.

Figure 3-38 Certificate import wizard (1)

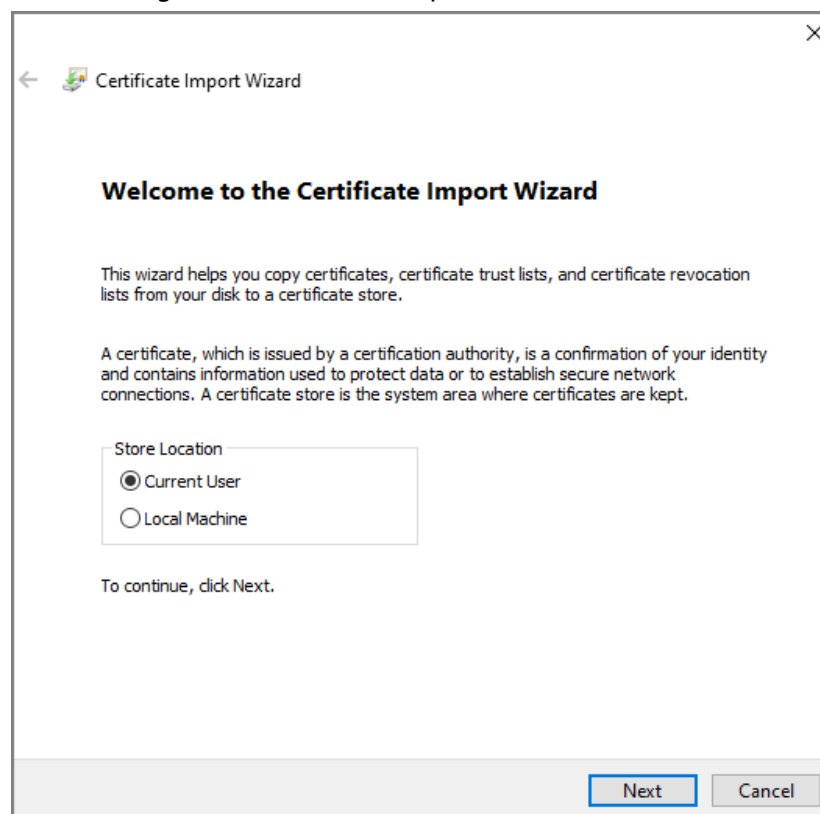


Step 5 Select the appropriate storage location.

1) Select **Place all certificates in the following store**.


- 2) Click **Browse** to import the certificate to the **Trusted Root Certification Authorities** store, and then click **Next**.

Figure 3-39 Certificate Import Wizard (2)

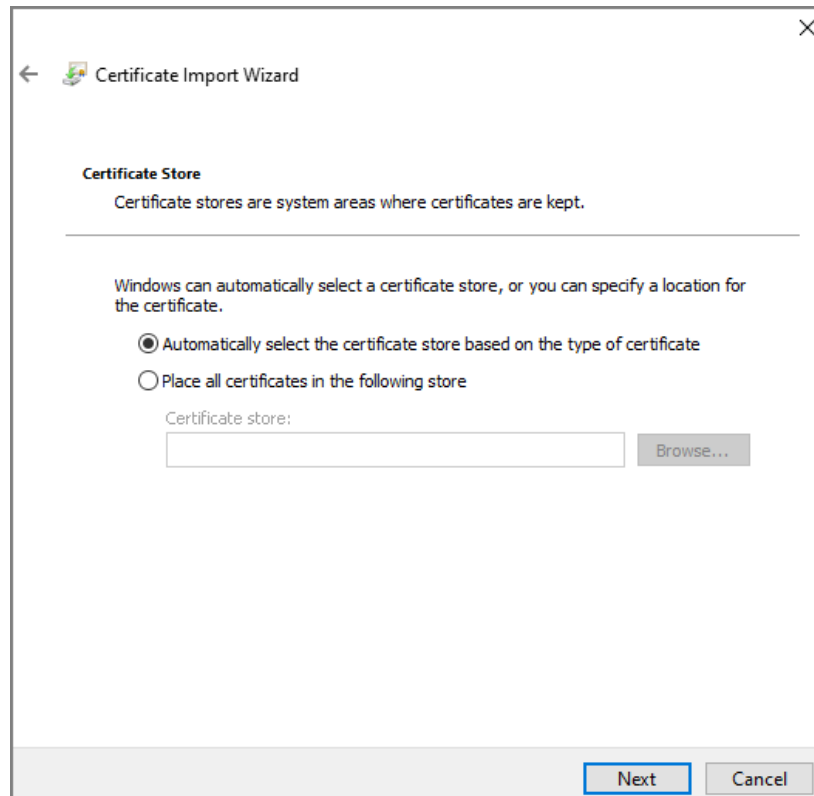

Step 6 Click **Finish**.

Figure 3-40 Certificate import wizard (3)

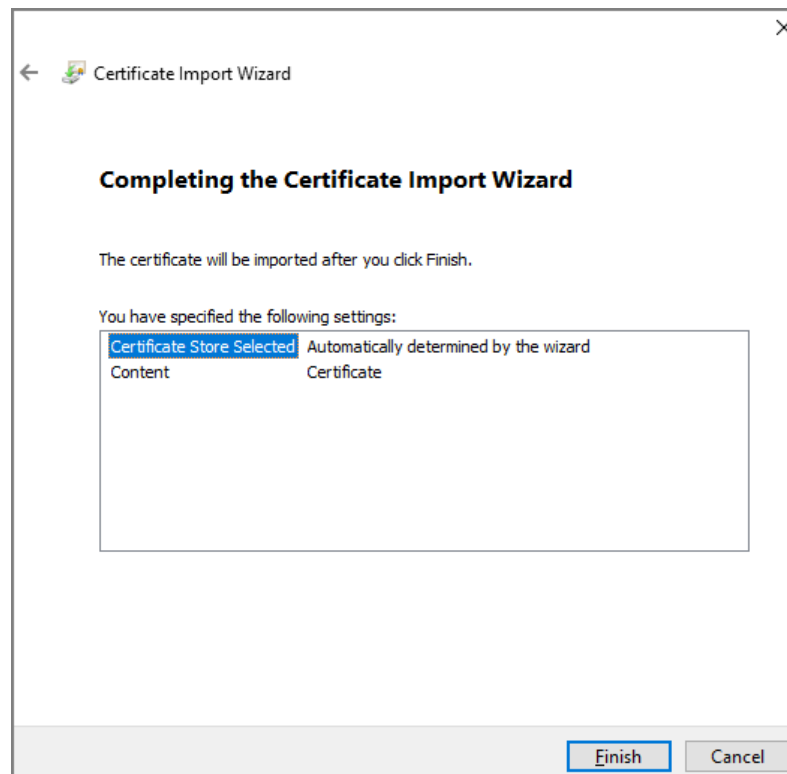

3.12 User Management

You can add or delete users, change users' passwords, and enter an email address for resetting the password when you forget your password.

3.12.1 Adding Users

You can add new users and then they can log in to the webpage of the Access Controller.

Procedure

Step 1 On the home page, select **User Mgmt.** > **User Mgmt.**

Step 2 Click **Add**, and enter the user information.



- The username cannot be the same with existing account. The username consists of up to 31 characters and only allows for numbers, letters, underscores, midlines, dots, or @.
- The password must consist of 8 to 32 non-blank characters and contain at least two types of the following characters: Upper case, lower case, numbers, and special characters (excluding ' " ; : &).

Set a high-security password by following the password strength prompt.

Figure 3-41 Add user

The screenshot shows a dark-themed dialog box titled 'Add' with a close button (X) in the top right corner. Inside the dialog, there are four input fields: 'Username', 'Password', 'Confirm Password', and 'Remark'. The 'Password' field has a strength indicator below it with three buttons: 'Low', 'Medium', and 'High'. At the bottom right of the dialog are two buttons: 'OK' and 'Cancel'.

Step 3 Click **OK**.



Only admin account can change password and admin account cannot be deleted.

3.12.2 Adding ONVIF Users


Open Network Video Interface Forum (ONVIF), a global and open industry forum that is established for the development of a global open standard for the interface of physical IP-based security products, which allows the compatibility from different manufactures. ONVIF users have their

identities verified through ONVIF protocol. The default ONVIF user is admin.

Procedure

- Step 1 On the home page, select **User Mgmt.** > **Onvif User**.
- Step 2 Click **Add** and then configure parameters.

Figure 3-42 Add ONVIF user

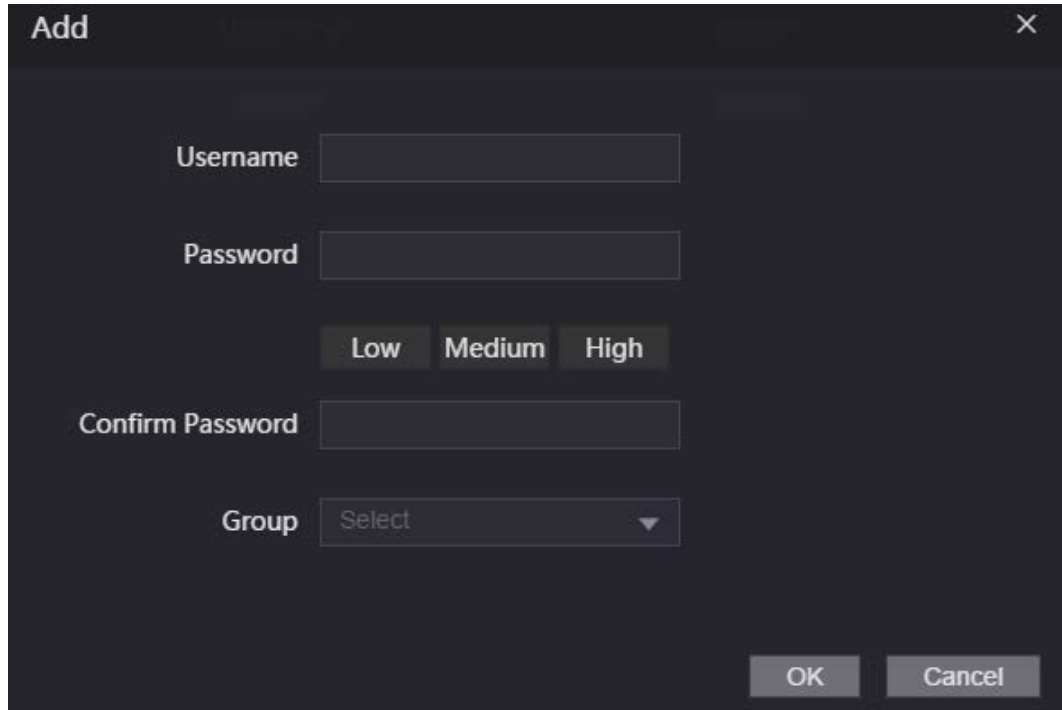

The screenshot shows a dark-themed dialog box titled "Add". It contains the following elements:

- Username:** A text input field.
- Password:** A text input field.
- Confirm Password:** A text input field.
- Group:** A dropdown menu with the text "Select" and a downward arrow.
- Buttons:** Three buttons labeled "Low", "Medium", and "High" are positioned between the Password and Confirm Password fields.
- Footer:** Two buttons labeled "OK" and "Cancel" are at the bottom right.

- Step 3 Click **OK**.

3.12.3 Viewing Online Users

You can view online users who currently log in to the webpage.
On the home page, select **Online User**.

3.13 Configuring Voice Prompts

Set voice prompts during identity verification.


- Step 1 On the home page, select **Audio Custom**.
- Step 2 Select a prompt message from the **Type** list
- Step 3 Click **Browse** to select an audio file, and then click **Upload**.

3.14 Maintenance

You can regularly restart the Access Controller during the idle time to improve its performance.

- Step 1 Log in to the webpage.
- Step 2 Select **Maintenance**.

Figure 3-43 Maintenance

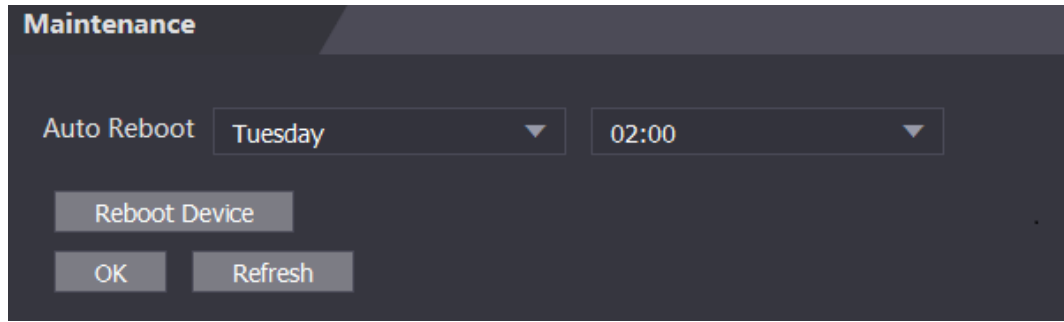

Step 3 Set the time, and then click **OK**.

Step 4 (Optional) Click **Reboot Device**, the Access Controller will restart immediately.

3.15 Configuration Management

When more than one Access Controller need the same configurations, you can configure parameters for them by importing or exporting configuration files.


3.15.1 Exporting/Importing Configuration Files

You can import or export the configuration file of the Access Controller. When you want to apply the same configurations to multiple devices, you can import the configuration file to them.

Step 1 Log in to the webpage.

Step 2 Select **Config Mgmt.** > **Config Mgmt.**.

Figure 3-44 Configuration management

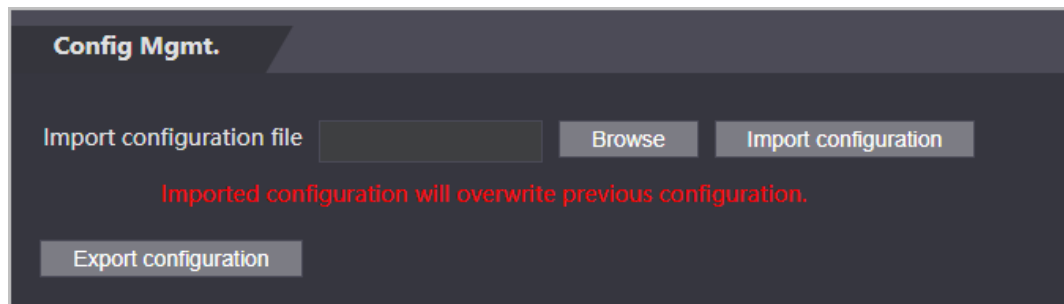

Step 3 Export or import configuration files.

- Export configuration file.
Click **Export Configuration** to download the file to the local.



IP will not be exported.

- Import configuration file.
 1. Click **Browse** to select the configuration file.
 2. Click **Import configuration**.



Configuration file can only be imported to the device with the same model.

3.15.2 Restoring Factory Defaults



Restoring the **Access Controller** to default configurations will cause data loss. Please be advised.

Step 1 Select **Config Mgmt. > Default**

Step 2 Restore factory defaults if necessary.

- **Restore Factory:** Resets configurations of the Access Controller and delete all data.
- **Restore Factory (Save user & log):** Resets configurations of the Access Controller and deletes all data except for user information and logs.

3.16 Upgrading System



- Use the correct update file. Make sure you get the correct update file from the technical support.
- Do not disconnect the power supply or network, or restart or shut down the Access Controller during the update.

3.16.1 File Update

Step 1 On the home page, select **Upgrade**.

Step 2 In the **File Upgrade** area, click **Browse**, and then upload the update file.



The upgrade file should be a .bin file.

Step 3 Click **Update**.

The Access Controller will restart after update completes.

3.16.2 Online Update

Step 1 On the home page, select **Upgrade**.

Step 2 In the **Online Upgrade** area, select an update method.

- Select **Auto Check**, the Access Controller will automatically check whether the its latest version is available.
- Select **Manual Check**, and you can immediately check whether the latest version is available.

Step 3 Update the Access Controller when the latest version is available.

3.17 Viewing Version Information

On the home page, select **Version Info**, and you can view version information, such as device model, serial number, hardware version, legal information and more.

3.18 Viewing Logs

View logs such as system logs, admin logs, and unlock records.

3.18.1 System Logs

View and search for system logs.

Step 1 Log in to the webpage.

Step 2 Select **System Log** > **System Log**.

Step 3 Select the time range and the log type, and then click **Query**.
Click **Backup** to download the system log.

3.18.2 Admin Logs

Search for admin logs by using admin ID.

Step 1 Log in to the webpage.

Step 2 Select **System Log** > **Admin Log**.

Step 3 Enter the admin ID, and then click **Query**.

3.18.3 Unlocking Logs

Search for unlock records and export them.

Step 1 Log in to the webpage.

Step 2 Select **System Log** > **Search Records**.

Step 3 Select the time range and the log type, and then click **Query**.
You can click **Export Data** to download the log.

3.18.4 Alarm Logs

View alarm logs.

On the home page, select **System Log** > **Alarm Log**.

4 Smart PSS Lite Configuration

This section introduces how to manage and configure the Access Controller through Smart PSS Lite. You can also configure time attendance rules on the platform, such as shifts, modes, schedules and more. For details, see the user's manual of Smart PSS Lite.

4.1 Installing and Logging In

Install and log in to Smart PSS Lite. For details, see the user manual of Smart PSS Lite.

- Step 1 Get the software package of the Smart PSS Lite from the technical support, and then install and run the software according to instructions.
- Step 2 Initialize Smart PSS Lite when you log in for the first time, including setting password and security questions.



Set the password is for the first-time use, and then set security questions to reset your password when you forgot it.

- Step 3 Enter your username and password to log in to Smart PSS Lite.

4.2 Adding Devices

You need to add the Access Controller to Smart PSS Lite. You can add them in batches or individually.

4.2.1 Adding Individually

You can add Access Controller individually by entering their IP addresses or domain names.

- Step 1 Log in to Smart PSS Lite.
- Step 2 Click **Device Manager** and click **Add**.
- Step 3 Enter the device information.

Figure 4-1 Device information

Table 4-1 Device parameters Description

Parameter	Description
Device Name	Enter a name of the Access Controller. We recommend you name it after its installation area.
Method to add	Select IP to add the Access Terminal by entering its IP Address.
IP	Enter IP address of the Access Controller.
Port	The port number is 37777 by default.
User Name/Password	Enter the username and password of the Access Terminal.

Step 4 Click **Add**.

The added Access Controller displays on the **Devices** page. You can click **Add and Continue** to add more Access Controllers.

4.2.2 Adding in Batches

We recommend you use the auto-search function when you add want to Access Controllers in batches. Make sure the Access Controllers you add must be on the same network segment.

Step 1 Log in to Smart PSS Lite.

Step 2 Click **Device Manager** and search for devices.

- Click **Auto Search**, to search for devices on the same LAN.
- Enter the network segment range, and then click **Search**.

Figure 4-2 Auto search

No.	IP	Device Type	MAC Address	Port	Initialization Status
1	10.34.30.30	DSS V8	2-8-8-8-8-8c	443	✓ Initialized

A device list will be displayed.



Select a device, and then click **Modify IP** to modify its IP address.

Step 3 Select the Access Controller that you want to add to Smart PSS Lite, and then click **Add**.

Step 4 Enter the username and the password of the Access Controller.
You can view the added Access Controller on the **Devices** page.



The Access Controller automatically logs in to Smart PSS Lite after being added. **Online** is displayed after successful login.

4.3 User Management

Add users, assign cards to them, and configure their access permissions.

4.3.1 Configuring Card Type

Set the card type before you assign cards to users. For example, if the assigned card is an ID card, set card type to ID card.

Step 1 Log in to Smart PSS Lite.

Step 2 Click **Access Solution > Personnel Manager > User**.

Step 3 On the **Card Issuing Type** and then select a card type.



Make sure that the card type is same to the actually assigned card; otherwise, the card number cannot be read.

Step 4 Click **OK**.

4.3.2 Adding Users

4.3.2.1 Adding Individually

You can add users individually.

Step 1 Log in to Smart PSS Lite.

Step 2 Click **Access Solution > Personnel Manger > User > Add**.

Step 3 Click **Basic Info** tab, and enter the basic information of the user, and then import the face image.

Figure 4-3 Add basic information

The screenshot shows the 'Add basic information' form in the Smart PSS Lite software. The form is divided into three tabs: 'Basic Info', 'Certification', and 'Permission configuration'. The 'Basic Info' tab is active. It contains the following fields and options:

- User ID: *
- Name: *
- Department: Default Company
- User Type: General
- Valid Time: 2022/6/9 0:00:00 to 2032/6/9 23:59:59 (3654 Days)
- Number of use: Limitless
- Take Snapshot Upload Picture button (Next)
- Image Size: 0 ~ 100KB

Below the 'Basic Info' section is the 'Details' section, which includes:

- Gender: Male (selected) / Female
- Title: Mr
- DOB: 1985/3/15
- Tel:
- Email:
- Mailing Address:
- Administrator: (toggle)
- ID Type: ID
- ID No.:
- Company:
- Occupation:
- Entry Time: 2022/6/8 20:18:31
- Resign Time: 2031/6/9 20:18:31
- Remark:

At the bottom of the form are three buttons: 'Continue', 'Finish', and 'Cancel'.

Step 4 Click the **Certification** tab to add certification information of the user.


- Configure password: The password must consist of 6–8 digits.
- Configure card: The card number can be read automatically or entered manually. To read the card number automatically, select a card reader, and then place the card on the card reader.

1. On the **Card** area, click  and select **Card issuer**, and then click **OK**.
2. Click **Add**, swipe a card on the card reader.
The card number is displayed.
3. Click **OK**.

After adding a card, you can set the card to main card or duress card, or replace the card with a new one, or delete the card.

- Configure fingerprint.
 1. On the **Fingerprint** area, click  and select **Fingerprint Scanner**, and then click **OK**.
 2. Click **Add Fingerprint**, press your finger on the scanner three times in a row.

Figure 4-4 Add password, card, and fingerprint

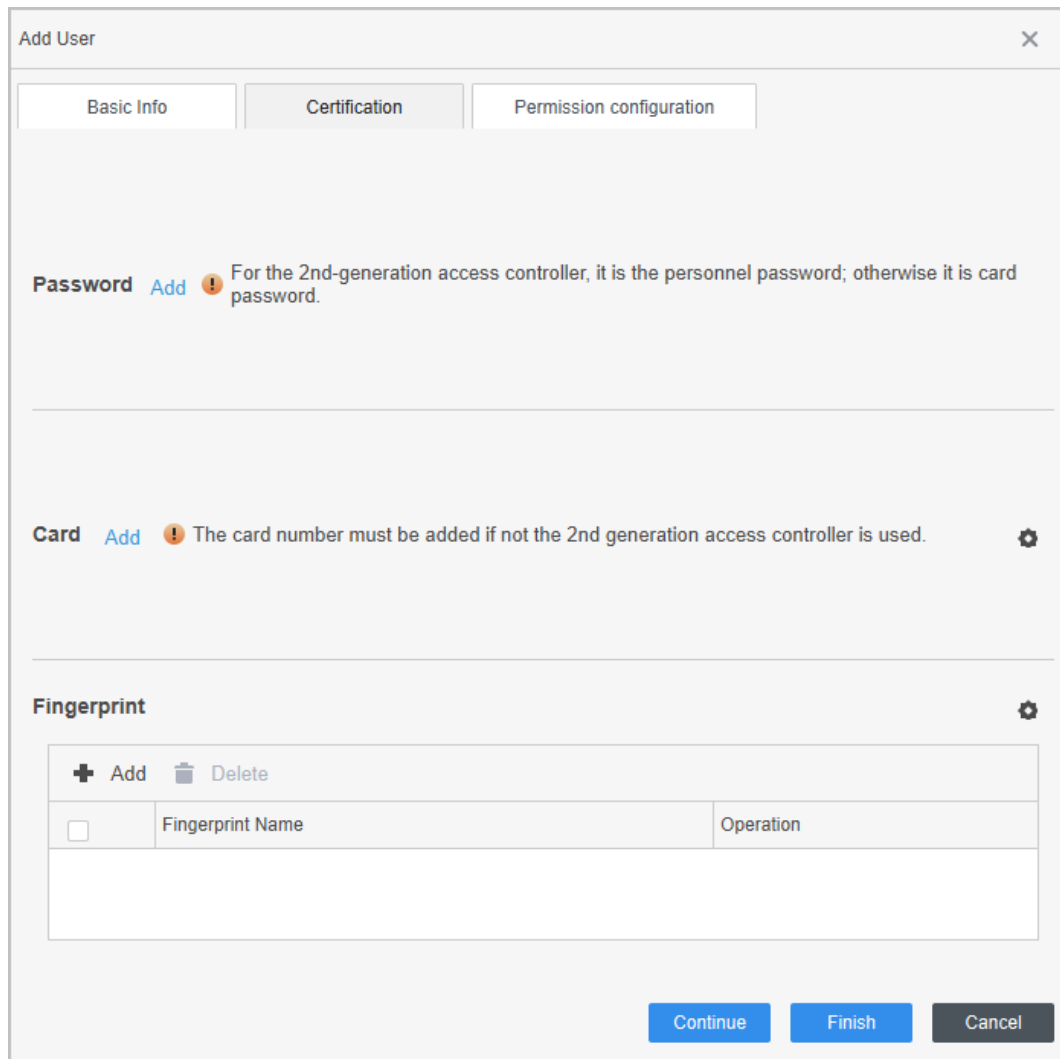

Add User

Basic Info Certification Permission configuration

Password Add ⚠ For the 2nd-generation access controller, it is the personnel password; otherwise it is card password.

Card Add ⚠ The card number must be added if not the 2nd generation access controller is used.

Fingerprint

+ Add 🗑 Delete

☐	Fingerprint Name	Operation

Continue Finish Cancel

Step 5 Configure permissions for the user. For details, see "4.3.3 Assigning Access Permission".

Step 6 Click **Finish**.

4.3.2.2 Adding in Batches

You can add users in batches.

Step 1 Log in to Smart PSS Lite.

Step 2 Click **Personnel Manger** > **User** > **Batch Add**.

Step 3 Select **Card issuer** from the **Device** list, and then configure the parameters.

Figure 4-5 Add users in batches

Device
Card issuer

Issue

Start No.:
* 1

Quantity:
* 30

Department:
Default Company

Effective Time:
2022/4/1 0:00:00

Expired Time:
2032/4/1 23:59:59

Issue Card

ID	Card No.
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	

OK

Cancel

Table 4-2 Add users in batches parameters

Parameter	Description
Start No.	The user ID starts with the number you defined.
Quantity	The number of users you want to add.
Department	Select the department that the user belongs to.
Effective Time/Expired Time	The users can unlock the door within the defined period.

Step 4 Click **Issue**.

The card number will be read automatically.

Step 5 Click **OK**.

Step 6 On the **User** page, click  to complete user information.

4.3.3 Assigning Access Permission

Create a permission group that is a collection of door access permissions, and then associate users with the group so that users can unlock corresponding doors.

Step 1 Log in to the Smart PSS Lite.


- Step 2 Click **Access Solution > Personnel Manger > Permission configuration.**
- Step 3 Click + .
- Step 4 Enter the group name, remarks (optional), and select a time template.
- Step 5 Select the access control device.
- Step 6 Click **OK.**

Figure 4-6 Create a permission group

The screenshot shows the 'Add Access Group' dialog box. It has a title bar with a close button. The main content area is divided into sections. The 'Basic Info' section contains two input fields: 'Group Name' (with the text 'Permission Group3') and 'Remark'. A red box labeled '1' highlights these two fields. Below this is a 'Time Template' section with a dropdown menu currently showing 'All Day Time Template'. A red box labeled '2' highlights this dropdown. The 'All Device' section contains a search bar and a list of devices. The list includes 'Default Group' and 'Door 1'. A red box labeled '3' highlights the 'All Device' section. At the bottom right, there are 'OK' and 'Cancel' buttons. A red box highlights the 'OK' button.

- Step 7 Click of the permission group you added.
- Step 8 Select users to associate them with the permission group.

Figure 4-7 Add users to a permission group

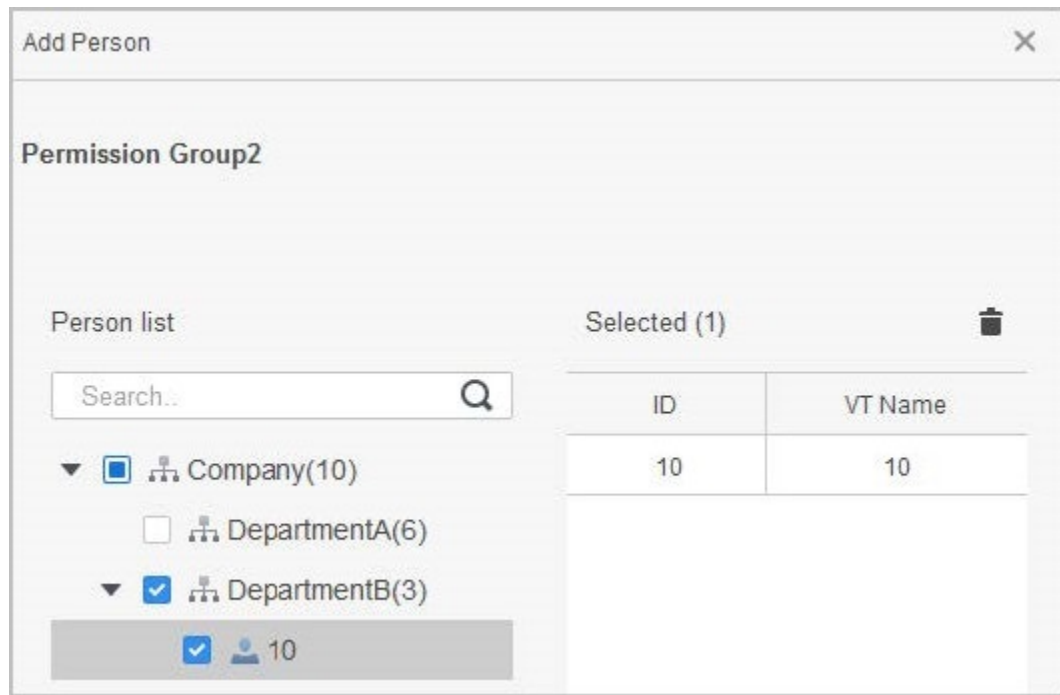

- Step 9 Click **OK**.
Users in the permission group can unlock the door after valid identity verification.

4.4 Access Management


4.4.1 Remotely Opening and Closing Door

You can remotely monitor and control door through Smart PSS Lite. For example, you can remotely open or close the door.

Procedure

- Step 1 Click **Access Solution > Access Manager** on the Home page.
- Step 2 Remotely control the door.
- Select the door, right click and select **Open** or **Close**.

Figure 4-8 Open door

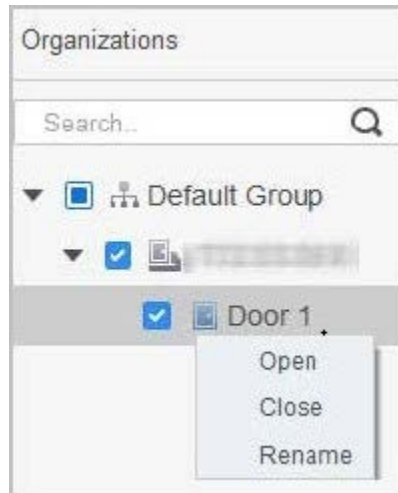

- Click  or  to open or close the door.

Related Operations

- Event filtering: Select the event type in the **Event Info**, and the event list displays the selected event type, such as alarm events and abnormal events.
- Event refresh locking: Click  to lock the event list, and then event list will stop refreshing. Click  to unlock.
- Event deleting: Click  to clear all events in the event list.


4.4.2 Setting Always Open and Always Close

After setting always open or always close, the door remains open or closed all the time.

Step 1 Click **Access Solution** > **Access Manager** on the Home page.

Step 2 Click **Always Open** or **Always Close** to open or close the door.

Figure 4-9 Always open or close

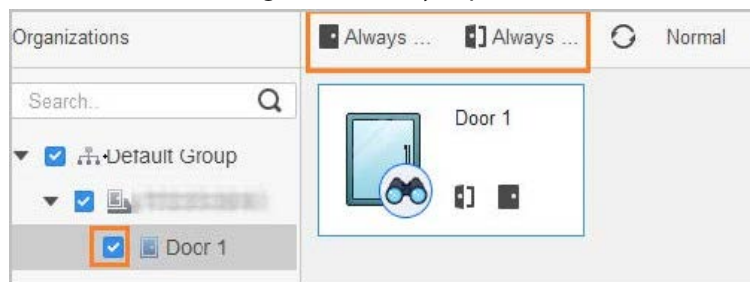

The door will remain open or closed all the time. You can click **Normal** to restore the access control to normal status, and then the door will be open or closed based on the configured verification methods.

4.4.3 Monitoring Door Status

Step 1 Click **Access Solution** > **Access Manager** on the Home page.


Step 2 Select the Access Controller in the device tree, and right click the Access Terminal and then select **Start Real-time Event Monitoring**.

Real-time access control events will display in the event list.



Click **Stop Monitor**, real-time access control events will not display.

Figure 4-10 Monitor door status

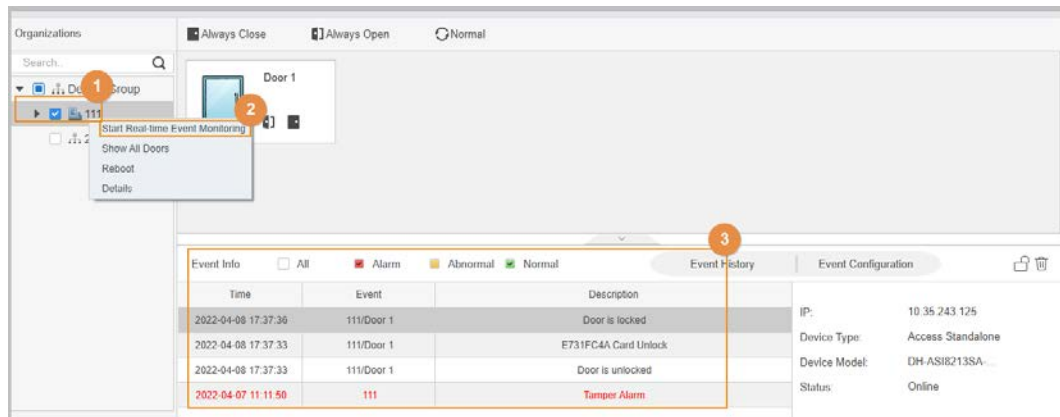

- Show All Door: Displays all doors controlled by the Access Controller.
- Reboot: Restart the Access Controller.
- Details: View the device details, such as IP address, model, and status.

Appendix 1 Important Points of Intercom Operation

The Access Controller can function as VTO to realize intercom function.

Prerequisites

The intercom function is configured on the Access Controller and VTO.

Procedure

- Step 1 On the standby screen, tap 
- Step 2 Enter the room No, and then tap .


Appendix 2 Important Points of QR Code Scanning

- Access Controller (with QR code scanning module): Place the QR code on your phone at a distance of 3 cm - 5 cm away from the QR code scanning lens. It supports QR code that is larger than 30 mm × 30 mm - 5 cm × 5 cm and less than 100 bytes in size.



QR code detection distance differs depending on the bytes and size of QR code.

Appendix Figure 2-1 QR code scanning

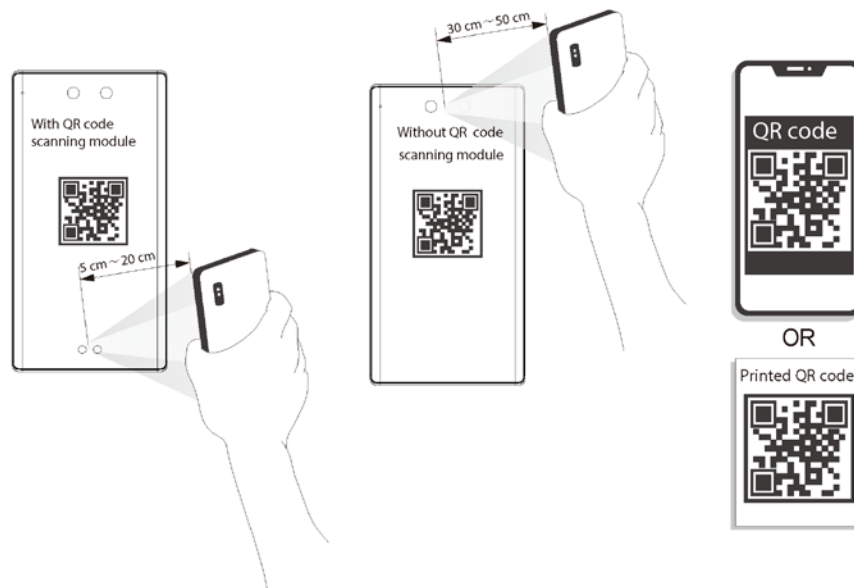

Appendix 3 Important Points of Fingerprint Registration Instructions


When you register the fingerprint, pay attention to the following points:

- Make sure that your fingers and the scanner surface are clean and dry.
- Press your finger on the center of the fingerprint scanner.
- Do not put the fingerprint sensor in a place with intense light, high temperature, and high humidity.
- If your fingerprints are unclear, use other unlocking methods.

Fingers Recommended


Forefingers, middle fingers, and ring fingers are recommended. Thumbs and little fingers cannot be put at the recording center easily.

Appendix Figure 3-1 Recommended fingers

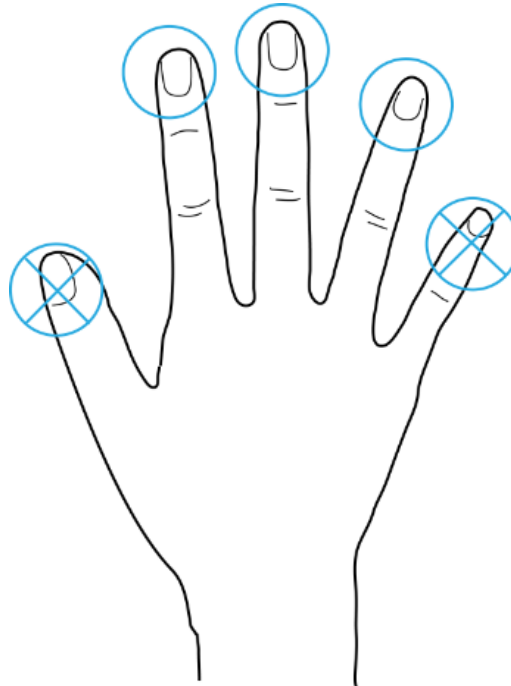


How to Press Your Fingerprint on the Scanner

Appendix Figure 3-2 Correct placement

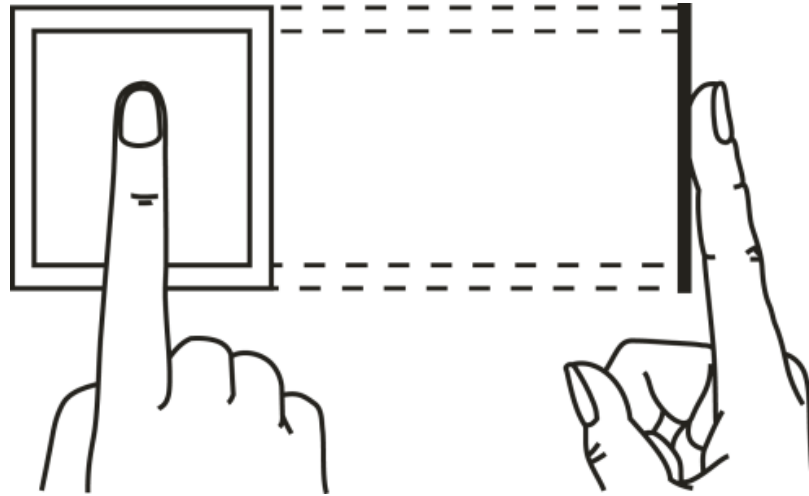

Appendix Figure 3-3 Wrong placement

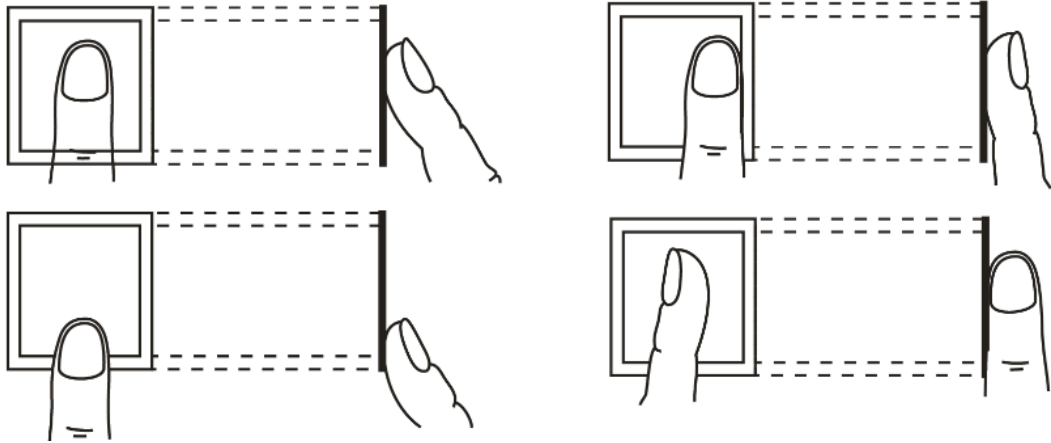

Appendix 4 Important Points of Face Registration

Before Registration

- Glasses, hats, and beards might influence face recognition performance.
- Do not cover your eyebrows when wearing hats.
- Do not change your beard style greatly if you use the access controller; otherwise face recognition might fail.
- Keep your face clean.
- Keep the access controller at least two meters away from light source and at least three meters away from windows or doors; otherwise backlight and direct sunlight might influence face recognition performance of the access controller.

During Registration

- You can register faces through the Access Controller or through the platform. For registration through the platform, see the platform user manual.
- Make your head center on the photo capture frame. The face image will be captured automatically.




- Do not shake your head or body, otherwise the registration might fail.
- Avoid two faces appear in the capture frame at the same time.

Face Position

If your face is not at the appropriate position, face recognition accuracy might be affected.

Appendix Figure 4-1 Appropriate face position

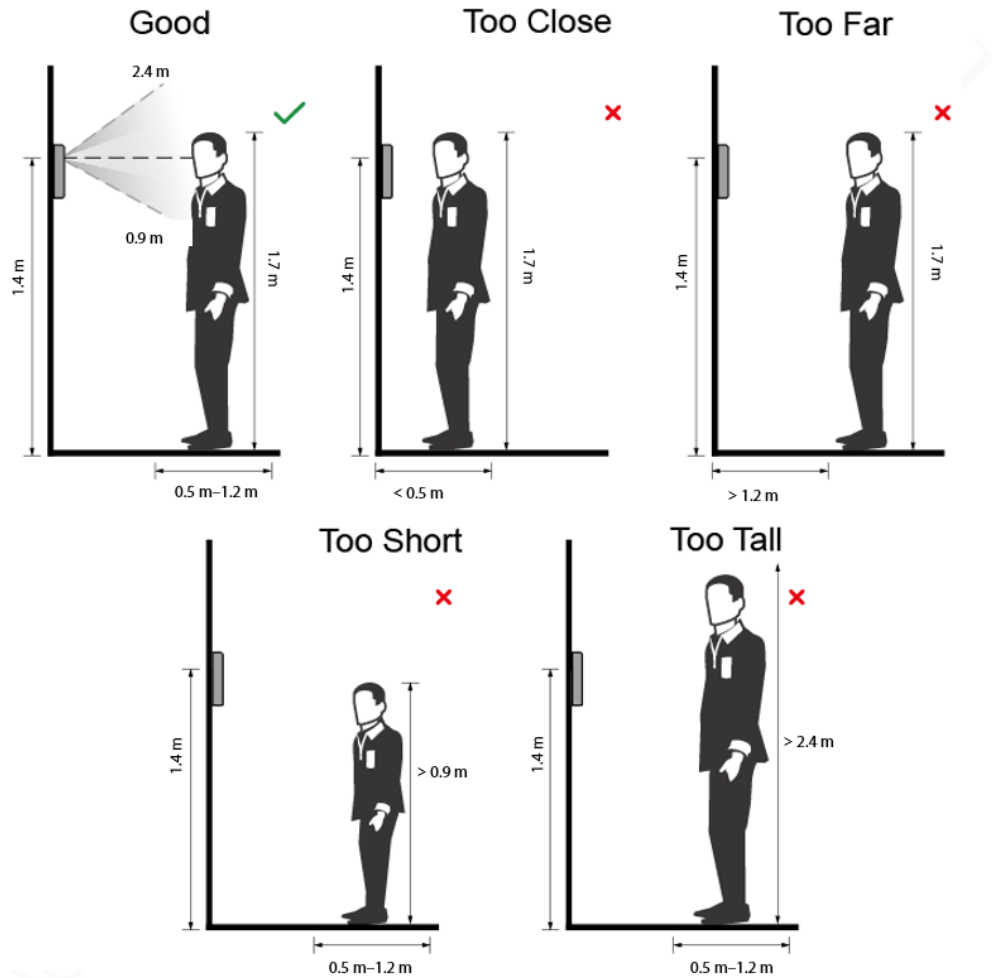

Requirements of Faces

- Make sure that the face is clean and forehead is not covered by hair.
- Do not wear glasses, hats, heavy beards, or other face ornaments that influence face image recording.
- With eyes open, without facial expressions, and make your face toward the center of camera.
- When recording your face or during face recognition, do not keep your face too close to or too far from the camera.

Appendix Figure 4-2 Head position



Appendix Figure 4-3 Face distance



- When importing face images through the management platform, make sure that image resolution is within the range 150×300 pixels– 600×1200 pixels; image pixels are more than 500×500 pixels; image size is less than 100 KB, and image name and person ID are the same.
- Make sure that the face takes up more than $1/3$ but no more than $2/3$ of the whole image area, and the aspect ratio does not exceed 1:2.

Appendix 5 Cybersecurity Recommendations

Mandatory actions to be taken for basic device network security:

1. Use Strong Passwords

Please refer to the following suggestions to set passwords:

- The length should not be less than 8 characters.
- Include at least two types of characters; character types include upper and lower case letters, numbers and symbols.
- Do not contain the account name or the account name in reverse order.
- Do not use continuous characters, such as 123, abc, etc.
- Do not use overlapped characters, such as 111, aaa, etc.

2. Update Firmware and Client Software in Time

- According to the standard procedure in Tech-industry, we recommend to keep your device (such as NVR, DVR, IP camera, etc.) firmware up-to-date to ensure the system is equipped with the latest security patches and fixes. When the device is connected to the public network, it is recommended to enable the "auto-check for updates" function to obtain timely information of firmware updates released by the manufacturer.
- We suggest that you download and use the latest version of client software.

"Nice to have" recommendations to improve your device network security:

1. Physical Protection

We suggest that you perform physical protection to device, especially storage devices. For example, place the device in a special computer room and cabinet, and implement well-done access control permission and key management to prevent unauthorized personnel from carrying out physical contacts such as damaging hardware, unauthorized connection of removable device (such as USB flash disk, serial port), etc.

2. Change Passwords Regularly

We suggest that you change passwords regularly to reduce the risk of being guessed or cracked.

3. Set and Update Passwords Reset Information Timely

The device supports password reset function. Please set up related information for password reset in time, including the end user's mailbox and password protection questions. If the information changes, please modify it in time. When setting password protection questions, it is suggested not to use those that can be easily guessed.

4. Enable Account Lock

The account lock feature is enabled by default, and we recommend you to keep it on to guarantee the account security. If an attacker attempts to log in with the wrong password several times, the corresponding account and the source IP address will be locked.

5. Change Default HTTP and Other Service Ports

We suggest you to change default HTTP and other service ports into any set of numbers between 1024–65535, reducing the risk of outsiders being able to guess which ports you are using.

6. Enable HTTPS

We suggest you to enable HTTPS, so that you visit Web service through a secure communication channel.

7. MAC Address Binding

We recommend you to bind the IP and MAC address of the gateway to the device, thus reducing the risk of ARP spoofing.

8. Assign Accounts and Privileges Reasonably

According to business and management requirements, reasonably add users and assign a minimum set of permissions to them.

9. Disable Unnecessary Services and Choose Secure Modes

If not needed, it is recommended to turn off some services such as SNMP, SMTP, UPnP, etc., to reduce risks.

If necessary, it is highly recommended that you use safe modes, including but not limited to the following services:

- SNMP: Choose SNMP v3, and set up strong encryption passwords and authentication passwords.
- SMTP: Choose TLS to access mailbox server.
- FTP: Choose SFTP, and set up strong passwords.
- AP hotspot: Choose WPA2-PSK encryption mode, and set up strong passwords.

10. Audio and Video Encrypted Transmission

If your audio and video data contents are very important or sensitive, we recommend that you use encrypted transmission function, to reduce the risk of audio and video data being stolen during transmission.

Reminder: encrypted transmission will cause some loss in transmission efficiency.

11. Secure Auditing

- Check online users: we suggest that you check online users regularly to see if the device is logged in without authorization.
- Check device log: By viewing the logs, you can know the IP addresses that were used to log in to your devices and their key operations.

12. Network Log

Due to the limited storage capacity of the device, the stored log is limited. If you need to save the log for a long time, it is recommended that you enable the network log function to ensure that the critical logs are synchronized to the network log server for tracing.

13. Construct a Safe Network Environment

In order to better ensure the safety of device and reduce potential cyber risks, we recommend:

- Disable the port mapping function of the router to avoid direct access to the intranet devices from external network.
- The network should be partitioned and isolated according to the actual network needs. If there are no communication requirements between two sub networks, it is suggested to use VLAN, network GAP and other technologies to partition the network, so as to achieve the network isolation effect.
- Establish the 802.1x access authentication system to reduce the risk of unauthorized access to private networks.
- Enable IP/MAC address filtering function to limit the range of hosts allowed to access the device.

Legal and Regulatory Information

Legal Considerations

Video surveillance can be regulated by laws that vary from country to country. Check the laws in your local region before using this product for surveillance purposes.

Disclaimer

Every care has been taken in the preparation of this document. Please inform your nearest Dahua office of any inaccuracies or omissions. Dahua Technology shall not be held responsible for any technical or typographical errors and reserves the right to make changes to the product and manuals without prior notice. Dahua Technology makes no warranty of any kind with regard to the material contained within this document, including, but not limited to, the implied warranty of merchantability and fitness for a particular purpose. Dahua Technology shall not be liable or responsible for incidental or consequential damages in connection with the furnishing, performance or use of this material. This product is only to be used for its intended purpose.

Intellectual Property Rights

Dahua Technology retains all intellectual property rights relating to technology embodied in the product described in this document.

Equipment Modifications

This equipment must be installed and used in strict accordance with the instructions given in the user documentation. This equipment contains no user-serviceable components. Unauthorized equipment changes or modifications will invalidate all applicable regulatory certifications and approvals.

Trademark Acknowledgments

  are registered trademarks or trademark applications of Dahua Technology in various jurisdictions. All other company names and products are trademarks or registered trademarks of their respective companies.

Regulatory Information

European Directives Compliance

-  This product complies with the applicable CE marking directives and standards:
- Low Voltage (LVD) Directive 2014/35/EU.
 - Electromagnetic Compatibility (EMC) Directive 2014/30/EU.

- Restrictions of Hazardous Substances (RoHS) Directive 2011/65/EU and its amendment Directive (EU) 2015/863.

A copy of the original declaration of conformity may be obtained from Dahua Technology.

The most up to date copy of the signed EU Declaration of Conformity (DoC) can be downloaded from: www.dahuasecurity.com/support/notice/

CE-Electromagnetic Compatibility (EMC)

This digital equipment is compliant with Class B according to EN 55032.

CE-Safety

This product complies with IEC/EN/UL 60950-1 or IEC/EN/UL 62368-1, Safety of Information Technology Equipment.

Declaration of Conformity CE

(Only for the product has RF function)

Hereby, Dahua Technology declares that the radio equipment is compliant with Radio Equipment Directive (RED) 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.dahuasecurity.com/support/notice/

USA Regulatory Compliance

FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

Attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This product has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This product generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this product does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC SDOC Statement can be downloaded from: <https://us.dahuasecurity.com/support/notices/>

01

Privacy Protection Notice

As the device user or data controller, you might collect personal data of others such as face, fingerprints, car plate number, Email address, phone number, GPS and so on. You need to be in compliance with the local privacy protection laws and regulations to protect the legitimate rights and interests of other people by implementing measures, including but not limited to: providing clear and visible identification to inform data subject the existence of surveillance area and providing related contact.

About the Manual

- The manual is for reference only. If there is inconsistency between the manual and the actual product, the actual product shall prevail.
- We are not liable for any loss caused by the operations that do not comply with the manual.
- The manual would be updated according to the latest laws and regulations of related jurisdictions. For detailed information, refer to the paper manual, CD-ROM, QR code or our official website. If there is inconsistency between paper manual and the electronic version, the electronic version shall prevail.
- All the designs and software are subject to change without prior written notice.
- The product updates might cause some differences between the actual product and the manual. Please contact the customer service for the latest program and supplementary documentation.
- There still might be deviation in technical data, functions and operations description, or errors in print. If there is any doubt or dispute, we reserve the right of final explanation.
- Upgrade the reader software or try other mainstream reader software if the manual (in PDF format) cannot be opened.
- All trademarks, registered trademarks and the company names in the manual are for the respective owners.
- Please visit our website, contact the supplier or customer service if there is any problem occurring when using the device.
- If there is any uncertainty or controversy, we reserve the right of final explanation.

Support

Should you require any technical assistance, please contact your Dahua distributor. If your questions cannot be answered immediately, your distributor will forward your queries through the appropriate channels to ensure a rapid response. If you are connected to the Internet, you can:

- Download user documentation and software updates.
- Search by product, category, or phrase.
- Report problems to Dahua support staff by logging in to your private support area.
- Chat with Dahua support staff.
- Visit Dahua Support at www.dahuasecurity.com/support/.

Contact Information

ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.

Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

Postcode: 310053

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

Website: www.dahuasecurity.com

English

Important Safeguards and Warnings

This Chapter describes the contents covering proper handling of the device, hazard prevention, and prevention of property damage. Read these contents carefully before using the device, comply with them when using, and keep it well for future reference.

Safety Instructions

The following categorized signal words with defined meaning might appear in the manual

Signal Words	Meaning
	Indicates a high potential hazard which, if not avoided, will result in death or serious injury.
	Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury.
	Indicates a potential risk which, if not avoided, could result in property damage, data loss, lower performance, or unpredictable result.
	Provides methods to help you solve a problem or save you time.
	Provides additional information as the emphasis and supplement to the text.

Safety Requirement

- Abide by local electrical safety standards to ensure that the voltage is stable and complies with the power supply requirement of the device.
- Transport, use, and store the device under the allowed humidity and temperature conditions. Refer to the corresponding technical specifications of device for specific working temperature and humidity.
- Do not place the device in a location exposed to dampness, dust, extreme hot or cold, strong electronic radiation, or unstable lighting conditions.
- Do not install the device in a place near the heat source, such as radiator, heater, furnace, or other heat generating device to avoid fire.
- Prevent liquid from flowing into the device to avoid damage to internal components.
- Install the device horizontally or install on the stable plane to prevent it from falling.
- Install the device in a well-ventilated place, and do not block the ventilation of the device.

06

Suomi

Tärkeitä varoitoimenpiteitä ja varoituksia

Tässä luvussa kuvataan laitteen asianmukainen käsittely, vaarojen torjunta ja omaisuusvahinkojen estäminen. Lue tämä sisälu huolellisesti ennen laitteen käyttämistä ja noudata näitä ohjeita, kun käytät laitetta. Säilytä ohjeet tulevia tarpeita varten.

Turvallisuusohje

Seuraavat luokitellut huomoisanat kuvattulla merkityksellä saatavat esiintyä ohjeissa.

Huomusanat	Merkitys
	Ilmaisee suuren potentiaalisen vaaran, joka johtaa kuolemaan tai vakavaan loukkaantumiseen, jos sitä ei vältetä.
	Ilmaisee keskiuuden tai pienen potentiaalisen vaaran, joka saattaa johtaa lievään tai korjaalaiseen loukkaantumiseen, jos sitä ei vältetä.
	Ilmaisee mahdollisen vaarallisen tilanteen, joka saattaa johtaa omaisuusvahinkoon, tietojen menetykseen, suorituskehon heikkenemiseen tai oodattamattomiin tuloksiin, jos sitä ei vältetä.
	Tarjoavat apua ongelmien ratkaisemiseen tai säästävät aikaa.
	Tarjoaa lisätietoa, joka korostaa tai täydentää tekstiä.

Turvallisuusvaatimus

- Noudata paikallisia sähköturvallisuusstandardeja varmistaksesi, että jännite on vakaa ja vastaa laitteen virtajännitteen asetuksia vaatimuksi.
- Kuljeta, käytä ja säilytä laitetta sallituissa kosteus- ja lämpötilaolosuhteissa. Käsitä laitteen erityinen käyttöluottolajila- kusteus laitteen vastaavista oimistustietoisista.
- Älä sijaita laitetta paikkaan, jossa se altistuu kosteudelle, pölylle, erittäin kuormalle tai kymälä lämpötilalle, voimakkaalle sähkömagneettisille tai epävakaille jänniteolosuhteille.
- Älä asenna laitetta lähelle lämmönalohdetta, kuten lämpöpatteria, lämmitintä, uunia tai muuta lämpöä tuottavaa laitetta, tulipalon välttämiseksi.
- Vältä nesteen pääsyä laitteen sisälle sisäisten komponenttien vahingoittumisen estämiseksi.
- Asenna laite vaakasoraan tai asenna se vaakaaseen paikkaan estääksesi sen kaatumisen.
- Asenna laite hyvin ilmastoituihin paikkaiin äläkä peitä laitteen tuuletusaukkoja.
- Älä pura laitetta omavaltaisesti.
- Vältä kovaa rasitusta, voimakasta tärinää ja kosteusta kuljetuksen, säilytyksen ja asennuksen aikana. Kuljetus vaatii täydellisen pakkaamisen.
- Käytä tehtaan pakkausta tai vastaavaa kuljetuksen aikana.

Paristo

Aihainen pariston varausasto vaikuttaa tosiaikakellon (RTC:n) toimintaan nollaten sen jokaisella käynnistyskerralla. Luvioviesi ilmeisty tuotteen parveleinraportista, kun paristo on vaihdettava. Lisätietoa parveleinraportista saat tuotteen

10

Signal Words	Meaning
	Indică un pericol potențial mediu sau scăzut care, dacă nu este evitat, poate duce la răni ușoare sau moderate.
	Indică un risc potențial care, dacă nu este evitat, ar putea duce la daune materiale, pierderi de date, performanțe mai scăzute sau rezultate imprevizibile.
	Offeră metode care să vă ajute să rezolvați o problemă sau să economisiți timp.
	Offeră informații suplimentare ca accent și supliment la text.

Cerinte de siguranta

- Respectați standardele locale de siguranță electrică pentru a vă asigura că tensiunea este stabilă și respectă cerințele de alimentare ale dispozitivului.
- Transportați, utilizați și depozitați dispozitivul sub condițiile de umiditate și temperatură admise. Consultați specificațiile tehnice corespunzătoare ale dispozitivului pentru temperatură și umiditate specifice de lucru.
- Nu așezați dispozitivul într-o locație expusă la umezeală, praf, extrem de caldă sau rece, de radiații electronice puternice sau de condiții de iluminare instabile.
- Nu instalați dispozitivul într-un loc în apropierea sursei de căldură, cum ar fi radiatorul, încălzitorul, cuptorul sau al dispozitiv generator de căldură, pentru a evita incendii.
- Impedicați curgerea lichidului în dispozitiv pentru a evita deteriorarea componentelor interne.
- Instalați dispozitivul în poziție orizontală sau instalați-l pe un loc stabil pentru a preveni căderea acestuia.
- Instalați aparatul într-un loc bine ventilat și nu blocați ventilația aparatului.
- Nu dezasamblați dispozitivul voi.
- Evitați loviturile puternice, vibrațiile violente și umiditatea în timpul transportului, depozitării și instalării. Este necesar un pachet complet în timpul transportului.
- Utilizați pachetul de fabrica sau echivalent în timpul transportului.

Baterie

Puterea redusă a bateriei afectează funcționarea RTC, determinând resetarea la ficare pornire. Când bateria are nevoie de înlocuire, în raportul serverului produsului va apărea un mesaj de jurnal. Pentru mai multe informații despre raportul serverului, consultați paginile de configurare ale produsului sau contactați asistența Dahua.

AVERTIZARE

- Risc de explozie dacă bateria este înlocuită incorect.
- Înlocuiți numai cu o baterie identică sau cu o baterie recomandată de Dahua.
- Asigurați-vă că bateria este în conformitate cu reglementările locale sau cu instrucțiunile producătorului bateriei.

RF exposure warning

(Only for the product has RF communication function)

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

This equipment should be installed and operated with a minimum distance 20cm between the radiator and your body.

Canada Regulatory Compliance

ICES-003

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- This device may not cause interference, and
- This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- l'appareil ne doit pas produire de brouillage, et
- l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RF exposure warning

(Only for the product has RF communication function)

This equipment should be installed and operated with a minimum distance 20cm between the radiator and your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'attention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

03

- Do not disassemble the device arbitrarily.
- Avoid heavy stress, violent vibration, and soaking during transportation, storage, and installation. Complete package is necessary during the transportation.
- Use the factory package or the equivalent for transportation.

Battery

Low battery power affects the operation of the RTC, causing it to reset at every power-up. When the battery needs replacing, a log message will appear in the product's server report. For more information about the server report, see the product's setup pages or contact Dahua support.

-  **WARNING**
- Risk of explosion if the battery is incorrectly replaced.
 - Replace only with an identical battery or a battery which is recommended by Dahua.
 - Dispose of used batteries according to local regulations or the battery manufacturer's instructions.

Polski

Ważne środki ostrożności i ostrzeżenia

Niniejszy rozdział opisuje właściwe sposoby korzystania z urządzenia, sposoby zapobiegania zagrożeniom, a także sposoby zapobiegania uszkodzeniu mienia. Przed rozpoczęciem korzystania z urządzenia zapoznaj się dokładnie z tymi informacjami i zachowaj je na przyszłość do celów referencyjnych.

Instrukcje dot. bezpieczeństwa

W podręczniku mogą pojawić się następujące symbole. Ich znaczenie wyjaśnia poniższa tabela.

Symbol	Znaczenie
	Oznacza potencjalne zagrożenie wysokiego stopnia, którego nieuniknienie może skutkować poważnymi urazami lub śmiercią.
	Oznacza potencjalne zagrożenie średniego lub niskiego stopnia, którego nieuniknienie może skutkować pomniejszonymi lub średnimi urazami.
	Oznacza potencjalne zagrożenie, którego nieuniknienie może skutkować zniszczeniem mienia, utratą danych, spadkiem wydajności lub mieć inne nieprzewidziane skutki.
	Oznacza wskazówki pozwalające na rozwiązanie problemu lub oszczędność czasu.
	Oznacza informacje uzupełniające tekst główny.

07

asetussivulla tai ottamalla yhteyttä Dahuan tukeen.

VAROITUS

- Räjähdytsvaara, jos paristo asetetaan väärin paikalleen.
- Vahda vain samanlaiseen paristoon tai Dahuan suosittelemaan paristoon.
- Vältä käytetä paristot ja akut paikallisten määräysten tai valmistajan ohjeiden mukaisesti.

Magyar

Fontos óvintézkedések és figyelmeztetések

A jelen Fejezet leírja az Eszköz megfelelő kezelését, a veszélyek megelőzését és a vagyoni károk megelőzését. Az Eszköz használatá elöl olvassa el figyelmesen, a használatra során lartsa be, és őrizze meg jól jövőbeni hivatkozás céljára.

Biztonsági utasítások

Az Űtmutatóban az alábbi meghatározott jelentéssel bíró kategorizált figyelmeztetések jelenhetnek meg.

Figyelmeztetés	Jelentés
	Nagy potenciális veszélyt jelez, amely, ha nem kerül el, halált vagy súlyos sérülést okoz.
	Közepes vagy kis potenciális veszélyt jelez, amely, ha nem kerül el, enyhe vagy mérsékelt sérülést okozhat.
	Olyan potenciális kockázatot jelez, amely, ha nem kerül el, vagyoni kár, adatszerzés, alacsonyabb teljesítménytelenség vagy kizárhatatlan eredményt okozhat.
	Olyan módszereket biztosít, amelyek segítenek megoldani a problémájt vagy időt takarítani meg.
	További információkat biztosít a szöveg kiemelésével és kiegészítésével.

Biztonsági követelmények

- Tartsa be a helyi elektromos biztonsági szabványokat annak biztosítása érdekében, hogy a feszültség stabil és az eszköz áramellátási követelményének megfelelő legyen.
- Az eszköz a megengedett páratartalom és hőmérséklet viszonyok között szállítasa, használja, és tárolja. A konkrét üzemi hőmérséklet és páratartalom megtalálja az eszköz műszaki leírásában.
- Ne tegye az eszközt olyan helyre, ahol nedvességnek, pornak, rendkívül melegnek vagy hidegnek, erős elektronikus sugárzásnak, vagy instabil fényviszonyoknak van kitéve.
- A tűz elkerülése érdekében ne telepítse az eszközt hőforrás, mint például radiátor, hőszárgáz, kemence, vagy más hőtermelő eszköz közelében lévő helyre.
- A belső alkatrészek károsodásának elkerülése érdekében akadályozza meg, hogy folyadék foljon az eszközbe.
- A leeseének megakadályozása érdekében az eszközt vízszintesen telepítse,

11

Čeština

Důležitá bezpečnostní opatření a varování

Tato kapitola popisuje obsah vztahující se na správnou manipulaci se zařízením, prevenci porážek a prevenci škod na majetku. Pečlivě si tyto informace přečtěte před použitím zařízení, během používání zařízení je dodržujte a uchovávejte je pro budoucí použití.

Bezpečnostní pokyny

Tato příručka může obsahovat následující kategorie signálních slov.

Signální slova	Význam
	Označuje možnost závažného nebezpečí, které, pokud by mu nebylo zamezeno, může mít za následek smrt nebo vážné zranění.
	Označuje možnost středně nebo málo závažného nebezpečí, které, pokud by mu nebylo zamezeno, může mít za následek lehké nebo ne příliš závažné zranění.
	Označuje možnost menšího rizika, které, pokud by mu nebylo zamezeno, může mít za následek škodu na majetku, snížení výkonu nebo neočekávaný výsledek.
	Uvádí metody, které vám pomohou vyřešit problém nebo vám ušetří čas.
	Poskytuje dodatečné informace formou důrazu a doplnění textu.

Bezpečnostní požadavky

- Dodržujte místní normy pro elektrickou bezpečnost pro zajištění stabilního napětí a dodržení požadavků na napájení zařízení.
- Zařízení připravujte, používejte a skladujte při odpovídající teplotě a vlhkosti. Konkrétní pracovní teplotu a vlhkost naleznete v příslušných technických specifikacích zařízení.
- Neumísťujte zařízení tam, kde bude vystaveno vlhkosti, prachu, extrémnímu horku nebo chladu, silnému elektronickému záření nebo nestabilním světelným podmínkám.
- Neinstalujte zařízení v blízkosti zdrojů tepla, jako je radiátor, ohříváč, kotel nebo jiné zařízení generující teplo, aby nedošlo k požáru.
- Zamezte proniknutí kapalín do zařízení, aby nedošlo k poškození jeho vnitřních součástí.
- Zařízení instalujte vodorovně nebo je instalujte na stabilním místě, aby bylo chráněno před pádem.
- Zařízení instalujte na dobře větraném místě a neblokujte odvětrávací zařízení.
- Zařízení svévolně nedemontujte.
- Během příprav, skladování a instalace zamezte silnému tlaku, prudkým vibracím a rámcům. Při přípravě je nezbytné úplné zabalení.
- Při přípravě použijte obal z výroby nebo obdobný obal.

Baterie

Nízké nabití baterie ovlivňuje fungování hodin ve skutečném čase a způsobuje,

Japan Regulatory Compliance

VCCI

These products comply with the requirements of VCCI Class B Information Technology Equipment.

Batteries

Correct disposal of batteries in this product

 This marking on the battery indicates that the batteries in this product should not be disposed of with other household waste at the end of their working life. Where marked, the chemical symbols Hg, Cd or Pb indicate that the battery contains mercury, cadmium or lead above the reference levels in Directive 2006/66/EC and its amending Directive 2013/56/EU. If batteries are not properly disposed of, these substances can cause harm to human health or the environment.

CAUTION

Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

Safety

The product complies with IEC/EN/UL 60950-1, Information Technology Equipment – Safety – Part 1: General Requirements; or complies with IEC/EN/UL 62368-1, Audio/video, information and communication technology equipment – Part 1: Safety requirements.

If the power supply to the product is from external power adaptor without connecting to AC Mains, and the product is not shipped with power adaptor, customers are required to use the external power adaptor that must fulfill the requirements for Safety Extra Low Voltage (SELV) and Limited Power Source (LPS).

Waste Electrical and Electronic Equipment (WEEE) statements

Disposal and Recycling

When this product has reached the end of its useful life, dispose of it according to local laws and regulations. For information about your nearest designated collection point, contact your local authority responsible for waste disposal. In accordance with local legislation, penalties may be applicable for incorrect disposal of this waste.

 This symbol means that