






Puw test Plot

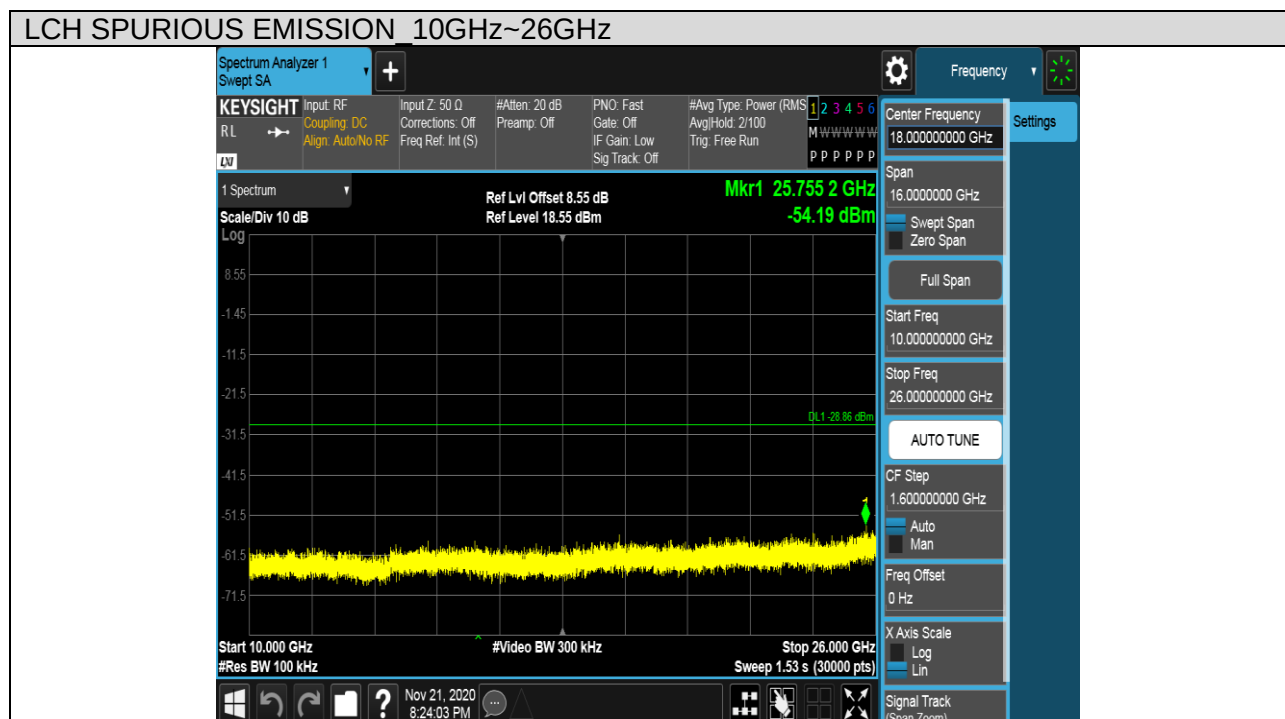

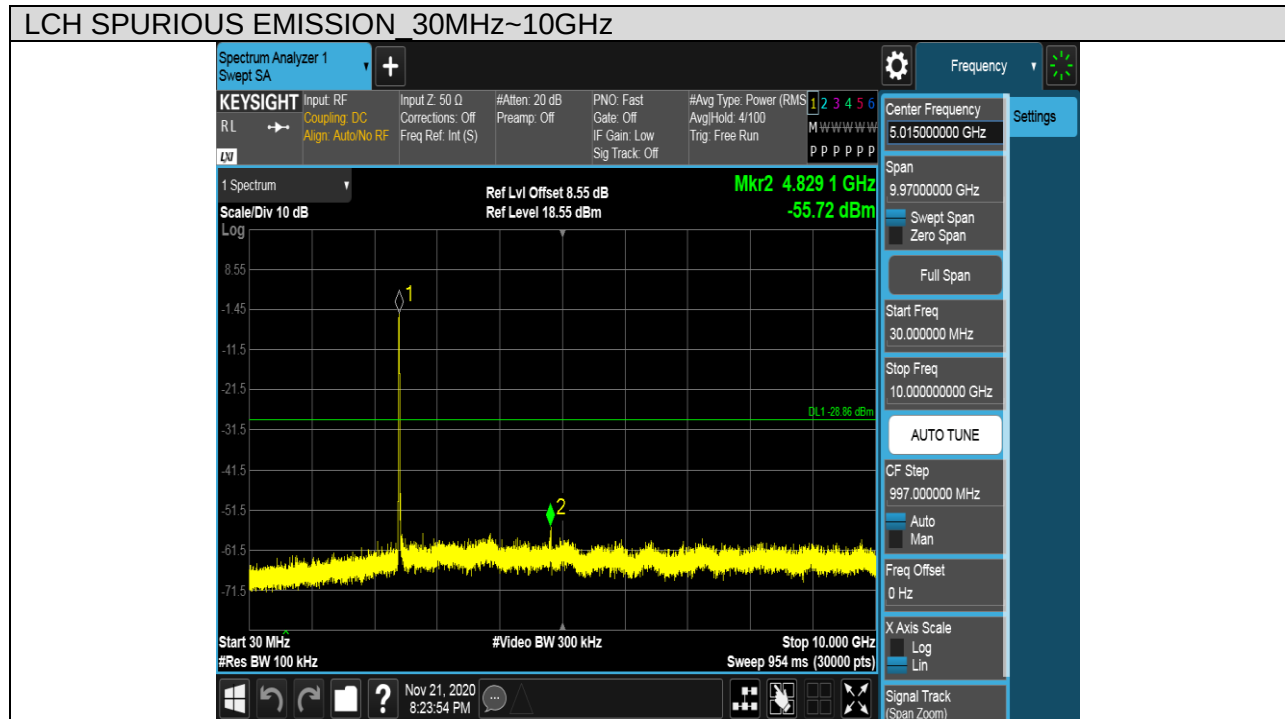



Test Mode	Channel	Verdict
11G	MCH	PASS

Pref test Plot

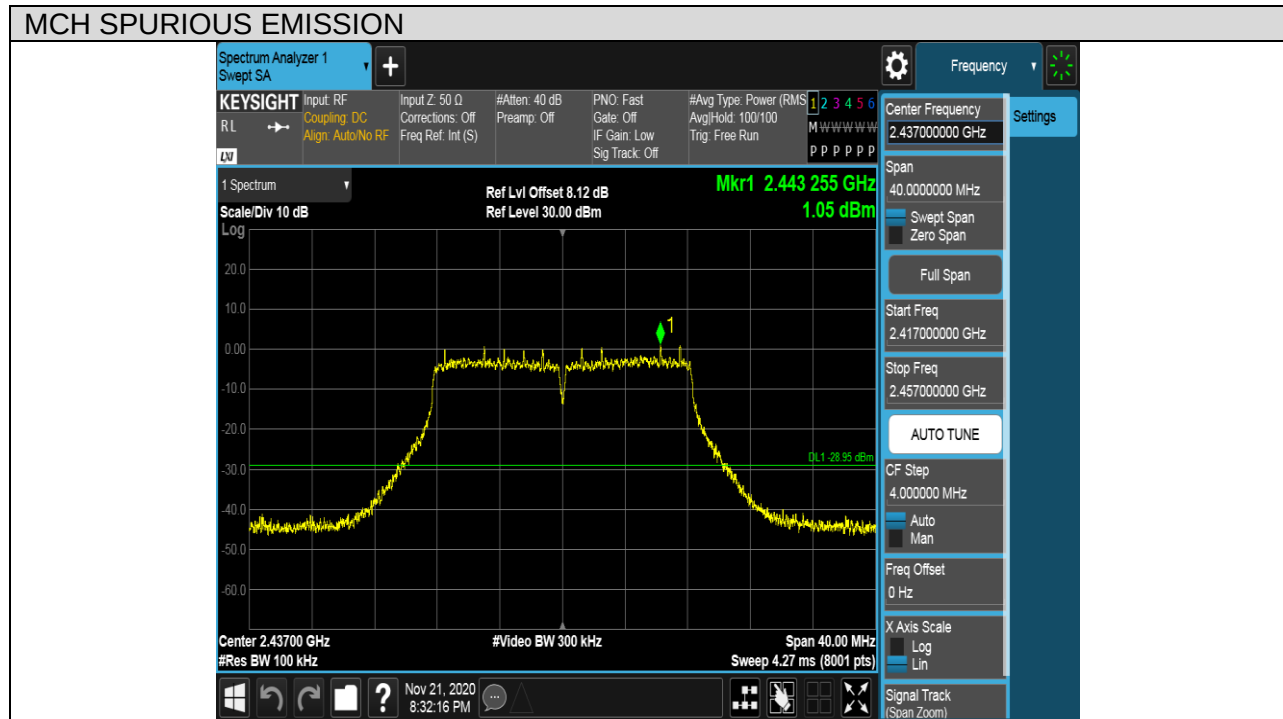




Puw test Plot

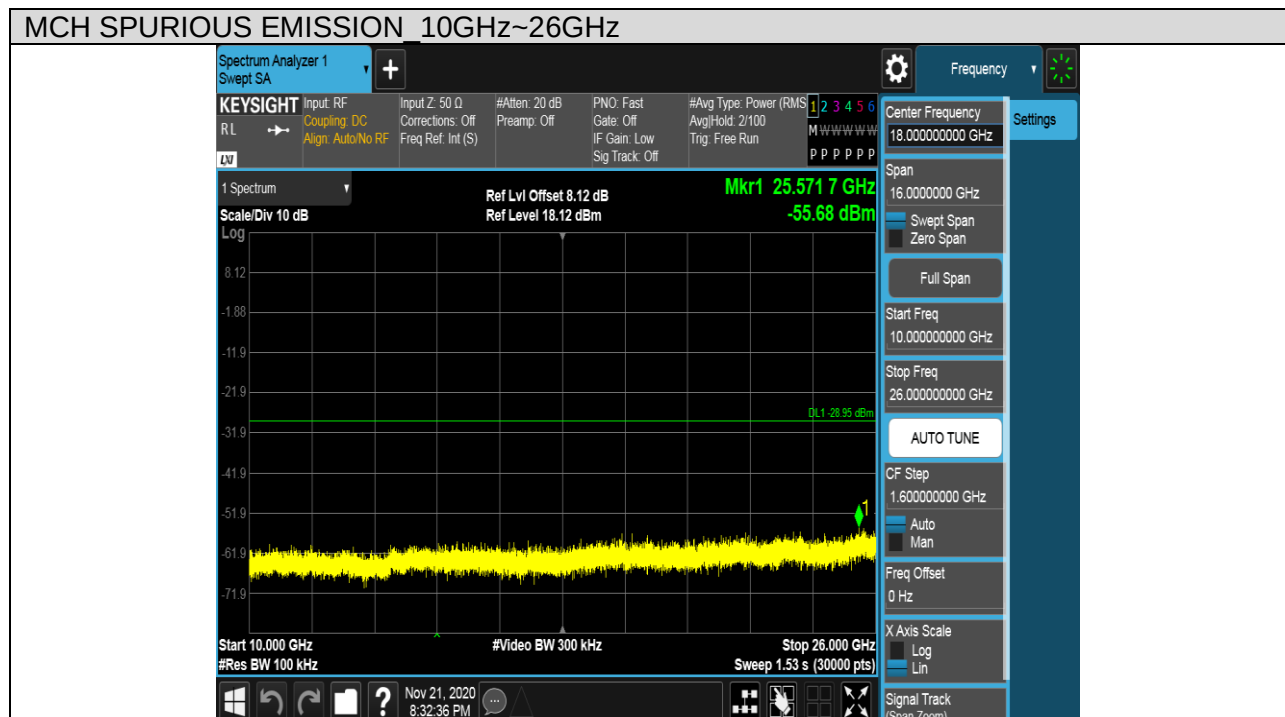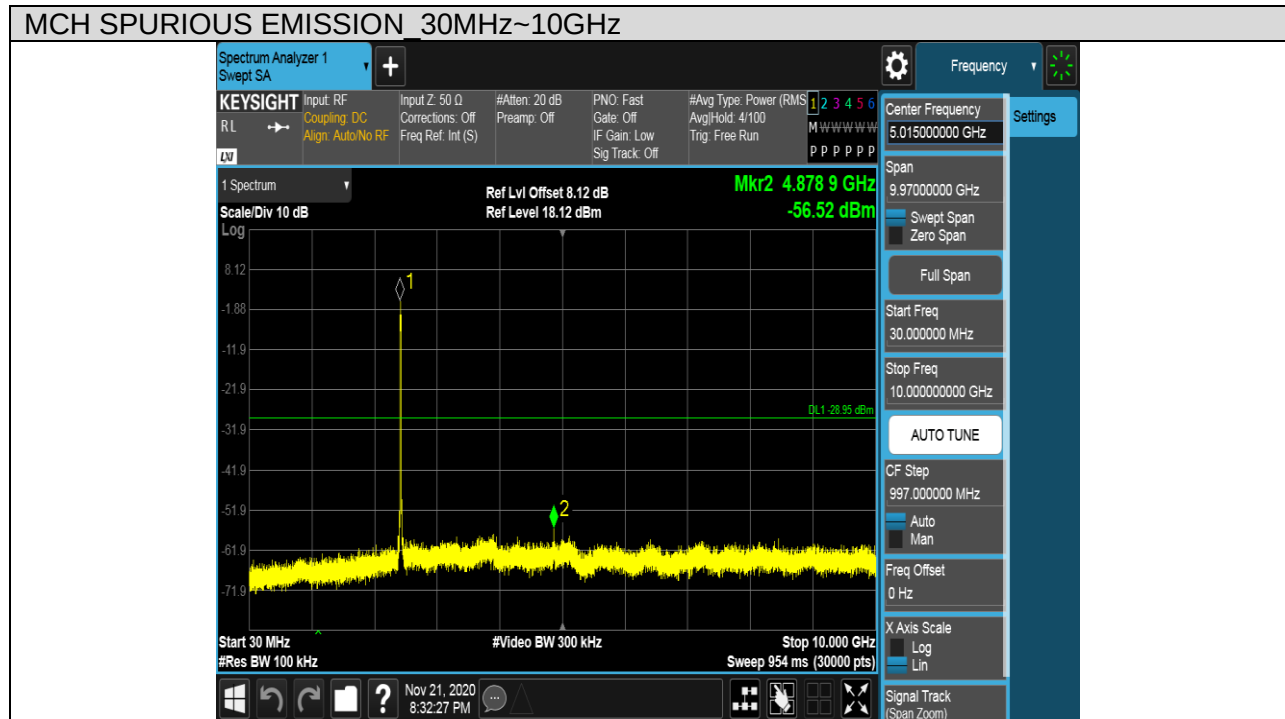





Test Mode	Channel	Verdict
11G	HCH	PASS

Pref test Plot

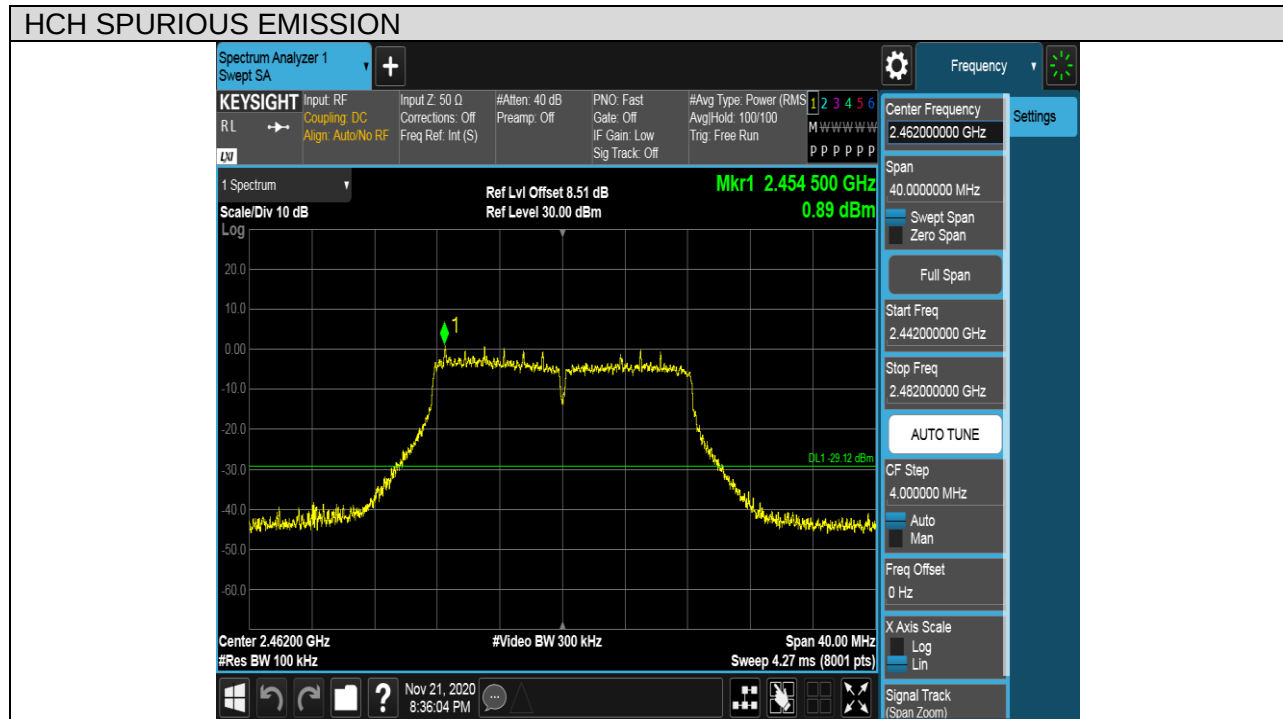




Puw test Plot

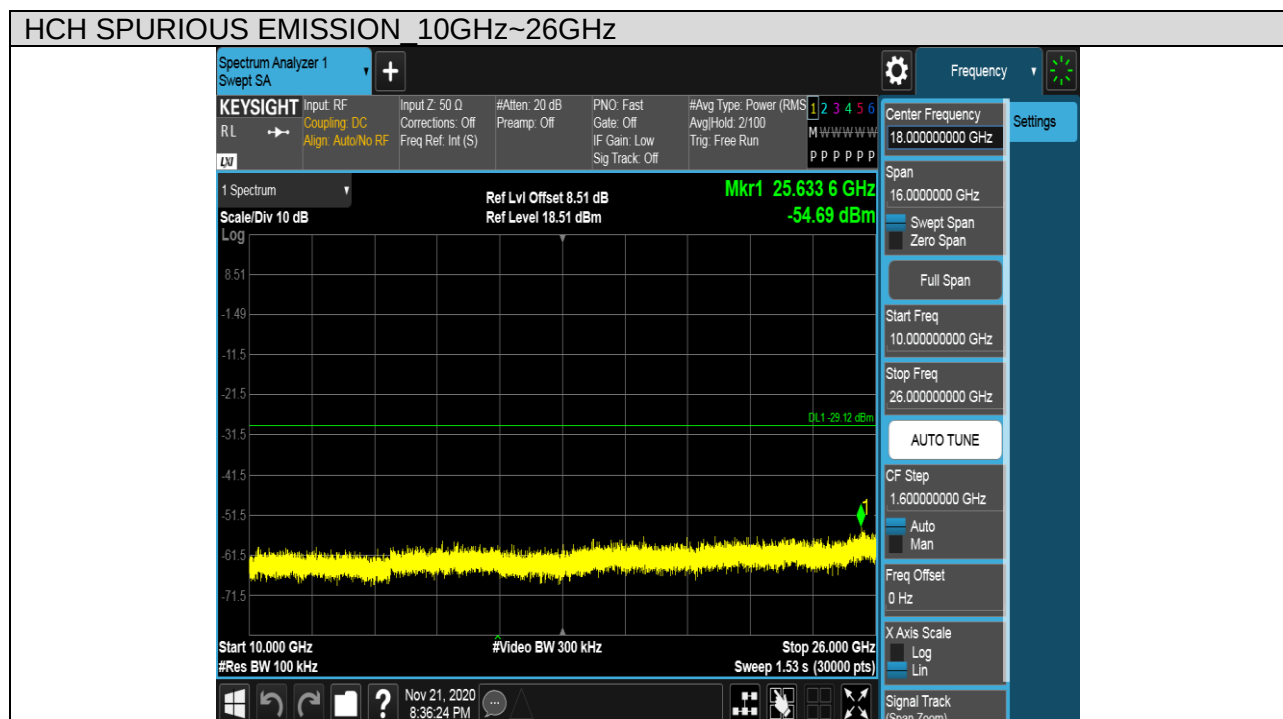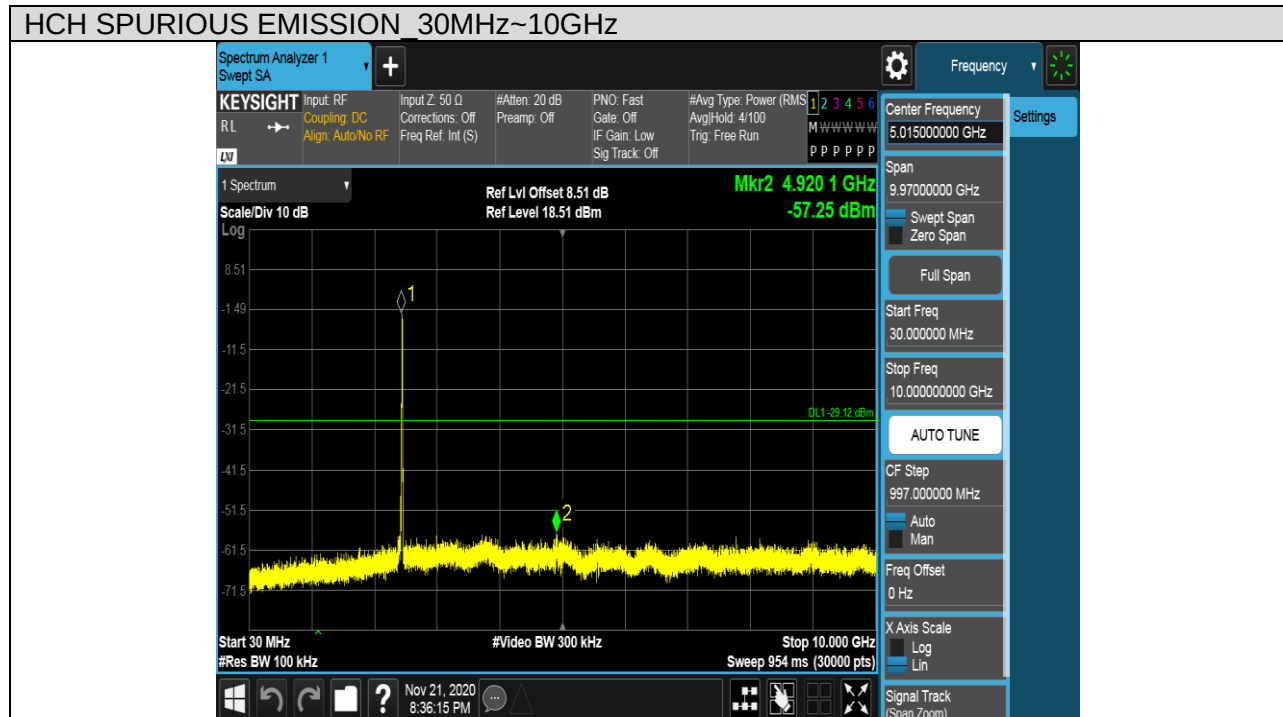





Test Mode	Channel	Verdict
11N HT20	LCH	PASS

Pref test Plot

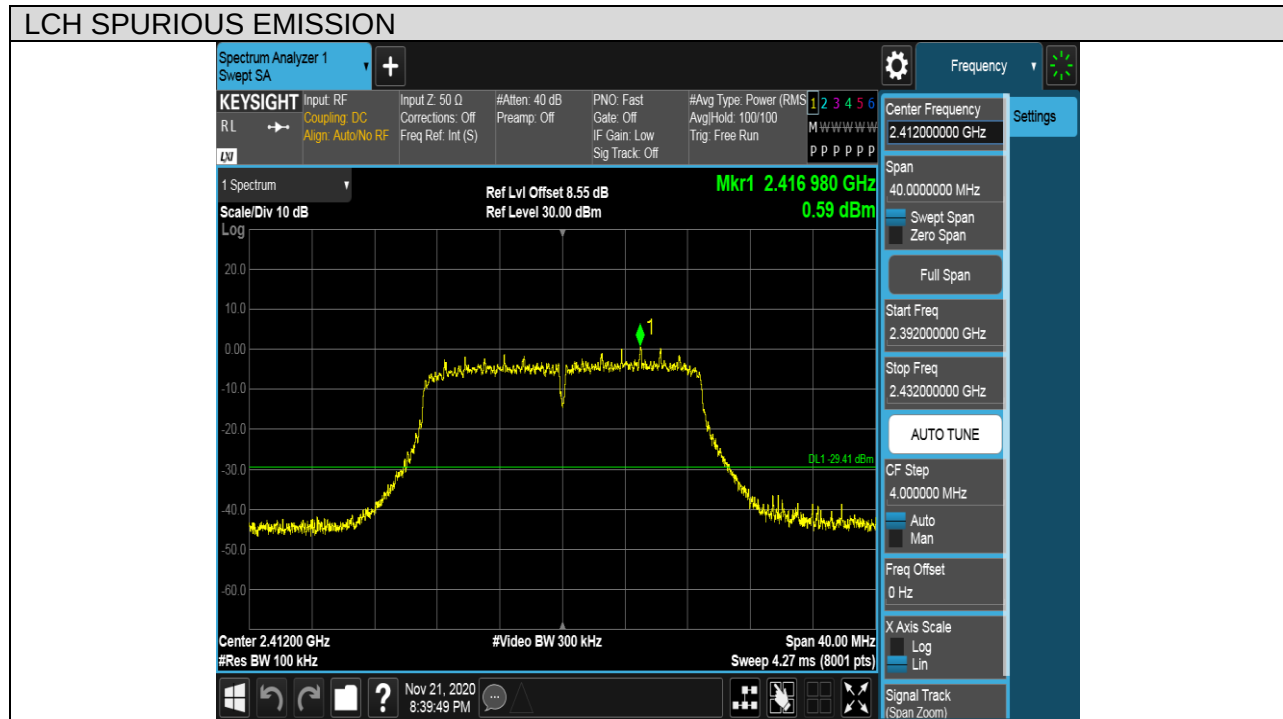




Puw test Plot

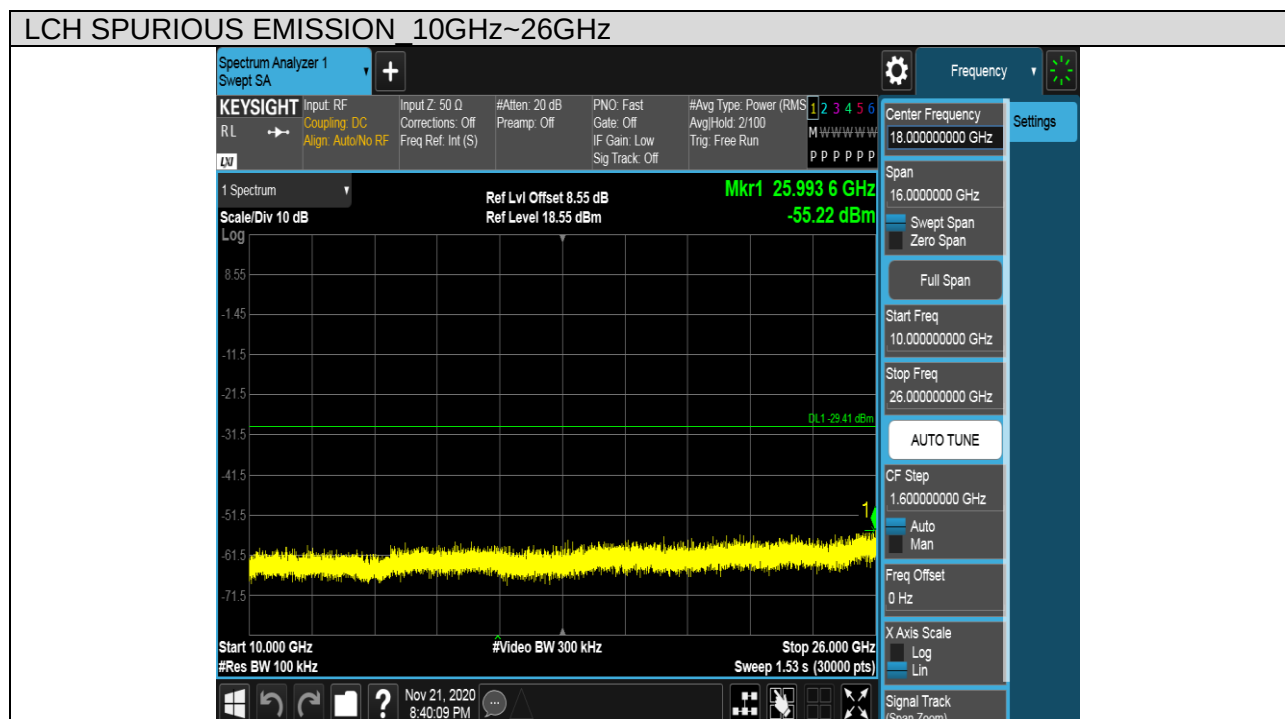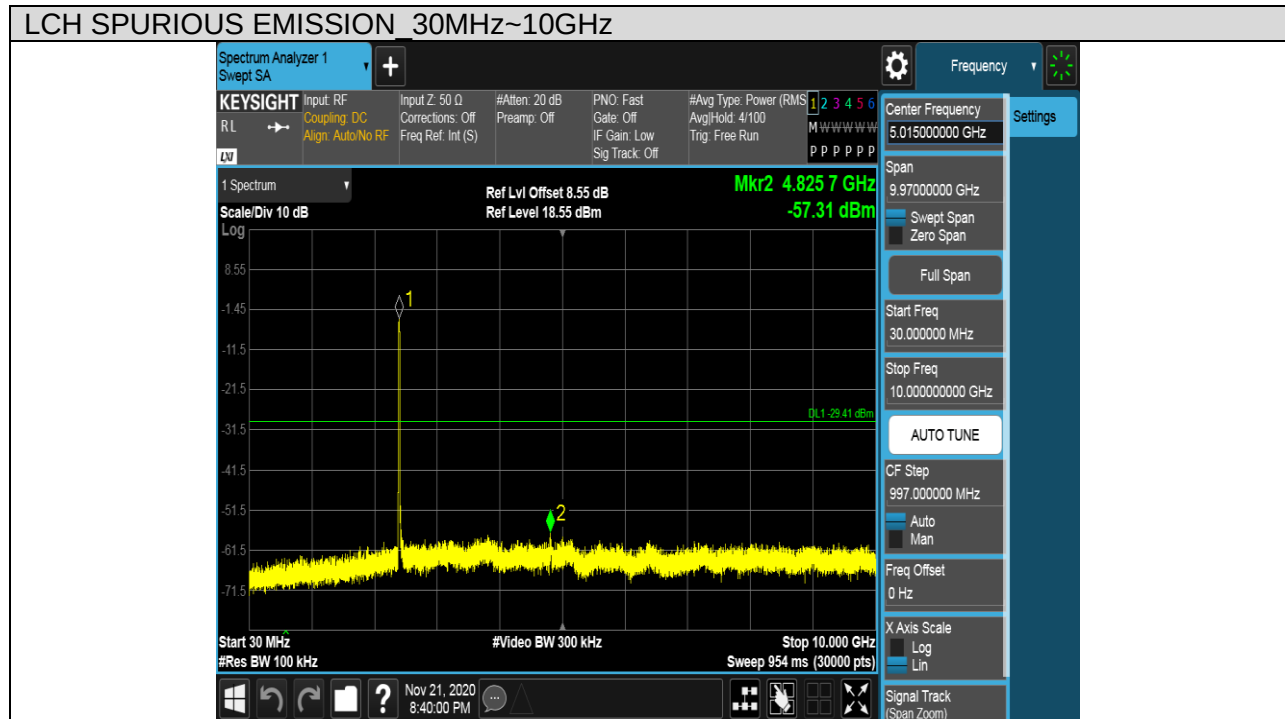





Test Mode	Channel	Verdict
11N HT20	MCH	PASS

Pref test Plot

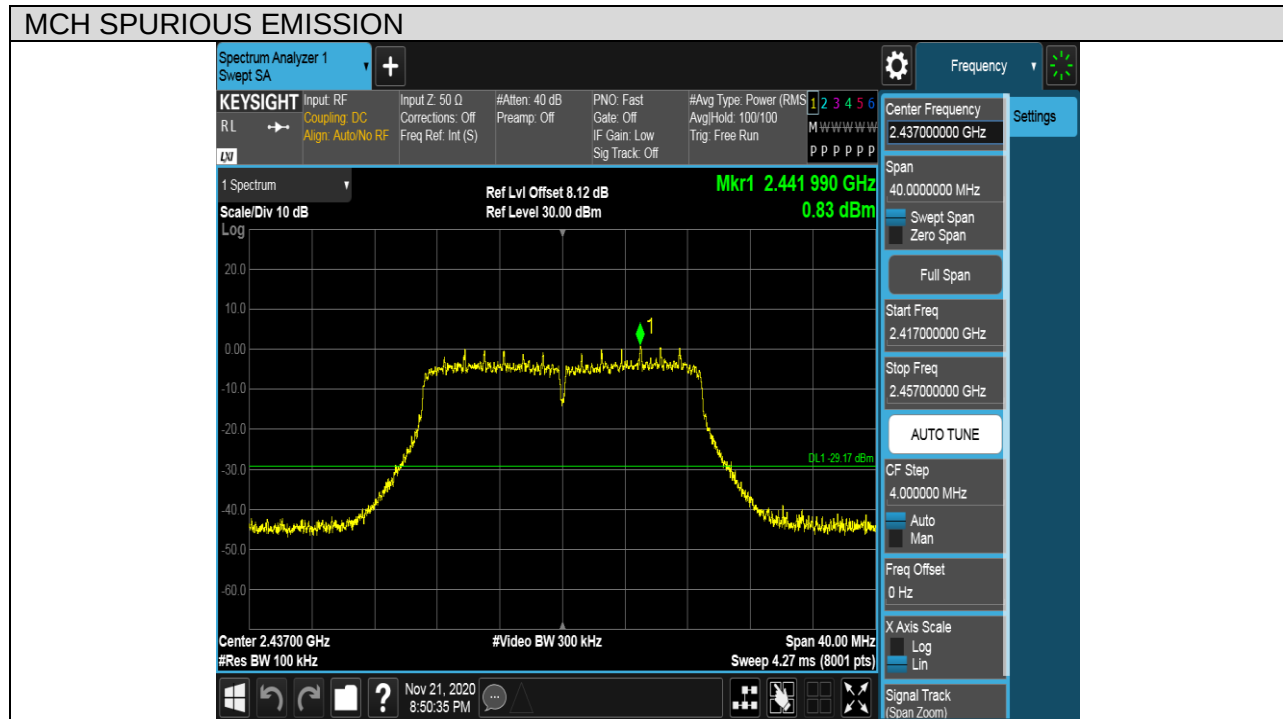




Puw test Plot

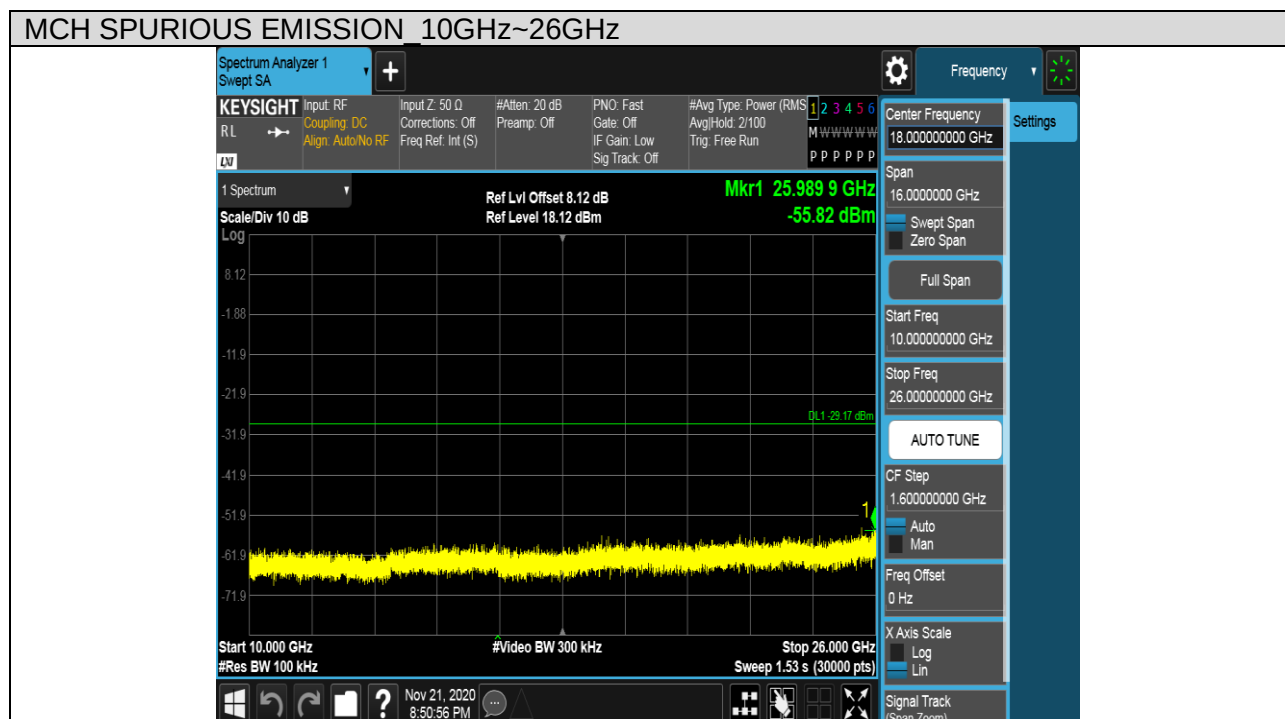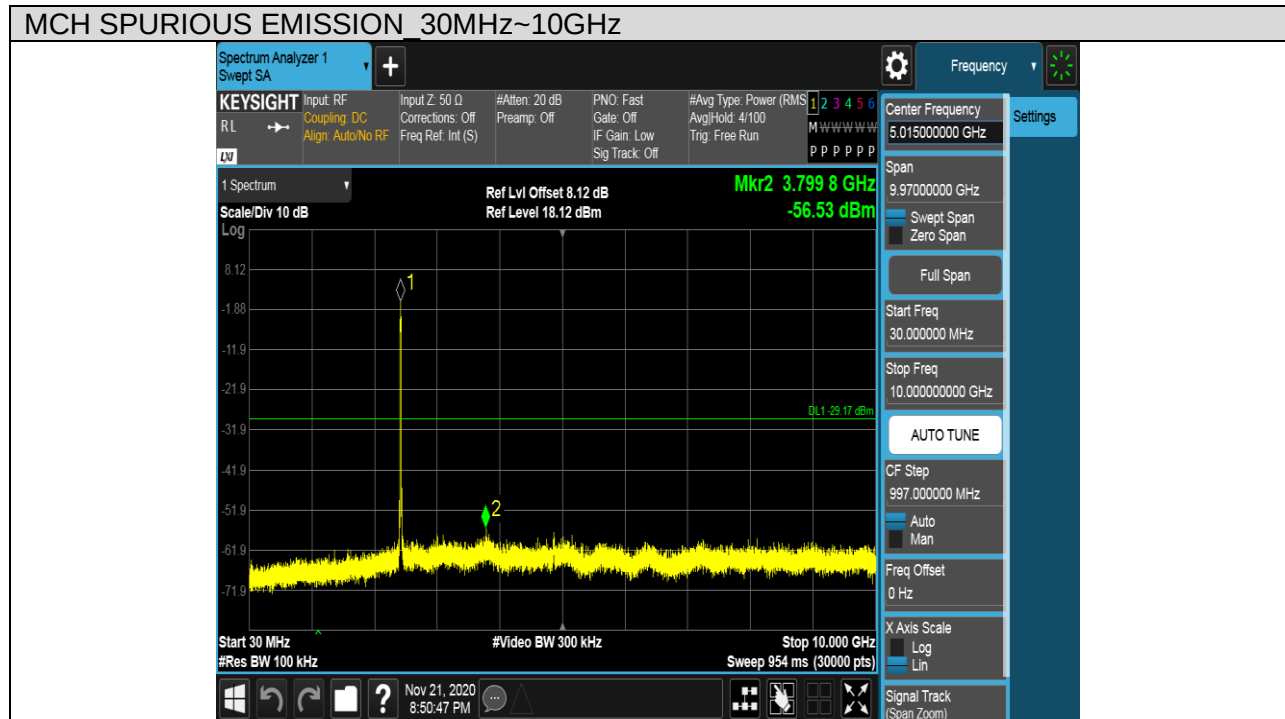





Test Mode	Channel	Verdict
11N HT20	HCH	PASS

Pref test Plot

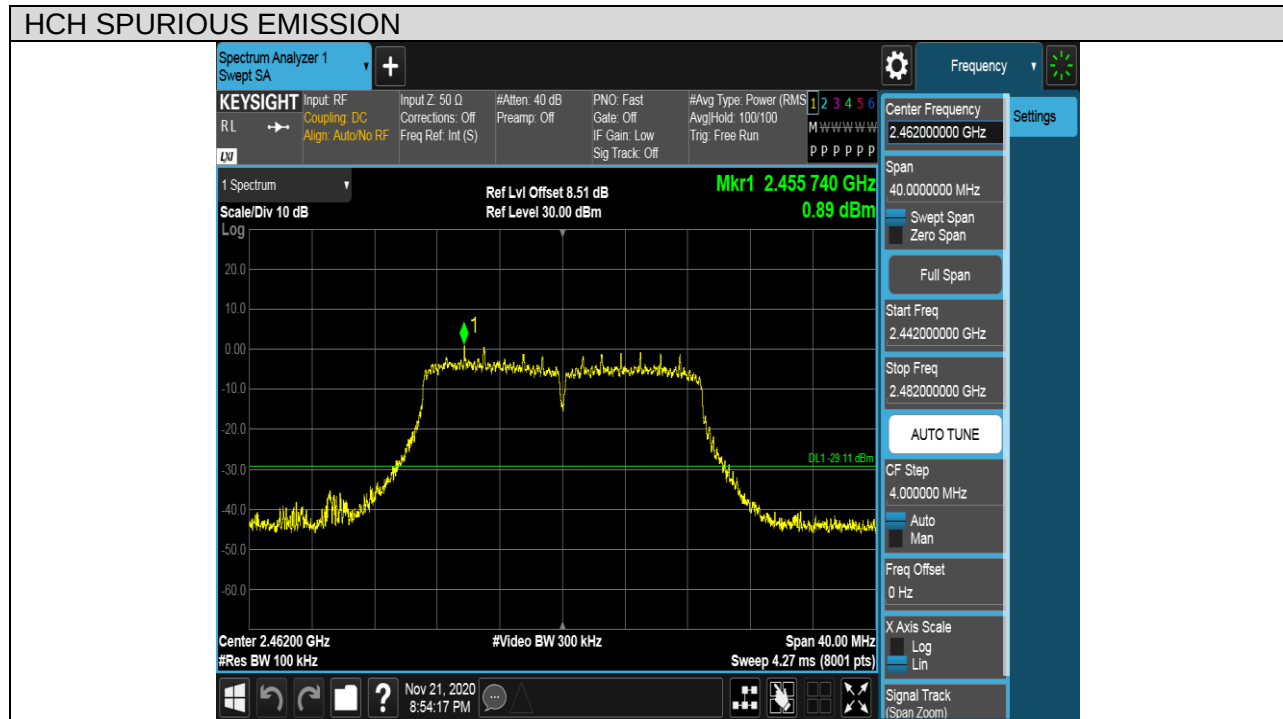




Puw test Plot

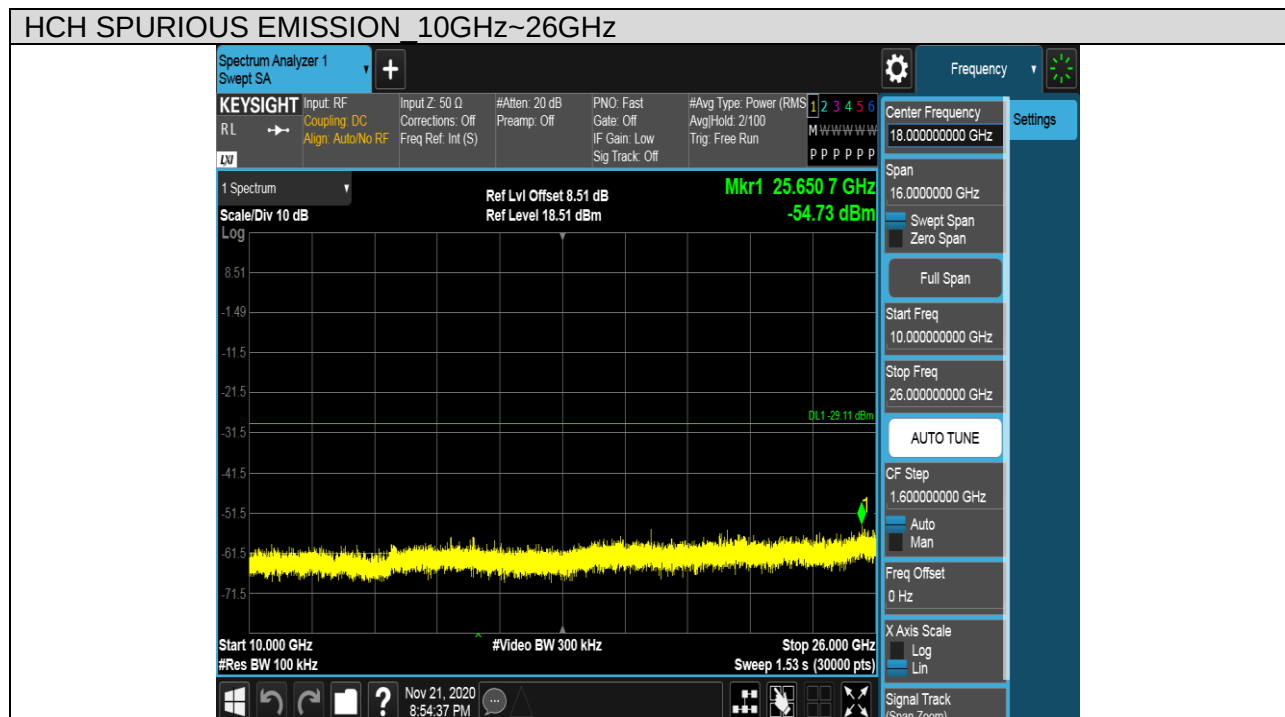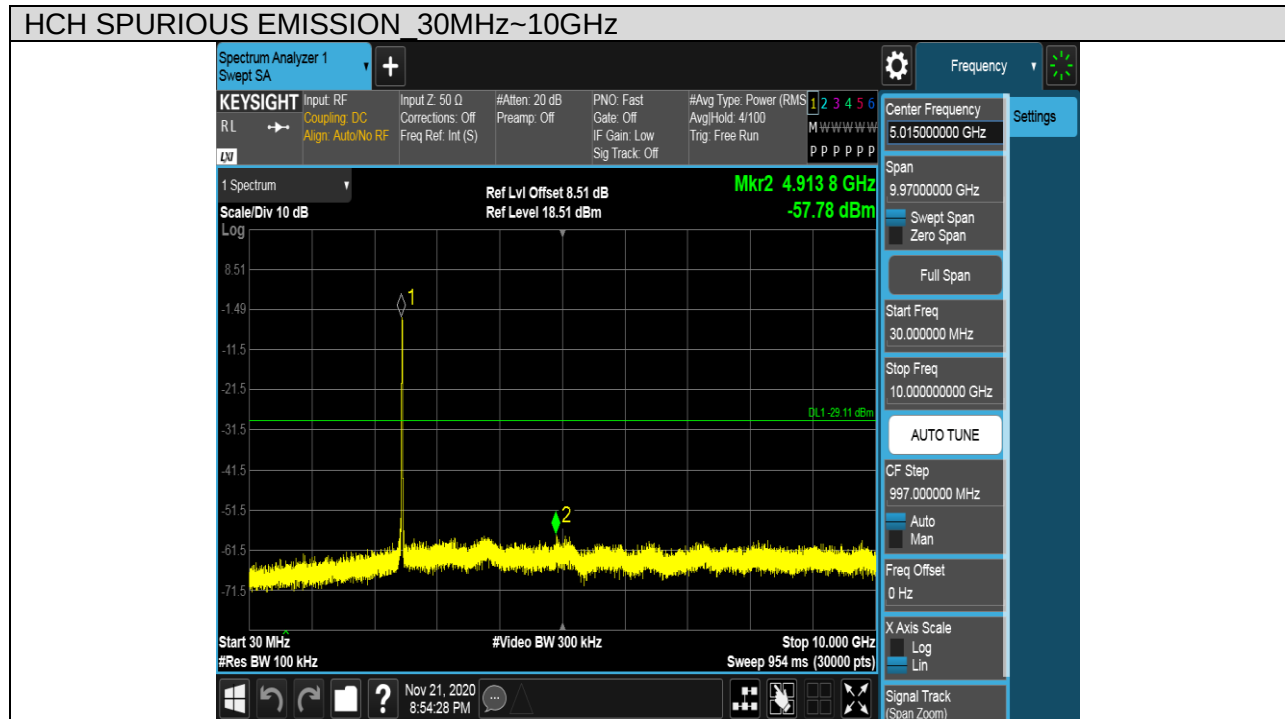





Test Mode	Channel	Verdict
11N HT40	LCH	PASS

Pref test Plot

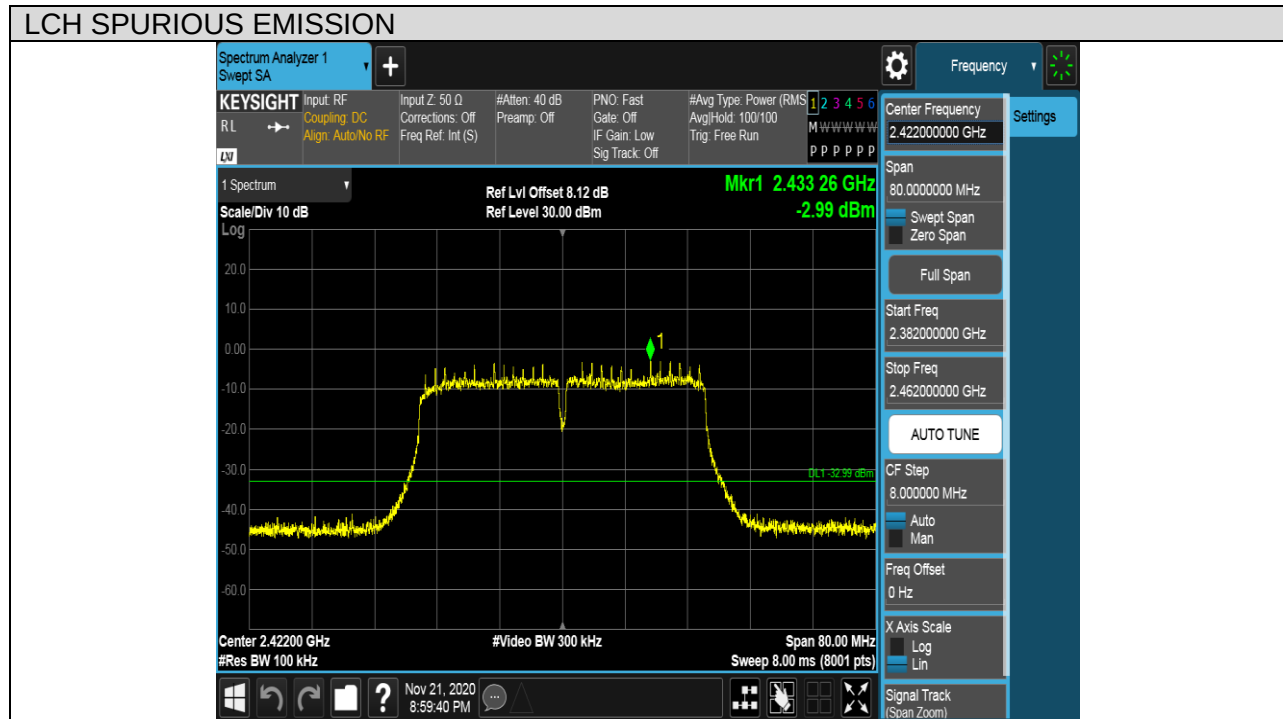




Puw test Plot

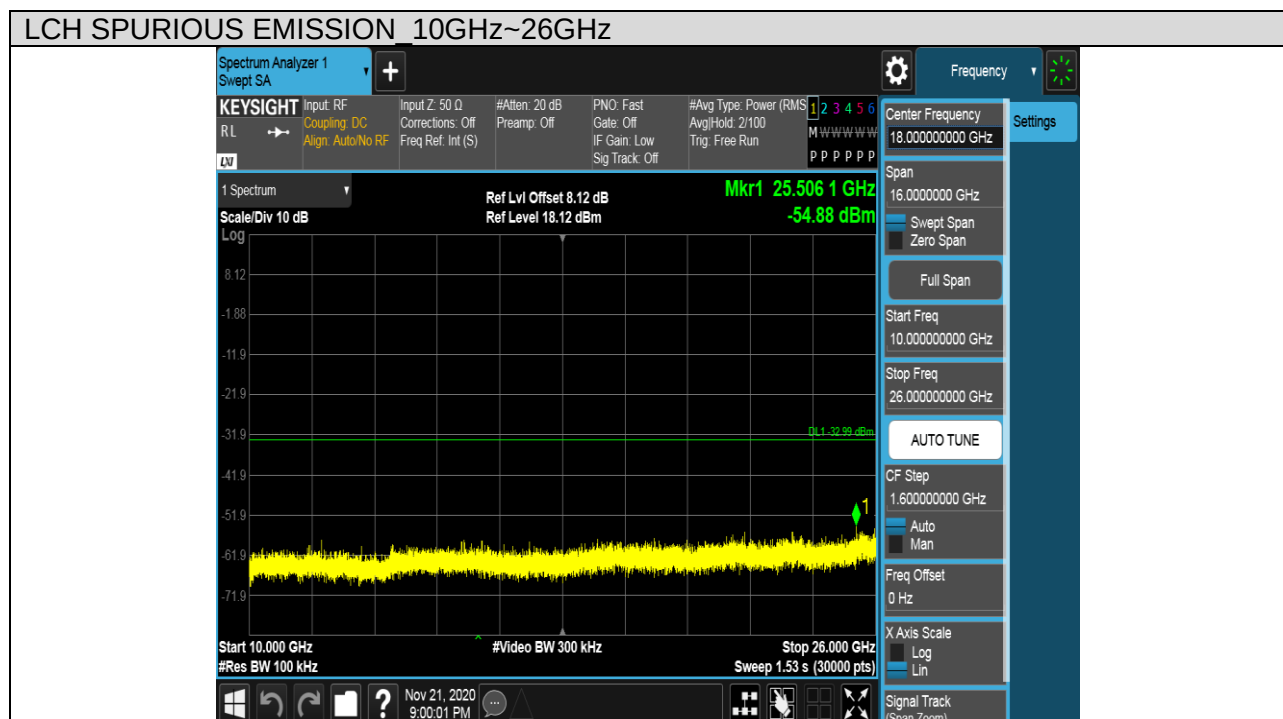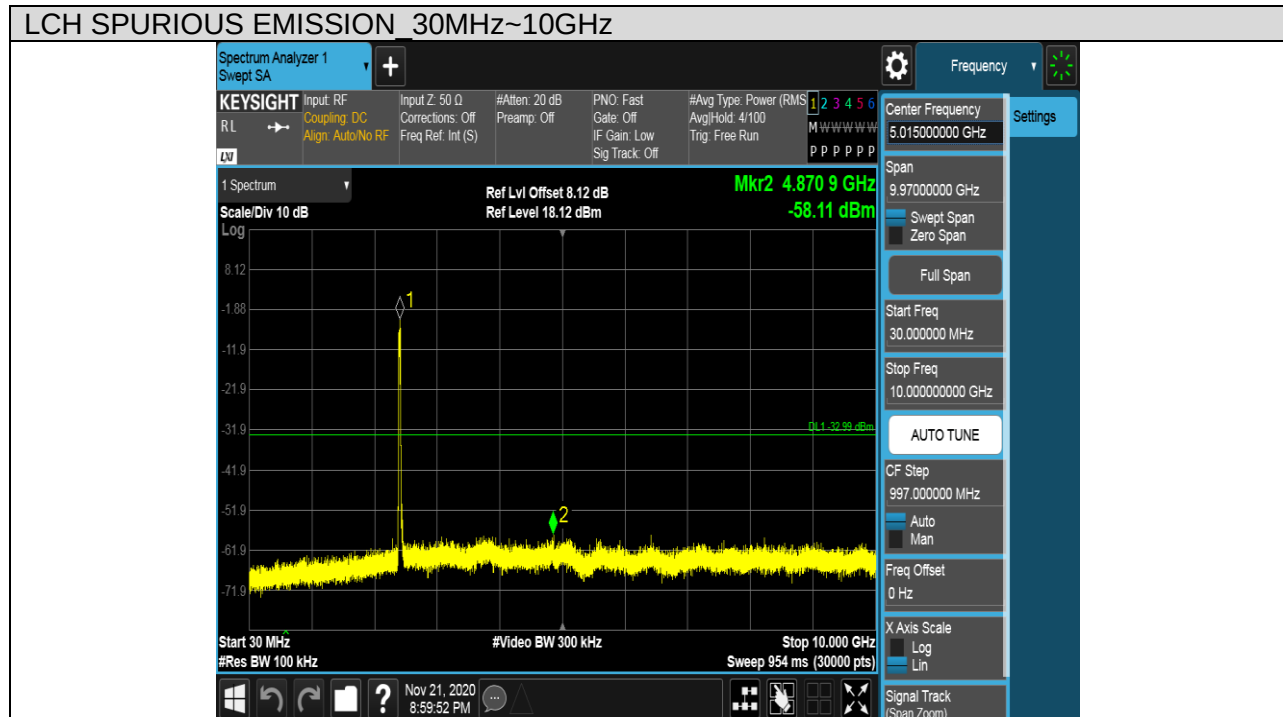





Test Mode	Channel	Verdict
11N HT40	MCH	PASS

Pref test Plot

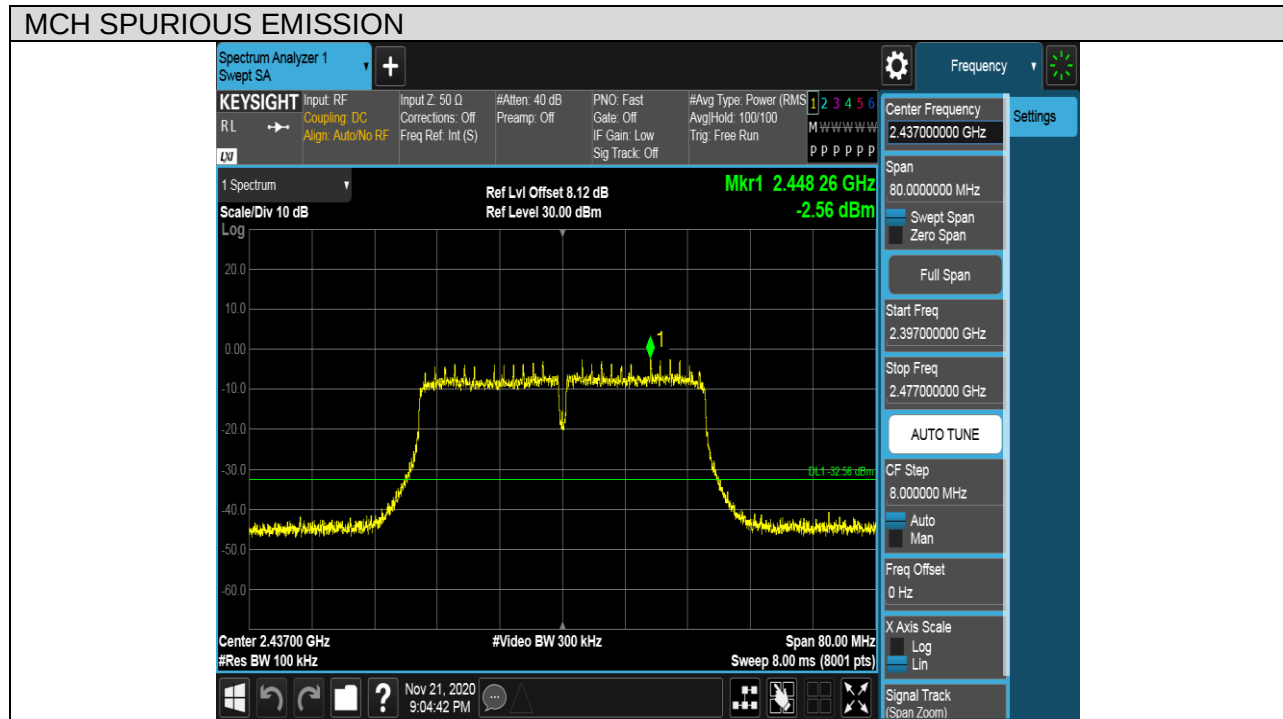




Puw test Plot

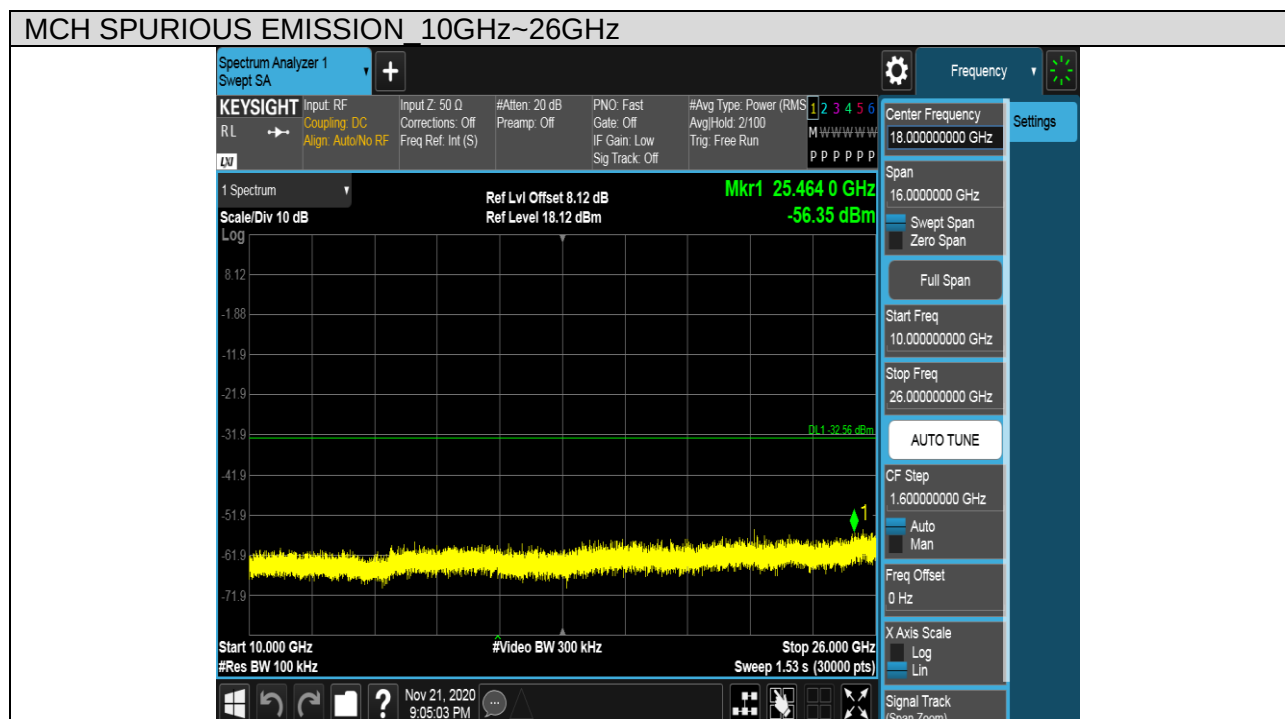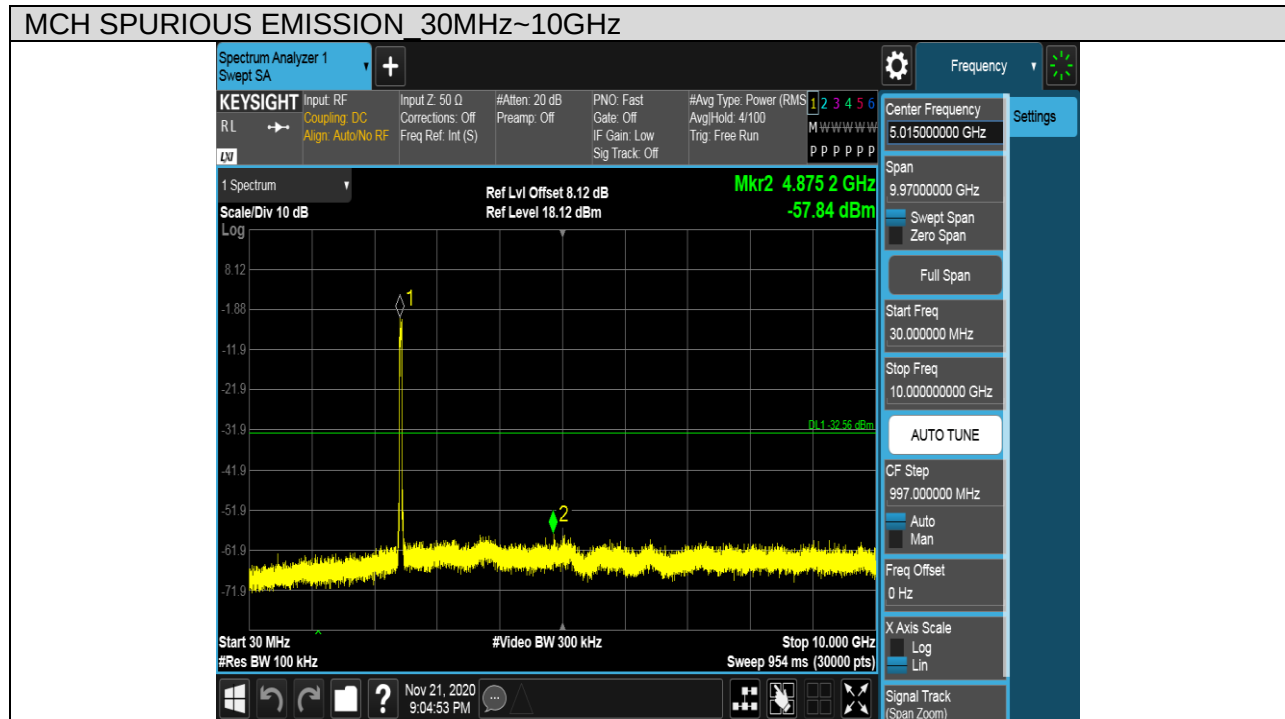





Test Mode	Channel	Verdict
11N HT40	HCH	PASS

Pref test Plot

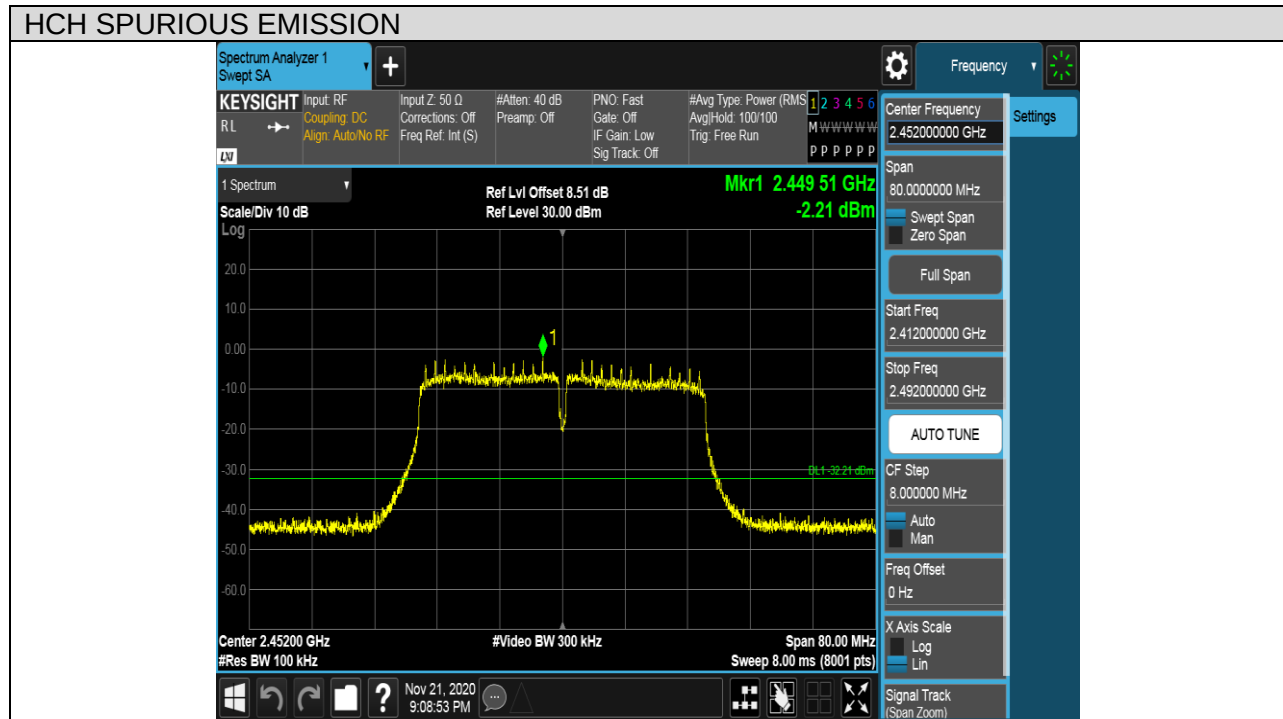



Puw test Plot

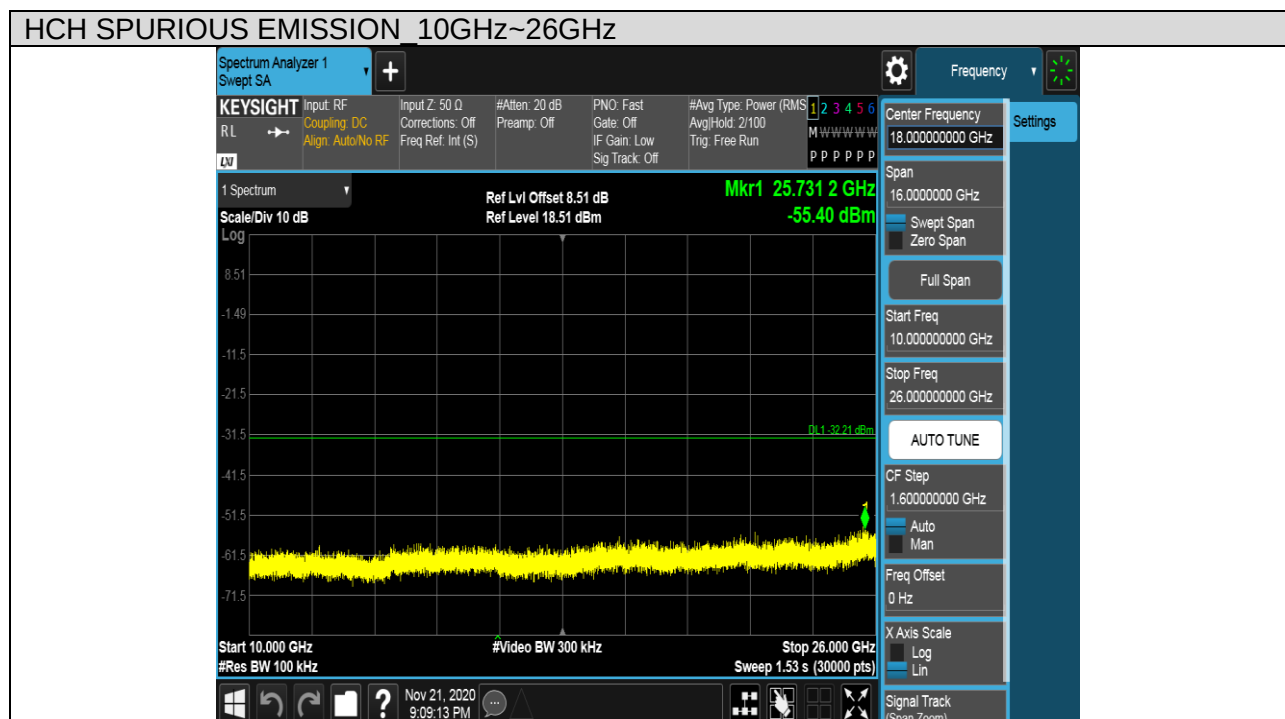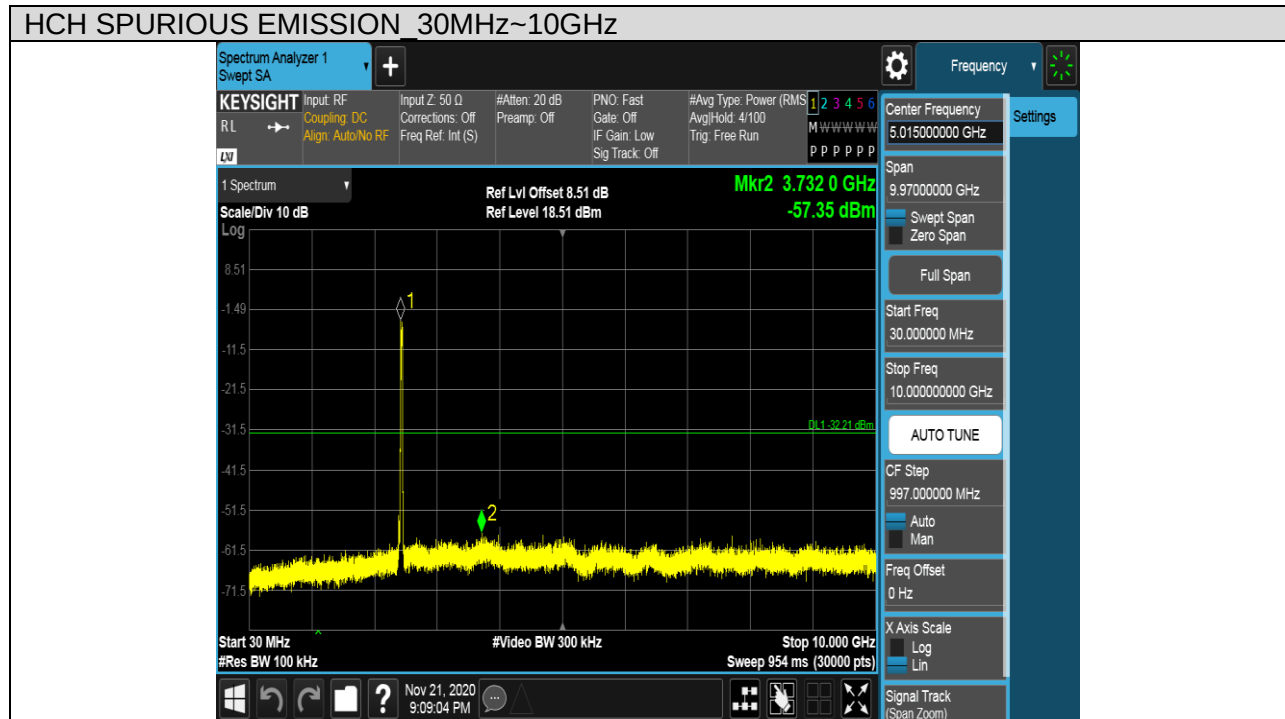



7.6. RADIATED TEST RESULTS

7.6.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

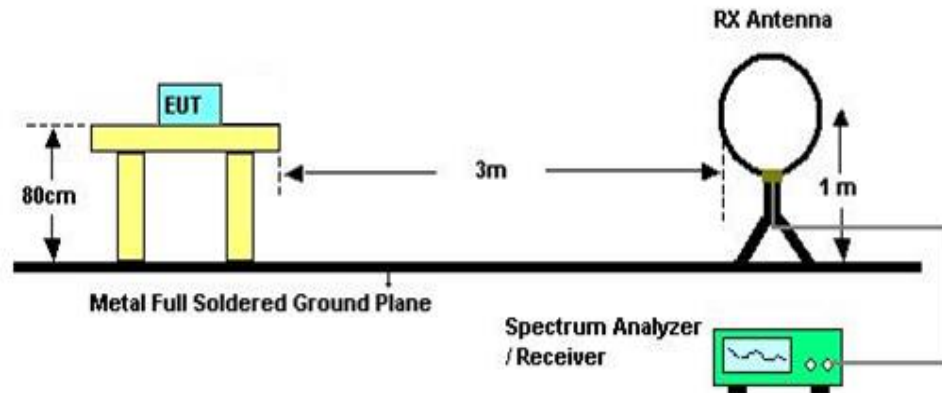


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

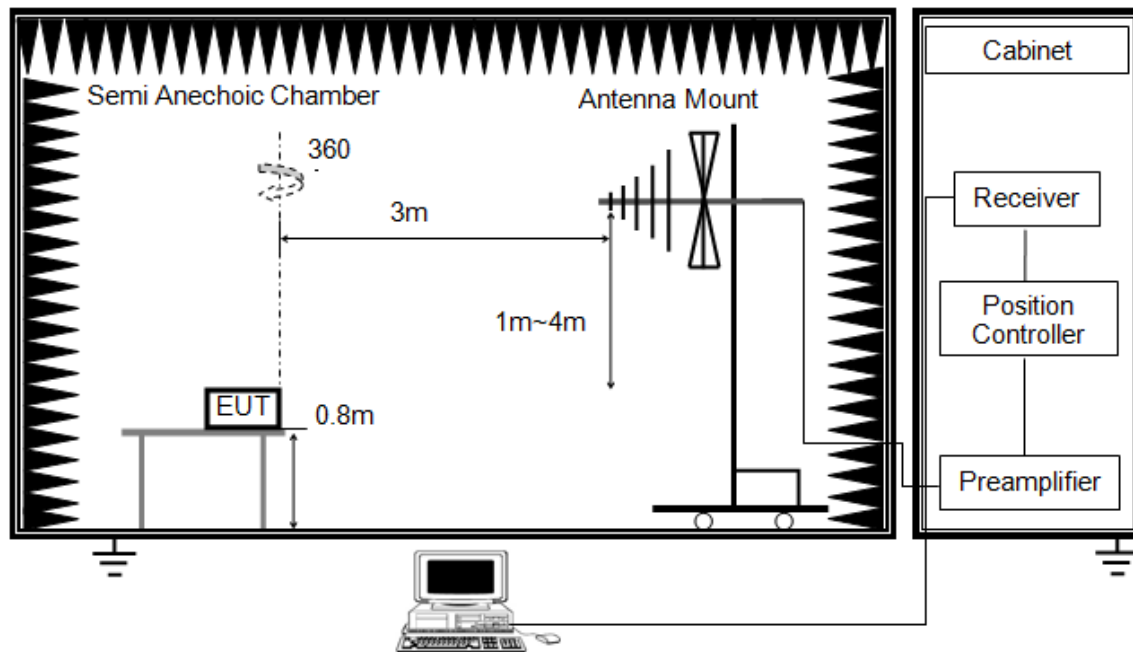


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

Above 1G

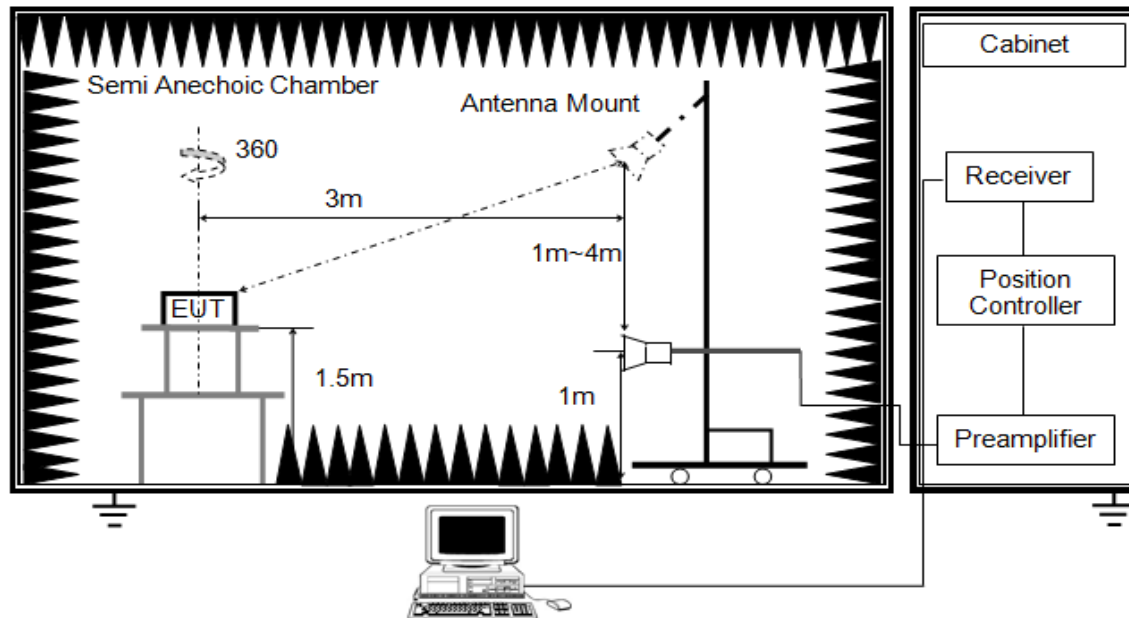


The setting of the spectrum analyser

RBW	1M
VBW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak/Average(10Hz)
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with set $VBW \leq RBW/100$, but not less than 10Hz video bandwidth with peak detector, max hold to be run for at least 50 traces for average measurements.
8. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

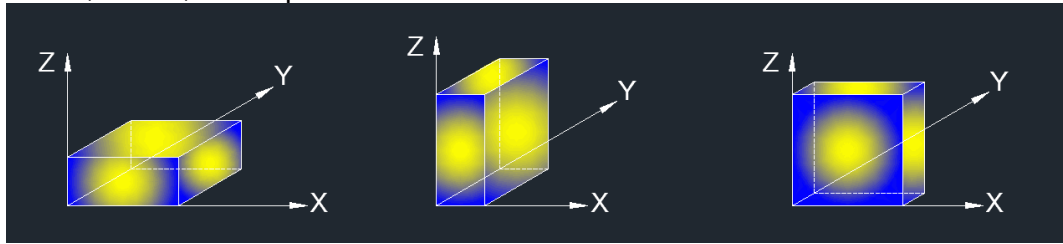

Note : For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



7.6.2.TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 12V

7.6.3.RESTRICTED BANDEDGE


Test Result Table

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS



Test Graphs

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

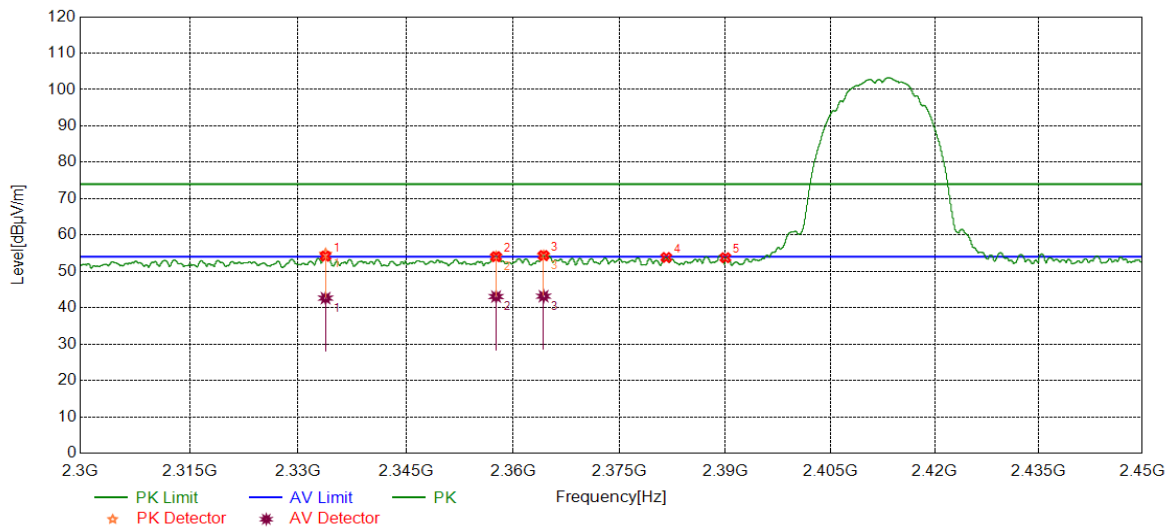


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2333.8075	41.59	13.20	54.79	74.00	19.21	peak
		29.44	13.20	42.64	54.00	11.36	average
2	2357.6072	40.57	13.45	54.02	74.00	19.98	peak
		29.62	13.45	43.07	54.00	10.93	average
3	2364.2830	40.78	13.49	54.27	74.00	19.73	peak
		29.68	13.49	43.17	54.00	10.83	average
4	2381.6102	40.13	13.69	53.82	74.00	20.18	peak
5	2390.0000	40.00	13.75	53.75	74.00	20.25	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

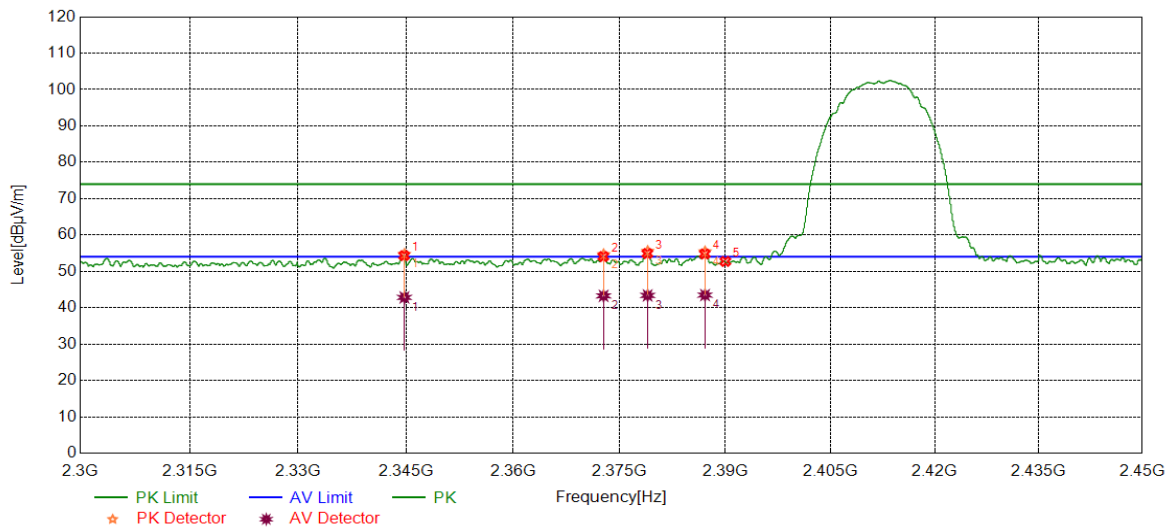


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2344.7816	41.35	13.34	54.69	74.00	19.31	peak
		29.49	13.34	42.83	54.00	11.17	average
2	2372.7413	41.07	13.56	54.63	74.00	19.37	peak
		29.71	13.56	43.27	54.00	10.73	average
3	2378.9671	41.87	13.66	55.53	74.00	18.47	peak
		29.73	13.66	43.39	54.00	10.61	average
4	2387.1056	41.65	13.75	55.40	74.00	18.60	peak
		29.73	13.75	43.48	54.00	10.52	average
5	2390.0000	38.98	13.75	52.73	74.00	21.27	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

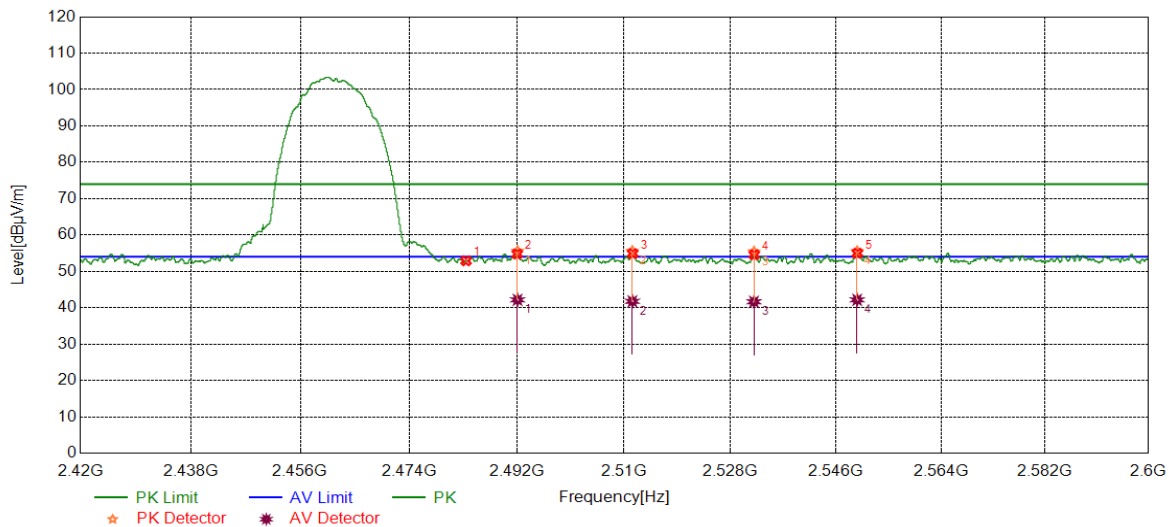


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	39.39	13.51	52.90	74.00	21.10	peak
2	2492.1055	41.96	13.59	55.55	74.00	18.45	peak
		28.58	13.59	42.17	54.00	11.83	average
3	2511.3992	41.81	13.73	55.54	74.00	18.46	peak
		28.04	13.73	41.77	54.00	12.23	average
4	2531.9933	41.56	13.83	55.39	74.00	18.61	peak
		27.81	13.83	41.64	54.00	12.36	average
5	2549.5991	41.55	13.94	55.49	74.00	18.51	peak
		28.23	13.94	42.17	54.00	11.83	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

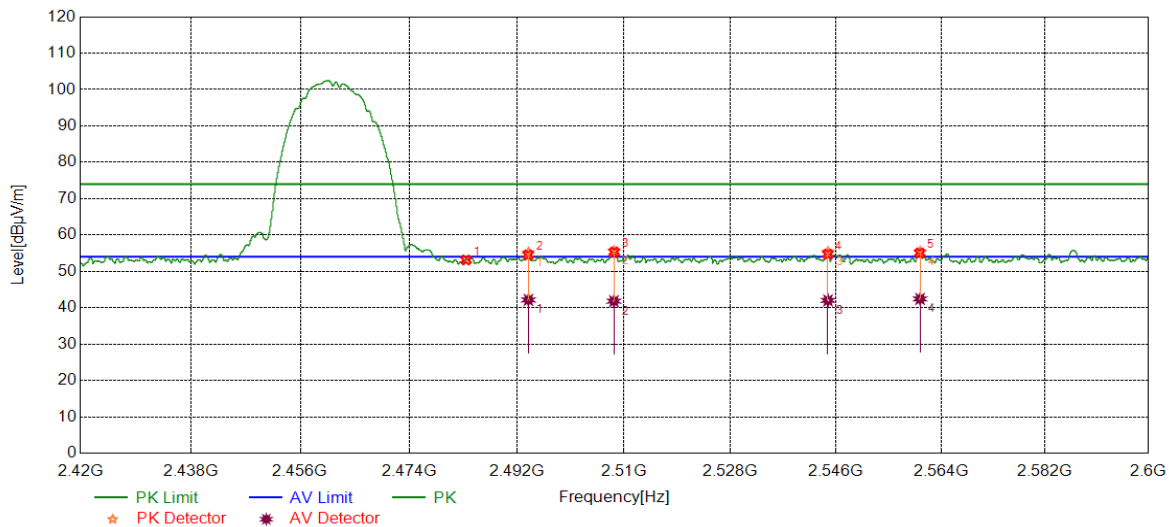


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	39.62	13.51	53.13	74.00	20.87	peak
2	2493.9293	41.48	13.61	55.09	74.00	18.91	peak
		28.54	13.61	42.15	54.00	11.85	average
3	2508.2860	41.84	13.71	55.55	74.00	18.45	peak
		28.10	13.71	41.81	54.00	12.19	average
4	2544.6028	41.34	13.91	55.25	74.00	18.75	peak
		28.11	13.91	42.02	54.00	11.98	average
5	2560.3919	41.35	13.97	55.32	74.00	18.68	peak
		28.45	13.97	42.42	54.00	11.58	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

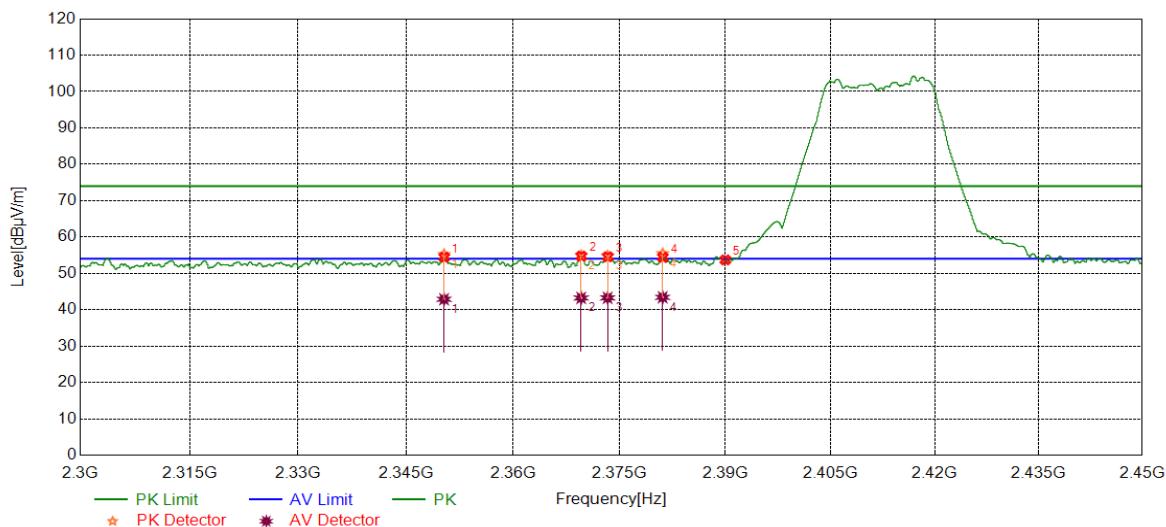


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2350.3199	41.81	13.38	55.19	74.00	18.81	peak
		29.50	13.38	42.88	54.00	11.12	average
2	2369.5786	41.35	13.55	54.90	74.00	19.10	peak
		29.69	13.55	43.24	54.00	10.76	average
3	2373.3103	41.24	13.57	54.81	74.00	19.19	peak
		29.70	13.57	43.27	54.00	10.73	average
4	2381.0925	41.74	13.69	55.43	74.00	18.57	peak
		29.72	13.69	43.41	54.00	10.59	average
5	2390.0000	39.95	13.75	53.70	74.00	20.30	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

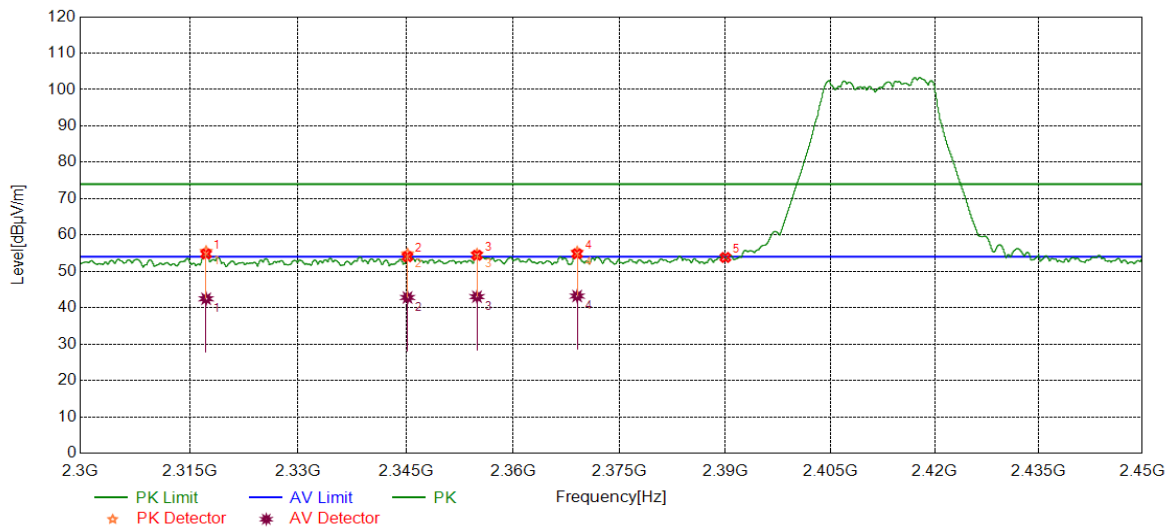


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2317.2747	42.52	12.98	55.50	74.00	18.50	peak
		29.49	12.98	42.47	54.00	11.53	average
2	2345.2157	41.49	13.34	54.83	74.00	19.17	peak
		29.47	13.34	42.81	54.00	11.19	average
3	2354.9294	41.26	13.45	54.71	74.00	19.29	peak
		29.58	13.45	43.03	54.00	10.97	average
4	2369.0124	41.79	13.53	55.32	74.00	18.68	peak
		29.68	13.53	43.21	54.00	10.79	average
5	2390.0000	40.08	13.75	53.83	74.00	20.17	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

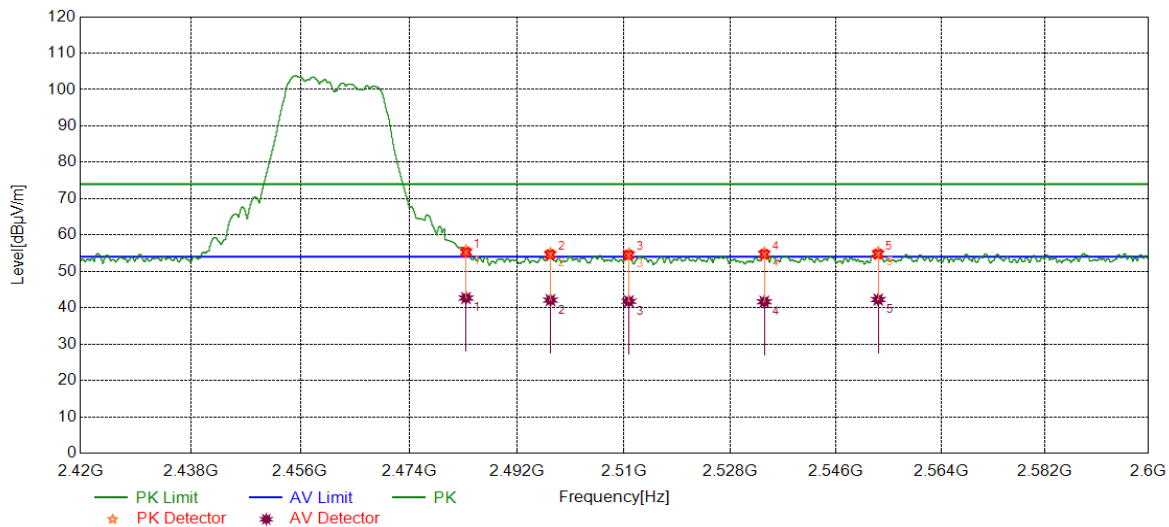


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	42.22	13.50	55.72	74.00	18.28	peak
		29.16	13.50	42.66	54.00	11.34	average
2	2497.6197	41.32	13.64	54.96	74.00	19.04	peak
		28.46	13.64	42.10	54.00	11.90	average
3	2510.8150	41.13	13.73	54.86	74.00	19.14	peak
		28.04	13.73	41.77	54.00	12.23	average
4	2533.7557	41.26	13.84	55.10	74.00	18.90	peak
		27.80	13.84	41.64	54.00	12.36	average
5	2553.2092	41.27	13.95	55.22	74.00	18.78	peak
		28.29	13.95	42.24	54.00	11.76	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

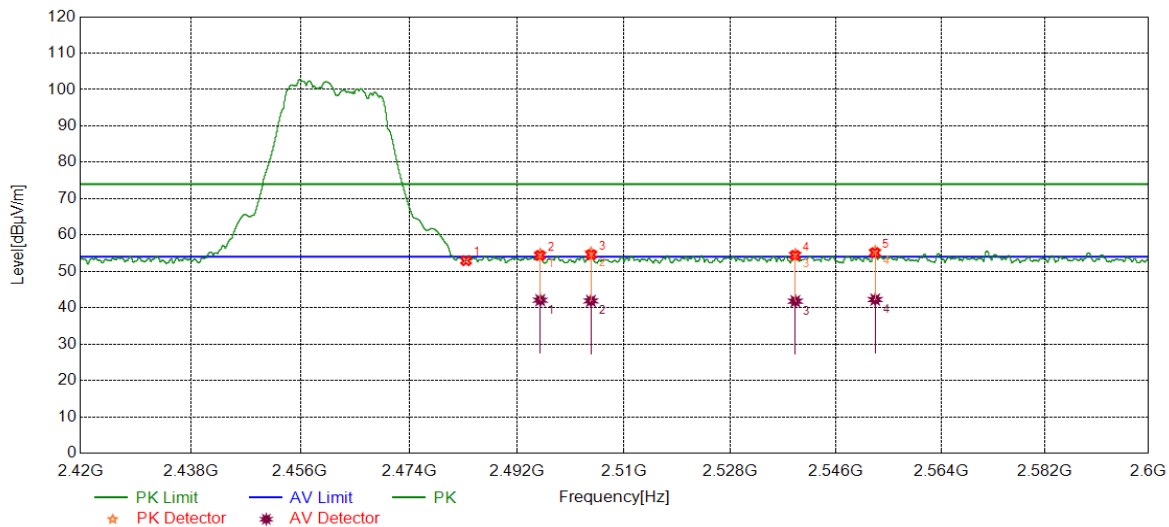


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	39.43	13.51	52.94	74.00	21.06	peak
2	2495.9095	42.23	13.61	54.84	74.00	18.16	peak
		28.47	13.61	42.08	54.00	11.92	average
3	2504.4145	41.78	13.67	55.15	74.00	18.55	peak
		28.21	13.67	41.88	54.00	12.12	average
4	2539.0340	41.83	13.88	54.71	74.00	18.29	peak
		27.91	13.88	41.79	54.00	12.21	average
5	2552.6872	41.57	13.95	55.52	74.00	18.48	peak
		28.29	13.95	42.24	54.00	11.76	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

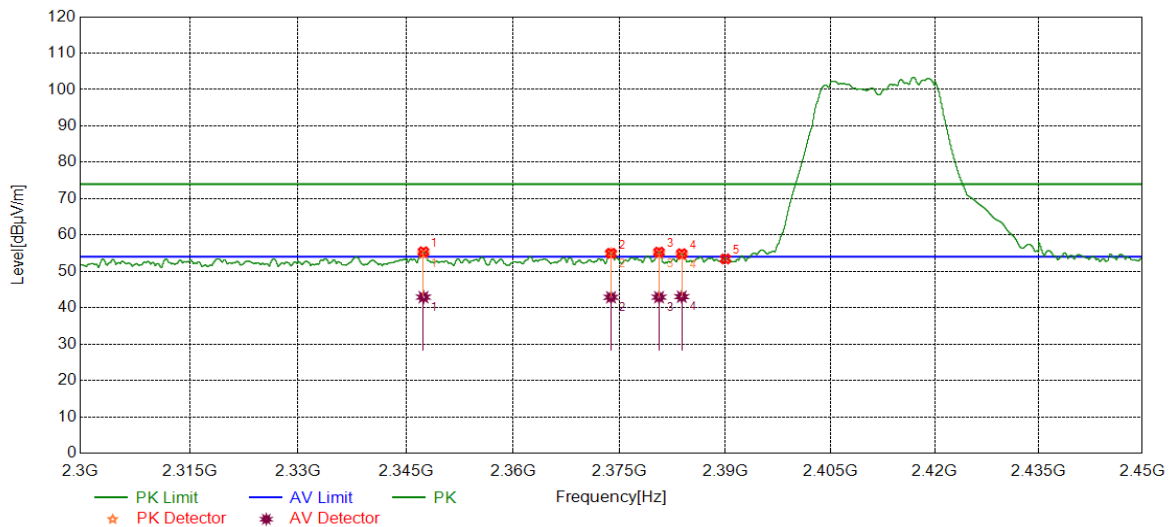


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2347.4434	41.55	13.36	54.91	74.00	19.09	peak
		29.55	13.36	42.91	54.00	11.09	average
2	2373.7905	41.29	13.58	54.87	74.00	19.13	peak
		29.29	13.58	42.87	54.00	11.13	average
3	2380.5788	41.22	13.68	54.90	74.00	19.10	peak
		29.22	13.68	42.90	54.00	11.10	average
4	2383.8042	40.72	13.71	54.43	74.00	19.57	peak
		29.32	13.71	43.03	54.00	10.97	average
5	2390.0000	39.68	13.75	53.43	74.00	20.57	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

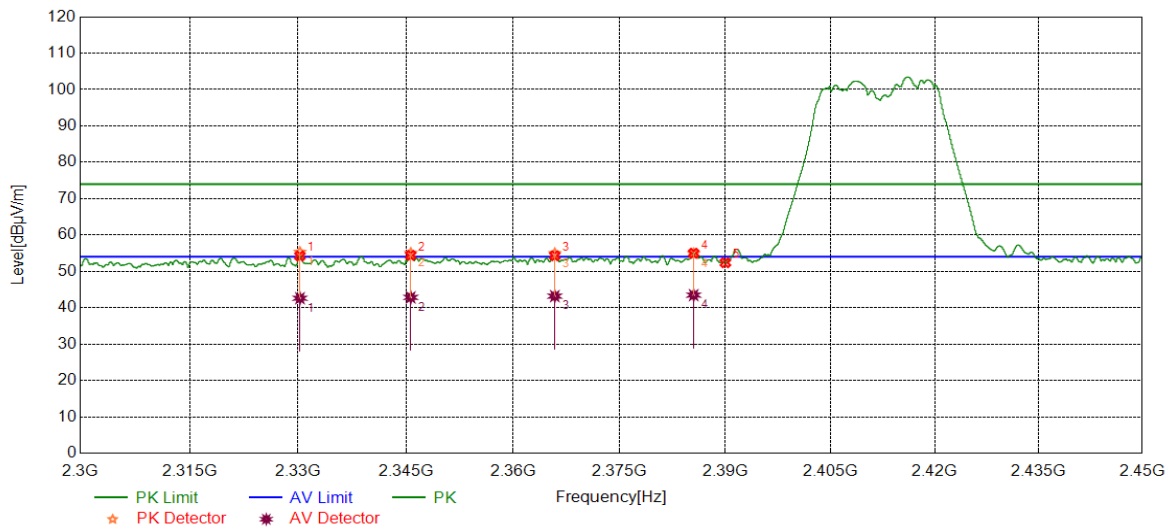


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2330.2520	42.13	13.14	55.27	74.00	18.73	peak
		29.47	13.14	42.61	54.00	11.39	average
2	2345.6665	41.65	13.35	55.00	74.00	19.00	peak
		29.49	13.35	42.84	54.00	11.16	average
3	2365.8627	41.41	13.51	54.92	74.00	19.08	peak
		29.68	13.51	43.19	54.00	10.81	average
4	2385.4964	41.13	13.74	54.87	74.00	19.13	peak
		29.73	13.74	43.47	54.00	10.53	average
5	2390.0000	38.62	13.75	52.37	74.00	21.63	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

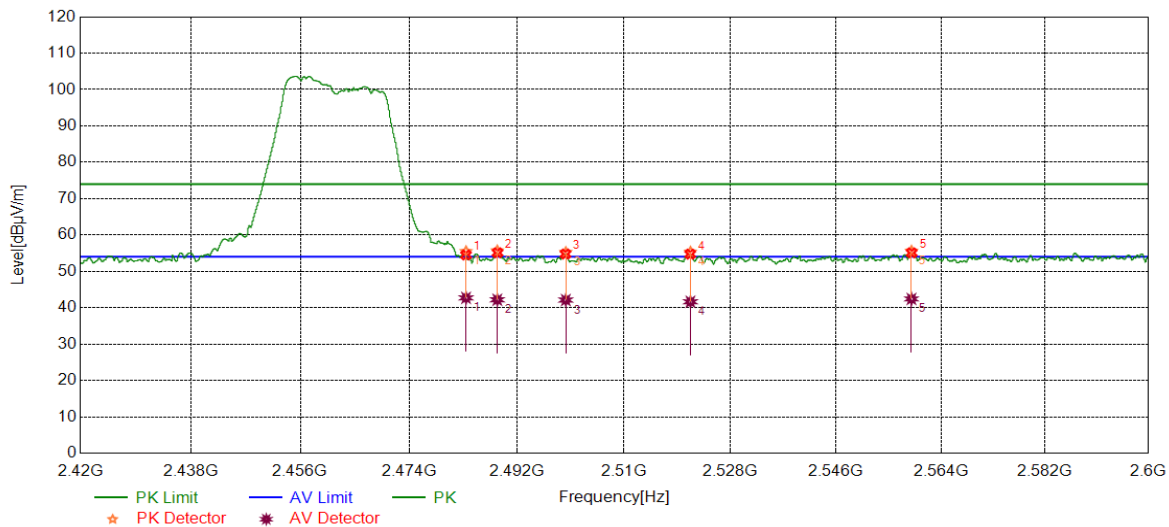


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	41.97	13.50	55.47	74.00	18.53	peak
		29.21	13.50	42.71	54.00	11.29	average
2	2488.7170	42.14	13.54	55.68	74.00	18.32	peak
		28.65	13.54	42.19	54.00	11.81	average
3	2500.1939	41.58	13.68	55.26	74.00	18.74	peak
		28.44	13.68	42.12	54.00	11.88	average
4	2521.2102	41.52	13.81	55.33	74.00	18.67	peak
		27.83	13.81	41.64	54.00	12.36	average
5	2558.9161	41.62	13.99	55.61	74.00	18.39	peak
		28.43	13.99	42.42	54.00	11.58	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

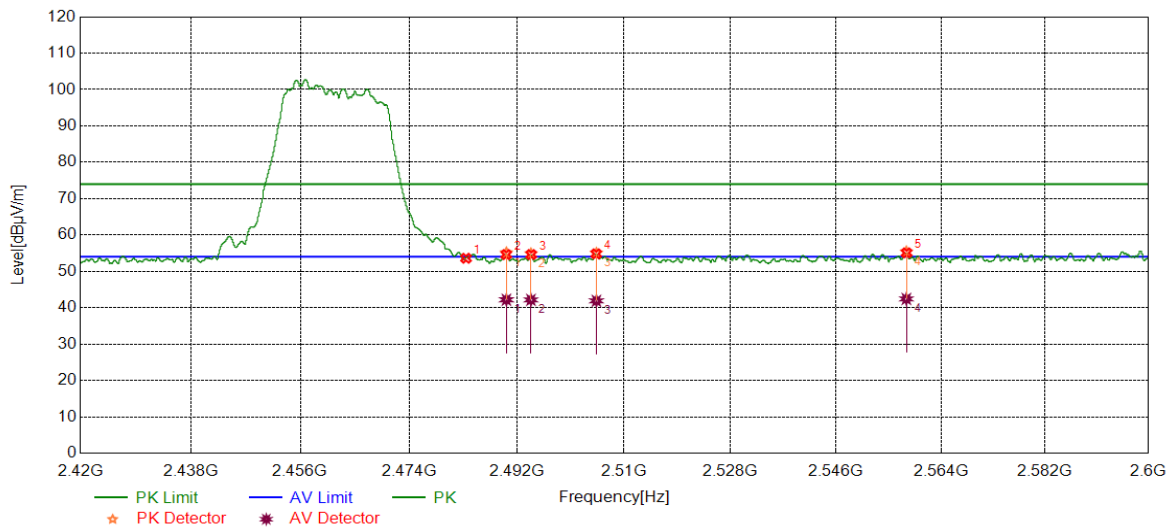


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	40.10	13.51	53.61	74.00	20.39	peak
2	2490.2388	41.57	13.56	55.13	74.00	18.87	peak
		28.63	13.56	42.19	54.00	11.81	average
3	2494.3515	41.24	13.61	54.85	74.00	19.15	peak
		28.55	13.61	42.16	54.00	11.84	average
4	2505.3393	41.34	13.68	55.02	74.00	18.98	peak
		28.22	13.68	41.90	54.00	12.10	average
5	2558.0419	41.37	14.01	55.38	74.00	18.62	peak
		28.41	14.01	42.42	54.00	11.58	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

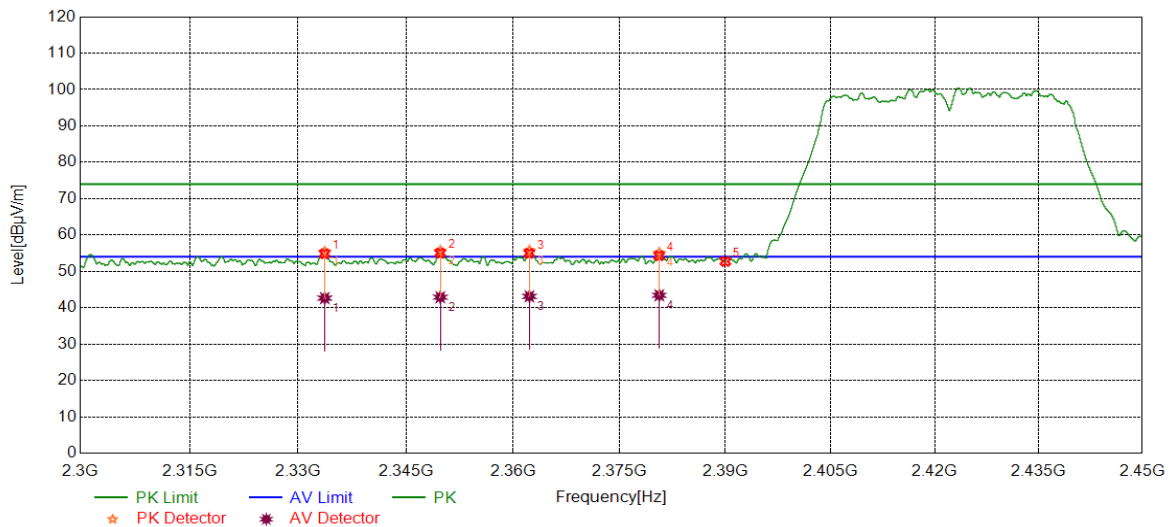


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2333.6943	42.14	13.20	55.34	74.00	18.66	peak
		29.44	13.20	42.64	54.00	11.36	average
2	2349.8026	42.21	13.38	55.59	74.00	18.41	peak
		29.52	13.38	42.90	54.00	11.10	average
3	2362.2916	42.16	13.47	55.63	74.00	18.37	peak
		29.66	13.47	43.13	54.00	10.87	average
4	2380.6127	41.35	13.69	55.04	74.00	18.96	peak
		29.73	13.69	43.42	54.00	10.58	average
5	2390.0000	38.98	13.75	52.73	74.00	21.27	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

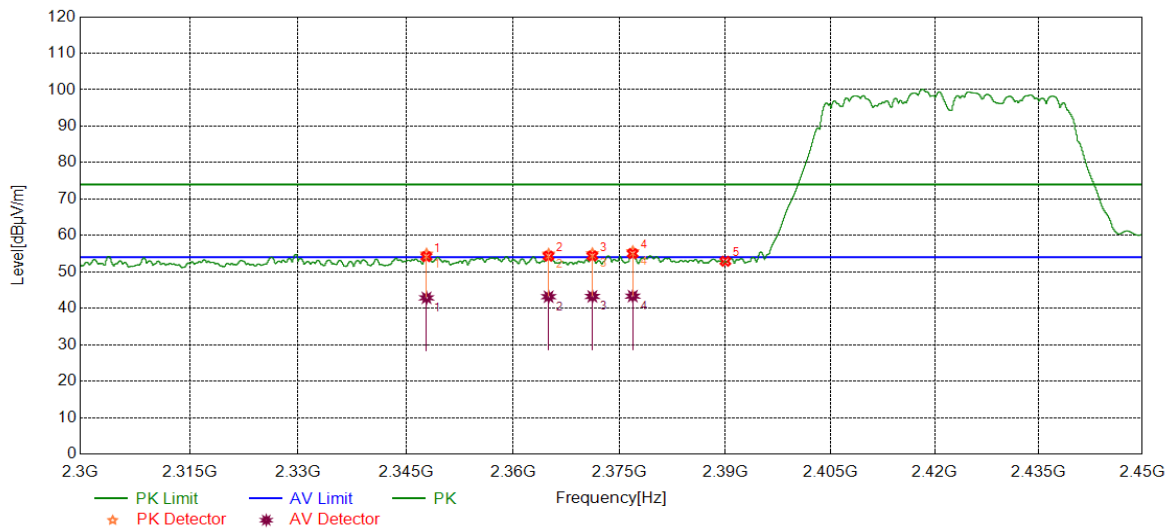


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2347.8690	41.53	13.37	54.90	74.00	19.10	peak
		29.50	13.37	42.87	54.00	11.13	average
2	2364.9899	41.42	13.49	54.91	74.00	19.09	peak
		29.69	13.49	43.18	54.00	10.82	average
3	2371.1594	41.46	13.55	55.01	74.00	18.99	peak
		29.71	13.55	43.26	54.00	10.74	average
4	2376.8601	41.93	13.64	55.57	74.00	18.43	peak
		29.70	13.64	43.34	54.00	10.66	average
5	2390.0000	39.17	13.75	52.92	74.00	21.08	peak

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

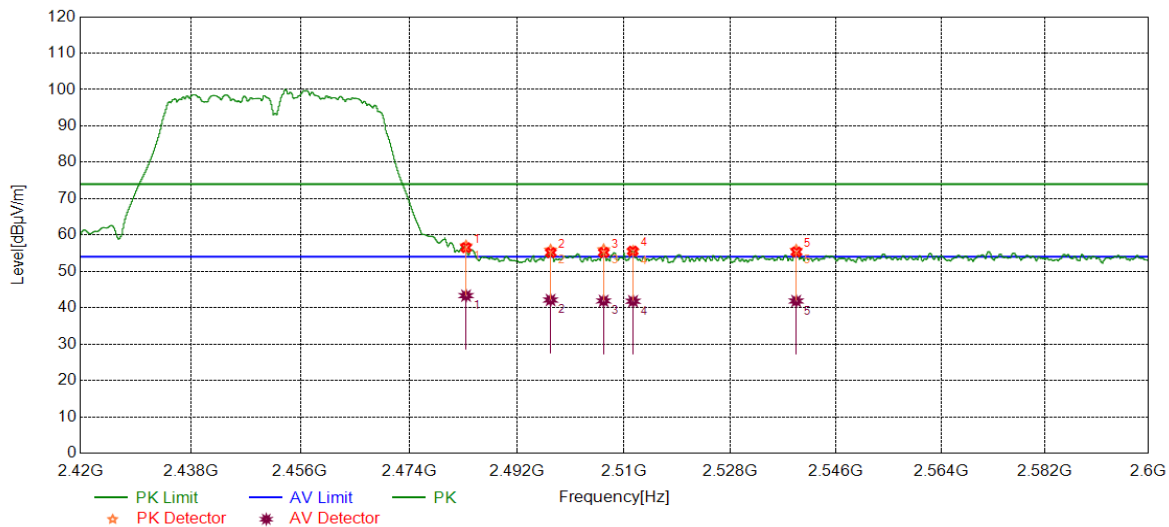


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	43.53	13.50	57.03	74.00	16.97	peak
		29.82	13.50	43.32	54.00	10.68	average
2	2497.6403	42.24	13.64	55.88	74.00	18.12	peak
		28.49	13.64	42.13	54.00	11.87	average
3	2506.5567	42.26	13.70	55.96	74.00	18.04	peak
		28.18	13.70	41.88	54.00	12.12	average
4	2511.5170	41.79	13.73	55.52	74.00	18.48	peak
		28.06	13.73	41.79	54.00	12.21	average
5	2539.1809	41.96	13.88	55.84	74.00	18.16	peak
		27.97	13.88	41.85	54.00	12.15	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

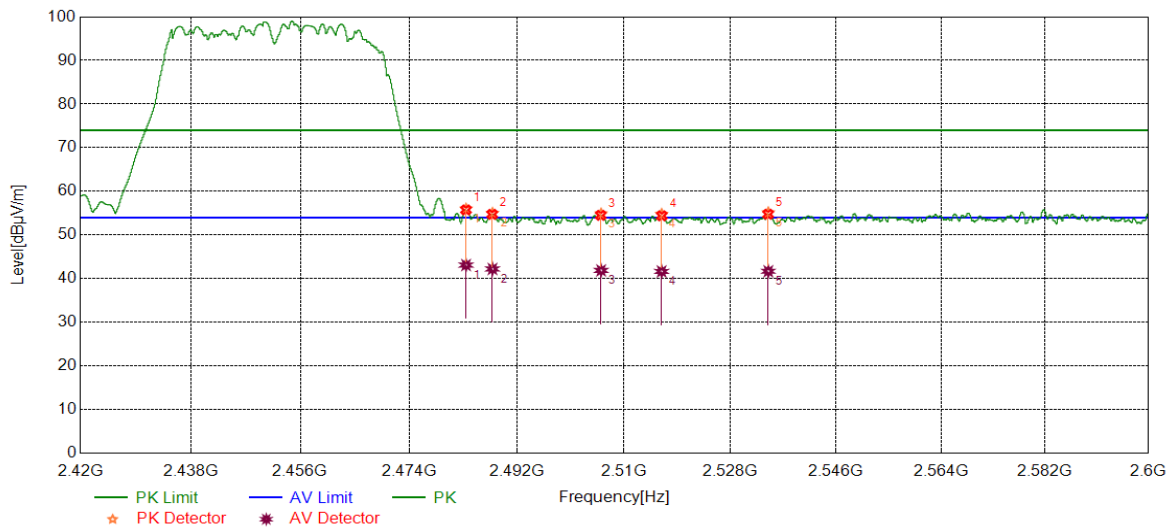

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	42.48	13.50	55.98	74.00	18.02	peak
		29.61	13.50	43.11	54.00	10.89	average
2	2487.9167	41.46	13.54	55.00	74.00	19.00	peak
		28.68	13.54	42.22	54.00	11.78	average
3	2506.1345	41.19	13.69	54.88	74.00	19.12	peak
		28.19	13.69	41.88	54.00	12.12	average
4	2516.3368	41.03	13.76	54.79	74.00	19.21	peak
		27.89	13.76	41.65	54.00	12.35	average
5	2534.4319	41.26	13.85	55.11	74.00	18.89	peak
		27.84	13.85	41.69	54.00	12.31	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit



7.6.4.SPURIOUS EMISSIONS

Test Result Table:

1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

2) For 9KHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:


1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.



Part I: 1GHz~3GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

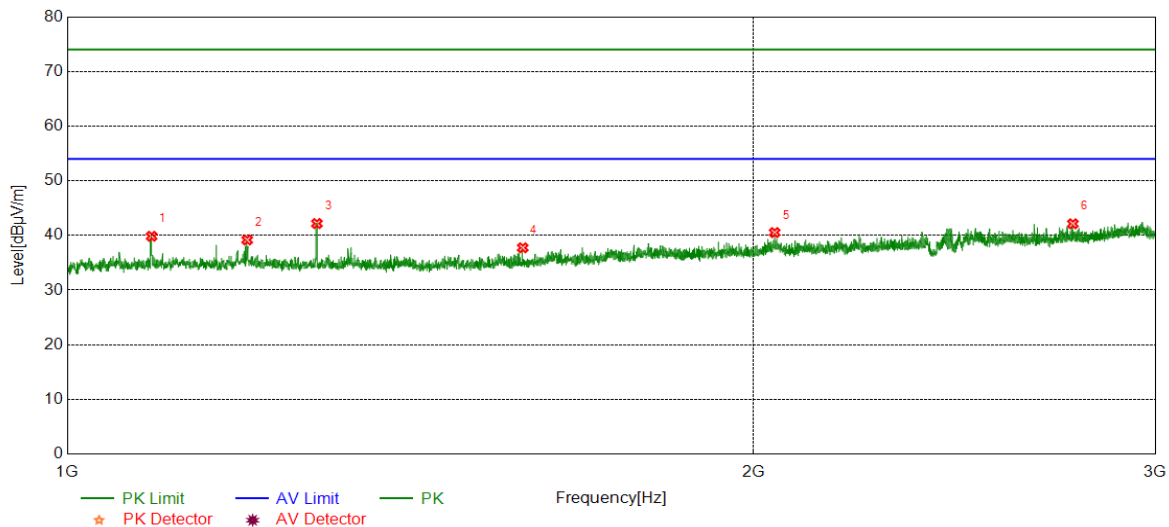


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1089.0111	45.41	-5.56	39.85	74.00	34.15	peak
2	1199.2749	44.72	-5.54	39.18	74.00	34.82	peak
3	1286.7858	47.83	-5.65	42.18	74.00	31.82	peak
4	1584.0730	43.06	-5.32	37.74	74.00	36.26	peak
5	2042.8804	43.04	-2.52	40.52	74.00	33.48	peak
6	2760.7201	42.42	-0.29	42.13	74.00	31.87	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

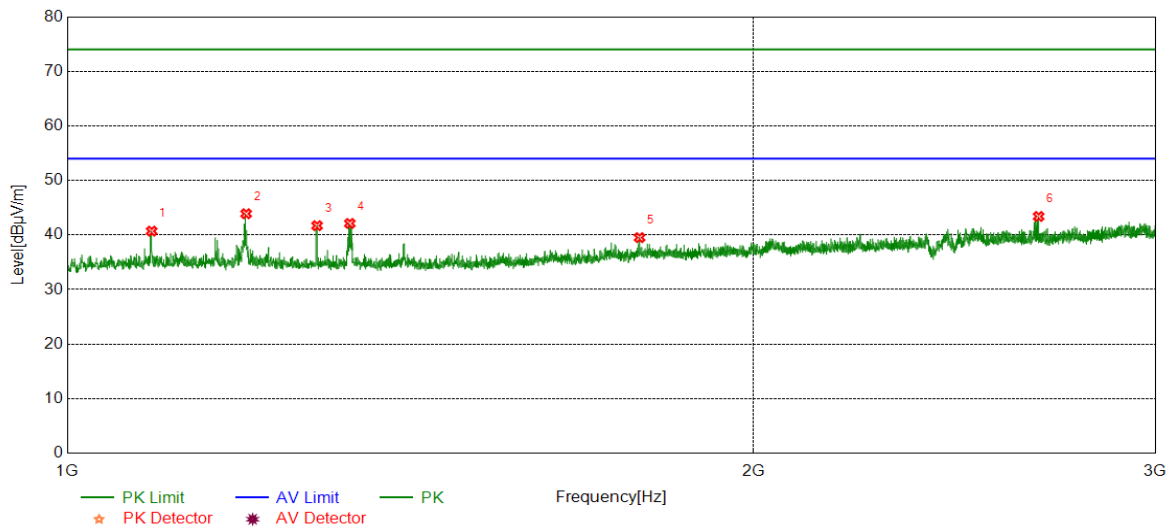


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1089.0111	46.27	-5.56	40.71	74.00	33.29	peak
2	1198.0248	49.44	-5.54	43.90	74.00	30.10	peak
3	1287.0359	47.37	-5.66	41.71	74.00	32.29	peak
4	1330.2913	47.74	-5.62	42.12	74.00	31.88	peak
5	1782.3478	43.45	-3.93	39.52	74.00	34.48	peak
6	2666.9584	44.16	-0.76	43.40	74.00	30.60	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

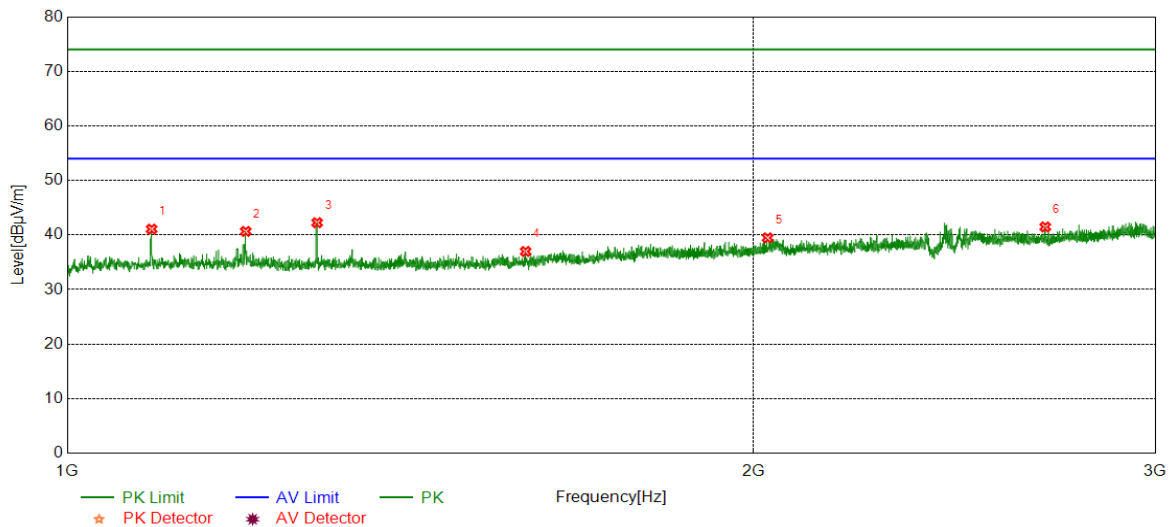


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1089.0111	46.64	-5.56	41.08	74.00	32.92	peak
2	1197.5247	46.20	-5.54	40.66	74.00	33.34	peak
3	1287.0359	47.92	-5.66	42.26	74.00	31.74	peak
4	1588.5736	42.39	-5.41	36.98	74.00	37.02	peak
5	2028.3785	42.23	-2.75	39.48	74.00	34.52	peak
6	2684.7106	42.15	-0.67	41.48	74.00	32.52	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

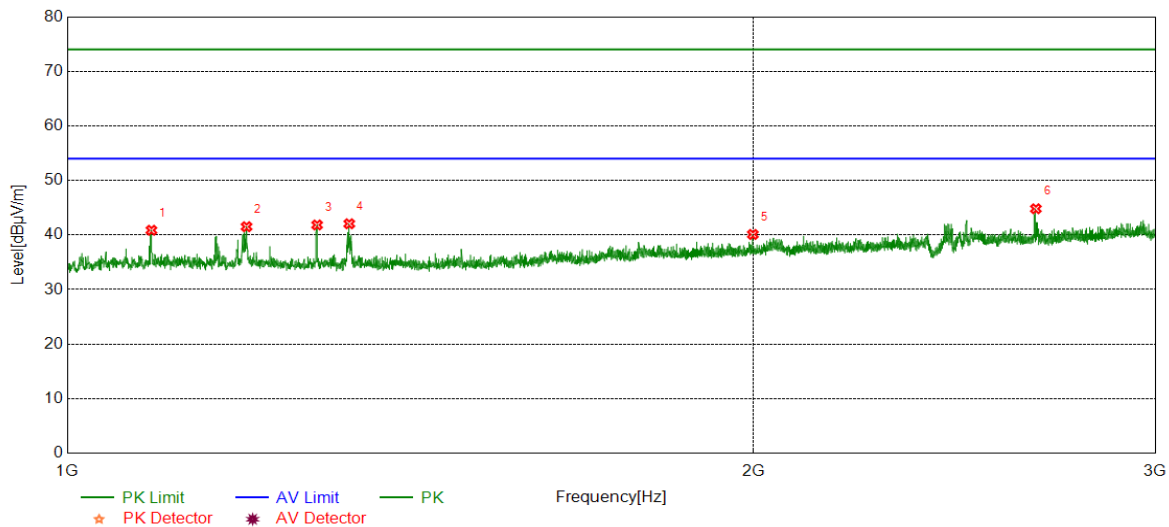


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1088.7611	46.43	-5.56	40.87	74.00	33.13	peak
2	1198.5248	47.06	-5.54	41.52	74.00	32.48	peak
3	1287.0359	47.50	-5.66	41.84	74.00	32.16	peak
4	1329.5412	47.68	-5.62	42.06	74.00	31.94	peak
5	1998.3748	43.13	-3.03	40.10	74.00	33.90	peak
6	2659.4574	45.57	-0.76	44.81	74.00	29.19	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

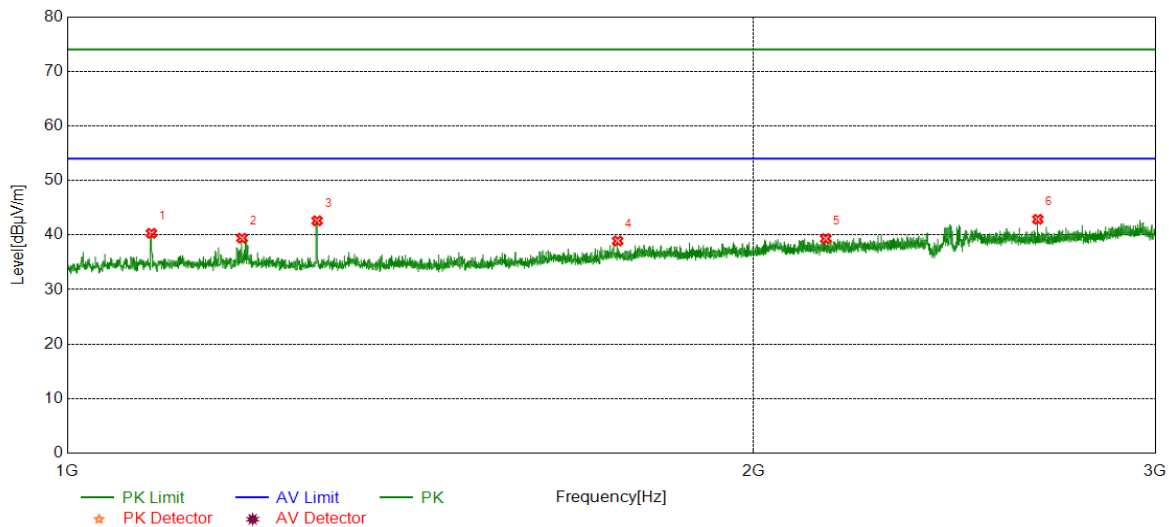


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1088.7611	45.87	-5.56	40.31	74.00	33.69	peak
2	1193.0241	44.97	-5.55	39.42	74.00	34.58	peak
3	1287.0359	48.27	-5.66	42.61	74.00	31.39	peak
4	1743.3429	43.30	-4.39	38.91	74.00	35.09	peak
5	2150.8939	41.83	-2.50	39.33	74.00	34.67	peak
6	2664.7081	43.63	-0.76	42.87	74.00	31.13	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

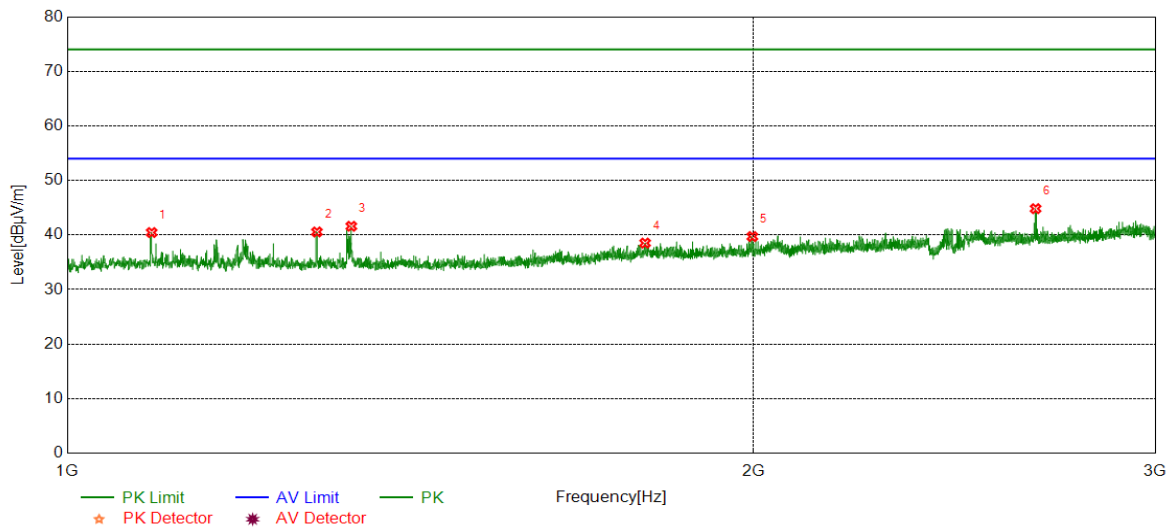


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1089.0111	46.01	-5.56	40.45	74.00	33.55	peak
2	1286.7858	46.21	-5.65	40.56	74.00	33.44	peak
3	1332.2915	47.23	-5.63	41.60	74.00	32.40	peak
4	1792.3490	42.48	-3.96	38.52	74.00	35.48	peak
5	1997.3747	42.75	-3.04	39.71	74.00	34.29	peak
6	2658.7073	45.60	-0.77	44.83	74.00	29.17	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

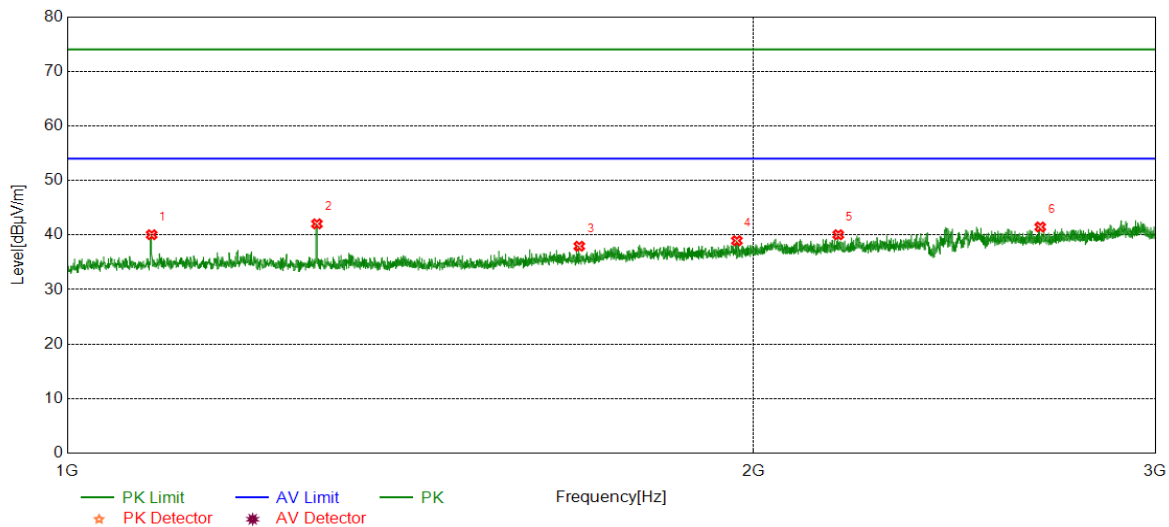


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1089.0111	45.61	-5.56	40.05	74.00	33.95	peak
2	1286.7858	47.70	-5.65	42.05	74.00	31.95	peak
3	1677.0846	42.78	-4.84	37.94	74.00	36.06	peak
4	1966.3708	42.20	-3.25	38.95	74.00	35.05	peak
5	2178.3973	42.38	-2.33	40.05	74.00	33.95	peak
6	2671.2089	42.22	-0.75	41.47	74.00	32.53	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

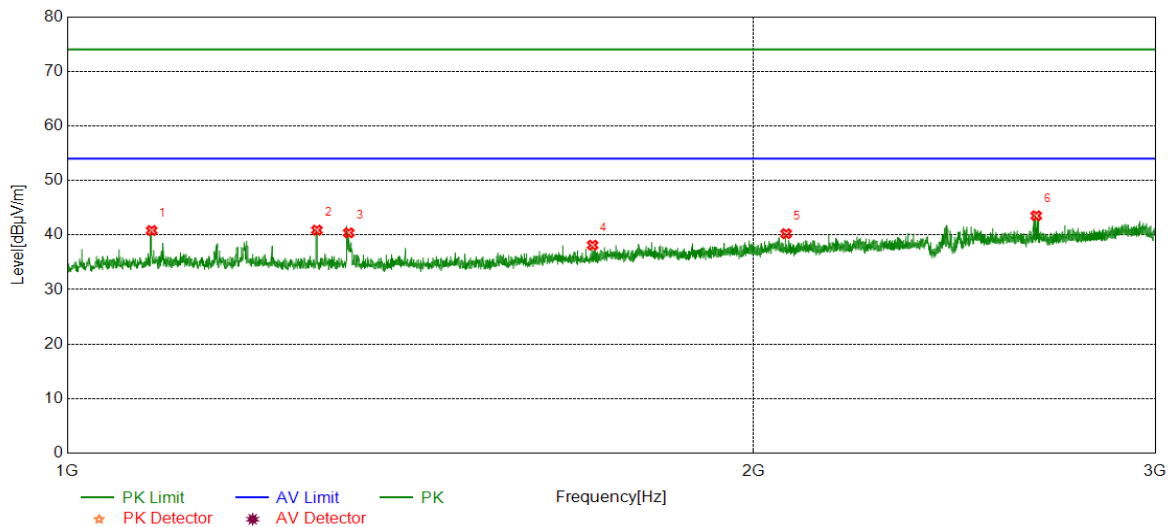


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1089.0111	46.38	-5.56	40.82	74.00	33.18	peak
2	1286.7858	46.54	-5.65	40.89	74.00	33.11	peak
3	1328.7911	46.01	-5.62	40.39	74.00	33.61	peak
4	1699.8375	42.80	-4.66	38.14	74.00	35.86	peak
5	2066.6333	43.00	-2.76	40.24	74.00	33.76	peak
6	2660.4576	44.29	-0.76	43.53	74.00	30.47	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

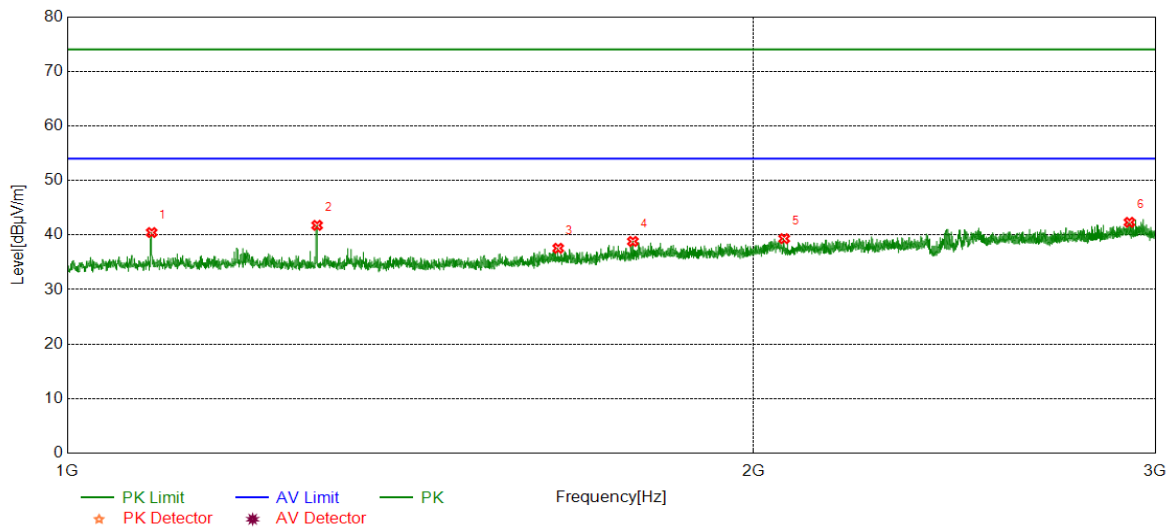

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1089.0111	46.01	-5.56	40.45	74.00	33.55	peak
2	1287.0359	47.43	-5.66	41.77	74.00	32.23	peak
3	1641.8302	42.59	-5.02	37.57	74.00	36.43	peak
4	1770.3463	43.03	-4.21	38.82	74.00	35.18	peak
5	2062.6328	42.06	-2.73	39.33	74.00	34.67	peak
6	2922.9904	41.76	0.56	42.32	74.00	31.68	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.