



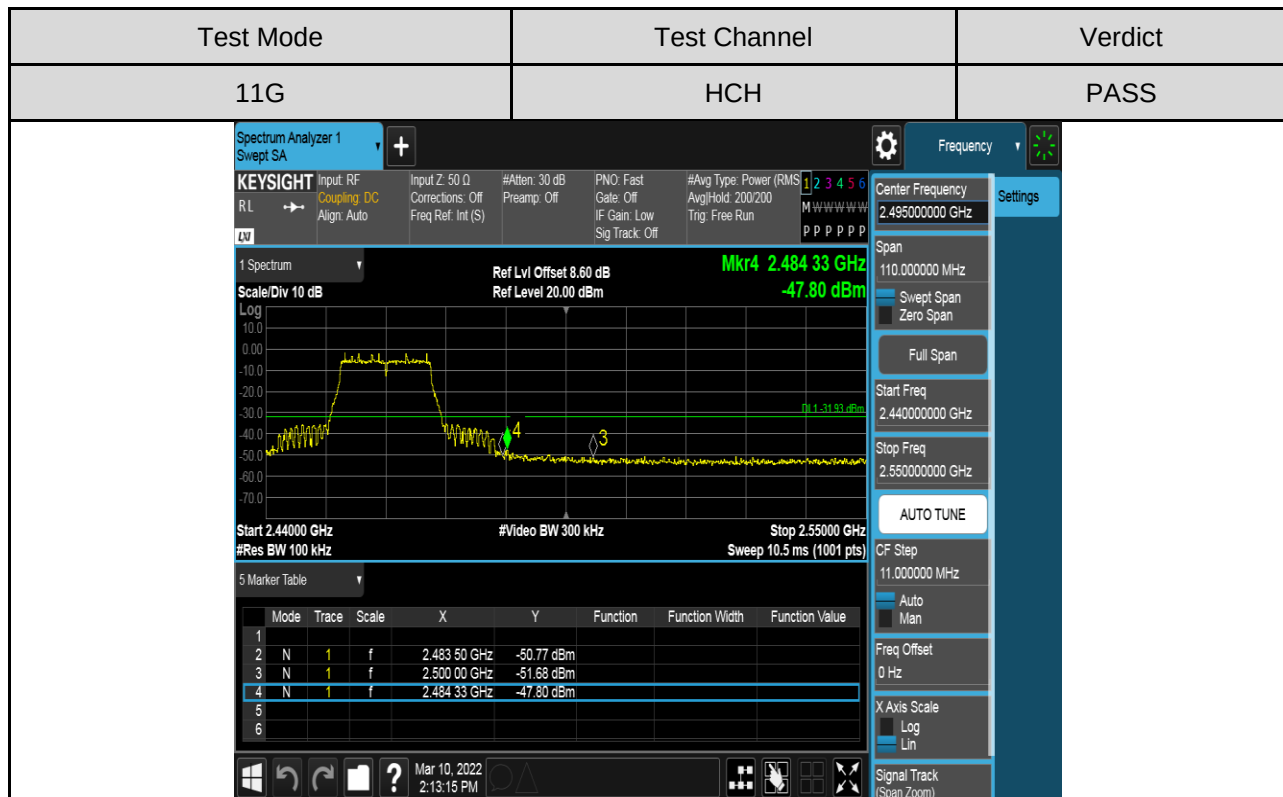
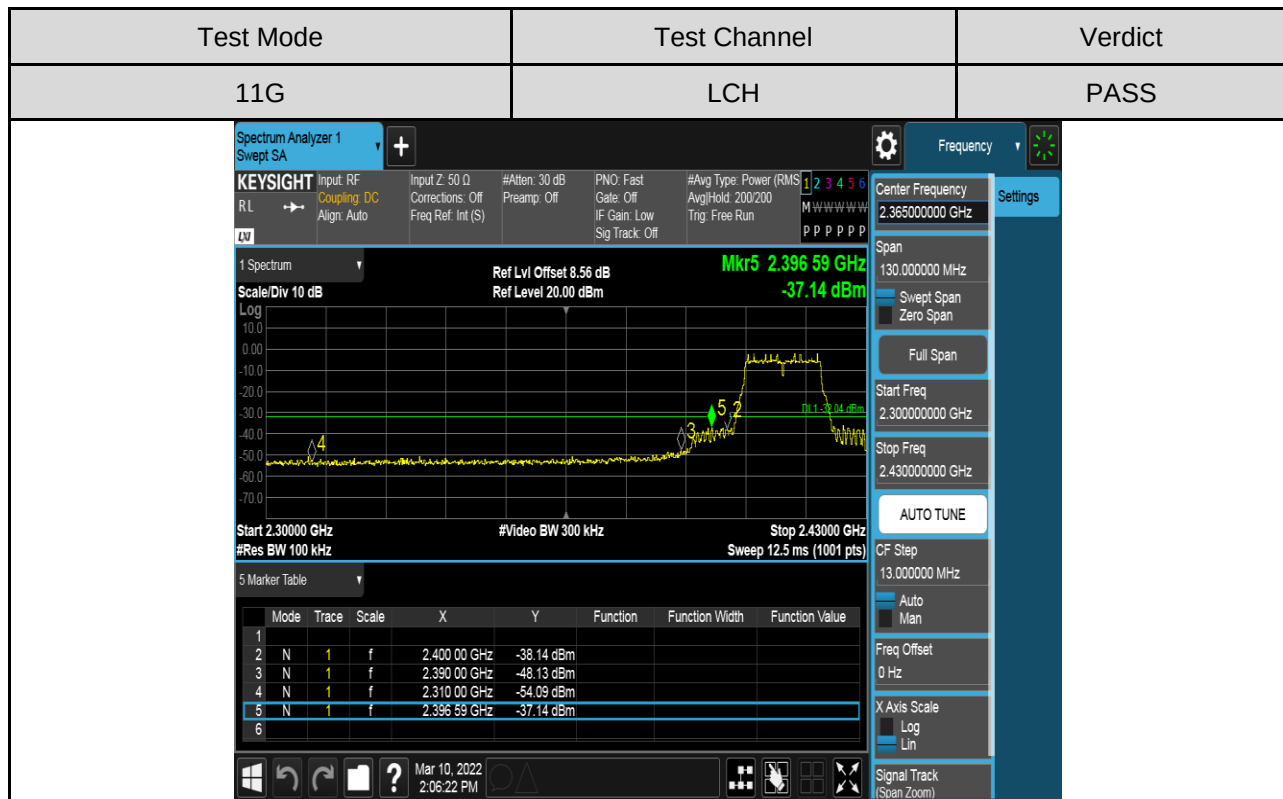
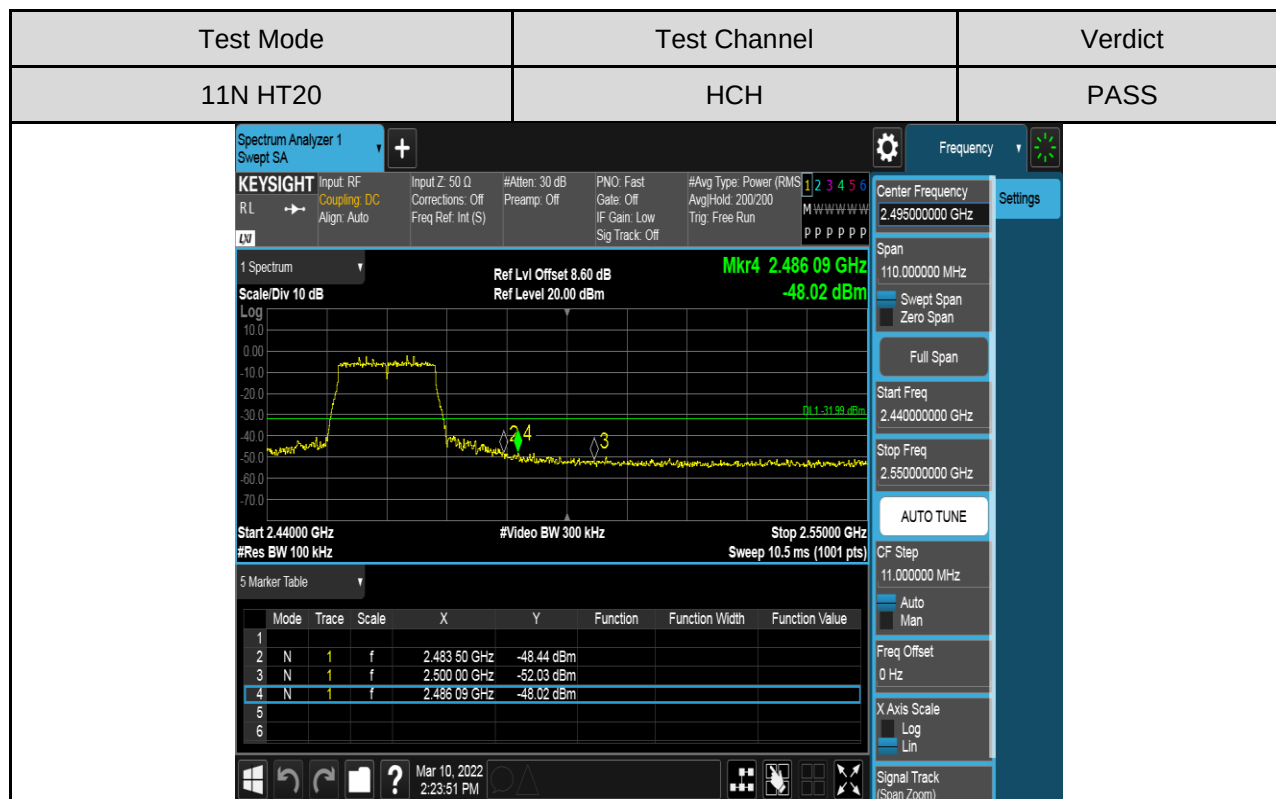


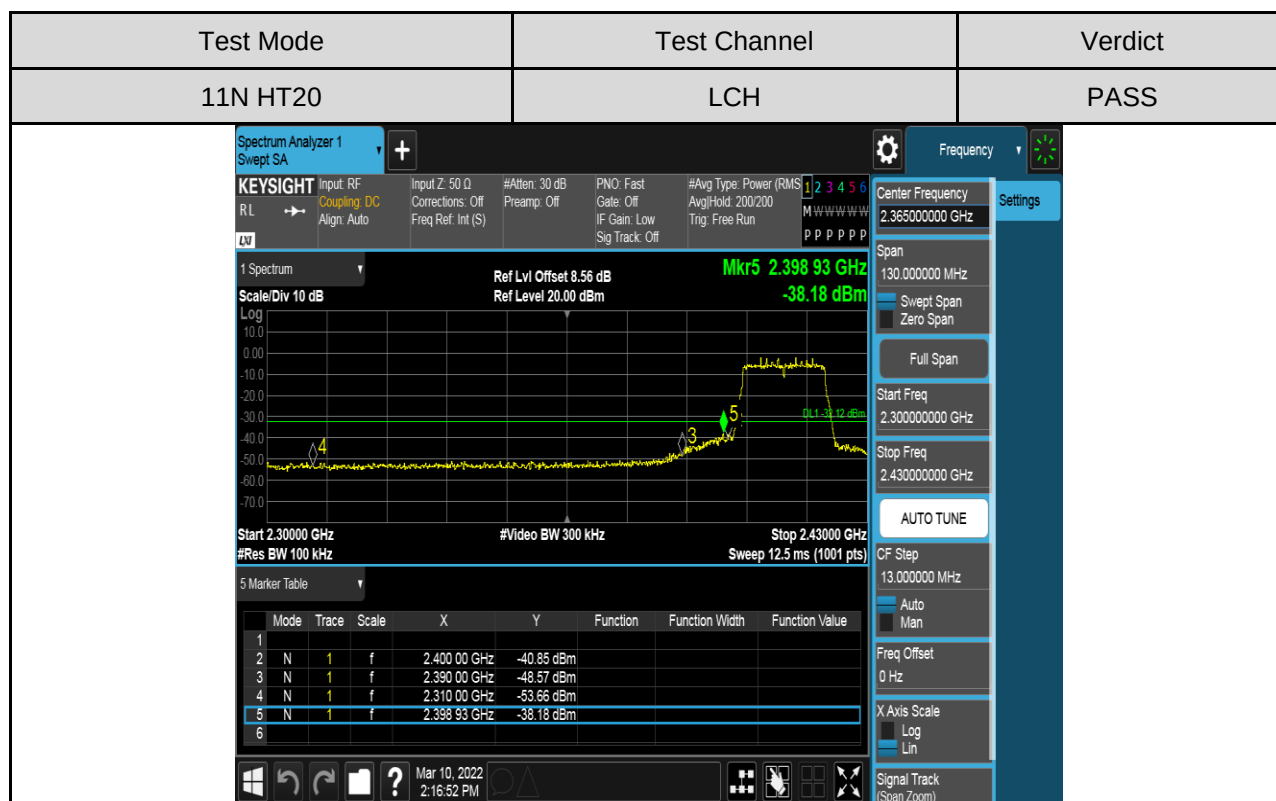



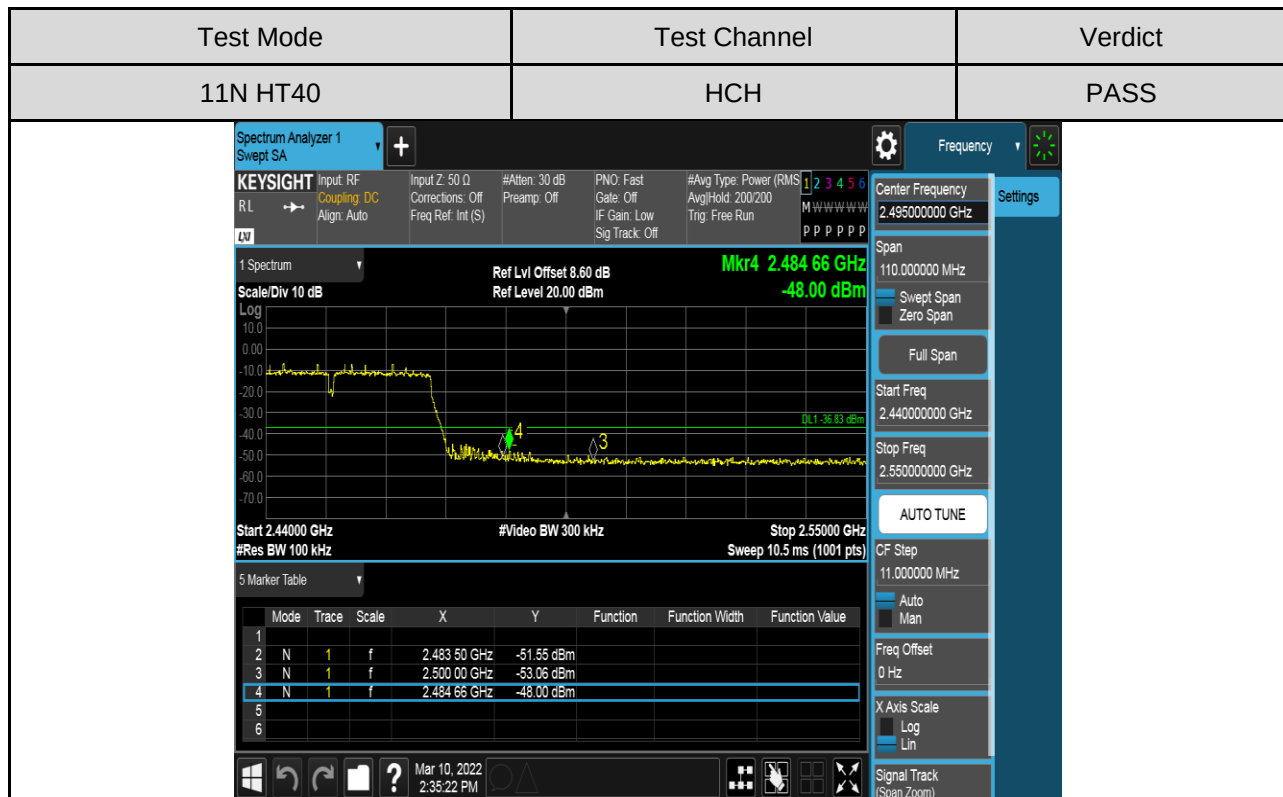

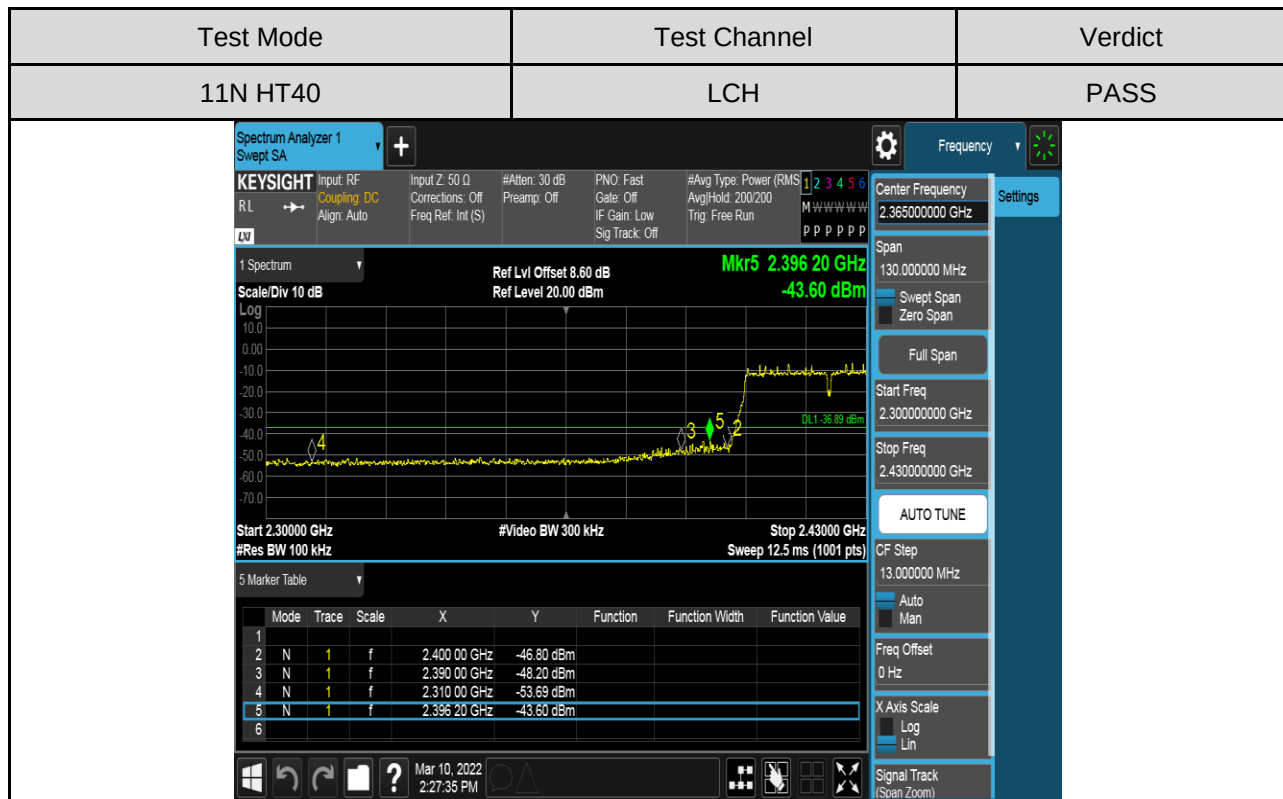

PART 3: CONDUCTED EMISSION

TEST RESULTS TABLE

Test Mode	Test Channel	Result	Verdict
11B	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS
11G	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS
11N HT20	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS
11N HT40	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS



TEST GRAPHS


Test Mode	Channel	Verdict
11B	LCH	PASS






Test Mode	Channel	Verdict
11B	MCH	PASS

MCH SPURIOUS EMISSION 30MHz~1GHz

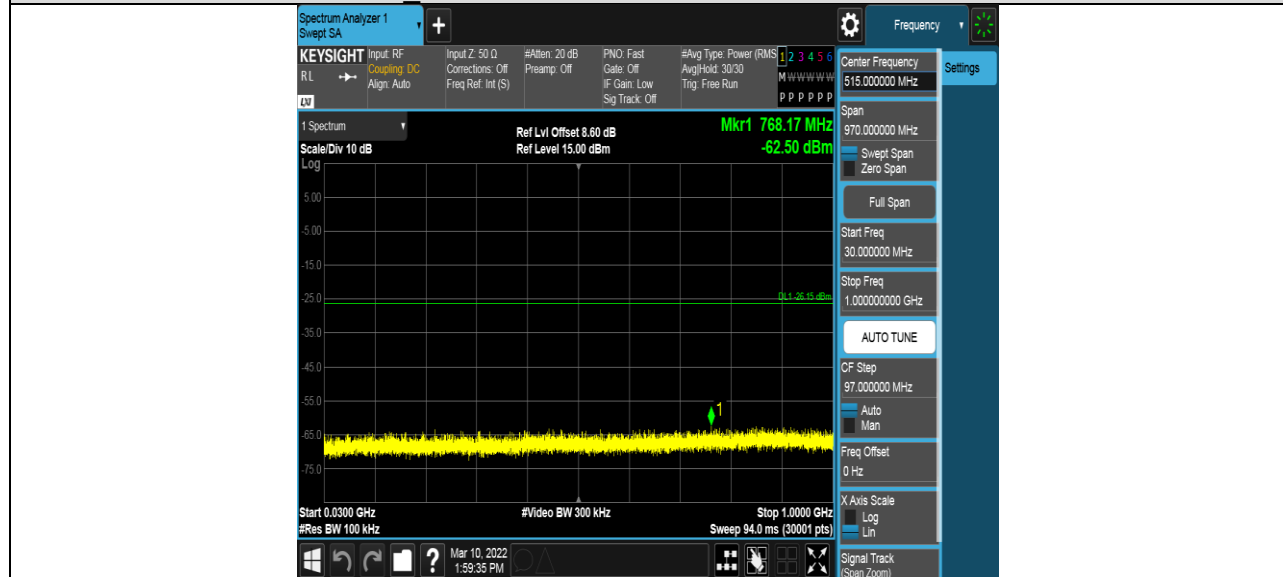


MCH SPURIOUS EMISSION 1GHz~26.5GHz

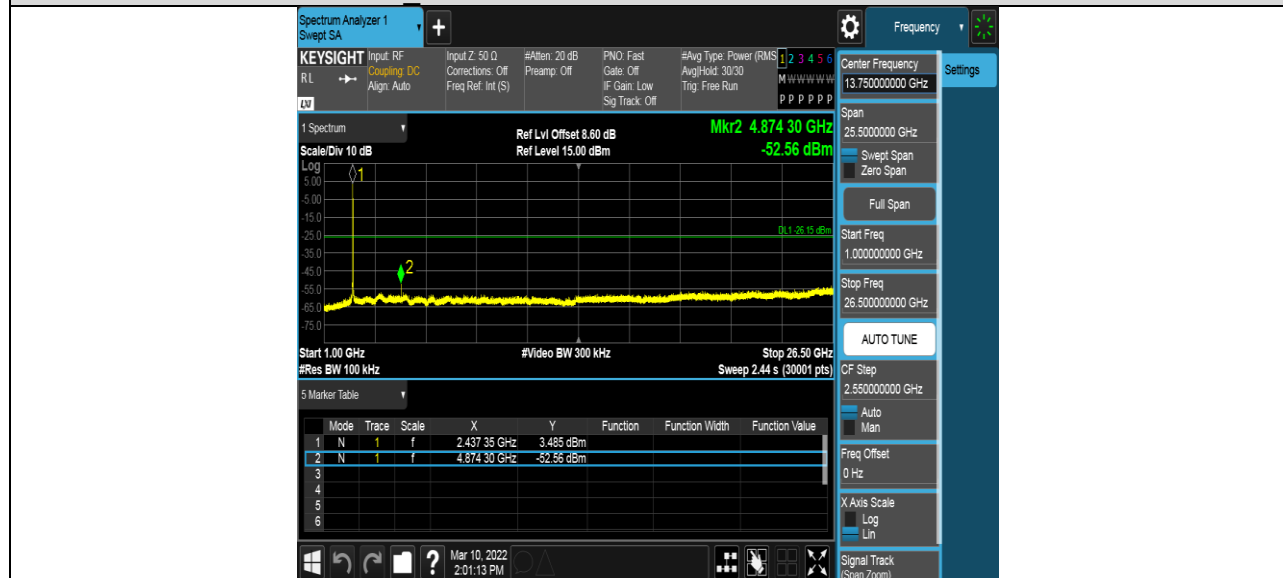




Test Mode	Channel	Verdict
11B	HCH	PASS

HCH SPURIOUS EMISSION 30MHz~1GHz

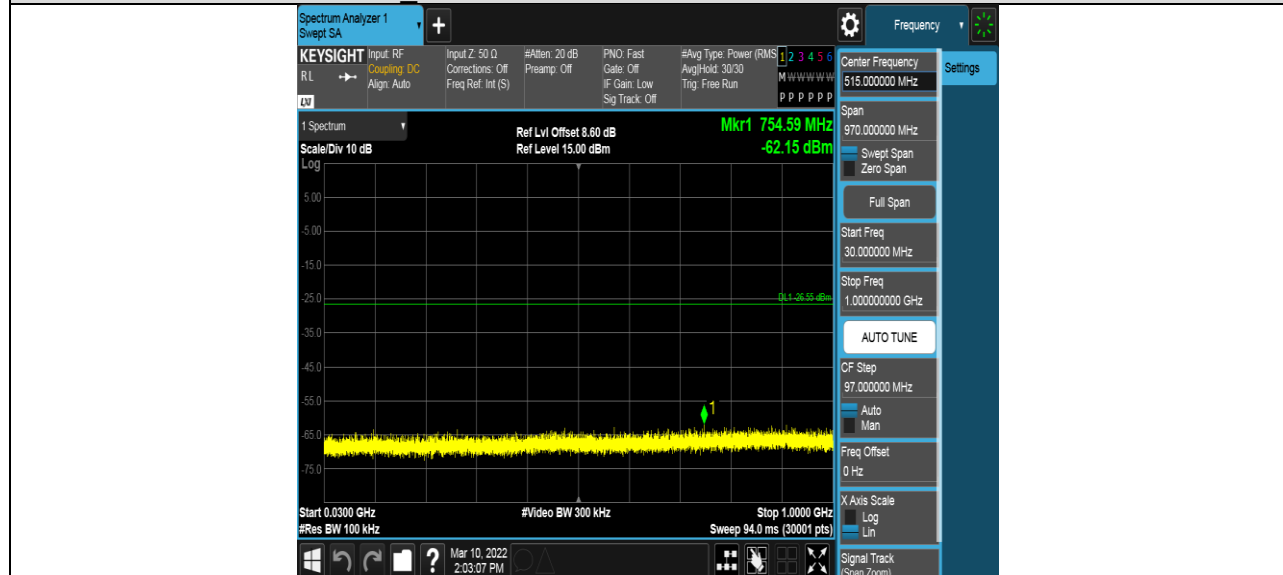


HCH SPURIOUS EMISSION 1GHz~26.5GHz

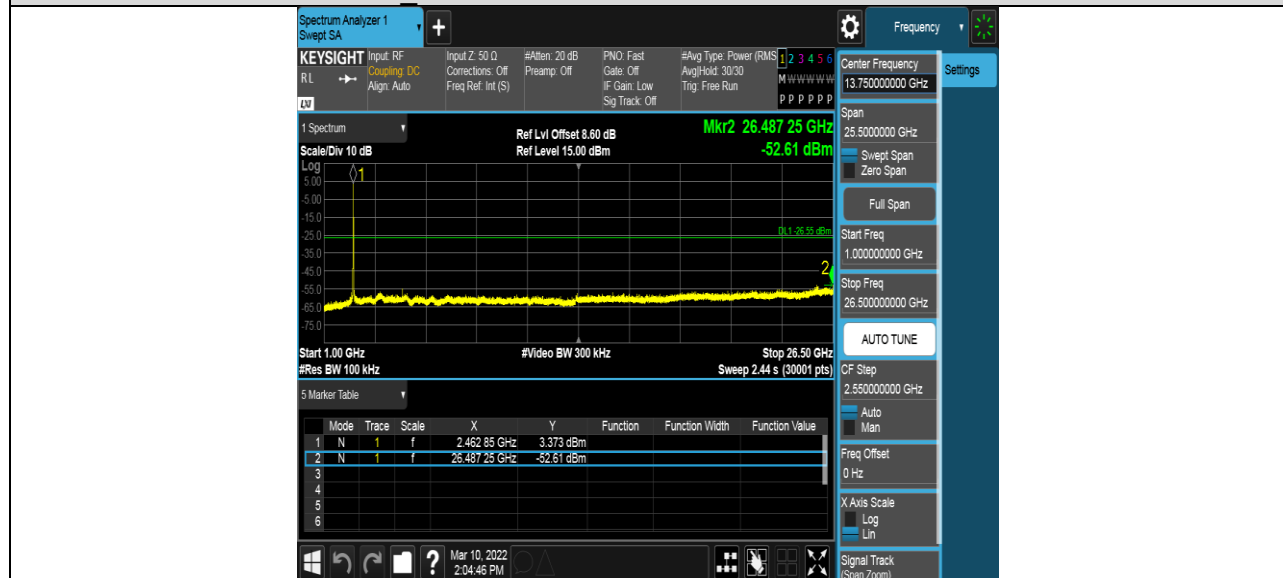




Test Mode	Channel	Verdict
11G	LCH	PASS

LCH SPURIOUS EMISSION 30MHz~1GHz

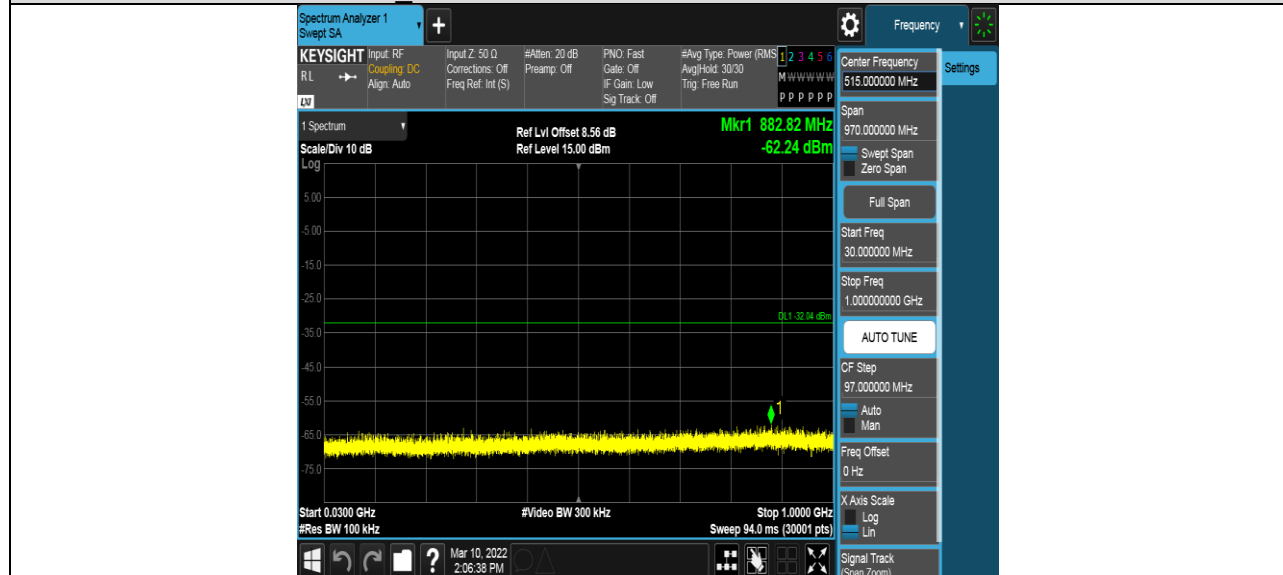


LCH SPURIOUS EMISSION 1GHz~26.5GHz

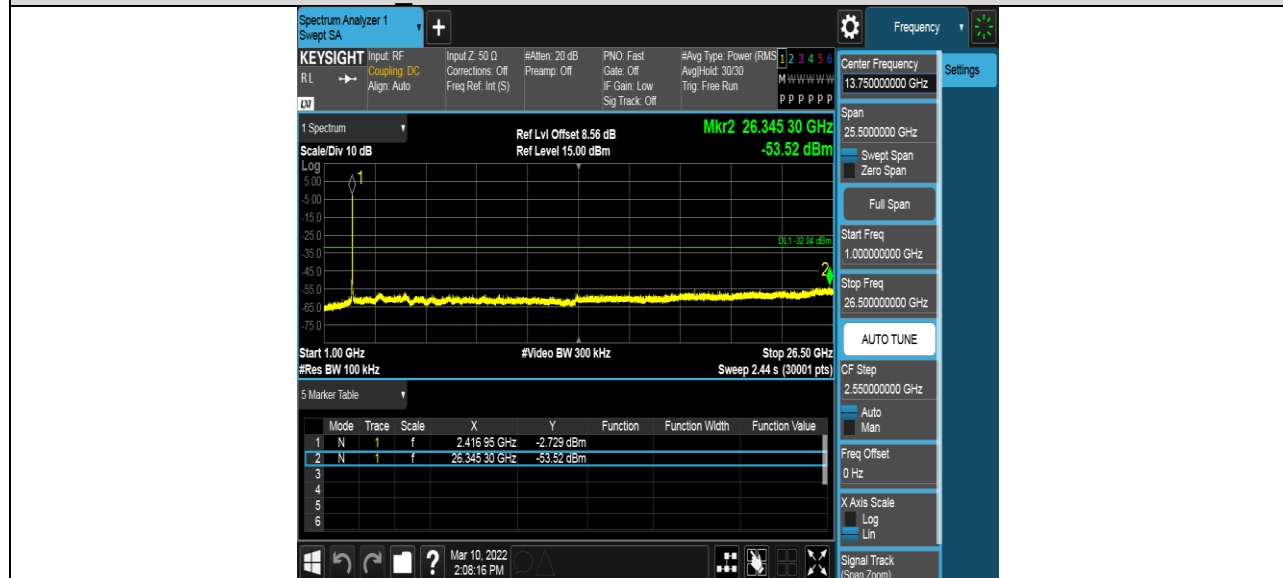




Test Mode	Channel	Verdict
11G	MCH	PASS

MCH SPURIOUS EMISSION 30MHz~1GHz

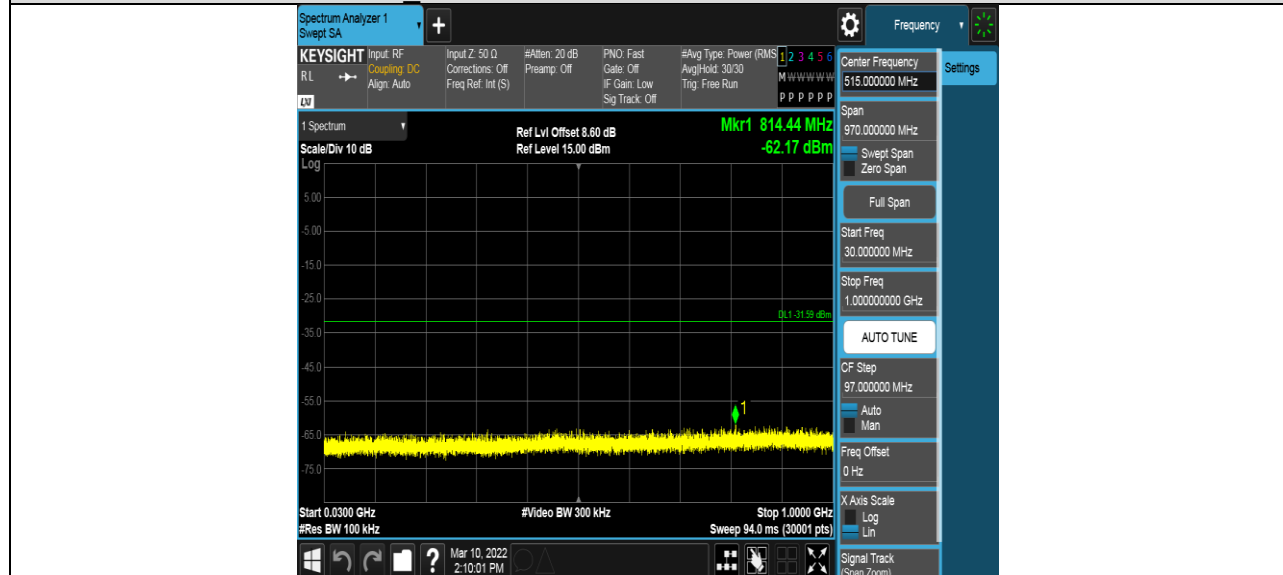


MCH SPURIOUS EMISSION 1GHz~26.5GHz

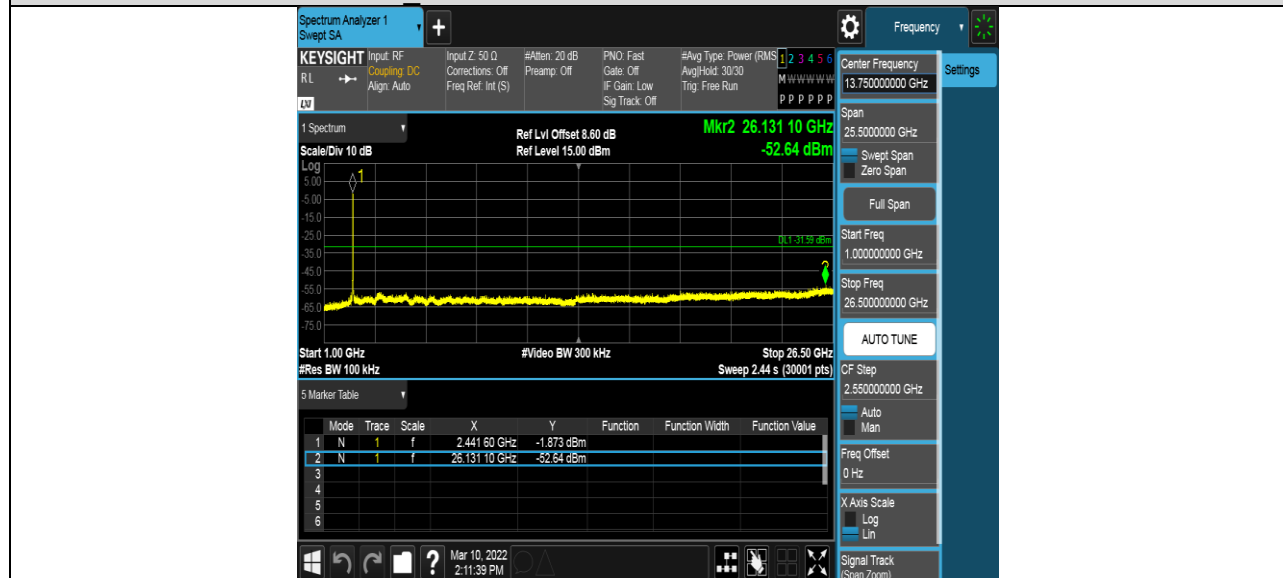




Test Mode	Channel	Verdict
11G	HCH	PASS

HCH SPURIOUS EMISSION 30MHz~1GHz

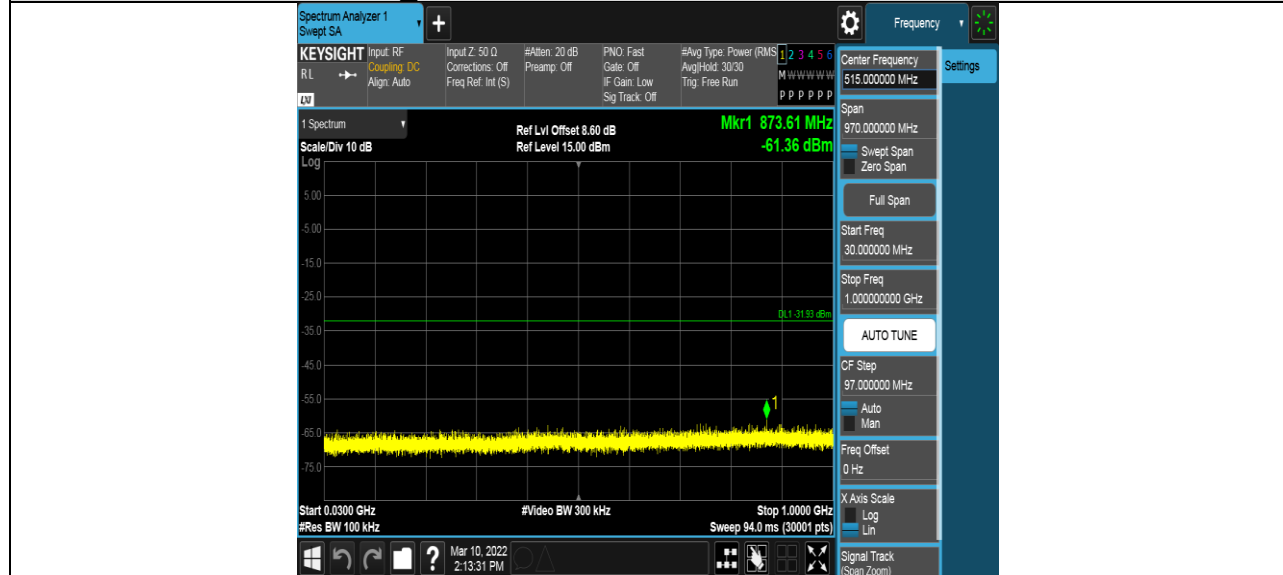


HCH SPURIOUS EMISSION 1GHz~26.5GHz

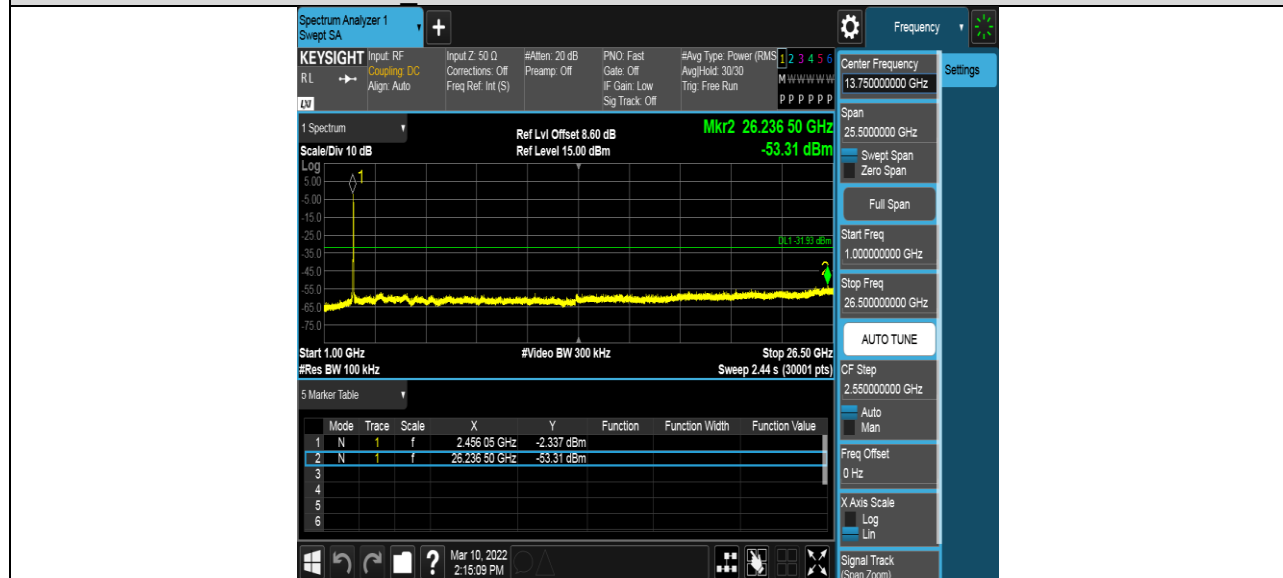




Test Mode	Channel	Verdict
11N HT20	LCH	PASS

LCH SPURIOUS EMISSION 30MHz~1GHz

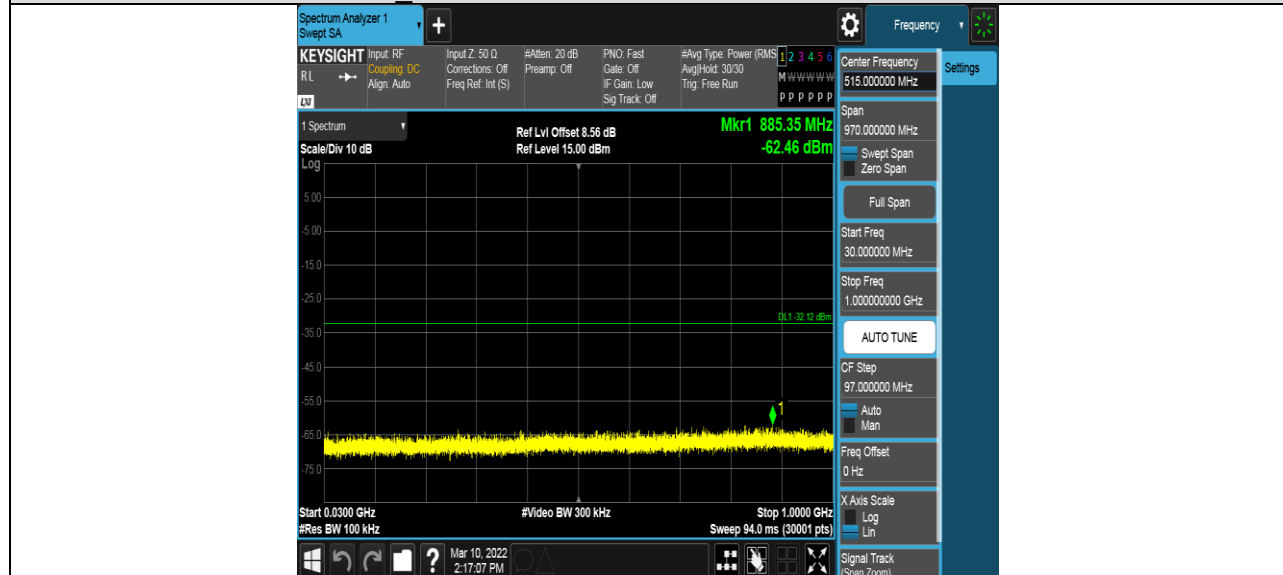


LCH SPURIOUS EMISSION 1GHz~26.5GHz

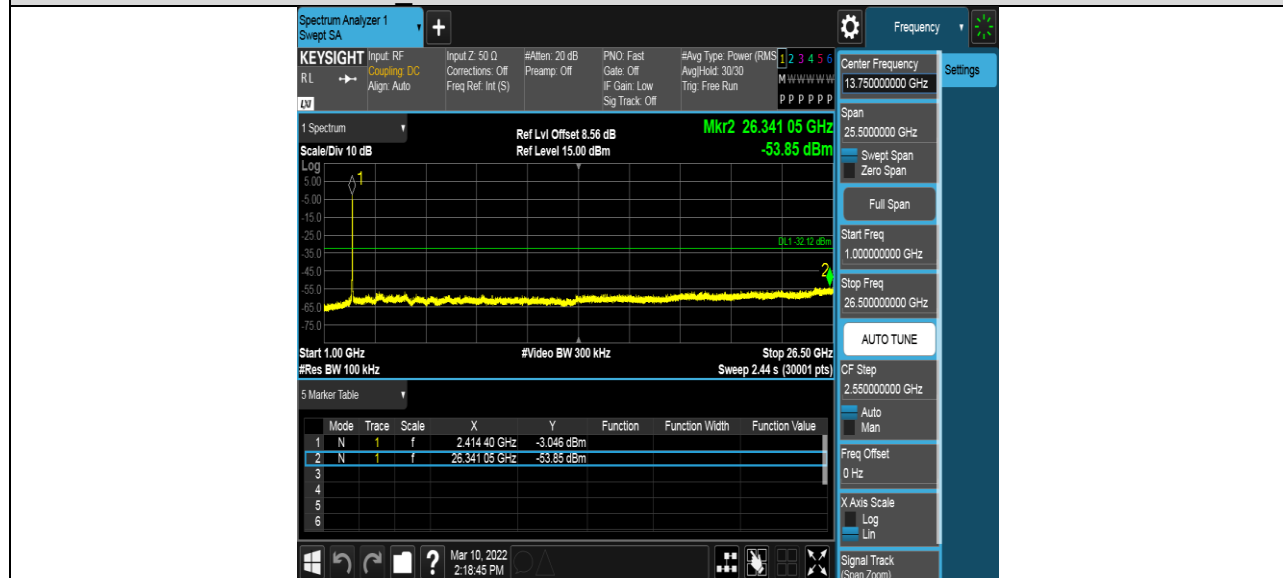




Test Mode	Channel	Verdict
11N HT20	MCH	PASS

MCH SPURIOUS EMISSION 30MHz~1GHz

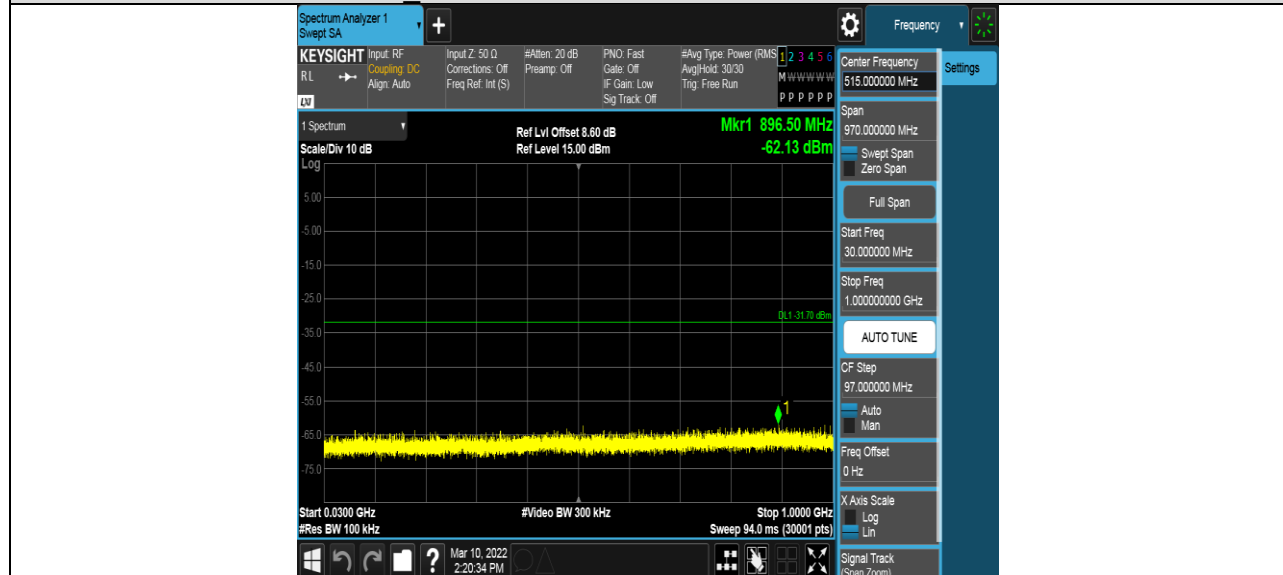


MCH SPURIOUS EMISSION 1GHz~26.5GHz

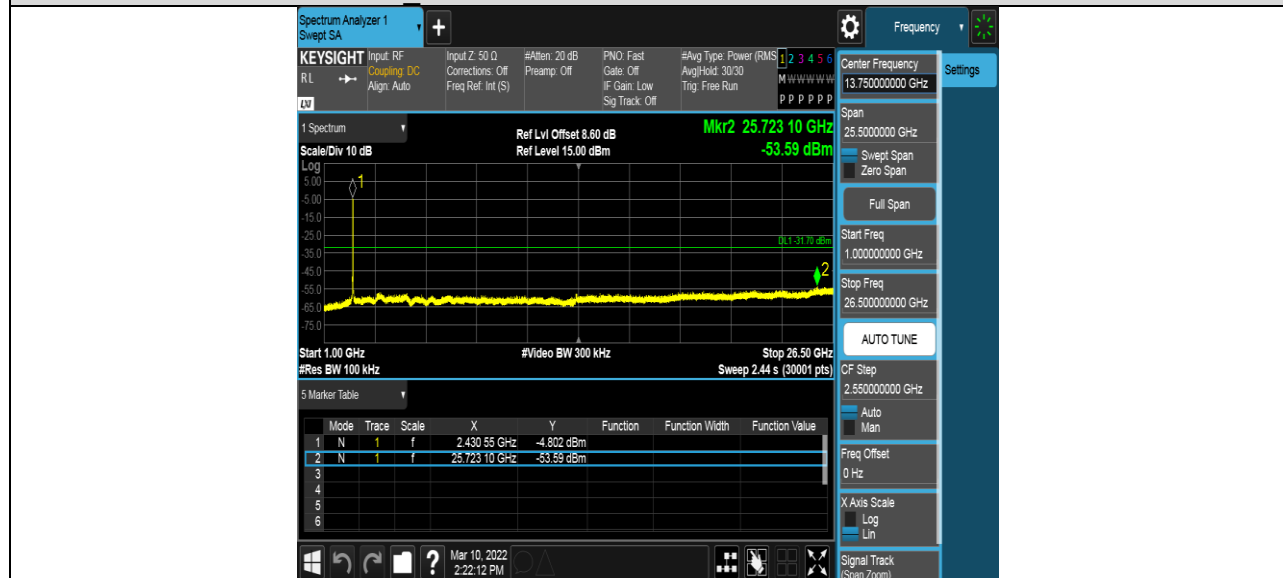




Test Mode	Channel	Verdict
11N HT20	HCH	PASS

HCH SPURIOUS EMISSION 30MHz~1GHz

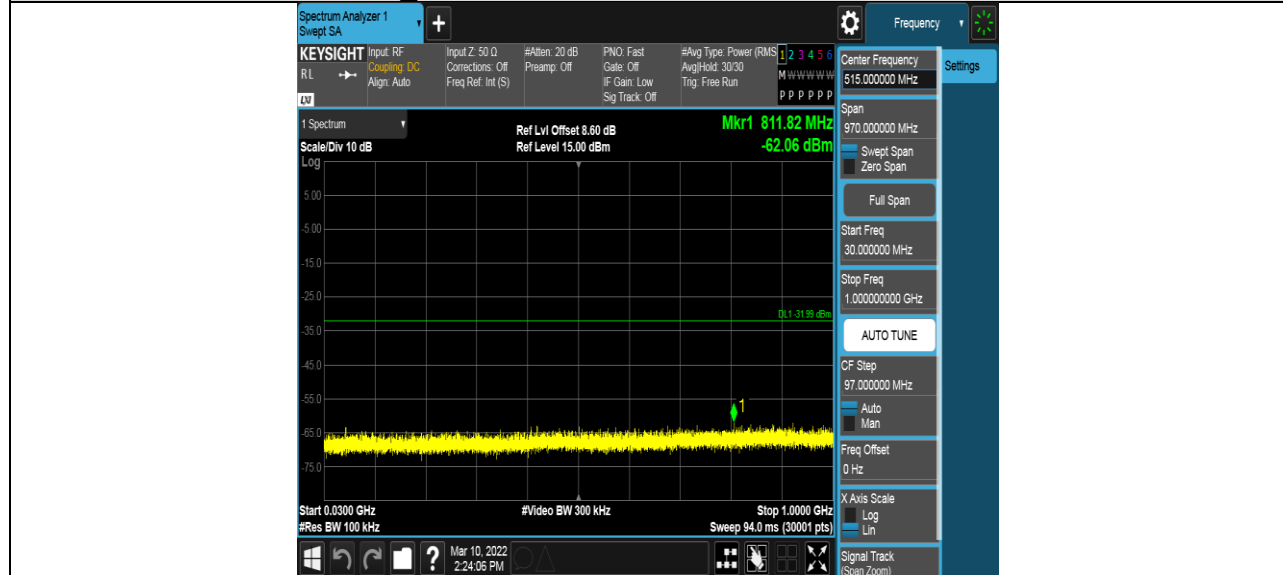


HCH SPURIOUS EMISSION 1GHz~26.5GHz

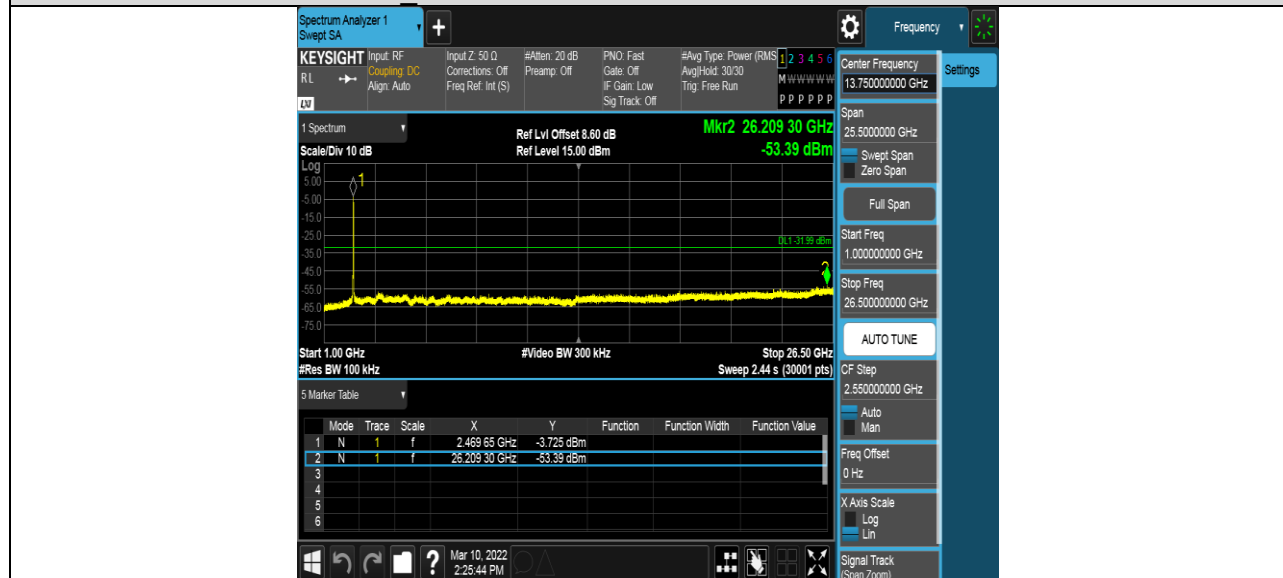



Test Mode	Channel	Verdict
11N HT40	LCH	PASS

LCH SPURIOUS EMISSION 30MHz~1GHz

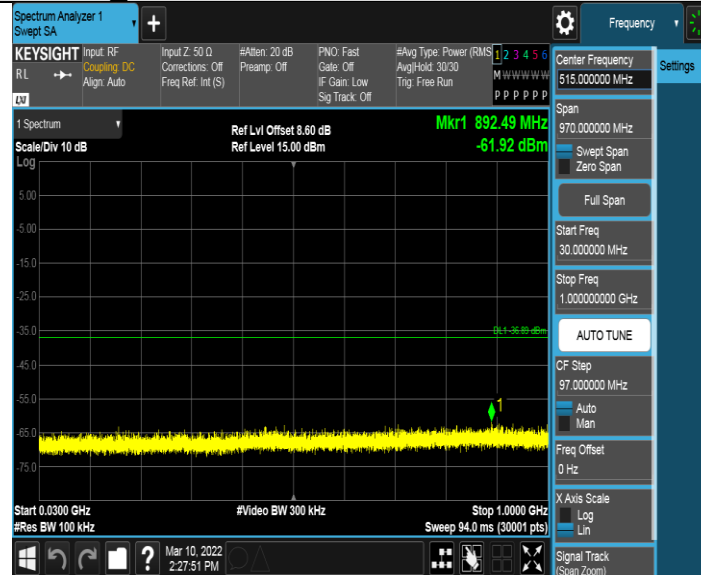


LCH SPURIOUS EMISSION 1GHz~26.5GHz






Test Mode	Channel	Verdict
11N HT40	MCH	PASS

MCH SPURIOUS EMISSION 30MHz~1GHz

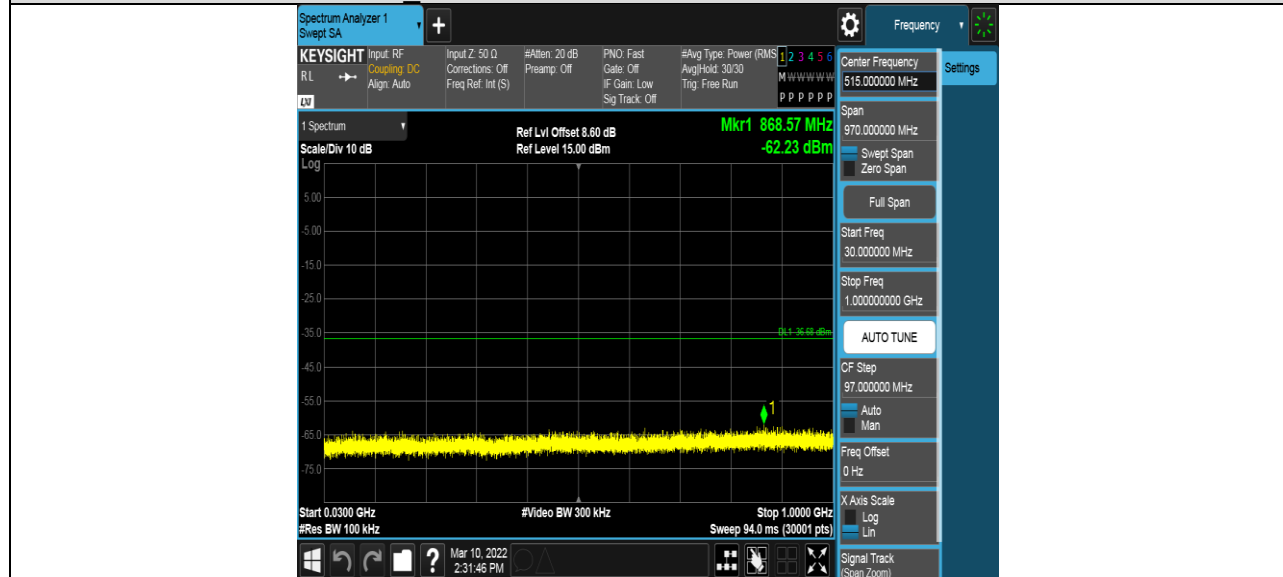


MCH SPURIOUS EMISSION 1GHz~26.5GHz

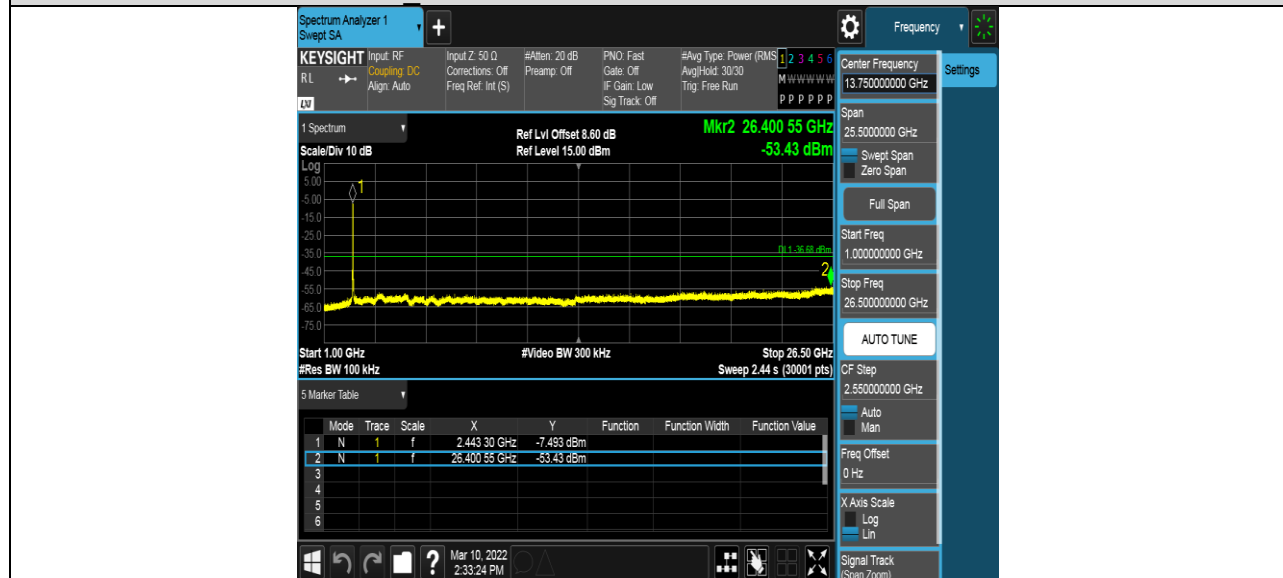




Test Mode	Channel	Verdict
11N HT40	HCH	PASS

HCH SPURIOUS EMISSION 30MHz~1GHz

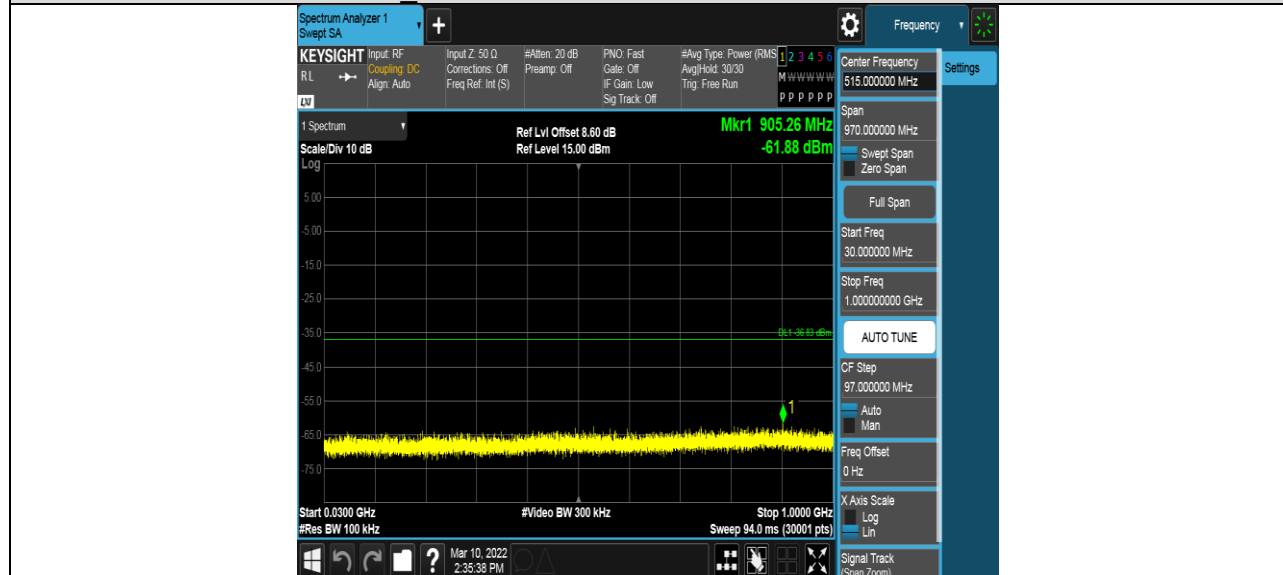

HCH SPURIOUS EMISSION 1GHz~26.5GHz

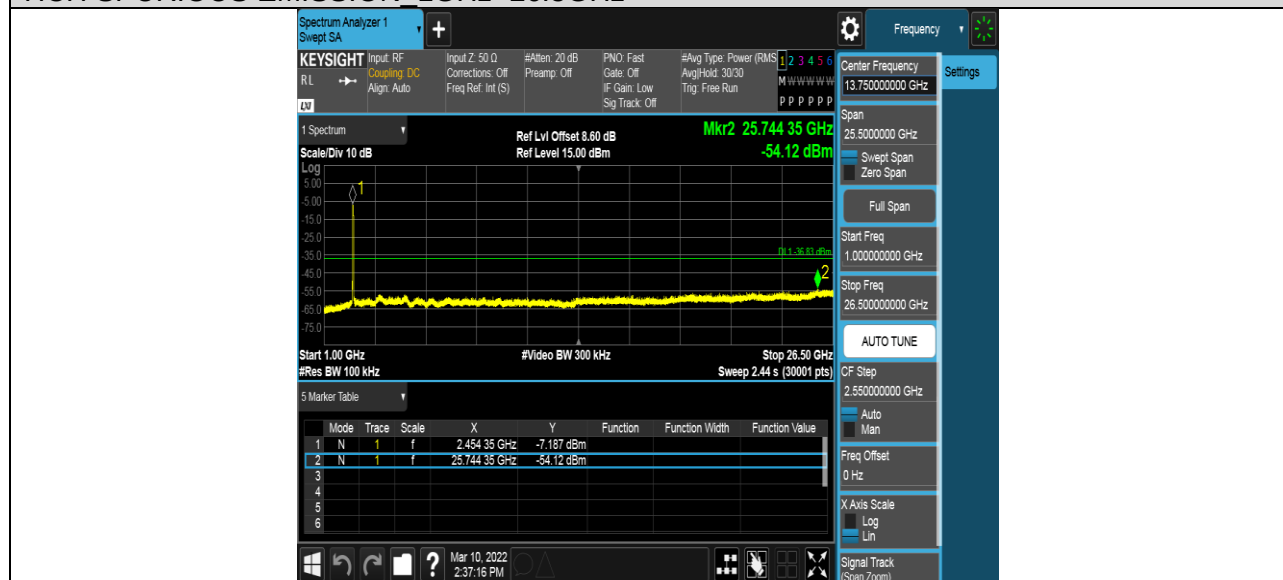



7.6. RADIATED TEST RESULTS

7.6.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

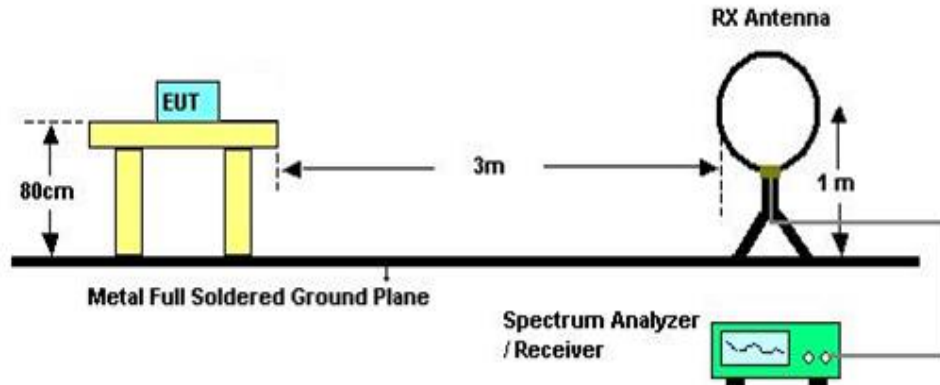


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

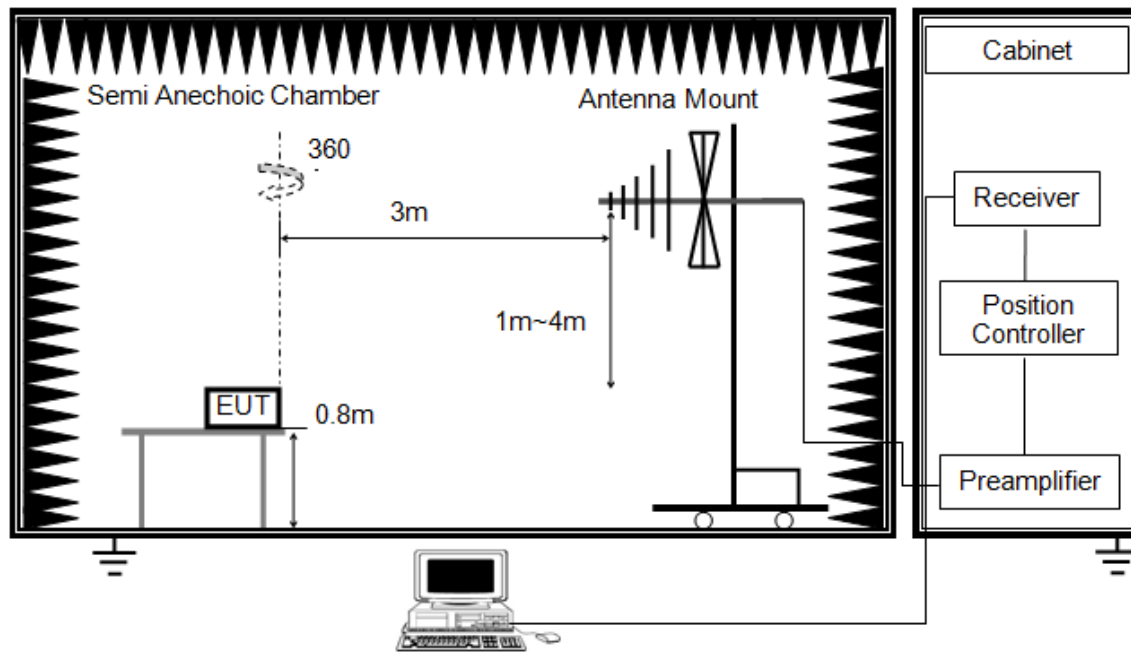


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Above 1G

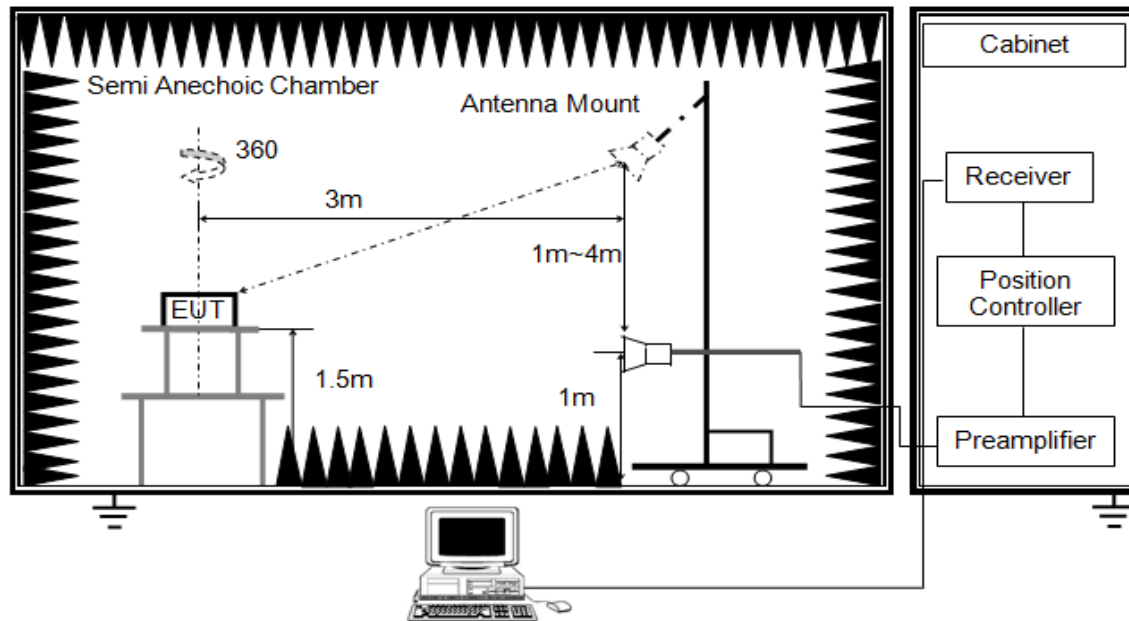


The setting of the spectrum analyser

RBW	1M
VBW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak/Average(10Hz)
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with set $VBW \leq RBW/100$, but not less than list in section 7.1 with average detector, max hold to run for at least 50 traces for average measurements.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

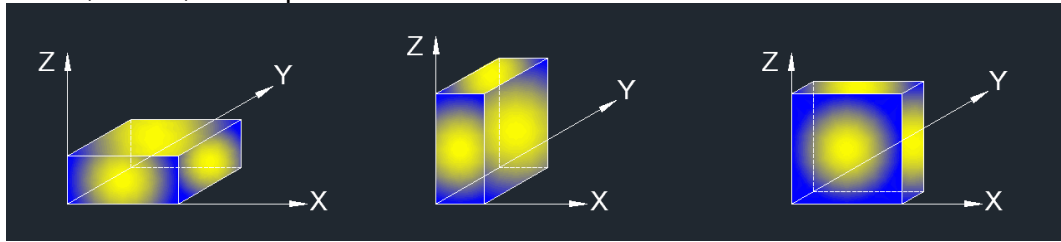

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worse case (Z axis) data recorded in the report.



7.6.2.TEST ENVIRONMENT

Temperature	21.1°C	Relative Humidity	58.4%
Atmosphere Pressure	101.1kPa	Test Date	2022-03-11

7.6.3.RESTRICTED BANDEDGE


TEST RESULT TABLE

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS



TEST GRAPHS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

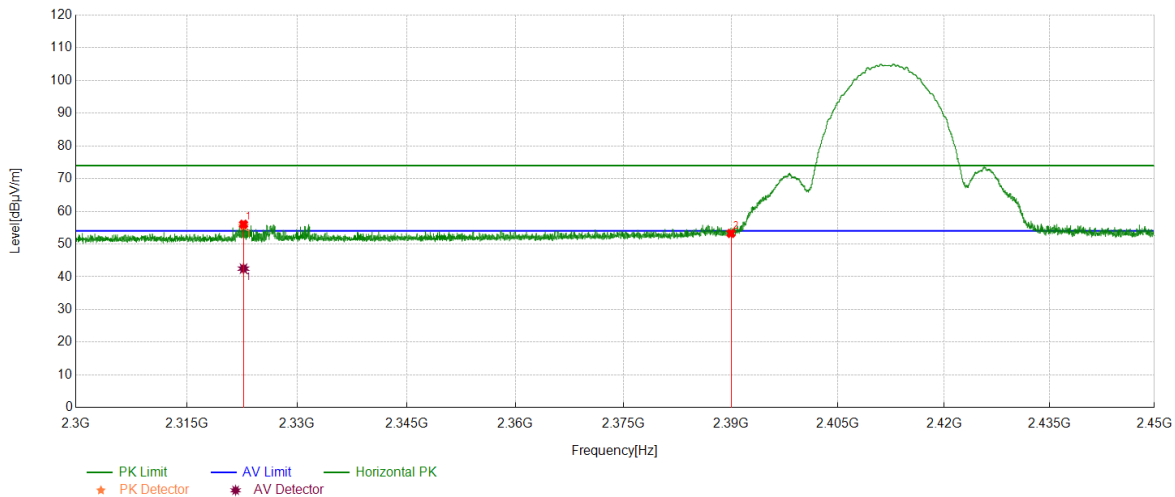

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2322.7278	43.16	12.38	55.54	74.00	-18.46	Horizontal
2	2390	40.19	13.07	53.26	74.00	-20.74	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2322.7278	30.11	12.38	42.49	54.00	-11.51	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

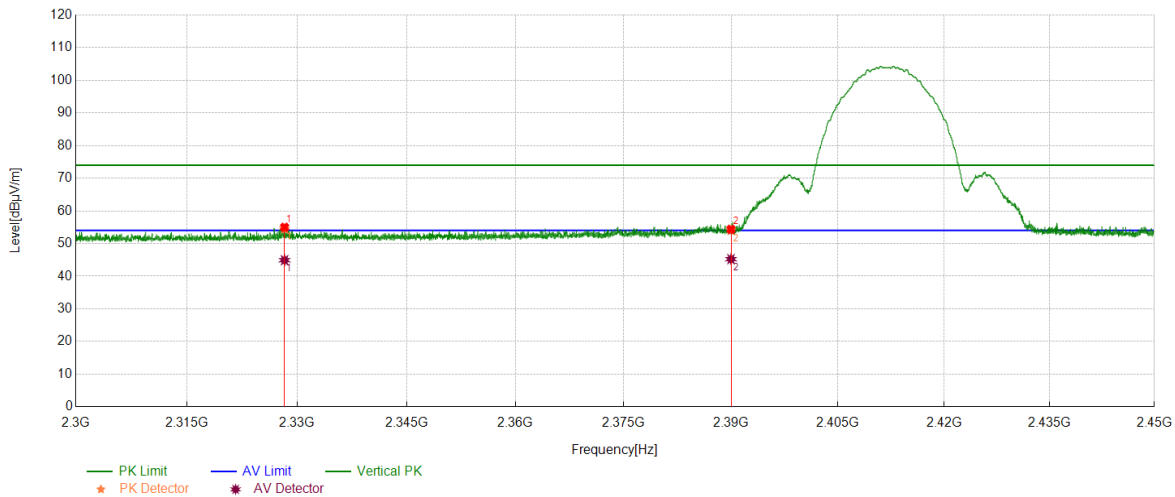

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2328.316	42.07	12.45	54.52	74.00	-19.48	Vertical
2	2390	41.02	13.07	54.09	74.00	-19.91	Vertical


AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2328.316	32.45	12.45	44.90	54.00	-9.10	Vertical
2	2390	32.15	13.07	45.22	54.00	-8.78	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

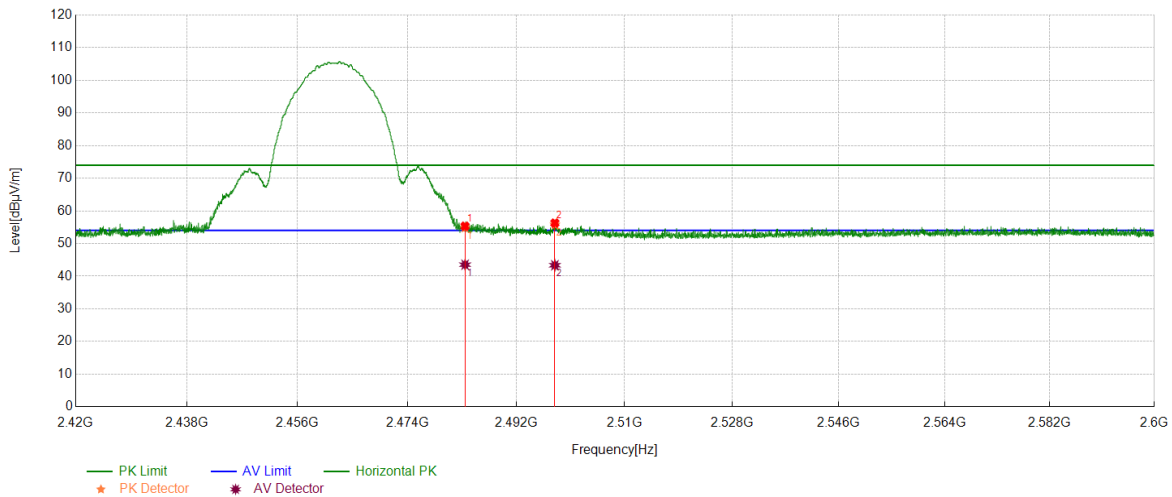

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	41.91	12.97	54.88	74.00	-19.12	Horizontal
2	2498.3773	42.67	13.12	55.79	74.00	-18.21	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	30.56	12.97	43.53	54.00	-10.47	Horizontal
2	2498.3773	30.24	13.12	43.36	54.00	-10.64	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

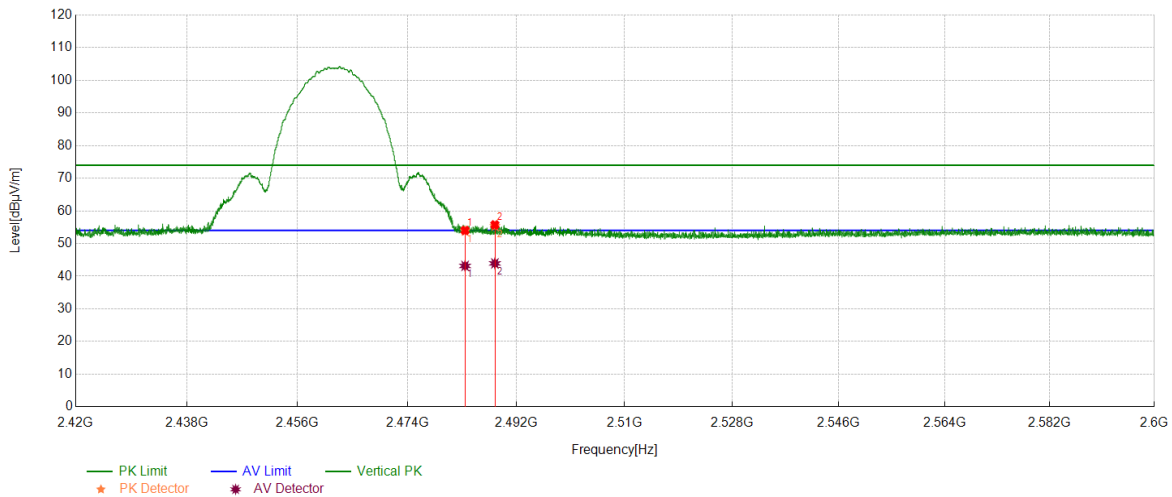

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5	40.84	12.97	53.81	74.00	-20.19	Vertical
2	2488.4311	42.34	12.99	55.33	74.00	-18.67	Vertical


AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5	30.19	12.97	43.16	54.00	-10.84	Vertical
2	2488.4311	30.93	12.99	43.92	54.00	-10.08	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

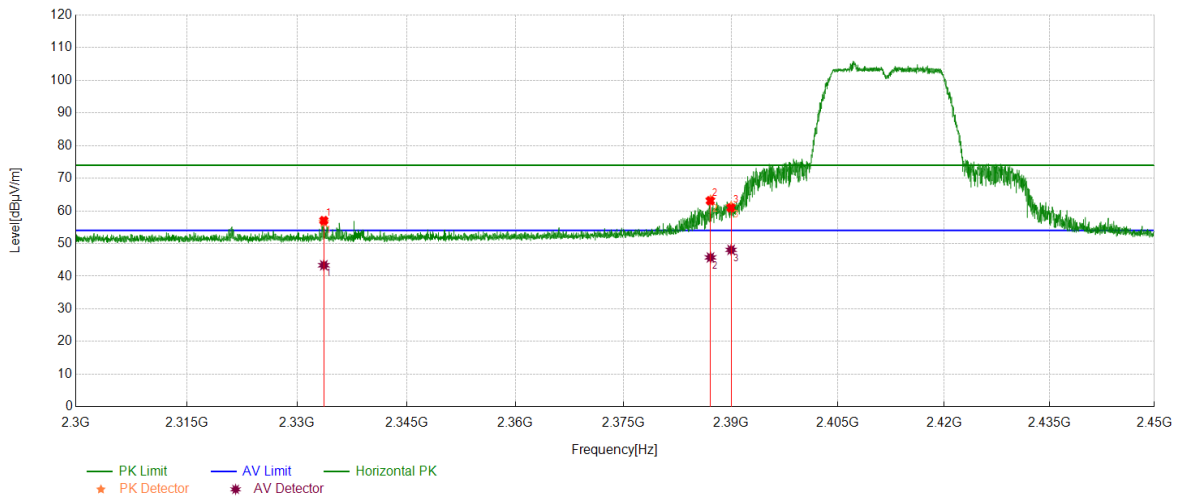

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2333.6792	44.04	12.52	56.56	74.00	-17.44	Horizontal
2	2387.1299	50.30	13.06	63.36	74.00	-10.64	Horizontal
3	2390.0162	48.37	13.07	61.44	74.00	-12.56	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2333.6792	30.84	12.52	43.36	54.00	-10.64	Horizontal
2	2387.1299	32.69	13.06	45.75	54.00	-8.25	Horizontal
3	2390.0162	35.01	13.07	48.08	54.00	-5.92	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

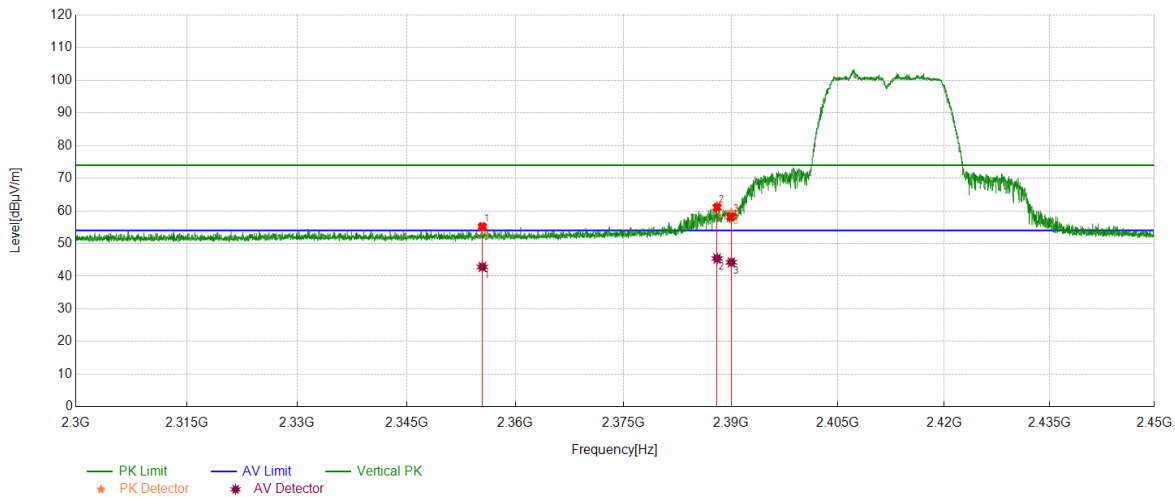

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2355.4507	42.07	12.74	54.81	74.00	-19.19	Vertical
2	2388.0536	48.30	13.07	61.37	74.00	-12.63	Vertical
3	2390.0469	46.30	13.07	59.37	74.00	-14.63	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2355.4507	30.11	12.74	42.85	54.00	-11.15	Vertical
2	2388.0536	32.35	13.07	45.42	54.00	-8.58	Vertical
3	2390.0469	31.19	13.07	44.26	54.00	-9.74	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

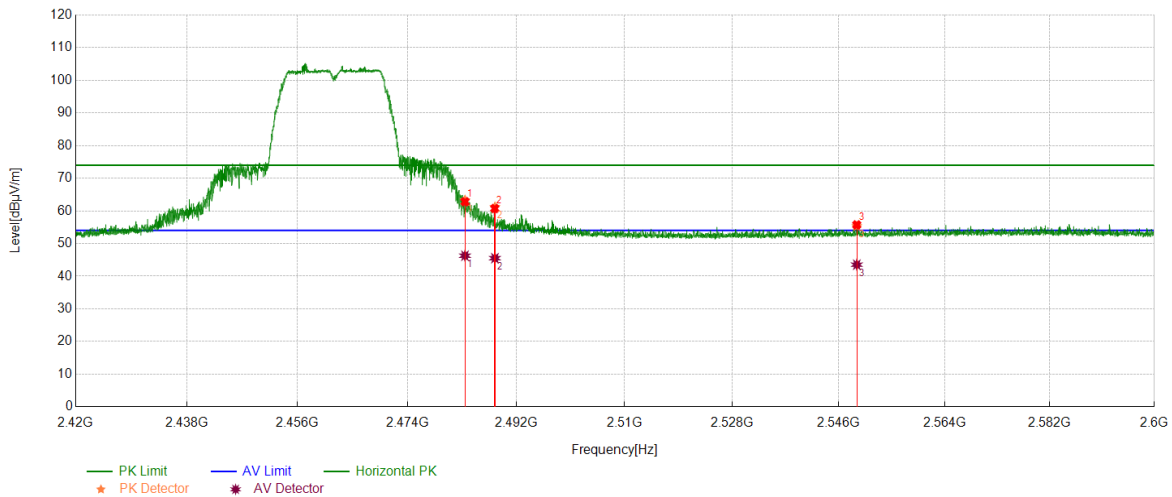

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.4812	50.27	12.97	63.24	74.00	-10.76	Horizontal
2	2488.4319	48.17	12.99	61.16	74.00	-12.84	Horizontal
3	2549.0536	41.94	13.36	55.30	74.00	-18.70	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.4812	33.31	12.97	46.28	54.00	-7.72	Horizontal
2	2488.4319	32.53	12.99	45.52	54.00	-8.48	Horizontal
3	2549.0536	30.17	13.36	43.53	54.00	-10.47	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

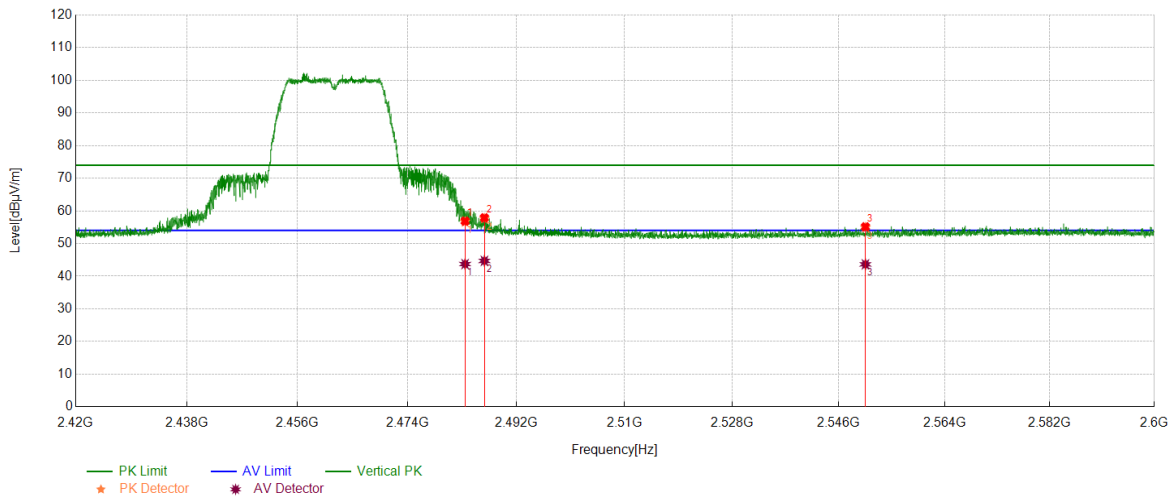

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	43.67	12.97	56.64	74.00	-17.36	Vertical
2	2486.6983	44.67	12.98	57.65	74.00	-16.35	Vertical
3	2550.5163	41.57	13.35	54.92	74.00	-19.08	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	30.75	12.97	43.72	54.00	-10.28	Vertical
2	2486.6983	31.72	12.98	44.70	54.00	-9.30	Vertical
3	2550.5163	30.29	13.35	43.64	54.00	-10.36	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

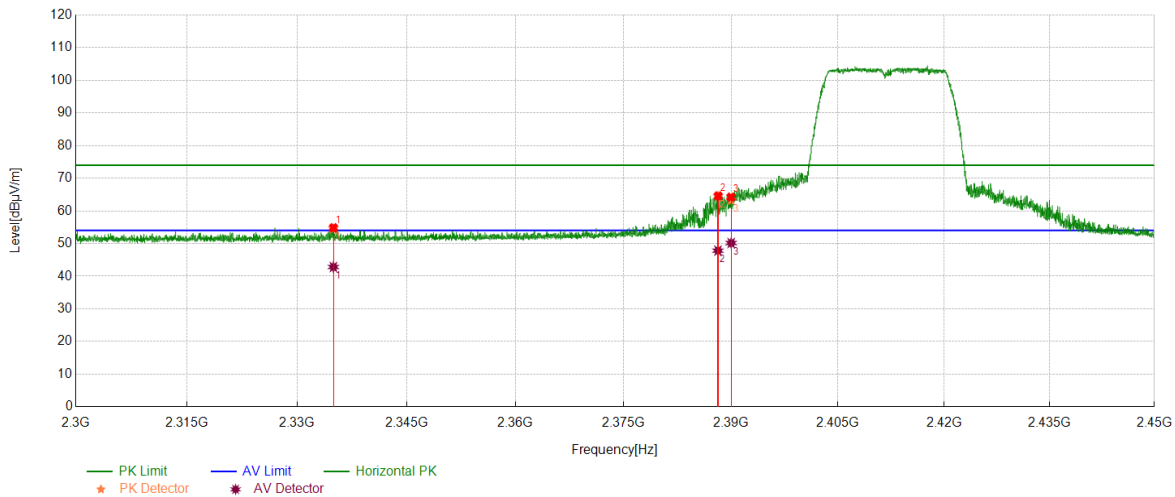

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2334.9919	41.99	12.53	54.52	74.00	-19.48	Horizontal
2	2388.1742	51.37	13.07	64.44	74.00	-9.56	Horizontal
3	2390.026	50.23	13.07	63.30	74.00	-10.70	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2334.9919	30.29	12.53	42.82	54.00	-11.18	Horizontal
2	2388.1742	34.76	13.07	47.83	54.00	-6.17	Horizontal
3	2390.026	37.09	13.07	50.16	54.00	-3.84	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

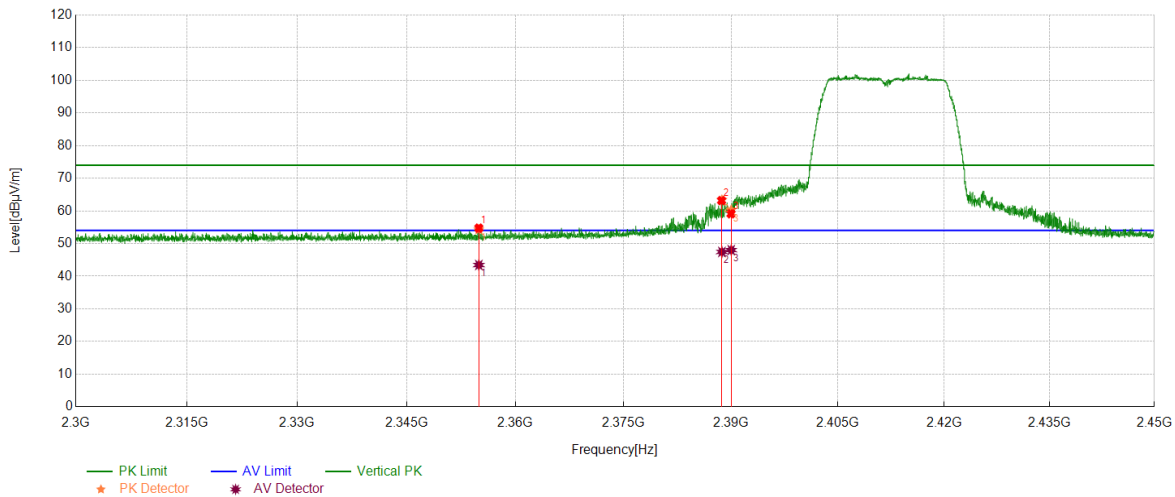

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2354.9631	41.57	12.73	54.30	74.00	-19.70	Vertical
2	2388.7274	50.27	13.07	63.34	74.00	-10.66	Vertical
3	2390.0317	47.21	13.07	60.28	74.00	-13.72	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2354.9631	30.70	12.73	43.43	54.00	-10.57	Vertical
2	2388.7274	34.37	13.07	47.44	54.00	-6.56	Vertical
3	2390.0317	34.94	13.07	48.01	54.00	-5.99	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

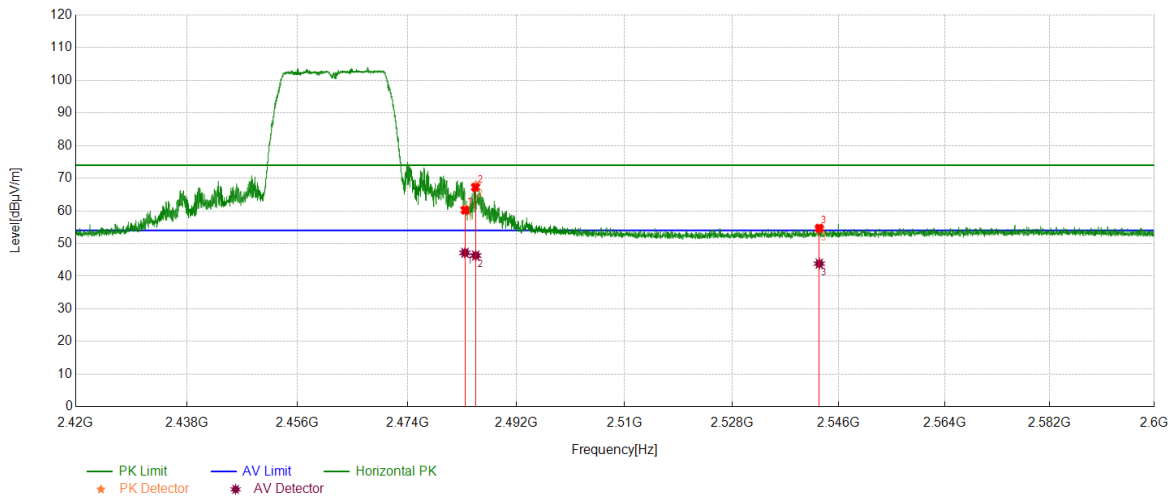

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.4835	47.58	12.97	60.55	74.00	-13.45	Horizontal
2	2485.2627	54.77	12.97	67.74	74.00	-6.26	Horizontal
3	2542.7078	41.05	13.40	54.45	74.00	-19.55	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.4835	34.19	12.97	47.16	54.00	-6.84	Horizontal
2	2485.2627	33.36	12.97	46.33	54.00	-7.67	Horizontal
3	2542.7078	30.44	13.40	43.84	54.00	-10.16	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

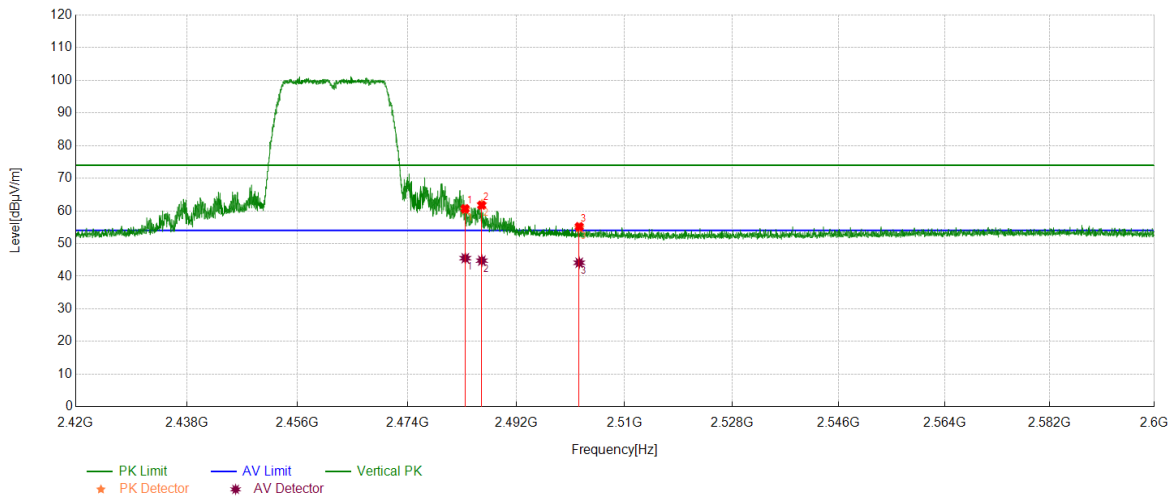

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5339	47.41	12.97	60.38	74.00	-13.62	Vertical
2	2486.2733	48.95	12.98	61.93	74.00	-12.07	Vertical
3	2502.4278	41.65	13.16	54.81	74.00	-19.19	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5339	32.55	12.97	45.52	54.00	-8.48	Vertical
2	2486.2733	31.80	12.98	44.78	54.00	-9.22	Vertical
3	2502.4278	30.97	13.16	44.13	54.00	-9.87	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

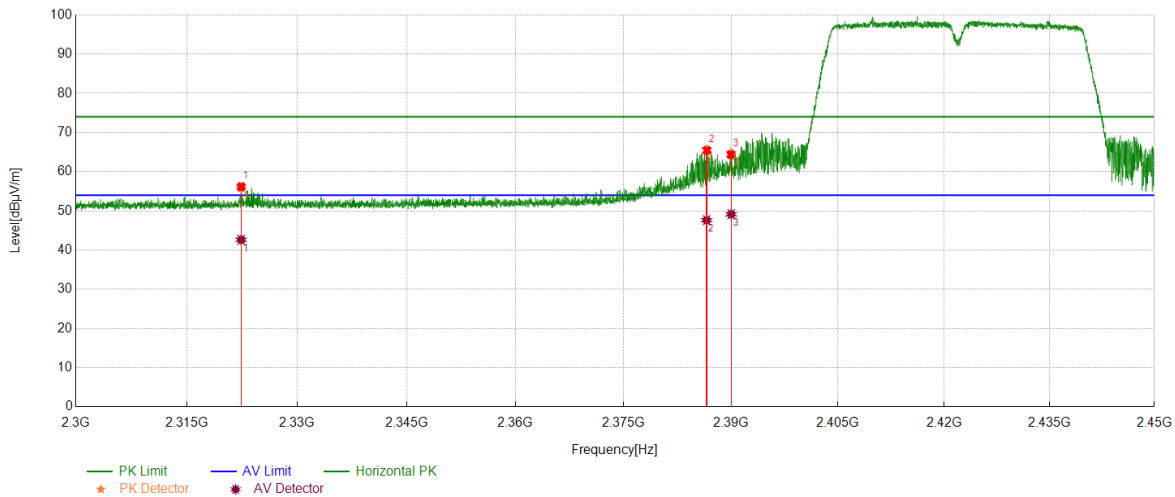

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2322.4091	43.58	12.38	55.96	74.00	-18.04	Horizontal
2	2386.5912	52.57	13.07	65.64	74.00	-8.36	Horizontal
3	2390.0295	51.70	13.07	64.77	74.00	-9.23	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2322.4091	30.25	12.38	42.63	54.00	-11.37	Horizontal
2	2386.5912	34.55	13.07	47.62	54.00	-6.38	Horizontal
3	2390.0295	36.07	13.07	49.14	54.00	-4.86	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

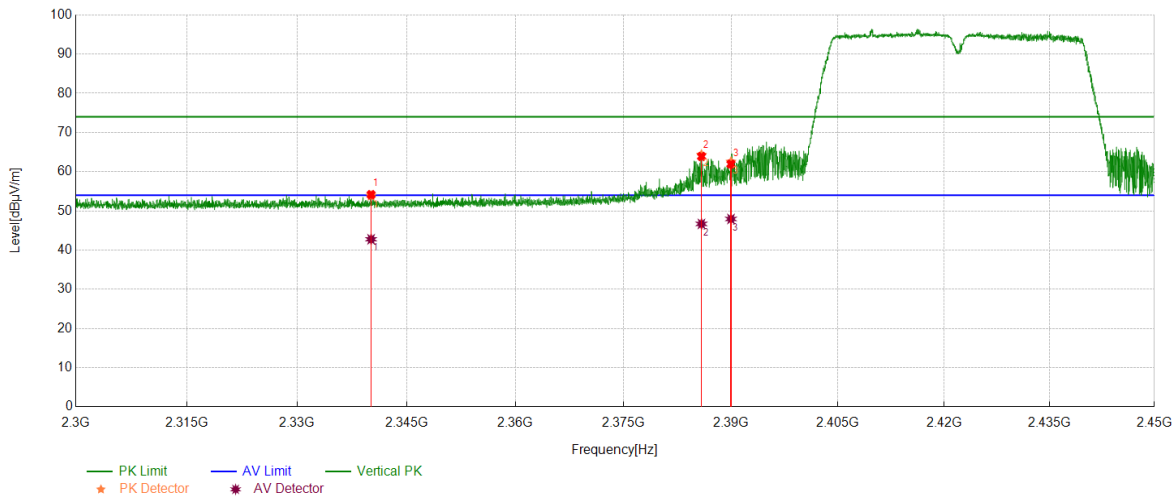

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2340.1488	41.23	12.60	53.83	74.00	-20.17	Vertical
2	2385.8683	51.24	13.06	64.30	74.00	-9.70	Vertical
3	2389.997	49.45	13.07	62.52	74.00	-11.48	Vertical


AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2340.1488	30.16	12.60	42.76	54.00	-11.24	Vertical
2	2385.8683	33.62	13.06	46.68	54.00	-7.32	Vertical
3	2389.997	34.87	13.07	47.94	54.00	-6.06	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

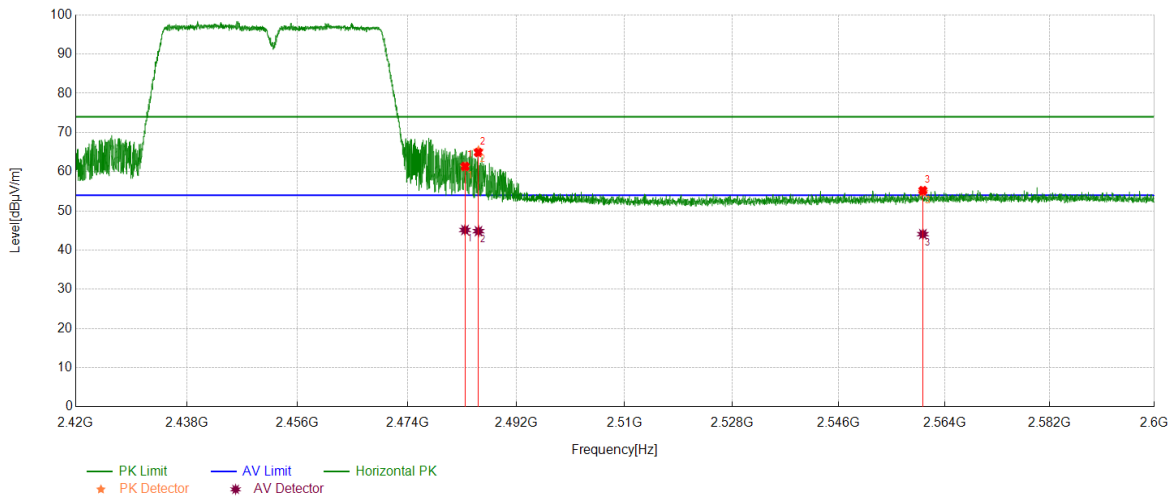

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.4873	48.27	12.97	61.24	74.00	-12.76	Horizontal
2	2485.7172	52.36	12.97	65.33	74.00	-8.67	Horizontal
3	2560.2825	41.37	13.41	54.78	74.00	-19.22	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.4873	32.16	12.97	45.13	54.00	-8.87	Horizontal
2	2485.7172	31.87	12.97	44.84	54.00	-9.16	Horizontal
3	2560.2825	30.66	13.41	44.07	54.00	-9.93	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

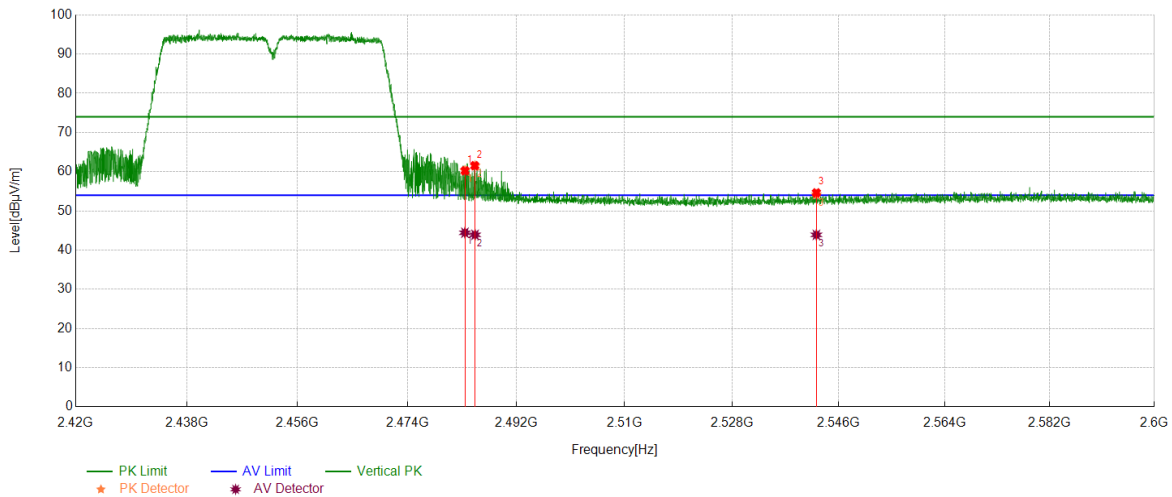

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.4758	47.32	12.97	60.29	74.00	-13.71	Vertical
2	2485.1491	48.51	12.97	61.48	74.00	-12.52	Vertical
3	2542.2128	40.76	13.40	54.16	74.00	-19.84	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.4758	31.46	12.97	44.43	54.00	-9.57	Vertical
2	2485.1491	30.93	12.97	43.90	54.00	-10.10	Vertical
3	2542.2128	30.49	13.40	43.89	54.00	-10.11	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



7.6.4.SPURIOUS EMISSIONS

TEST RESULTS TABLE

1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

2) For 9KHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:


1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.



Part 1: 1GHz~3GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

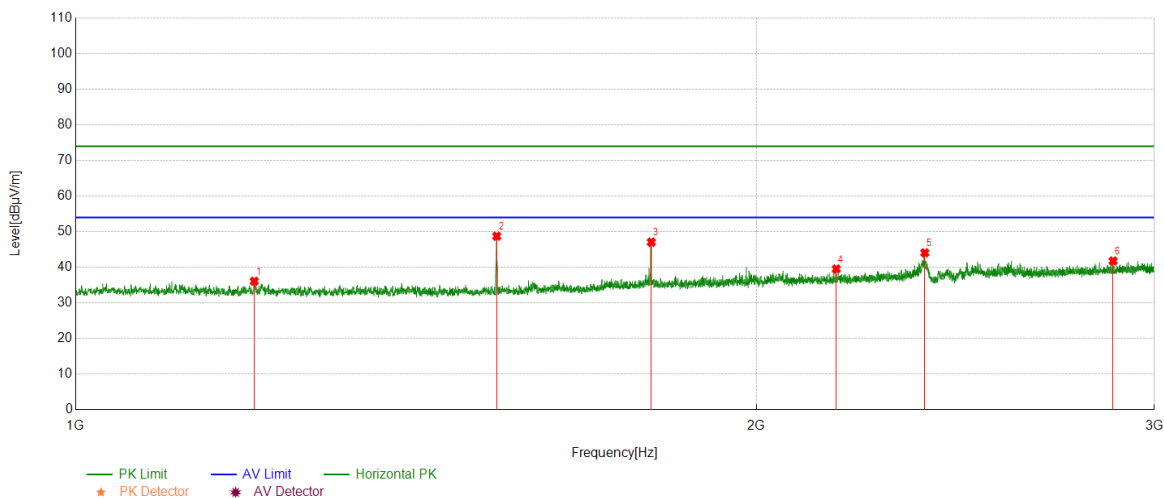


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1199.5249	41.66	-5.56	36.10	74.00	-37.90	Horizontal
2	1535.5669	54.50	-5.75	48.75	74.00	-25.25	Horizontal
3	1797.3497	50.89	-3.82	47.07	74.00	-26.93	Horizontal
4	2169.8962	41.88	-2.32	39.56	74.00	-34.44	Horizontal
5	2374.6718	45.18	-1.11	44.07	74.00	-29.93	Horizontal
6	2876.7346	41.55	0.24	41.79	74.00	-32.21	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

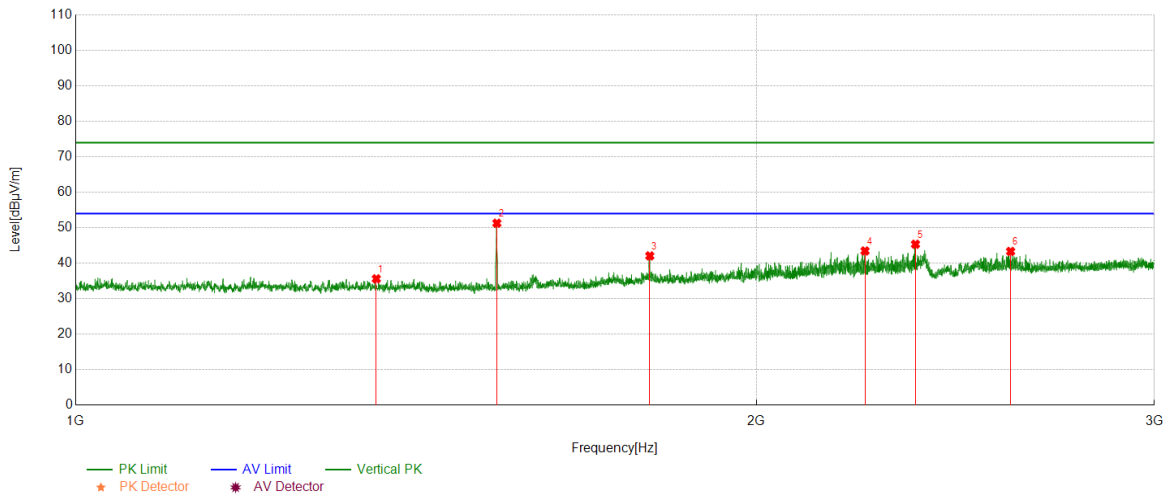


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1358.2948	41.25	-5.62	35.63	74.00	-38.37	Vertical
2	1535.817	57.04	-5.75	51.29	74.00	-22.71	Vertical
3	1794.5993	45.87	-3.79	42.08	74.00	-31.92	Vertical
4	2234.4043	45.69	-2.22	43.47	74.00	-30.53	Vertical
5	2352.169	46.93	-1.57	45.36	74.00	-28.64	Vertical
6	2591.4489	44.10	-0.76	43.34	74.00	-30.66	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

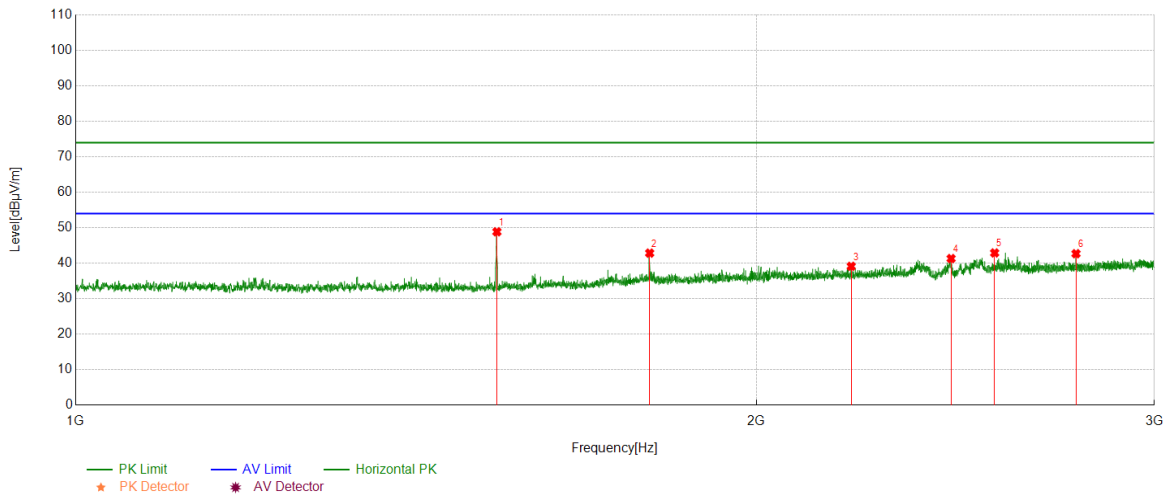


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1535.817	54.62	-5.75	48.87	74.00	-25.13	Horizontal
2	1794.3493	46.64	-3.78	42.86	74.00	-31.14	Horizontal
3	2203.1504	41.48	-2.33	39.15	74.00	-34.85	Horizontal
4	2439.1799	42.09	-0.76	41.33	74.00	-32.67	Horizontal
5	2549.6937	43.89	-0.98	42.91	74.00	-31.09	Horizontal
6	2769.9712	42.91	-0.21	42.70	74.00	-31.30	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

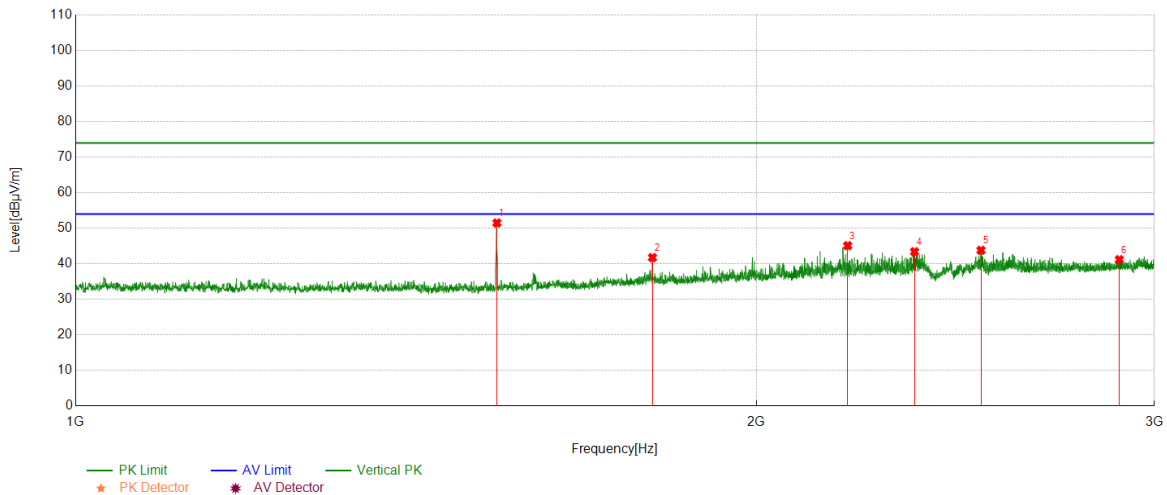


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1535.817	57.24	-5.75	51.49	74.00	-22.51	Vertical
2	1799.3499	45.60	-3.84	41.76	74.00	-32.24	Vertical
3	2195.1494	47.42	-2.33	45.09	74.00	-28.91	Vertical
4	2349.9187	45.08	-1.68	43.40	74.00	-30.60	Vertical
5	2514.4393	44.16	-0.36	43.80	74.00	-30.20	Vertical
6	2894.9869	40.73	0.44	41.17	74.00	-32.83	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

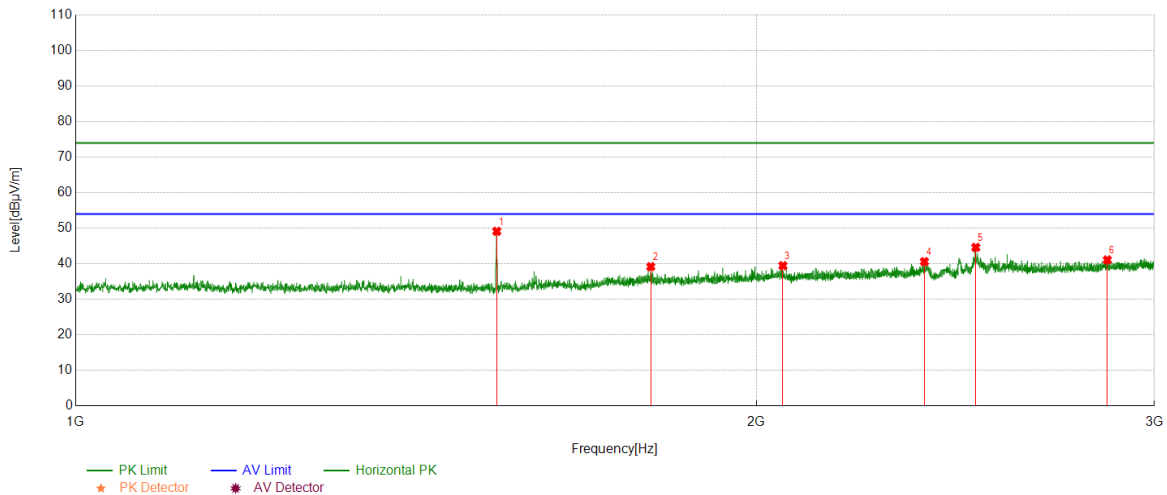


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1535.5669	54.89	-5.75	49.14	74.00	-24.86	Horizontal
2	1796.3495	43.02	-3.81	39.21	74.00	-34.79	Horizontal
3	2055.1319	41.98	-2.51	39.47	74.00	-34.53	Horizontal
4	2373.6717	41.73	-1.11	40.62	74.00	-33.38	Horizontal
5	2501.1876	45.06	-0.44	44.62	74.00	-29.38	Horizontal
6	2859.7325	40.96	0.13	41.09	74.00	-32.91	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

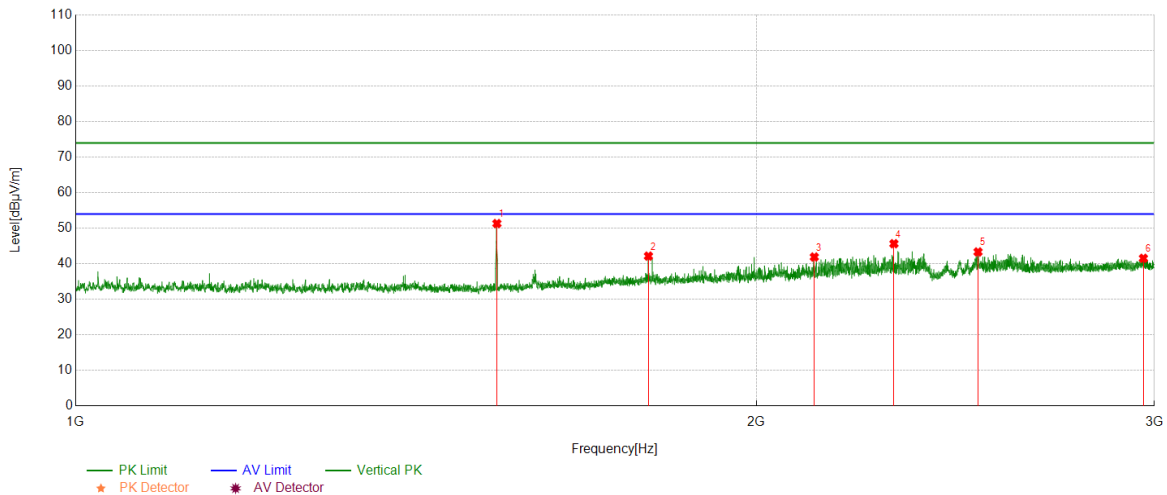


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1535.817	57.07	-5.75	51.32	74.00	-22.68	Vertical
2	1792.099	45.93	-3.76	42.17	74.00	-31.83	Vertical
3	2121.8902	44.30	-2.39	41.91	74.00	-32.09	Vertical
4	2301.1626	47.48	-1.83	45.65	74.00	-28.35	Vertical
5	2506.9384	43.75	-0.41	43.34	74.00	-30.66	Vertical
6	2966.7458	40.48	1.06	41.54	74.00	-32.46	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

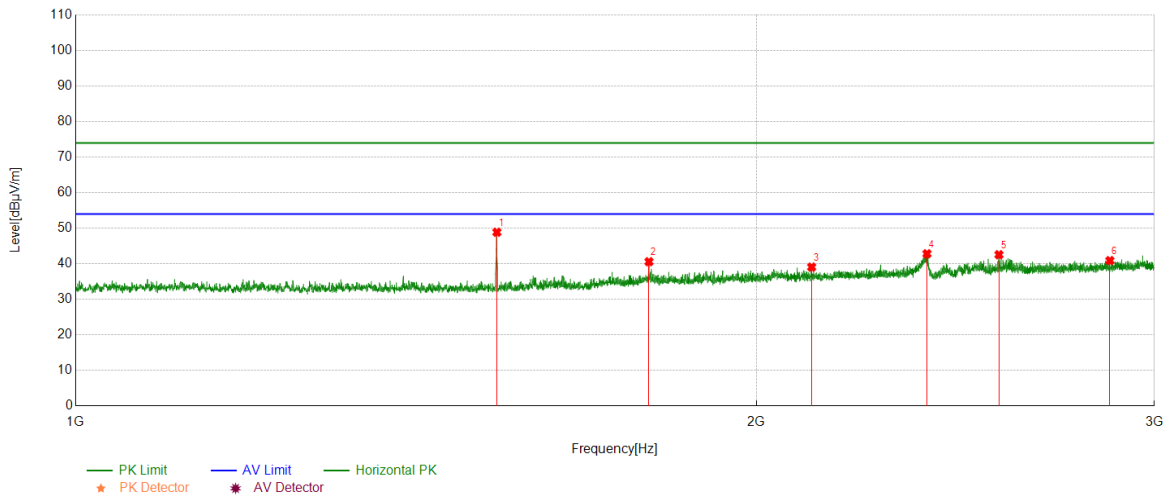

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1397.2500	45.27	-5.69	39.58	74.00	-34.42	Horizontal
2	1800.0000	47.90	-3.85	44.05	74.00	-29.95	Horizontal
3	2337.7500	51.98	-1.81	50.17	74.00	-23.83	Horizontal
4	2373.5000	54.07	-1.11	52.96	74.00	-21.04	Horizontal
5	2499.2500	48.38	-0.45	47.93	74.00	-26.07	Horizontal
6	2927.0000	43.63	0.56	44.19	74.00	-29.81	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.