


ABOVE 1G

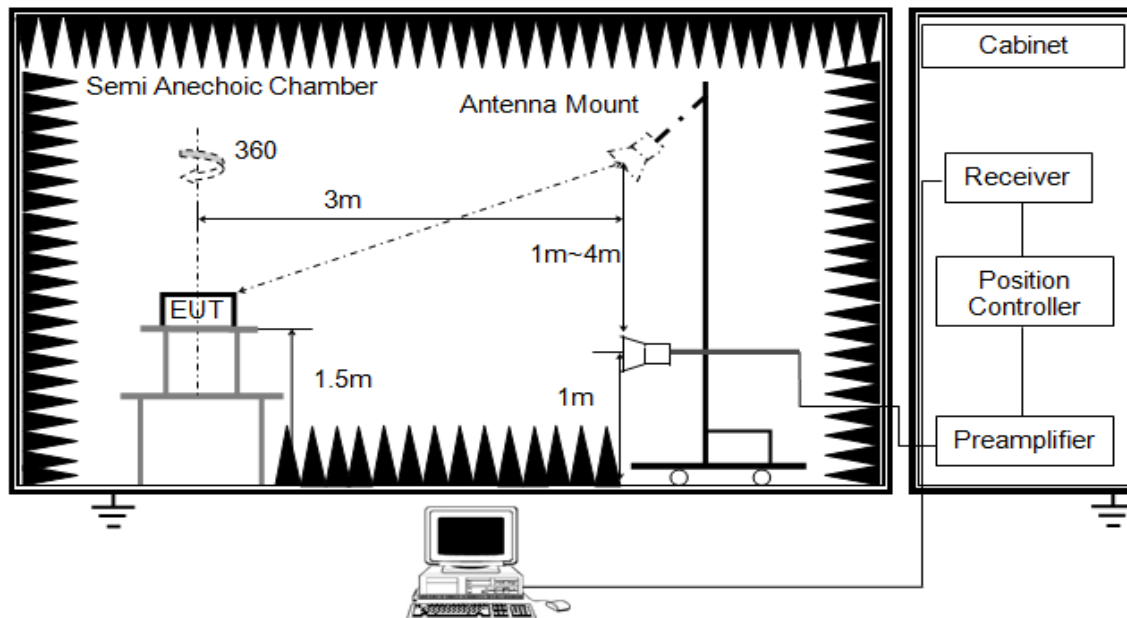


The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

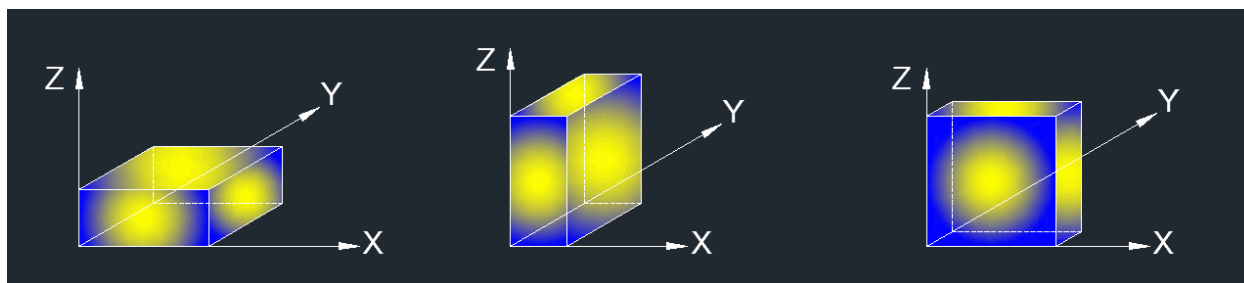

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	DC 12.0V




9.1. RESTRICTED BANDEDGE

9.1.1. 802.11b MODE

Antenna1+Antenna2 TX MODE (WORST-CASE CONFIGURATION)

RESTRICTED BANDEDGE (LOW CHANNEL)

Test Mode	Channel	Polarization	Verdict
11B SISO	LCH	Horizontal	PASS

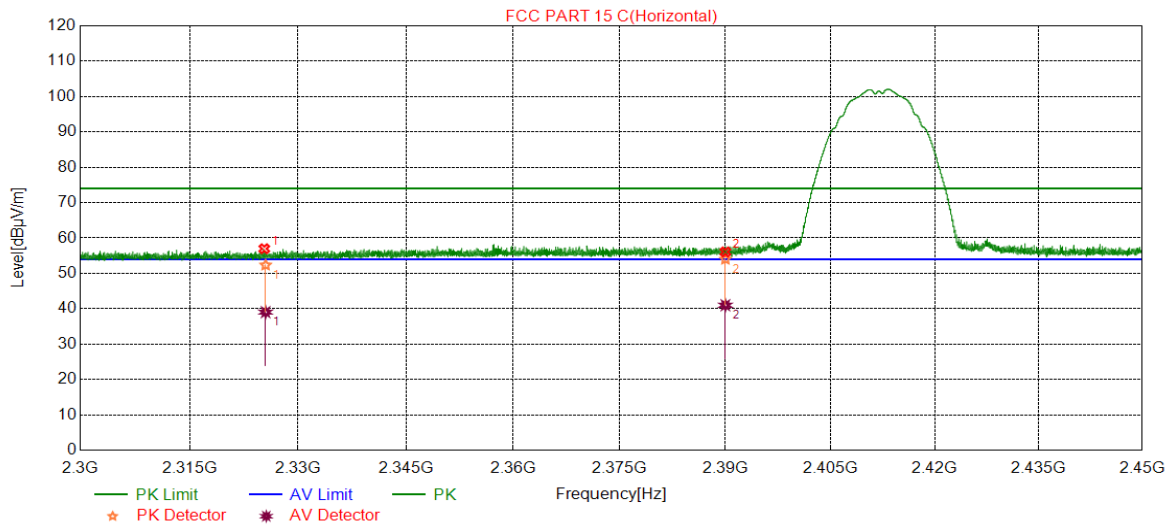


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2325.4913	52.33	74.00	-21.67	Peak
		39.03	54.00	-14.97	Average
2	2390.0000	53.99	74.00	-20.01	Peak
		40.98	54.00	-13.02	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



Test Mode	Channel	Polarization	Verdict
11B SISO	LCH	Vertical	PASS

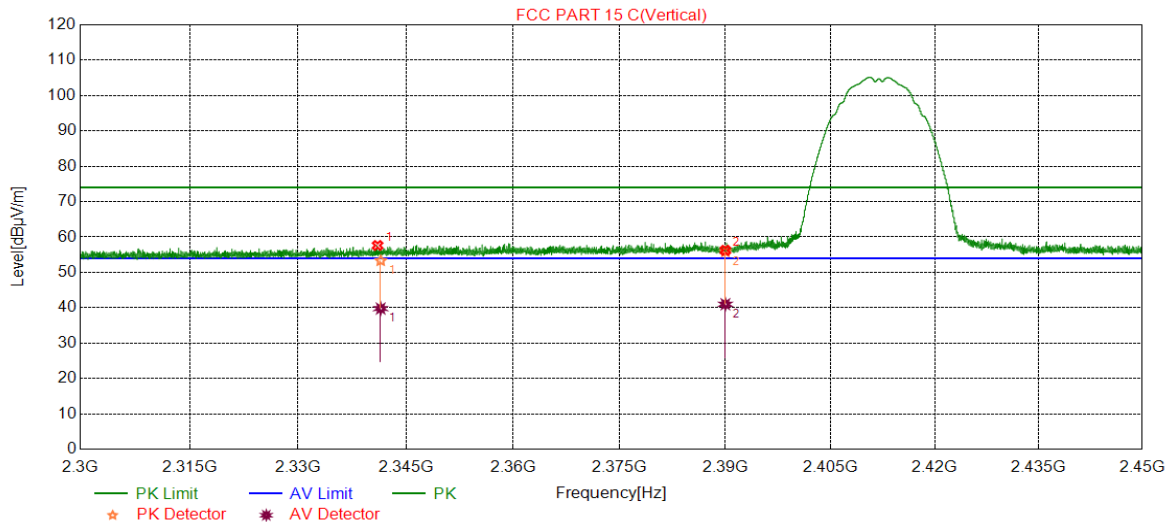


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2341.4725	53.30	74.00	-20.70	Peak
		39.76	54.00	-14.24	Average
2	2390.0000	55.84	74.00	-18.16	Peak
		40.98	54.00	-13.02	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



RESTRICTED BANDEDGE (HIGH CHANNEL)

Test Mode	Channel	Polarization	Verdict
11B SISO	HCH	Horizontal	PASS

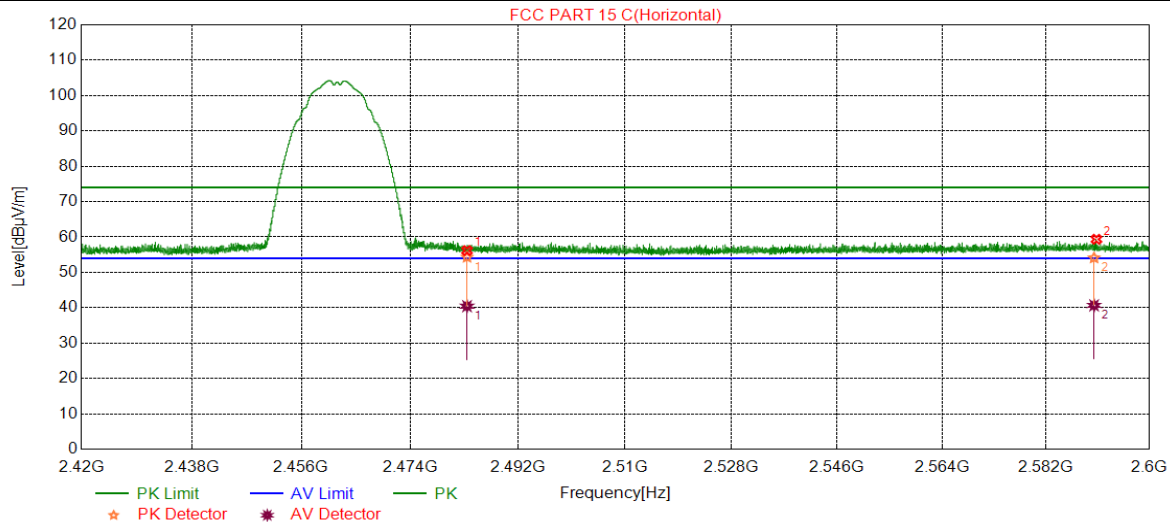


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	54.28	74.00	-19.72	Peak
		40.44	54.00	-13.56	Average
2	2590.3195	54.09	74.00	-19.91	Peak
		40.66	54.00	-13.34	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



Test Mode	Channel	Polarization	Verdict
11B SISO	HCH	Vertical	PASS

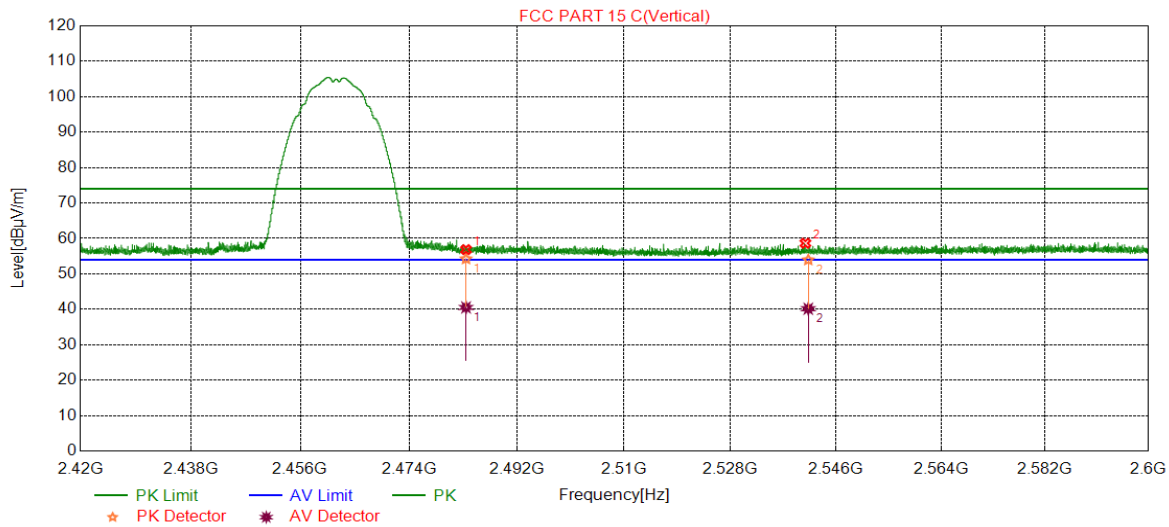

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	54.22	74.00	-19.78	Peak
		40.52	54.00	-13.48	Average
2	2541.2409	53.93	74.00	-20.07	Peak
		40.16	54.00	-13.84	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.




9.1.2. 802.11g MODE

Antenna1+Antenna2 MODE (WORST-CASE CONFIGURATION)

RESTRICTED BANDEDGE (LOW CHANNEL)

Test Mode	Channel	Polarization	Verdict
11G SISO	LCH	Horizontal	PASS

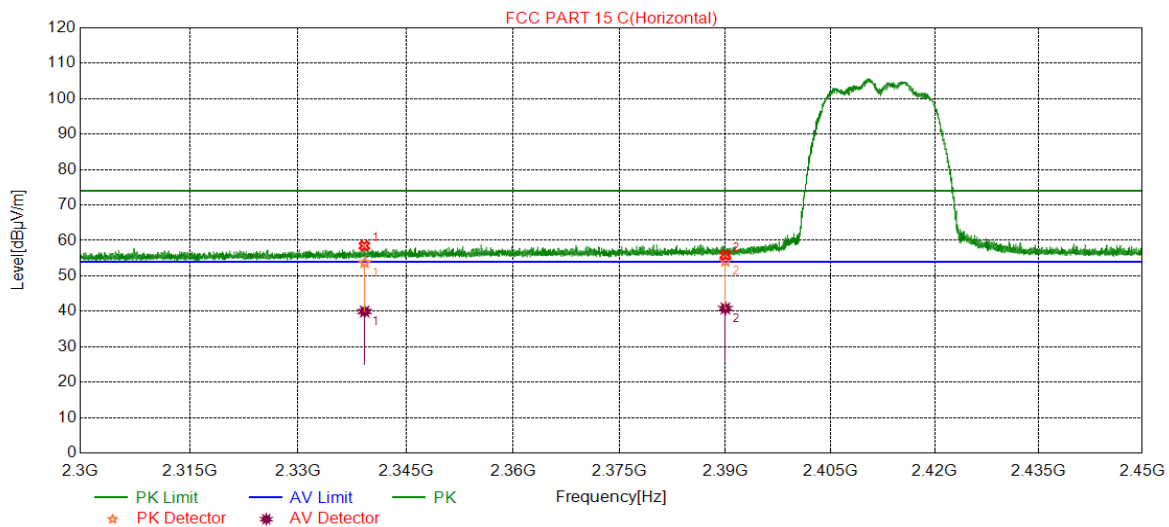


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2339.2362	53.71	74.00	-20.29	Peak
		39.94	54.00	-14.06	Average
2	2390.0000	54.10	74.00	-19.90	Peak
		40.82	54.00	-13.18	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



Test Mode	Channel	Polarization	Verdict
11G SISO	LCH	Vertical	PASS

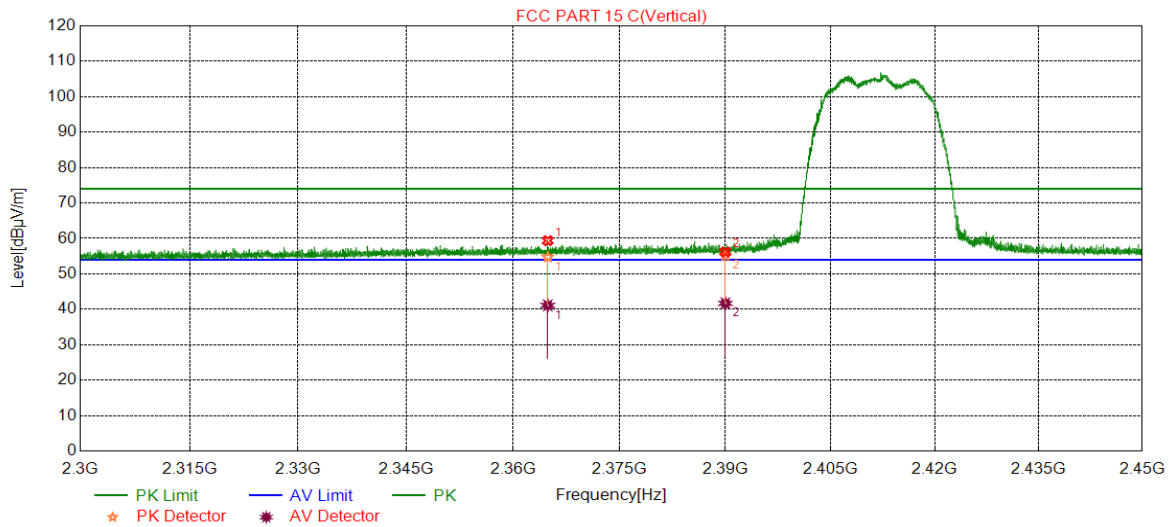


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.8645	54.73	74.00	-19.27	Peak
		41.10	54.00	-12.90	Average
2	2390.0000	55.13	74.00	-18.87	Peak
		41.68	54.00	-12.32	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



RESTRICTED BANDEDGE (HIGH CHANNEL)

Test Mode	Channel	Polarization	Verdict
11G SISO	HCH	Horizontal	PASS

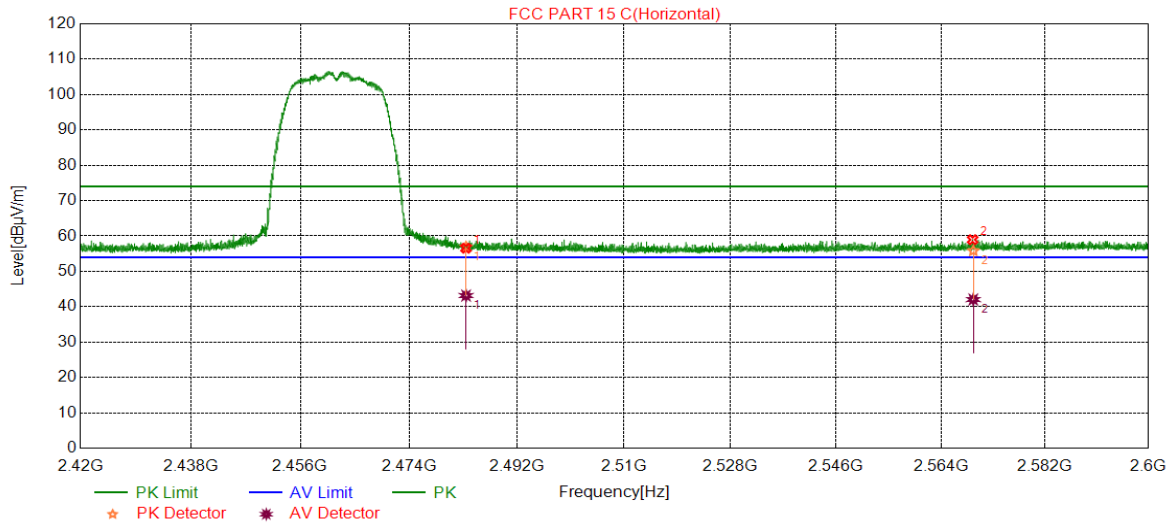


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	56.91	74.00	-17.09	Peak
		43.15	54.00	-10.85	Average
2	2569.5623	55.82	74.00	-18.18	Peak
		42.03	54.00	-11.97	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



Test Mode	Channel	Polarization	Verdict
11G SISO	HCH	Vertical	PASS

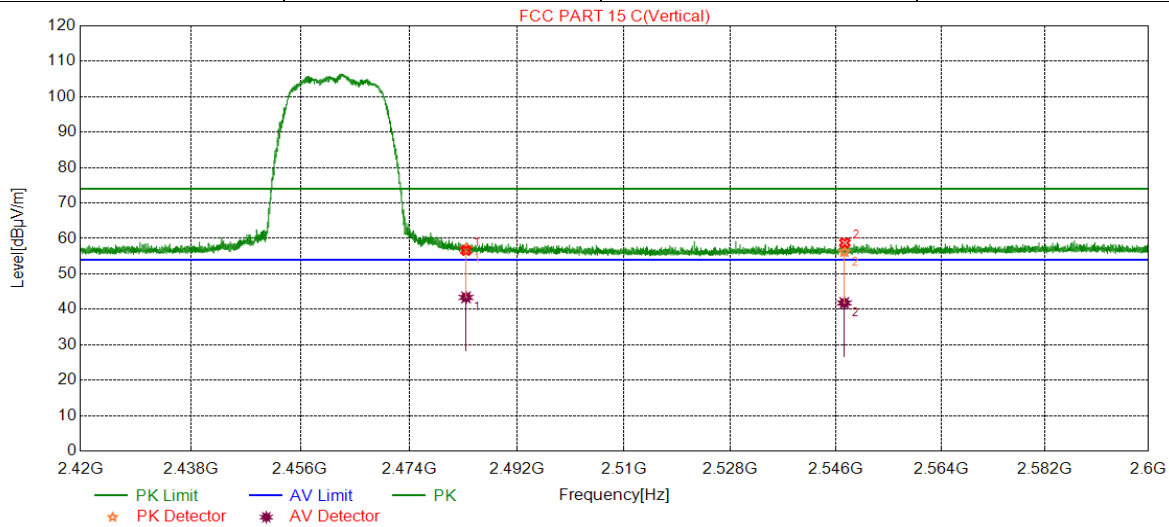

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	57.16	74.00	-16.84	Peak
		43.36	54.00	-10.64	Average
2	2547.3990	56.19	74.00	-17.81	Peak
		41.78	54.00	-12.22	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.




9.1.3. 802.11n HT20 MODE

Antenna1+Antenna2 MODE (WORST-CASE CONFIGURATION)

RESTRICTED BANDEDGE (LOW CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N20MIMO	LCH	Horizontal	PASS

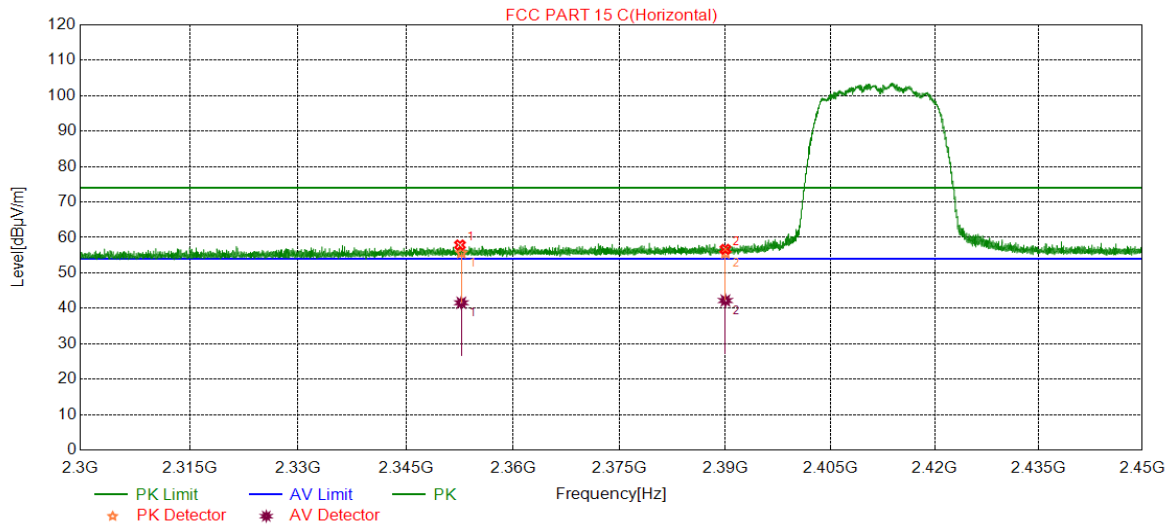


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2352.7355	55.62	74.00	-18.38	Peak
		41.56	54.00	-12.44	Average
2	2390.0000	55.49	74.00	-18.51	Peak
		42.19	54.00	-11.81	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



Test Mode	Channel	Polarization	Verdict
11N20MIMO	LCH	Vertical	PASS

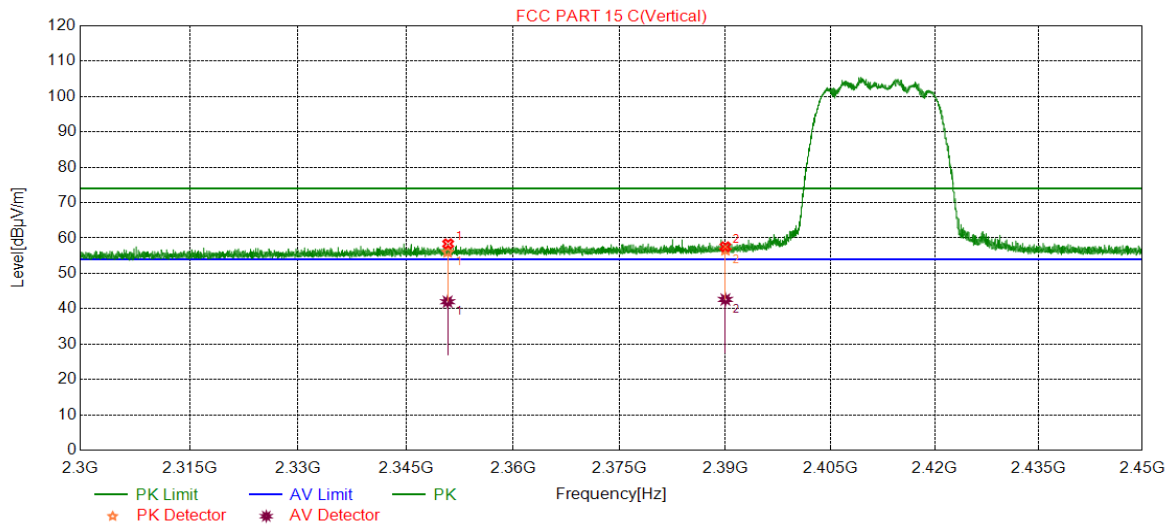


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2350.8156	55.97	74.00	-18.03	Peak
		41.98	54.00	-12.02	Average
2	2390.0000	56.54	74.00	-17.46	Peak
		42.61	54.00	-11.39	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



RESTRICTED BANDEDGE (HIGH CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N20MIMO	HCH	Horizontal	PASS

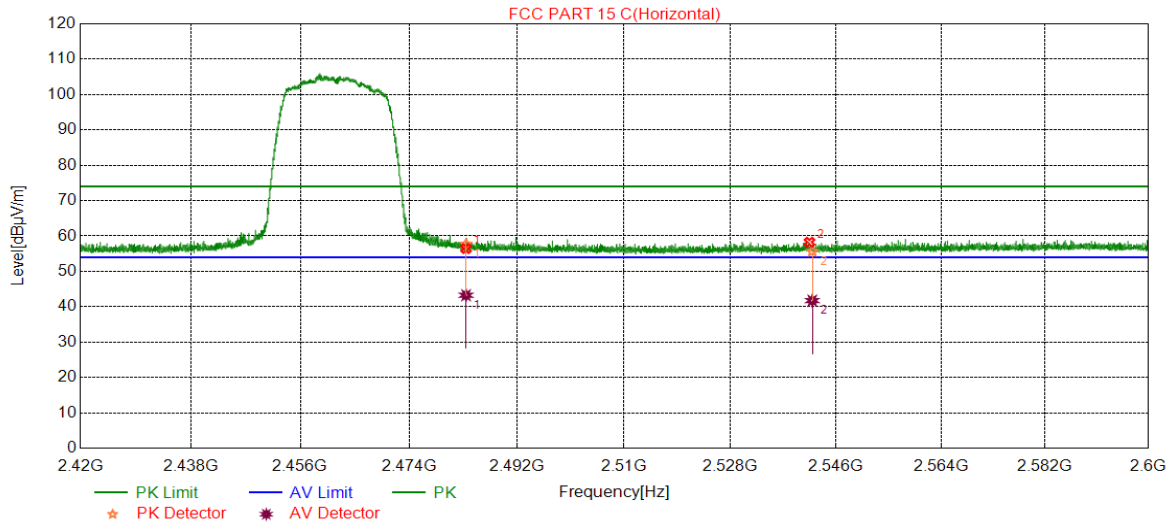


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	57.68	74.00	-16.32	Peak
		43.24	54.00	-10.76	Average
2	2541.9284	55.65	74.00	-18.35	Peak
		41.73	54.00	-12.27	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



Test Mode	Channel	Polarization	Verdict
11N20MIMO	HCH	Vertical	PASS

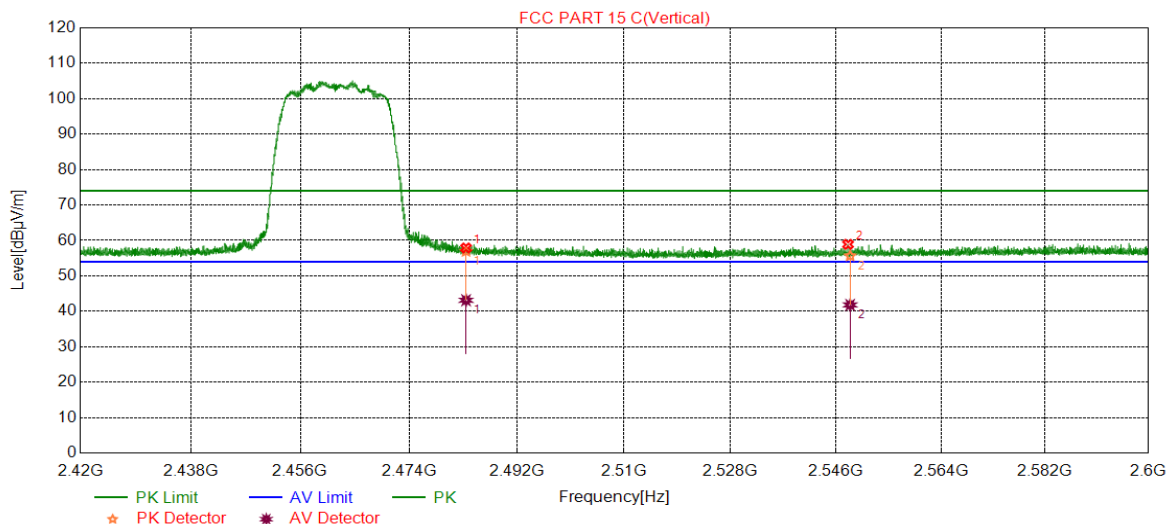

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	56.94	74.00	-17.06	Peak
		43.12	54.00	-10.88	Average
2	2548.3956	55.64	74.00	-18.36	Peak
		41.79	54.00	-12.21	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.




9.1.4. 802.11n HT40 MODE

Antenna1+Antenna2 MODE (WORST-CASE CONFIGURATION)

RESTRICTED BANDEDGE (LOW CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N40MIMO	LCH	Horizontal	PASS

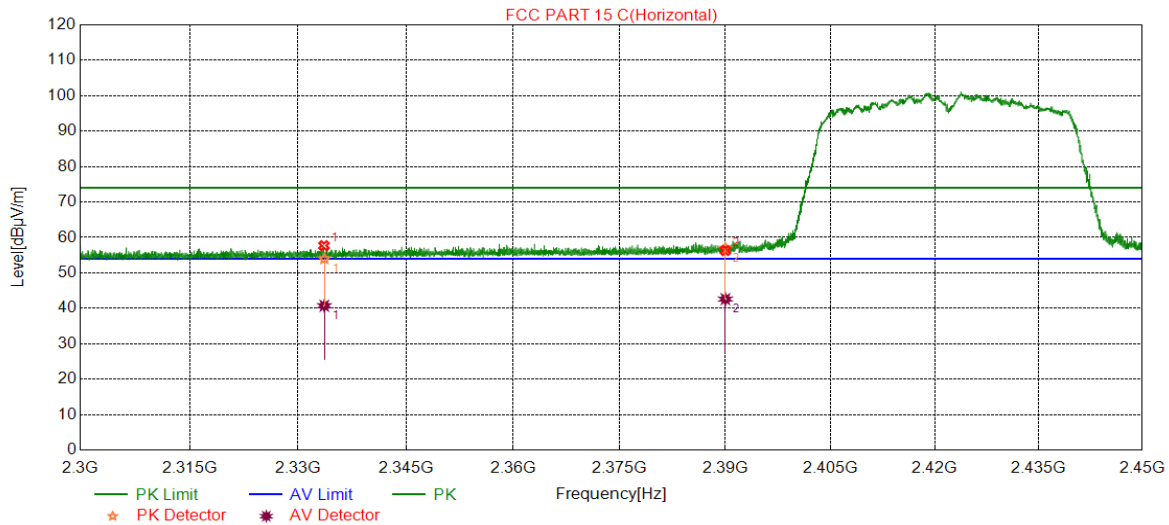


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2333.6346	53.96	74.00	-20.04	Peak
		40.71	54.00	-13.29	Average
2	2390.0000	56.95	74.00	-17.05	Peak
		42.60	54.00	-11.40	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



Test Mode	Channel	Polarization	Verdict
11N40MIMO	LCH	Vertical	PASS

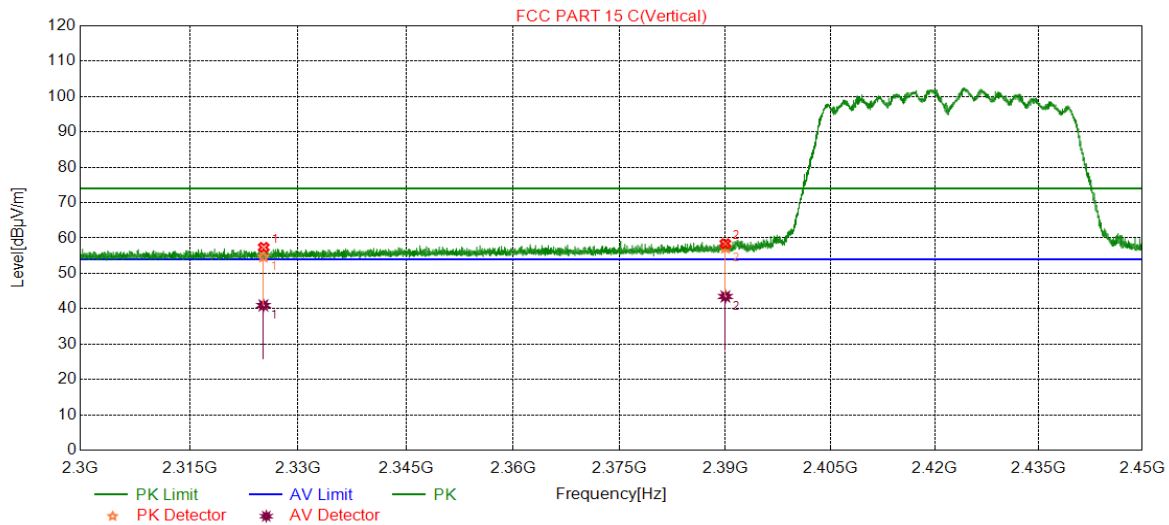


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	2325.1878	54.61	74.00	-19.39	Peak
		40.94	54.00	-13.06	Average
2	2390.0000	57.14	74.00	-16.86	Peak
		43.46	54.00	-10.54	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



RESTRICTED BANDEDGE (HIGH CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N40MIMO	HCH	Horizontal	PASS

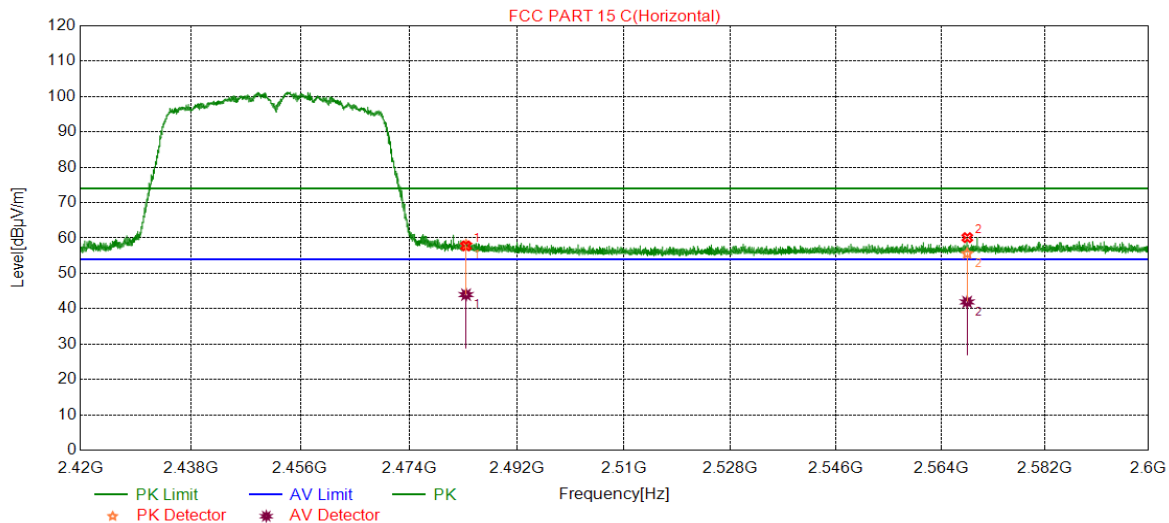


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	57.97	74.00	-16.03	Peak
		43.98	54.00	-10.02	Average
2	2568.5014	55.60	74.00	-18.40	Peak
		41.91	54.00	-12.09	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.



Test Mode	Channel	Polarization	Verdict
11N40MIMO	HCH	Vertical	PASS

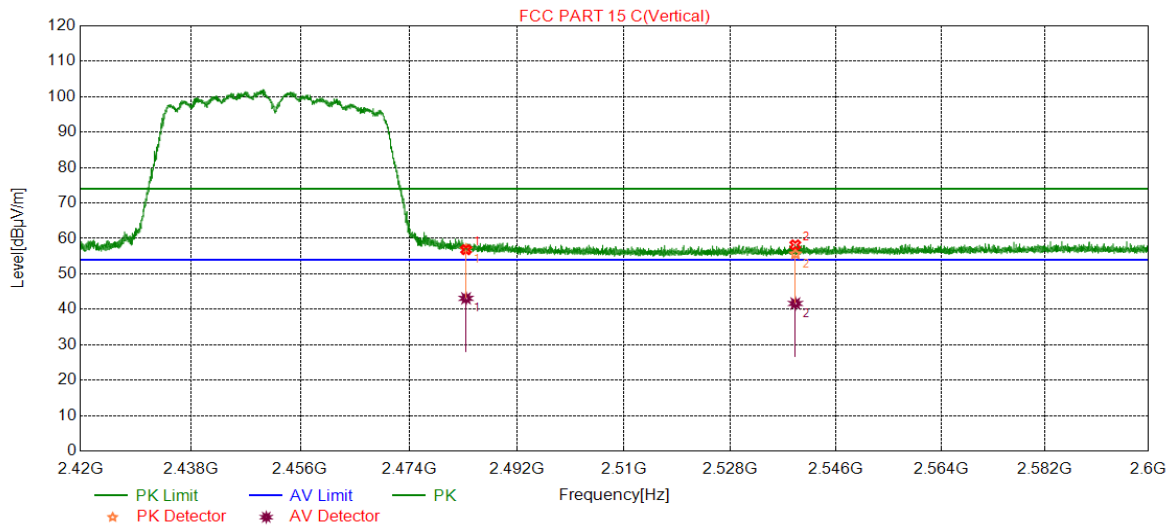

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	56.91	74.00	-17.09	Peak
		43.09	54.00	-10.91	Average
2	2539.0445	55.61	74.00	-18.39	Peak
		41.64	54.00	-12.36	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
6. For all the test results have been considered the correct factors.


9.2. SPURIOUS EMISSIONS (1~18GHz)

9.2.1. 802.11b MODE

Antenna1+Antenna2 MODE (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL)

Test Mode	Channel	Polarization	Verdict
11B SISO	LCH	Horizontal	PASS

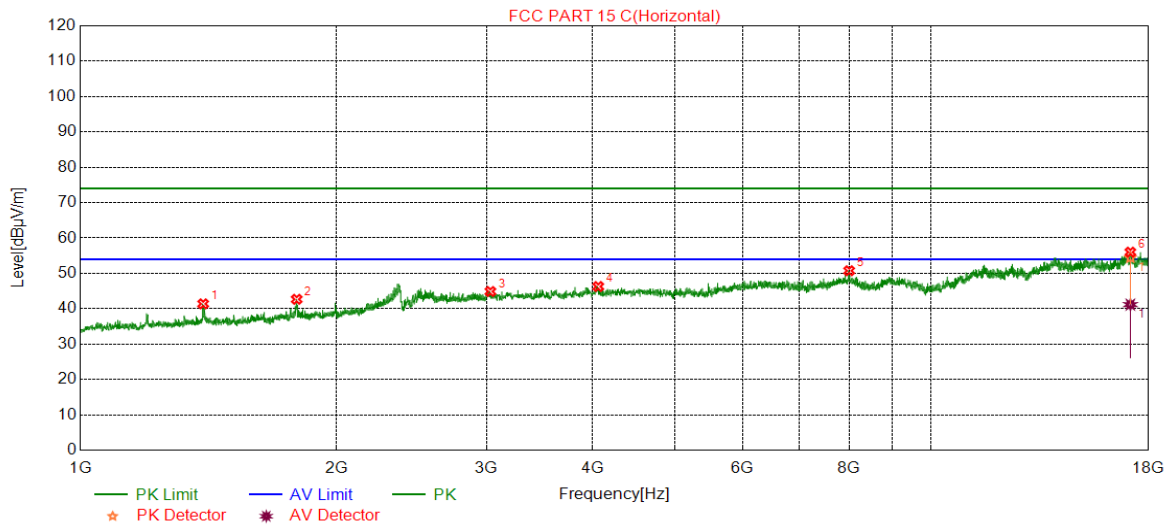


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1394.1314	41.38	74.00	-32.62	--	--	Peak
2	1795.5985	42.67	74.00	-31.33	--	--	Peak
3	3032.5054	44.87	74.00	-29.13	--	--	Peak
4	4060.1767	46.28	74.00	-27.72	--	--	Peak
5	8005.8343	50.73	74.00	-23.27	--	--	Peak
6	1394.1314	41.38	74.00	-32.62	--	--	Peak
7	17132.3205	54.42	74.00	-19.58	--	--	Peak
		41.16	--	--	54.00	-12.84	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11B SISO	LCH	Vertical	PASS

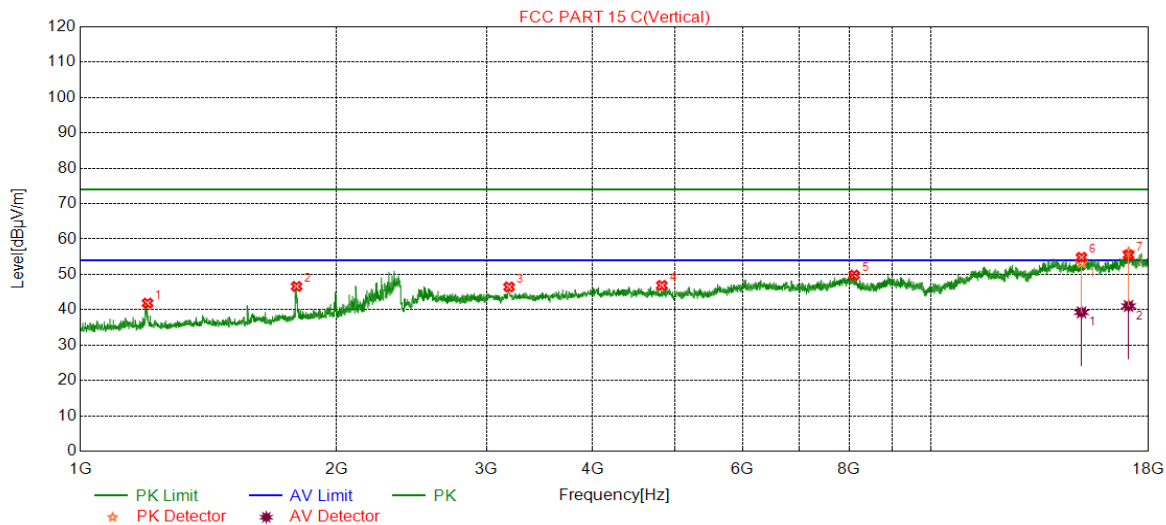


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV /m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1199.3998	41.86	74.00	-32.14	--	--	Peak
2	1794.9316	46.59	74.00	-27.41	--	--	Peak
3	3190.0317	46.44	74.00	-27.56	--	--	Peak
4	4822.8038	46.88	74.00	-27.12	--	--	Peak
5	8113.3522	49.81	74.00	-24.19	--	--	Peak
6	15009.5304	53.17	74.00	-20.83	--	--	Peak
		39.26	--	--	54.00	-14.74	Average
7	17047.3412	56.15	74.00	-17.85	--	--	Peak
		41.06	--	--	54.00	-12.94	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL)**

Test Mode	Channel	Polarization	Verdict
11B SISO	MCH	Horizontal	PASS

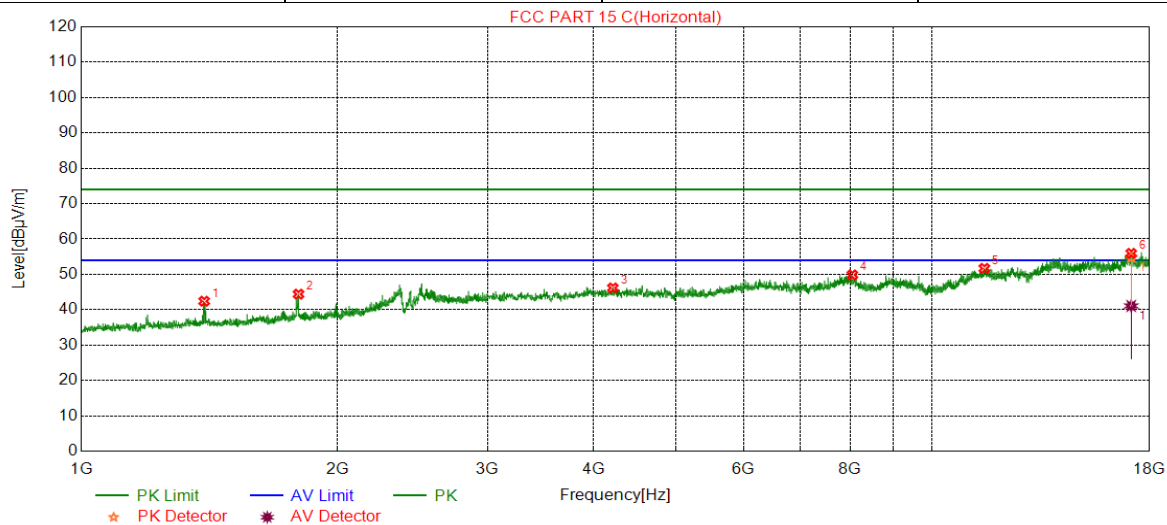


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1394.1314	42.41	74.00	-31.59	--	--	Peak
2	1799.5999	44.40	74.00	-29.60	--	--	Peak
3	4212.7021	46.16	74.00	-27.84	--	--	Peak
4	8053.3422	49.85	74.00	-24.15	--	--	Peak
5	11511.4186	51.69	74.00	-22.31	--	--	Peak
6	17124.8839	54.76	74.00	-19.24	--	--	Peak
		41.07	--	--	54.00	-12.93	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11B SISO	MCH	Vertical	PASS

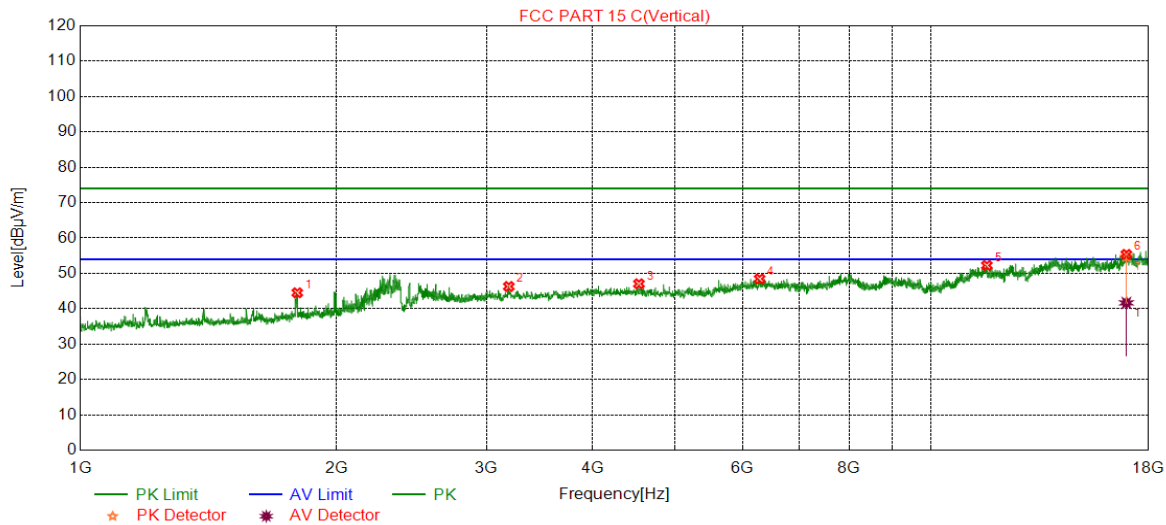


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1798.2661	44.51	74.00	-29.49	--	--	Peak
2	3187.5313	46.29	74.00	-27.71	--	--	Peak
3	4532.7555	47.04	74.00	-26.96	--	--	Peak
4	6283.0472	48.44	74.00	-25.56	--	--	Peak
5	11618.9365	52.23	74.00	-21.77	--	--	Peak
6	16947.2936	54.72	74.00	-19.28	--	--	Peak
		41.65	--	--	54.00	-12.35	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL)

Test Mode	Channel	Polarization	Verdict
11B SISO	HCH	Horizontal	PASS

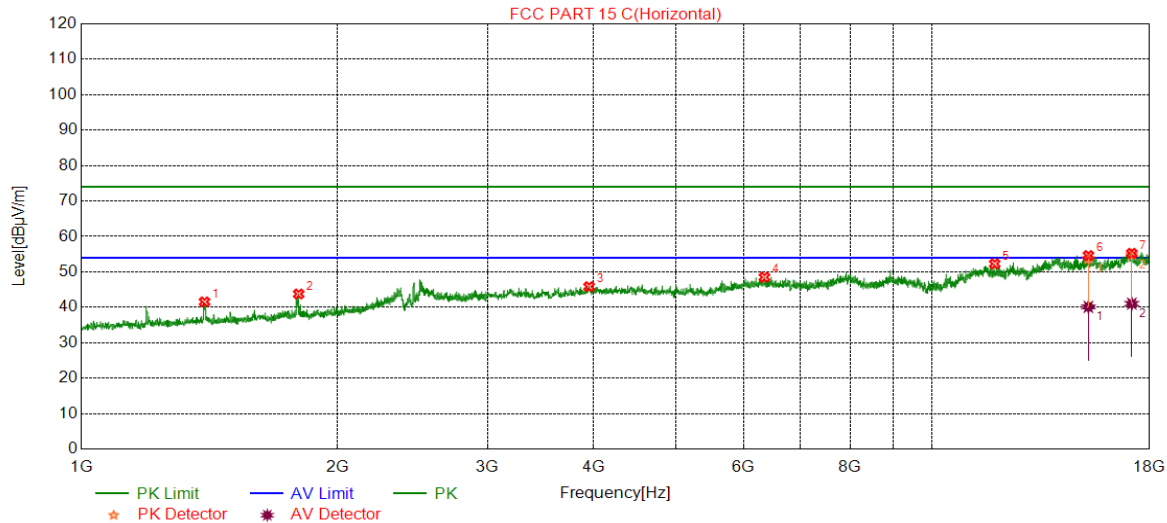


No.	Frequency	Result	Limit	Margin	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(Peak)	(Peak)	(Ave)	(Ave)	
			(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1395.4652	41.53	74.00	-32.47	--	--	Peak
2	1800.2668	43.76	74.00	-30.24	--	--	Peak
3	3950.1584	45.82	74.00	-28.18	--	--	Peak
4	6348.0580	48.47	74.00	-25.53	--	--	Peak
5	11836.4727	52.27	74.00	-21.73	--	--	Peak
6	15251.9950	53.74	74.00	-20.26	--	--	Peak
		40.12	--	--	54.00	-13.88	Average
7	17152.3587	54.80	74.00	-19.20	--	--	Peak
		41.04	--	--	54.00	-12.96	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11B SISO	HCH	Vertical	PASS

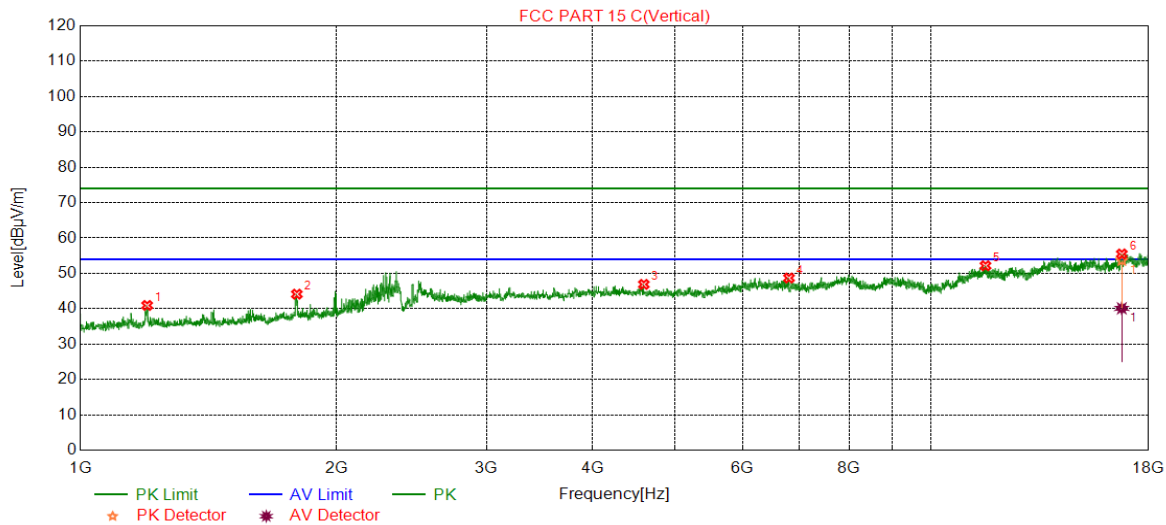

No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1198.0660	40.93	74.00	-33.07	--	--	Peak
2	1796.2654	44.12	74.00	-29.88	--	--	Peak
3	4592.7655	46.88	74.00	-27.12	--	--	Peak
4	6803.1339	48.68	74.00	-25.32	--	--	Peak
5	11576.4294	52.15	74.00	-21.85	--	--	Peak
6	16739.74	53.63	74.00	-20.37	--	--	Peak
		40.11	--	--	54.00	-13.89	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.




9.2.2. 802.11g MODE

Antenna1+Antenna2 MODE (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL)

Test Mode	Channel	Polarization	Verdict
11G SISO	LCH	Horizontal	PASS

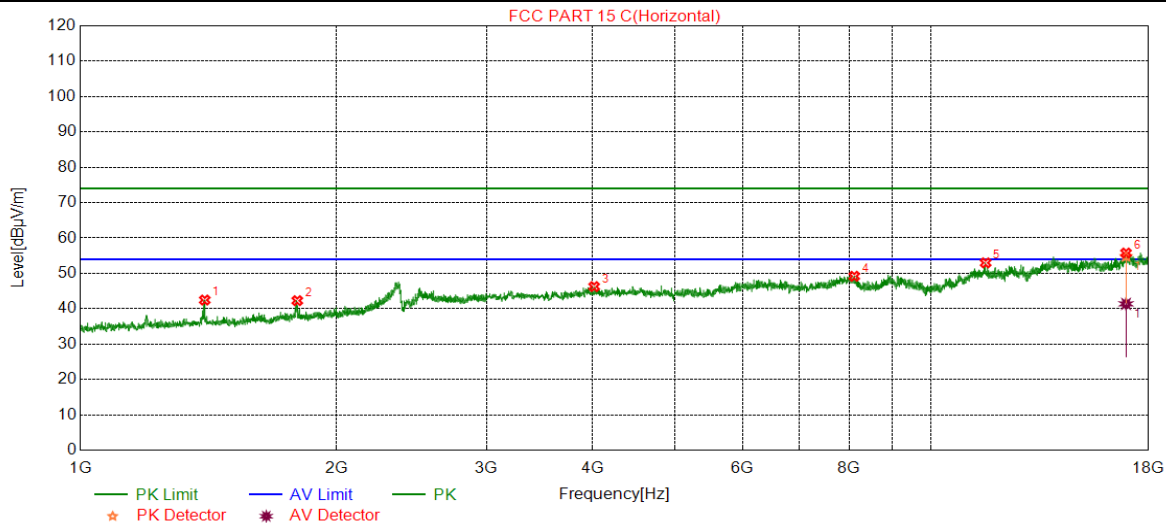


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1400.1334	42.46	74.00	-31.54	--	--	Peak
2	1798.2661	42.28	74.00	-31.72	--	--	Peak
3	4015.1692	46.26	74.00	-27.74	--	--	Peak
4	8115.8526	49.19	74.00	-24.81	--	--	Peak
5	11581.4302	52.98	74.00	-21.02	--	--	Peak
6	16932.3573	54.78	74.00	-19.22	--	--	Peak
		41.37	--	--	54.00	-12.63	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11G SISO	LCH	Vertical	PASS

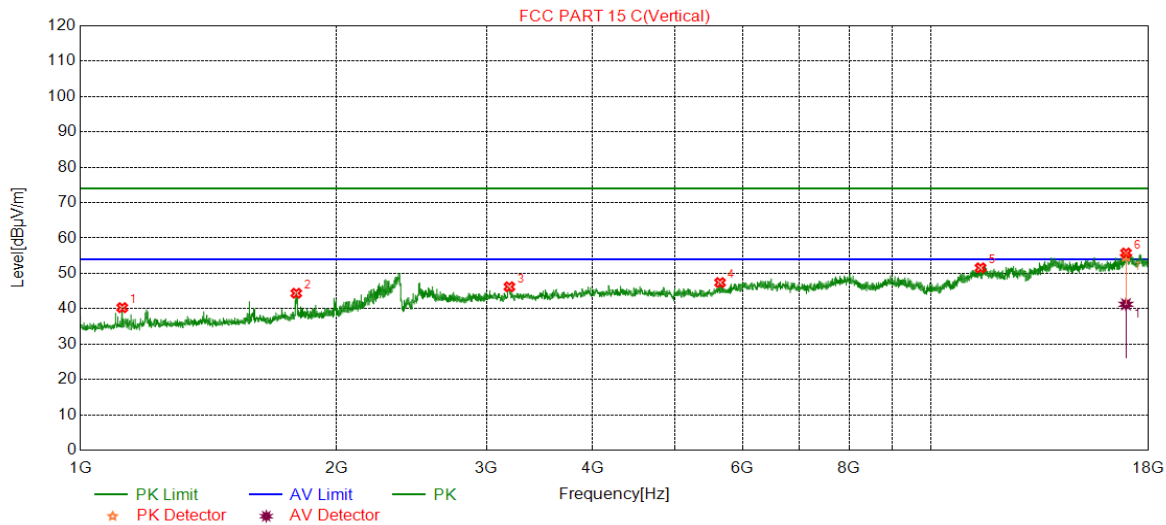


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1120.0400	40.30	74.00	-33.70	--	--	Peak
2	1793.5979	44.37	74.00	-29.63	--	--	Peak
3	3192.5321	46.20	74.00	-27.80	--	--	Peak
4	5645.4409	47.39	74.00	-26.61	--	--	Peak
5	11421.4036	51.56	74.00	-22.44	--	--	Peak
6	16929.8465	54.79	74.00	-19.21	--	--	Peak
		41.24	--	--	54.00	-12.76	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL)

Test Mode	Channel	Polarization	Verdict
11G SISO	MCH	Horizontal	PASS

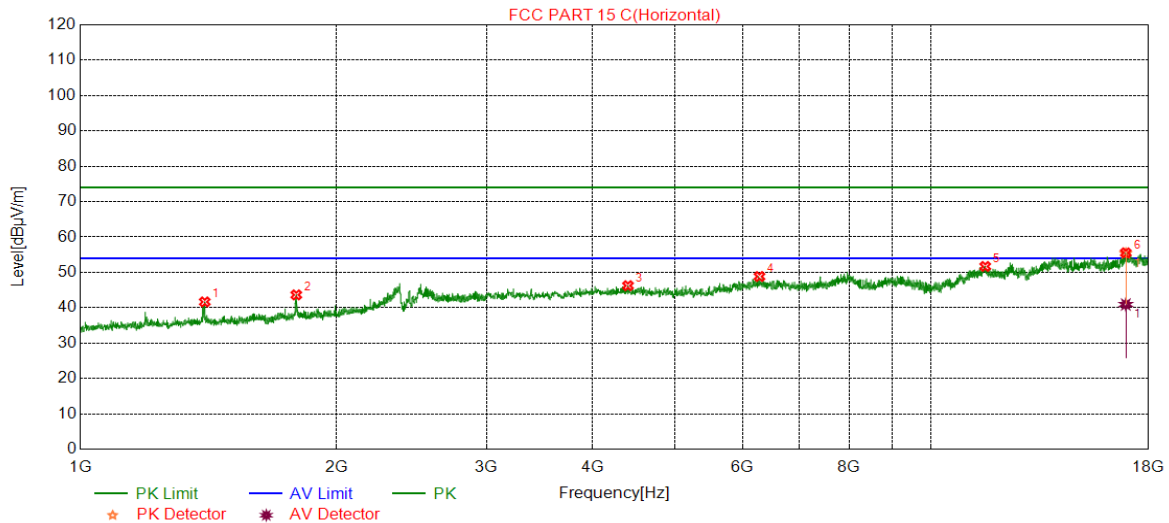


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV /m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1400.1334	41.65	74.00	-32.35	--	--	Peak
2	1793.5979	43.63	74.00	-30.37	--	--	Peak
3	4400.2334	46.23	74.00	-27.77	--	--	Peak
4	6280.5468	48.83	74.00	-25.17	--	--	Peak
5	11568.9282	51.67	74.00	-22.33	--	--	Peak
6	16922.2706	55.34	74.00	-18.66	--	--	Peak
		40.91	--	--	54.00	-13.09	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11G SISO	MCH	Vertical	PASS

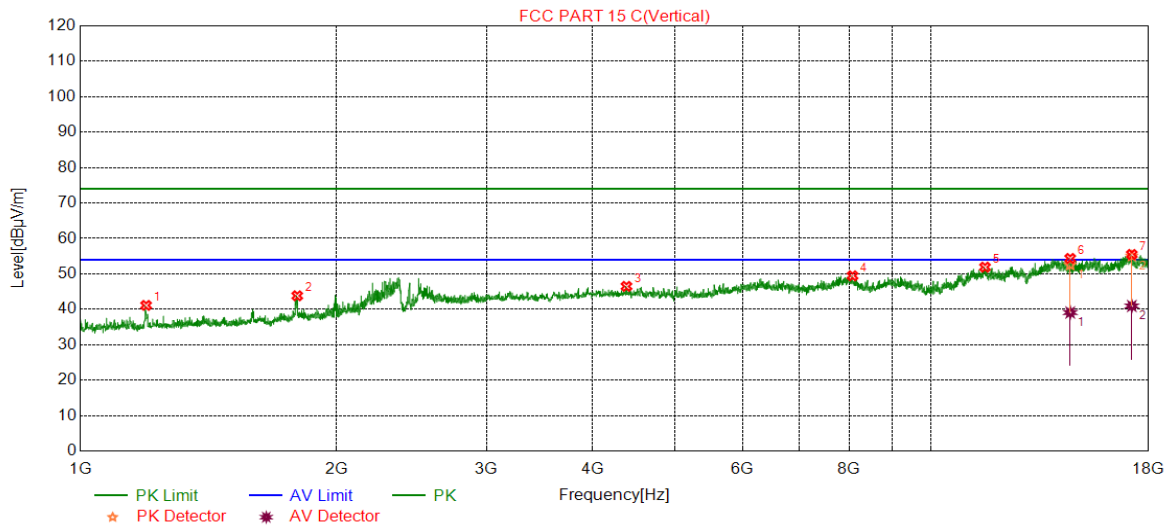


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1194.7316	41.10	74.00	-32.90	--	--	Peak
2	1798.2661	43.82	74.00	-30.18	--	--	Peak
3	4382.7305	46.47	74.00	-27.53	--	--	Peak
4	8078.3464	49.45	74.00	-24.55	--	--	Peak
5	11561.4269	51.90	74.00	-22.10	--	--	Peak
6	14559.4490	52.51	74.00	-21.49	--	--	Peak
		39.09	--	--	54.00	-14.91	Average
7	17199.8666	55.03	74.00	-18.97	--	--	Peak
		40.93	--	--	54.00	-13.07	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL)

Test Mode	Channel	Polarization	Verdict
11G SISO	HCH	Horizontal	PASS

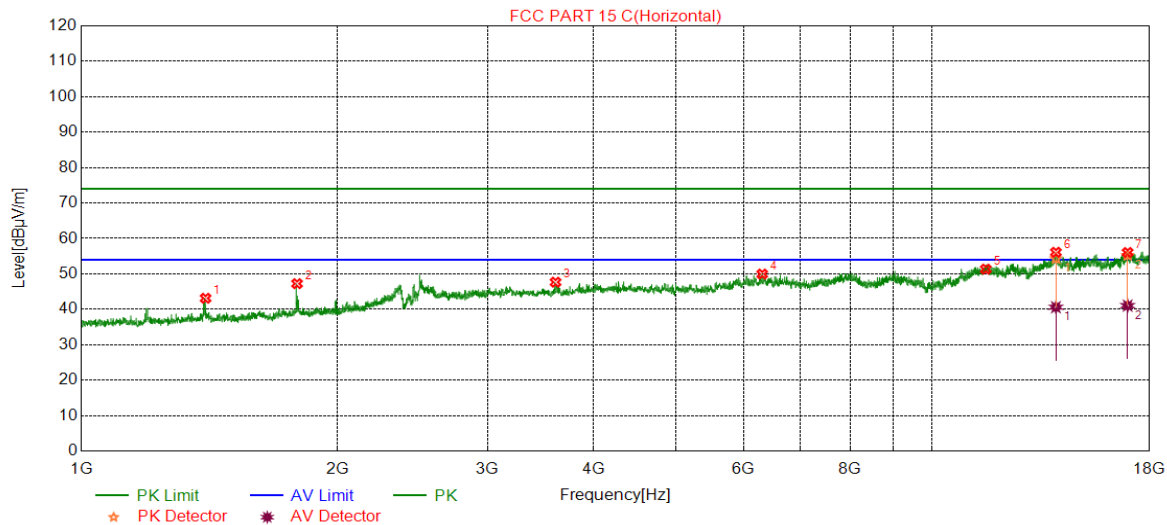


No.	Frequency	Result	Limit	Margin	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(Peak)	(Peak)	(Ave)	(Ave)	
			(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1399.4665	43.12	74.00	-30.88	--	--	Peak
2	1792.2641	47.24	74.00	-26.76	--	--	Peak
3	3607.6013	47.65	74.00	-26.35	--	--	Peak
4	6310.5518	49.95	74.00	-24.05	--	--	Peak
5	11556.4261	51.33	74.00	-22.67	--	--	Peak
6	13969.2783	54.30	74.00	-19.70	--	--	Peak
		40.59	--	--	54.00	-13.41	Average
7	16959.8266	55.21	74.00	-18.79	--	--	Peak
		41.04	--	--	54.00	-12.96	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11G SISO	HCH	Vertical	PASS

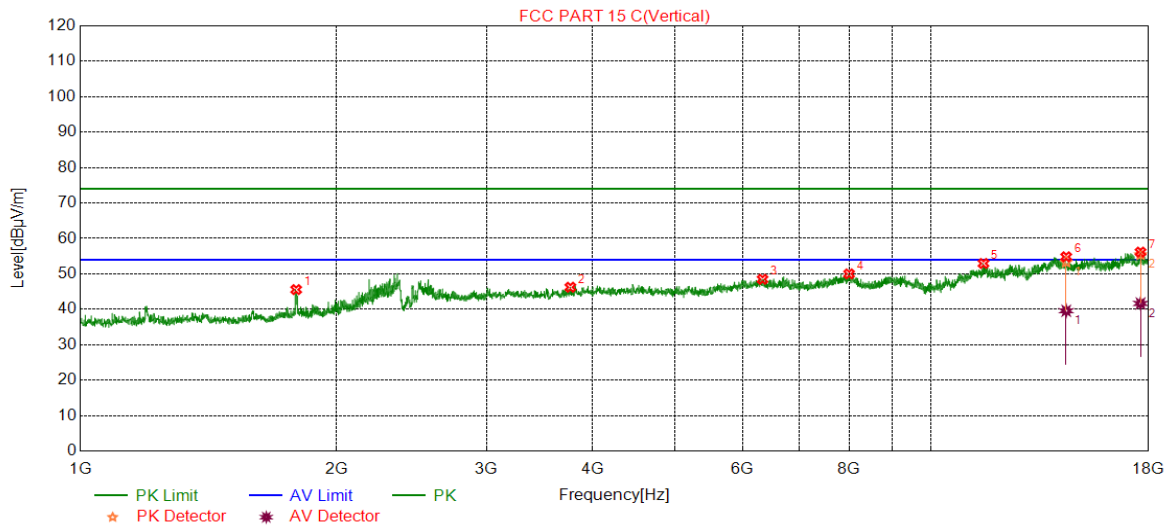

No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1792.9310	45.56	74.00	-28.44	--	--	Peak
2	3765.1275	46.23	74.00	-27.77	--	--	Peak
3	6333.0555	48.47	74.00	-25.53	--	--	Peak
4	8003.3339	50.00	74.00	-24.00	--	--	Peak
5	11513.9190	52.94	74.00	-21.06	--	--	Peak
6	14401.9321	53.29	74.00	-20.71	--	--	Peak
		39.58	--	--	54.00	-14.42	Average
7	17609.9350	55.40	74.00	-18.60	--	--	Peak
		41.65	--	--	54.00	-12.35	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.




9.2.3. 802.11n HT20 MODE

Antenna1+Antenna2 TX MODE (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N20MIMO	LCH	Horizontal	PASS

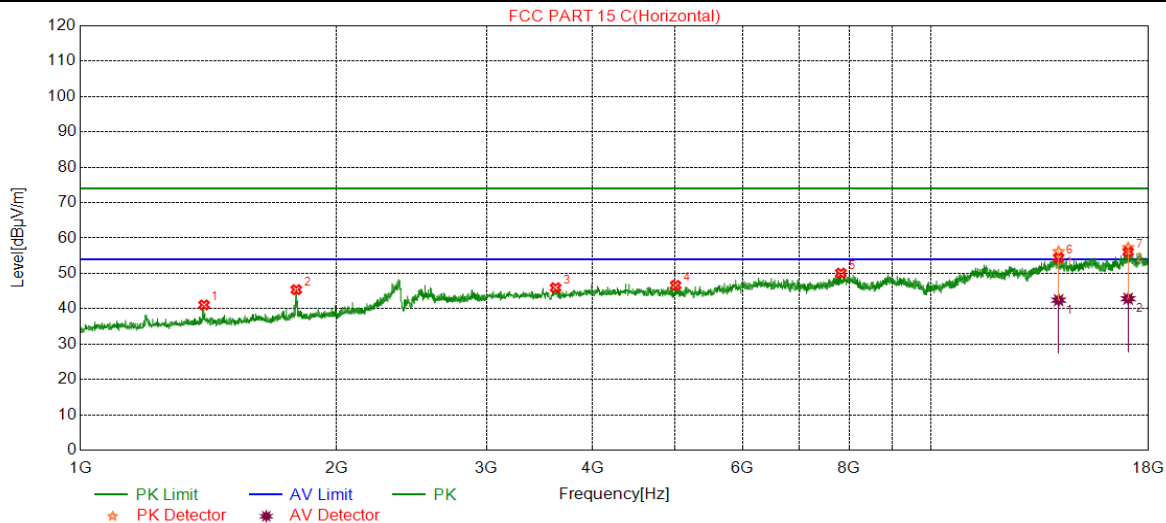


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1397.4658	41.07	74.00	-32.93	--	--	Peak
2	1793.5979	45.38	74.00	-28.62	--	--	Peak
3	3617.6029	45.93	74.00	-28.07	--	--	Peak
4	5005.3342	46.62	74.00	-27.38	--	--	Peak
5	7828.3047	50.08	74.00	-23.92	--	--	Peak
6	14109.3413	56.15	74.00	-17.85	--	--	Peak
		42.43	--	--	54.00	-11.57	Average
7	17029.8383	57.28	74.00	-16.72	--	--	Peak
		42.84	--	--	54.00	-11.16	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11N20MIMO	LCH	Vertical	PASS

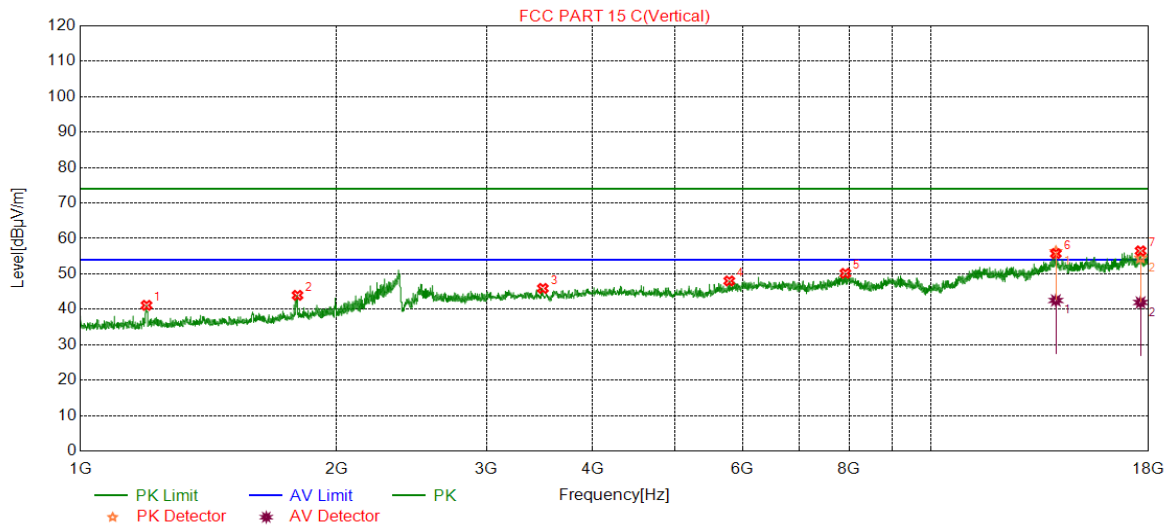


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1196.0654	41.12	74.00	-32.88	--	--	Peak
2	1799.5999	43.95	74.00	-30.05	--	--	Peak
3	3495.0825	45.89	74.00	-28.11	--	--	Peak
4	5787.9647	48.00	74.00	-26.00	--	--	Peak
5	7923.3206	50.14	74.00	-23.86	--	--	Peak
6	14004.3748	56.33	74.00	-17.67	--	--	Peak
		42.50	--	--	54.00	-11.50	Average
7	17612.4354	54.47	74.00	-19.53	--	--	Peak
		41.93	--	--	54.00	-12.07	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N20MIMO	MCH	Horizontal	PASS

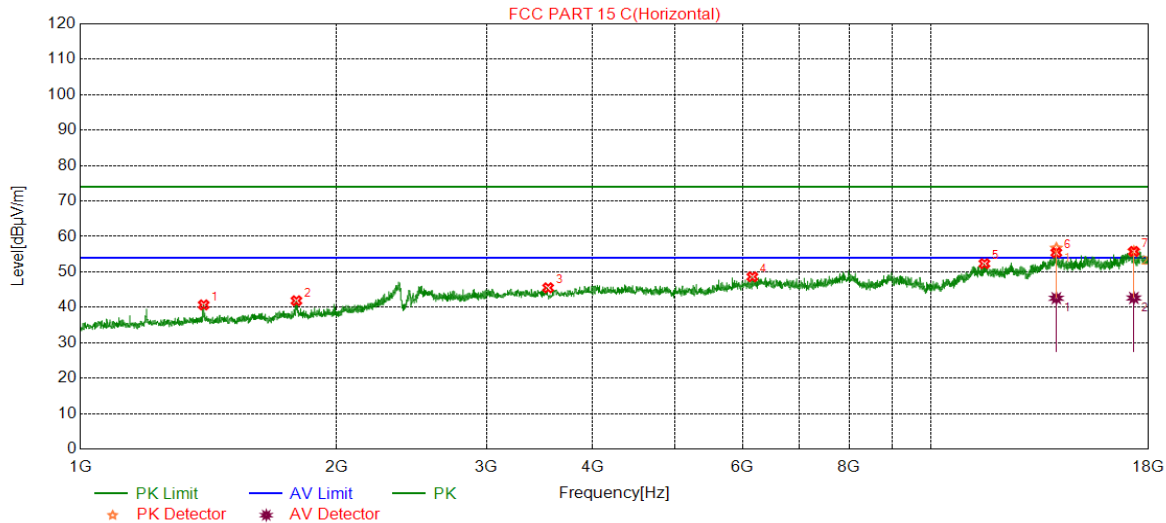


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1396.1320	40.68	74.00	-33.32	--	--	Peak
2	1794.2648	41.85	74.00	-32.15	--	--	Peak
3	3545.0908	45.50	74.00	-28.50	--	--	Peak
4	6160.5268	48.61	74.00	-25.39	--	--	Peak
5	11543.9240	52.32	74.00	-21.68	--	--	Peak
6	14021.8817	56.70	74.00	-17.30	--	--	Peak
		42.56	--	--	54.00	-11.44	Average
7	17294.8825	55.78	74.00	-18.22	--	--	Peak
		42.63	--	--	54.00	-11.37	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11N20MIMO	MCH	Vertical	PASS

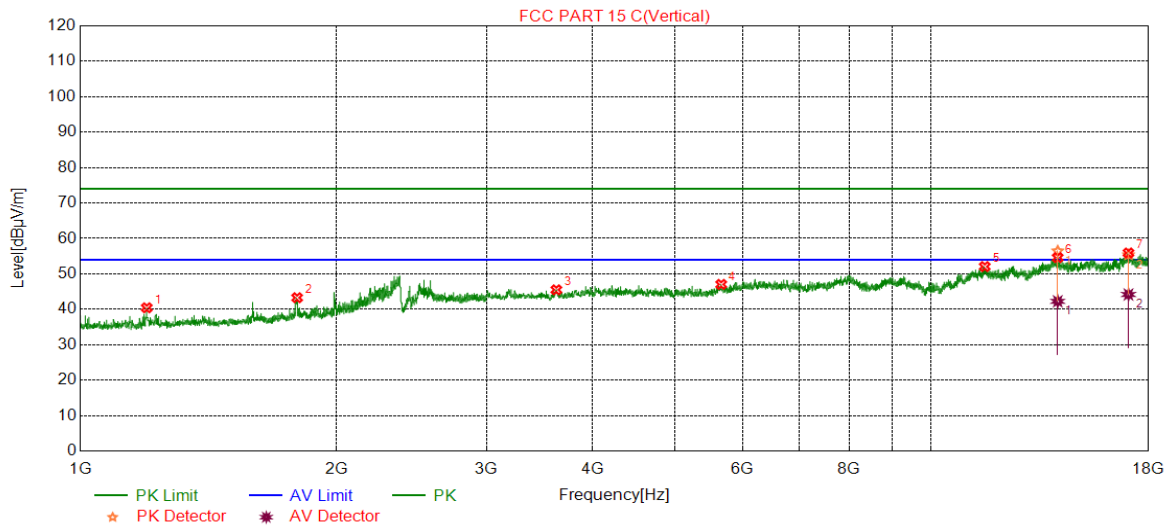


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1196.7322	40.43	74.00	-33.57	--	--	Peak
2	1797.5992	43.27	74.00	-30.73	--	--	Peak
3	3625.1042	45.50	74.00	-28.50	--	--	Peak
4	5662.9438	47.03	74.00	-26.97	--	--	Peak
5	11553.9257	52.05	74.00	-21.95	--	--	Peak
6	14074.3401	56.45	74.00	-17.55	--	--	Peak
		42.25	--	--	54.00	-11.75	Average
7	17044.8408	55.37	74.00	-22.63	--	--	Peak
		44.18	--	--	54.00	-9.82	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N20MIMO	HCH	Horizontal	PASS

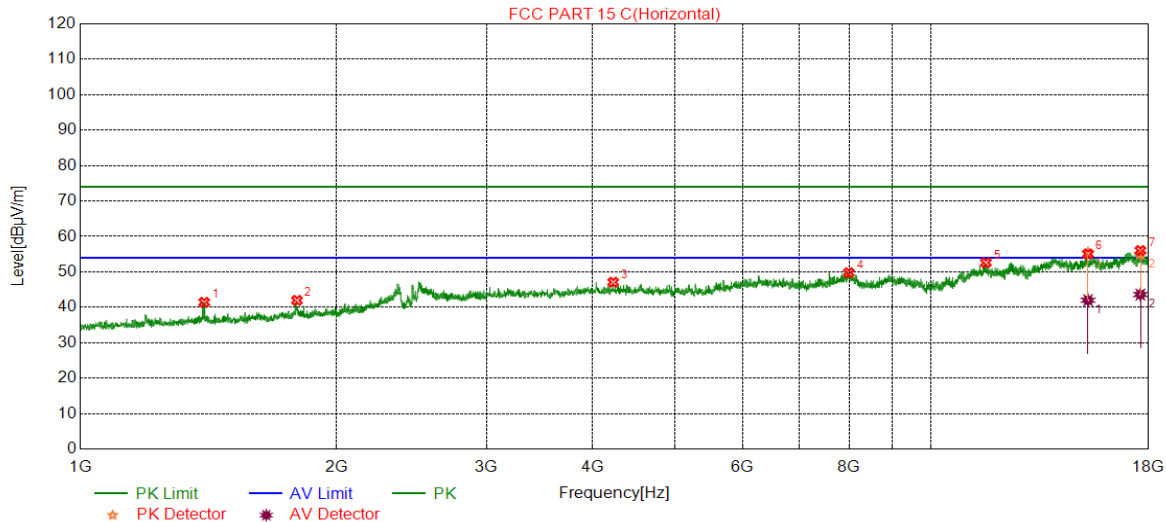


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV /m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1398.1327	41.41	74.00	-32.59	--	--	Peak
2	1796.9323	41.95	74.00	-32.05	--	--	Peak
3	4227.7046	47.08	74.00	-26.92	--	--	Peak
4	7998.3331	49.76	74.00	-24.24	--	--	Peak
5	11588.9315	52.58	74.00	-21.42	--	--	Peak
6	15277.0071	55.35	74.00	-18.65	--	--	Peak
		41.99	--	--	54.00	-12.01	Average
7	17604.9342	54.98	74.00	-19.02	--	--	Peak
		43.60	--	--	54.00	-10.40	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11N20MIMO	HCH	Vertical	PASS

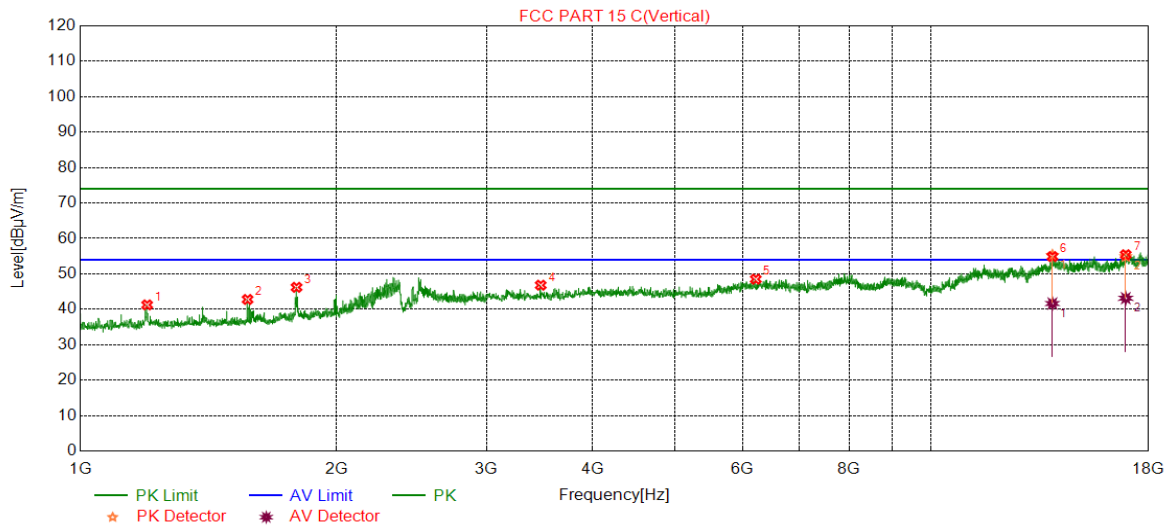

No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1198.0660	41.25	74.00	-32.75	--	--	Peak
2	1572.1907	42.78	74.00	-31.22	--	--	Peak
3	1794.9316	46.20	74.00	-27.80	--	--	Peak
4	3475.0792	46.80	74.00	-27.20	--	--	Peak
5	6218.0363	48.50	74.00	-25.50	--	--	Peak
6	13874.2846	55.24	74.00	-18.76	--	--	Peak
		41.63	--	--	54.00	-12.37	Average
7	16919.8200	54.89	74.00	-23.11	--	--	Peak
		43.13	--	--	54.00	-10.87	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.




9.2.1. 802.11n HT40 MODE

Antenna1+Antenna2 TX MODE (WORST-CASE CONFIGURATION)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N40MIMO	LCH	Horizontal	PASS

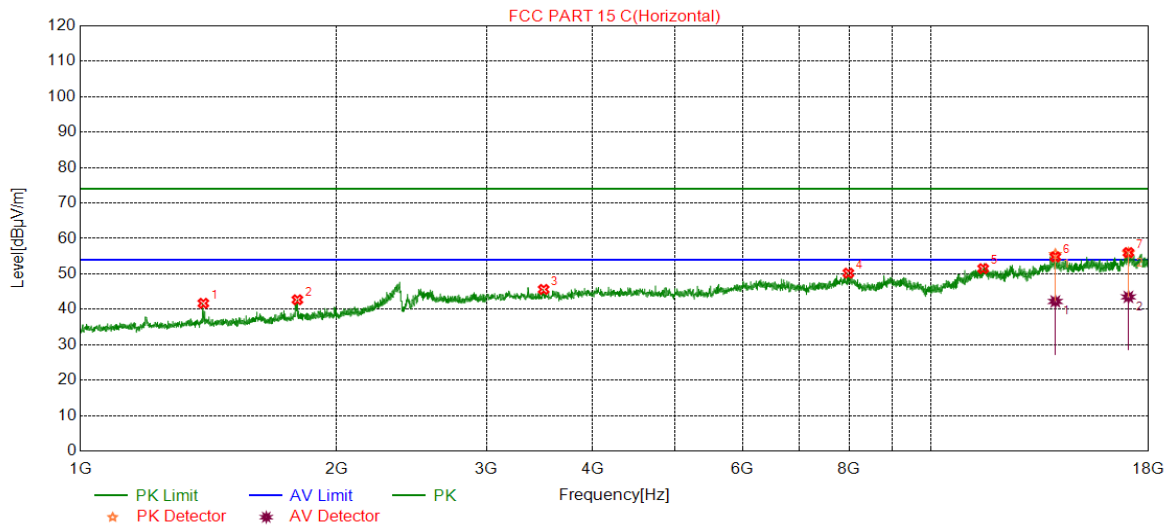


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV /m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1394.7983	41.69	74.00	-32.31	--	--	Peak
2	1798.9330	42.69	74.00	-31.31	--	--	Peak
3	3502.5838	45.61	74.00	-28.39	--	--	Peak
4	7988.3314	50.21	74.00	-23.79	--	--	Peak
5	11503.9173	51.49	74.00	-22.51	--	--	Peak
6	13984.3547	55.51	74.00	-18.49	--	--	Peak
		42.22	--	--	54.00	-11.78	Average
7	17042.3404	55.89	74.00	-18.11	--	--	Peak
		43.49	--	--	54.00	-10.51	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11N40MIMO	LCH	Vertical	PASS

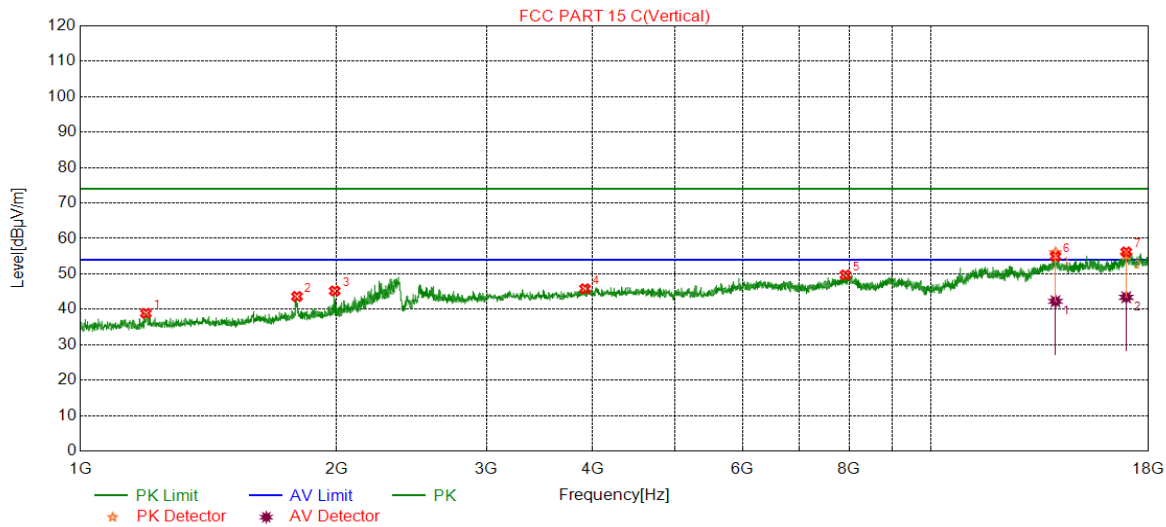


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1194.0647	38.88	74.00	-35.12	--	--	Peak
2	1796.9323	43.61	74.00	-30.39	--	--	Peak
3	1990.3301	45.18	74.00	-28.82	--	--	Peak
4	3917.6529	45.79	74.00	-28.21	--	--	Peak
5	7923.3206	49.69	74.00	-24.31	--	--	Peak
6	13989.3080	56.00	74.00	-18.00	--	--	Peak
		42.25	--	--	54.00	-11.75	Average
7	16942.3237	55.36	74.00	-22.64	--	--	Peak
		43.39	--	--	54.00	-10.61	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N40MIMO	MCH	Horizontal	PASS

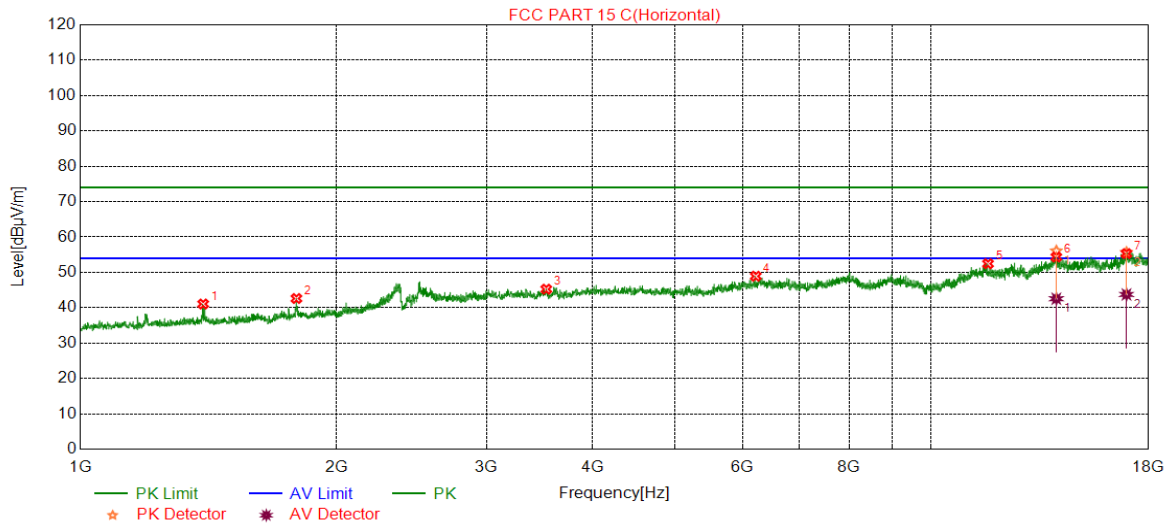


No.	Frequency	Result	Limit	Margin	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1394.1314	41.05	74.00	-32.95	--	--	Peak
2	1794.2648	42.61	74.00	-31.39	--	--	Peak
3	3527.5879	45.24	74.00	-28.76	--	--	Peak
4	6218.0363	48.91	74.00	-25.09	--	--	Peak
5	11656.4427	52.44	74.00	-21.56	--	--	Peak
6	14021.8196	56.06	74.00	-17.94	--	--	Peak
		42.54	--	--	54.00	-11.46	Average
7	16952.3254	55.65	74.00	-18.35	--	--	Peak
		43.75	--	--	54.00	-10.25	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11N40MIMO	MCH	Vertical	PASS

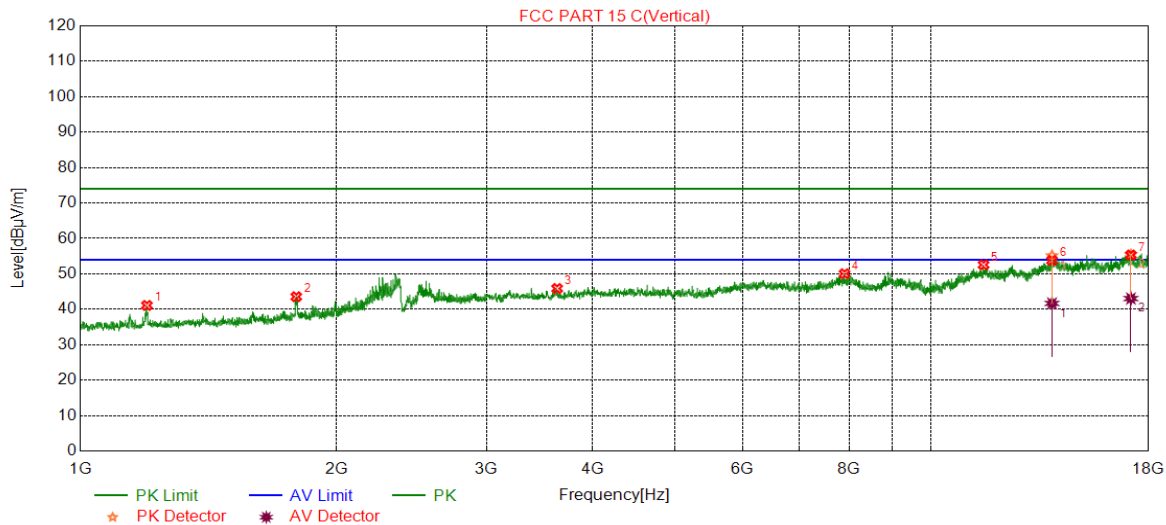


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1197.3991	41.09	74.00	-32.91	--	--	Peak
2	1793.5979	43.55	74.00	-30.45	--	--	Peak
3	3632.6054	45.86	74.00	-28.14	--	--	Peak
4	7905.8176	50.04	74.00	-23.96	--	--	Peak
5	11516.4194	52.55	74.00	-21.45	--	--	Peak
6	13859.2828	55.10	74.00	-18.90	--	--	Peak
		41.66	--	--	54.00	-12.34	Average
7	17157.3596	55.42	74.00	-18.58	--	--	Peak
		43.04	--	--	54.00	-10.96	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL)

Test Mode	Channel	Polarization	Verdict
11N40MIMO	HCH	Horizontal	PASS

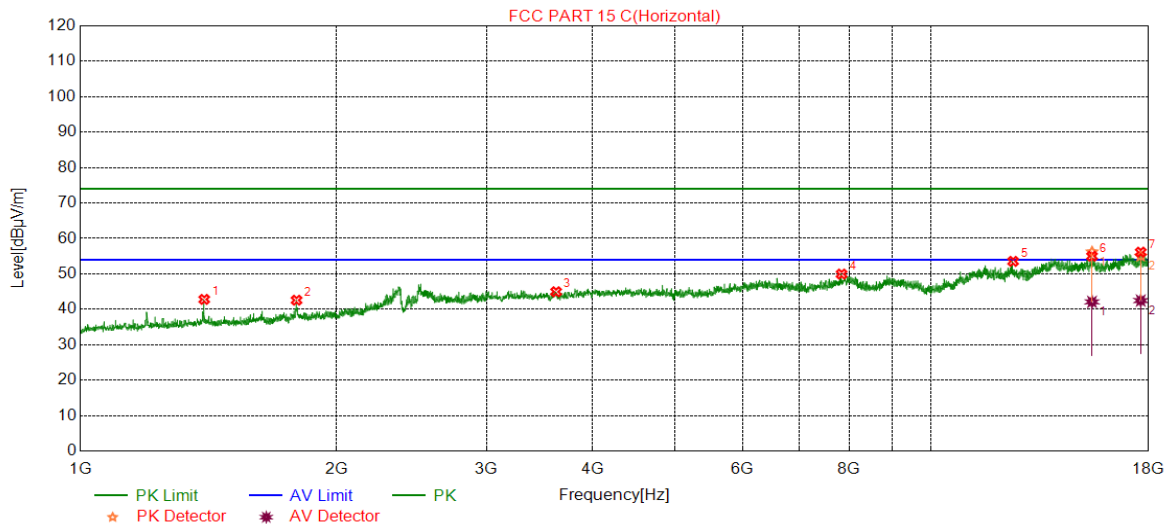


No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1398.1327	42.80	74.00	-31.20	--	--	Peak
2	1794.9316	42.57	74.00	-31.43	--	--	Peak
3	3622.6038	44.95	74.00	-29.05	--	--	Peak
4	7843.3072	49.94	74.00	-24.06	--	--	Peak
5	12474.0790	53.53	74.00	-20.47	--	--	Peak
6	15444.5502	56.20	74.00	-17.80	--	--	Peak
		42.10	--	--	54.00	-11.90	Average
7	17619.9367	55.01	74.00	-21.99	--	--	Peak
		42.47	--	--	54.00	-11.53	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.



Test Mode	Channel	Polarization	Verdict
11N40MIMO	HCH	Vertical	PASS

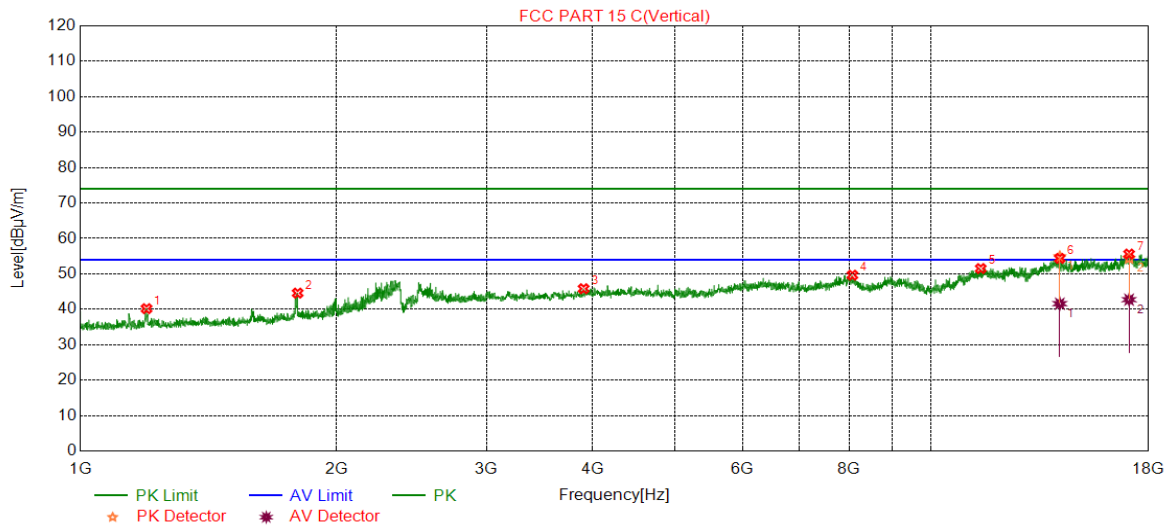

No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	1196.0654	40.18	74.00	-33.82	--	--	Peak
2	1800.2668	44.57	74.00	-29.43	--	--	Peak
3	3902.6504	45.81	74.00	-28.19	--	--	Peak
4	8075.8460	49.63	74.00	-24.37	--	--	Peak
5	11428.9048	51.50	74.00	-22.50	--	--	Peak
8	14154.3566	54.86	74.00	-19.14	--	--	Peak
		41.59	--	--	54.00	-12.41	Average
9	17072.3454	54.35	74.00	-23.15	--	--	Peak
		42.72	--	--	54.00	-11.28	Average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. AVG: VBW=1/Ton where: Ton is transmit duration.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical.
5. Filter losses were only considered in then spurious frequency bands and the authorized Band was not corrected for BRF losses.
6. Proper operation of the transmitter prior to adding the filter to the measurement chain.


9.3. SPURIOUS EMISSIONS (18~25GHz)

9.3.1. 802.11G MODE

Antenna 1+Antenna 2 MODE (WORST-CASE CONFIGURATION)

SPURIOUS EMISSIONS (MID CHANNEL)

Test Mode	Channel	Polarization	Verdict
11G SISO	MCH	Horizontal	PASS

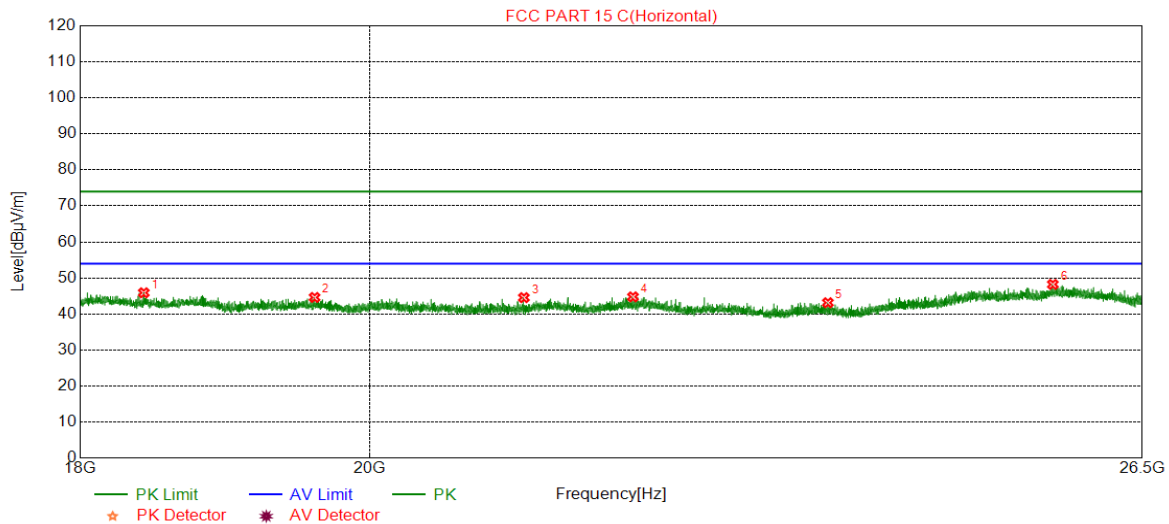


No.	Frequency (MHz)	Result (dBuV/m)	Limit (Peak) (dBuV/m)	Margin (Peak) (dB)	Limit (Ave) (dBuV/m)	Margin (Ave) (dB)	Remark
1	18420.7921	45.89	74.00	-28.11	54.00	-8.11	peak
2	19603.2603	44.60	74.00	-29.40	54.00	-9.40	peak
3	21156.3656	44.54	74.00	-29.46	54.00	-9.46	peak
4	22014.1014	44.76	74.00	-29.24	54.00	-9.24	peak
5	23634.3634	43.13	74.00	-30.87	54.00	-10.87	peak
6	25652.4652	48.22	74.00	-25.78	54.00	-5.78	peak

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Peak: Peak detector.
 4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical. Pre-testing all test modes and all test channels, but only data of the worst case is shown in this test report.



Test Mode	Channel	Polarization	Verdict
11G SISO	MCH	Vertical	PASS

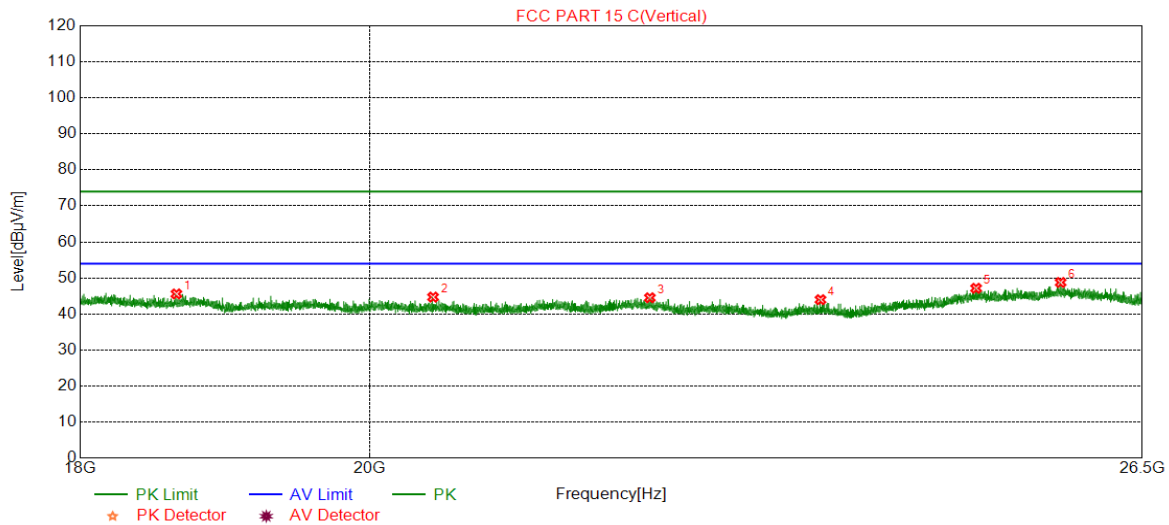

No.	Frequency	Result	Limit (Peak)	Margin (Peak)	Limit (Ave)	Margin (Ave)	Remark
	(MHz)	(dBuV /m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	18640.9641	45.57	74.00	-28.43	54.00	-8.43	peak
2	20467.7968	44.69	74.00	-29.31	54.00	-9.31	peak
3	22150.1150	44.50	74.00	-29.50	54.00	-9.50	peak
4	23570.6071	43.97	74.00	-30.03	54.00	-10.03	peak
5	24945.1945	47.14	74.00	-26.86	54.00	-6.86	peak
6	25725.5726	48.75	74.00	-25.25	54.00	-5.25	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Peak: Peak detector.
4. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical. Pre-testing all test modes and all test channels, but only data of the worst case is shown in this test report.


9.4. SPURIOUS EMISSIONS (0.03 ~ 1 GHz)

9.4.1. 802.11G MODE

Antenna 1+Antenna 2 MODE (WORST-CASE CONFIGURATION)

SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

Test Mode	Channel	Polarization	Verdict
11G SISO	MCH	Horizontal	PASS

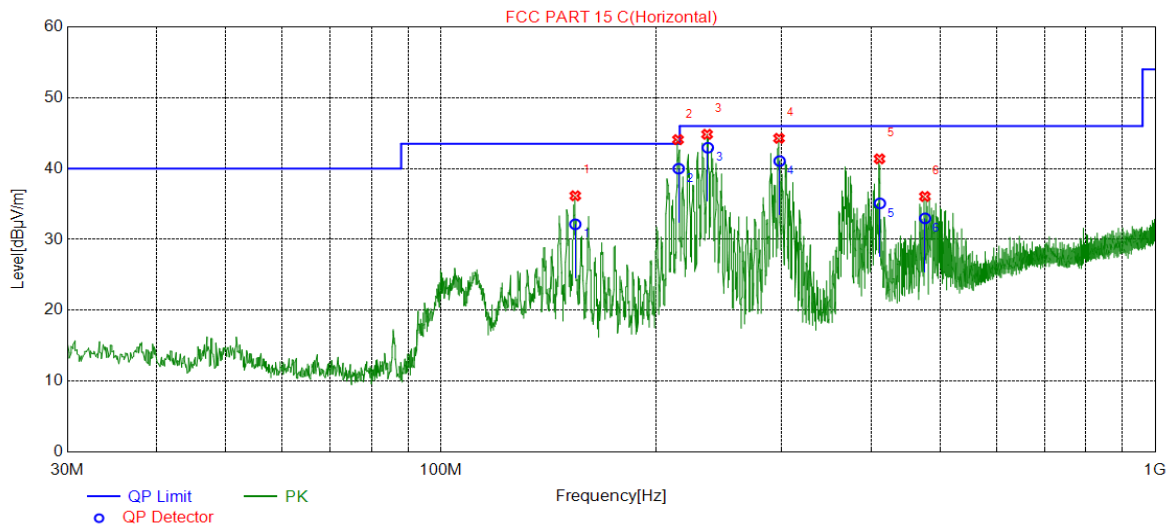


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	154.2491	32.14	43.50	-11.36	QP
2	215.2304	39.99	43.50	-3.51	QP
3	236.4422	42.94	46.00	-3.06	QP
4	297.9506	41.06	46.00	-4.94	QP
5	411.7329	35.09	46.00	-10.91	QP
6	476.2720	32.98	46.00	-13.02	QP

- Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
3. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical. Pre-testing all test modes and all test channels, but only data of the worst case is shown in this test report.



Test Mode	Channel	Polarization	Verdict
11G SISO	MCH	Vertical	PASS

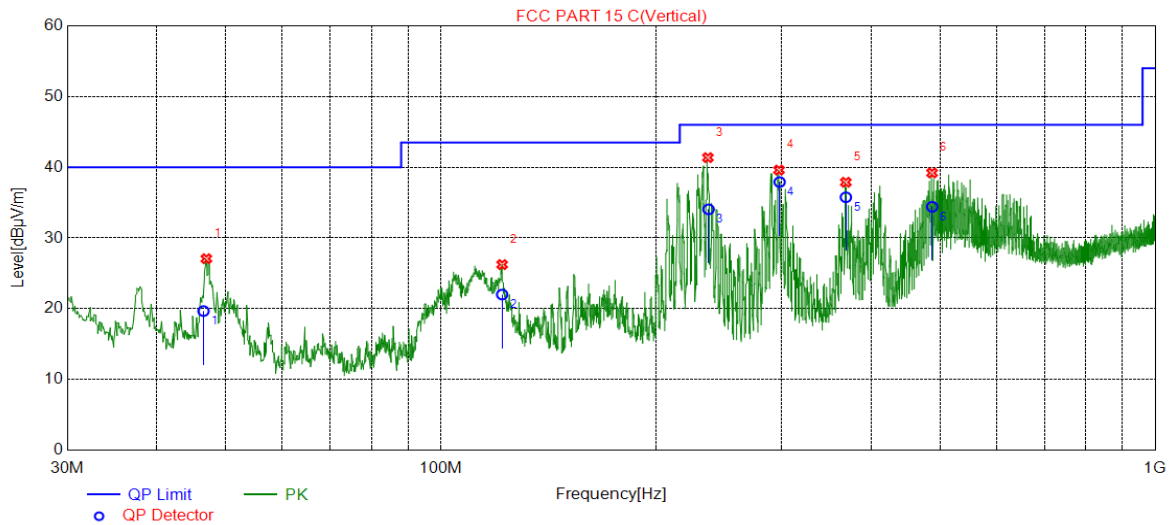

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	46.5440	19.67	40.00	-20.33	QP
2	121.8566	22.01	43.50	-21.49	QP
3	237.0185	34.05	46.00	-11.95	QP
4	297.9506	37.91	46.00	-8.09	QP
5	368.9505	35.76	46.00	-10.24	QP
6	487.2327	34.41	46.00	-11.59	QP

- Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
3. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical. Pre-testing all test modes and all test channels, but only data of the worst case is shown in this test report.


9.5. SPURIOUS EMISSIONS BELOW 30M

9.5.1. 802.11G MODE

Antenna 1+Antenna 2 MODE (WORST-CASE CONFIGURATION)

SPURIOUS EMISSIONS (MID CHANNEL FACE-ON)

Test Mode	Channel	Frequency Range	Verdict
11G SISO	MCH	9KHz~150KHz	PASS

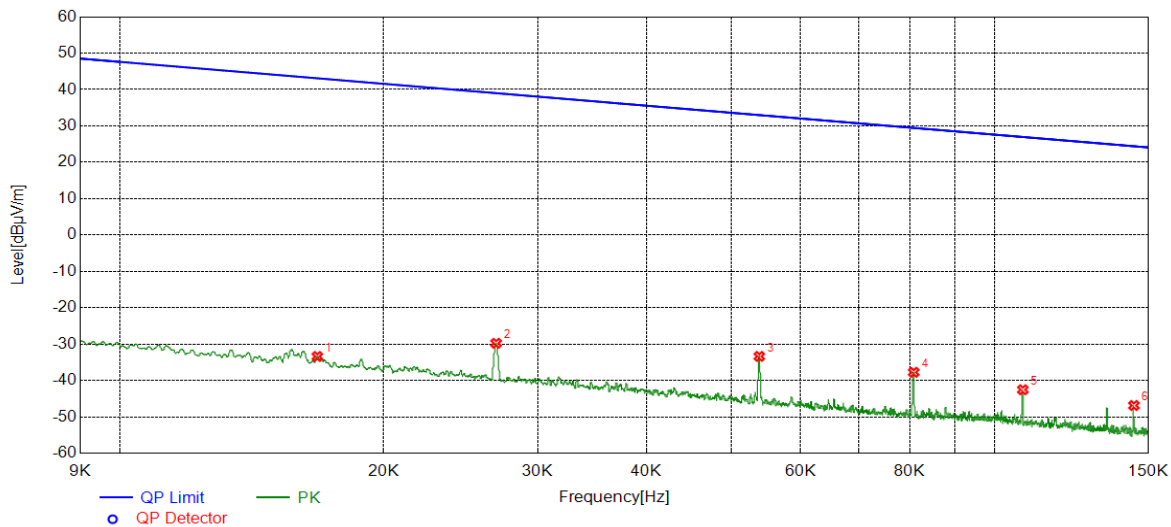


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0168	-33.40	43.09	-76.49	Peak
2	0.0269	-29.77	38.99	-68.76	Peak
3	0.0538	-33.38	32.98	-66.36	Peak
4	0.0808	-37.75	29.46	-67.21	Peak
5	0.1077	-42.55	26.96	-69.51	Peak
6	0.1443	-46.89	24.42	-71.31	Peak

Note:

1. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
2. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical. Pre-testing all test modes and all test channels, but only data of the worst case is shown in this test report.



Test Mode	Channel	Frequency Range	Verdict
11G SISO	MCH	150KHz~490KHz	PASS

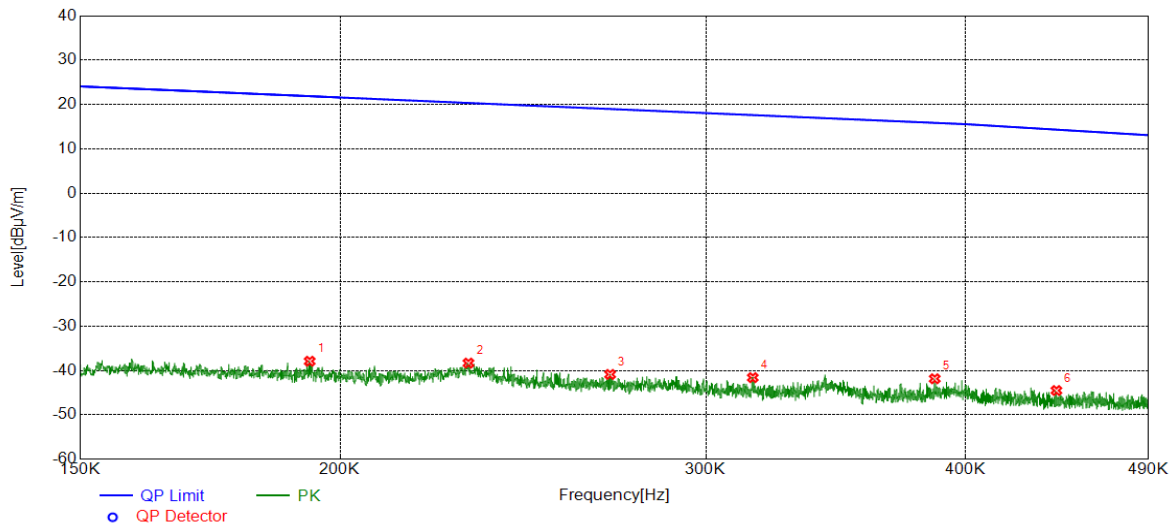


No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.1934	-37.90	21.87	-59.77	Peak
2	0.2306	-38.32	20.35	-58.67	Peak
3	0.2698	-40.87	18.98	-59.85	Peak
4	0.3160	-41.59	17.61	-59.20	Peak
5	0.3866	-41.85	15.86	-57.71	Peak
6	0.4424	-44.50	14.33	-58.83	Peak

Note:

1. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
2. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical. Pre-testing all test modes and all test channels, but only data of the worst case is shown in this test report.



Test Mode	Channel	Frequency Range	Verdict
11G SISO	MCH	150KHz~490KHz	PASS

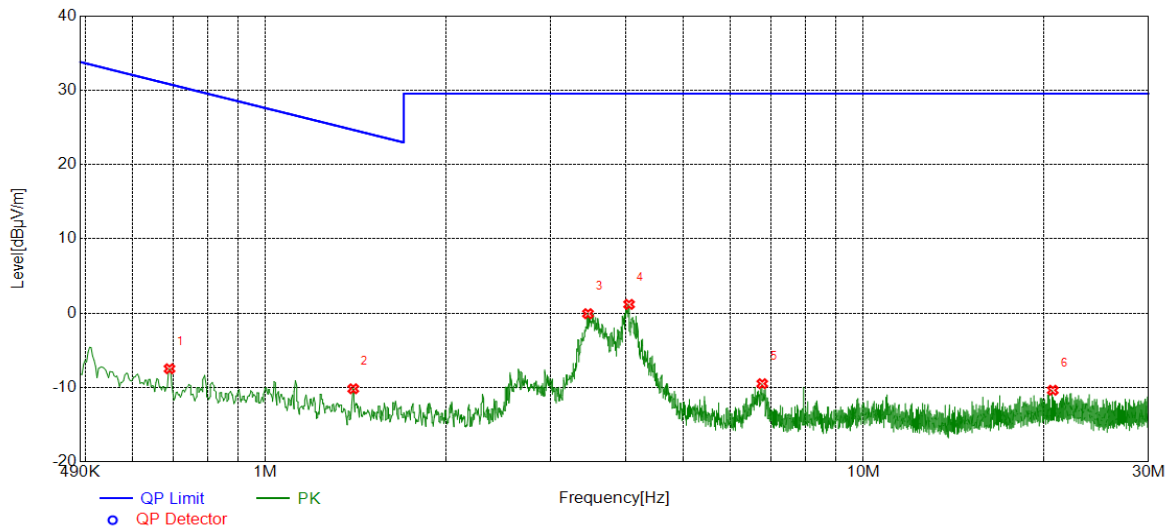

No.	Frequency	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.6907	-7.48	30.82	-38.30	Peak
2	1.4020	-10.17	24.67	-34.84	Peak
3	3.4620	-0.07	29.54	-29.61	Peak
4	4.0552	1.18	29.54	-28.36	Peak
5	6.7733	-9.49	29.54	-39.03	Peak
6	20.7418	-10.37	29.54	-39.91	Peak

Note:

1. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
2. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical. Pre-testing all test modes and all test channels, but only data of the worst case is shown in this test report.


10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a)

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

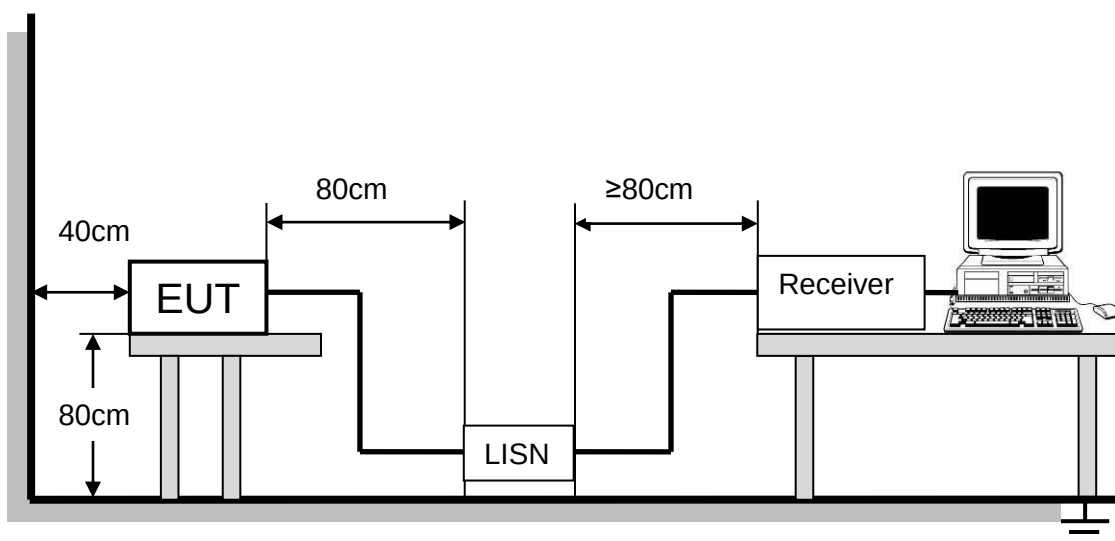

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) used to test the emissions from both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	DC 12.0V




TEST RESULTS

10.1. 802.11G MODE

Antenna1+Antenna2 MODE (WORST-CASE CONFIGURATION)

11G20 SISO	Antenna 1+2	MCH	<Limit	PASS
------------	-------------	-----	--------	------

TEST RESULTS (WORST-CASE CONFIGURATION)

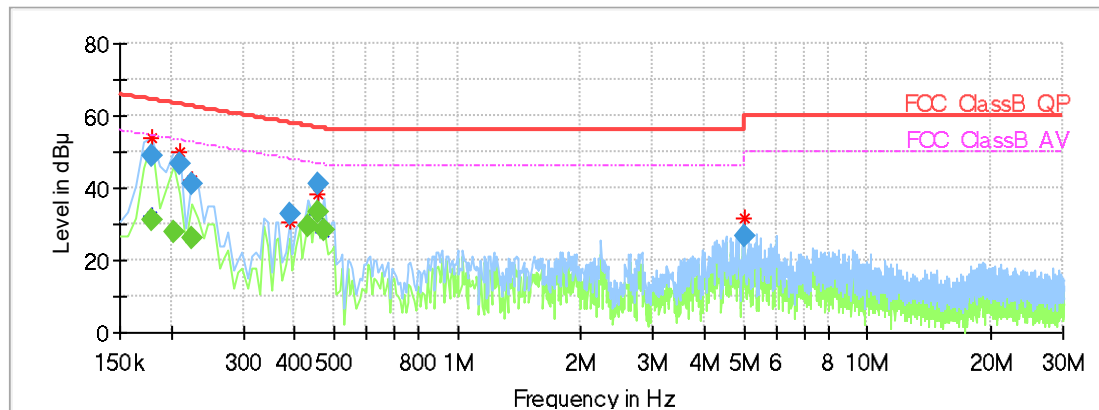

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.179850	---	31.20	54.49	23.30	1000.0	9.000	L1	OFF	9.6
0.179850	48.91	---	64.49	15.58	1000.0	9.000	L1	OFF	9.6
0.202238	---	28.05	53.52	25.47	1000.0	9.000	L1	OFF	9.6
0.209700	46.67	---	63.22	16.55	1000.0	9.000	N	OFF	9.6
0.224625	---	26.02	52.65	26.63	1000.0	9.000	N	OFF	9.6
0.224625	41.23	---	62.65	21.42	1000.0	9.000	N	OFF	9.6
0.388800	32.75	---	58.09	25.34	1000.0	9.000	N	OFF	9.6
0.433575	---	29.19	47.18	18.00	1000.0	9.000	N	OFF	9.6
0.455963	---	33.27	46.77	13.50	1000.0	9.000	N	OFF	9.6
0.455963	40.90	---	56.77	15.87	1000.0	9.000	N	OFF	9.6
0.470888	---	28.41	46.50	18.09	1000.0	9.000	N	OFF	9.6
4.993163	26.78	---	56.00	29.22	1000.0	9.000	L1	OFF	9.7

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

5. For this product, it has two antennas, antenna1 and antenna2, the 802.11B SISO&802.11G SISO modes are use the SISO technical, but the ant1 and ant2 can transmitter in the same time under these modes. The 802.11N(HT20&HT40) uses both the SISO and MIMO technical. Pre-testing all test modes and all test channels, but only data of the worst case is shown in this test report.



11. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA CONNECTOR

EUT has two Internal Antennas.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi.

END OF REPORT