



Band Edge BLE 1M 2402MHz



Band Edge BLE 1M 2480MHz




Band Edge BLE 2M 2402MHz




Band Edge BLE 2M 2480MHz


Spurious Emission

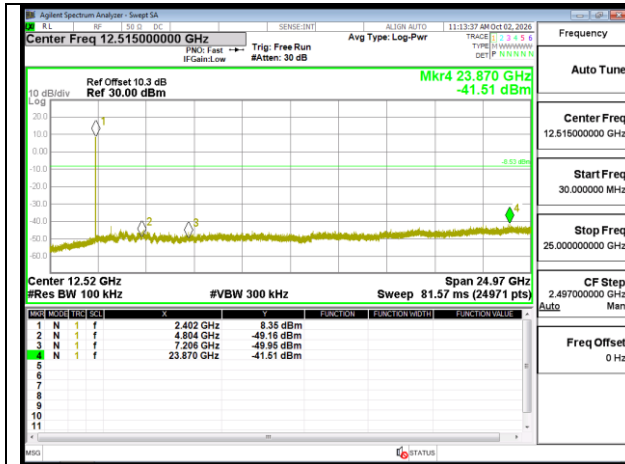


Spurious Emission BLE 125k 2402MHz

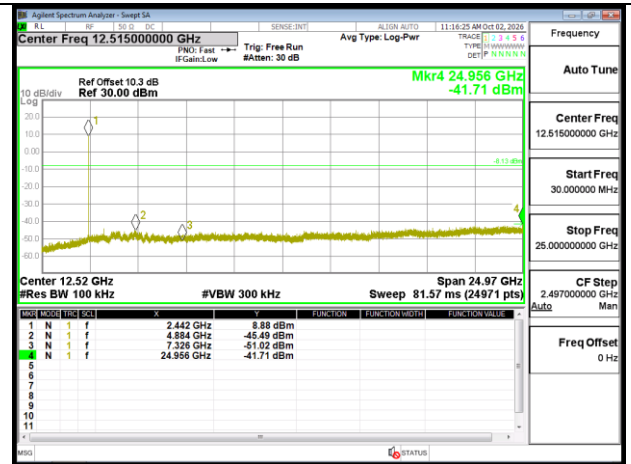


Spurious Emission BLE 125k 2442MHz

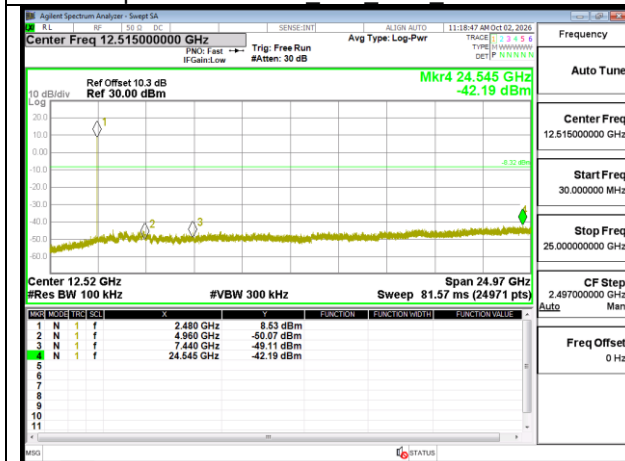


Spurious Emission BLE 125k 2480MHz

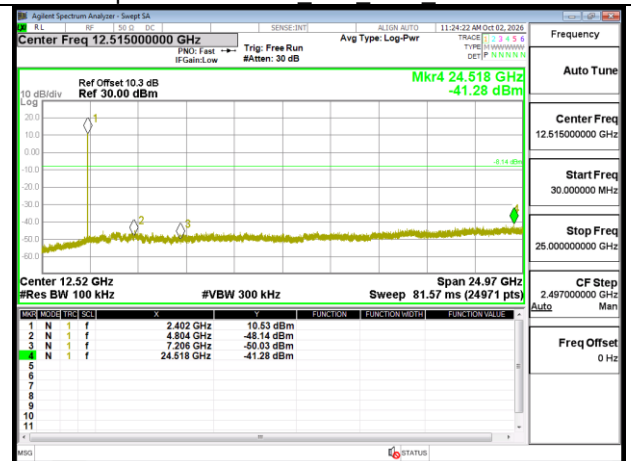

Spurious Emission BLE 500k 2402MHz

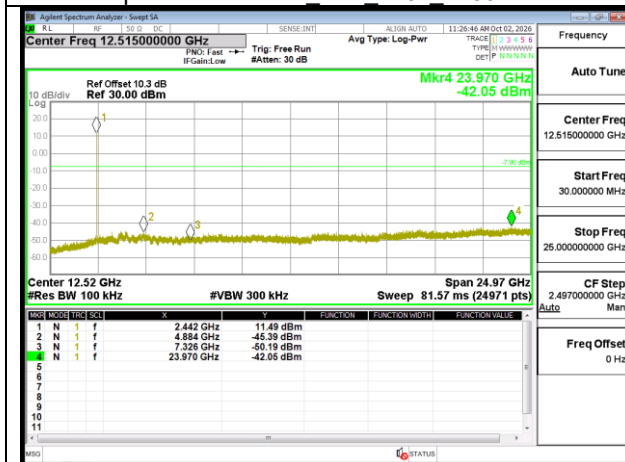

Spurious Emission BLE 500k 2442MHz

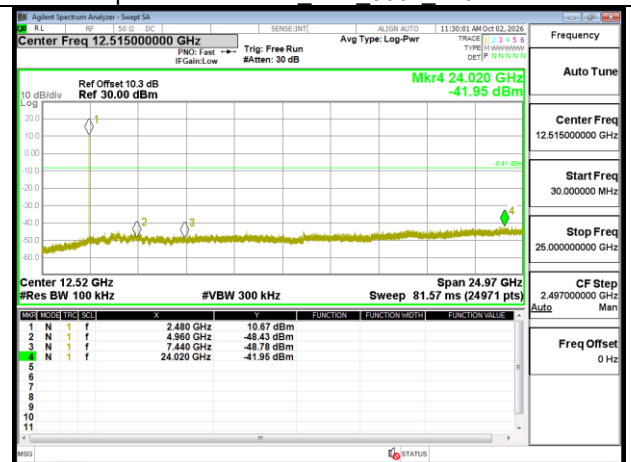


Spurious Emission BLE 500k 2480MHz




Spurious Emission BLE 1M 2402MHz



Spurious Emission BLE 1M 2442MHz

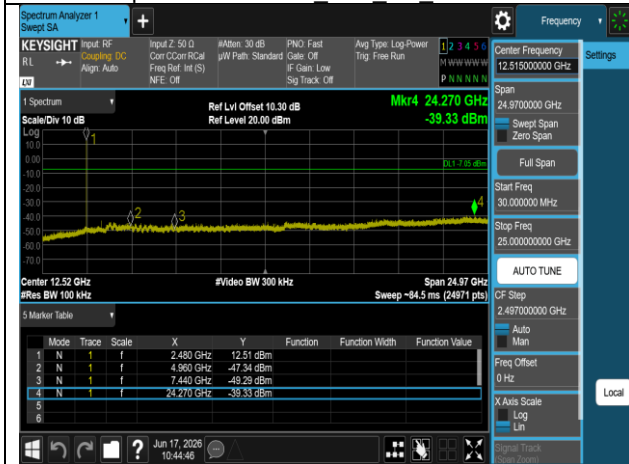


Spurious Emission BLE 1M 2480MHz

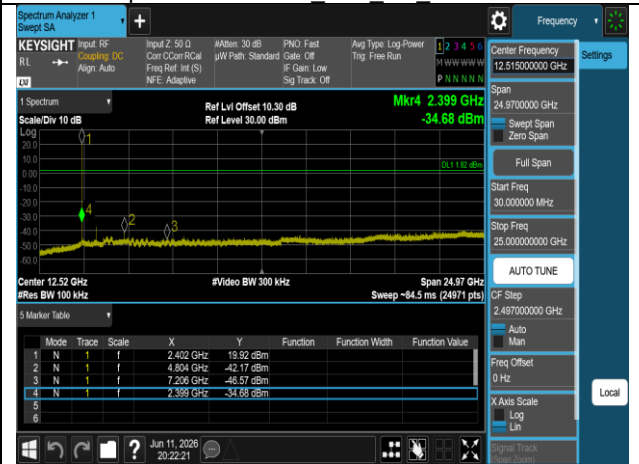

Spurious Emission BLE 2M 2402MHz



Spurious Emission BLE 2M 2442MHz

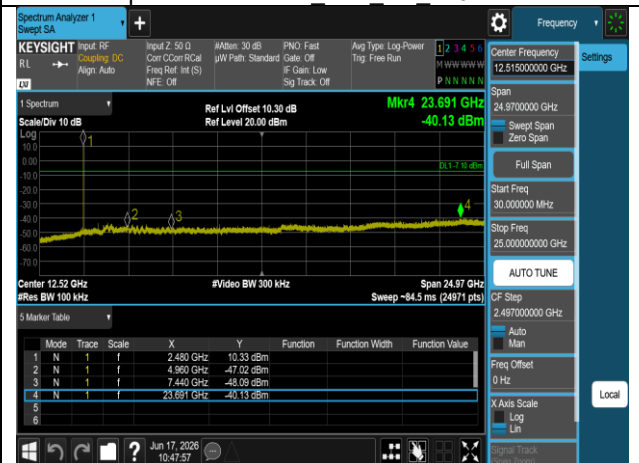

Spurious Emission BLE 2M 2480MHz

4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.6.2 Test Procedure

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10-2020 and the EUT set in a continuous mode.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.

3. Span shall wide enough to full capture the emission measured. The SA from 9KHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz).

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

5. The SA setting following :

(1) Below 30MHz :

(1.1) 9KHz-490KHz : RBW=200Hz / VBW=1kHz / Sweep=AUTO

(1.2) 490KHz-30MHz : RBW=10kHz / VBW=30kHz / Sweep=AUTO

(2) 30MHz to 1GHz : RBW = 100kHz, VBW $\geq 3 \times$ RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

(3) Above 1GHz :

(3.1) For Peak measurement : RBW = 1MHz, VBW ≥ 3 RBW, Sweep = Auto,
Detector = Peak, Trace = Max hold.

(3.2) For Average measurement : RBW = 1MHz, VBW

·If Duty Cycle $\geq 98\%$, VBW=10Hz.

·If Duty Cycle $< 98\%$, VBW=1/T.


6. Data result :

Actual FS=Spectrum Reading Level + Factor


Margin=Actual FS- Limit

4.6.3 Test Setup


9kHz ~ 30MHz

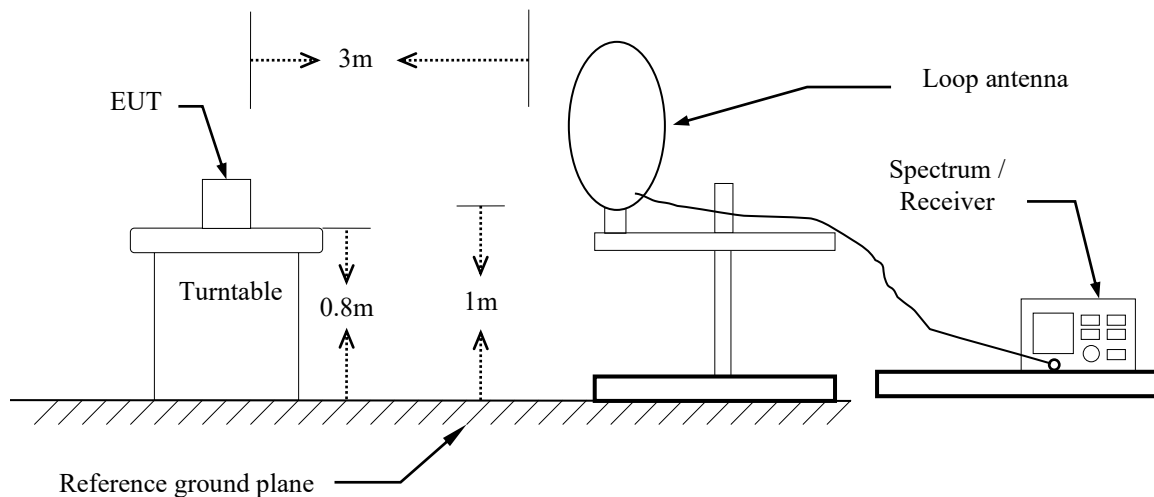

30MHz ~ 1GHz

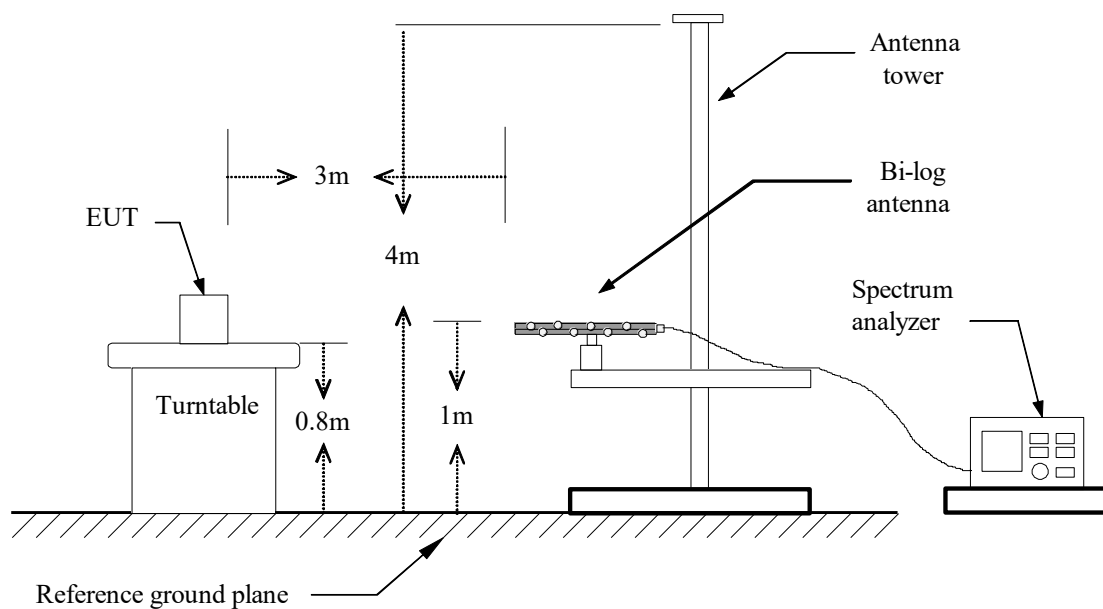

Above 1 GHz

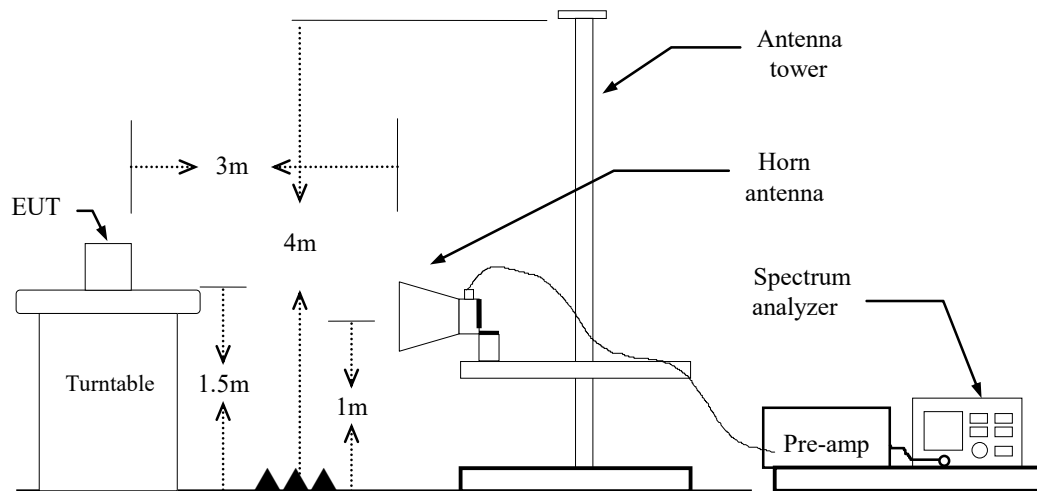




Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 45 / 86
Rev. 01

4.6.4 Test Result

Test Data: Bandedge

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_125K	Temp./Humi.	: 25.4/55
Frequency	: 2402 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

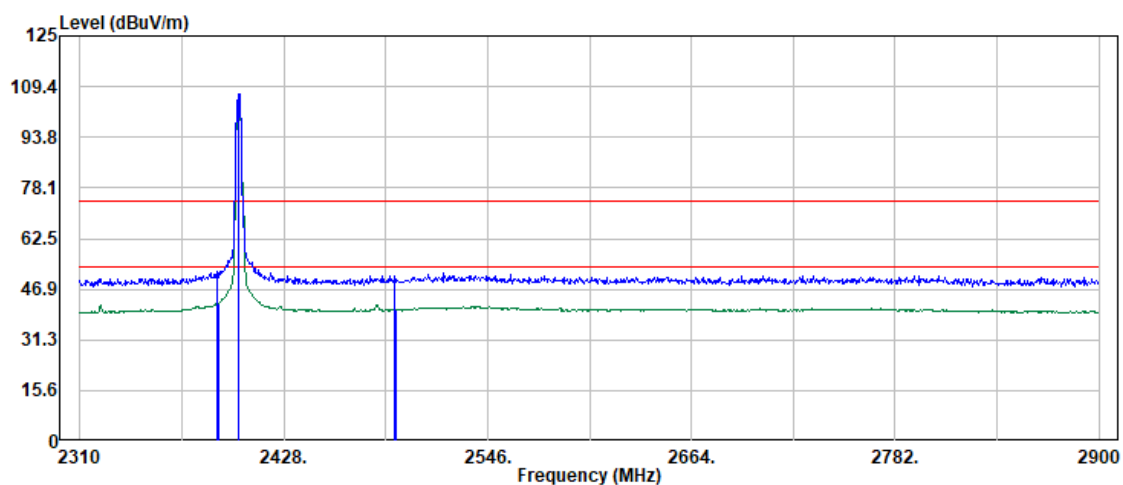

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	45.67	6.51	52.18	74.00	-21.82	Peak
2389.93	35.95	6.51	42.46	54.00	-11.54	Average
2402.00	100.56	6.42	106.98	--	--	Peak
2402.00	99.97	6.42	106.39	--	--	Average
2492.35	44.07	6.85	50.92	74.00	-23.08	Peak
2492.85	33.70	6.85	40.55	54.00	-13.45	Average




Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 46 / 86
Rev. 01

Project No : TM-2605000412P
Operation Band : BLE_125K
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 12

Test Date : 2026-10-01
Temp./Humi. : 25.4/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

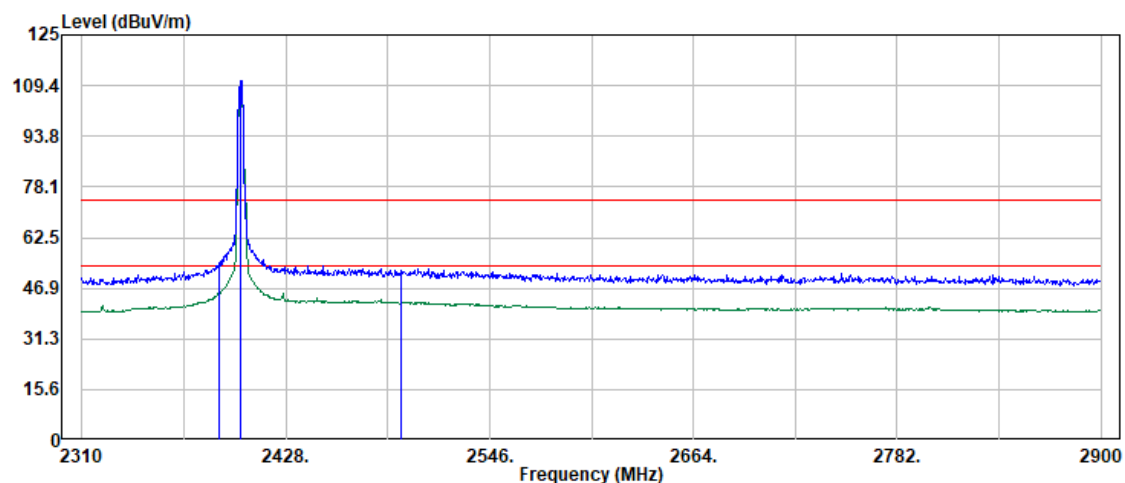


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	48.32	6.51	54.83	74.00	-19.17	Peak
2389.43	38.81	6.51	45.32	54.00	-8.68	Average
2402.00	104.44	6.42	110.86	--	--	Peak
2402.00	103.76	6.42	110.18	--	--	Average
2494.34	45.63	6.85	52.48	74.00	-21.52	Peak
2494.84	35.83	6.85	42.68	54.00	-11.32	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 47 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_125K	Temp./Humi.	: 25.4/55
Frequency	: 2480 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

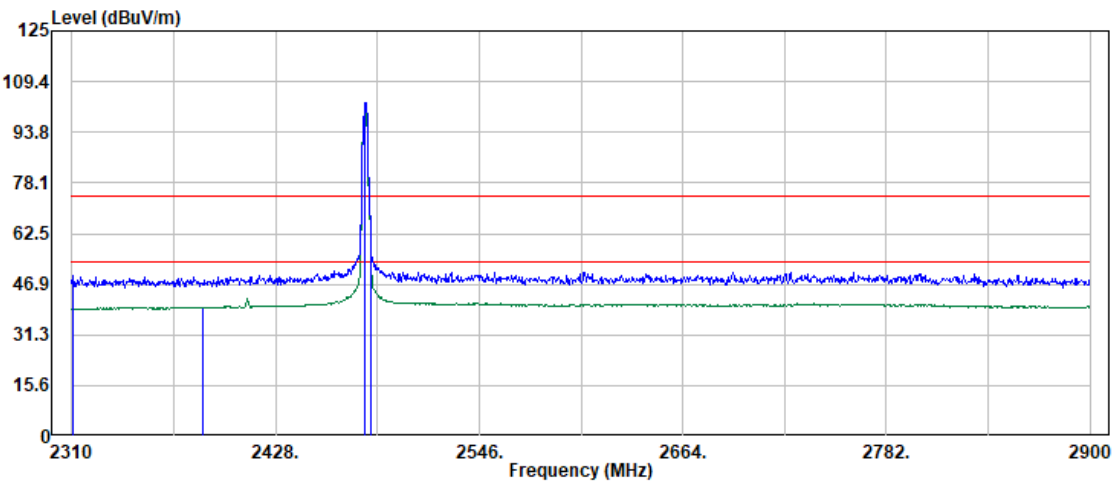

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2311.00	43.04	6.55	49.59	74.00	-24.41	Peak
2385.44	33.22	6.51	39.73	54.00	-14.27	Average
2480.00	96.29	6.74	103.03	--	--	Peak
2480.00	95.60	6.74	102.34	--	--	Average
2483.50	49.14	6.77	55.91	74.00	-18.09	Peak
2483.50	45.80	6.77	52.57	54.00	-1.43	Average




Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 48 / 86
Rev. 01

Project No : TM-2605000412P
Operation Band : BLE_125K
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 12

Test Date : 2026-10-01
Temp./Humi. : 25.4/55
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

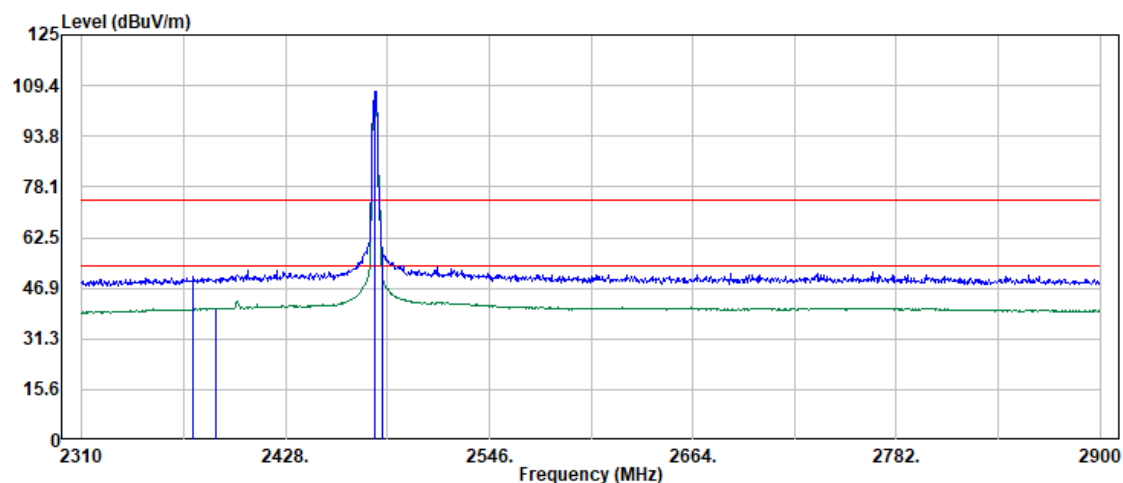


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2374.45	43.86	6.50	50.36	74.00	-23.64	Peak
2387.93	34.17	6.50	40.67	54.00	-13.33	Average
2480.00	100.67	6.74	107.41	--	--	Peak
2480.00	100.01	6.74	106.75	--	--	Average
2483.85	51.56	6.78	58.34	74.00	-15.66	Peak
2483.85	44.74	6.78	51.52	54.00	-2.48	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 49 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2402 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

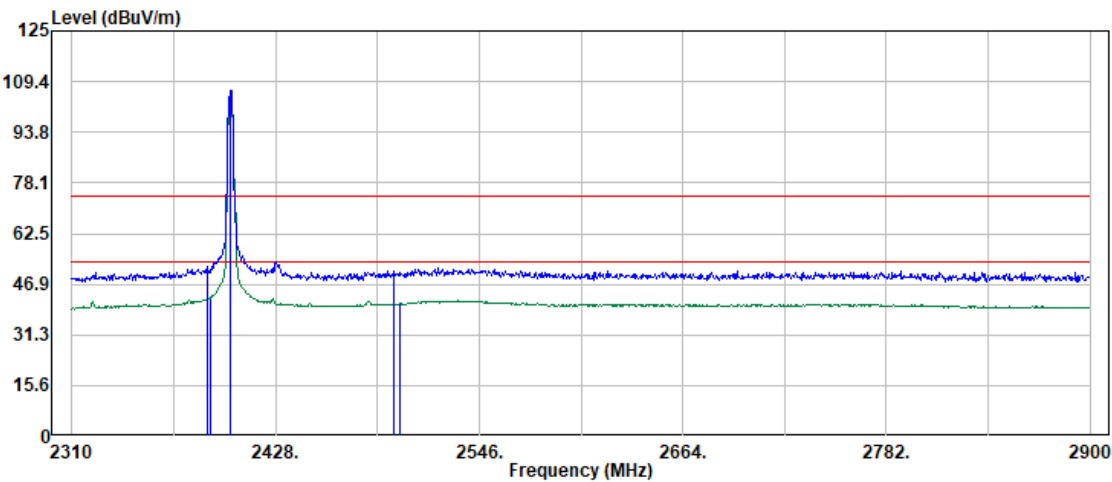


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2388.43	45.87	6.50	52.37	74.00	-21.63	Peak
2389.93	36.16	6.51	42.67	54.00	-11.33	Average
2402.00	100.23	6.42	106.65	--	--	Peak
2402.00	99.75	6.42	106.17	--	--	Average
2496.84	44.26	6.86	51.12	74.00	-22.88	Peak
2499.84	34.00	6.86	40.86	54.00	-13.14	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 50 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2402 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

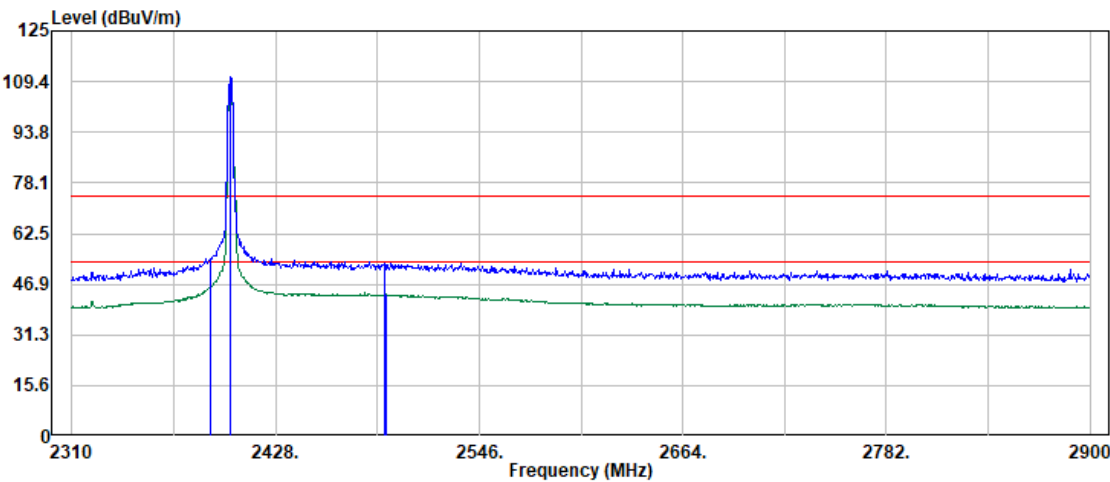


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	48.37	6.51	54.88	74.00	-19.12	Peak
2389.93	39.41	6.51	45.92	54.00	-8.08	Average
2402.00	104.21	6.42	110.63	--	--	Peak
2402.00	103.66	6.42	110.08	--	--	Average
2491.35	46.38	6.85	53.23	74.00	-20.77	Peak
2491.85	36.88	6.85	43.73	54.00	-10.27	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 51 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2480 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

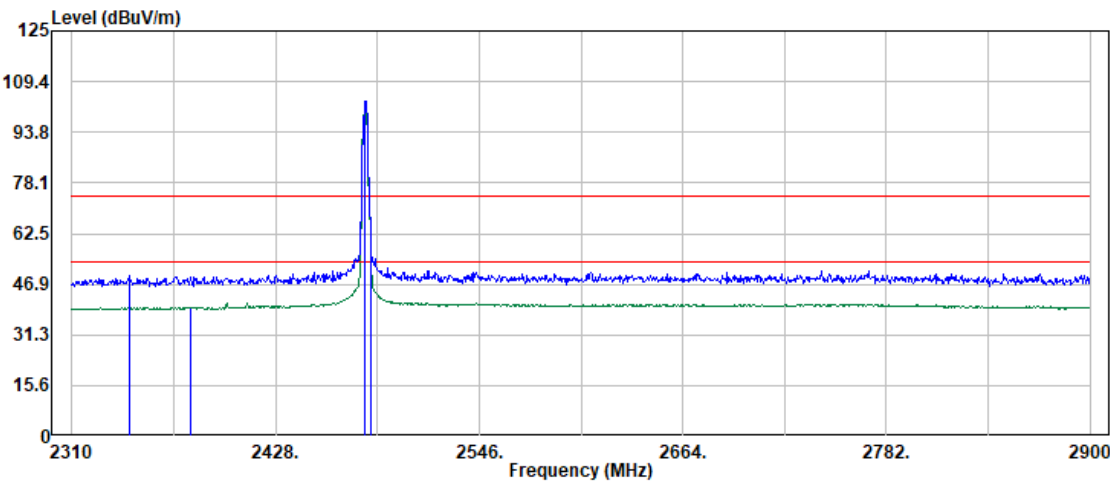


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2343.47	42.92	6.57	49.49	74.00	-24.51	Peak
2378.94	33.28	6.51	39.79	54.00	-14.21	Average
2480.00	96.67	6.74	103.41	--	--	Peak
2480.00	95.87	6.74	102.61	--	--	Average
2483.50	50.37	6.77	57.14	74.00	-16.86	Peak
2483.50	45.77	6.77	52.54	54.00	-1.46	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 52 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2480 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

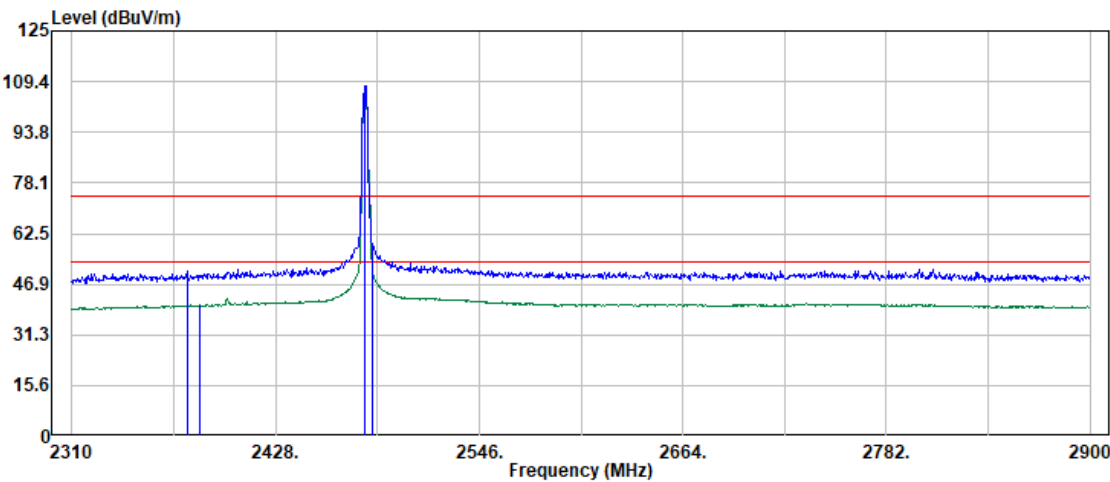


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2376.94	44.26	6.51	50.77	74.00	-23.23	Peak
2384.44	33.88	6.51	40.39	54.00	-13.61	Average
2480.00	101.29	6.74	108.03	--	--	Peak
2480.00	100.65	6.74	107.39	--	--	Average
2483.85	45.27	6.78	52.05	54.00	-1.95	Average
2484.35	52.67	6.78	59.45	74.00	-14.55	Peak



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 53 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2402 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

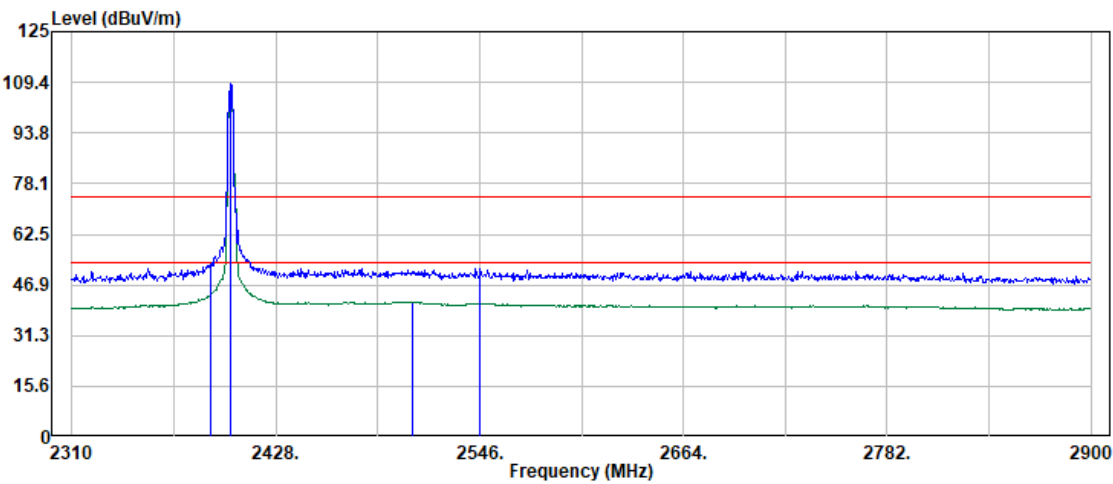

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.93	46.92	6.20	53.12	74.00	-20.88	Peak
2389.93	37.54	6.20	43.74	54.00	-10.26	Average
2402.00	102.69	6.11	108.80	--	--	Peak
2402.00	101.97	6.11	108.08	--	--	Average
2507.33	35.00	6.58	41.58	54.00	-12.42	Average
2546.30	45.17	6.94	52.11	74.00	-21.89	Peak



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 54 / 86
Rev. 01

Project No : TM-2605000412P

Operation Band : BLE_1M

Frequency : 2402 MHz

Operation Mode : Bandedge

EUT Pol : H

Setting : 14


Test Date : 2026-06-15

Temp./Humi. : 25.6/54

Antenna Pol. : HORIZONTAL

Engineer : Ben.Yang

Test Chamber : 966A

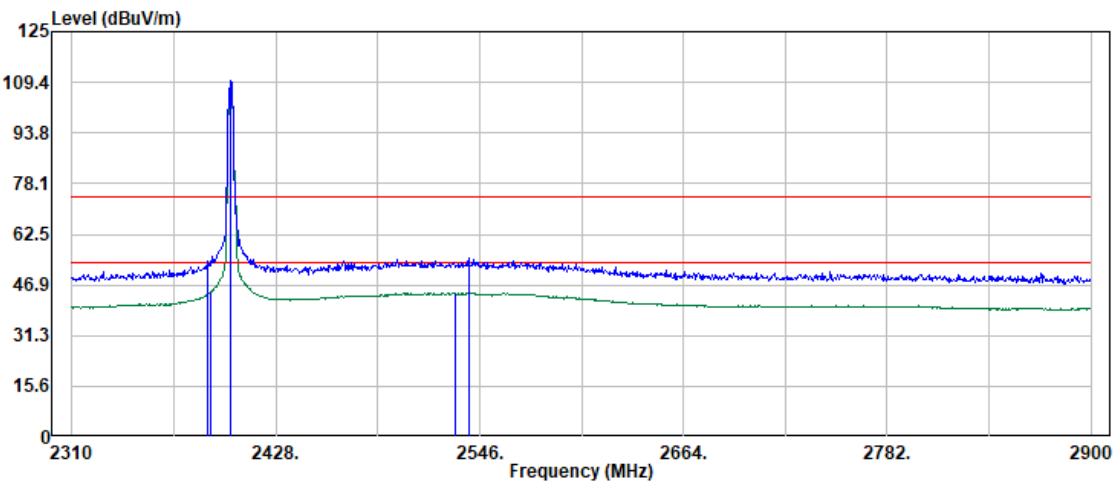


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2388.93	47.86	6.20	54.06	74.00	-19.94	Peak
2389.93	38.40	6.20	44.60	54.00	-9.40	Average
2402.00	103.64	6.11	109.75	--	--	Peak
2402.00	102.98	6.11	109.09	--	--	Average
2531.81	37.66	6.84	44.50	54.00	-9.50	Average
2539.81	48.22	6.93	55.15	74.00	-18.85	Peak



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 55 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2480 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

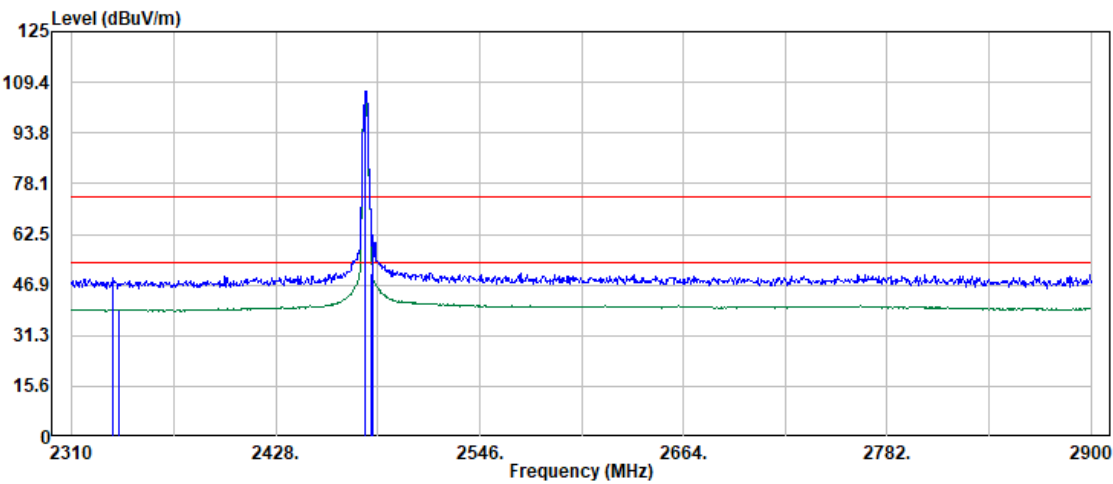

Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2333.98	42.85	6.22	49.07	74.00	-24.93	Peak
2336.98	33.09	6.26	39.35	54.00	-14.65	Average
2480.00	100.22	6.44	106.66	--	--	Peak
2480.00	99.62	6.44	106.06	--	--	Average
2483.50	43.78	6.48	50.26	54.00	-3.74	Average
2483.85	55.62	6.49	62.11	74.00	-11.89	Peak




Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 56 / 86
Rev. 01

Project No : TM-2605000412P
Operation Band : BLE_1M
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 12

Test Date : 2026-06-15
Temp./Humi. : 25.6/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

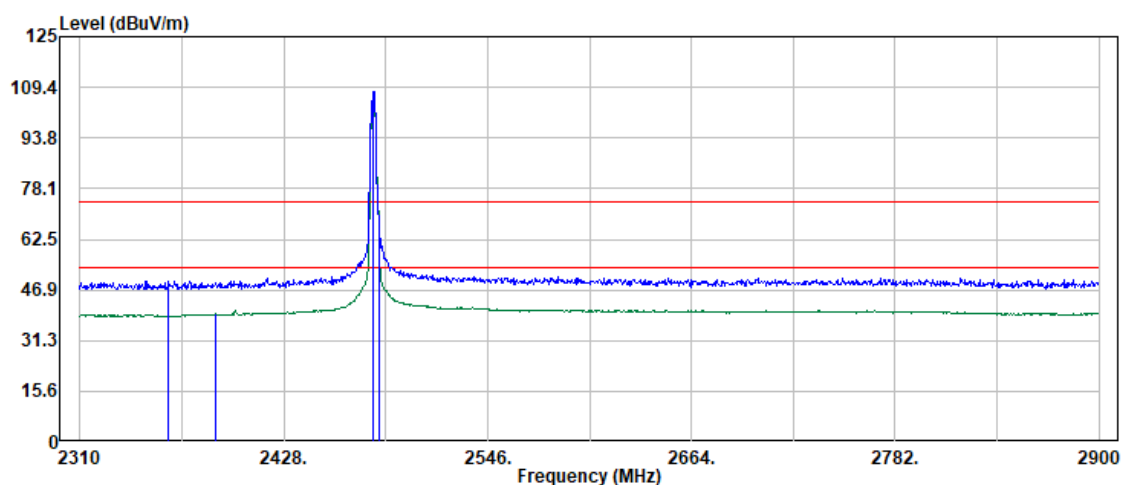


Trace: 1						
Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2361.46	43.57	6.11	49.68	74.00	-24.32	Peak
2388.43	33.27	6.19	39.46	54.00	-14.54	Average
2480.00	101.51	6.44	107.95	--	--	Peak
2480.00	100.92	6.44	107.36	--	--	Average
2483.50	59.48	6.48	65.96	74.00	-8.04	Peak
2483.50	44.91	6.48	51.39	54.00	-2.61	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 57 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_2M	Temp./Humi.	: 25.6/54
Frequency	: 2402 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

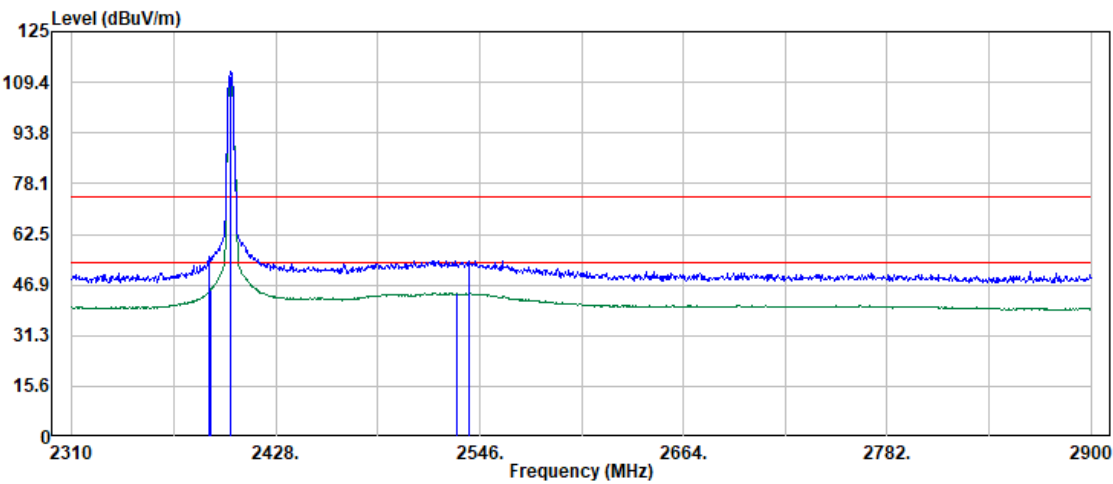


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	49.32	6.20	55.52	74.00	-18.48	Peak
2389.93	38.88	6.20	45.08	54.00	-8.92	Average
2402.00	105.44	6.11	111.55	--	--	Peak
2402.00	104.66	6.11	110.77	--	--	Average
2532.81	37.43	6.85	44.28	54.00	-9.72	Average
2540.31	47.48	6.93	54.41	74.00	-19.59	Peak



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 58 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_2M	Temp./Humi.	: 25.6/54
Frequency	: 2402 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

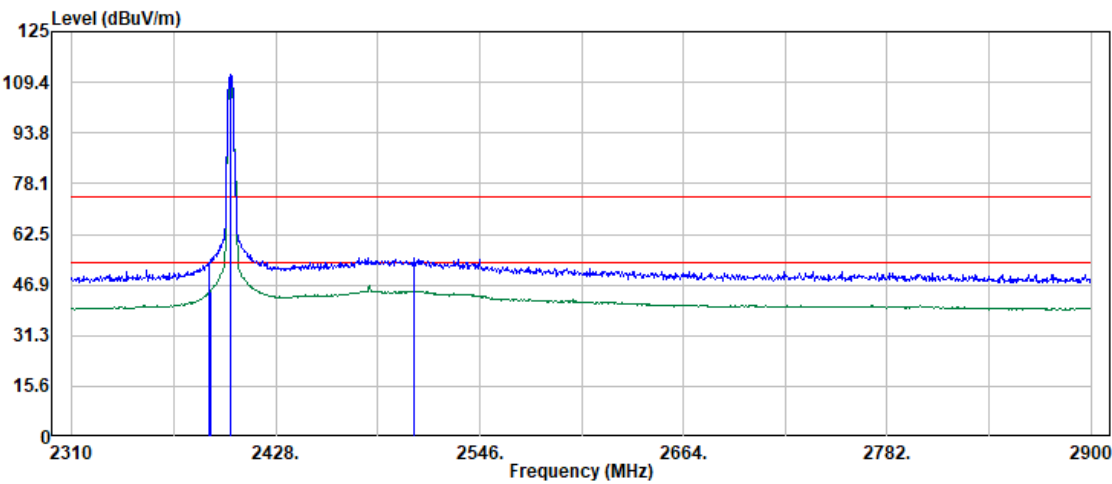

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2389.43	47.64	6.20	53.84	74.00	-20.16	Peak
2389.93	38.53	6.20	44.73	54.00	-9.27	Average
2402.00	106.11	6.11	112.22	--	--	Peak
2402.00	103.82	6.11	109.93	--	--	Average
2507.83	48.49	6.58	55.07	74.00	-18.93	Peak
2507.83	38.39	6.58	44.97	54.00	-9.03	Average




Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 59 / 86
Rev. 01

Project No : TM-2605000412P
Operation Band : BLE_2M
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 12

Test Date : 2026-06-15
Temp./Humi. : 25.6/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

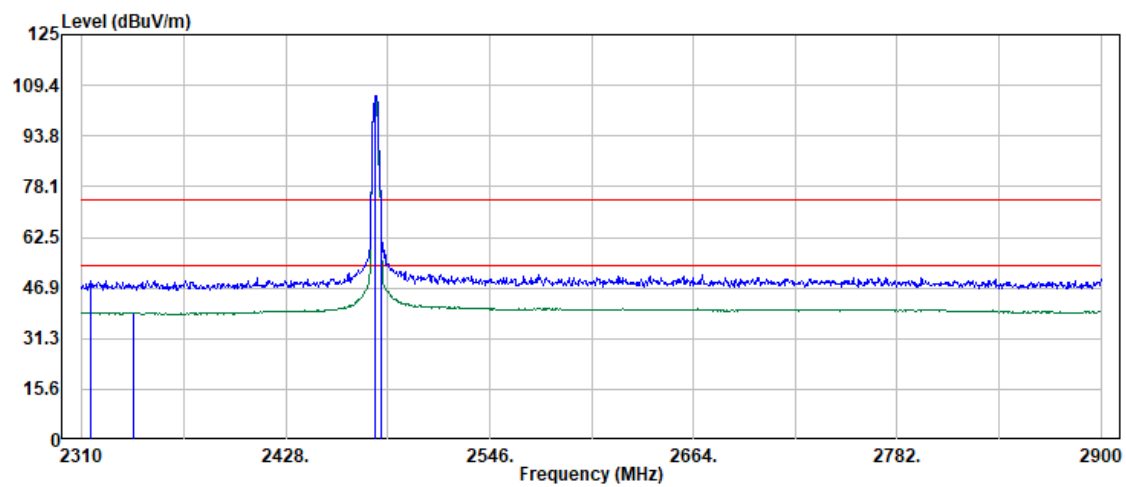

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2315.00	43.01	6.21	49.22	74.00	-24.78	Peak
2339.98	33.04	6.29	39.33	54.00	-14.67	Average
2480.00	99.77	6.44	106.21	--	--	Peak
2480.00	98.03	6.44	104.47	--	--	Average
2483.50	57.59	6.48	64.07	74.00	-9.93	Peak
2483.50	43.15	6.48	49.63	54.00	-4.37	Average




Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 60 / 86
Rev. 01

Project No : TM-2605000412P
Operation Band : BLE_2M
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 12

Test Date : 2026-06-15
Temp./Humi. : 25.6/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

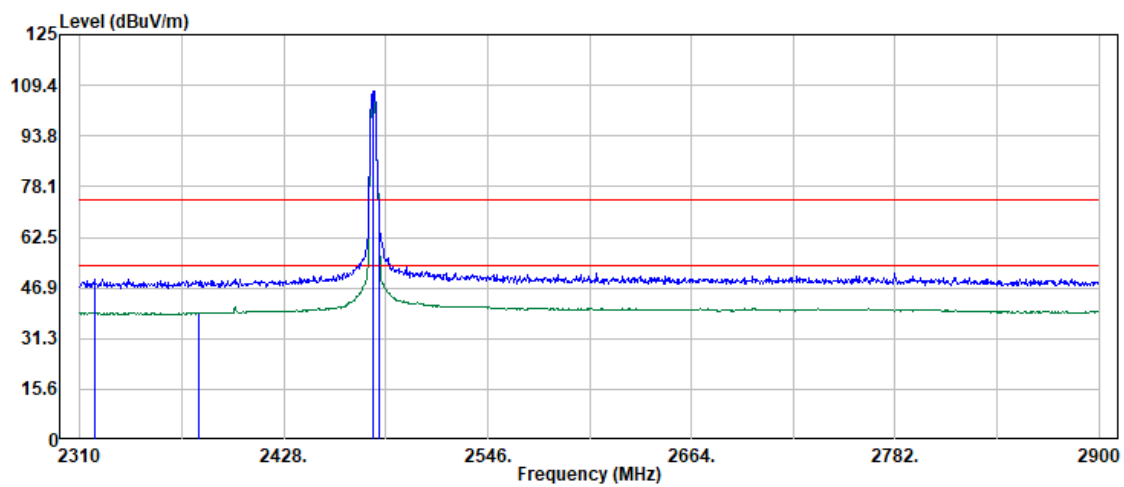

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2318.49	43.47	6.18	49.65	74.00	-24.35	Peak
2378.44	33.08	6.20	39.28	54.00	-14.72	Average
2480.00	101.27	6.44	107.71	--	--	Peak
2480.00	99.59	6.44	106.03	--	--	Average
2483.50	59.66	6.48	66.14	74.00	-7.86	Peak
2483.50	44.60	6.48	51.08	54.00	-2.92	Average




Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 61 / 86
Rev. 01

Test Data: TX

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_125K	Temp./Humi.	: 25.4/55
Frequency	: 2402 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

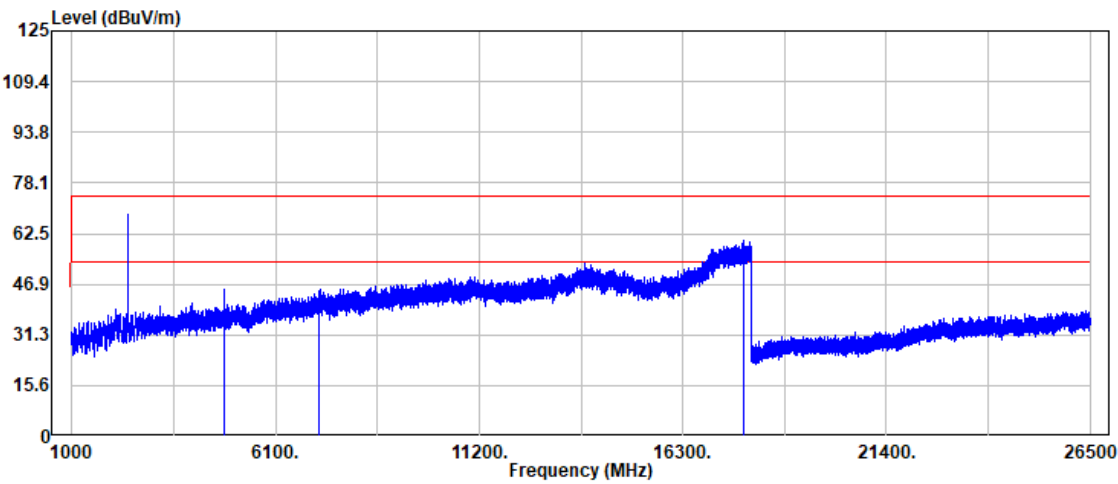


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	42.85	2.67	45.52	74.00	-28.48	Peak
4804.00	40.95	2.67	43.62	54.00	-10.38	Average
7206.00	35.94	9.50	45.44	74.00	-28.56	Peak
7206.00	29.38	9.50	38.88	54.00	-15.12	Average
17839.00	34.22	26.16	60.38	74.00	-13.62	Peak
17839.00	24.15	26.16	50.31	54.00	-3.69	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 62 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_125K	Temp./Humi.	: 25.4/55
Frequency	: 2402 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

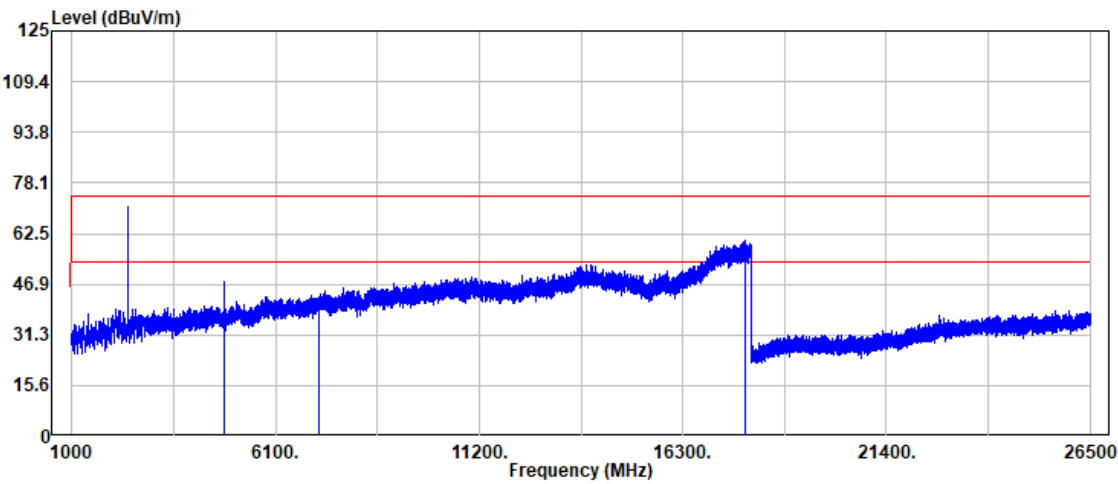


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	44.86	2.67	47.53	74.00	-26.47	Peak
4804.00	42.29	2.67	44.96	54.00	-9.04	Average
7206.00	33.00	9.50	42.50	74.00	-31.50	Peak
7206.00	30.02	9.50	39.52	54.00	-14.48	Average
17856.00	34.41	26.10	60.51	74.00	-13.49	Peak
17856.00	24.11	26.10	50.21	54.00	-3.79	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 63 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_125K	Temp./Humi.	: 25.4/55
Frequency	: 2442 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

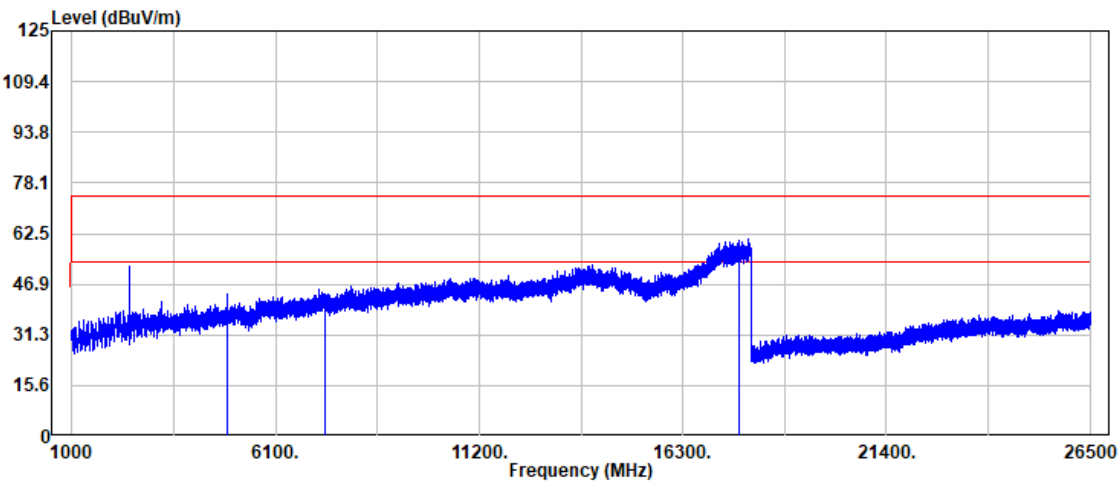


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4884.00	40.99	2.90	43.89	74.00	-30.11	Peak
4884.00	37.17	2.90	40.07	54.00	-13.93	Average
7326.00	34.44	9.62	44.06	74.00	-29.94	Peak
7326.00	29.31	9.62	38.93	54.00	-15.07	Average
17719.00	34.34	26.21	60.55	74.00	-13.45	Peak
17719.00	24.00	26.21	50.21	54.00	-3.79	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 64 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_125K	Temp./Humi.	: 25.4/55
Frequency	: 2442 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

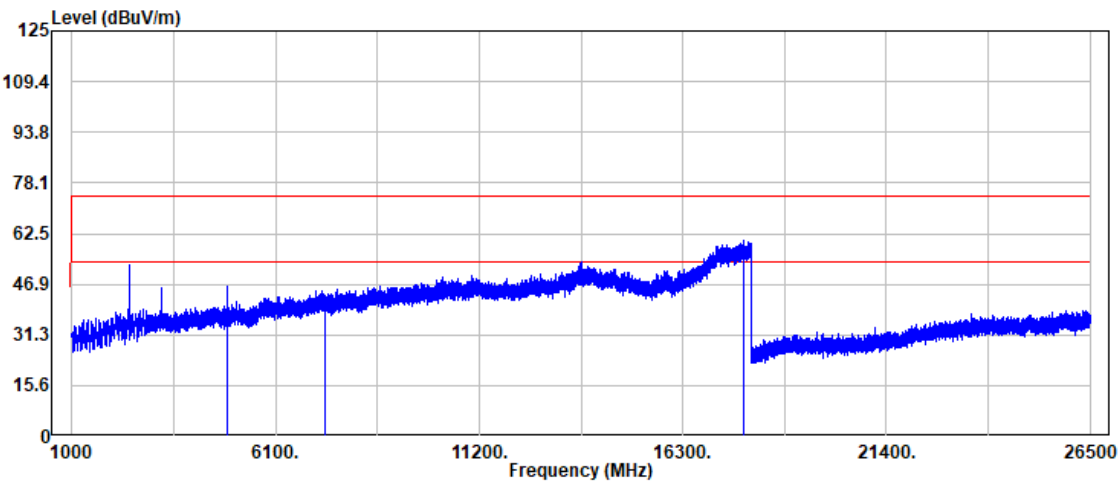


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4884.00	43.19	2.90	46.09	74.00	-27.91	Peak
4884.00	38.78	2.90	41.68	54.00	-12.32	Average
7326.00	33.54	9.62	43.16	74.00	-30.84	Peak
7326.00	29.58	9.62	39.20	54.00	-14.80	Average
17809.00	33.99	26.31	60.30	74.00	-13.70	Peak
17809.00	24.06	26.31	50.37	54.00	-3.63	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 65 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_125K	Temp./Humi.	: 25.4/55
Frequency	: 2480 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

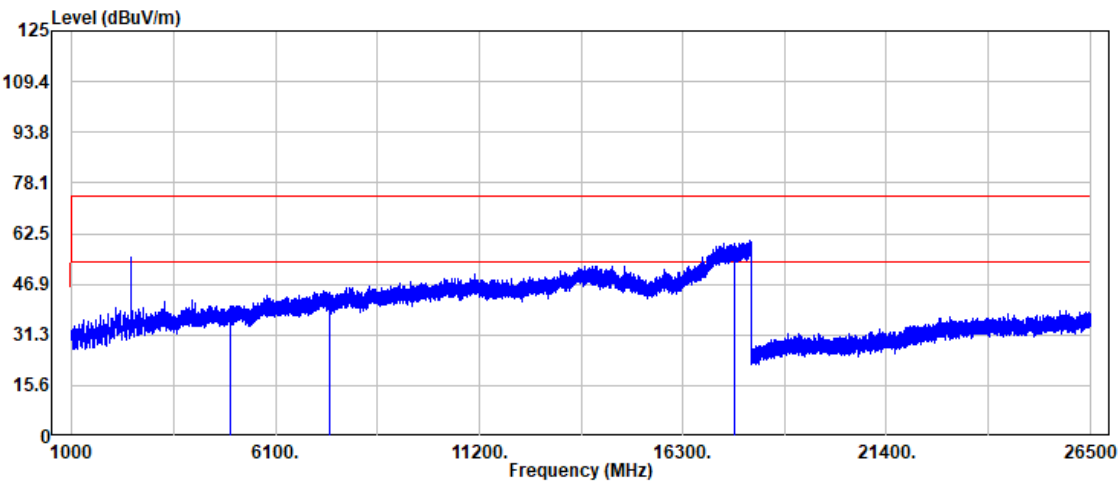


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	36.33	3.69	40.02	74.00	-33.98	Peak
4960.00	28.10	3.69	31.79	54.00	-22.21	Average
7440.00	34.73	9.61	44.34	74.00	-29.66	Peak
7440.00	26.09	9.61	35.70	54.00	-18.30	Average
17611.00	33.49	26.11	59.60	74.00	-14.40	Peak
17611.00	24.06	26.11	50.17	54.00	-3.83	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 66 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_125K	Temp./Humi.	: 25.4/55
Frequency	: 2480 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

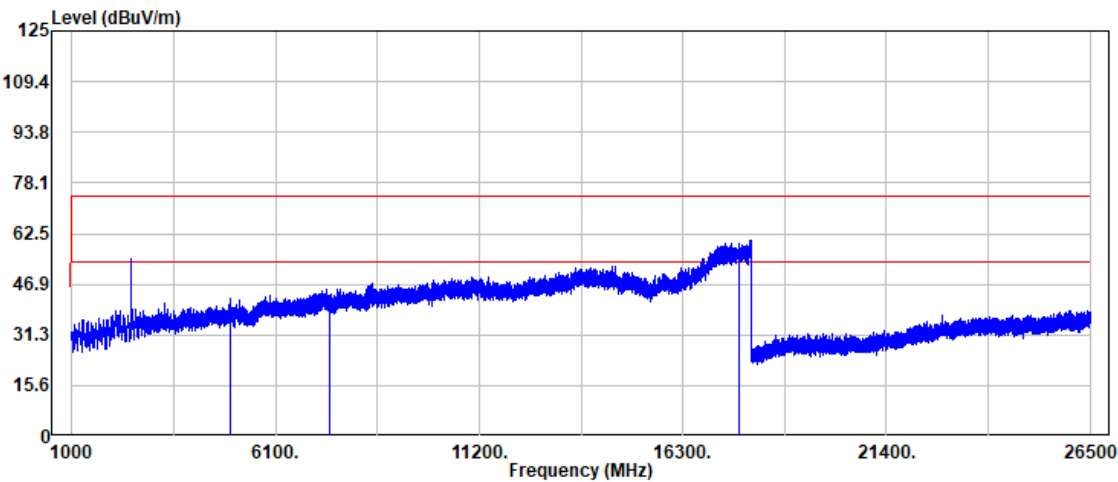


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	38.53	3.69	42.22	74.00	-31.78	Peak
4960.00	32.20	3.69	35.89	54.00	-18.11	Average
7440.00	32.68	9.61	42.29	74.00	-31.71	Peak
7440.00	26.99	9.61	36.60	54.00	-17.40	Average
17700.00	32.75	26.72	59.47	74.00	-14.53	Peak
17700.00	24.06	26.72	50.78	54.00	-3.22	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 67 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2402 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

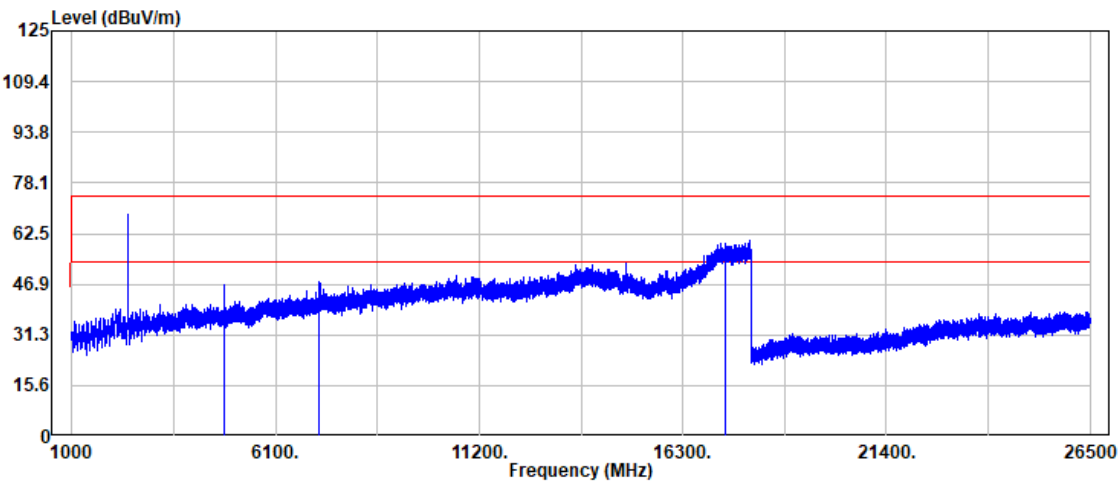


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	43.93	2.67	46.60	74.00	-27.40	Peak
4804.00	41.07	2.67	43.74	54.00	-10.26	Average
7206.00	38.16	9.50	47.66	74.00	-26.34	Peak
7206.00	29.52	9.50	39.02	54.00	-14.98	Average
17360.00	33.54	25.92	59.46	74.00	-14.54	Peak
17360.00	24.05	25.92	49.97	54.00	-4.03	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 68 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2402 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

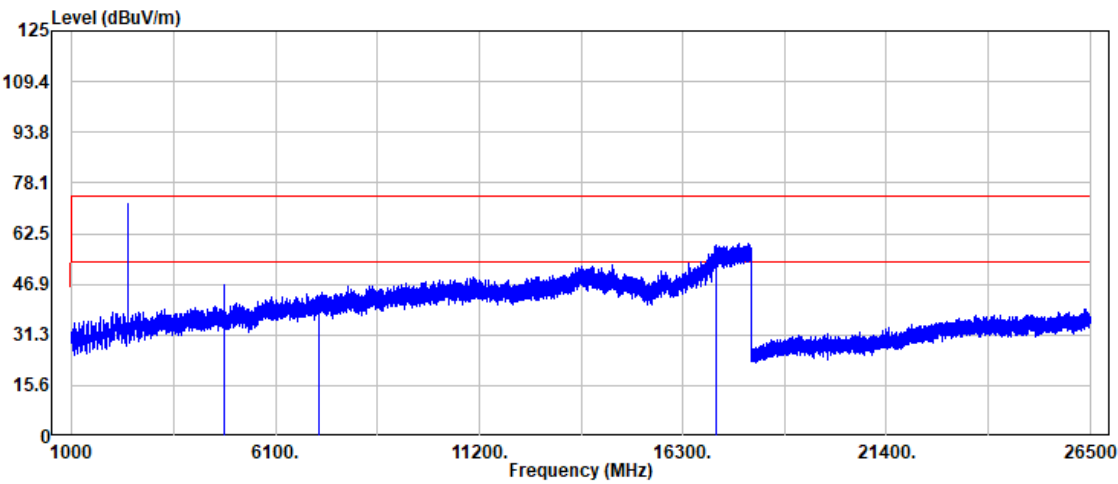


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	44.25	2.67	46.92	74.00	-27.08	Peak
4804.00	42.61	2.67	45.28	54.00	-8.72	Average
7206.00	33.77	9.50	43.27	74.00	-30.73	Peak
7206.00	29.63	9.50	39.13	54.00	-14.87	Average
17118.00	34.12	24.85	58.97	74.00	-15.03	Peak
17118.00	24.16	24.85	49.01	54.00	-4.99	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 69 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2442 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

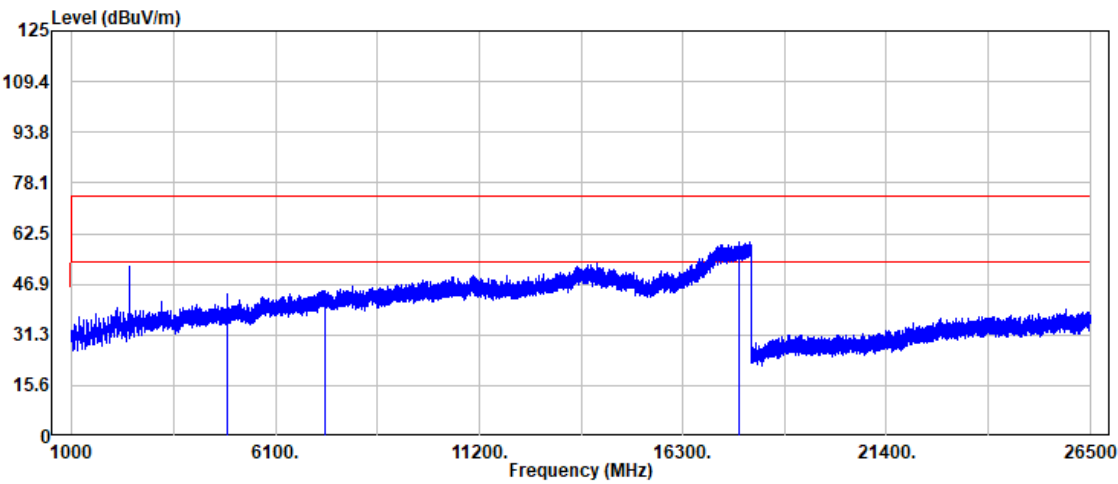


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4884.00	40.92	2.90	43.82	74.00	-30.18	Peak
4884.00	36.61	2.90	39.51	54.00	-14.49	Average
7326.00	35.23	9.62	44.85	74.00	-29.15	Peak
7326.00	29.15	9.62	38.77	54.00	-15.23	Average
17718.00	33.65	26.23	59.88	74.00	-14.12	Peak
17718.00	24.05	26.23	50.28	54.00	-3.72	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 70 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2442 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

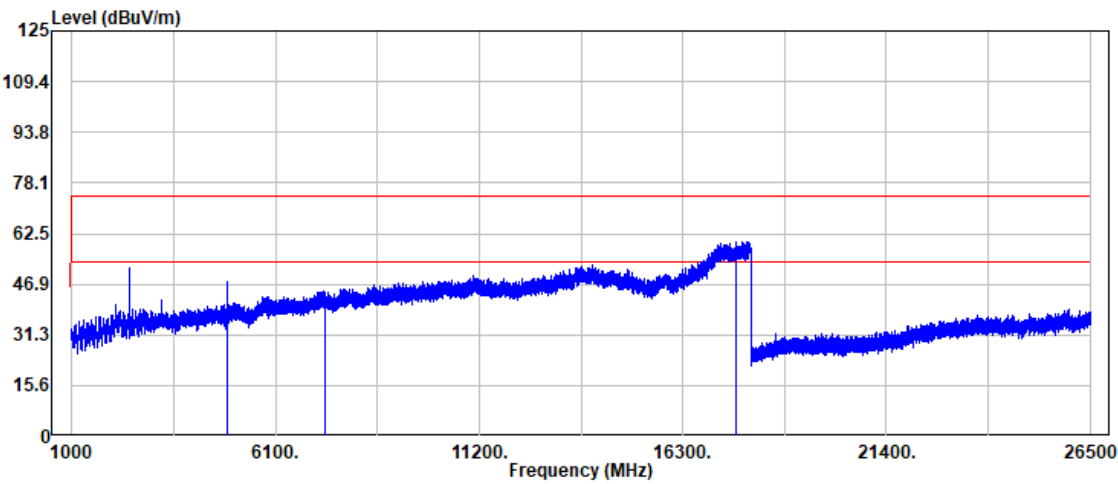


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4884.00	44.60	2.90	47.50	74.00	-26.50	Peak
4884.00	41.15	2.90	44.05	54.00	-9.95	Average
7326.00	34.68	9.62	44.30	74.00	-29.70	Peak
7326.00	29.60	9.62	39.22	54.00	-14.78	Average
17629.00	33.80	26.05	59.85	74.00	-14.15	Peak
17629.00	24.09	26.05	50.14	54.00	-3.86	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 71 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2480 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

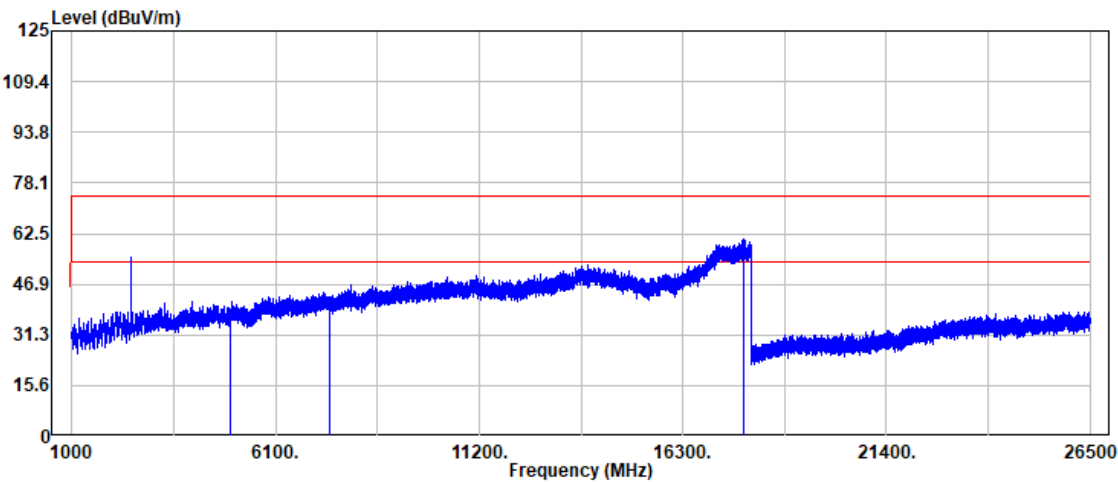


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	35.78	3.69	39.47	74.00	-34.53	Peak
4960.00	29.60	3.69	33.29	54.00	-20.71	Average
7440.00	33.21	9.61	42.82	74.00	-31.18	Peak
7440.00	26.14	9.61	35.75	54.00	-18.25	Average
17832.00	34.61	26.20	60.81	74.00	-13.19	Peak
17832.00	24.06	26.20	50.26	54.00	-3.74	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 72 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-10-01
Operation Band	: BLE_500K	Temp./Humi.	: 25.4/55
Frequency	: 2480 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

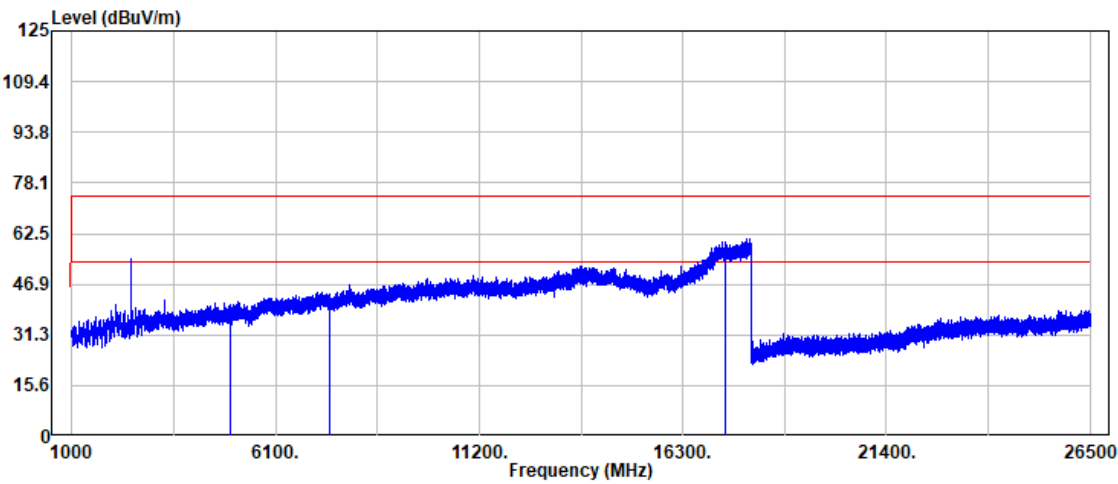


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	36.91	3.69	40.60	74.00	-33.40	Peak
4960.00	30.02	3.69	33.71	54.00	-20.29	Average
7440.00	34.41	9.61	44.02	74.00	-29.98	Peak
7440.00	27.09	9.61	36.70	54.00	-17.30	Average
17354.00	34.17	25.93	60.10	74.00	-13.90	Peak
17354.00	24.26	25.93	50.19	54.00	-3.81	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 73 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2480 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	:		

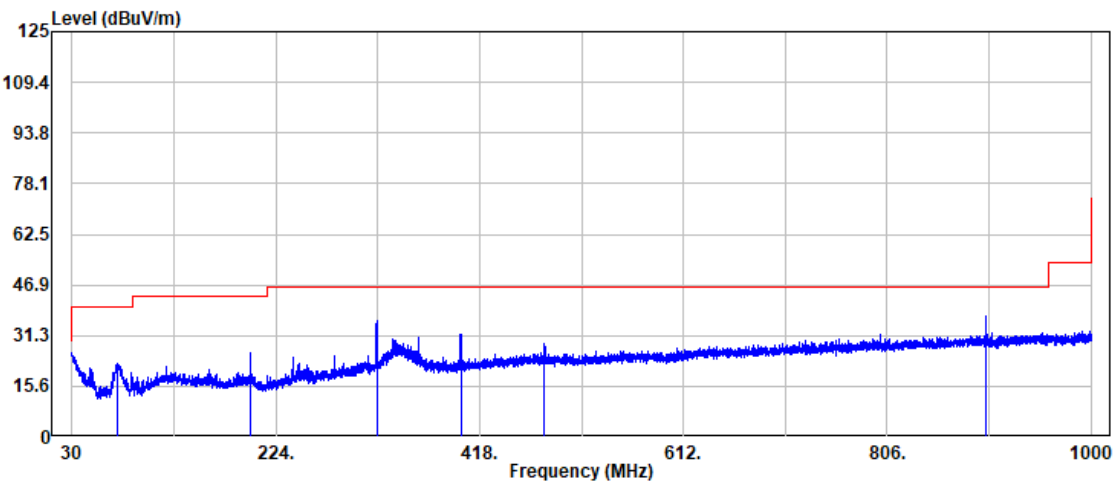


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
72.80	38.50	-15.70	22.80	40.00	-17.20	Peak
199.99	36.23	-10.19	26.04	43.50	-17.46	Peak
320.03	44.60	-8.87	35.73	46.00	-10.27	Peak
400.06	38.38	-6.65	31.73	46.00	-14.27	Peak
479.96	32.86	-4.31	28.55	46.00	-17.45	Peak
900.09	35.53	1.55	37.08	46.00	-8.92	Peak



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 74 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2480 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	:		

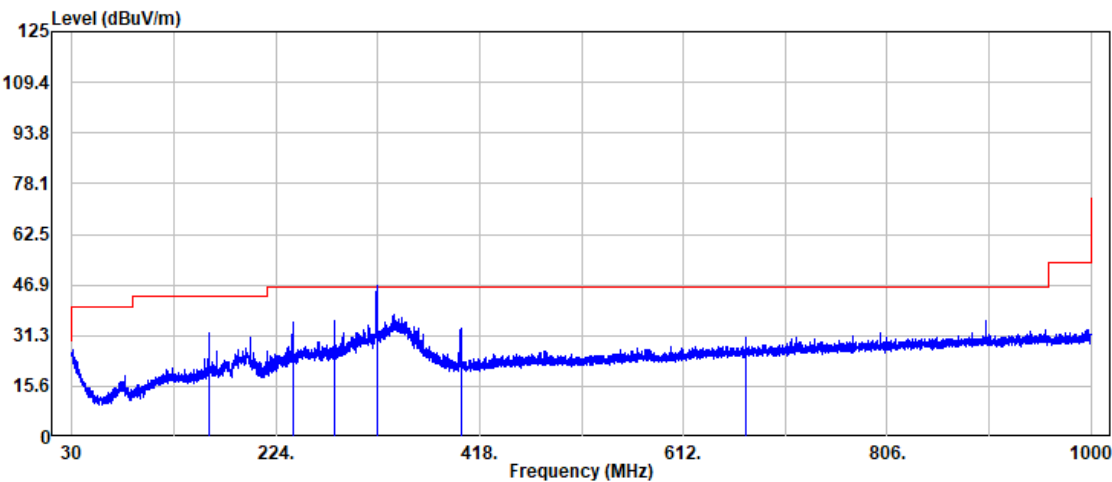


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
159.98	42.97	-11.04	31.93	43.50	-11.57	Peak
240.01	46.91	-11.33	35.58	46.00	-10.42	Peak
280.02	45.27	-9.46	35.81	46.00	-10.19	Peak
320.03	51.26	-8.87	42.39	46.00	-3.61	QP
400.06	40.06	-6.65	33.41	46.00	-12.59	Peak
672.02	32.25	-1.47	30.78	46.00	-15.22	Peak



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 75 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2402 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

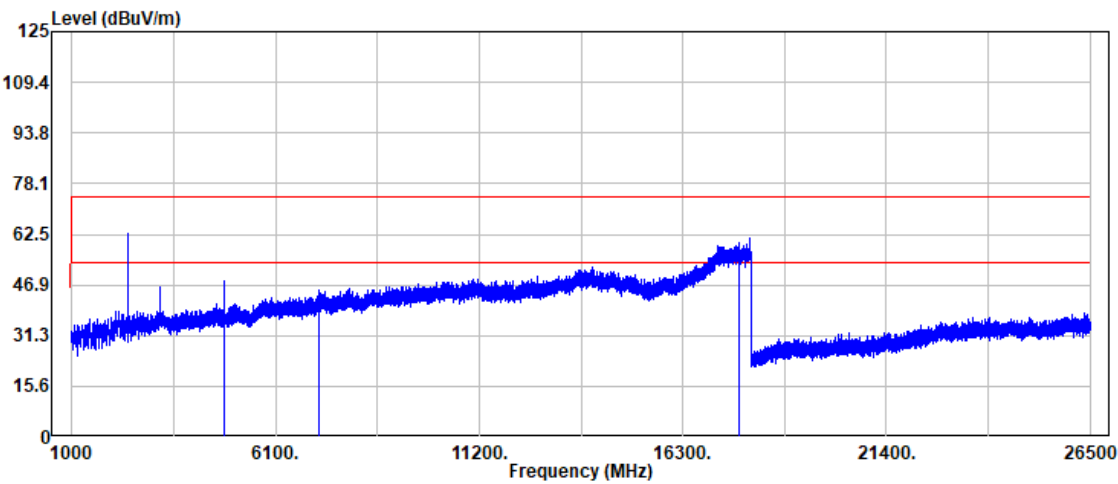


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	45.68	2.34	48.02	74.00	-25.98	Peak
4804.00	42.79	2.34	45.13	54.00	-8.87	Average
7206.00	36.31	9.08	45.39	74.00	-28.61	Peak
7206.00	31.89	9.08	40.97	54.00	-13.03	Average
17715.00	34.13	25.57	59.70	74.00	-14.30	Peak
17715.00	24.04	25.57	49.61	54.00	-4.39	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 76 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2402 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

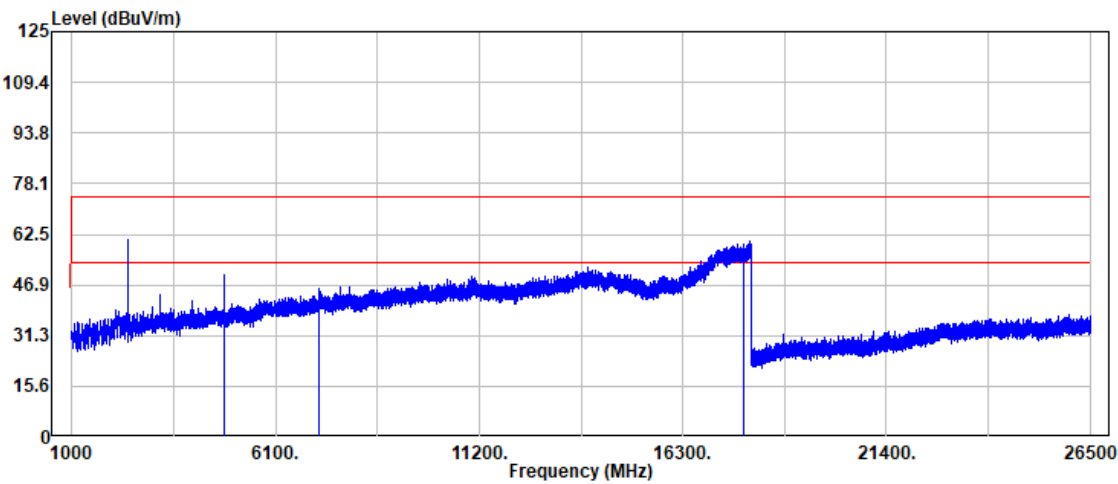


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	47.86	2.34	50.20	74.00	-23.80	Peak
4804.00	44.18	2.34	46.52	54.00	-7.48	Average
7206.00	36.45	9.08	45.53	74.00	-28.47	Peak
7206.00	32.05	9.08	41.13	54.00	-12.87	Average
17813.00	33.80	25.49	59.29	74.00	-14.71	Peak
17813.00	24.16	25.49	49.65	54.00	-4.35	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 77 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2442 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

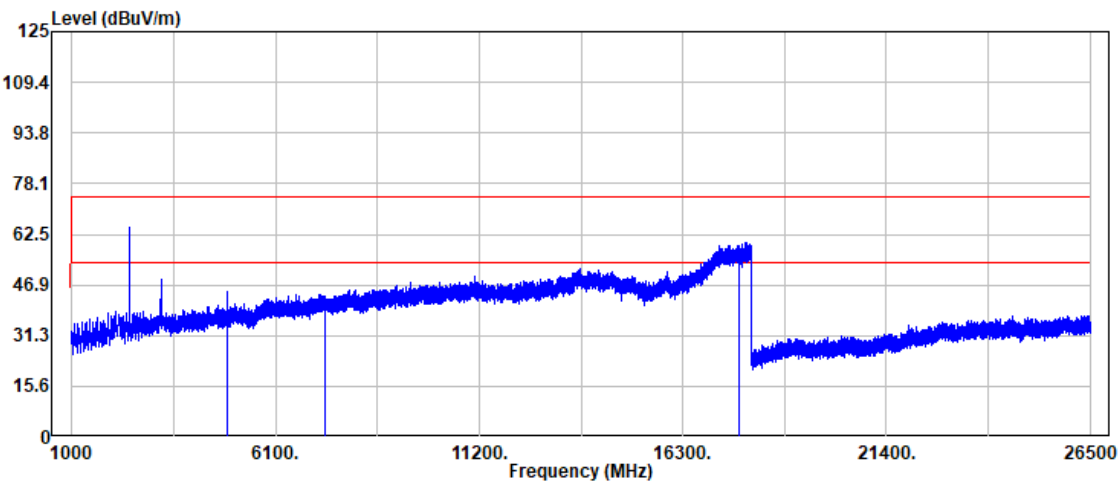


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4884.00	42.42	2.57	44.99	74.00	-29.01	Peak
4884.00	39.05	2.57	41.62	54.00	-12.38	Average
7326.00	34.44	9.11	43.55	74.00	-30.45	Peak
7326.00	30.99	9.11	40.10	54.00	-13.90	Average
17710.00	33.44	25.70	59.14	74.00	-14.86	Peak
17710.00	24.11	25.70	49.81	54.00	-4.19	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 78 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2442 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

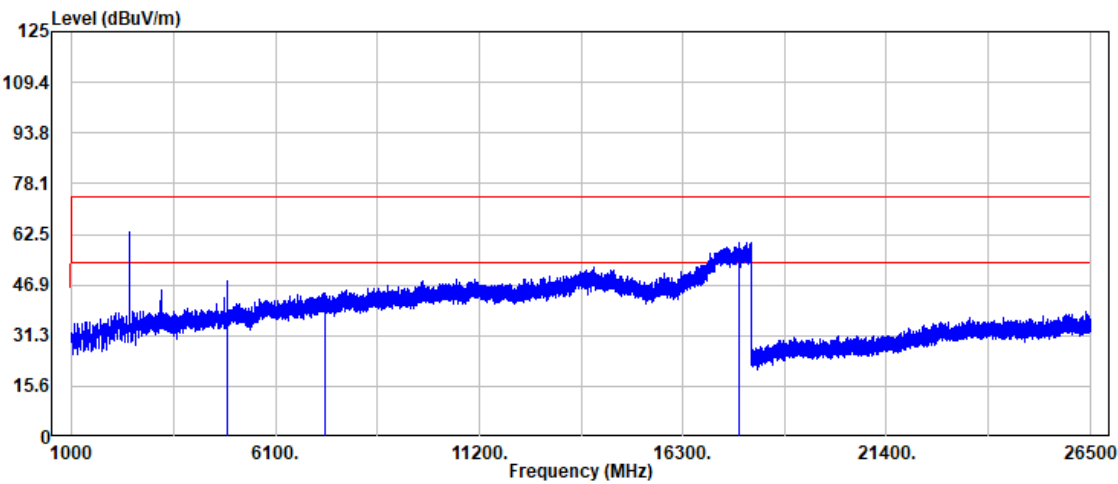


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4884.00	45.75	2.57	48.32	74.00	-25.68	Peak
4884.00	42.68	2.57	45.25	54.00	-8.75	Average
7326.00	35.38	9.11	44.49	74.00	-29.51	Peak
7326.00	32.06	9.11	41.17	54.00	-12.83	Average
17712.00	34.30	25.64	59.94	74.00	-14.06	Peak
17712.00	24.18	25.64	49.82	54.00	-4.18	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 79 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2480 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

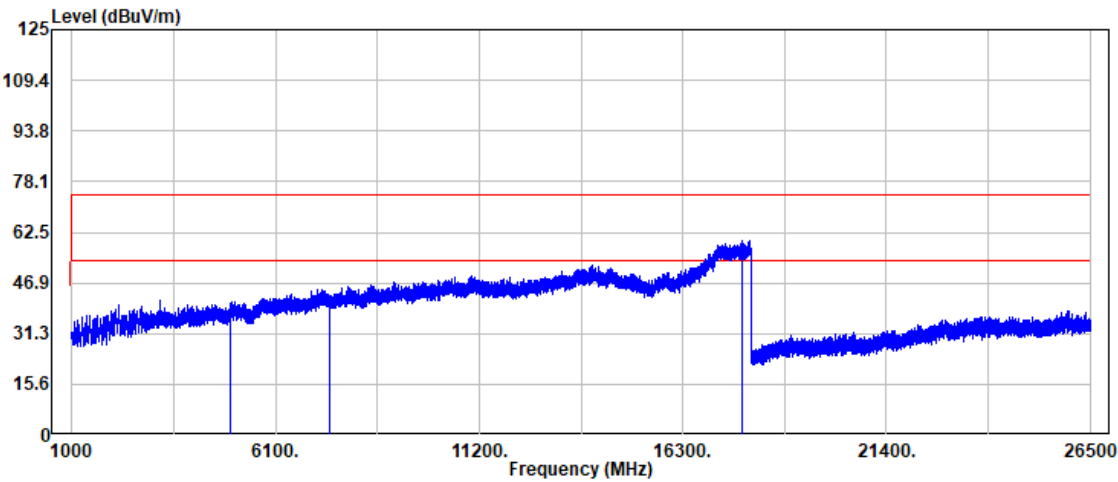


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	36.94	3.40	40.34	74.00	-33.66	Peak
4960.00	30.42	3.40	33.82	54.00	-20.18	Average
7440.00	33.96	9.07	43.03	74.00	-30.97	Peak
7440.00	29.15	9.07	38.22	54.00	-15.78	Average
17799.00	34.43	25.54	59.97	74.00	-14.03	Peak
17799.00	24.06	25.54	49.60	54.00	-4.40	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 80 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_1M	Temp./Humi.	: 25.6/54
Frequency	: 2480 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

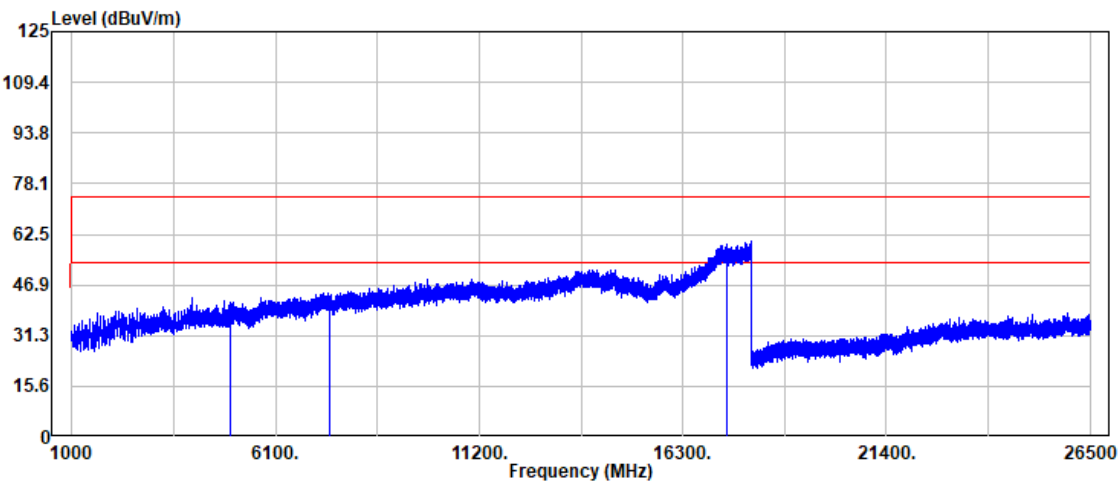


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	37.97	3.40	41.37	74.00	-32.63	Peak
4960.00	31.84	3.40	35.24	54.00	-18.76	Average
7440.00	34.69	9.07	43.76	74.00	-30.24	Peak
7440.00	28.17	9.07	37.24	54.00	-16.76	Average
17414.00	34.27	25.23	59.50	74.00	-14.50	Peak
17414.00	24.19	25.23	49.42	54.00	-4.58	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 81 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_2M	Temp./Humi.	: 25.6/54
Frequency	: 2402 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

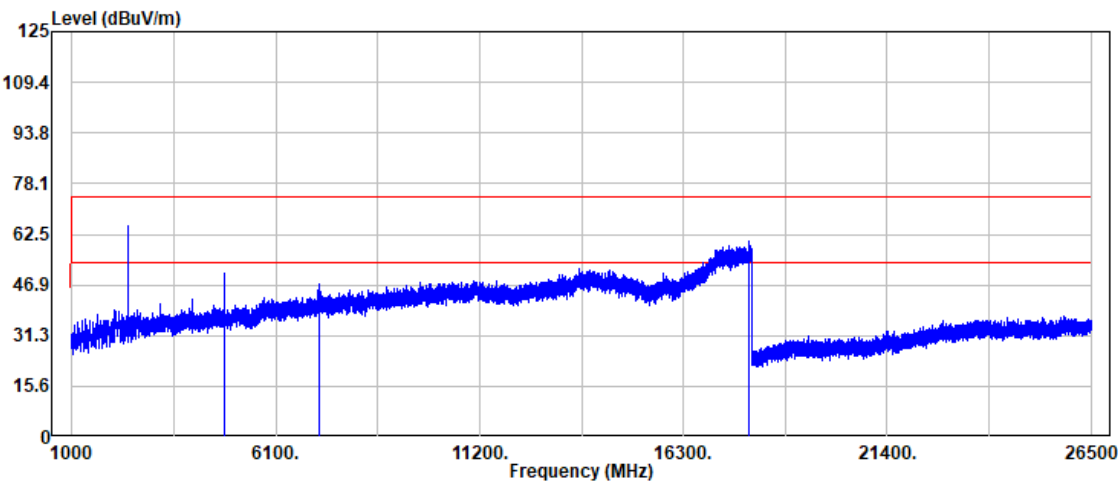


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	48.25	2.34	50.59	74.00	-23.41	Peak
4804.00	44.35	2.34	46.69	54.00	-7.31	Average
7206.00	38.21	9.08	47.29	74.00	-26.71	Peak
7206.00	31.50	9.08	40.58	54.00	-13.42	Average
17925.00	35.20	25.27	60.47	74.00	-13.53	Peak
17925.00	24.16	25.27	49.43	54.00	-4.57	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 82 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_2M	Temp./Humi.	: 25.6/54
Frequency	: 2402 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

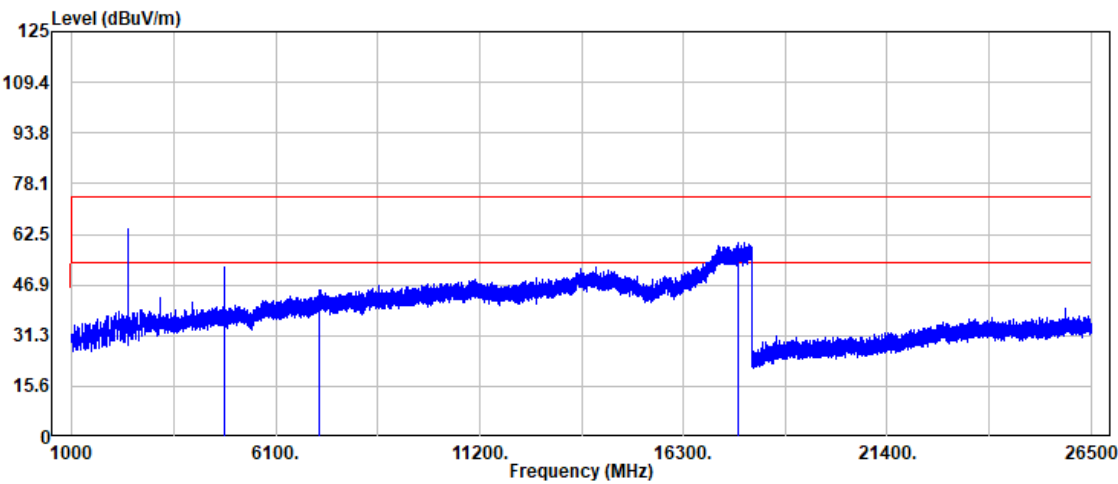


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	49.98	2.34	52.32	74.00	-21.68	Peak
4804.00	46.75	2.34	49.09	54.00	-4.91	Average
7206.00	36.38	9.08	45.46	74.00	-28.54	Peak
7206.00	32.05	9.08	41.13	54.00	-12.87	Average
17656.00	34.74	25.33	60.07	74.00	-13.93	Peak
17656.00	24.18	25.33	49.51	54.00	-4.49	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 83 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_2M	Temp./Humi.	: 25.6/54
Frequency	: 2442 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

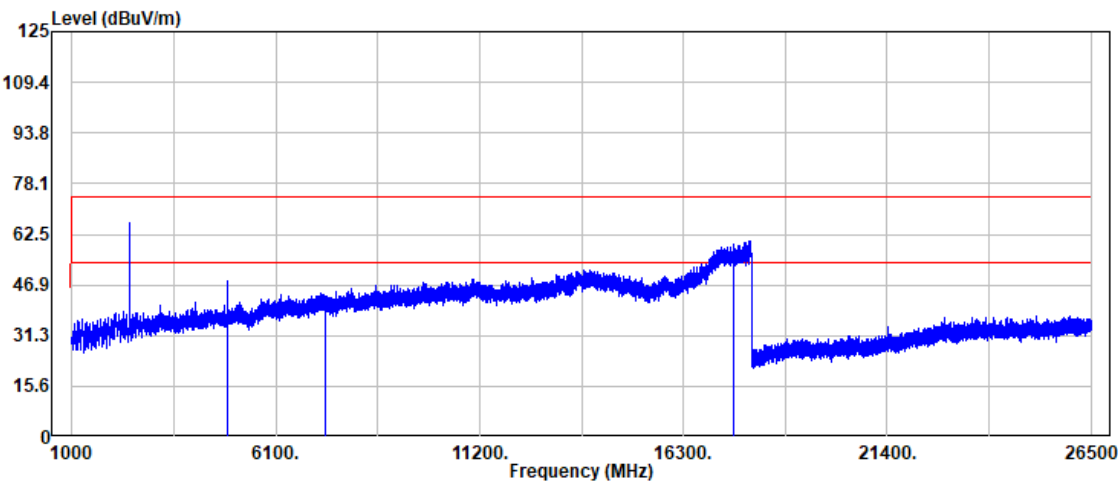


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4884.00	45.58	2.57	48.15	74.00	-25.85	Peak
4884.00	41.08	2.57	43.65	54.00	-10.35	Average
7326.00	34.72	9.11	43.83	74.00	-30.17	Peak
7326.00	29.28	9.11	38.39	54.00	-15.61	Average
17563.00	34.27	25.25	59.52	74.00	-14.48	Peak
17563.00	24.05	25.25	49.30	54.00	-4.70	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 84 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_2M	Temp./Humi.	: 25.6/54
Frequency	: 2442 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 14		

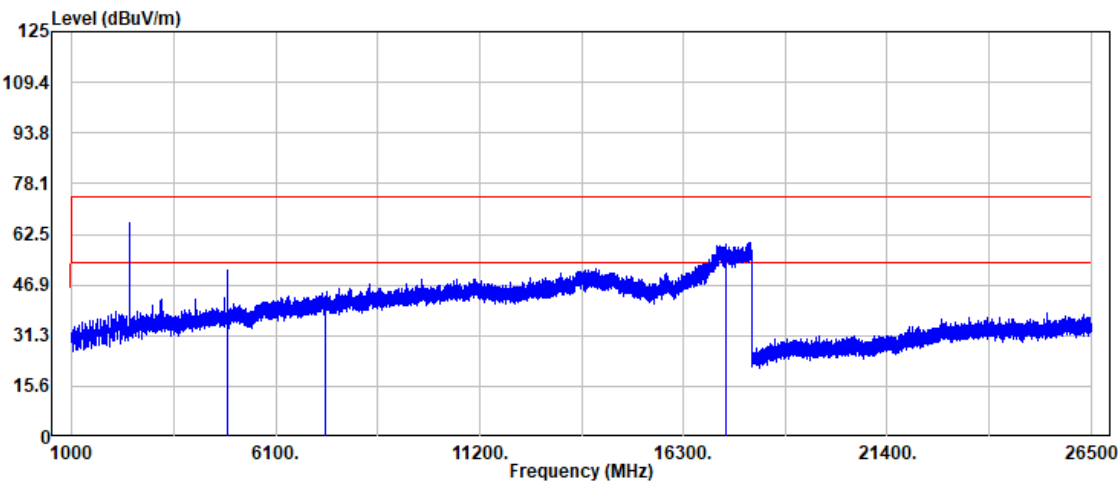


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4884.00	48.69	2.57	51.26	74.00	-22.74	Peak
4884.00	44.68	2.57	47.25	54.00	-6.75	Average
7326.00	33.87	9.11	42.98	74.00	-31.02	Peak
7326.00	31.09	9.11	40.20	54.00	-13.80	Average
17379.00	34.16	25.20	59.36	74.00	-14.64	Peak
17379.00	24.13	25.20	49.33	54.00	-4.67	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 85 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_2M	Temp./Humi.	: 25.6/54
Frequency	: 2480 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

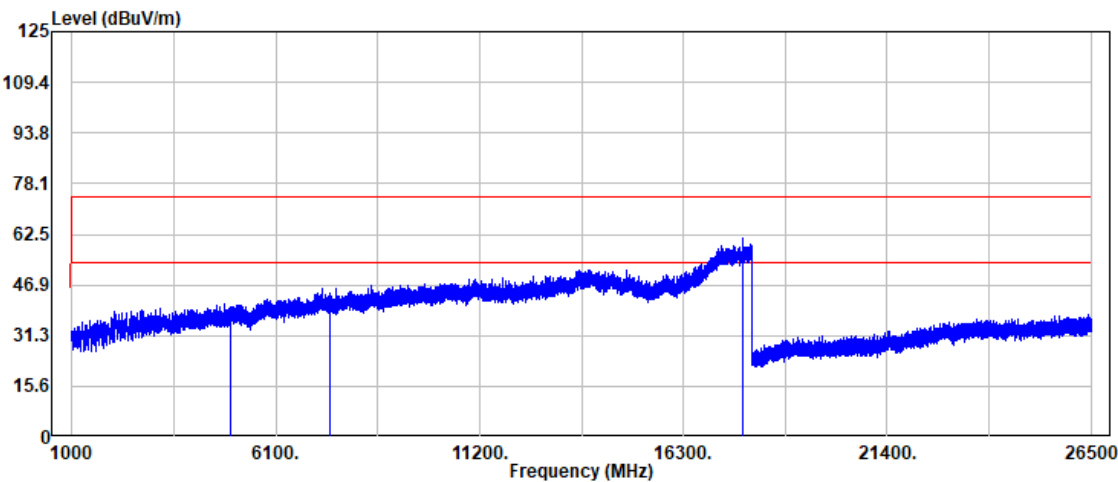


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	36.50	3.40	39.90	74.00	-34.10	Peak
4960.00	29.45	3.40	32.85	54.00	-21.15	Average
7440.00	35.08	9.07	44.15	74.00	-29.85	Peak
7440.00	28.14	9.07	37.21	54.00	-16.79	Average
17792.00	35.75	25.41	61.16	74.00	-12.84	Peak
17792.00	24.04	25.41	49.45	54.00	-4.55	Average



Project No: TM-2605000412P
Report No.: TMWK2605002356KR

Page 86 / 86
Rev. 01

Project No	: TM-2605000412P	Test Date	: 2026-06-15
Operation Band	: BLE_2M	Temp./Humi.	: 25.6/54
Frequency	: 2480 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Ben.Yang
EUT Pol	: H	Test Chamber	: 966A
Setting	: 12		

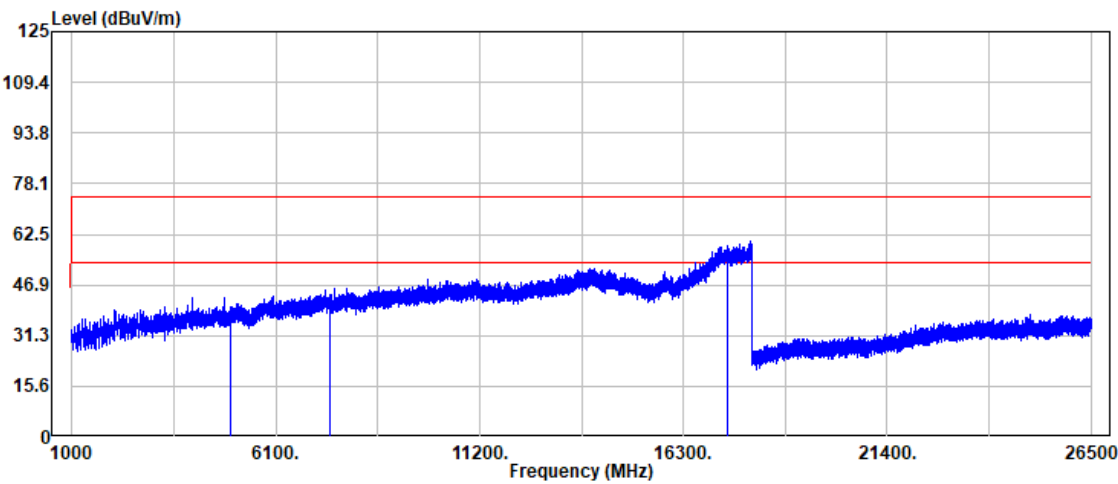

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	36.66	3.40	40.06	74.00	-33.94	Peak
4960.00	30.79	3.40	34.19	54.00	-19.81	Average
7440.00	34.78	9.07	43.85	74.00	-30.15	Peak
7440.00	27.49	9.07	36.56	54.00	-17.44	Average
17394.00	33.52	25.21	58.73	74.00	-15.27	Peak
17394.00	24.18	25.21	49.39	54.00	-4.61	Average

- End of Test Report -