



F2 Labs
16740 Peters Road
Middlefield, Ohio 44062
United States of America
www.f2labs.com

MPE REPORT

Manufacturer:	Chandler Systems, Inc. 710 Orange Street Ashland, Ohio 44805 USA
Applicant:	Same as Above
Product Name:	Legacy View Valve
Product Description:	The Legacy View Valve controls water softening and water filtering appliances. The valve controller can operate several different models of softeners and filters and gives the user the ability to change settings and view information about water treated by the appliance. The Legacy View Valve can be connected to via Bluetooth using a Google or Apple App, giving the user a convenient user interface to interact with.
Operating Voltage/Freq. of EUT During Testing:	120V/60 Hz
Model:	EVb-034-C
FCC ID:	SWP-EVB-034-C
IC:	31769-EVB034C
Testing Commenced:	2025-01-20
Testing Ended:	2025-01-23
Test Results:	In Compliance

The EUT complies with the EMC requirements when manufactured identically as the unit tested in this report, including any required modifications. Any changes to the design or build of this unit subsequent to this testing may deem it non-compliant.

Standards:

- **KDB447498**
- **FCC 1.1310**
- **Safety Code 6**
- **RSS-102, Issue 6**



Order No(s): F2P33844

Applicant: Chandler Systems, Inc.
Model: EVB-034-C

Evaluation Conducted by:

Erik Tobin, EMC Engineer

Report Reviewed by:

Ken Littell, Vice President of Operations

F2 Labs
26501 Ridge Road
Damascus, MD 20872
Ph 301.253.4500

F2 Labs
16740 Peters Road
Middlefield, OH 44062
Ph 440.632.5541

F2 Labs
8583 Zionsville Road
Indianapolis, IN 46268
Ph 317.610.0611

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.



TABLE OF CONTENTS

1	<u>ADMINISTRATIVE INFORMATION</u>
2	<u>SUMMARY OF TEST RESULTS/MODIFICATIONS</u>
3	<u>ENGINEERING STATEMENT</u>
4	<u>EUT INFORMATION AND DATA</u>
5	<u>RF EXPOSURE FOR DEVICE >20cm FROM HUMAN</u>
	➤ <u>FCC</u>
	➤ <u>IC</u>



1 ADMINISTRATIVE INFORMATION

1.1 Measurement Location:

F2 Labs in Middlefield, Ohio.

Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

Site description and attenuation data are on file with the Certification and Engineering Bureau, Industry Canada, Site Number 4730B.

1.2 Measurement Procedure:

All measurements were performed according to:

- KDB558074
- FCC 15.247
- RSS-247

1.4 Document History

Document Number	Description	Issue Date	Approved By
F2P33844-03E	First Issue	2025-01-31	K. Littell



2 SUMMARY OF TEST RESULTS

Test Name	Standard(s)	Results
RF Exposure for Device >20cm from Human	KDB447498 FCC 1.1310 Safety Code 6 RSS-102	Complies

Modifications Made to the Equipment
None



3 **ENGINEERING STATEMENT**

This report has been prepared on behalf of Chandler Systems, Inc. to provide documentation for the calculations described herein, based on the measurements taken in supporting Test Reports. This equipment has been tested, and calculations were found to comply with KDB447498, FCC 1.1310, Safety Code 6 and RSS-102. The test results found in this test report relate only to the item(s) tested.



4 EUT INFORMATION AND DATA

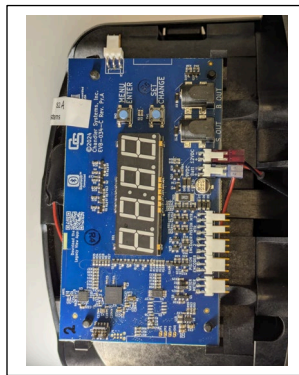
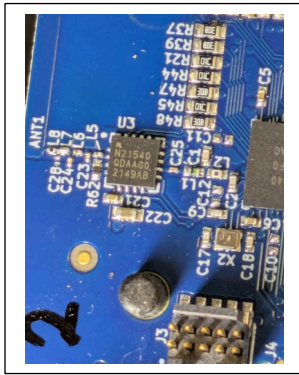
4.1 Equipment Under Test:

Product: Legacy View Valve

Model(s): EVB-034-C

Serial No.: 1

Software Version: Terraterm V5

FCC ID: SWP-EVB-034-C**IC: 31769-EVB034C**

4.2 Trade Name:

Chandler Systems, Inc.

4.3 Power Supply:

Device	Manufacturer	Model Number	Serial Number
Power Supply	Chandler Systems, Inc.	2001X125	None Specified

4.4 Applicable Rules:

- KDB447498
- FCC 1.1310
- Safety Code 6
- RSS-102

4.6 Antenna:

Trace Antenna, -4.35dBi

4.7 Accessories: None

4.8 Test Item Condition:

The equipment to be tested was received in good condition.

**5. RF EXPOSURE FOR DEVICE >20cm FROM HUMAN****5.1 Requirements: Distance used is 20cm**

FCC	
Limit:	2402 MHz = 1mW/cm ²
Formula Used for Result:	$\frac{\text{Conducted Power}}{4 \pi R^2}$
Results:	36.73mW at the 2480 MHz High Channel (highest) $\frac{36.73\text{mW}}{4 \pi R^2} = \frac{36.73\text{mW}}{5026.55} = 0.0073 \text{ mW/cm}^2$

IC	
Limit:	2402 MHz = 5.35W/m ²
Formula Used for Result:	$\frac{\text{Conducted Power}}{4 \pi R^2}$
Results:	36.73mW at the 2480 MHz High Channel (highest) $\frac{36.73\text{mW}}{4 \pi R^2} = \frac{36.73\text{mW}}{5026.55} = 0.073 \text{ W/m}^2$