



# RF TEST REPORT

**Report No.:** SET2021-13731

**Product Name:** Smart Minipos Terminal

**FCC ID:** SWSI2000

**Model No. :** i2000

**Applicant:** UROVO TECHNOLOGY CO., LTD.

**Address:** 36F,High-Tech Zone Union Tower,No.63,Xuefu Road, Nanshan District, Shenzhen, Guangdong, China

**Dates of Testing:** 10/08/2021 —10/21/2021

**Issued by:** CCIC Southern Testing Co., Ltd.

**Lab Location:** Electronic Testing Building, No.43 Shahe Road Xili Street, Nanshan District, Shenzhen, Guangdong, 518055 China.

**Tel:** 86 755 26627338    **Fax:** 86 755 26627238

This test report consists of 25 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product Name**.....: Smart Minipos Terminal

**Trade Name** .....: UROVO

**Brand Name**.....: UROVO

**Applicant** .....: UROVO TECHNOLOGY CO., LTD.

**Applicant Address** .....: 36F,High-Tech Zone Union Tower,No.63,Xuefu Road,  
Nanshan District, Shenzhen, Guangdong, China.

**Manufacturer** .....: UROVO TECHNOLOGY CO., LTD.

**Manufacturer Address** .....: 36F,High-Tech Zone Union Tower,No.63,Xuefu Road,  
Nanshan District, Shenzhen, Guangdong, China.

**Test Standards** .....: 47 CFR FCC Part 15.225

**Test Result**.....: PASS

**Tested by** .....:

2021.10.21

Sun, Test Engineer

**Reviewed by** .....:

2021.10.21

Chris You, Senior Engineer

**Approved by**.....:

2021.10.21

Shuangwen Zhang, Manager



## TABLE OF CONTENTS

|            |                                                   |           |
|------------|---------------------------------------------------|-----------|
| <b>1.</b>  | <b>GENERAL INFORMATION .....</b>                  | <b>5</b>  |
| <b>1.1</b> | <b>EUT Description .....</b>                      | <b>5</b>  |
| <b>1.2</b> | <b>Test Standards and Results .....</b>           | <b>6</b>  |
| <b>1.3</b> | <b>Facilities and Accreditations.....</b>         | <b>7</b>  |
| 1.3.1      | Facilities .....                                  | 7         |
| 1.3.2      | Test Environment Conditions.....                  | 7         |
| <b>2.</b>  | <b>47 CFR PART 15C REQUIREMENTS.....</b>          | <b>8</b>  |
| <b>2.1</b> | <b>Antenna requirement .....</b>                  | <b>8</b>  |
| 2.1.1      | Applicable Standard .....                         | 8         |
| 2.1.2      | Antenna Information .....                         | 8         |
|            | Result: comply .....                              | 8         |
| <b>2.2</b> | <b>Field Strength of Radiated Emissions .....</b> | <b>9</b>  |
| 2.2.1      | Requirement .....                                 | 9         |
| 2.2.2      | Test Result.....                                  | 9         |
| <b>2.3</b> | <b>20 dB Bandwidth Testing .....</b>              | <b>11</b> |
| 2.3.1      | Requirement .....                                 | 11        |
| 2.3.2      | Test Description .....                            | 11        |
| 2.3.3      | Test Result.....                                  | 12        |
| <b>2.4</b> | <b>Frequency Stability.....</b>                   | <b>13</b> |
| 2.4.1      | Requirement .....                                 | 13        |
| 2.4.2      | Test Description .....                            | 13        |
| 2.4.3      | Test Result.....                                  | 14        |
| <b>2.5</b> | <b>Conducted Emission.....</b>                    | <b>15</b> |
| 2.5.1      | Requirement .....                                 | 15        |
| 2.5.2      | Test Description .....                            | 15        |
| 2.5.3      | Test Result.....                                  | 16        |
| <b>2.6</b> | <b>Radiated Emission .....</b>                    | <b>19</b> |
| 2.6.1      | Requirement .....                                 | 19        |
| 2.6.2      | Test Description .....                            | 20        |
| 2.6.3      | Test Result.....                                  | 21        |



| Change History |            |                   |
|----------------|------------|-------------------|
| Issue          | Date       | Reason for change |
| 1.0            | 2021.10.21 | First edition     |
|                |            |                   |
|                |            |                   |

## 1. GENERAL INFORMATION

### 1.1 EUT Description

|                   |                        |
|-------------------|------------------------|
| EUT Type          | Smart Minipos Terminal |
| Frequency Range   | 13.553MHz – 13.567MHz  |
| Operating Rang    | 13.56MHz               |
| Number of channel | 1                      |
| Modulation Type   | ASK                    |
| Antenna Type      | Internal Antenna       |
| Antenna Gain      | 0dBi                   |



## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

1. 47 CFR FCC Part 15
2. ANSI C63.10-2013
3. FCC KDB 174176

Test detailed items/section required by FCC rules and results are as below:

| FCC Rules                       | Description of Test                  | Result    |
|---------------------------------|--------------------------------------|-----------|
| §15.203                         | Antenna Requirement                  | Compliant |
| §15.207                         | Conducted Emission                   | Compliant |
| 15.225(d)<br>§15.209            | Radiated Emission Test               | Compliant |
| §15.225(a) (b) (c)<br>§15.31(f) | Field Strength of Radiated Emissions | Compliant |
| §15.225(e)                      | Frequency Stability                  | Compliant |
| §15.215(c)                      | 20 dB Bandwidth Testing              | Compliant |

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.



### 1.3 Facilities and Accreditations

#### 1.3.1 Facilities

**CNAS-Lab Code: L1659**

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

**FCC-Registration No.: CN1283**

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

**ISED Registration: 11185A-1****CAB identifier: CN0064**

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until April 19th, 2023.

**A2LA Code: 5721.01**

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

#### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |              |
|-----------------------------|--------------|
| Temperature (°C):           | 15°C - 35°C  |
| Relative Humidity (%):      | 30% -60%     |
| Atmospheric Pressure (kPa): | 86KPa-106KPa |

## 2. 47 CFR PART 15C REQUIREMENTS

### 2.1 Antenna requirement

#### 2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2 Antenna Information

**Antenna Category:** Integral antenna

**Antenna General Information:**

| No. | EUT Model | Working frequency     | Ant. Cat.        | Gain(dBi) |
|-----|-----------|-----------------------|------------------|-----------|
| 1   | I2000     | 13.553MHz – 13.567MHz | Internal antenna | 0         |

**Result: comply**

The EUT has a permanently antenna. which complies with the Part 15.203. Please refer to the EUT internal photos.

## 2.2 Field Strength of Radiated Emissions

### 2.2.1 Requirement

As per FCC Part 15.225

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) Distance extrapolation Factor =  $40 \log_{10}(\text{specific distance/test distance})$ ,

Limit line = specific limit(dBμV) + Distance extrapolation Factor

#### Test Description

The measured Field Strength of Radiated Emissions was calculated by the reading of the spectrum analyzer and calibration.

#### A. Test Setup:

The radiated emission tests were performed in the 3-meter chamber A test site, using the setup accordance with the ANSI C63.10:2013. The specification used was the FCC Part Subpart C limits.

#### B. Equipments List:

| Description          | Manufacturer | Model   | Serial No. | Cal. Date  | Cal. Due Date |
|----------------------|--------------|---------|------------|------------|---------------|
| EMI Test Receiver    | R&S          | ESIB26  | A0304218   | 2021.01.04 | 2022.01.03    |
| Passive Loop Antenna | R&S          | HFH2-Z2 | 100047     | 2019.04.26 | 2022.04.25    |



### 2.2.2 Test Result

## A. Test Verdict:

Test Mode: Continuous Transmitting

| Indicated                |                     |                                    | Detector<br>PK/QP/AV | FCC Part 15.225          |        |
|--------------------------|---------------------|------------------------------------|----------------------|--------------------------|--------|
| Frequency Range<br>(MHz) | Mark point<br>(MHz) | Maximum Reading<br>(dBμV/m)<br>@3m |                      | Limit<br>(dBμV/m)<br>@3m | Result |
| 13.553-13.567            | 13.560              | 25.83(H)                           | QP                   | 124.0                    | Pass   |
| 13.553-13.567            | 13.560              | 31.03(V)                           | QP                   | 124.0                    | Pass   |

Test Plot:

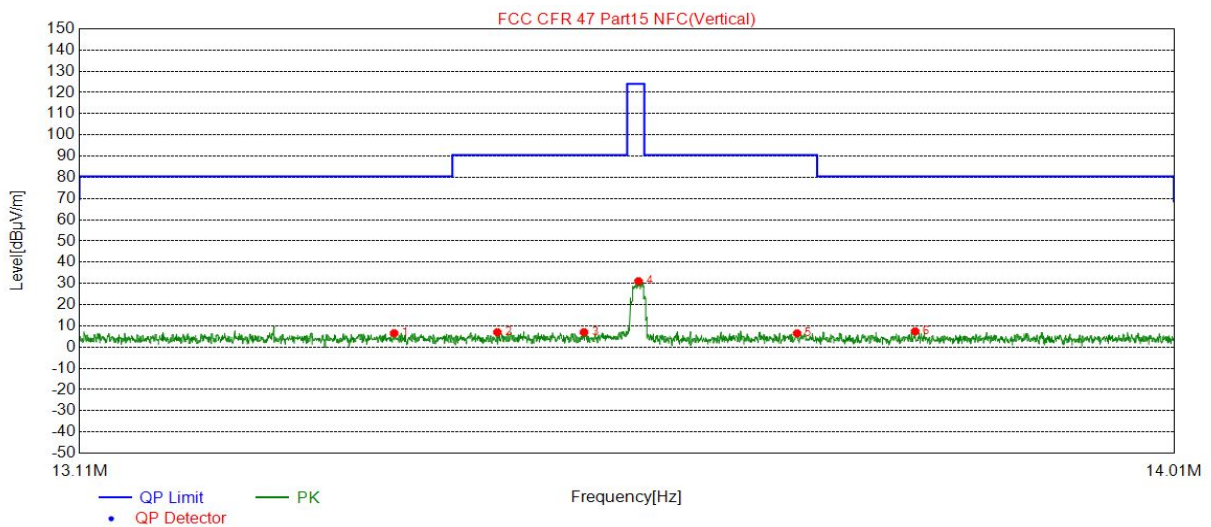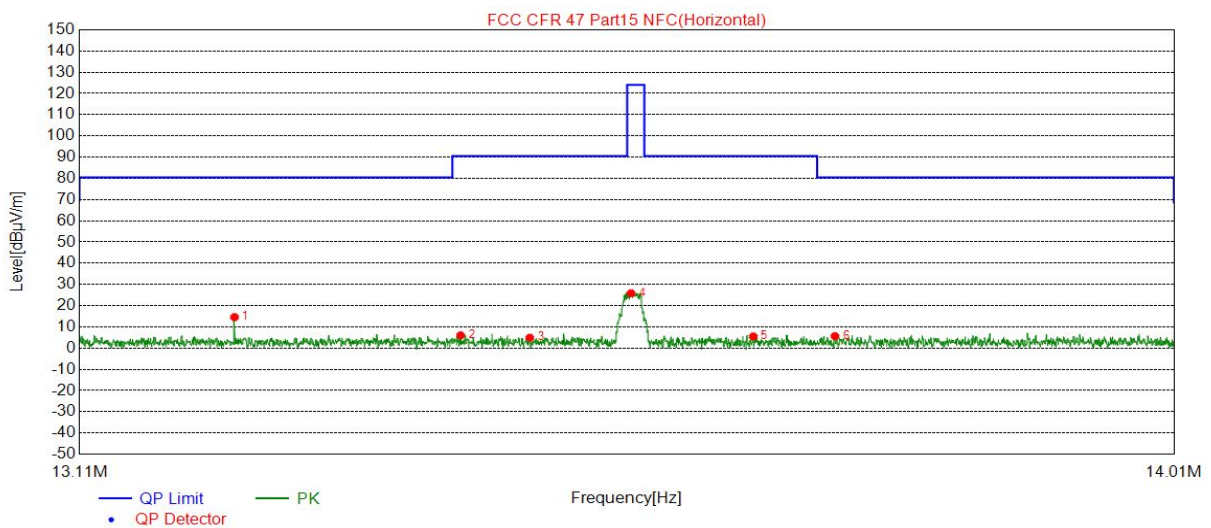

## 2.3 20 dB Bandwidth Testing


### 2.3.1 Requirement

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553-13.567MHz).

### 2.3.2 Test Description

#### A. Test Set:

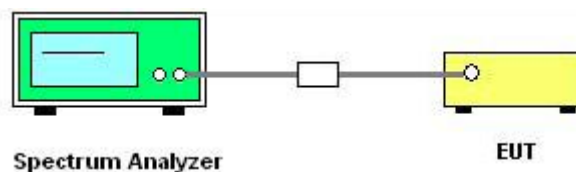

The EUT which is powered by the AC 120V/60Hz is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss and Atten as the factor is calibrated to correct the reading.

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.


Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

**A. Equipments List:**

| Description       | Manufacturer | Model  | Serial No. | Cal. Date  | Cal. Due Date |
|-------------------|--------------|--------|------------|------------|---------------|
| Spectrum Analyzer | Keysight     | N9030A | A160702554 | 2021.04.26 | 2022.04.25    |

**2.3.3 Test Result**

| Test Frequency(MHz)                                                                    | 20dB Bandwidth(KHz) |
|----------------------------------------------------------------------------------------|---------------------|
| 13.56                                                                                  | 6.351               |
| F <sub>L</sub> :13.556341MHz, F <sub>H</sub> :13.563815MHz<br>Within: 13.553-13.567MHz |                     |

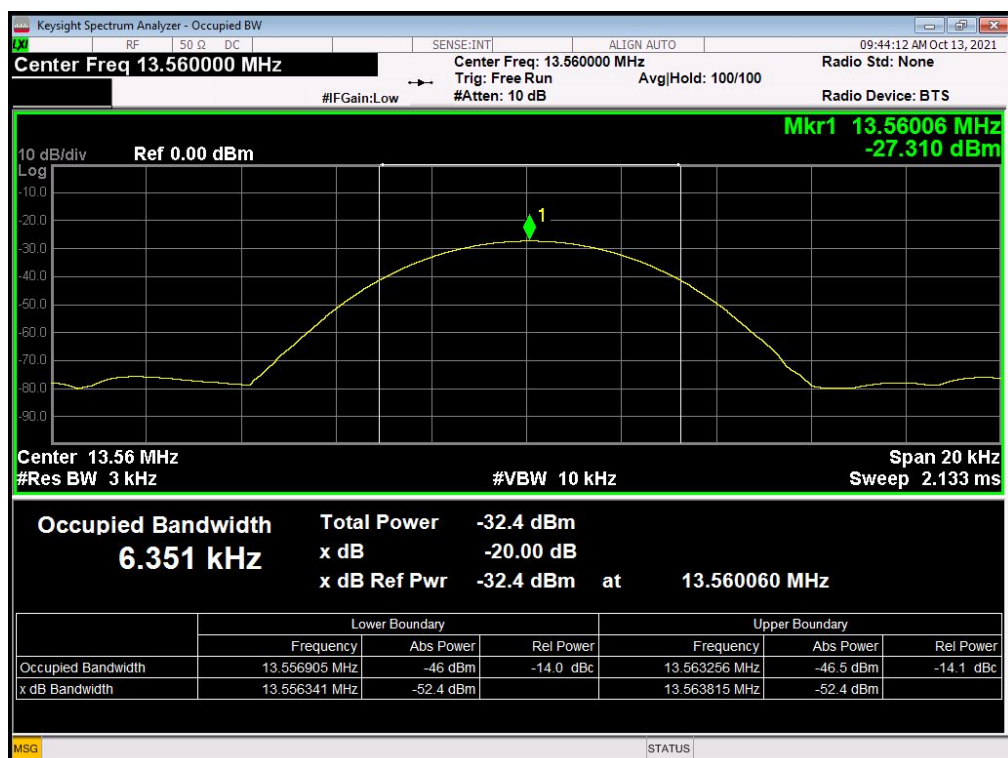**20 dB Occupied Bandwidth**


## 2.4 Frequency Stability

### 2.4.1 Requirement

According to FCC section 15.225(e), the frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  (100ppm) of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery

### 2.4.2 Test Description

#### A. Test Set:

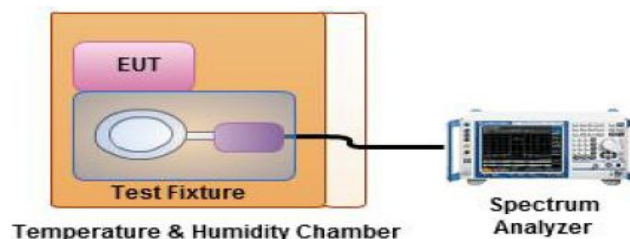

The EUT is powered by AC 120V/60Hz, which is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

#### B. Test Procedure

Frequency Stability vs. Temperature: The EUT is powered by AC 120V/60Hz, then antenna was connected to a Spectrum Analyzer. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable AC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

#### C. Equipments List:

| Description         | Manufacturer | Model   | Serial No. | Cal. Date  | Cal. Due Date |
|---------------------|--------------|---------|------------|------------|---------------|
| Spectrum Analyzer   | Keysight     | N9030A  | A160702554 | 2021.04.26 | 2022.04.25    |
| Temperature chamber | Tomilo       | DNF810C | A0501375   | 2021.05.25 | 2022.05.24    |

### 2.4.3 Test Result

Test Mode: Continuous Transmitting

| Test Environment     |                  | Frequency Reading (MHz) | Frequency Error (ppm) | Part 15.225 Limit (ppm) | Result |
|----------------------|------------------|-------------------------|-----------------------|-------------------------|--------|
| Adapter Power Supply | Temperature (°C) |                         |                       |                         |        |
| DC3.7V               | -20              | 13.56006                | 4.42                  | ±100ppm (±0.01%)        | Pass   |
|                      | -10              | 13.56006                | 4.42                  |                         | Pass   |
|                      | 0                | 13.56004                | 2.95                  |                         | Pass   |
|                      | 10               | 13.56006                | 4.42                  |                         | Pass   |
|                      | 20               | 13.56005                | 3.69                  |                         | Pass   |
|                      | 30               | 13.56005                | 3.69                  |                         | Pass   |
|                      | 40               | 13.56006                | 4.42                  |                         | Pass   |
|                      | 50               | 13.56006                | 4.42                  |                         | Pass   |
| Max. = DC 4.4V       | 20               | 13.56006                | 4.42                  |                         | Pass   |
| Min. = DC 3.5V       | 20               | 13.56006                | 4.42                  |                         | Pass   |

## 2.5 Conducted Emission

### 2.5.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


| Frequency range (MHz) | Conducted Limit (dB $\mu$ V) |          |
|-----------------------|------------------------------|----------|
|                       | Quai-peak                    | Average  |
| 0.15 - 0.50           | 66 to 56                     | 56 to 46 |
| 0.50 - 5              | 56                           | 46       |
| 5 - 30                | 60                           | 50       |

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.5.2 Test Description

#### A. Test Setup:

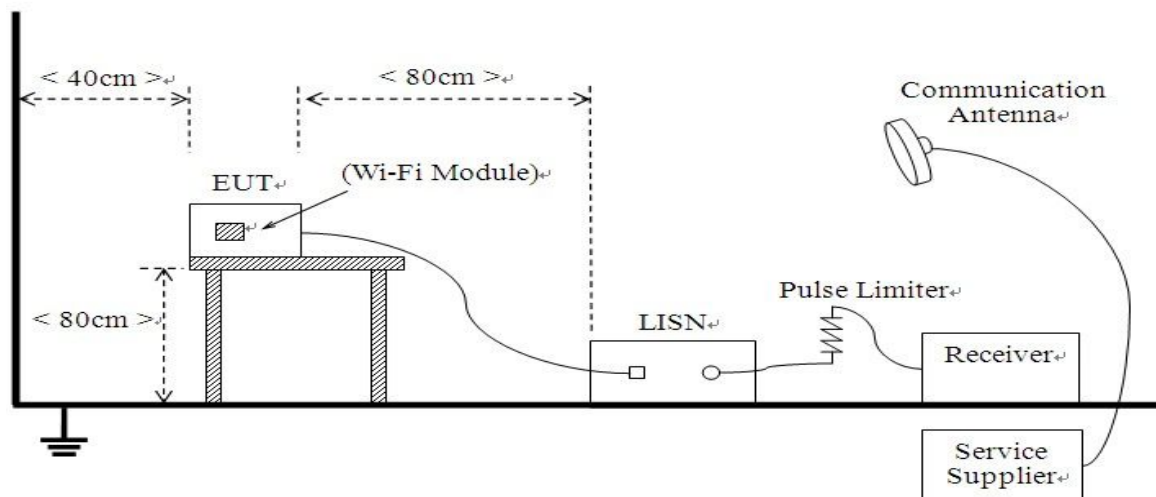

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10:2013

The EUT is powered by AC 120V/60Hz. The factors of the site are calibrated to correct the reading. During the measurement.

**B. Equipments List:**

| Description       | Manufacturer | Model  | Serial No. | Cal. Date  | Cal. Due Date |
|-------------------|--------------|--------|------------|------------|---------------|
| EMI Test Receiver | R&S          | ESIB26 | A0304218   | 2021.01.04 | 2022.01.03    |
| LISN              | R&S          | ENV216 | A140701847 | 2021.08.11 | 2022.08.10    |


**2.5.3 Test Result**

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**A. Test setup:**


The EUT configuration of the emission tests is NFC Tx mode+ adapter.

## Test data and Plots:

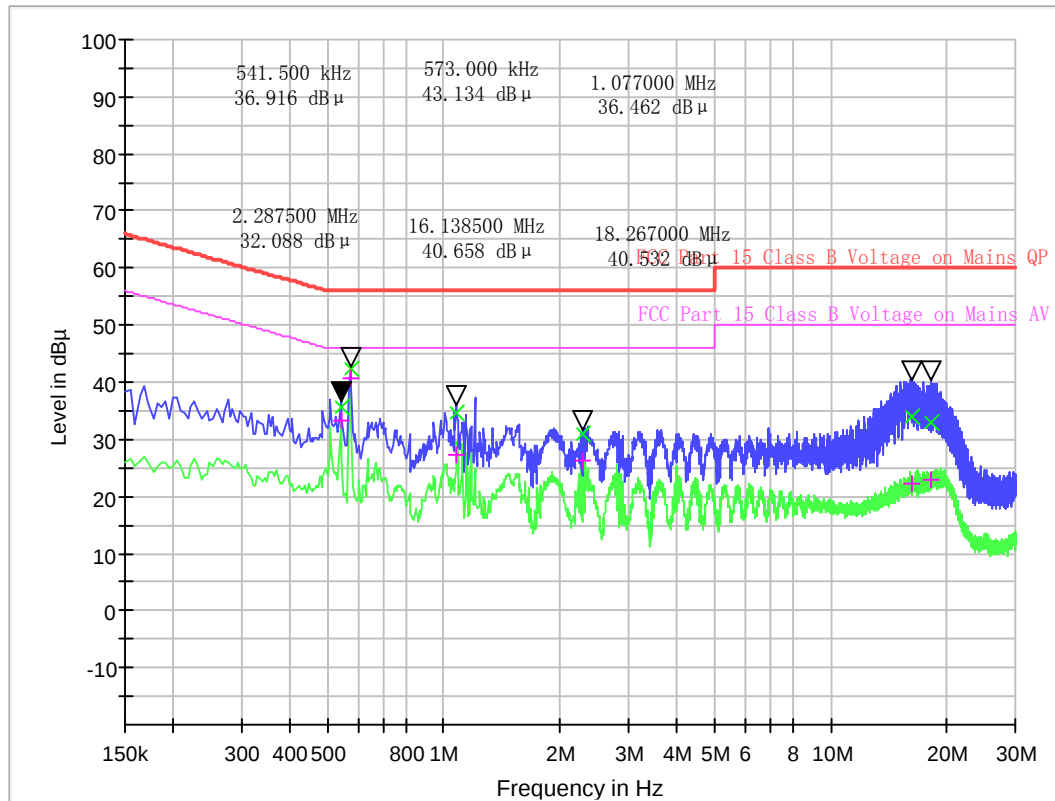

(Plot A: L Phase)

| Frequency (MHz) | QuasiPeak (dBμ V) | Average (dBμ V) | Cabel Loss (dB) | Corr. (dB) | Margin - QPK | Limit - QPK | Margin - AV | Limit - AV (dBμ V) |
|-----------------|-------------------|-----------------|-----------------|------------|--------------|-------------|-------------|--------------------|
| 0.541500        | 35.66             | 33.27           | 0.1             | 10.1       | 20.34        | 56.0        | 12.73       | 46.0               |
| 0.573000        | 42.30             | 40.67           | 0.1             | 10.1       | 13.70        | 56.0        | 5.33        | 46.0               |
| 1.077000        | 34.69             | 27.32           | 0.1             | 10.1       | 21.31        | 56.0        | 18.68       | 46.0               |
| 2.287500        | 30.79             | 26.37           | 0.1             | 10.1       | 25.21        | 56.0        | 19.63       | 46.0               |
| 16.138500       | 33.88             | 22.31           | 0.2             | 10.2       | 26.12        | 60.0        | 27.69       | 50.0               |
| 18.267000       | 32.90             | 22.94           | 0.2             | 10.2       | 27.10        | 60.0        | 27.06       | 50.0               |

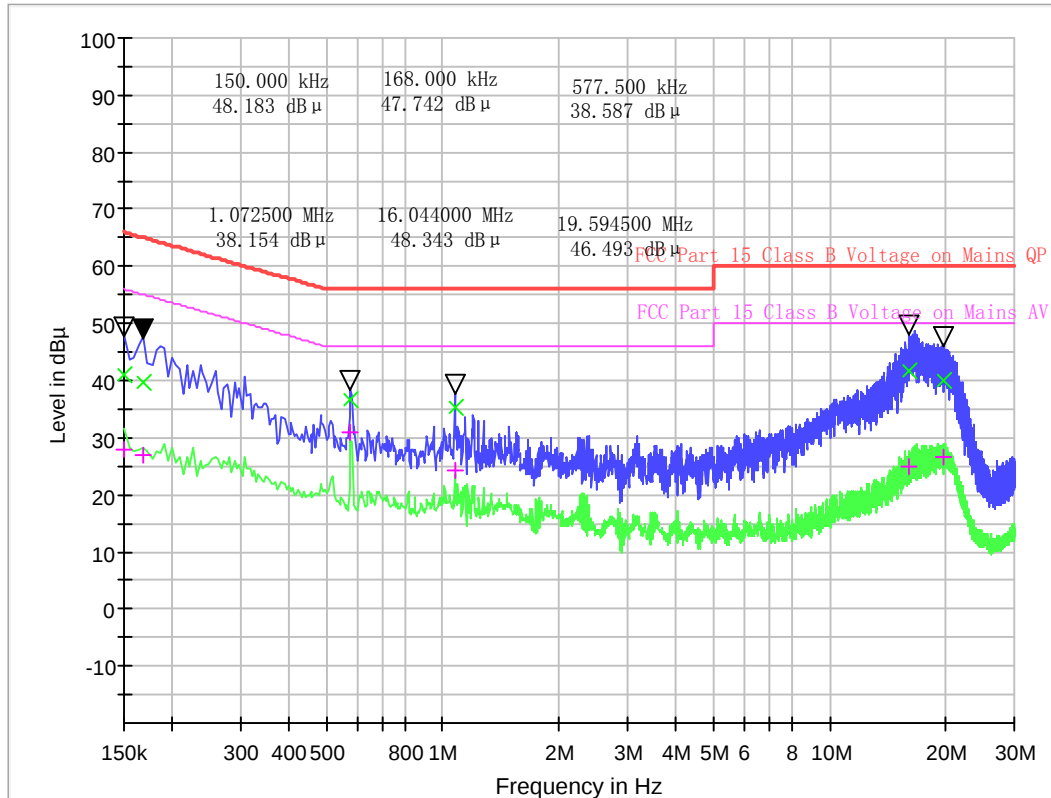

(Plot B:N Phase)

| Frequency (MHz) | QuasiPeak (dB μ V) | CAverage (dB μ V) | Cabel Loss (dB) | Corr. (dB) | Margin - QPK | Limit - QPK | Margin - AV | Limit - AV (dB μ V) |
|-----------------|--------------------|-------------------|-----------------|------------|--------------|-------------|-------------|---------------------|
| 0.150000        | 40.90              | 27.83             | 0.1             | 10.1       | 25.10        | 66.0        | 28.17       | 56.0                |
| 0.168000        | 39.79              | 27.04             | 0.1             | 10.1       | 25.27        | 65.1        | 28.02       | 55.1                |
| 0.577500        | 36.59              | 31.02             | 0.1             | 10.1       | 19.41        | 56.0        | 14.98       | 46.0                |
| 1.072500        | 35.22              | 24.11             | 0.1             | 10.1       | 20.78        | 56.0        | 21.89       | 46.0                |
| 16.044000       | 41.63              | 25.08             | 0.2             | 10.2       | 18.37        | 60.0        | 24.92       | 50.0                |
| 19.594500       | 39.94              | 26.62             | 0.2             | 10.2       | 20.06        | 60.0        | 23.38       | 50.0                |

**Test Result: PASS**

**Note: Correction factor=Cabel loss+ attenuation factor**  
**attenuation factor=10dB**

## 2.6 Radiated Emission

### 2.6.1 Requirement

According to FCC section 15.225(e), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Field Strength ( $\text{dB}\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|---------------------------------------------|--------------------------|
| 0.009 - 0.490   | $2400/F(\text{kHz})$               | $20\log(2400/F(\text{KHz}))+80$             | 300                      |
| 0.490 - 1.705   | $24000/F(\text{kHz})$              | $20\log(24000/F(\text{KHz}))+40$            | 30                       |
| 1.705 - 30.0    | 30                                 | $20\log(30)+40$                             | 30                       |
| 30 - 88         | 100                                | 40.0                                        | 3                        |
| 88 - 216        | 150                                | 43.5                                        | 3                        |
| 216 - 960       | 200                                | 46.0                                        | 3                        |
| Above 960       | 500                                | 54.0                                        | 3                        |

Note:


The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10:2013. The specification used was the FCC Part Subpart C limits.

## 2.6.2 Test Description

(1) For radiated emissions from 9kHz to 30MHz

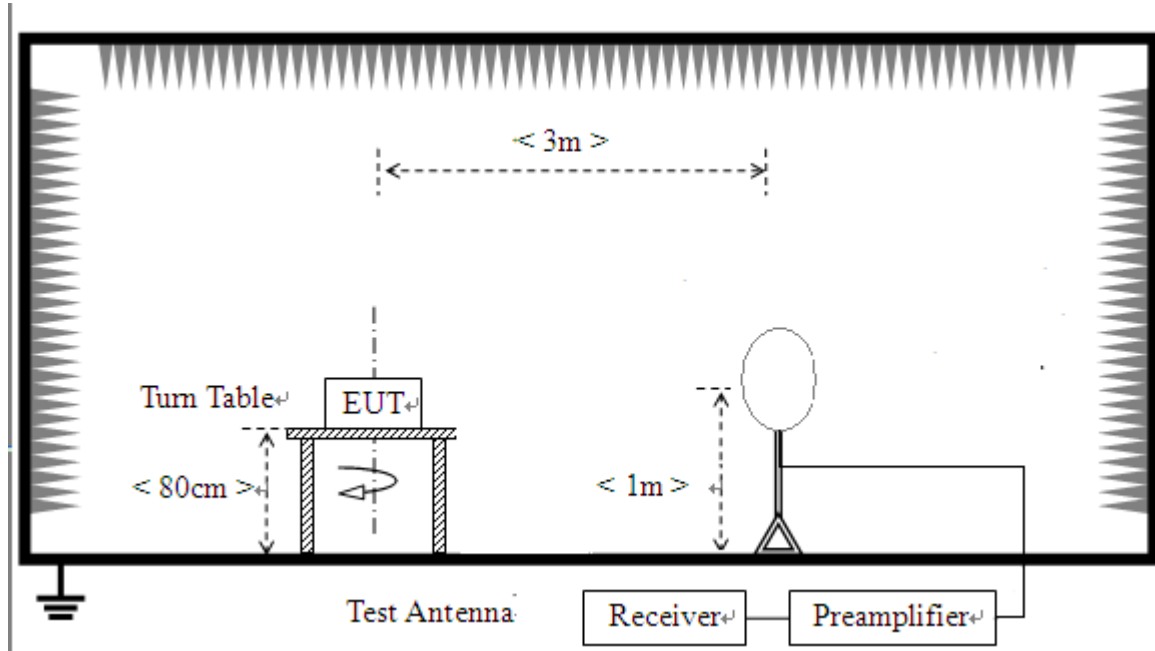

(2) For radiated emissions from 30MHz to 1GHz

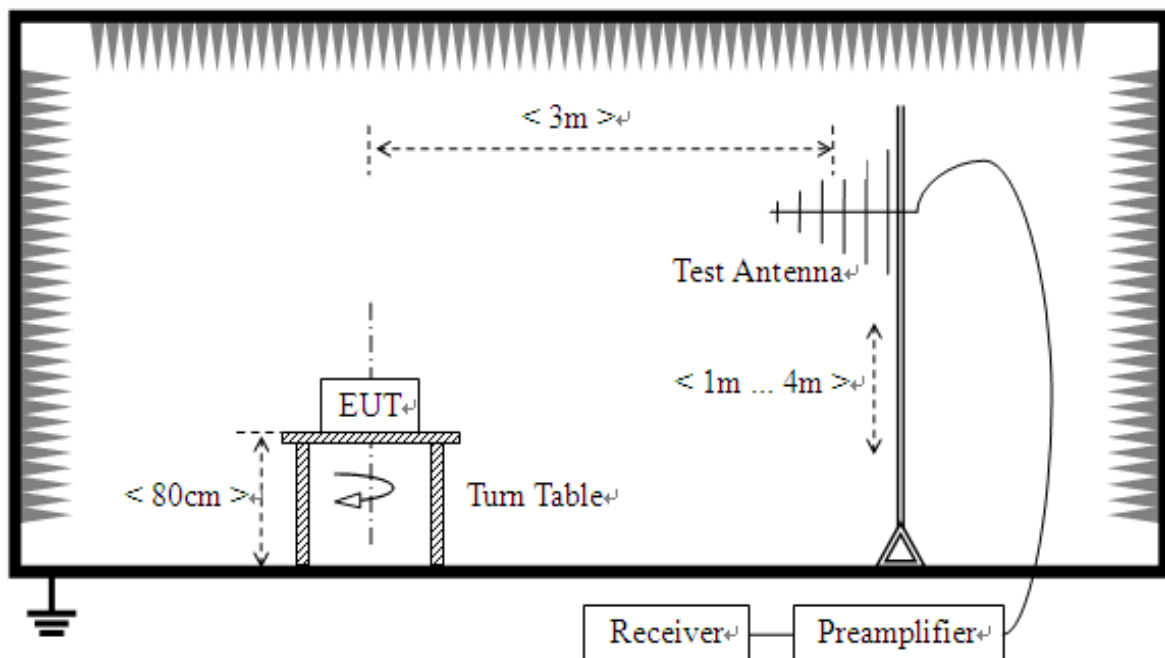

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10:2013. The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

For the Test Antenna:

(a) In the frequency range of 9 kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz). Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

#### A. Equipments List:

| Description           | Manufacturer | Model     | Serial No. | Cal. Date  | Due Date   |
|-----------------------|--------------|-----------|------------|------------|------------|
| EMI Test Receiver     | R&S          | ESIB26    | A0304218   | 2021.01.04 | 2022.01.03 |
| Test Antenna - Bi-Log | Schwarzbeck  | VULB 9160 | A0805560   | 2019.05.24 | 2022.05.23 |
| Passive Loop Antenna  | R&S          | HFH2-Z2   | 100047     | 2019.04.26 | 2022.04.25 |

### 2.6.3 Test Result

According to ANSI C63.10:2013 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

$L_{\text{Cable loss}}$ : Cable loss

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.


The radiated frequency ranges from 9 kHz to 1 GHz.

Test plots for the whole measurement frequency range:

#### For 9 kHz to 30 MHz


Test Mode: Continuous Transmitting

### Test Graph

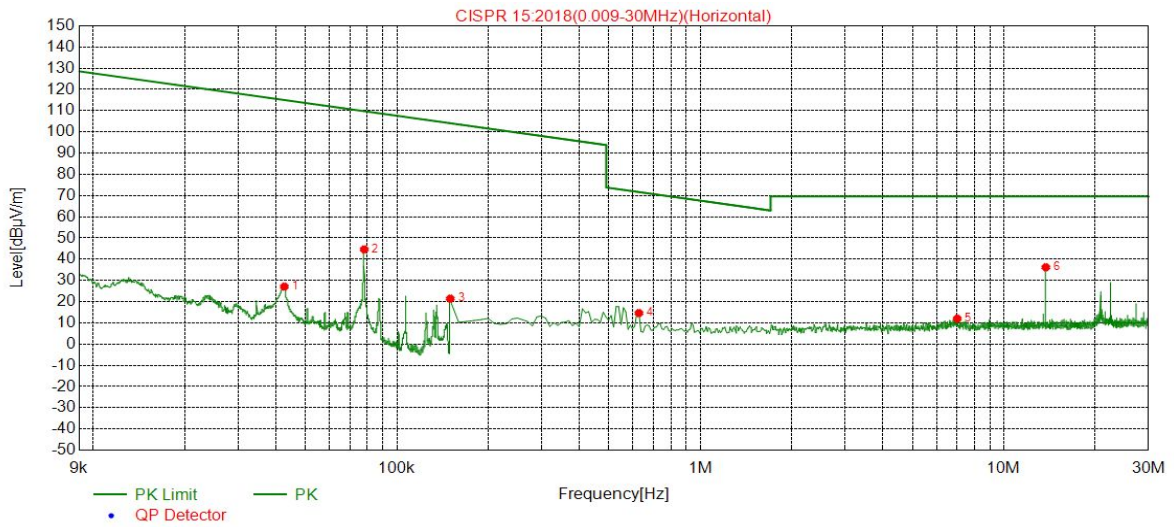

### Suspected List


| NO. | Freq.<br>[MHz] | Level<br>[dBμV/<br>m] | Factor<br>[dB] | Limit<br>[dBμV/m] | Margin<br>[dB] | Trace | Height<br>[cm] | Angle<br>[°] | Polarity   |
|-----|----------------|-----------------------|----------------|-------------------|----------------|-------|----------------|--------------|------------|
| 1   | 0.0426         | 27.08                 | -29.90         | 115.01            | 87.93          | PK    | 100            | 170          | Horizontal |
| 2   | 0.0781         | 44.63                 | -29.95         | 109.76            | 65.13          | PK    | 100            | 220          | Horizontal |
| 3   | 0.1500         | 21.44                 | -29.75         | 104.08            | 82.64          | PK    | 100            | 130          | Horizontal |
| 4   | 0.6278         | 14.63                 | -29.56         | 71.65             | 57.02          | PK    | 100            | 180          | Horizontal |
| 5   | 7.0277         | 12.00                 | -29.05         | 69.54             | 57.54          | PK    | 100            | 350          | Horizontal |
| 6   | 13.756         | 36.20                 | -28.22         | 69.54             | 33.34          | PK    | 100            | 80           | Horizontal |

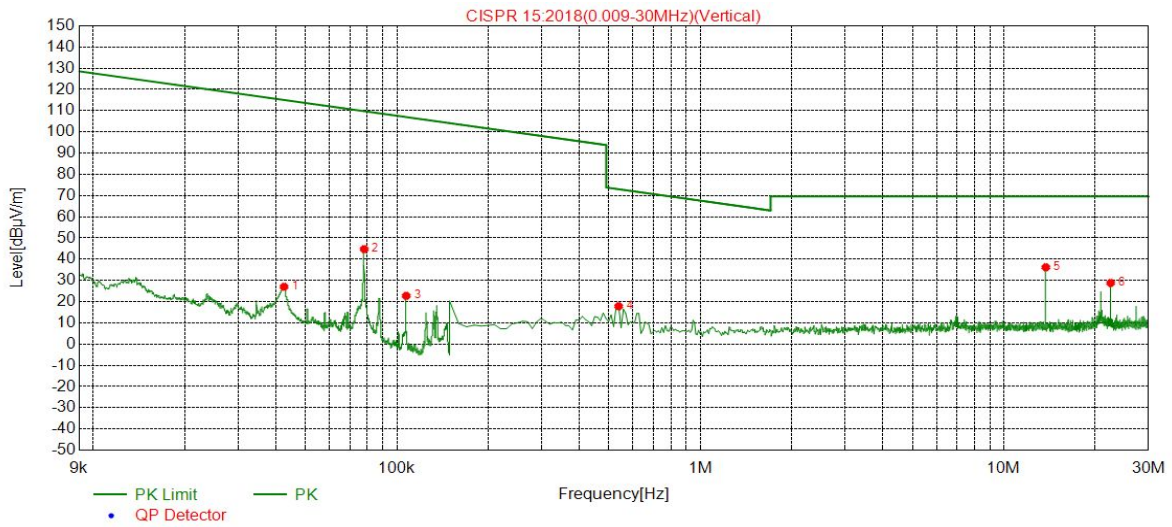

### Suspected List


| NO. | Freq.<br>[MHz] | Level<br>[dBμV/<br>m] | Factor<br>[dB] | Limit<br>[dBμV/m] | Margin<br>[dB] | Trace | Height<br>[cm] | Angle<br>[°] | Polarity |
|-----|----------------|-----------------------|----------------|-------------------|----------------|-------|----------------|--------------|----------|
| 1   | 0.0425         | 27.01                 | -29.90         | 115.03            | 88.02          | PK    | 100            | 280          | Vertical |
| 2   | 0.0781         | 44.73                 | -29.95         | 109.76            | 65.03          | PK    | 100            | 280          | Vertical |
| 3   | 0.1074         | 22.74                 | -30.13         | 106.99            | 84.25          | PK    | 100            | 180          | Vertical |
| 4   | 0.5382         | 17.84                 | -29.58         | 72.99             | 55.15          | PK    | 100            | 180          | Vertical |
| 5   | 13.756         | 36.21                 | -28.22         | 69.54             | 33.33          | PK    | 100            | 240          | Vertical |
| 6   | 22.505         | 28.80                 | -28.39         | 69.54             | 40.74          | PK    | 100            | 240          | Vertical |

# For 30MHz to 1000 MHz

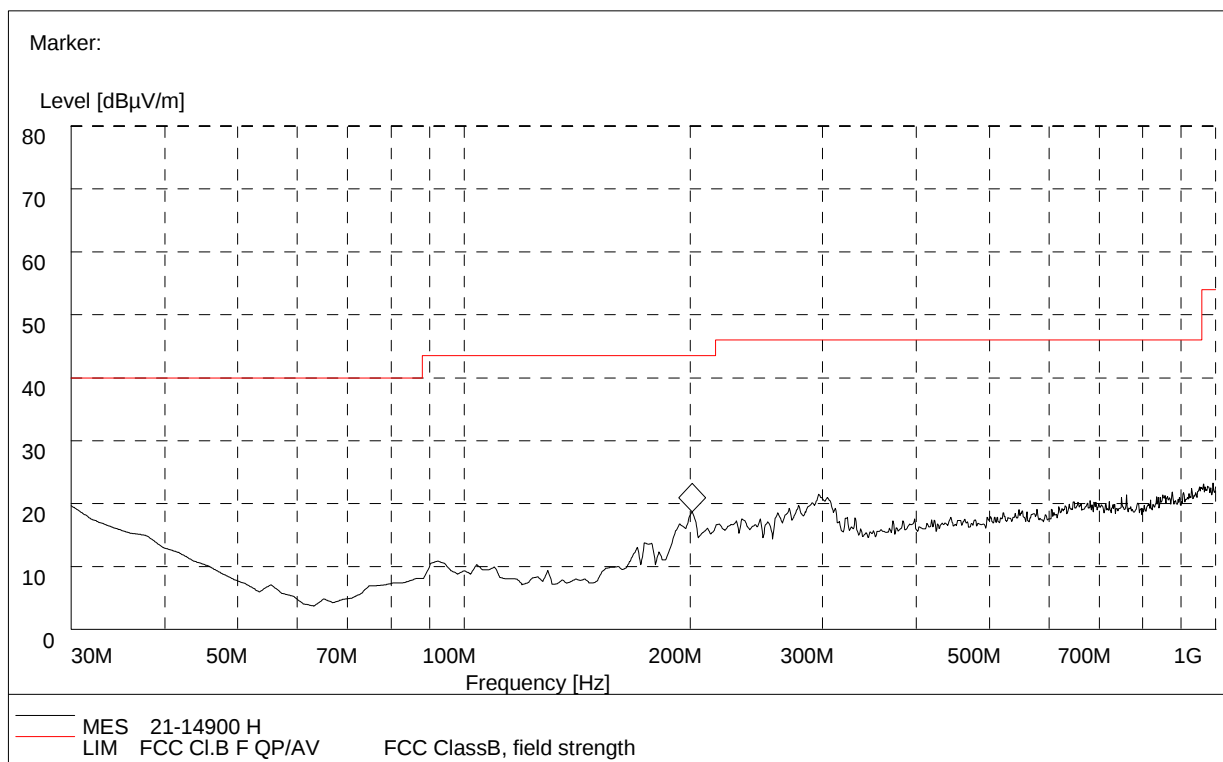

(Plot A: 30MHz to 1GHz, Antenna Horizontal)

| Frequency (MHz) | QuasiPeak (dB $\mu$ V/m) | Bandwidth (kHz) | Antenna height (cm) | Correction Factor (dB) | Limit (dB $\mu$ V/m) | Margin | Antenna    | Verdict |
|-----------------|--------------------------|-----------------|---------------------|------------------------|----------------------|--------|------------|---------|
| 30.000000       | 18.68                    | 120.000         | 100.0               | 17.9                   | 40.0                 | 21.32  | Horizontal | Pass    |
| 55.020000       | 7.10                     | 120.000         | 100.0               | 12.3                   | 40.0                 | 32.9   | Horizontal | Pass    |
| 92.240000       | 10.05                    | 120.000         | 100.0               | 11.8                   | 43.5                 | 33.45  | Horizontal | Pass    |
| 201.080000      | 18.20                    | 120.000         | 100.0               | 17.5                   | 43.5                 | 25.3   | Horizontal | Pass    |
| 234.100000      | 16.85                    | 120.000         | 100.0               | 24.8                   | 46.0                 | 29.15  | Horizontal | Pass    |
| 296.310000      | 21.50                    | 120.000         | 100.0               | 24.8                   | 46.0                 | 24.5   | Horizontal | Pass    |

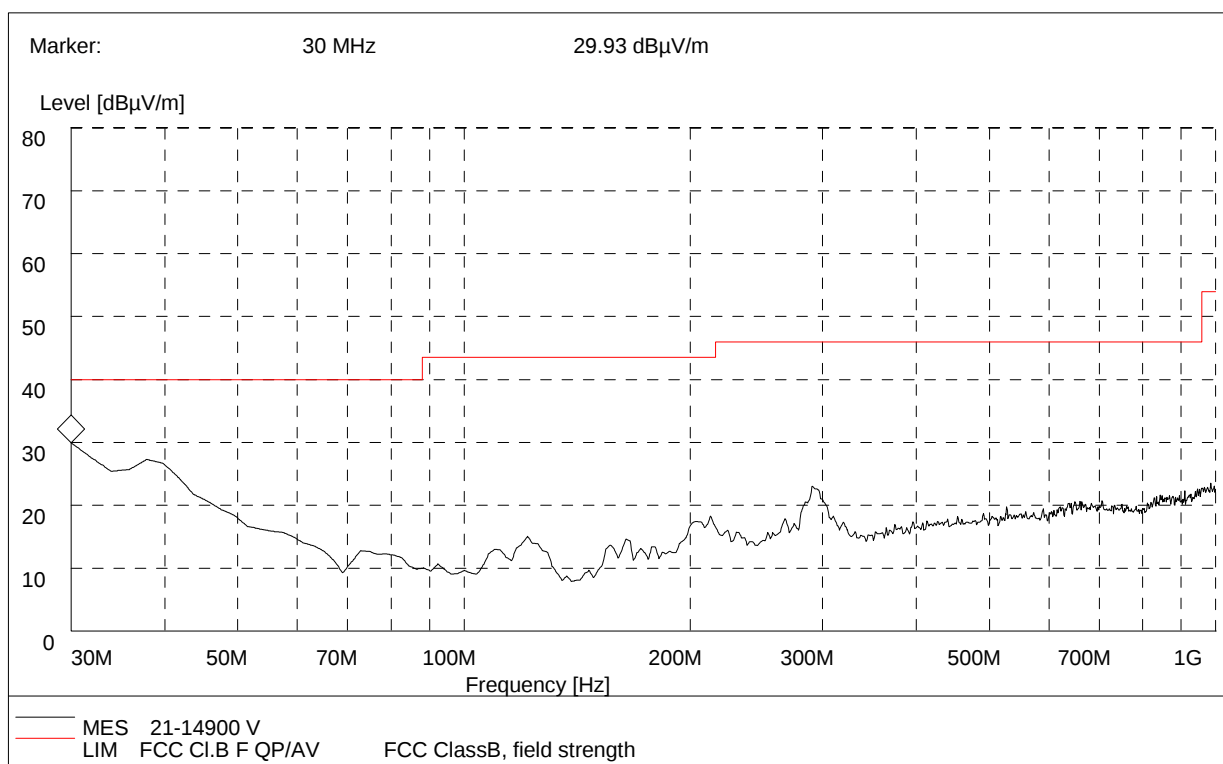

(Plot B: 30MHz to 1GHz, Antenna Vertical)

| Frequency (MHz) | QuasiPeak (dB $\mu$ V/m) | Bandwidth (kHz) | Antenna height (cm) | Correction Factor (dB) | Limit (dB $\mu$ V/m) | Margin | Antenna  | Verdict |
|-----------------|--------------------------|-----------------|---------------------|------------------------|----------------------|--------|----------|---------|
| 30.000000       | 28.93                    | 120.000         | 100.0               | 17.9                   | 40.0                 | 11.07  | Vertical | Pass    |
| 36.860000       | 27.05                    | 120.000         | 100.0               | 13.7                   | 40.0                 | 12.95  | Vertical | Pass    |
| 121.350000      | 14.95                    | 120.000         | 100.0               | 12.9                   | 43.5                 | 28.55  | Vertical | Pass    |
| 201.080000      | 17.05                    | 120.000         | 100.0               | 17.5                   | 43.5                 | 26.45  | Vertical | Pass    |
| 289.830000      | 22.73                    | 120.000         | 100.0               | 24.8                   | 46.0                 | 23.27  | Vertical | Pass    |
| 521.080000      | 18.63                    | 120.000         | 100.0               | 24.8                   | 46.0                 | 27.37  | Vertical | Pass    |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. Margin value = Limit value - Emission Level
4. The other emission levels were very low against the limit.

\*\* END OF REPORT \*\*