



FCC RADIO TEST REPORT

Applicant : Ubiquiti Networks, Inc.

Address : 685 Third Avenue, 27th Floor New York,
New York 10017 USA

Equipment : AMPLIFI INSTANT

Model No. : AFi-INS-R, AFi-INS-R-G

Trade Name : AMPLIFI

FCC ID. : SWX-AFIR

I HEREBY CERTIFY THAT :

The sample was received on Aug. 03, 2017 and the testing was carried out on Jul. 20, 2018 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Assistant Manager

Tested by:

Spree Yei / Engineer

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 The Difference of Model No.	6
2.3 Carrier Frequency of Channels.....	7
2.4 Test Mode and Test Software	8
2.5 Description of Test System.....	9
2.6 General Information of Test.....	10
2.7 Measurement Uncertainty	10
3. Test Equipment and Ancillaries Used for Tests	11
4. Antenna Requirements.....	13
4.1 Standard Applicable	13
4.2 Antenna Construction and Directional Gain.....	13
5. Test of AC Power Line Conducted Emission	14
5.1 Test Limit	14
5.2 Test Procedures	14
5.3 Typical Test Setup	15
5.4 Test Result and Data.....	16
5.5 Test Photographs	18
6. Test of Radiated Spurious Emission.....	19
6.1 Test Limit	19
6.2 Test Procedures	19
6.3 Typical Test Setup	20
6.4 Test Result and Data (9KHz ~ 30MHz)	21
6.5 Test Result and Data (30MHz ~ 1GHz).....	21
6.6 Test Result and Data (1GHz ~ 25GHz).....	23
6.7 Restricted Bands of Operation	47
6.8 Test Photographs (30MHz ~ 1GHz)	48
6.9 Test Photographs (1GHz ~ 25GHz)	49
7. Test of Conducted Spurious Emission	50
7.1 Test Limit	50
7.2 Test Procedure	50
7.3 Test Setup Layout	50
7.4 Test Result and Data.....	50
8. 6dB & 99% Bandwidth Measurement Data	67
8.1 Test Limit	67
8.2 Test Procedures	67
8.3 Test Setup Layout	67
8.4 Test Result and Data (6dB Bandwidth)	67
8.5 Test Result and Data (99% Bandwidth)	68
9. Maximum Peak and Average Output Power.....	77



9.1	Test Limit	77
9.2	Test Procedures	77
9.3	Test Setup Layout	77
9.4	Test Result and Data	77
10.	Power Spectral Density	79
10.1	Test Limit	79
10.2	Test Procedures	79
10.3	Test Setup Layout	79
10.4	Test Result and Data	79
11.	Radio Frequency Exposure	84
11.1	Applicable Standards	84
11.2	EUT Specification	84
11.3	Test Results	85
11.4	Calculation	85
11.5	Maximum Permissible Exposure	86

History of this test report

[illegible]



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.4:2014

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

KDB558074

KDB662911

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. AC Power Line Conducted Emission	Pass
15.209 15.205	. Radiated Spurious Emission	Pass
15.247(d)	. Conducted Spurious Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak and Average Output Power	Pass
15.247(e)	. Power Spectral Density	Pass

This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Modulation Type	DSSS, OFDM, FHSS, GFSK, $\pi/4$ -DQPSK, 8DPSK
Frequency Range	802.11b/g/n: 2412-2462MHz 802.11a/an/ac: 5150-5250MHz, 5725-5850MHz Bluetooth: 2402-2480MHz BLE: 2402-2480MHz
Data Rate	WLAN: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0 – MCS9, VHT 20/40/80 Bluetooth: GFSK: 1Mbit/s $\pi/4$ -DQPSK: 2Mbit/s 8DPSK: 3Mbit/s BLE: GFSK: 1Mbit/s
Antenna Type	Internal Antenna
Antenna Gain	2.4G: ANT A/B: 3.0dBi 5G: ANT A/B: 4.0dBi Bluetooth: ANT A: 1.0dBi BLE: ANT A: 1.0dBi

2.2 The Difference of Model No.

The differences between all model numbers as below:

Model No.	Remark
AFi-INS-R	The difference between the two model numbers is color. The gain, pattern, circuit design and layout between of both model numbers are the same.
AFi-INS-R-G	



2.3 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40 (2422MHz~2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.4 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included remote workstation and EUT for RF test. The remote workstation included Notebook.
- c. An executive program, "RTL819x 3.0-2014.0930" under WIN 7 was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)
caused "Test Mode 3" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)
caused "Test Mode 3" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)



2.5 Description of Test System

<For conduction & radiation test (below 1GHz) Test>

Device	Manufacturer	Model No.	Description
Remote workstation			
Notebook	DELL	LatitudeE5450/5450	Power Cable, Unshielding, 1.8m

Use Cable:

Cable	Quantity	Description
Network	1	Unshielding, 15m

<For radiation test (above 1GHz) & Others Test>

Device	Manufacturer	Model No.	Description
Remote workstation			
Notebook	DELL	INSPIRON 510m	Power Cable, Unshielding, 1.8m

Use Cable:

Cable	Quantity	Description
Network	1	Unshielding, 15m



2.6 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-4399, R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

2.7 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±5.007dB
Radiated Spurious Emission(30MHz~1GHz)	±5.157dB
Radiated Spurious Emission(1GHz~18GHz)	±6.383dB
Radiated Spurious Emission(18GHz~40GHz)	±6.648dB
Conducted Spurious Emission	±1.253dB
6dB Bandwidth	±6.89%
Power Spectral Density	±0.630dB
26 dB Occupied Bandwidth	±6.10%
Frequency Stability	±375KHz
Channel Frequencies Separation	±6.10%
20dB Bandwidth	±6.12%
Dwell Time	±1.34%
Peak Output Power(Conducted Power Meter)	±0.86dB
Temperature	±1.2°C
Humidity	±2.7%
Channel Move Time	±4.53%
Channel Closing Transmission Time	±6.61%
Threshold	±0.631dB
Non occupancy period	±1.17%



3. Test Equipment and Ancillaries Used for Tests

<For radiation test (above 1GHz) & Others Test>

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI3	100443	2017/03/07	2018/03/06
LISN	Schwarzbeck	NSLK 8127	8127-740	2016/08/30	2017/08/29
LISN	Schwarzbeck	NSLK 8127	8127-516	2016/09/06	2017/09/05
Pulse Limiter	R&S	ESH3-Z2	101934	2017/02/14	2018/02/13
Bilog Antenna	Schwarzbeck	VULB9168	369	2017/03/15	2018/03/14
Active Loop Antenna	EMCO	6507	40855	2017/05/15	2018/05/14
Horn Antenna	EMCO	3115	31601	2016/09/05	2017/09/04
Horn Antenna	EMCO	3116	31970	2017/03/29	2018/03/28
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200207	2017/03/17	2018/03/16
Preamplifier	EM	EM330	60660	2017/02/25	2018/02/24
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2016/09/13	2017/09/12
Preamplifier	Agilent	8449B	3008A01954	2017/02/09	2018/02/08
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2016/11/04	2017/11/03
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2017/03/17	2018/03/16
Spectrum Analyzer	R&S	FSP40	100219	2016/09/01	2017/08/31
BLUETOOTH TESTER	R&S	CBT	101133	2017/03/10	2018/03/09
Attenuator	KEYSIGHT	8491B	MY39250703	2017/03/07	2018/03/06
Rotary Attenuator	Agilent	8495B	MY42146680	2017/03/13	2018/03/12
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2016/09/05	2017/09/04
Series Power Meter	Anritsu	ML2495A	1224005	2017/03/01	2018/02/28
Power Sensor	Anritsu	MA2411B	1207295	2017/03/01	2018/02/28
Cable	HUBER SUHNER	SUCOFLEX 102	28422/2	2017/02/25	2018/02/24
Cable	HUBER SUHNER	SUCOFLEX 102	28418/2	2017/02/25	2018/02/24
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	v2.0.0.1	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



<For conduction & radiation test (below 1GHz) Test>

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI3	100821	2017/09/08	2018/09/07
LISN	Schwarzbeck	NSLK 8127	8127-568	2018/02/26	2019/02/25
Pulse Limiter	R&S	ESH3-Z2	101934	2018/02/22	2019/02/21
Bilog Antenna	Schwarzbeck	VULB9168	275	2017/08/31	2018/08/30
Active Loop Antenna	EMCO	6507	40855	2018/05/22	2019/05/21
Horn Antenna	EMCO	3115	31601	2017/09/11	2018/09/10
Horn Antenna	EMCO	3116	31970	2018/03/23	2019/03/22
Preamplifier	EM	EM330	60658	2017/09/08	2018/09/07
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2017/09/20	2018/09/19
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2017/11/10	2018/11/09
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2018/04/10	2019/04/09
Spectrum Analyzer	R&S	FSP40	100219	2018/07/03	2019/07/02
BLUETOOTH TESTER	R&S	CBT	101133	2018/04/02	2019/04/01
Attenuator	KEYSIGHT	8491B	MY39250705	2017/09/04	2018/09/03
Rotary Attenuator	Agilent	8495B	MY42146680	2018/03/29	2019/03/28
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2017/09/04	2018/09/03
Series Power Meter	Anritsu	ML2495A	1224005	2018/03/23	2019/03/22
Power Sensor	Anritsu	MA2411B	1207295	2018/03/23	2019/03/22
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	V3.0.0.0	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Internal Antenna
Antenna Gain	2.4G: ANT A/B: 3.0dBi, 5G: ANT A/B: 4.0dBi

2412-2462MHz

For Power directional gain= $G_{ant}= 3.0 \text{ dBi}$

For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$
= 6.01 (dBi)

5150MHz-5250MHz

For Power directional gain= $G_{ant}= 4.00 \text{ dBi}$

For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$
= 7.01 (dBi)

5725MHz -5850MHz

For Power directional gain= $G_{ant}= 4.00 \text{ dBi}$

For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$
= 7.01 (dBi)



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

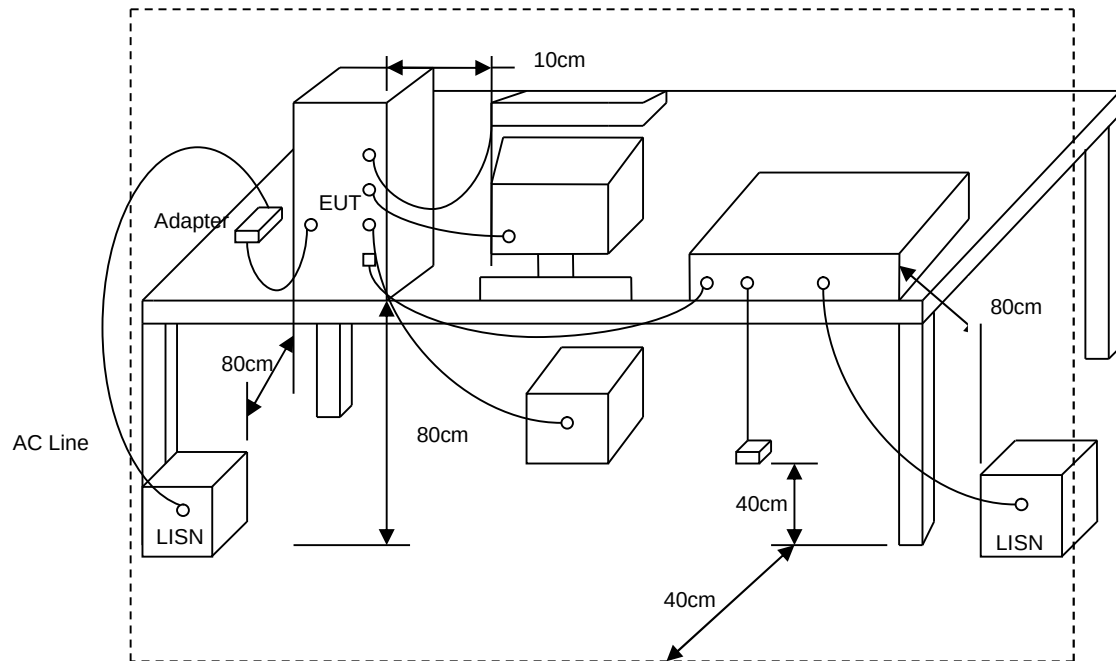



5.4 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 3	Temperature	: 20 °C
Test date	: Jul. 20, 2018	Humidity	: 40 %

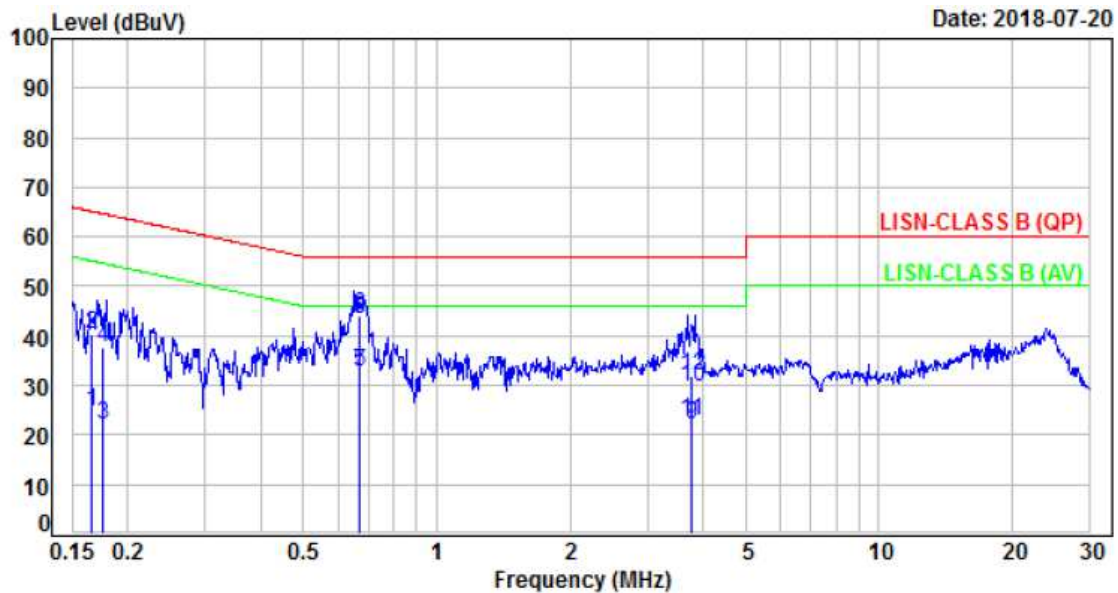

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.17	9.94	14.69	24.63	55.17	-30.54	Average	P
2	0.17	9.94	30.36	40.30	65.17	-24.87	QP	P
3	0.18	9.94	12.07	22.01	54.67	-32.66	Average	P
4	0.18	9.94	27.54	37.48	64.67	-27.19	QP	P
5	0.67	9.97	22.73	32.70	46.00	-13.30	Average	P
6	0.67	9.97	34.02	43.99	56.00	-12.01	QP	P
7	0.67	9.97	22.70	32.67	46.00	-13.33	Average	P
8	0.67	9.97	33.49	43.46	56.00	-12.54	QP	P
9	3.76	10.12	11.93	22.05	46.00	-23.95	Average	P
10	3.76	10.12	19.72	29.84	56.00	-26.16	QP	P
11	3.77	10.12	12.67	22.79	46.00	-23.21	Average	P
12	3.77	10.12	21.68	31.80	56.00	-24.20	QP	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 3	Temperature	: 20 °C
Test date	: Jul. 20, 2018	Humidity	: 40 %

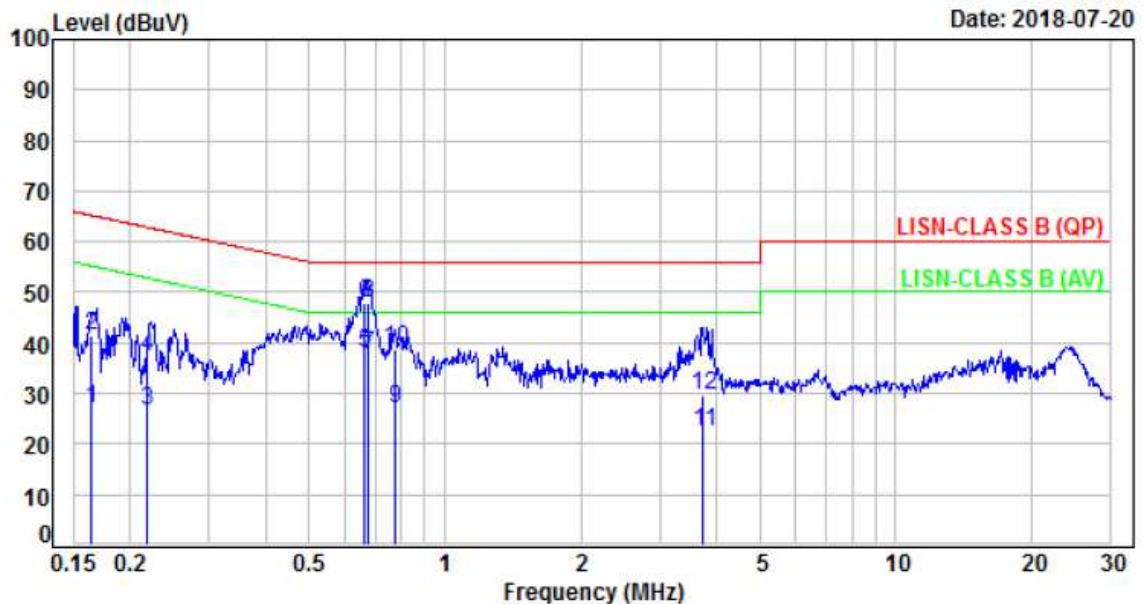

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.94	17.17	27.11	55.23	-28.12	Average	P
2	0.16	9.94	31.34	41.28	65.23	-23.95	QP	P
3	0.22	9.94	16.64	26.58	52.86	-26.28	Average	P
4	0.22	9.94	27.30	37.24	62.86	-25.62	QP	P
5	0.66	9.97	28.20	38.17	46.00	-7.83	Average	P
6	0.66	9.97	37.85	47.82	56.00	-8.18	QP	P
7	0.67	9.97	27.67	37.64	46.00	-8.36	Average	P
8	0.67	9.97	37.81	47.78	56.00	-8.22	QP	P
9	0.77	9.97	16.97	26.94	46.00	-19.06	Average	P
10	0.77	9.97	28.91	38.88	56.00	-17.12	QP	P
11	3.75	10.12	12.16	22.28	46.00	-23.72	Average	P
12	3.75	10.12	19.68	29.80	56.00	-26.20	QP	P

Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




6.3 Typical Test Setup


Below 30MHz test setup

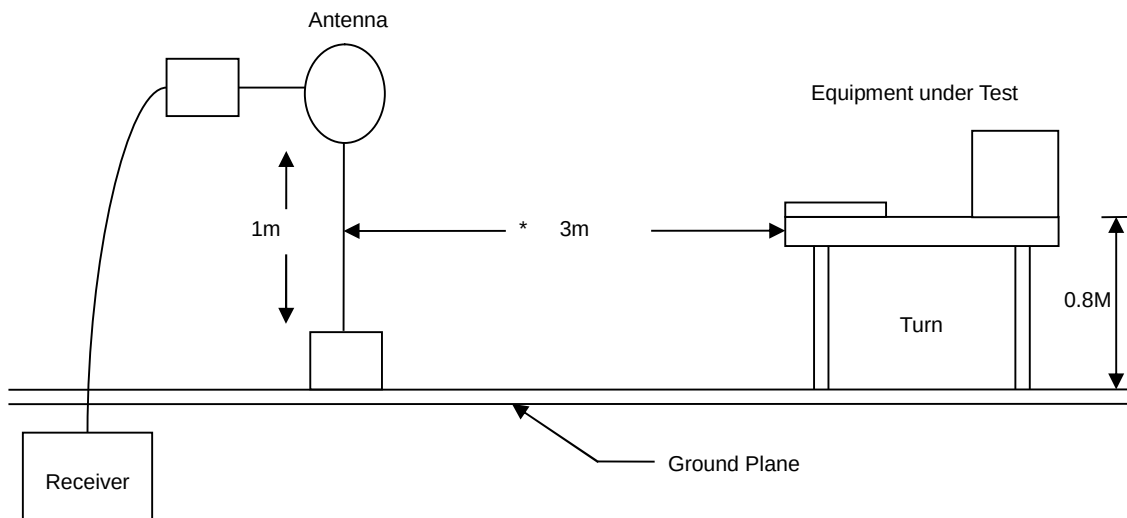

30MHz- 1GHz Test Setup

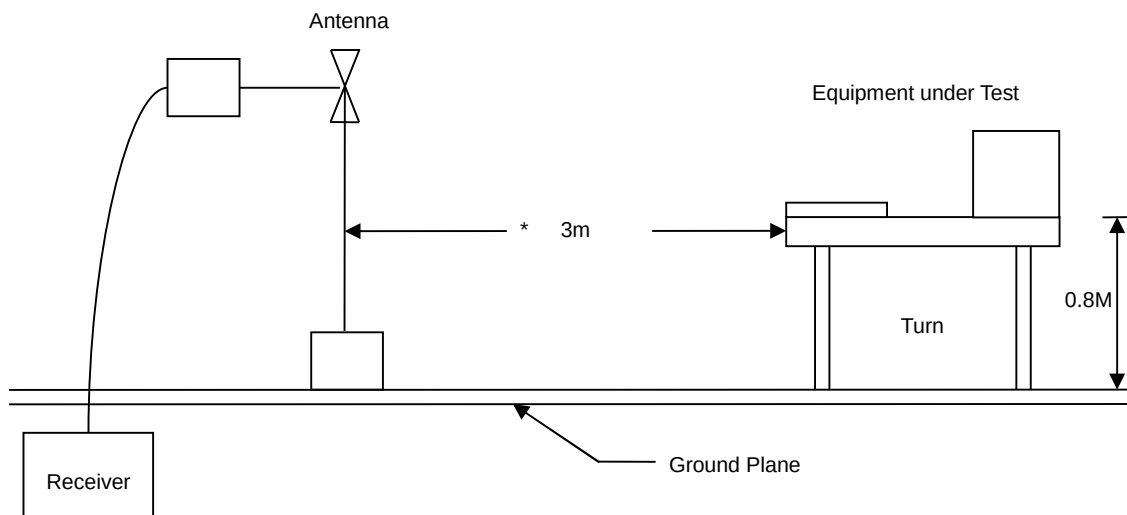

Above 1GHz Test Setup

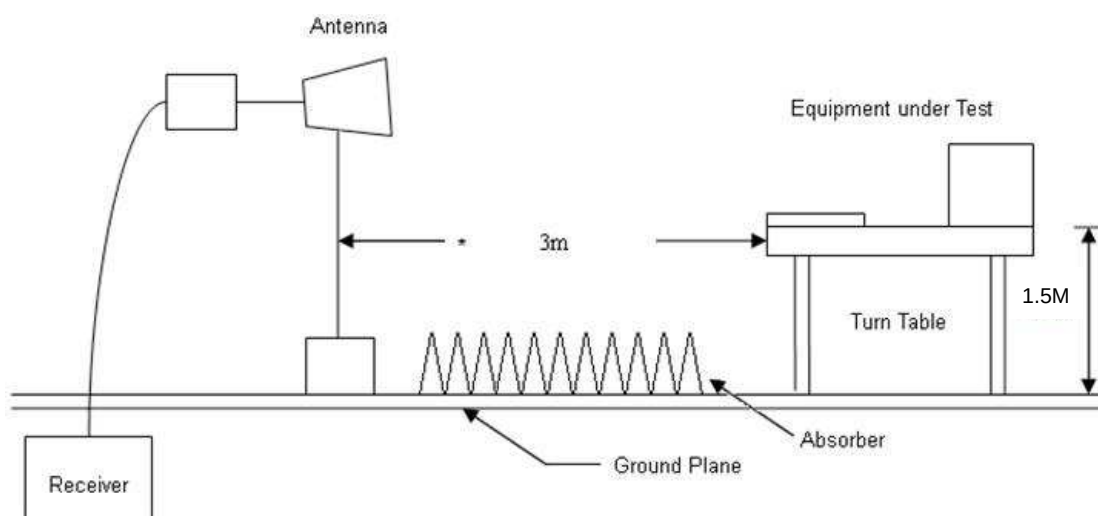




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 23 °C
Test Date	: Jul. 27, 2018	Humidity	: 62 %

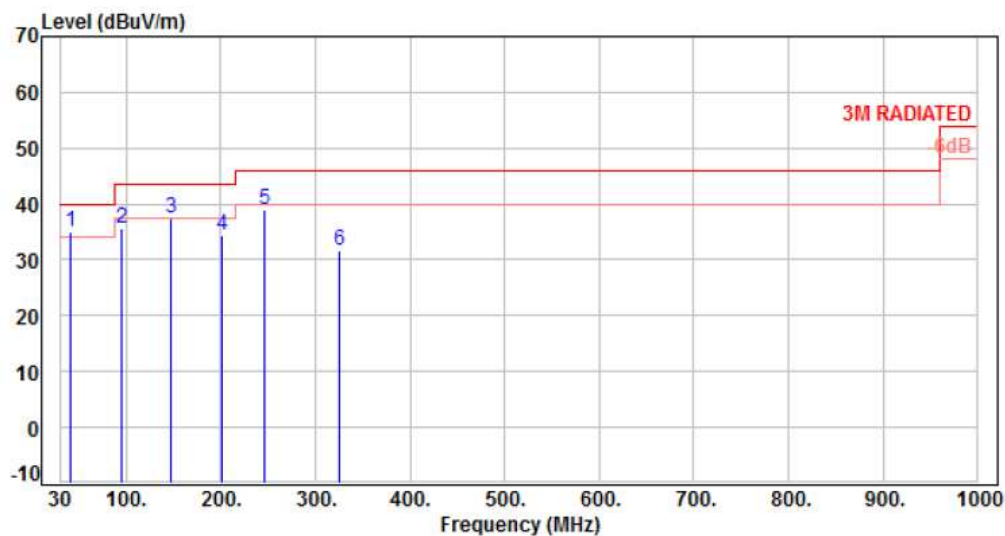

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	40.67	-11.07	46.19	35.12	40.00	-4.88	Peak	400	0	P
2	94.99	-16.31	51.92	35.61	43.50	-7.89	Peak	400	0	P
3	147.37	-11.14	48.46	37.32	43.50	-6.18	Peak	400	0	P
4	200.72	-13.03	47.58	34.55	43.50	-8.95	Peak	400	0	P
5	246.31	-11.69	50.61	38.92	46.00	-7.08	Peak	400	0	P
6	324.88	-9.22	40.90	31.68	46.00	-14.32	Peak	400	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 23 °C
Test Date	: Jul. 27, 2018	Humidity	: 62 %

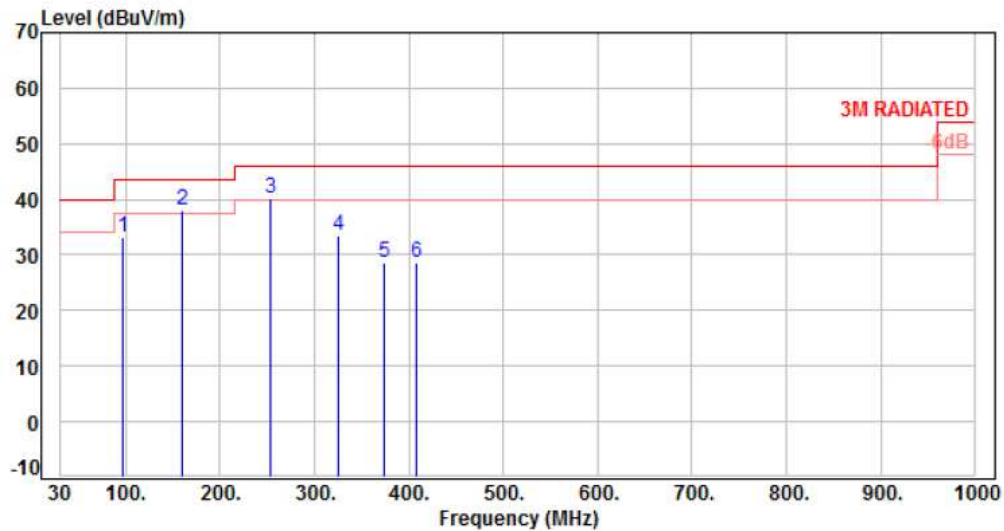

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	96.93	-16.15	49.32	33.17	43.50	-10.33	Peak	100	0	P
2	159.98	-10.84	48.91	38.07	43.50	-5.43	Peak	100	0	P
3	254.07	-11.54	51.67	40.13	46.00	-5.87	Peak	100	0	P
4	324.88	-9.22	42.72	33.50	46.00	-12.50	Peak	100	0	P
5	374.35	-7.86	36.54	28.68	46.00	-17.32	Peak	100	0	P
6	407.33	-6.91	35.68	28.77	46.00	-17.23	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

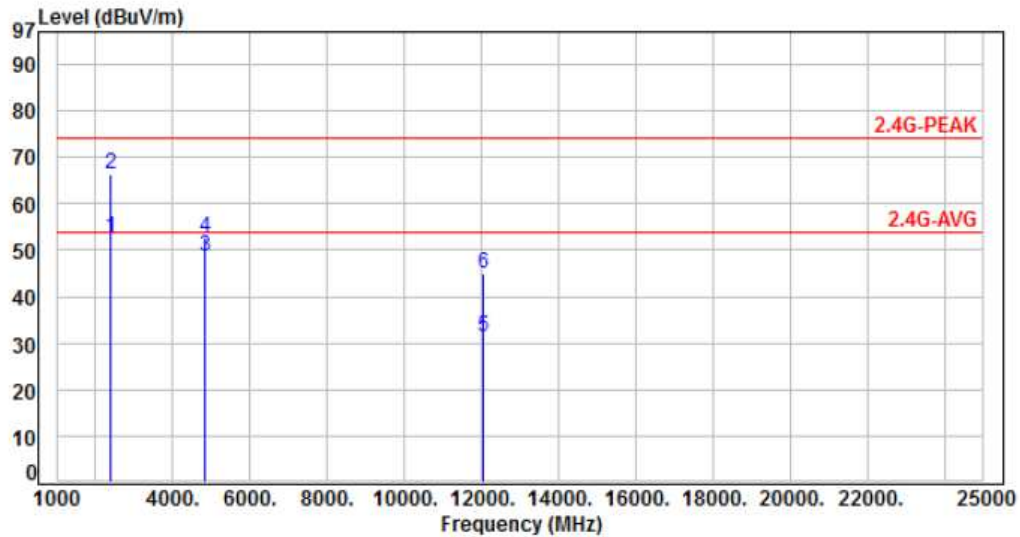

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	71.66	52.63	54.00	-1.37	Average	274	34	P
2	2390.00	-19.03	85.49	66.46	74.00	-7.54	Peak	274	34	P
3	4824.00	-13.33	62.06	48.73	54.00	-5.27	Average	247	120	P
4	4824.00	-13.33	66.09	52.76	74.00	-21.24	Peak	247	120	P
5	12060.00	-6.06	37.27	31.21	54.00	-22.79	Average	100	193	P
6	12060.00	-6.06	50.92	44.86	74.00	-29.14	Peak	100	193	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

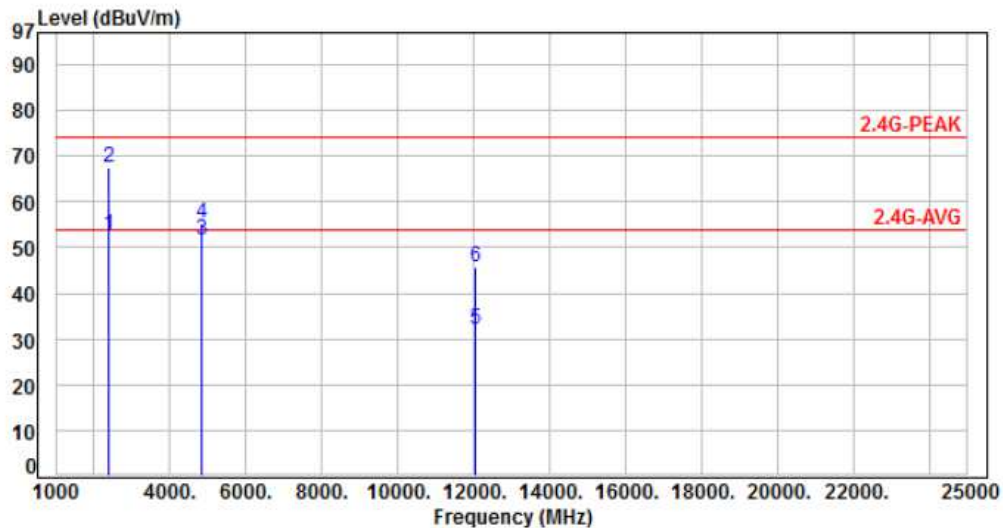

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	71.77	52.74	54.00	-1.26	Average	320	284	P
2	2390.00	-19.03	86.66	67.63	74.00	-6.37	Peak	320	284	P
3	4824.00	-13.33	65.13	51.80	54.00	-2.20	Average	262	358	P
4	4824.00	-13.33	68.57	55.24	74.00	-18.76	Peak	262	358	P
5	12060.00	-6.06	38.29	32.23	54.00	-21.77	Average	100	314	P
6	12060.00	-6.06	51.78	45.72	74.00	-28.28	Peak	100	314	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH06	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

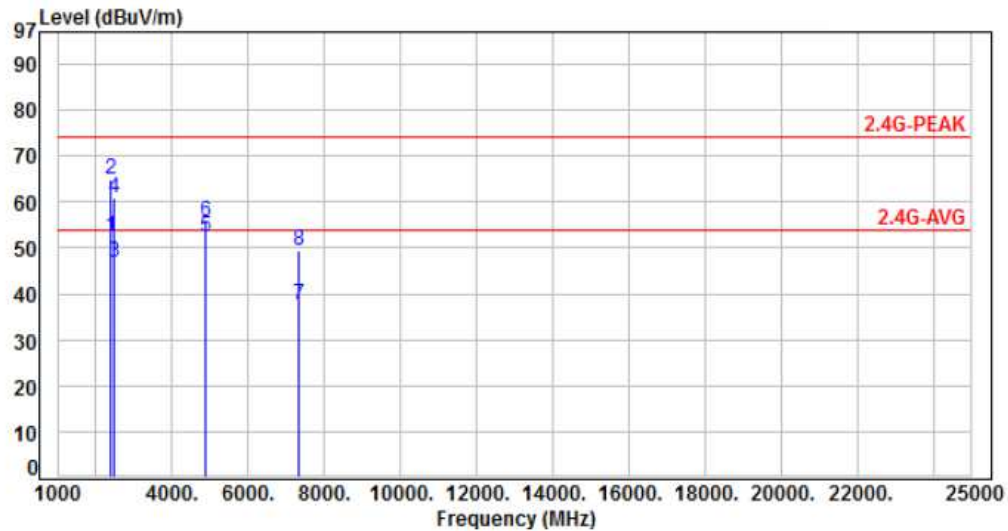

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	71.39	52.36	54.00	-1.64	Average	232	307	P
2	2390.00	-19.03	84.10	65.07	74.00	-8.93	Peak	232	307	P
3	2483.50	-18.81	65.52	46.71	54.00	-7.29	Average	230	302	P
4	2483.50	-18.81	79.58	60.77	74.00	-13.23	Peak	230	302	P
5	4874.00	-13.24	65.51	52.27	54.00	-1.73	Average	290	108	P
6	4874.00	-13.24	68.81	55.57	74.00	-18.43	Peak	290	108	P
7	7311.00	-10.19	47.67	37.48	54.00	-16.52	Average	100	316	P
8	7311.00	-10.19	59.68	49.49	74.00	-24.51	Peak	100	316	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH06	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

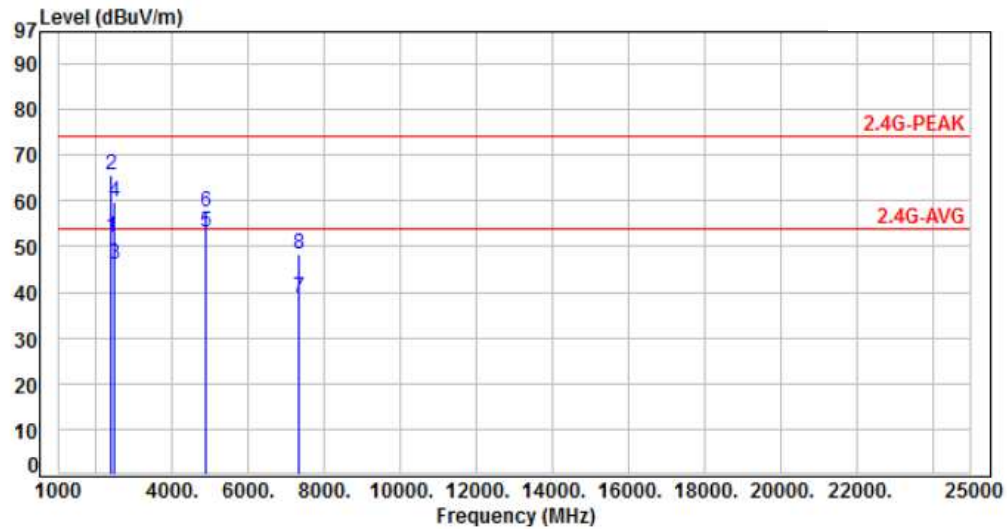

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	71.09	52.06	54.00	-1.94	Average	349	285	P
2	2390.00	-19.03	84.78	65.75	74.00	-8.25	Peak	349	285	P
3	2483.50	-18.81	64.93	46.12	54.00	-7.88	Average	268	306	P
4	2483.50	-18.81	78.73	59.92	74.00	-14.08	Peak	268	306	P
5	4874.00	-13.24	66.23	52.99	54.00	-1.01	Average	225	349	P
6	4874.00	-13.24	70.84	57.60	74.00	-16.40	Peak	225	349	P
7	7311.00	-10.19	48.81	38.62	54.00	-15.38	Average	100	282	P
8	7311.00	-10.19	58.40	48.21	74.00	-25.79	Peak	100	282	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH11	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

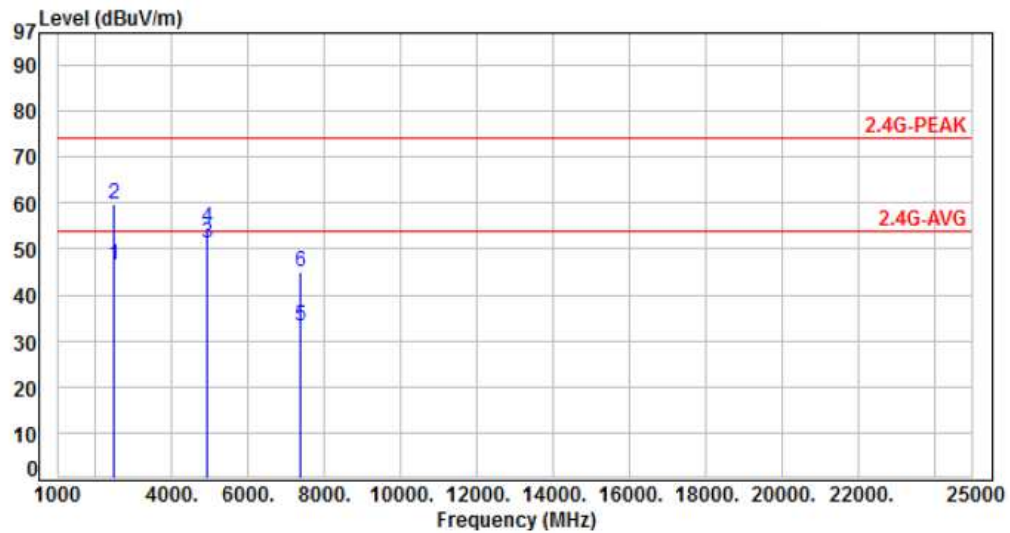

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.81	65.40	46.59	54.00	-7.41	Average	327	294	P
2	2483.50	-18.81	78.60	59.79	74.00	-14.21	Peak	327	294	P
3	4924.00	-13.14	64.36	51.22	54.00	-2.78	Average	252	119	P
4	4924.00	-13.14	67.76	54.62	74.00	-19.38	Peak	252	119	P
5	7386.00	-10.01	43.15	33.14	54.00	-20.86	Average	100	147	P
6	7386.00	-10.01	54.83	44.82	74.00	-29.18	Peak	100	147	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH11	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

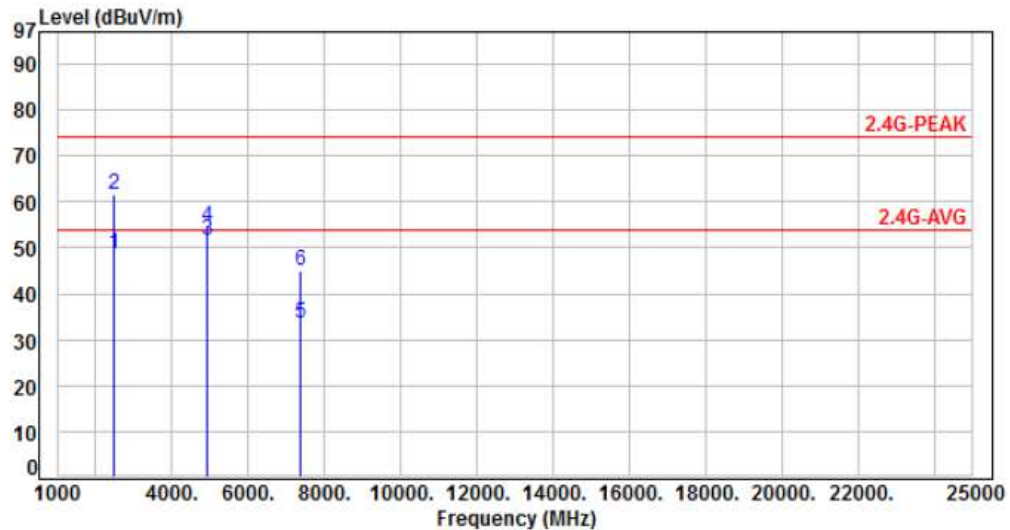

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.81	67.49	48.68	54.00	-5.32	Average	386	160	P
2	2483.50	-18.81	80.33	61.52	74.00	-12.48	Peak	386	160	P
3	4924.00	-13.14	64.71	51.57	54.00	-2.43	Average	216	358	P
4	4924.00	-13.14	67.81	54.67	74.00	-19.33	Peak	216	358	P
5	7386.00	-10.01	43.68	33.67	54.00	-20.33	Average	289	210	P
6	7386.00	-10.01	55.17	45.16	74.00	-28.84	Peak	289	210	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH01	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

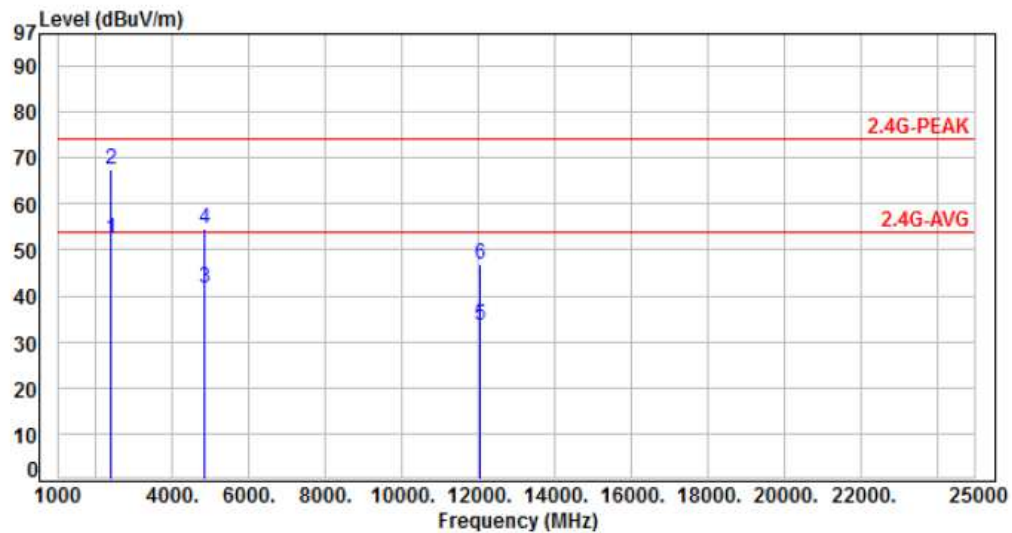

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	71.41	52.38	54.00	-1.62	Average	100	207	P
2	2390.00	-19.03	86.64	67.61	74.00	-6.39	Peak	100	207	P
3	4824.00	-13.33	54.86	41.53	54.00	-12.47	Average	254	128	P
4	4824.00	-13.33	67.82	54.49	74.00	-19.51	Peak	254	128	P
5	12060.00	-6.06	39.48	33.42	54.00	-20.58	Average	100	194	P
6	12060.00	-6.06	52.78	46.72	74.00	-27.28	Peak	100	194	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH01	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

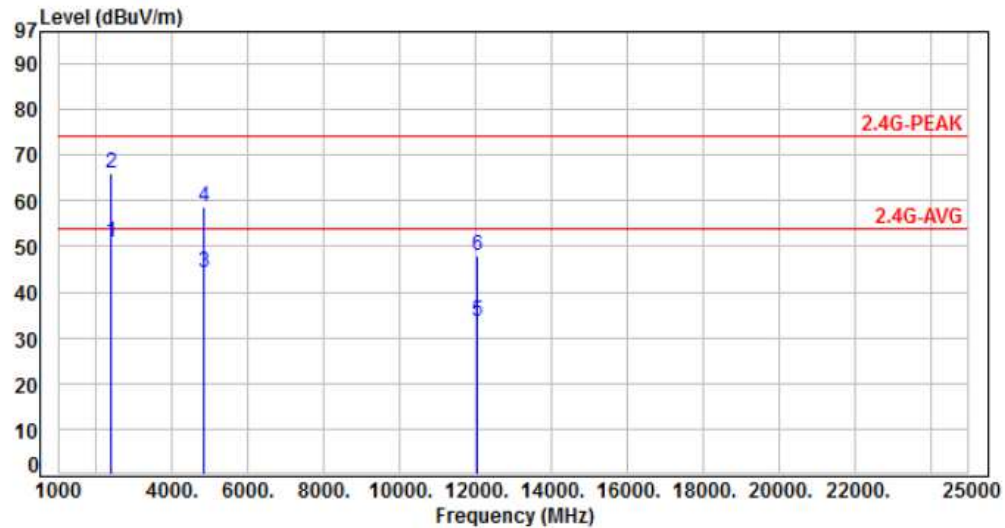

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	69.94	50.91	54.00	-3.09	Average	100	250	P
2	2390.00	-19.03	85.15	66.12	74.00	-7.88	Peak	100	250	P
3	4824.00	-13.33	57.66	44.33	54.00	-9.67	Average	213	359	P
4	4824.00	-13.33	71.84	58.51	74.00	-15.49	Peak	213	359	P
5	12060.00	-6.06	39.73	33.67	54.00	-20.33	Average	102	321	P
6	12060.00	-6.06	53.92	47.86	74.00	-26.14	Peak	102	321	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH06	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

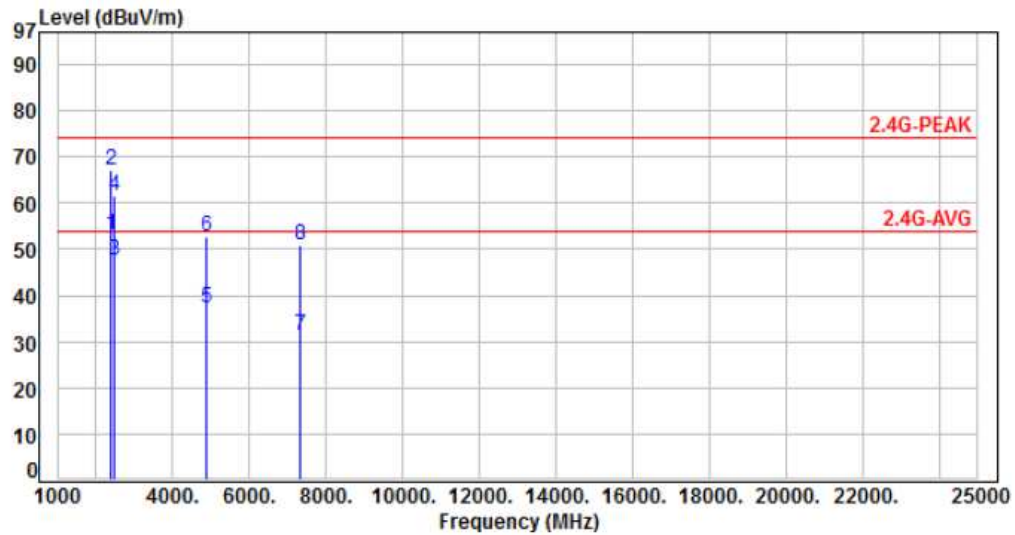

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	72.06	53.03	54.00	-0.97	Average	242	360	P
2	2390.00	-19.03	86.13	67.10	74.00	-6.90	Peak	242	360	P
3	2483.50	-18.81	66.44	47.63	54.00	-6.37	Average	286	359	P
4	2483.50	-18.81	80.27	61.46	74.00	-12.54	Peak	286	359	P
5	4874.00	-13.24	50.36	37.12	54.00	-16.88	Average	259	121	P
6	4874.00	-13.24	66.13	52.89	74.00	-21.11	Peak	259	121	P
7	7311.00	-10.19	41.68	31.49	54.00	-22.51	Average	100	321	P
8	7311.00	-10.19	60.93	50.74	74.00	-23.26	Peak	100	321	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH06	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

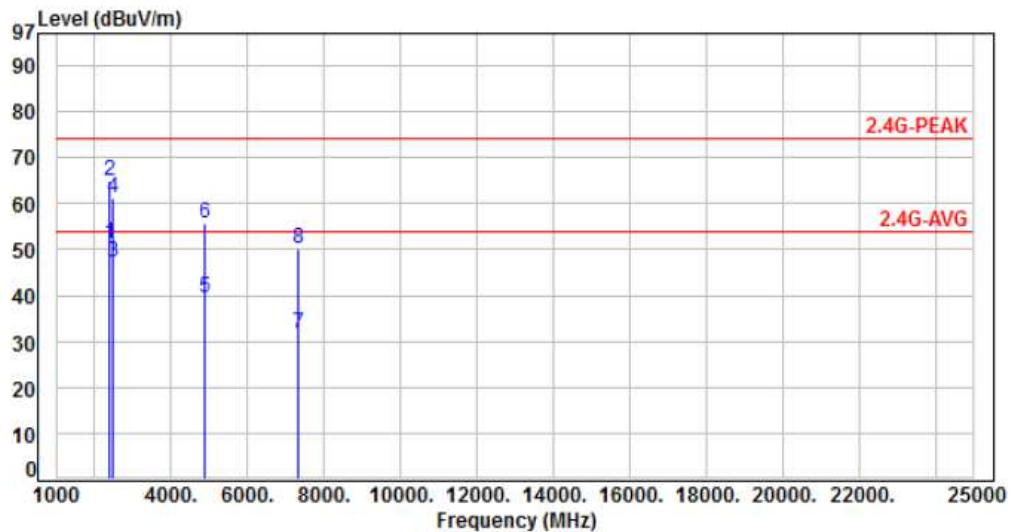

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	70.36	51.33	54.00	-2.67	Average	327	291	P
2	2390.00	-19.03	83.93	64.90	74.00	-9.10	Peak	327	291	P
3	2483.50	-18.81	65.87	47.06	54.00	-6.94	Average	279	290	P
4	2483.50	-18.81	79.89	61.08	74.00	-12.92	Peak	279	290	P
5	4874.00	-13.24	52.76	39.52	54.00	-14.48	Average	226	360	P
6	4874.00	-13.24	68.78	55.54	74.00	-18.46	Peak	226	360	P
7	7311.00	-10.19	41.88	31.69	54.00	-22.31	Average	100	283	P
8	7311.00	-10.19	60.27	50.08	74.00	-23.92	Peak	100	283	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH11	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

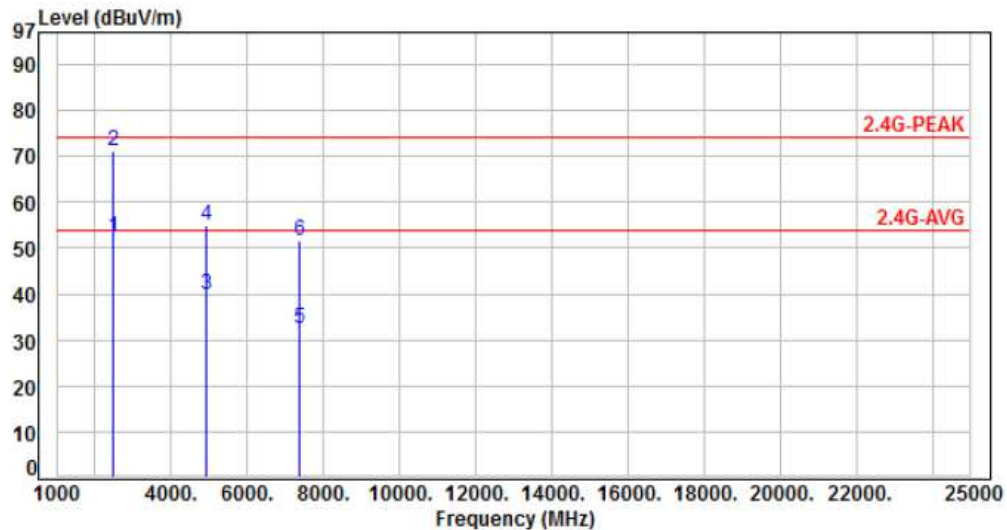

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.81	71.17	52.36	54.00	-1.64	Average	101	210	P
2	2483.50	-18.81	89.94	71.13	74.00	-2.87	Peak	101	210	P
3	4924.00	-13.14	52.84	39.70	54.00	-14.30	Average	258	114	P
4	4924.00	-13.14	67.92	54.78	74.00	-19.22	Peak	258	114	P
5	7386.00	-10.01	42.34	32.33	54.00	-21.67	Average	100	278	P
6	7386.00	-10.01	61.75	51.74	74.00	-22.26	Peak	100	278	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH11	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

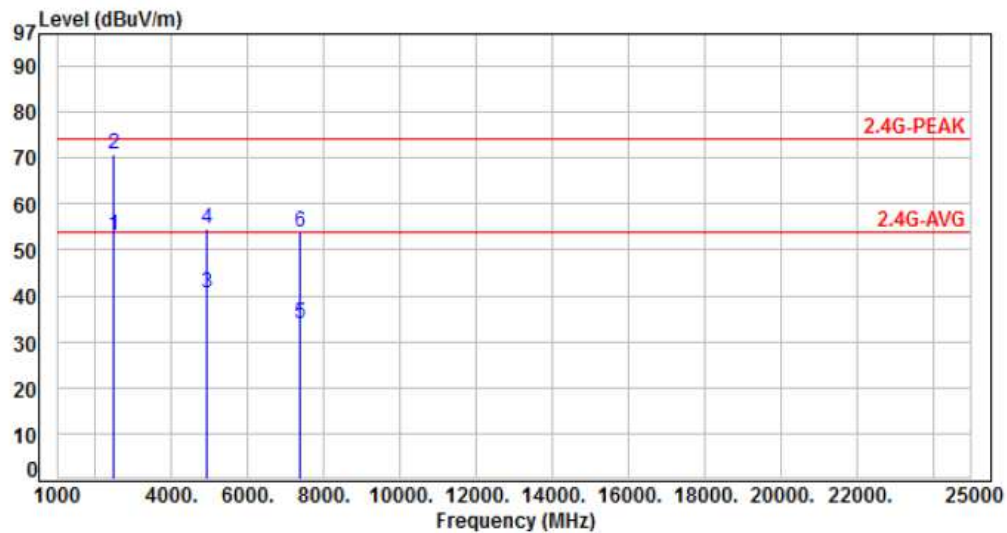

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.81	71.87	53.06	54.00	-0.94	Average	108	249	P
2	2483.50	-18.81	89.68	70.87	74.00	-3.13	Peak	108	249	P
3	4924.00	-13.14	53.73	40.59	54.00	-13.41	Average	214	360	P
4	4924.00	-13.14	67.62	54.48	74.00	-19.52	Peak	214	360	P
5	7386.00	-10.01	43.78	33.77	74.00	-40.23	Peak	207	121	P
6	7386.00	-10.01	63.92	53.91	74.00	-20.09	Peak	207	121	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH01	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

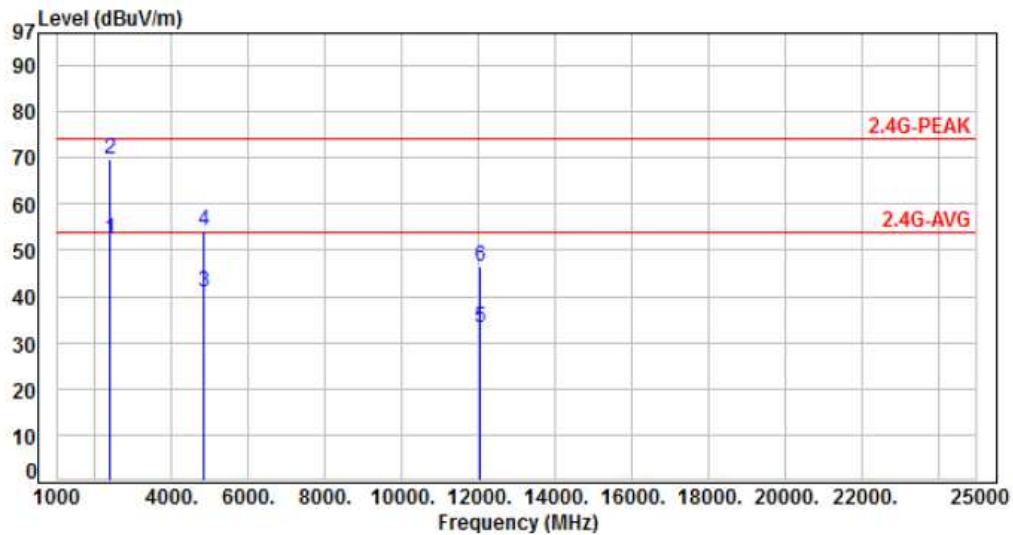

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	71.55	52.52	54.00	-1.48	Average	127	210	P
2	2390.00	-19.03	88.80	69.77	74.00	-4.23	Peak	127	210	P
3	4824.00	-13.33	54.36	41.03	54.00	-12.97	Average	259	292	P
4	4824.00	-13.33	67.65	54.32	74.00	-19.68	Peak	259	292	P
5	12060.00	-6.06	39.34	33.28	54.00	-20.72	Average	103	188	P
6	12060.00	-6.06	52.46	46.40	74.00	-27.60	Peak	103	188	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH01	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

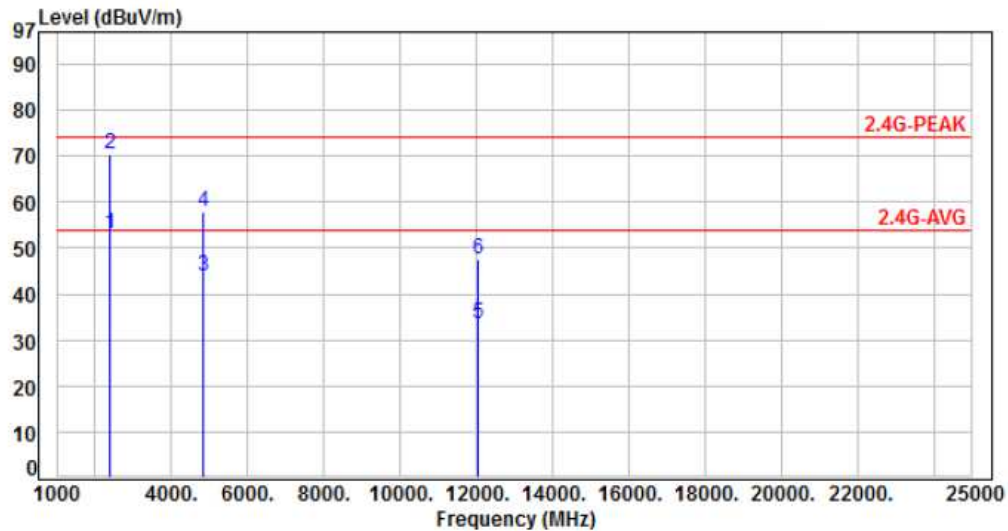

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	72.01	52.98	54.00	-1.02	Average	113	251	P
2	2390.00	-19.03	89.39	70.36	74.00	-3.64	Peak	113	251	P
3	4824.00	-13.33	57.33	44.00	54.00	-10.00	Average	100	211	P
4	4824.00	-13.33	71.30	57.97	74.00	-16.03	Peak	100	211	P
5	12060.00	-6.06	39.51	33.45	54.00	-20.55	Average	100	316	P
6	12060.00	-6.06	53.70	47.64	74.00	-26.36	Peak	100	316	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH06	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

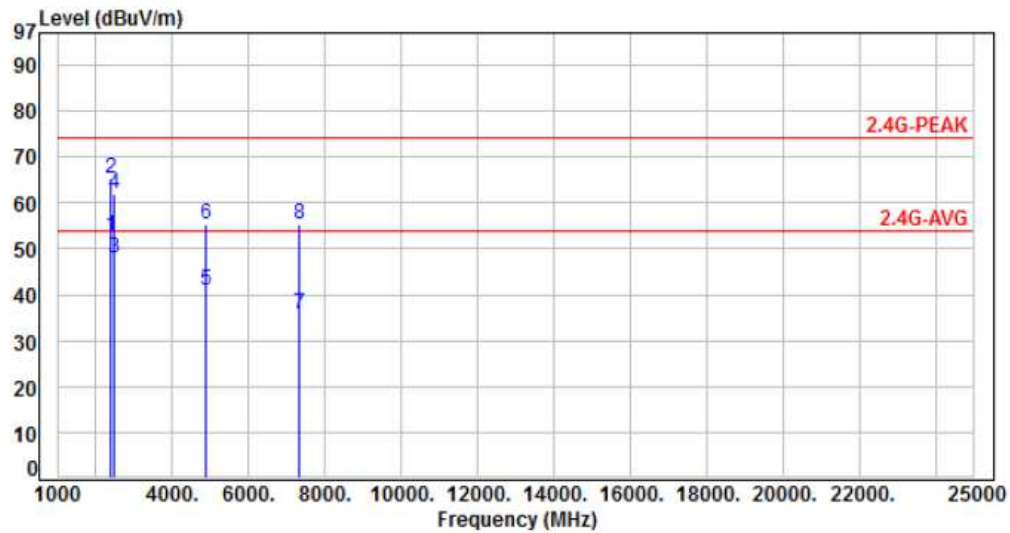

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	71.60	52.57	54.00	-1.43	Average	238	344	P
2	2390.00	-19.03	84.34	65.31	74.00	-8.69	Peak	238	344	P
3	2483.50	-18.81	66.61	47.80	54.00	-6.20	Average	330	355	P
4	2483.50	-18.81	80.95	62.14	74.00	-11.86	Peak	330	355	P
5	4874.00	-13.24	54.21	40.97	54.00	-13.03	Average	292	103	P
6	4874.00	-13.24	68.58	55.34	74.00	-18.66	Peak	292	103	P
7	7311.00	-10.19	45.91	35.72	54.00	-18.28	Average	103	317	P
8	7311.00	-10.19	65.52	55.33	74.00	-18.67	Peak	103	317	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH06	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

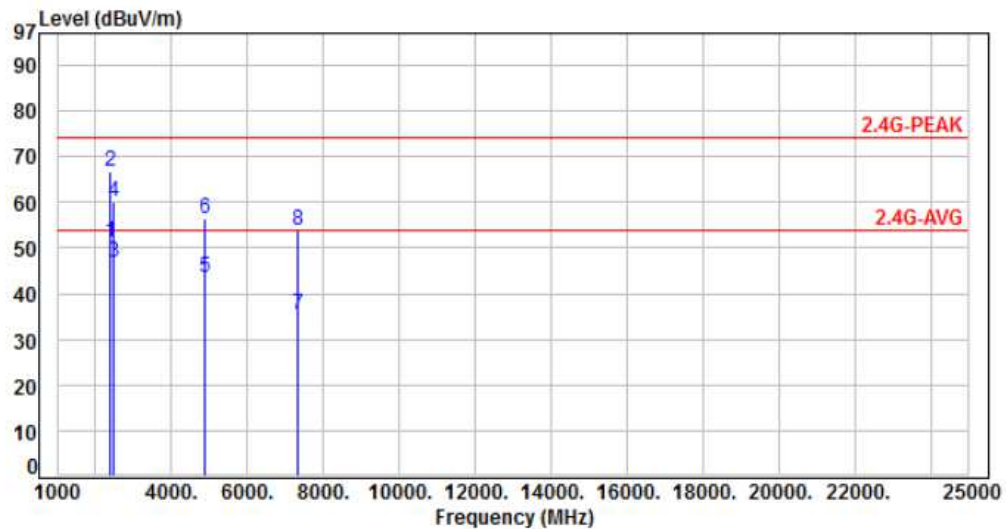

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	70.27	51.24	54.00	-2.76	Average	330	289	P
2	2390.00	-19.03	85.61	66.58	74.00	-7.42	Peak	330	289	P
3	2483.50	-18.81	65.65	46.84	54.00	-7.16	Average	277	300	P
4	2483.50	-18.81	78.86	60.05	74.00	-13.95	Peak	277	300	P
5	4874.00	-13.24	56.81	43.57	54.00	-10.43	Average	189	360	P
6	4874.00	-13.24	69.83	56.59	74.00	-17.41	Peak	189	360	P
7	7311.00	-10.19	45.61	35.42	54.00	-18.58	Average	116	288	P
8	7311.00	-10.19	64.18	53.99	74.00	-20.01	Peak	116	288	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH11	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

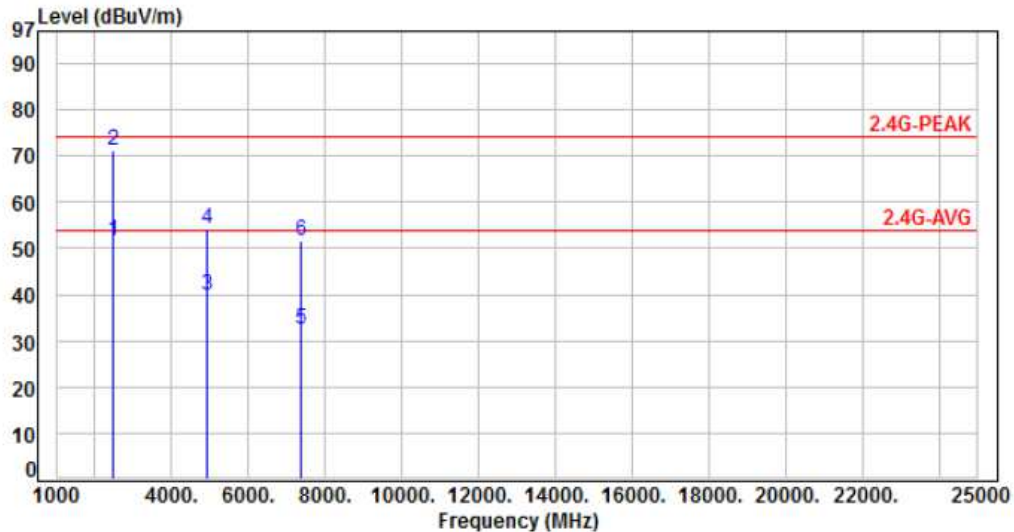

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.81	70.51	51.70	54.00	-2.30	Average	100	213	P
2	2483.50	-18.81	90.09	71.28	74.00	-2.72	Peak	100	213	P
3	4924.00	-13.14	52.91	39.77	54.00	-14.23	Average	293	114	P
4	4924.00	-13.14	67.44	54.30	74.00	-19.70	Peak	293	114	P
5	7386.00	-10.01	42.30	32.29	54.00	-21.71	Average	102	289	P
6	7386.00	-10.01	61.66	51.65	74.00	-22.35	Peak	102	289	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH11	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

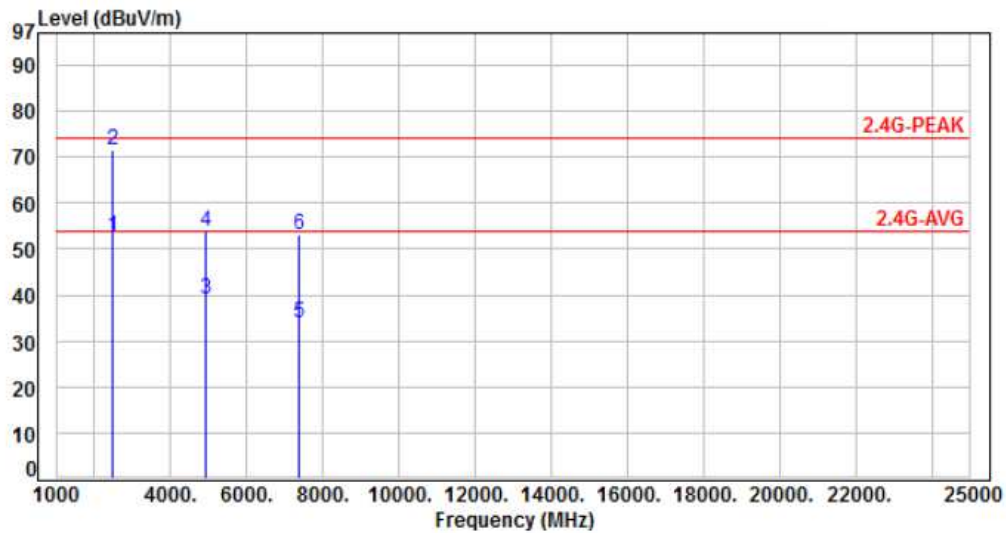

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.81	71.62	52.81	54.00	-1.19	Average	114	249	P
2	2483.50	-18.81	90.22	71.41	74.00	-2.59	Peak	114	249	P
3	4924.00	-13.14	52.06	38.92	54.00	-15.08	Average	192	354	P
4	4924.00	-13.14	66.91	53.77	74.00	-20.23	Peak	192	354	P
5	7386.00	-10.01	43.99	33.98	54.00	-20.02	Average	209	111	P
6	7386.00	-10.01	63.16	53.15	74.00	-20.85	Peak	209	111	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH03	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

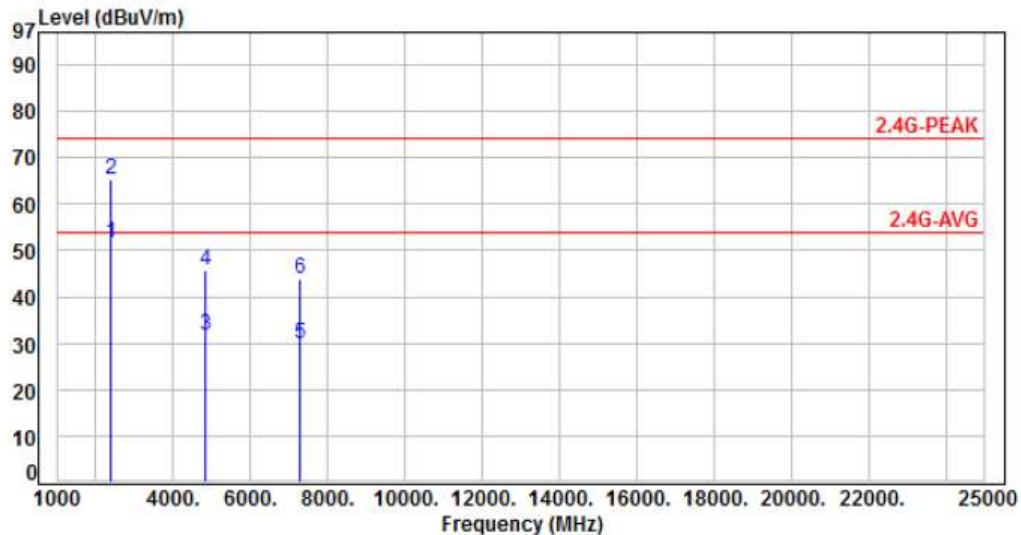

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	70.83	51.80	54.00	-2.20	Average	241	209	P
2	2390.00	-19.03	84.36	65.33	74.00	-8.67	Peak	241	209	P
3	4844.00	-13.29	44.96	31.67	54.00	-22.33	Average	276	108	P
4	4844.00	-13.29	59.16	45.87	74.00	-28.13	Peak	276	108	P
5	7266.00	-10.30	40.31	30.01	54.00	-23.99	Average	100	318	P
6	7266.00	-10.30	54.15	43.85	74.00	-30.15	Peak	100	318	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH03	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

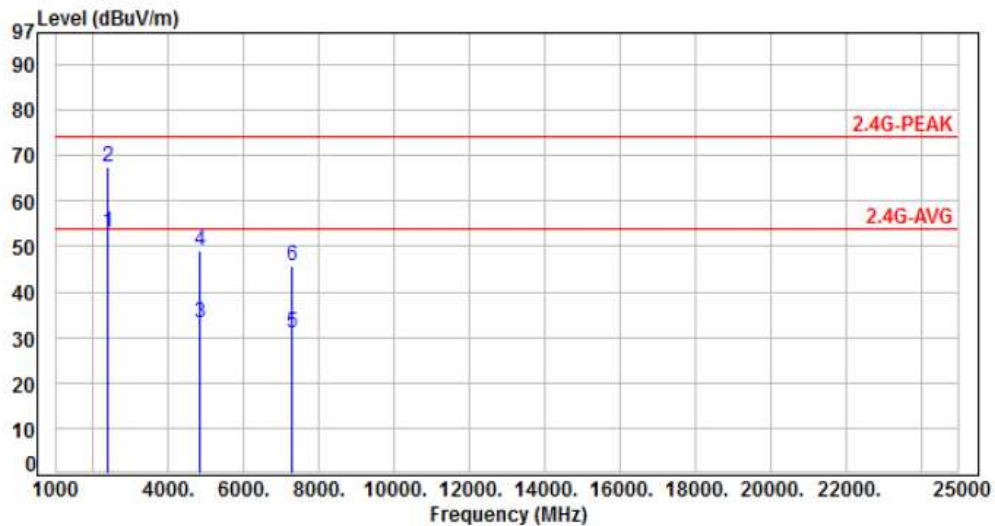

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	72.19	53.16	54.00	-0.84	Average	110	252	P
2	2390.00	-19.03	86.57	67.54	74.00	-6.46	Peak	110	252	P
3	4844.00	-13.29	46.65	33.36	54.00	-20.64	Average	238	356	P
4	4844.00	-13.29	62.39	49.10	74.00	-24.90	Peak	238	356	P
5	7266.00	-10.30	41.35	31.05	54.00	-22.95	Average	211	116	P
6	7266.00	-10.30	55.95	45.65	74.00	-28.35	Peak	211	116	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH06	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

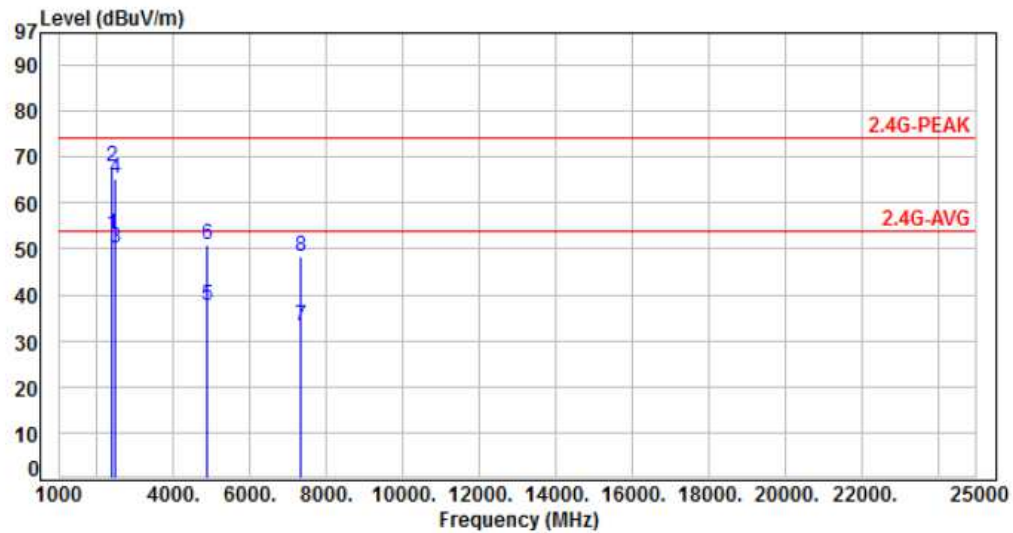

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	72.16	53.13	54.00	-0.87	Average	243	359	P
2	2390.00	-19.03	86.93	67.90	74.00	-6.10	Peak	243	359	P
3	2483.50	-18.81	68.93	50.12	54.00	-3.88	Average	289	347	P
4	2483.50	-18.81	84.23	65.42	74.00	-8.58	Peak	289	347	P
5	4874.00	-13.24	50.71	37.47	54.00	-16.53	Average	275	105	P
6	4874.00	-13.24	64.08	50.84	74.00	-23.16	Peak	275	105	P
7	7311.00	-10.19	43.23	33.04	54.00	-20.96	Average	100	316	P
8	7311.00	-10.19	58.59	48.40	74.00	-25.60	Peak	100	316	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH06	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

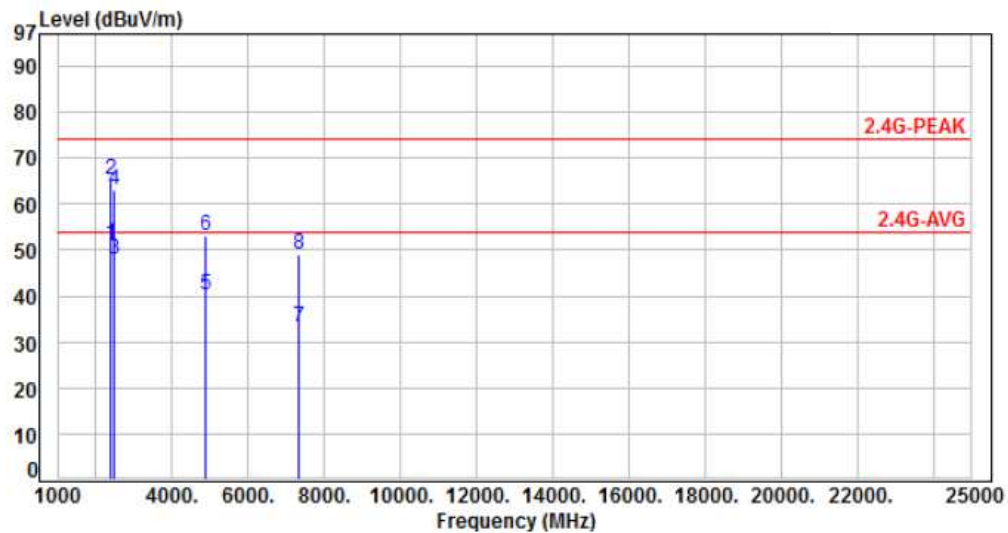

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-19.03	70.24	51.21	54.00	-2.79	Average	333	290	P
2	2390.00	-19.03	84.45	65.42	74.00	-8.58	Peak	333	290	P
3	2483.50	-18.81	66.82	48.01	54.00	-5.99	Average	279	291	P
4	2483.50	-18.81	81.89	63.08	74.00	-10.92	Peak	279	291	P
5	4874.00	-13.24	53.41	40.17	54.00	-13.83	Average	242	360	P
6	4874.00	-13.24	66.51	53.27	74.00	-20.73	Peak	242	360	P
7	7311.00	-10.19	43.45	33.26	54.00	-20.74	Average	100	280	P
8	7311.00	-10.19	59.17	48.98	74.00	-25.02	Peak	100	280	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH09	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

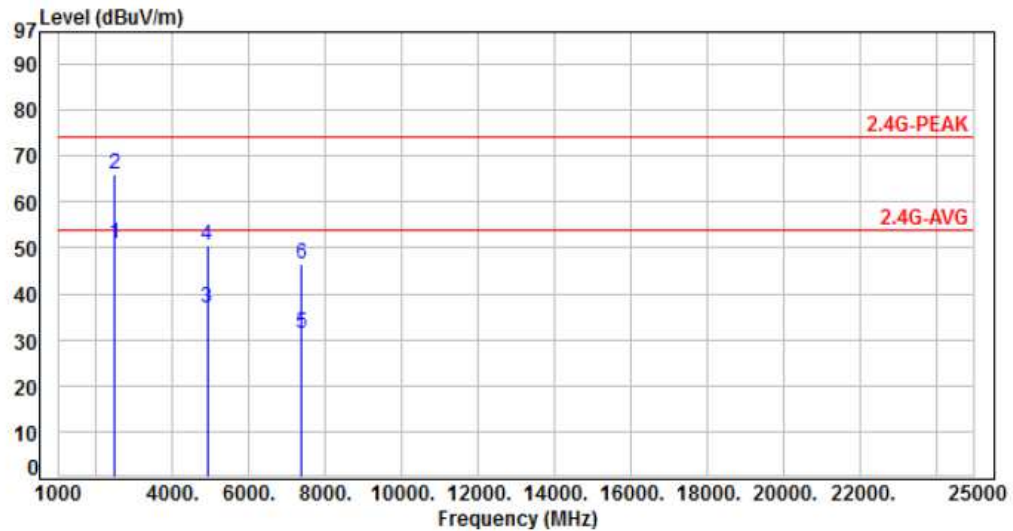

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.81	69.74	50.93	54.00	-3.07	Average	121	302	P
2	2483.50	-18.81	84.82	66.01	74.00	-7.99	Peak	121	302	P
3	4904.00	-13.17	49.97	36.80	54.00	-17.20	Average	280	118	P
4	4904.00	-13.17	63.67	50.50	74.00	-23.50	Peak	280	118	P
5	7356.00	-10.07	41.37	31.30	54.00	-22.70	Average	100	324	P
6	7356.00	-10.07	56.56	46.49	74.00	-27.51	Peak	100	324	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH09	Temperature	: 24 °C
Test Date	: Aug. 03, 2017	Humidity	: 68 %

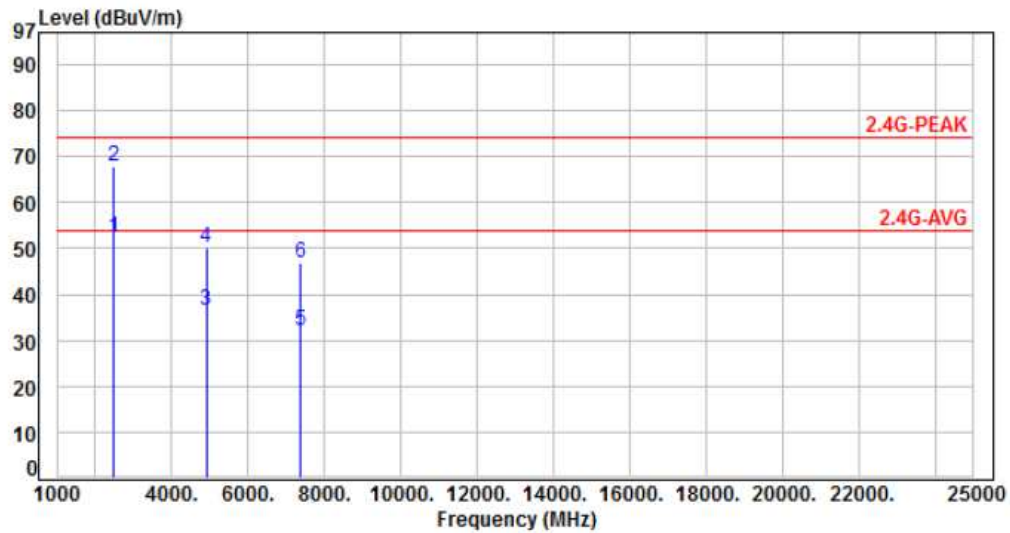

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.81	71.34	52.53	54.00	-1.47	Average	100	227	P
2	2483.50	-18.81	86.57	67.76	74.00	-6.24	Peak	100	227	P
3	4904.00	-13.17	49.71	36.54	54.00	-17.46	Average	231	356	P
4	4904.00	-13.17	63.34	50.17	74.00	-23.83	Peak	231	356	P
5	7356.00	-10.07	42.29	32.22	54.00	-21.78	Average	212	113	P
6	7356.00	-10.07	57.05	46.98	74.00	-27.02	Peak	212	113	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout



7.4 Test Result and Data

Test Result : PASS

Test Date : Aug. 16, 2017

Temperature : 24°C


Humidity : 68%

Note: Test plots refers to the following pages.








ANT A

Modulation Type: 802.11b, CH 01

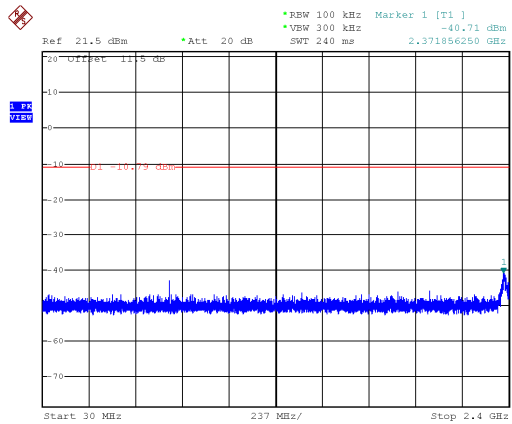




Modulation Type: 802.11b, CH 06

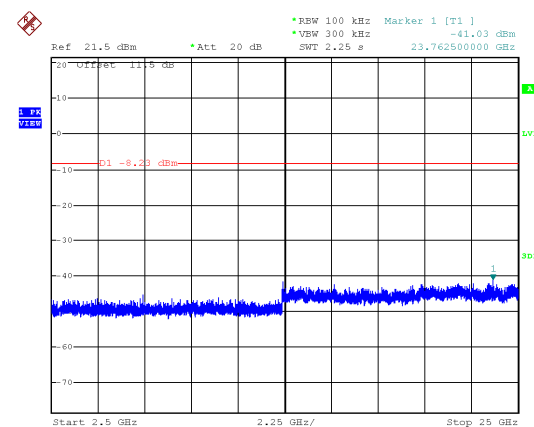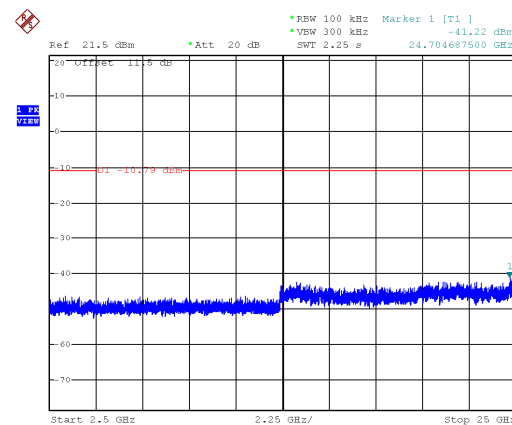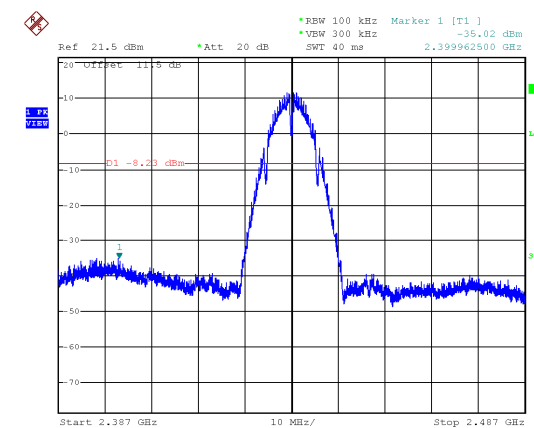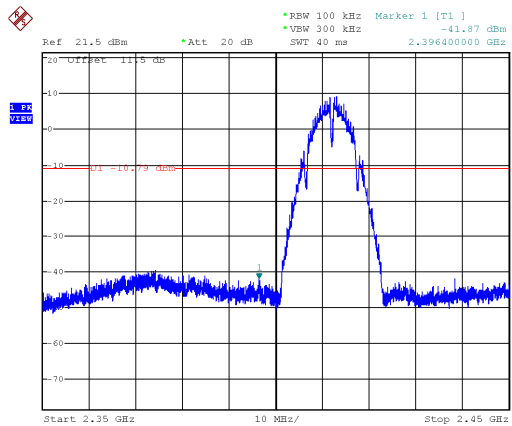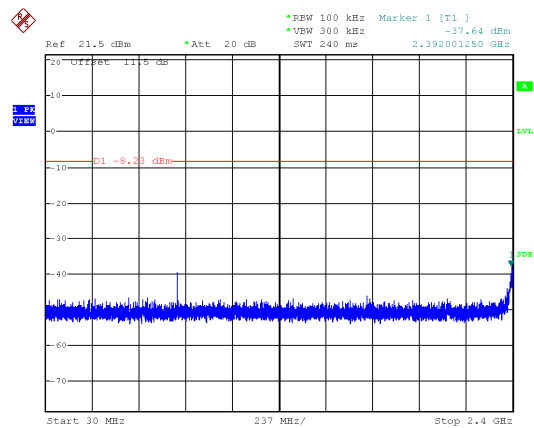



ANT A


Modulation Type: 802.11b, CH 11

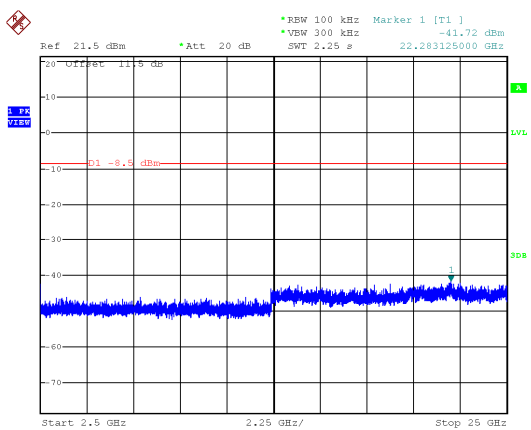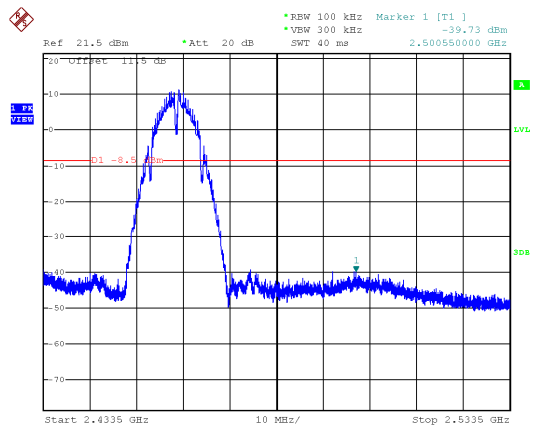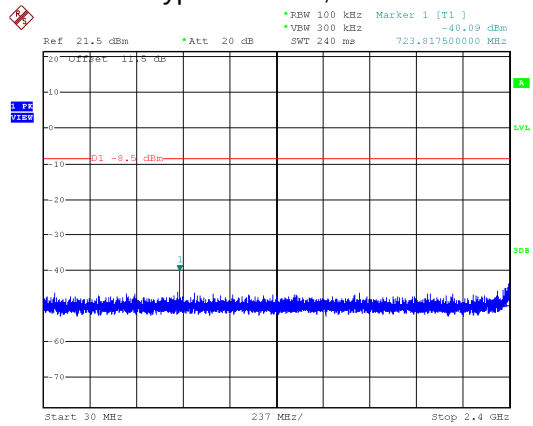








ANT A

Modulation Type: 802.11g, CH 01

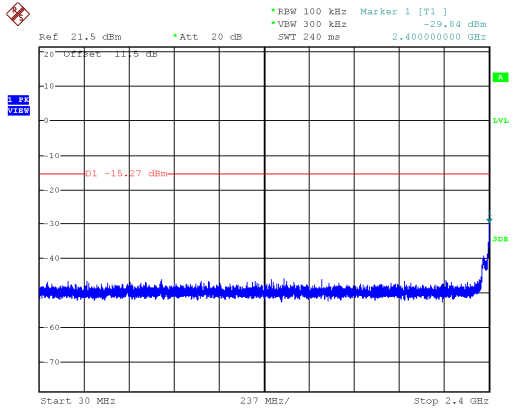




Modulation Type: 802.11g, CH 06

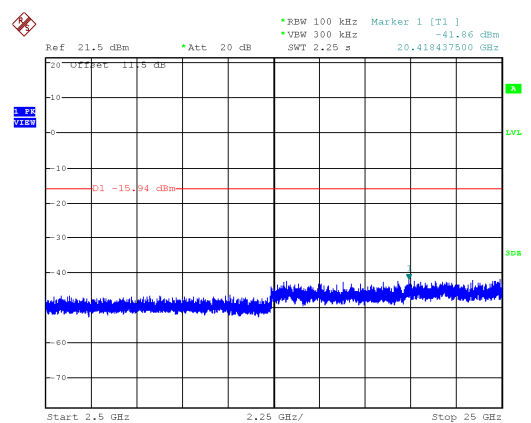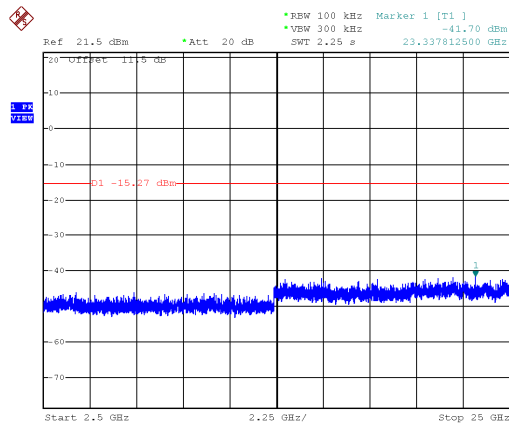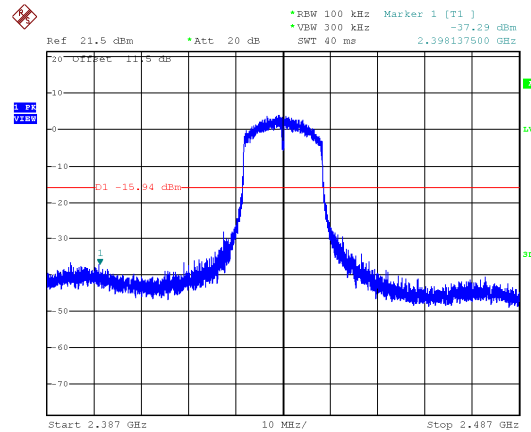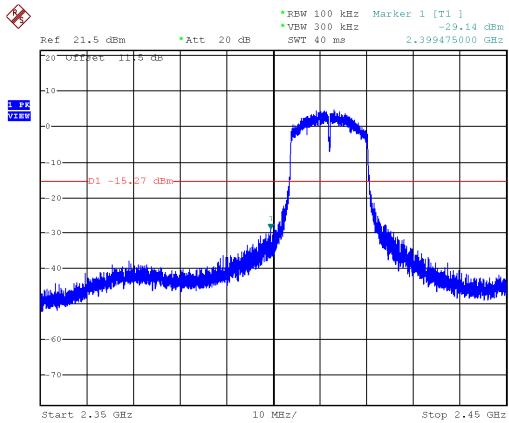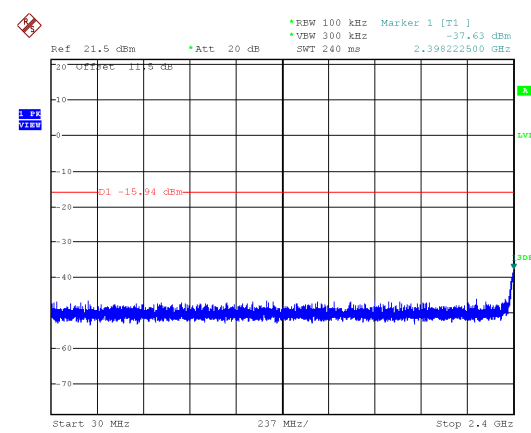



ANT A


Modulation Type: 802.11g, CH 11

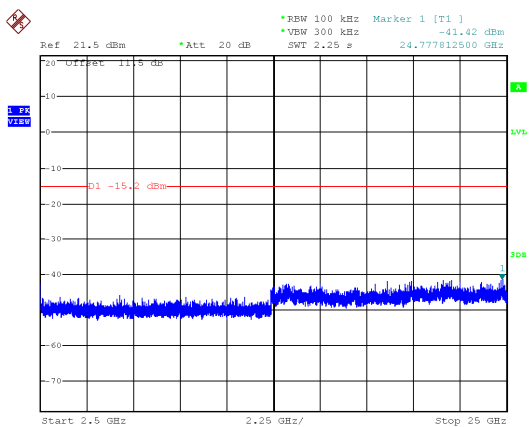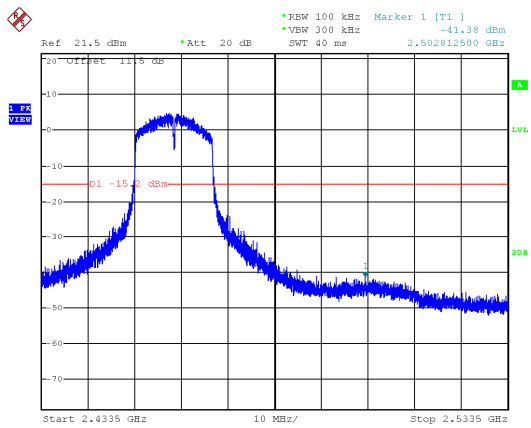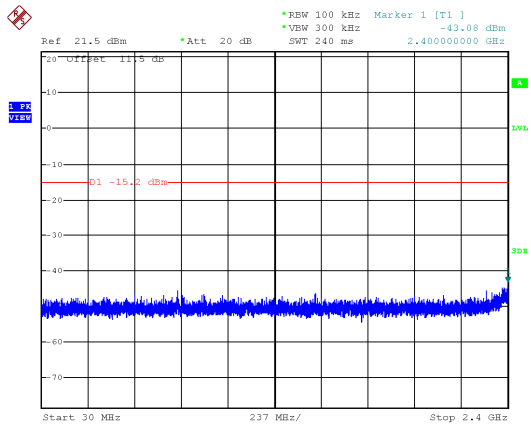








ANT A

Modulation Type: 802.11n HT20, CH01

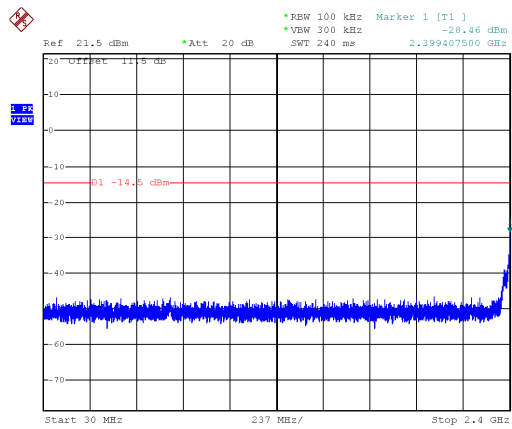




Modulation Type: 802.11n HT20, CH06

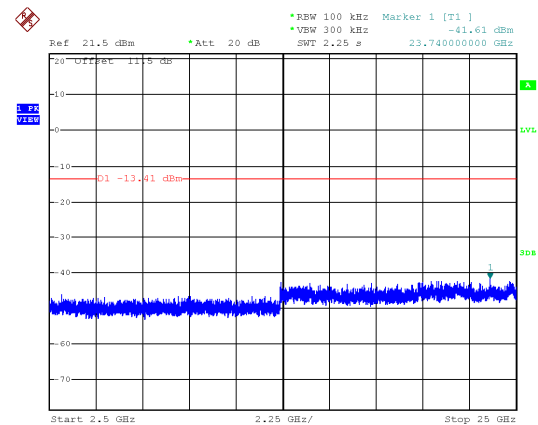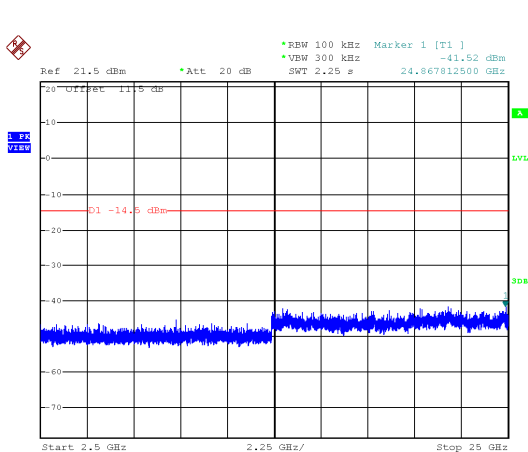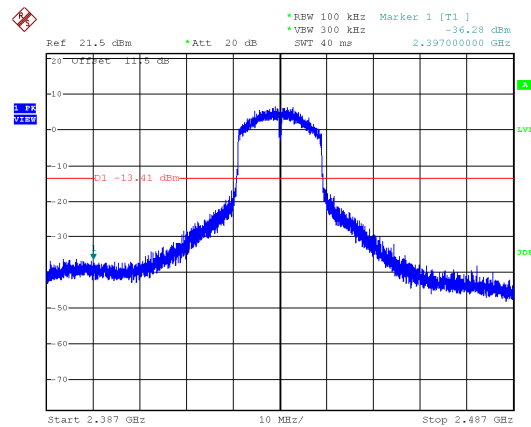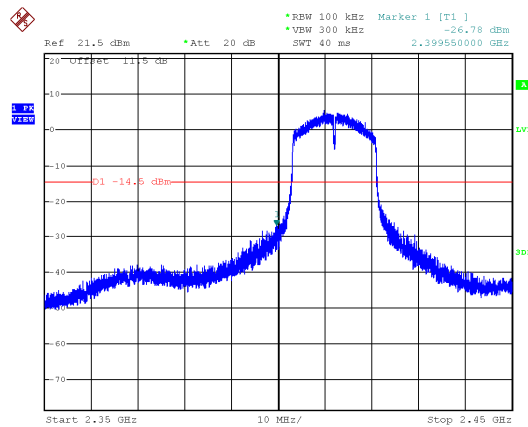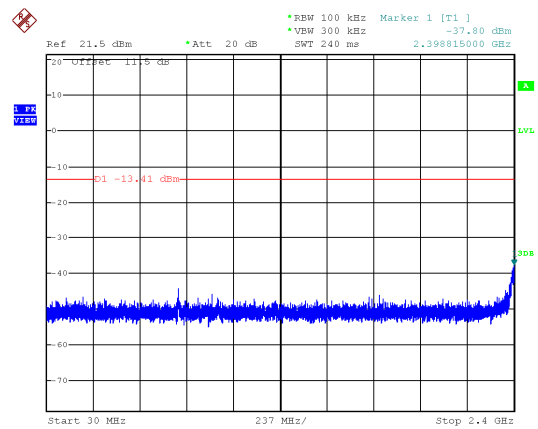



ANT A


Modulation Type: 802.11n HT20, CH11

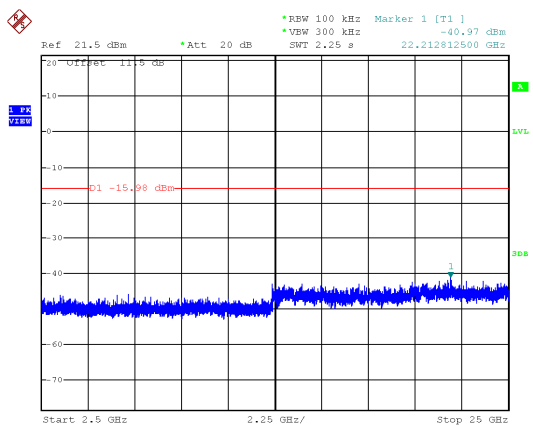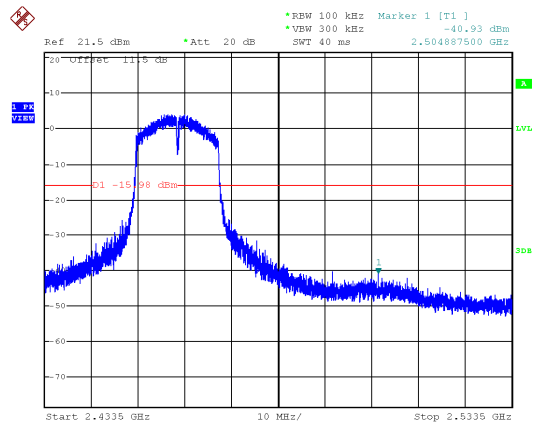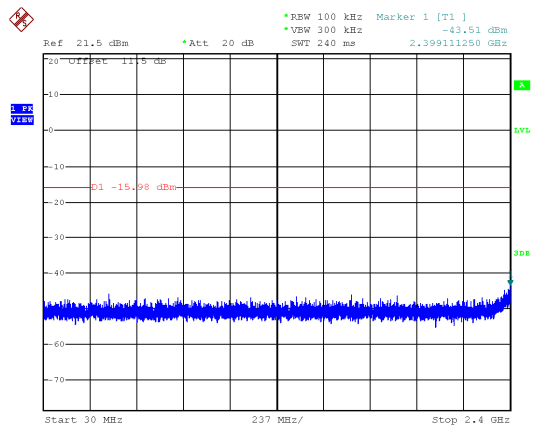








ANT A

Modulation Type: 802.11n HT40, CH03

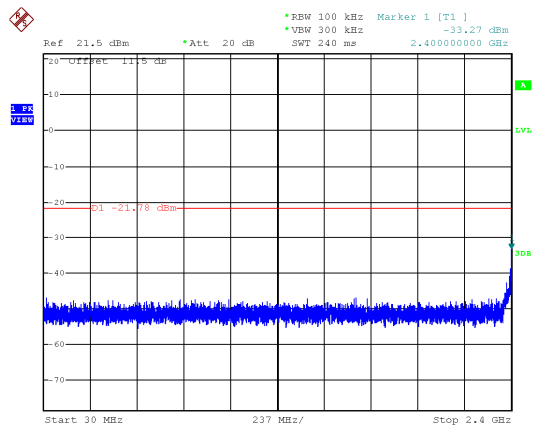




Modulation Type: 802.11n HT40, CH06

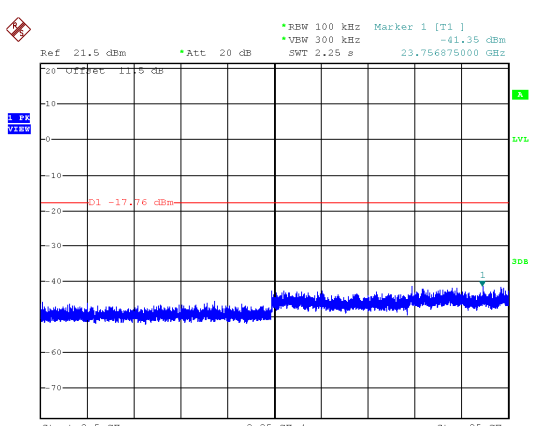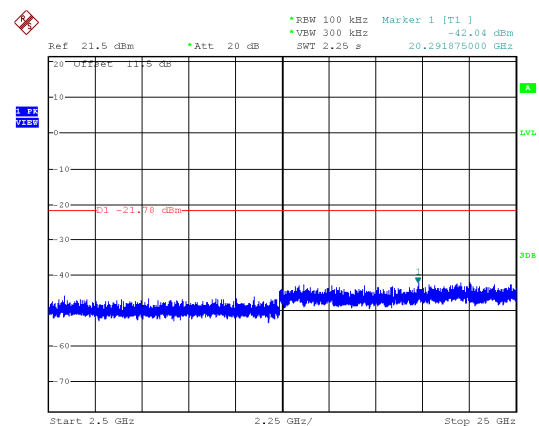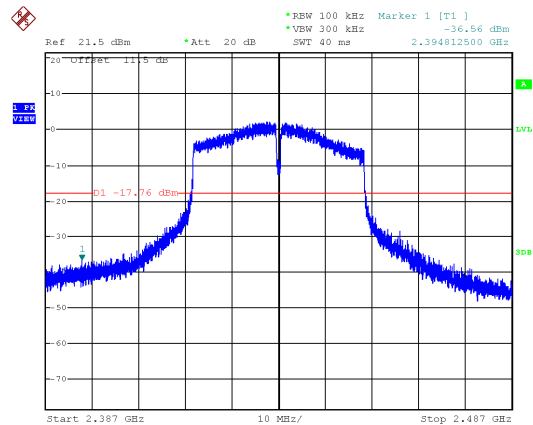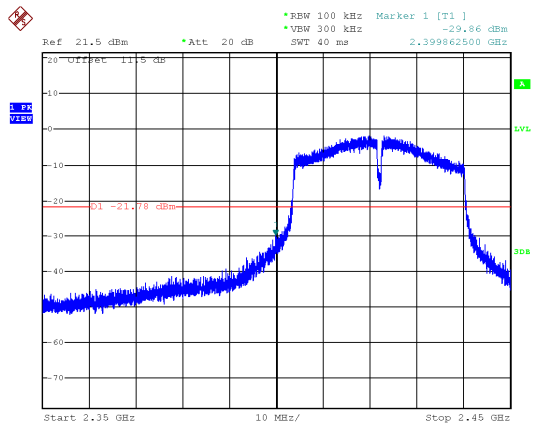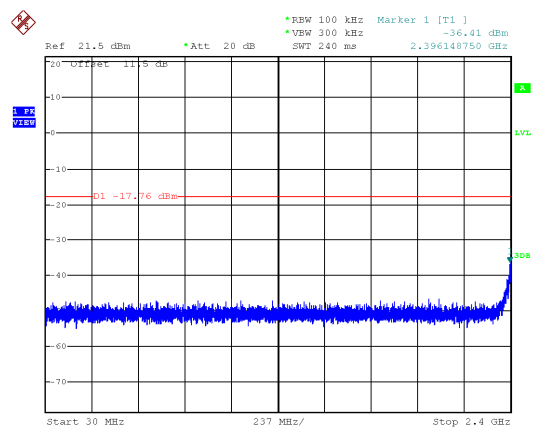



ANT A


Modulation Type: 802.11n HT40, CH09

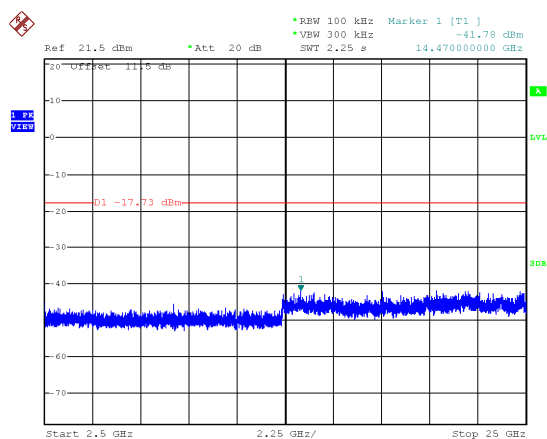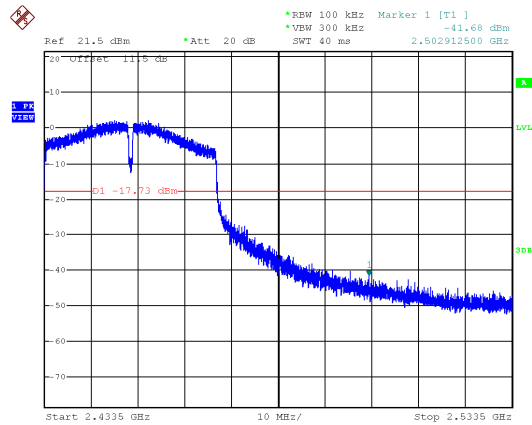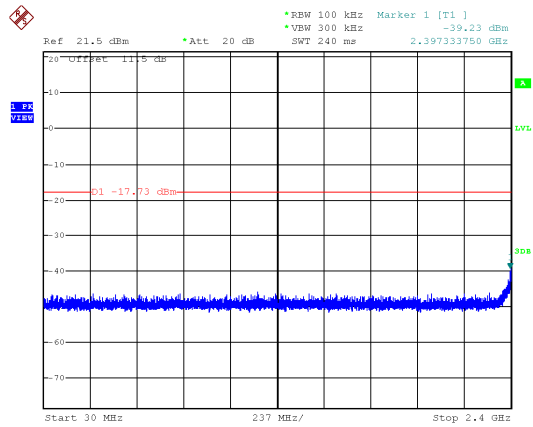








ANT B

Modulation Type: 802.11b, CH 01

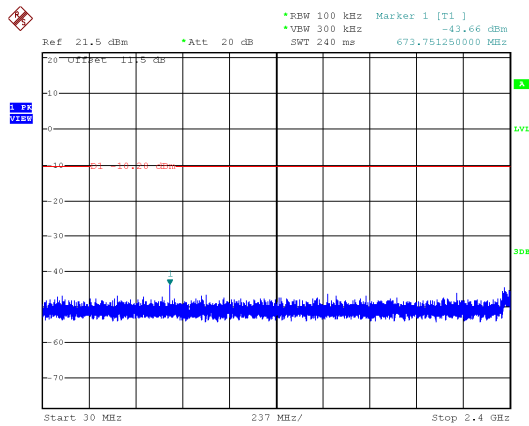




Modulation Type: 802.11b, CH 06

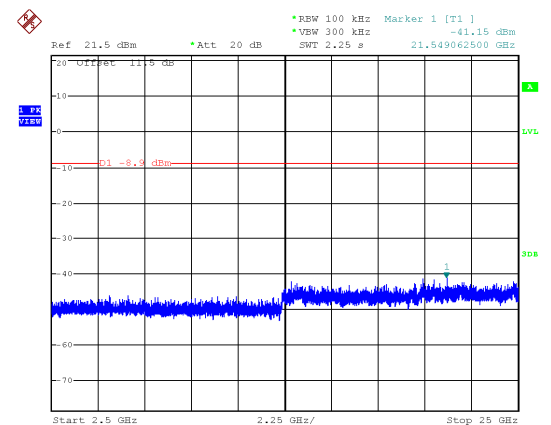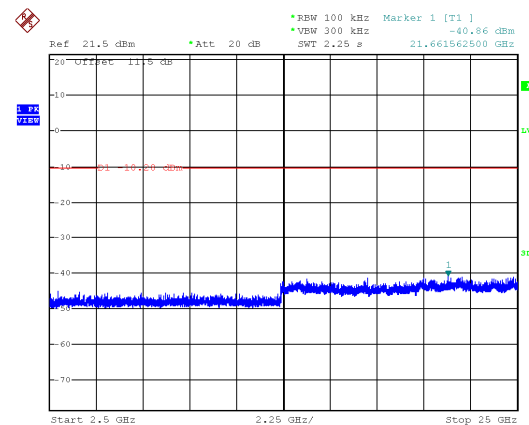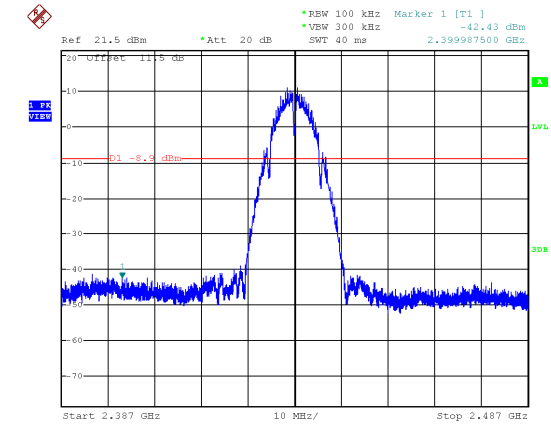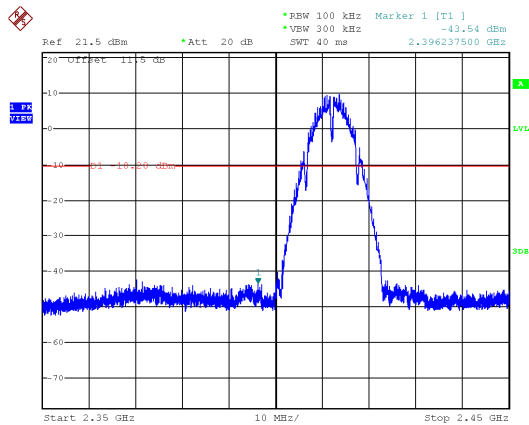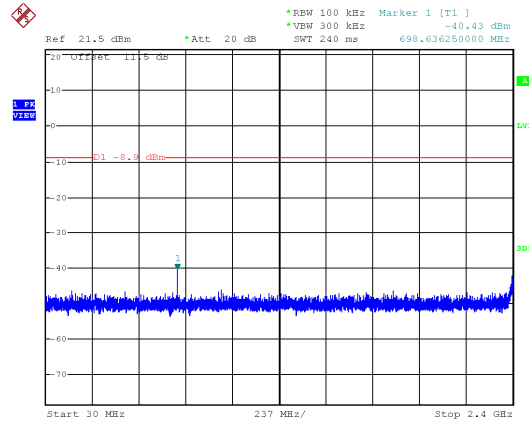



ANT B


Modulation Type: 802.11b, CH 11

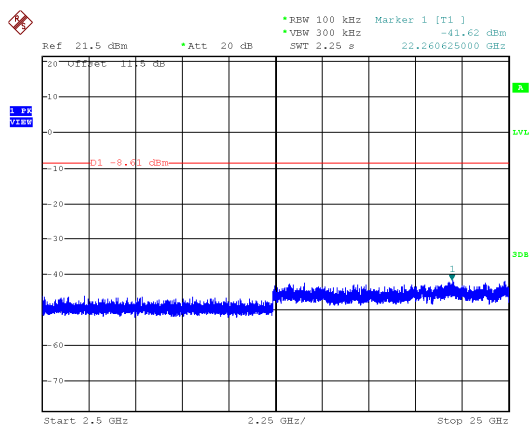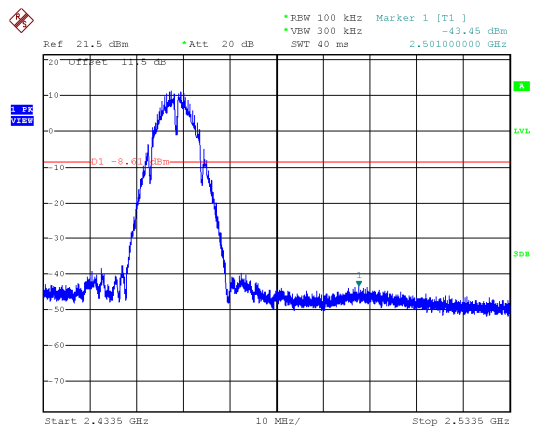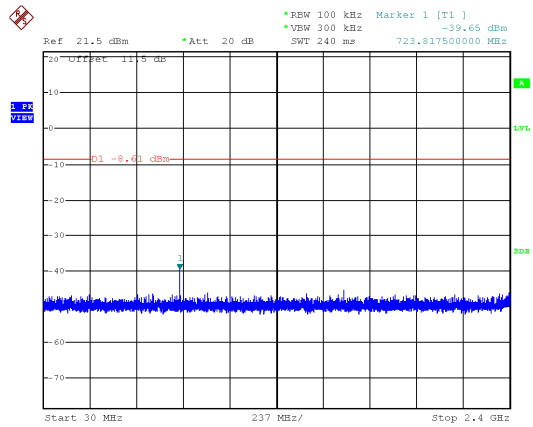








ANT B

Modulation Type: 802.11g, CH 01

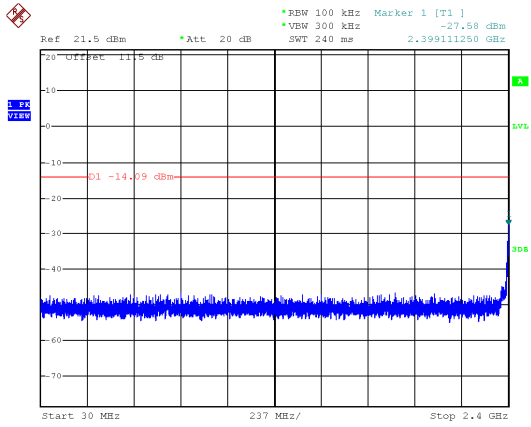




Modulation Type: 802.11g, CH 06

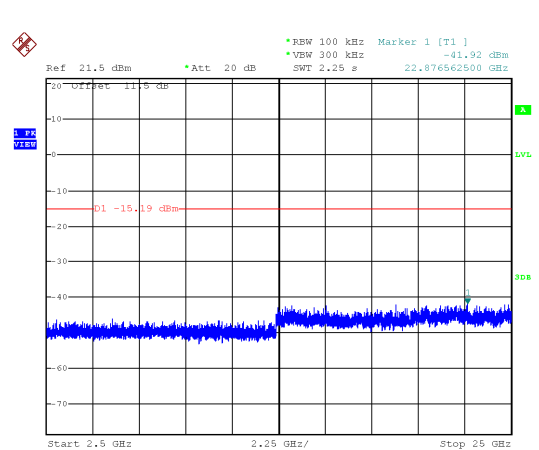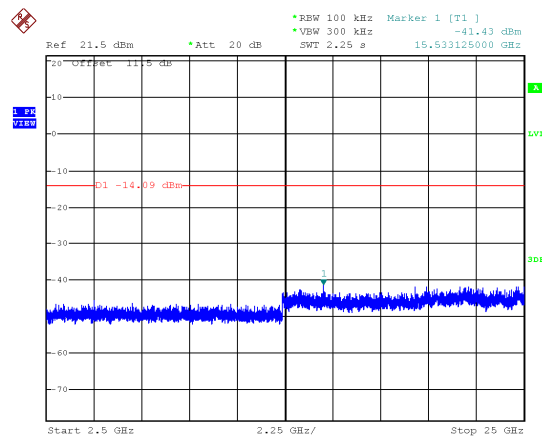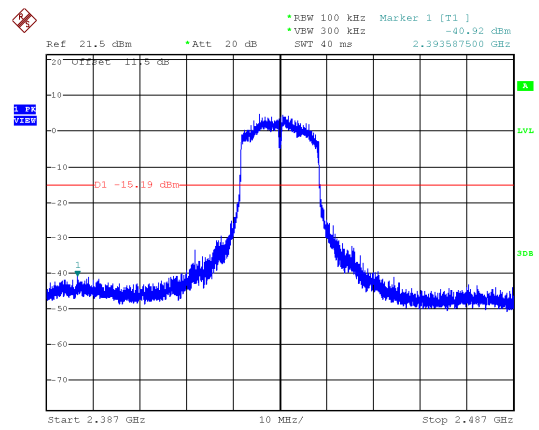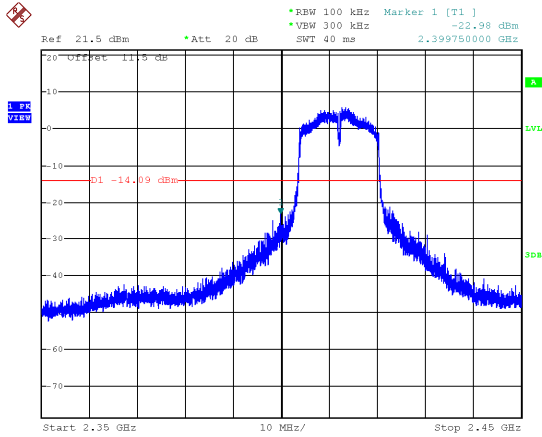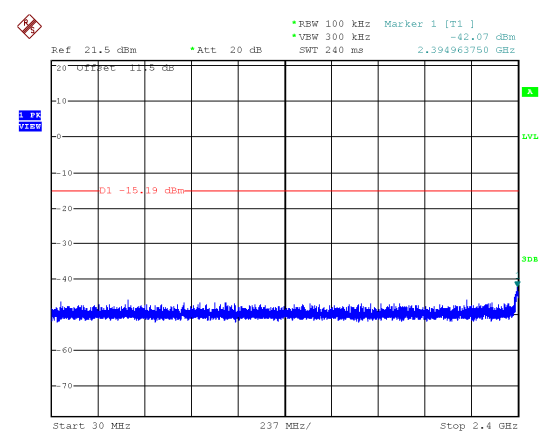



ANT B


Modulation Type: 802.11g, CH 11

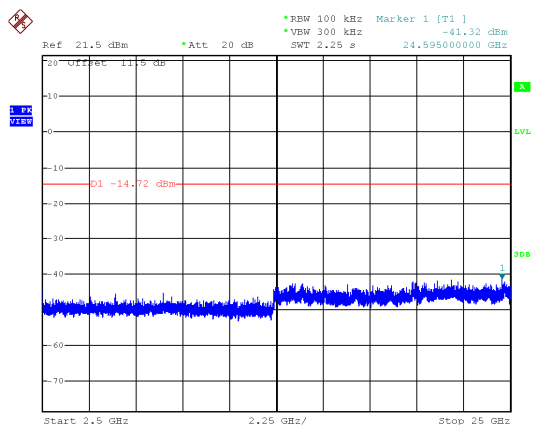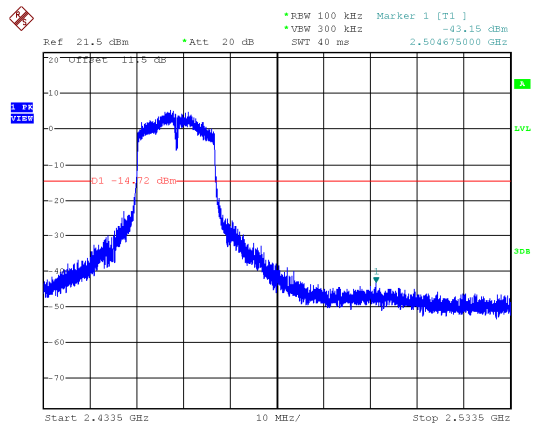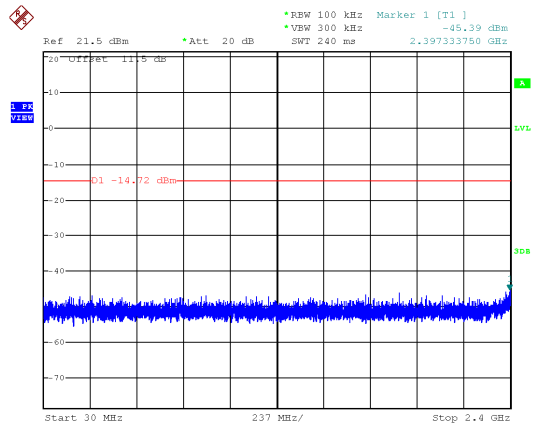








ANT B

Modulation Type: 802.11n HT20, CH01

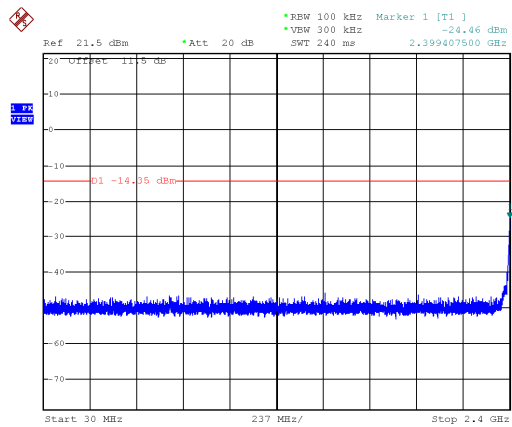




Modulation Type: 802.11n HT20, CH06

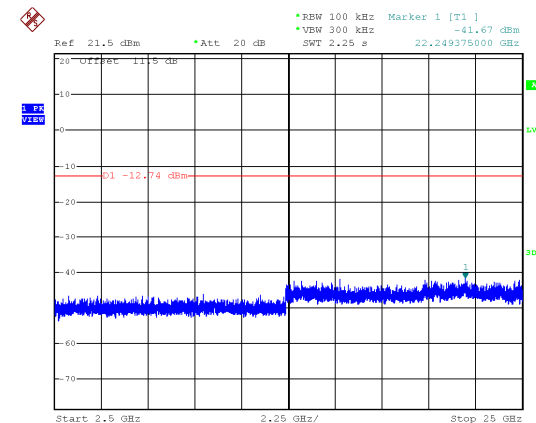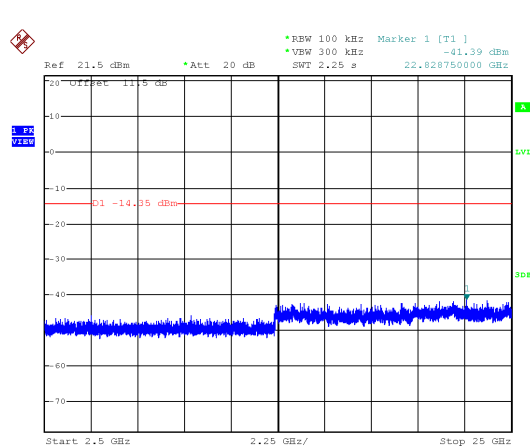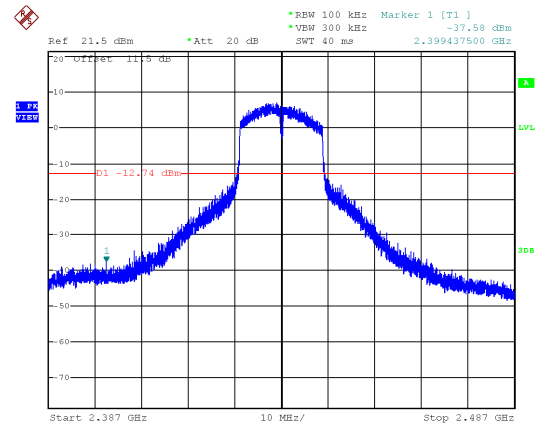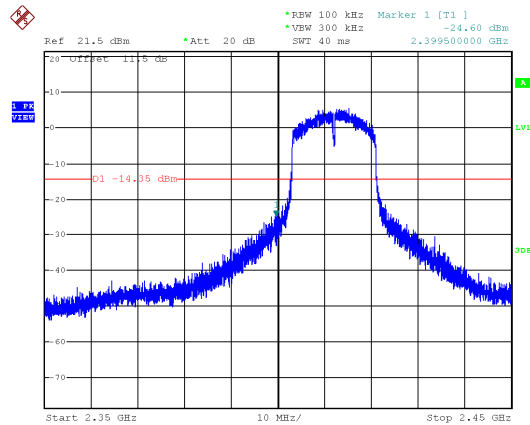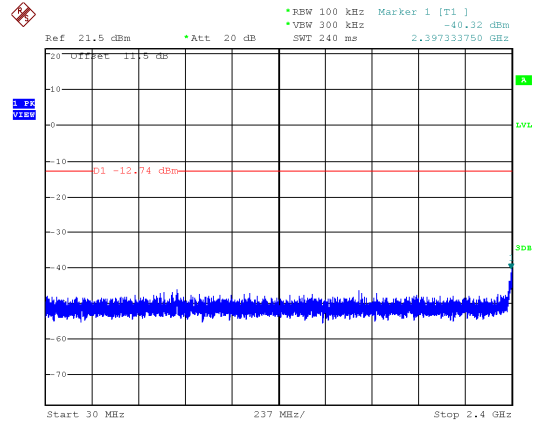



ANT B


Modulation Type: 802.11n HT20, CH11

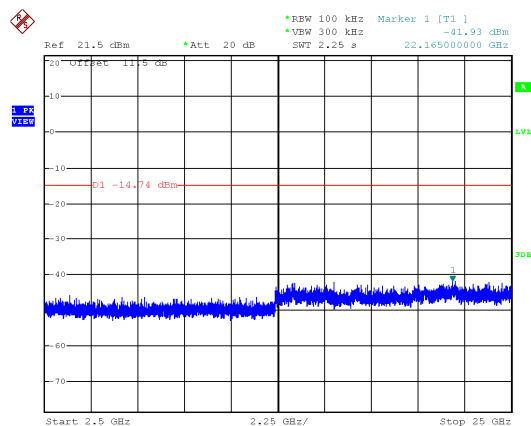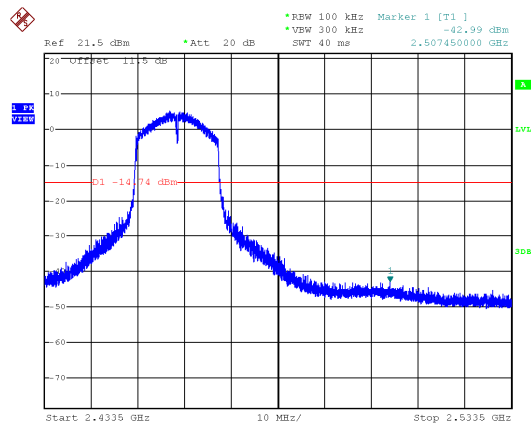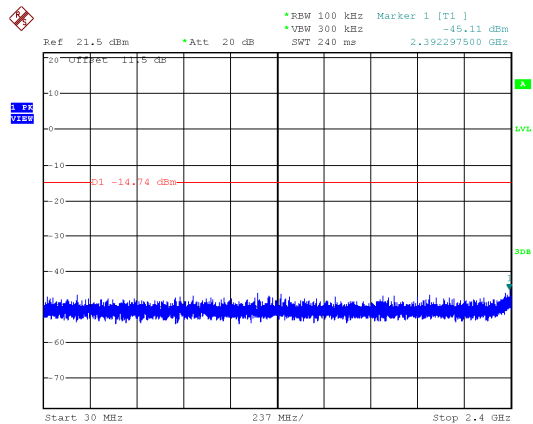









ANT B

Modulation Type: 802.11n HT40, CH03

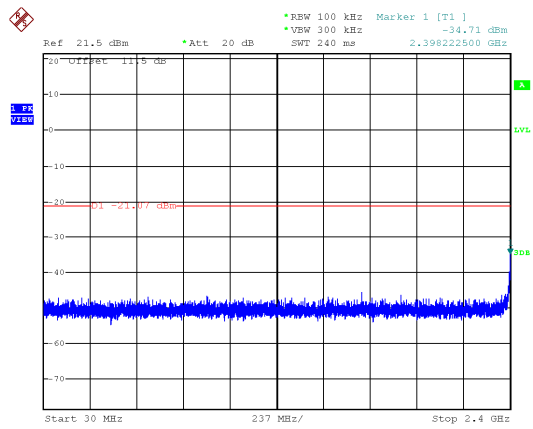

Modulation Type: 802.11n HT40, CH06

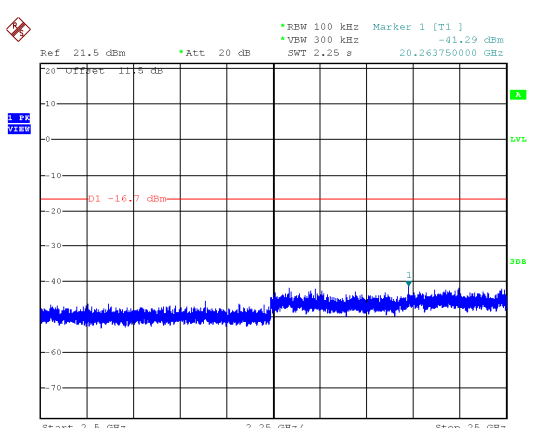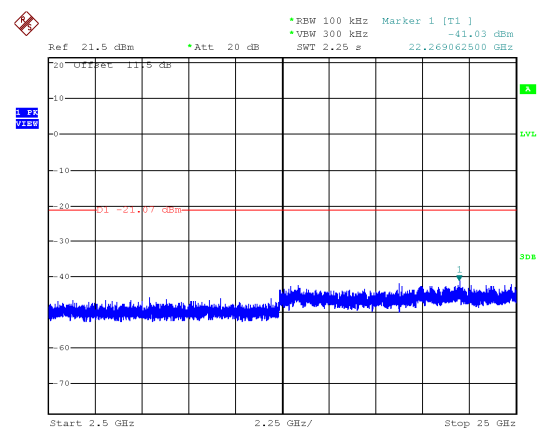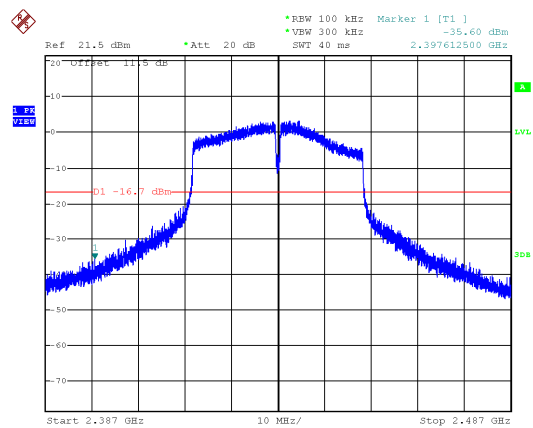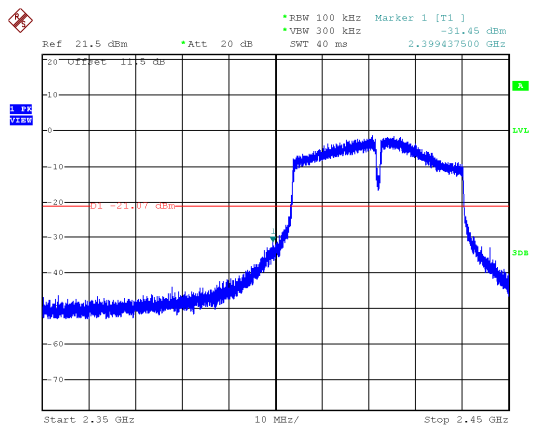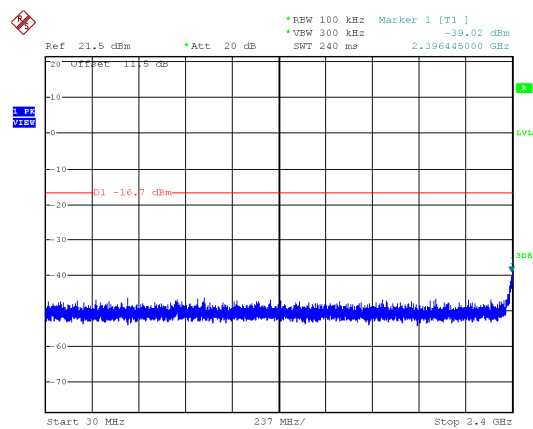

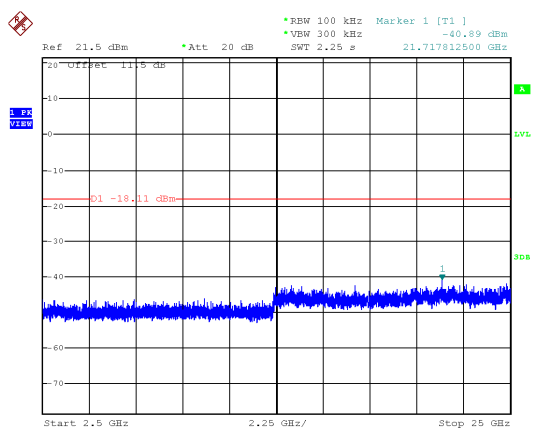



8. 6dB & 99% Bandwidth Measurement Data


8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW $\geq 3 \times$ RBW.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

8.3 Test Setup Layout



8.4 Test Result and Data (6dB Bandwidth)

Temperature : 24°C

Humidity : 68%

Test Date : Aug. 16, 2017

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			ANT A	ANT B	
IEEE 802.11b (1Mbps)	01	2412	6.50	6.50	0.5
	06	2437	6.50	6.50	0.5
	11	2462	6.50	6.90	0.5
IEEE 802.11g (6Mbps)	01	2412	16.00	16.00	0.5
	06	2437	16.00	16.00	0.5
	11	2462	15.70	15.70	0.5
IEEE 802.11n HT20 (6.5Mbps)	01	2412	16.60	17.00	0.5
	06	2437	17.30	17.30	0.5
	11	2462	16.00	16.00	0.5
IEEE 802.11n HT40 (13.5Mbps)	03	2422	31.00	31.40	0.5
	06	2437	31.80	31.80	0.5
	09	2452	32.00	32.40	0.5



8.5 Test Result and Data (99% Bandwidth)

Temperature : 24°C


Humidity : 68%

Test Date : Aug. 16, 2017


Modulation Type	Channel	Frequency (MHz)	99% Bandwidth (MHz)	
			ANT A	ANT B
IEEE 802.11b (1Mbps)	01	2412	11.60	11.50
	06	2437	11.50	11.80
	11	2462	11.60	11.50
IEEE 802.11g (6Mbps)	01	2412	16.30	16.30
	06	2437	16.30	16.30
	11	2462	16.30	16.30
IEEE 802.11n HT20 (6.5Mbps)	01	2412	17.50	17.50
	06	2437	17.50	17.50
	11	2462	17.50	17.40
IEEE 802.11n HT40 (13.5Mbps)	03	2422	36.20	36.00
	06	2437	36.00	36.00
	09	2452	36.20	36.20




6dB Bandwidth
ANT A
Modulation Type: 802.11b
CH01

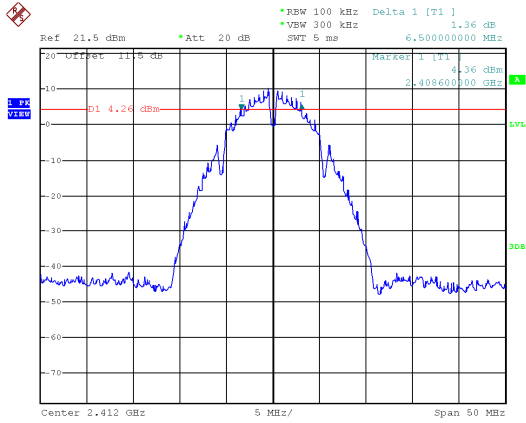


Modulation Type: 802.11g
CH01

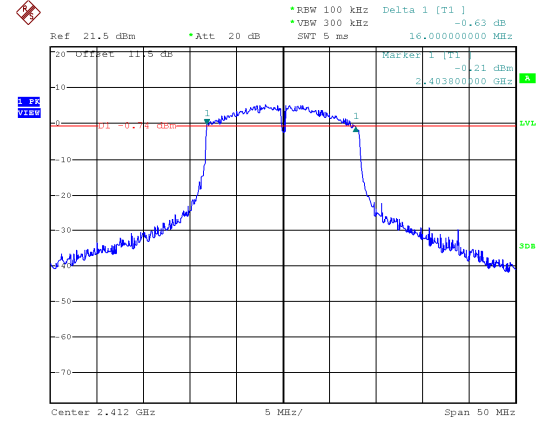


CH06

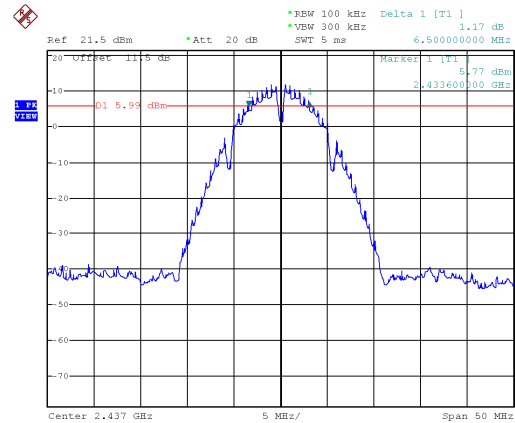


CH06

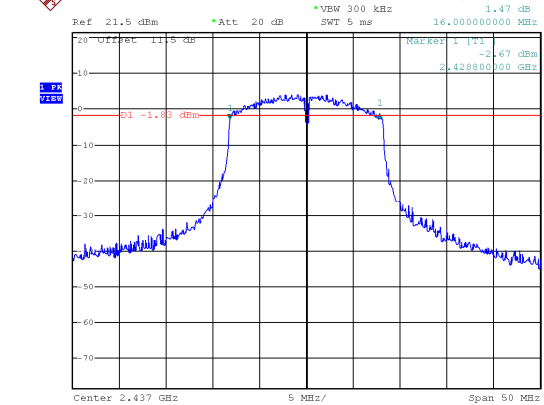

CH11


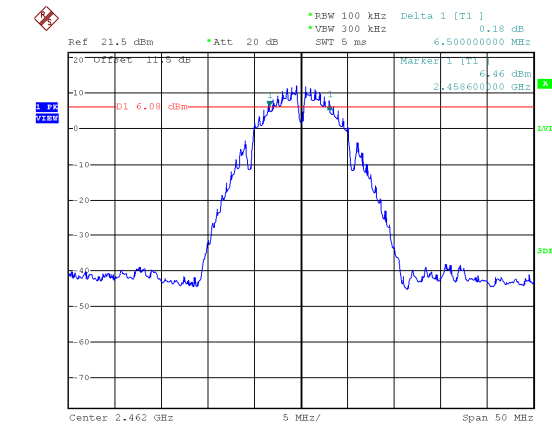


CH11

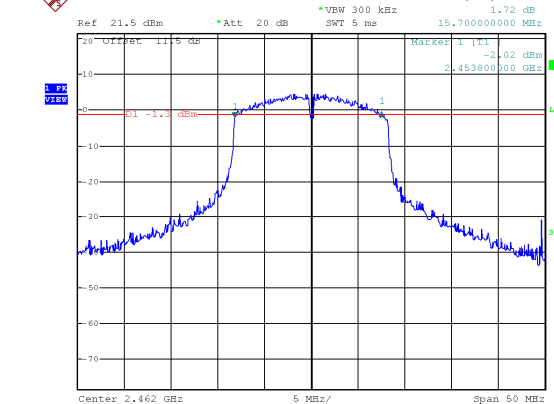





ANT A

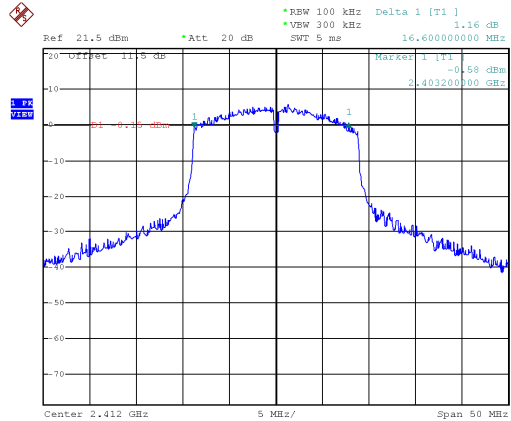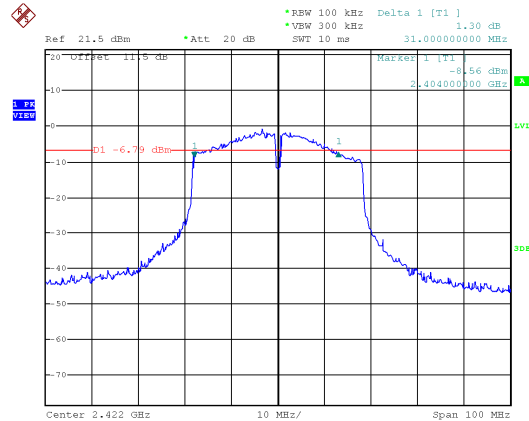Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

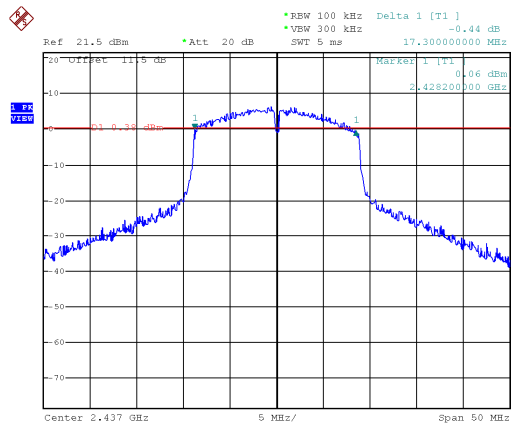


CH06

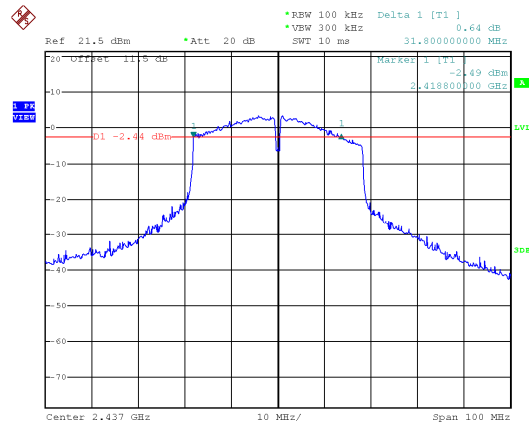

CH11

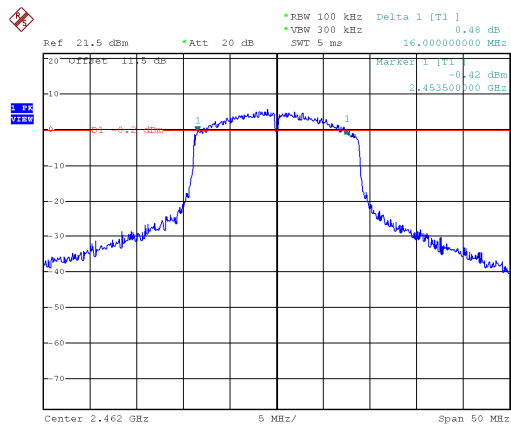


CH09

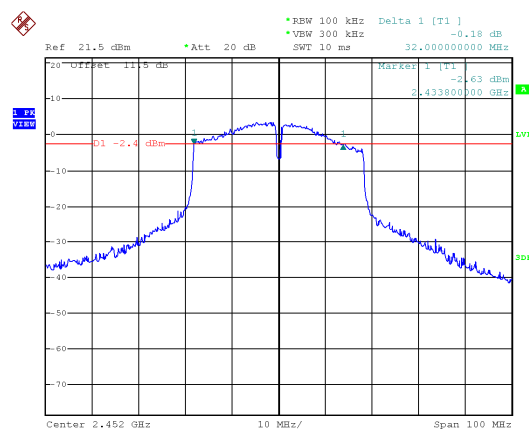





ANT B
Modulation Type: 802.11b
CH01

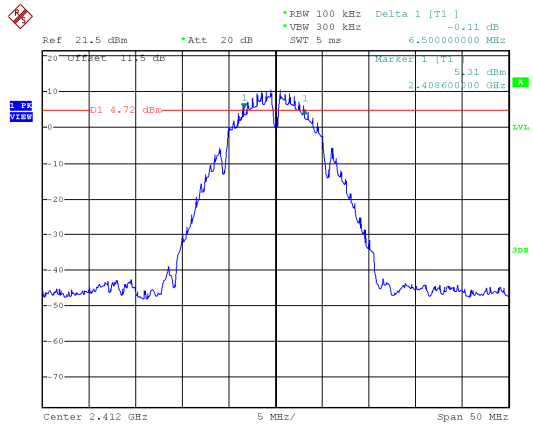


Modulation Type: 802.11g
CH01

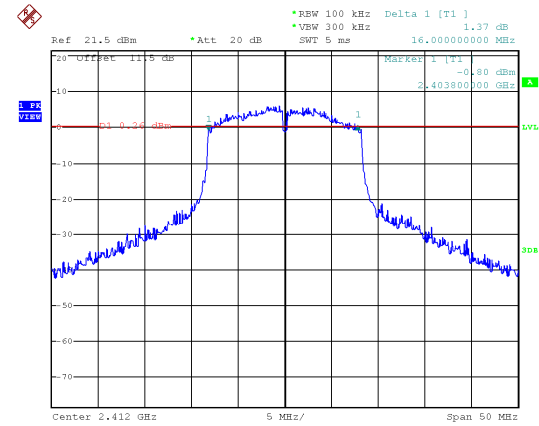


CH06

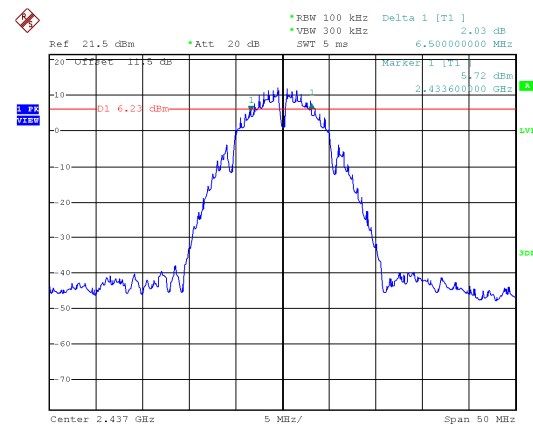


CH06

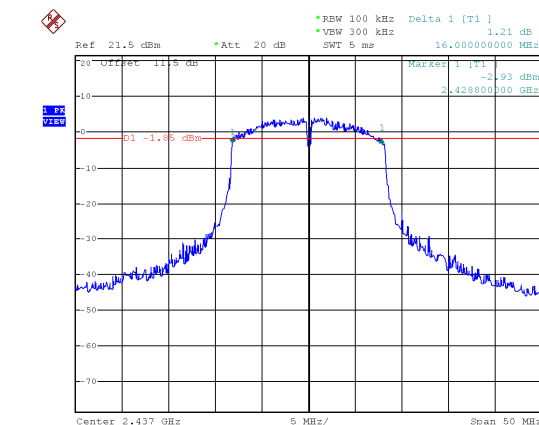

CH11


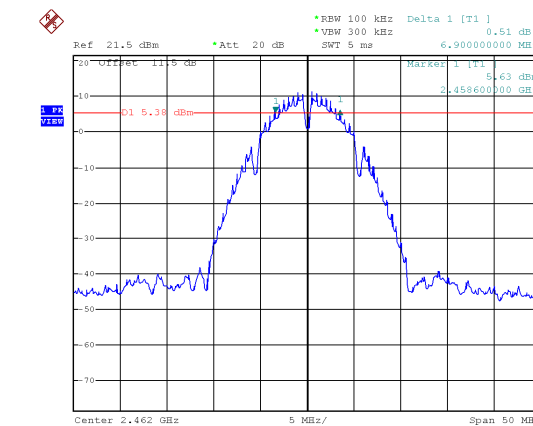


CH11

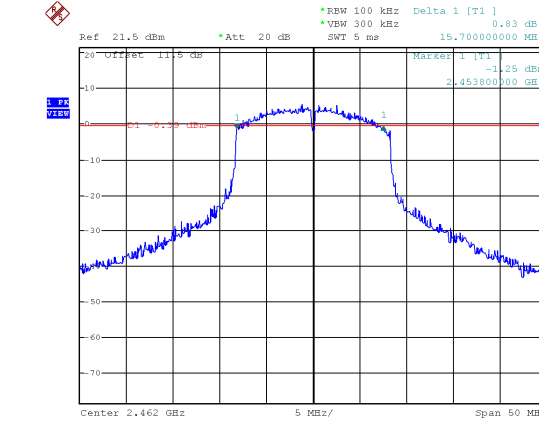





ANT B

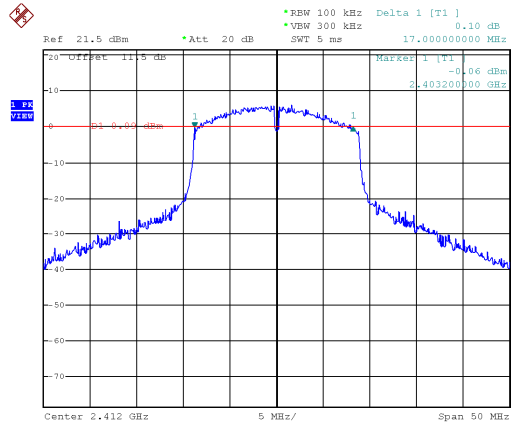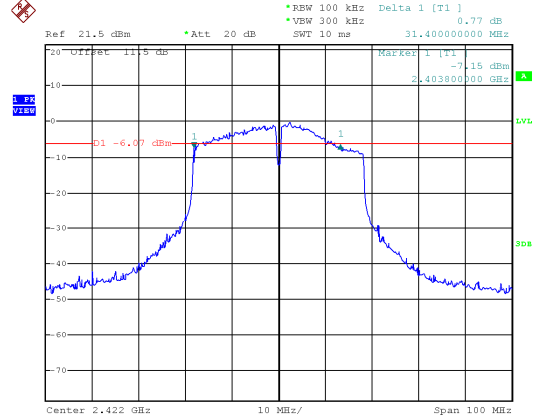Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

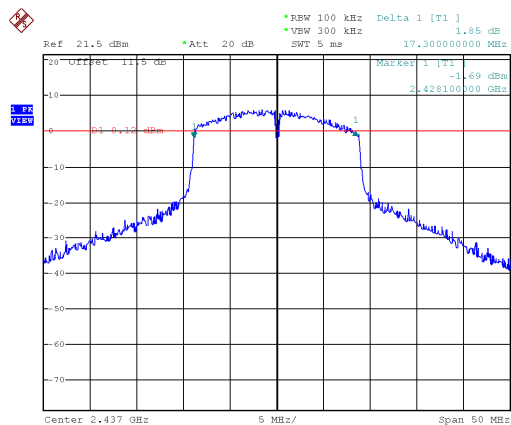


CH06

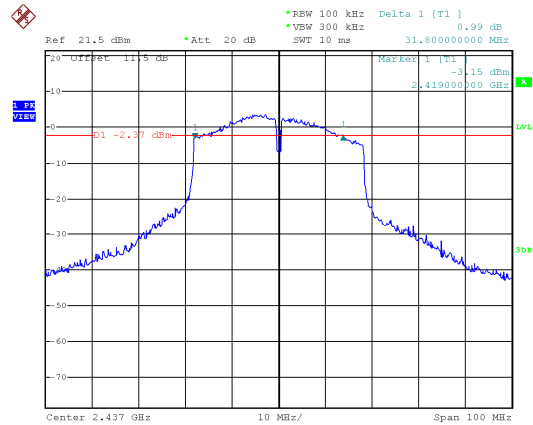

CH11


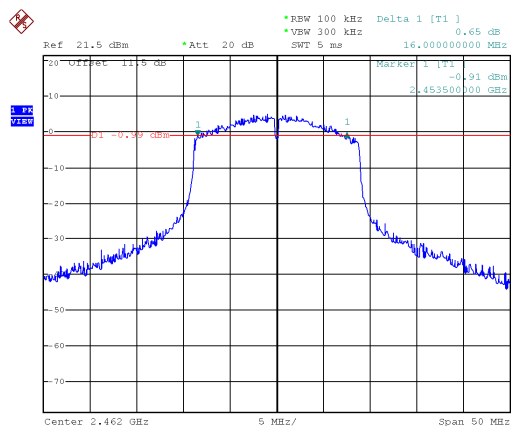


CH09

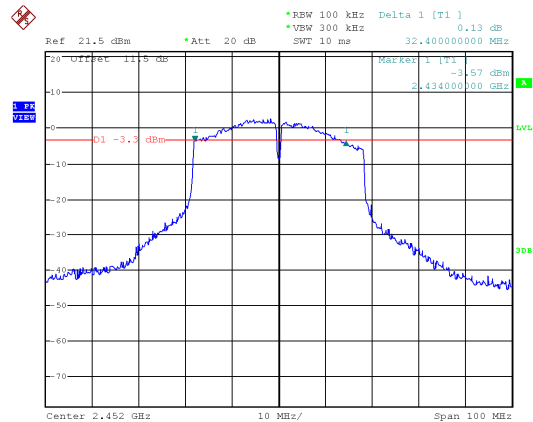





99% Bandwidth
ANT A
Modulation Type: 802.11b
CH01

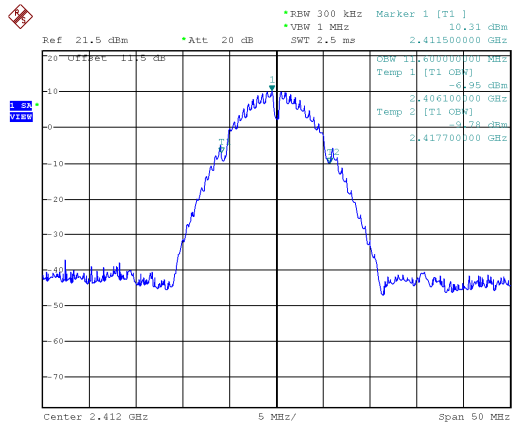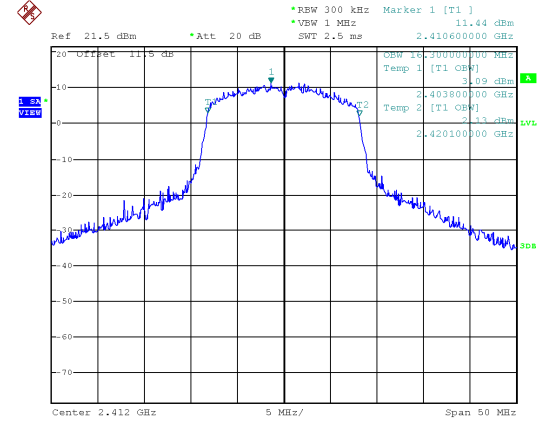Modulation Type: 802.11g
CH01


CH06

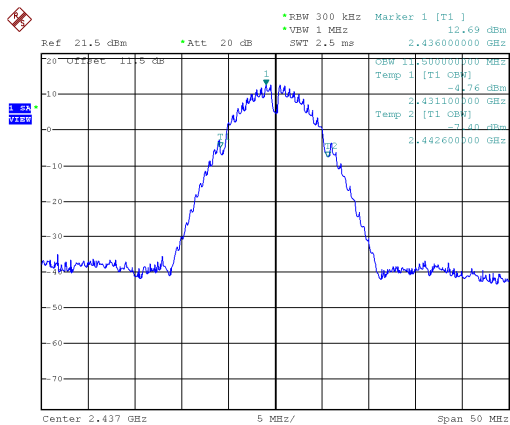


CH06

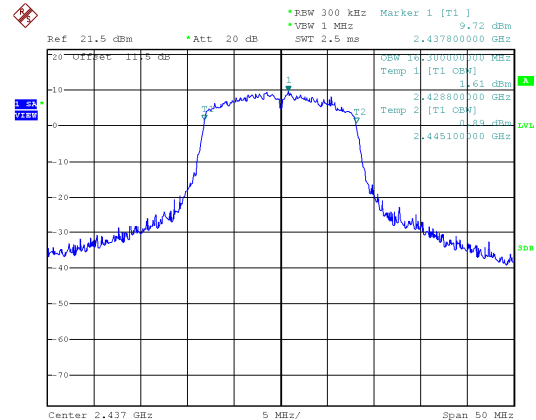

CH11


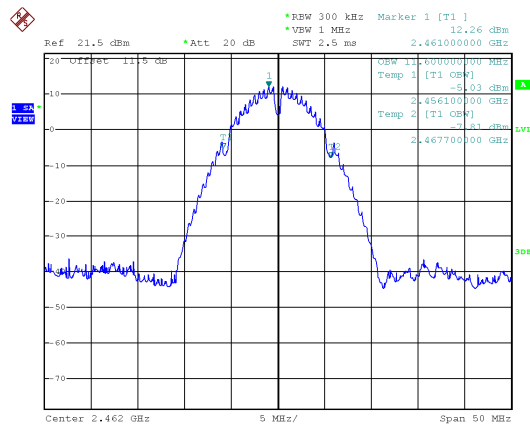


CH11

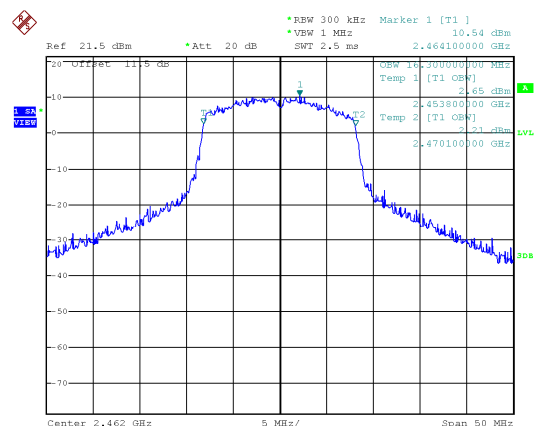





ANT A

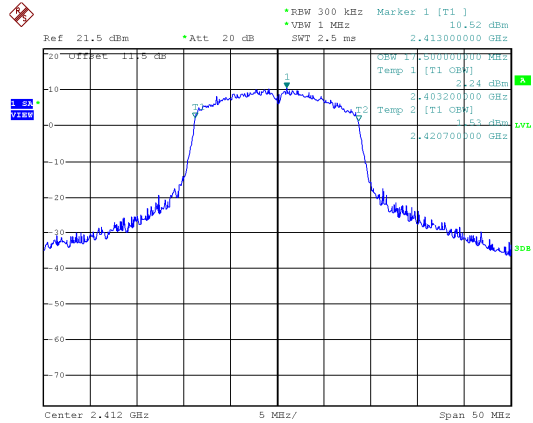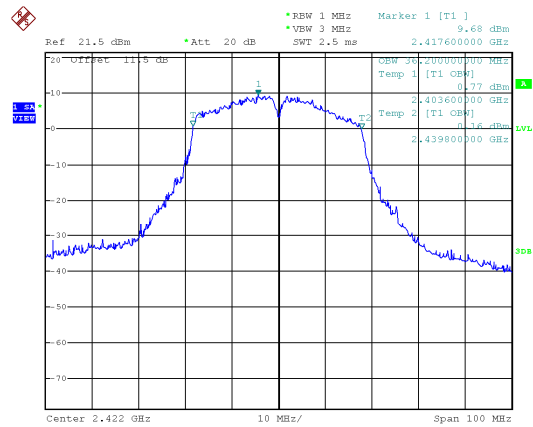Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

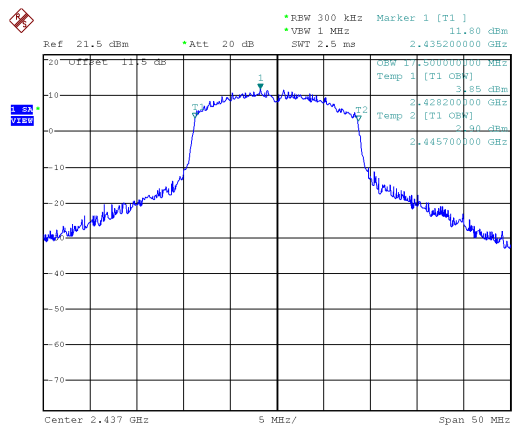


CH06

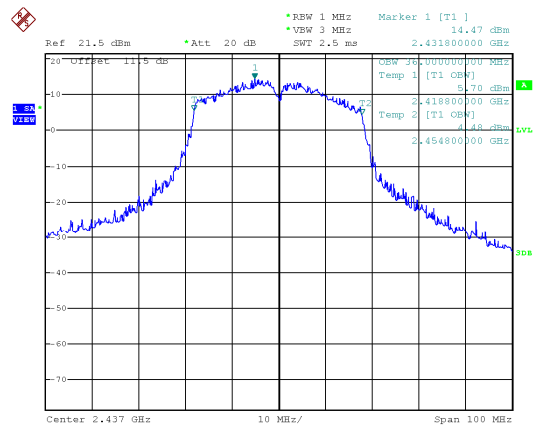

CH11

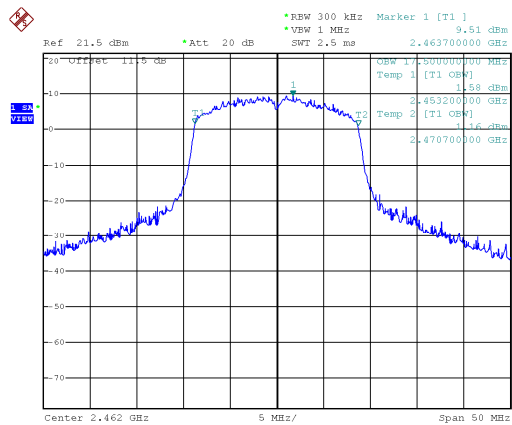

CH09

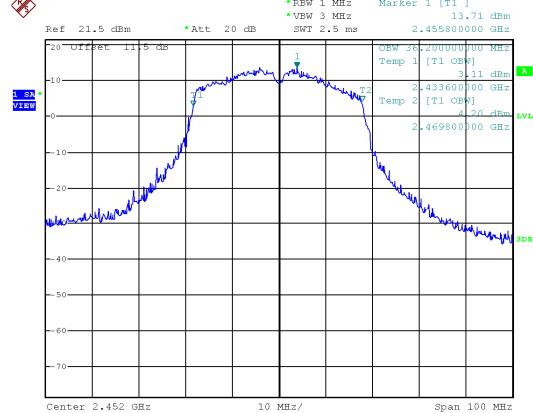




ANT B


Modulation Type: 802.11b

CH01

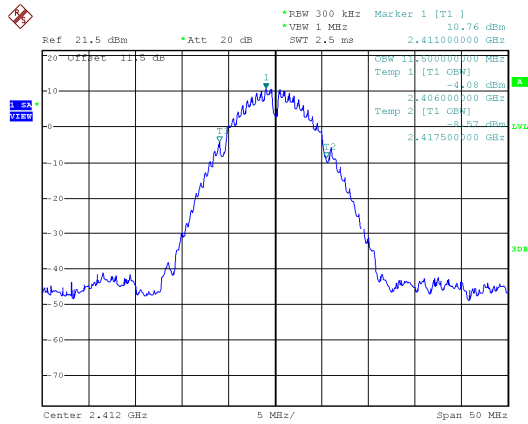


Modulation Type: 802.11g


CH01

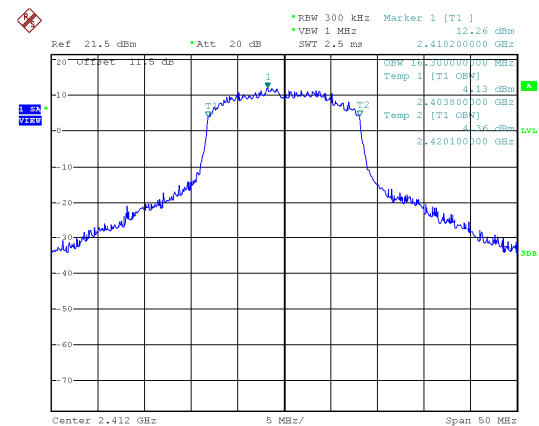


CH06

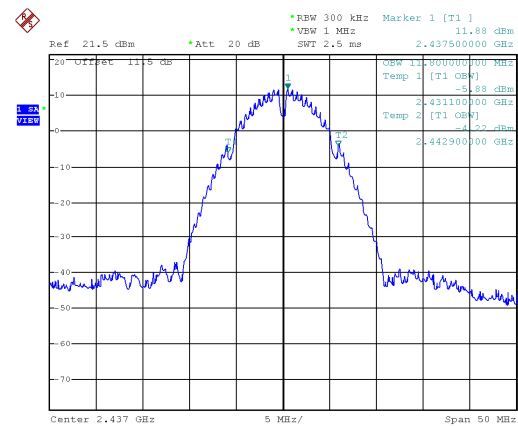


CH06

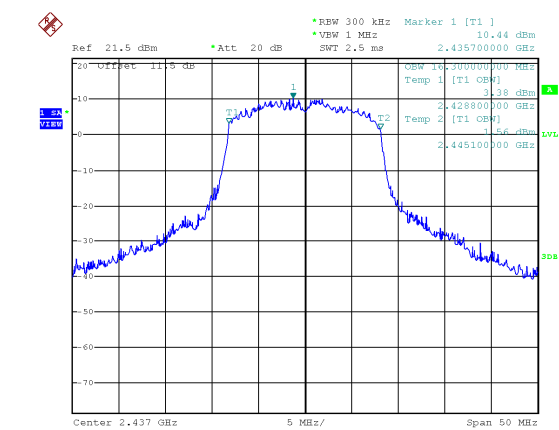

CH11


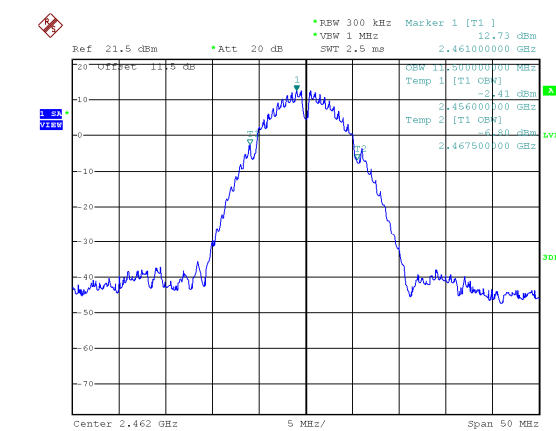


CH11

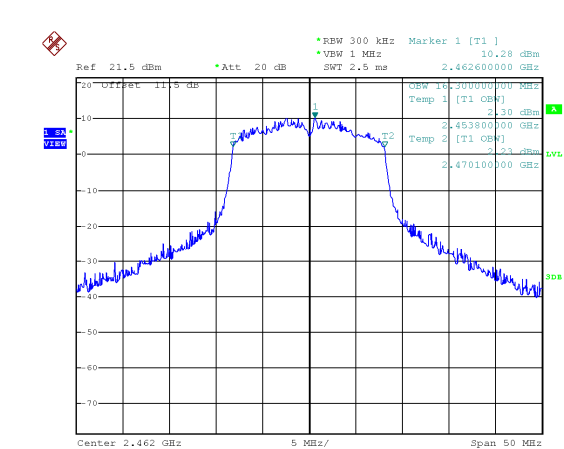





ANT B

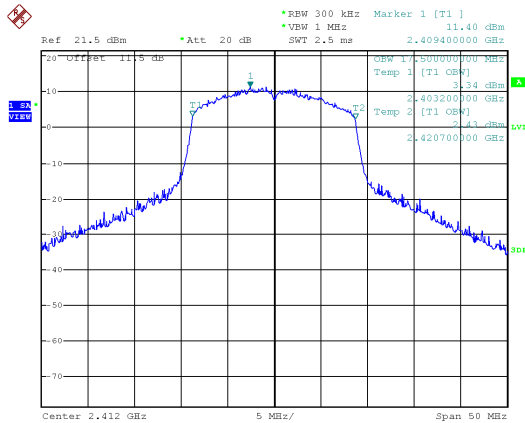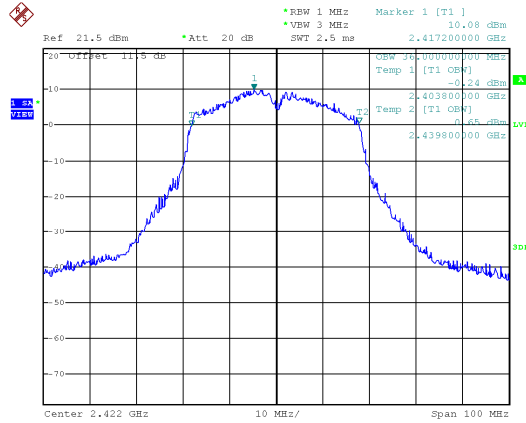Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT40
CH03


CH06

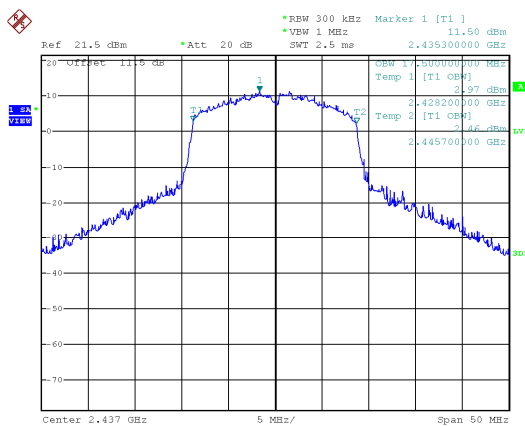


CH06

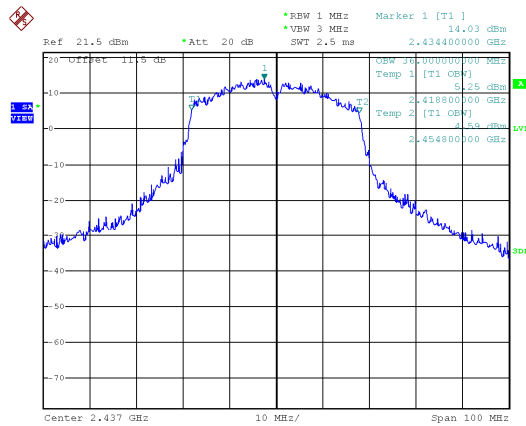

CH11

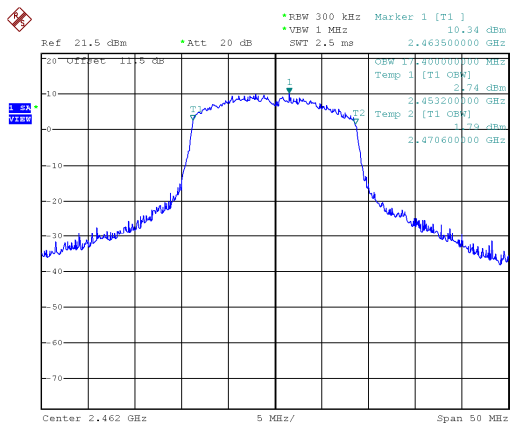

CH09

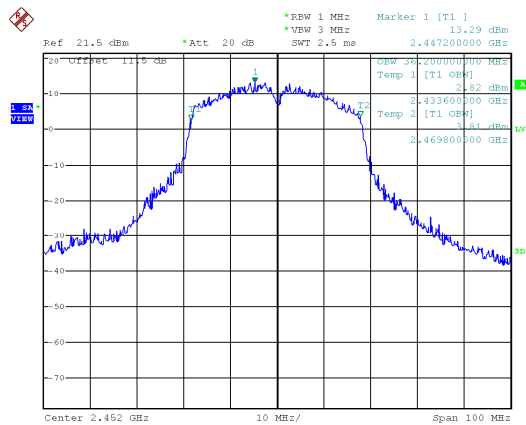



9. Maximum Peak and Average Output Power

9.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

9.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

9.3 Test Setup Layout



9.4 Test Result and Data

Temperature : 24°C

Humidity : 68%

Test Date : Aug. 16, 2017

Modulation Type	Channel	Frequency (MHz)	Peak Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
IEEE 802.11b (1Mbps)	01	2412	20.72	20.87	23.81	240.21	29.99
	06	2437	22.78	22.68	25.74	375.02	29.99
	11	2462	22.47	22.32	25.41	347.21	29.99
IEEE 802.11g (6Mbps)	01	2412	23.46	23.41	26.45	441.10	29.99
	06	2437	24.68	24.37	27.54	567.29	29.99
	11	2462	24.73	24.49	27.62	578.36	29.99
IEEE 802.11n HT20 (6.5Mbps)	01	2412	24.88	24.87	27.89	614.51	29.99
	06	2437	25.01	24.87	27.95	623.86	29.99
	11	2462	24.35	24.17	27.27	533.49	29.99
IEEE 802.11n HT40 (13.5Mbps)	03	2422	21.32	21.69	24.52	283.09	29.99
	06	2437	24.73	24.75	27.75	595.70	29.99
	09	2452	23.2	22.92	26.07	404.81	29.99



Modulation Type	Channel	Frequency (MHz)	Avg. Power Output (dBm)		Total Power (dBm)	Total Power (mW)	Power Limit (dBm)
			ANT A	ANT B			
IEEE 802.11b (1Mbps)	01	2412	17.51	17.73	20.63	115.66	29.99
	06	2437	19.52	19.45	22.50	177.64	29.99
	11	2462	19.23	19.2	22.23	166.93	29.99
IEEE 802.11g (6Mbps)	01	2412	16.68	17.09	19.90	97.73	29.99
	06	2437	17.57	17.29	20.44	110.73	29.99
	11	2462	17.85	17.96	20.92	123.47	29.99
IEEE 802.11n HT20 (6.5Mbps)	01	2412	18.22	18.75	21.50	141.36	29.99
	06	2437	19.35	19.19	22.28	169.08	29.99
	11	2462	17.63	17.47	20.56	113.79	29.99
IEEE 802.11n HT40 (13.5Mbps)	03	2422	13.76	14.2	17.00	50.07	29.99
	06	2437	18.57	19	21.80	151.38	29.99
	09	2452	16.8	16.43	19.63	91.82	29.99

Note: Average power is for reference only.



10. Power Spectral Density

10.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

10.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3kHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

10.3 Test Setup Layout



10.4 Test Result and Data

Temperature : 24°C


Humidity : 68%

Test Date : Aug. 16, 2017


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)		Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT A	ANT B				
IEEE 802.11b (1Mbps)	01	2412	-5.35	-4.63	-1.96	0.00	-1.96	7.99
	06	2437	-3.48	-2.72	-0.07	0.00	-0.07	7.99
	11	2462	-3.14	-3.62	-0.36	0.00	-0.36	7.99
IEEE 802.11g (6Mbps)	01	2412	-5.46	-5.31	-2.37	0.00	-2.37	7.99
	06	2437	-6.66	-7.24	-3.93	0.00	-3.93	7.99
	11	2462	-5.63	-6.2	-2.90	0.00	-2.90	7.99
IEEE 802.11n HT20 (6.5Mbps)	01	2412	-7.21	-6.25	-3.69	0.00	-3.69	7.99
	06	2437	-6.03	-5.53	-2.76	0.00	-2.76	7.99
	11	2462	-7.06	-8.14	-4.56	0.00	-4.56	7.99
IEEE 802.11n HT40 (13.5Mbps)	03	2422	-13.11	-13.07	-10.08	0.00	-10.08	7.99
	06	2437	-7.61	-7.17	-4.37	0.00	-4.37	7.99
	09	2452	-8.08	-8.76	-5.40	0.00	-5.40	7.99




ANT A
Modulation Type: 802.11b
CH01

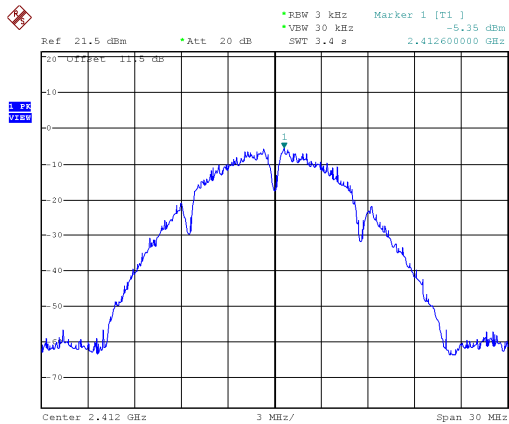


Modulation Type: 802.11g
CH01

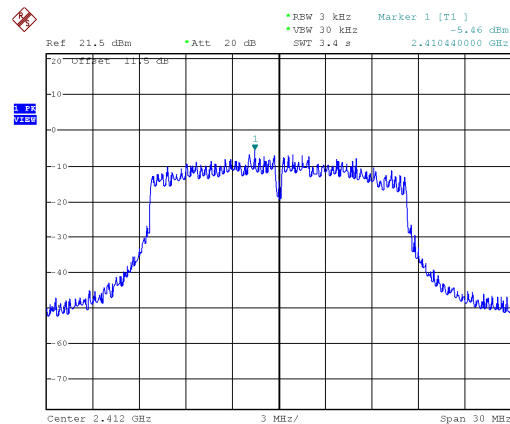


CH06

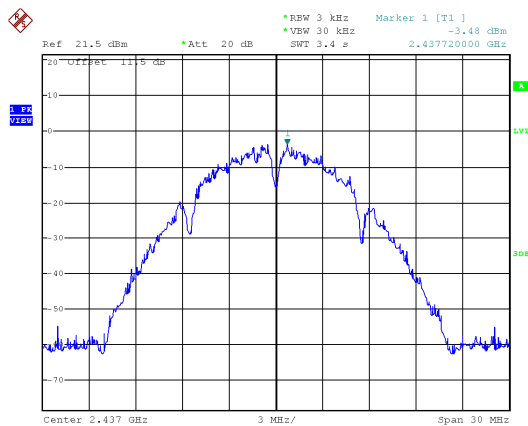


CH06

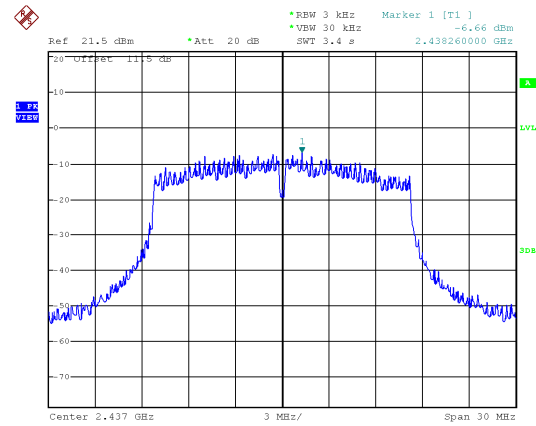

CH11

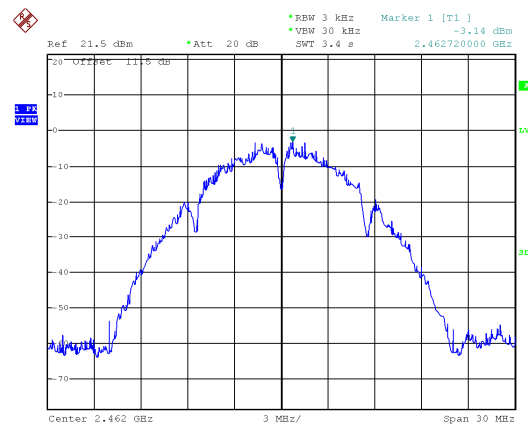


CH11

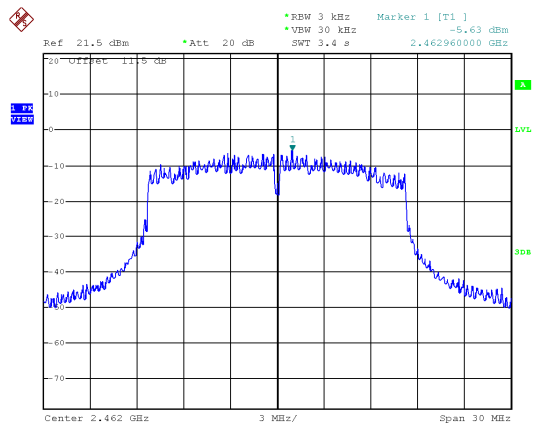





ANT A
Modulation Type: 802.11n HT20
CH01

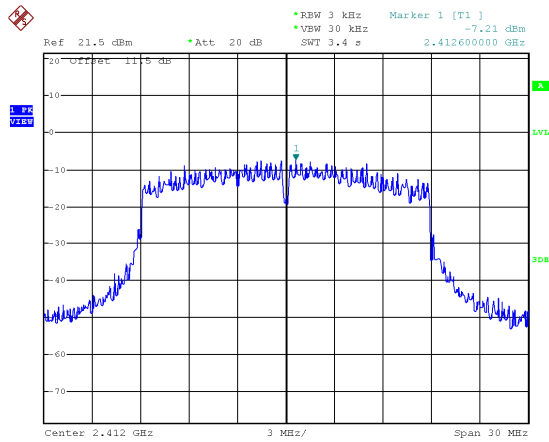


Modulation Type: 802.11n HT40
CH03

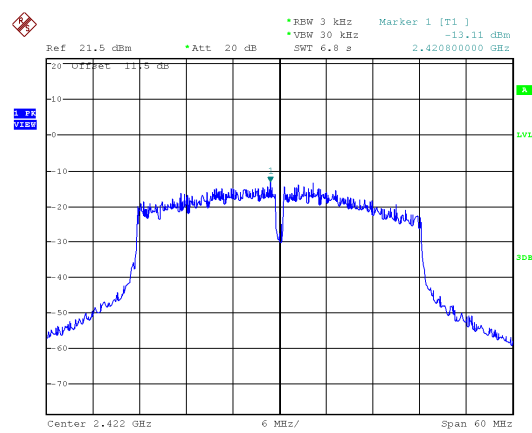


CH06

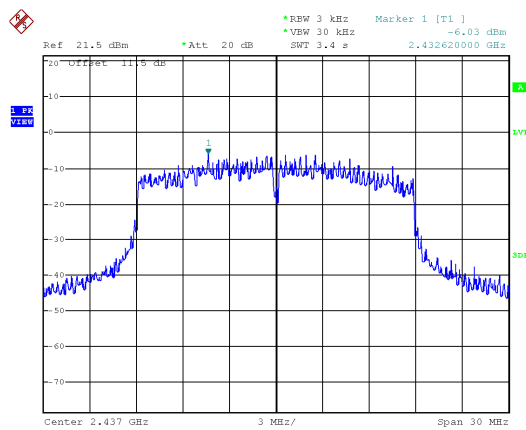


CH06

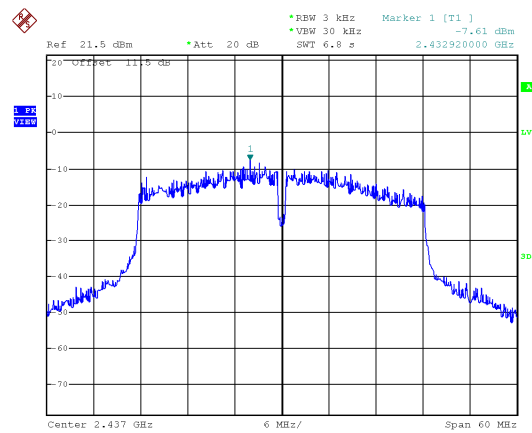

CH11

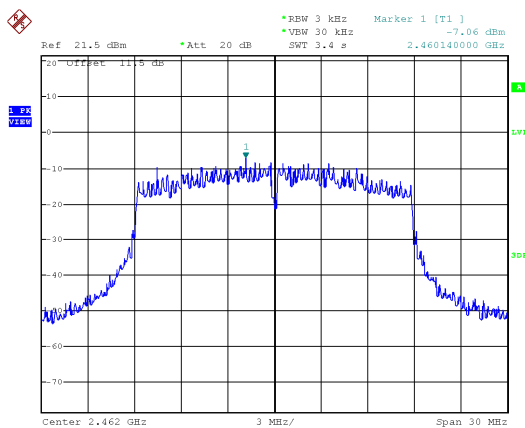

CH09

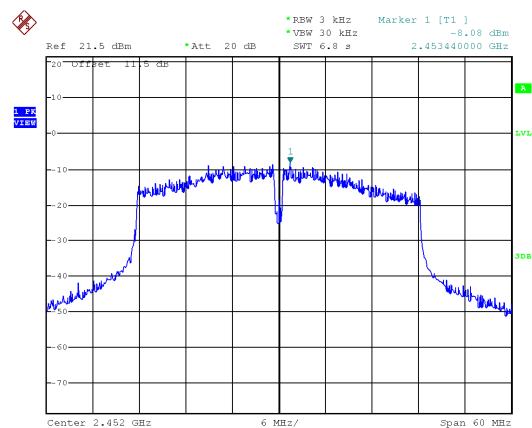




ANT B


Modulation Type: 802.11b

CH01

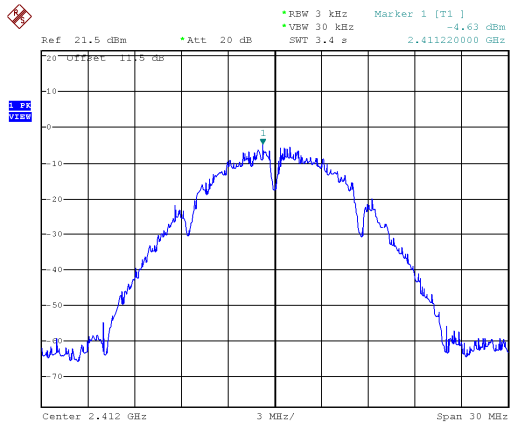


Modulation Type: 802.11g


CH01

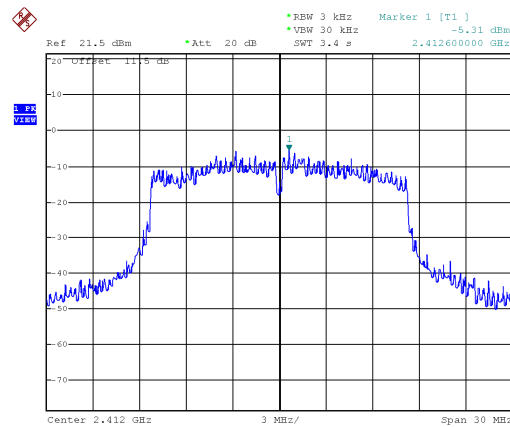


CH06

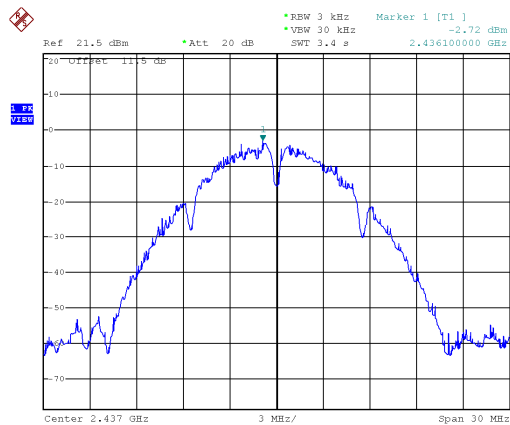


CH06

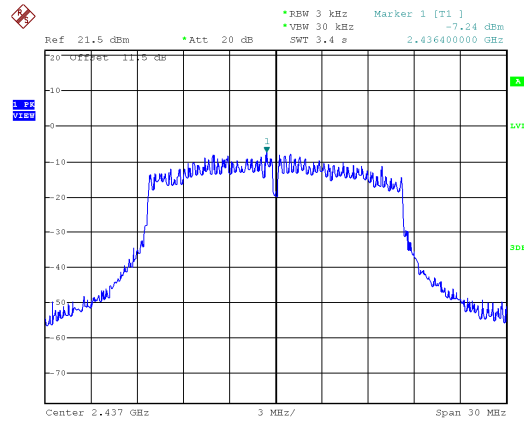

CH11

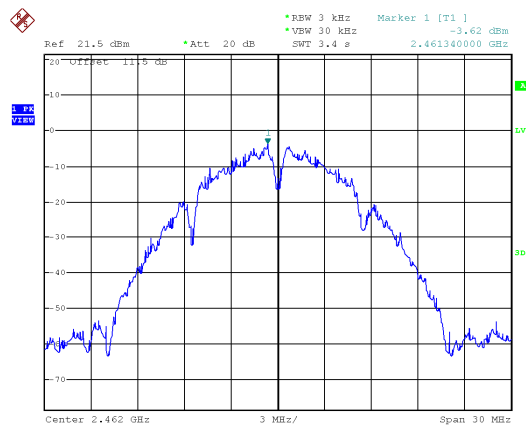


CH11

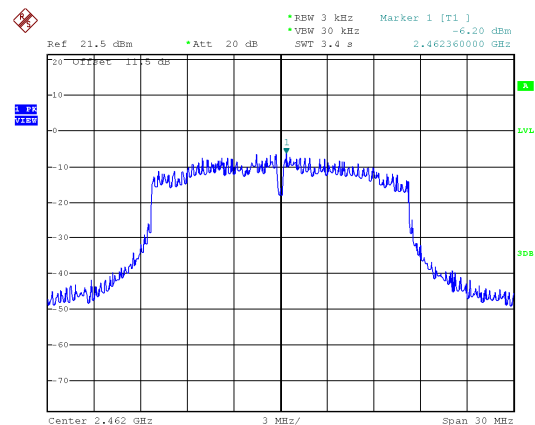





ANT B
Modulation Type: 802.11n HT20
CH01

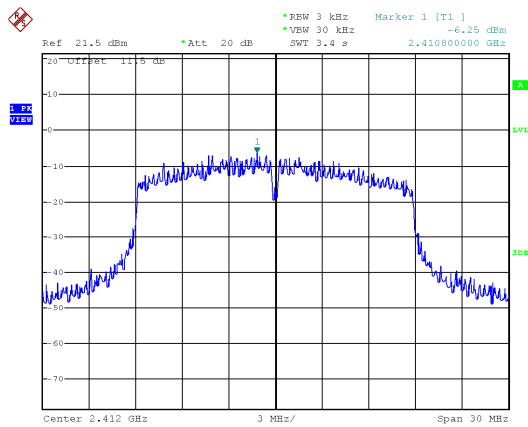


Modulation Type: 802.11n HT40
CH03

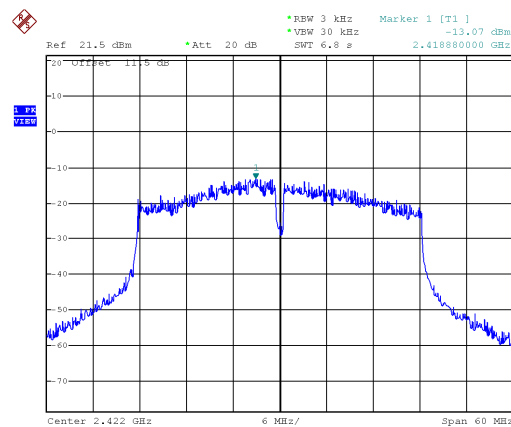


CH06

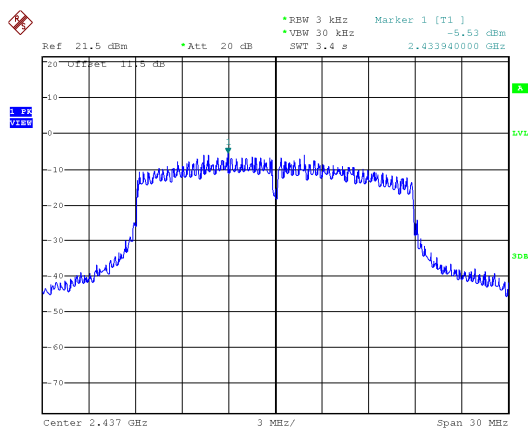

CH06

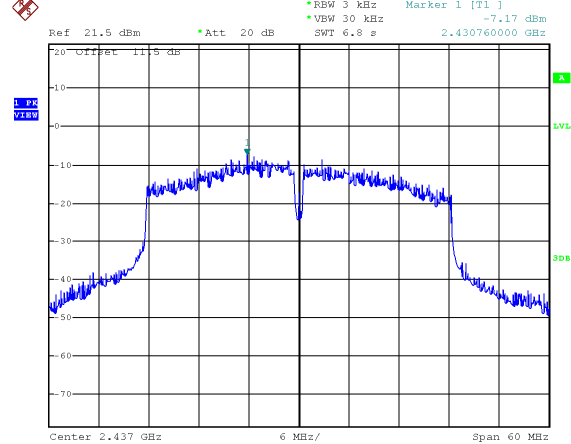

CH11

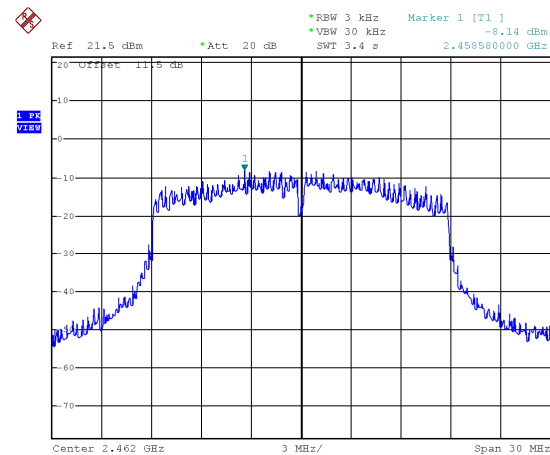

CH09

