

SM-MI-250 Silkscreen Artwork




File Name: SM-MI-250 Silkscreen Artwork v05

Date:	7/22/15	ME:	Amor Su
Revision:	v05 - FCC ID / IC number changed	PM:	Brian Chang
Designer:	Vivian Liu	Arena Number:	302-00204

Colors:

Process Black

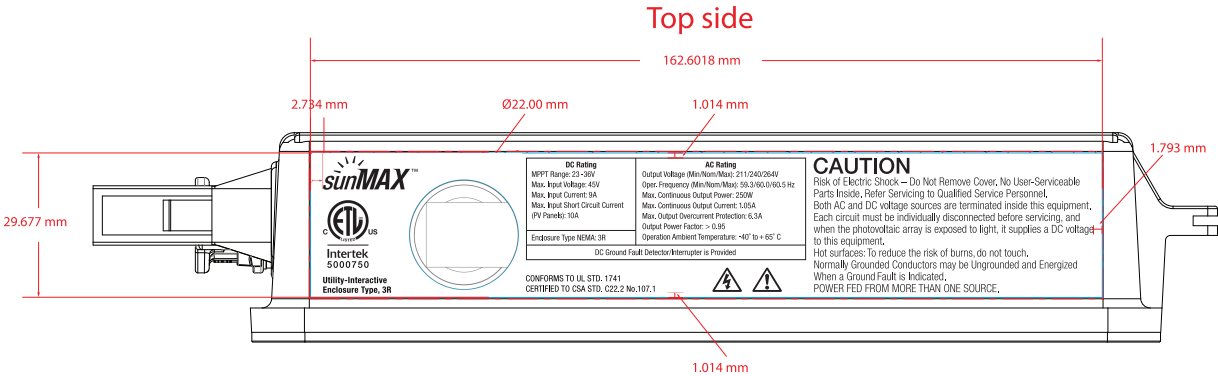



Intertek
5000750
Utility-Interactive
Enclosure Type, 3R

DC Rating	AC Rating
MPPT Range: 23-30V	Output Voltage (Min/Nom/Max): 211/240/264V
Max. Input Voltage: 45V	Oper. Frequency (Min/Nom/Max): 59.3/60.0/60.5 Hz
Max. Input Current: 9A	Max. Continuous Output Power: 250W
Max. Input Short Circuit Current (PV Panels): 10A	Max. Continuous Output Current: 1.05A
	Max. Output Overcurrent Protection: 6.3A
	Output Power Factor: > 0.95
	Operation Ambient Temperature: -40° to +65° C

Enclosure Type NEMA: 3R


DC Ground Fault Detector/Interrupter is Provided

CONFORMS TO UL STD. 1741
CERTIFIED TO CSA STD. C22.2 No.107.1



CAUTION
Risk of Electric Shock – Do Not Remove Cover. No User-Serviceable Parts Inside. Refer Servicing to Qualified Service Personnel.
Both AC and DC voltage sources are terminated inside this equipment. Each circuit must be individually disconnected before servicing, and when the photovoltaic array is exposed to light, it supplies a DC voltage to this equipment.
Hot surfaces: To reduce the risk of burns, do not touch. Normally Grounded Conductors may be Ungrounded and Energized When a Ground Fault is Indicated.
POWER FED FROM MORE THAN ONE SOURCE.

Process Black

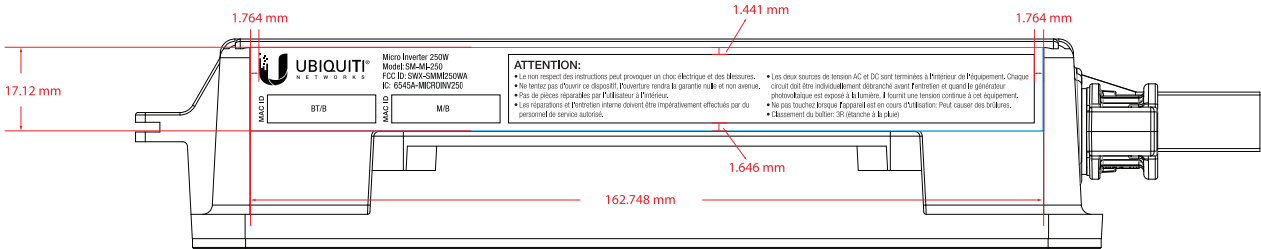


Micro Inverter 250W
Model SM-MI-250
FCC ID: 500-SMIM250WA
IC: 6545A-MICRONV250

BT/B	M/B

ATTENTION:

- Le non respect des instructions peut provoquer un choc électrique et des blessures.
- Ne tentez pas d'ouvrir ce dispositif. L'ouverture rendra la garantie nulle et non avenue.
- Pas de pièces réparables par l'utilisateur à l'intérieur.
- Les réparations et l'entretien interne doivent être impérativement effectués par du personnel de service autorisé.
- Les deux sources de tension AC et DC sont terminées à l'extérieur de l'équipement. Chaque circuit doit être individuellement débranché avant l'entretien et quand le générateur photovoltaïque est exposé à la lumière. Il fournit une tension continue à cet équipement.
- Ne pas toucher lorsque l'appareil est en cours d'utilisation. Peut causer des brûlures.
- Classement du boîtier: 3R (étanche à la pluie)

Process Black