


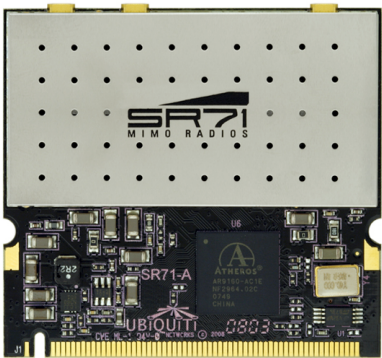

SR71-A

Outdoor 3x3 802.11n MIMO mini-PCI Module

Wireless Chipset				Atheros AR9160 with DFS SUPPORT				
Radio Operation				IEEE 802.11a/b/g/n				
Interface				32-bit mini-PCI Type IIIA				
Operation Voltage				3.3VDC				
Antenna Ports				(3) MMCX for 3x3 MIMO Operation				
Temperature Range				-20C to +70C (extended temp version up to +95C)				
Security				802.11i with AES-CCM & TKIP Encryption, 802.1x, 64/128/152bit WEP				
Data Rates				Legacy 802.11a/b/g (1-54Mbps), 802.11n (up to 300Mbps)				
RoHS Compliance				YES				
REGULATORY INFORMATION								
Wireless Modular Approvals				FCC , Industry Canada, CE (100mW limited)				
OPERATING FREQUENCY 2412MHz-2462MHz								
2.4GHz TX POWER SPECIFICATIONS					2.4GHz RX SPECIFICATIONS			
	DataRate	Avg. TX	Tolerance			DataRate	Sensitivity	Tolerance
11b/g	1-24Mbps	24 dBm	+/-2dB		11b/g	1-24Mbps	-97 dBm	+/-3dB
	36Mbps	22 dBm	+/-2dB			36Mbps	-90 dBm	+/-3dB
	48Mbps	20 dBm	+/-2dB			48Mbps	-86 dBm	+/-3dB
	54Mbps	19 dBm	+/-2dB			54Mbps	-84 dBm	+/-3dB
2.4GHz 11n HT20 / HT40	MCS0	24 dBm	+/-2dB		2.4GHz 11n HT20 / HT40	MCS0	-97 dBm	+/-3dB
	MCS1	24 dBm	+/-2dB			MCS1	-96 dBm	+/-3dB
	MCS2	24 dBm	+/-2dB			MCS2	-93 dBm	+/-3dB
	MCS3	22 dBm	+/-2dB			MCS3	-91 dBm	+/-3dB
	MCS4	22 dBm	+/-2dB			MCS4	-87 dBm	+/-3dB
	MCS5	22 dBm	+/-2dB			MCS5	-84 dBm	+/-3dB
	MCS6	18 dBm	+/-2dB			MCS6	-78 dBm	+/-3dB
	MCS7	15 dBm	+/-2dB			MCS7	-75 dBm	+/-3dB
	MCS8	24 dBm	+/-2dB			MCS8	-96 dBm	+/-3dB
	MCS9	24 dBm	+/-2dB			MCS9	-94 dBm	+/-3dB
	MCS10	22 dBm	+/-2dB			MCS10	-91 dBm	+/-3dB
	MCS11	20 dBm	+/-2dB			MCS11	-88 dBm	+/-3dB
	MCS12	20 dBm	+/-2dB			MCS12	-85 dBm	+/-3dB
	MCS13	17 dBm	+/-2dB			MCS13	-80 dBm	+/-3dB
	MCS14	17 dBm	+/-2dB	MCS14		-79 dBm	+/-3dB	
	MCS15	15 dBm	+/-2dB	MCS15		-76 dBm	+/-3dB	
OPERATING FREQUENCY 5745MHz-5825MHz								
5GHz TX POWER SPECIFICATIONS					5GHz RX SPECIFICATIONS			
	DataRate	Avg. TX	Tolerance			DataRate	Sensitivity	Tolerance
11a	1-24Mbps	24 dBm	+/-2dB		11a	1-24Mbps	-96 dBm	+/-3dB
	36Mbps	22 dBm	+/-2dB			36Mbps	-95 dBm	+/-3dB
	48Mbps	20 dBm	+/-2dB			48Mbps	-94 dBm	+/-3dB
	54Mbps	19 dBm	+/-2dB			54Mbps	-91 dBm	+/-3dB
5GHz 11n	MCS0	24 dBm	+/-2dB		5GHz 11n	MCS0	-96 dBm	+/-3dB
	MCS1	24 dBm	+/-2dB			MCS1	-95 dBm	+/-3dB
	MCS2	24 dBm	+/-2dB			MCS2	-92 dBm	+/-3dB
	MCS3	22 dBm	+/-2dB			MCS3	-90 dBm	+/-3dB
	MCS4	22 dBm	+/-2dB			MCS4	-86 dBm	+/-3dB
	MCS5	22 dBm	+/-2dB			MCS5	-83 dBm	+/-3dB
	MCS6	18 dBm	+/-2dB			MCS6	-77 dBm	+/-3dB
	MCS7	15 dBm	+/-2dB			MCS7	-74 dBm	+/-3dB
	MCS8	24 dBm	+/-2dB			MCS8	-95 dBm	+/-3dB
	MCS9	24 dBm	+/-2dB			MCS9	-93 dBm	+/-3dB
	MCS10	22 dBm	+/-2dB			MCS10	-90 dBm	+/-3dB
	MCS11	20 dBm	+/-2dB			MCS11	-87 dBm	+/-3dB
	MCS12	20 dBm	+/-2dB			MCS12	-84 dBm	+/-3dB
	MCS13	17 dBm	+/-2dB			MCS13	-79 dBm	+/-3dB
	MCS14	17 dBm	+/-2dB	MCS14		-78 dBm	+/-3dB	
	MCS15	15 dBm	+/-2dB	MCS15		-75 dBm	+/-3dB	
AVG. CURRENT CONSUMPTION INFORMATION								
MODE	6Mbps	MCS0	MCS15		MODE	6Mbps	MCS0	MCS15
100% TX	1.25A	1.25A	1.25A		100% TX	1.25A	1.25A	1.25A
Real-World	0.75A	0.80A	0.45A		Real-World	0.75A	0.80A	0.35A
Idle	0.30A	0.30A	0.30A		Idle	0.30A	0.30A	0.30A
RANGE PERFORMANCE								
Indoor (Antenna Dependent):				greater than 300m				
Outdoor (Antenna Dependent):				greater than 60km				
DRIVER INFORMATION								
Operating System Support				Ubiquiti LiteStationX + AirOS				
For help with special driver support, please e-mail support@ubnt.com								

COMPLIANCE INFORMATION

FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

The antennas used for this transmitter must be installed to provide a separation distance of at least 194.09cm from all persons and must not be located or operating in conjunction with any other antenna or transmitter.

INDUSTRY CANADA

This Class A digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

FCCID: SWX-SR71
IMPORTANT NOTE: EQUIPMENT MANUFACTURERS ARE RESPONSIBLE FOR DISPLAYING SR71 MODULAR FCC ID ON FINAL INTEGRATED EQUIPMENT

IMPORTANT NOTE REGARDING ANTENNA USE

Antenna Use (Point to Multipoint)

3x3 Operation

Chain0 Chain1 Chain2



UBIQUITI OMNI24-5

Antenna Use (Point to Point)

1x1 Operation

Chain0



UBIQUITI PANEL24-17



Pacific Wireless HDDA5W-32