



FCC RF Test Report

APPLICANT : Ubiquiti Networks, Inc.
EQUIPMENT : UniFi® AC In-Wall Wi-Fi Access Point
BRAND NAME : UBIQUITI
MODEL NAME : UAP-AC-IW
FCC ID : SWX-UAPACIW
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Oct. 04, 2016 and testing was completed on Oct. 23, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : SWX-UAPACIW

Page Number : 1 of 34

Report Issued Date : Dec. 08, 2016

Report Version : Rev. 02

Report Template No.: BU5-FR15EWLAC MA Version 1.4



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1 26dB & 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement	18
3.5 AC Conducted Emission Measurement	23
3.6 Frequency Stability Measurement	29
3.7 Automatically Discontinue Transmission	30
3.8 Antenna Requirements	31
4 LIST OF MEASURING EQUIPMENT	32
5 UNCERTAINTY OF EVALUATION	34
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. CONDUCTED SPURIOUS EMISSION IN THE RESTRICTED BAND	
APPENDIX F. CONDUCTED SPURIOUS EMISSION IN THE RESTRICTED BAND PLOTS	
APPENDIX G. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR6O0709-01B	Rev. 01	Initial issue of report	Dec. 01, 2016
FR6O0709-01B	Rev. 02	Revising Antenna Type	Dec. 08, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 17 dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	$\leq -17, -27$ dBm (depend on band) & 15.209(a)	Pass	Under limit 0.15 dB at 10440.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.00 dB at 0.294 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Ubiquiti Networks, Inc.

2580 Orchard Pkwy., San Jose, CA95131, U.S.A

1.2 Manufacturer

Ubiquiti Networks, Inc.

2580 Orchard Pkwy., San Jose, CA95131, U.S.A

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	UniFi® AC In-Wall Wi-Fi Access Point
Brand Name	UBIQUITI
Model Name	UAP-AC-IW
FCC ID	SWX-UAPACIW
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification			
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz		
Maximum Output Power to Antenna	802.11a : 19.20 dBm / 0.0832 W 802.11n HT20 : 21.59 dBm / 0.1442 W 802.11n HT40 : 23.45 dBm / 0.2213 W 802.11ac VHT20: 21.53 dBm / 0.1422 W 802.11ac VHT40: 24.17 dBm / 0.2612 W 802.11ac VHT80: 17.73 dBm / 0.0593 W		
99% Occupied Bandwidth	802.11a : 17.90 MHz 802.11n HT20 : 18.70 MHz 802.11n HT40 : 37.30 MHz 802.11ac VHT80 : 76.08 MHz		
Antenna Type / Gain	<Ant. 1> : Internal Antenna with gain 2.00 dBi <Ant. 2> : Internal Antenna with gain 2.00 dBi		
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Antenna Function Description			
	802.11 a/n/ac MIMO	Ant. 1 V	Ant. 2 V

Note: MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH13-HY	03CH12-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

MIMO Antenna

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + PoE + LAN Link

Ch. #		Band I : 5150-5250 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	36	36	38
M	Middle	44	44	-
H	High	48	48	46


Ch. #		Band I : 5150-5250 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	36	38	-
M	Middle	44	-	42
H	High	48	46	-

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

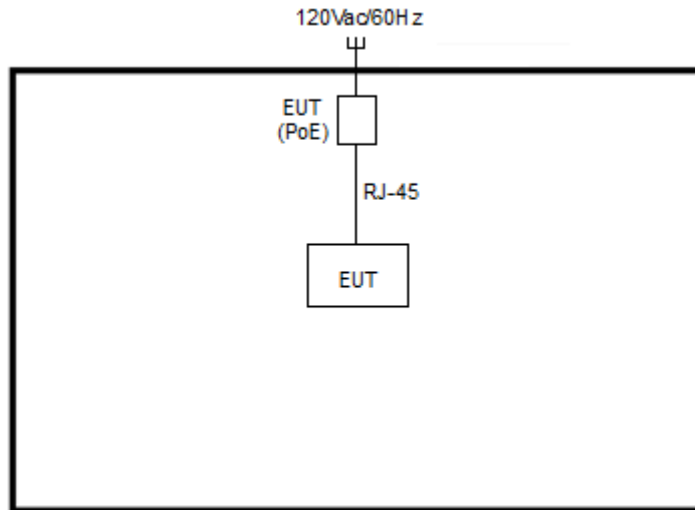

<AC Conducted Emission Mode>

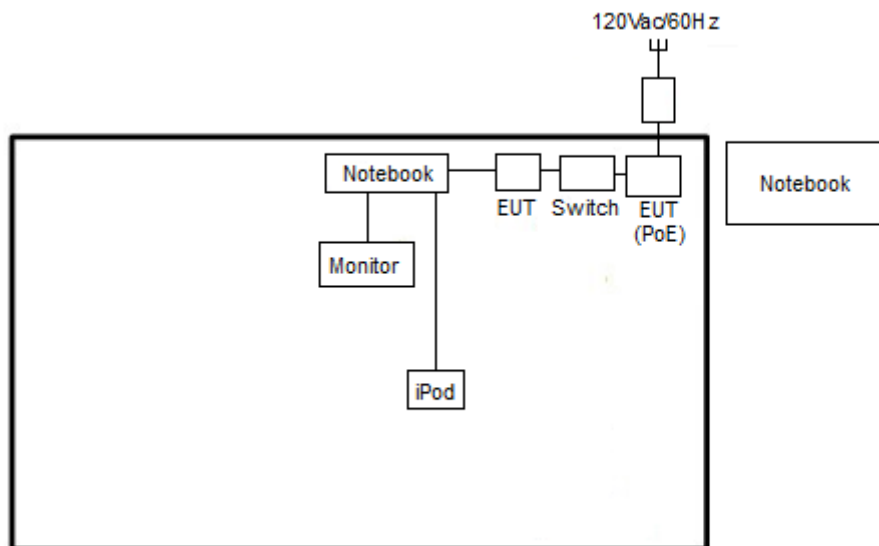

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
2.	Notebook	DELL	P20G	FCC DoC/ Contains FCC ID: QDS-BRCM1051	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
5.	AP	Ubiquiti	UAP-IW	N/A	Shielded, 0.8m	Unshielded, 1.8m
6.	Switch Hub	Ubiquiti	US-8	N/A	Shielded, 0.8m	Unshielded, 1.8m
7.	RJ-45 Cable	INVAX DATA CABLE	IVX011	N/A	N/A	Unshielded, 1.0m

2.5 EUT Operation Test Setup

For WLAN function, programmed RF utility, "Putty" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement
as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set
1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

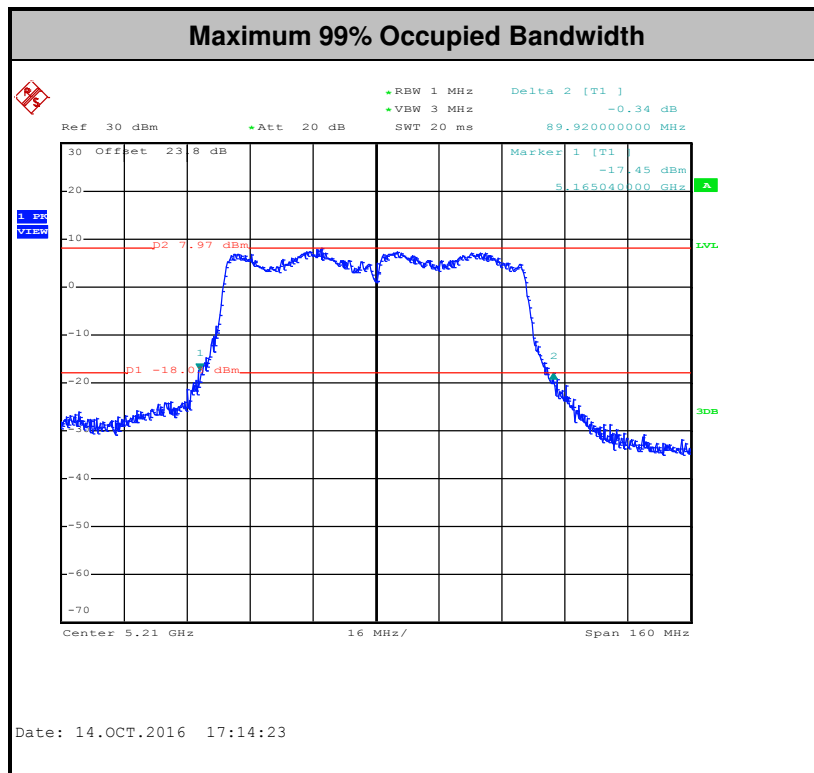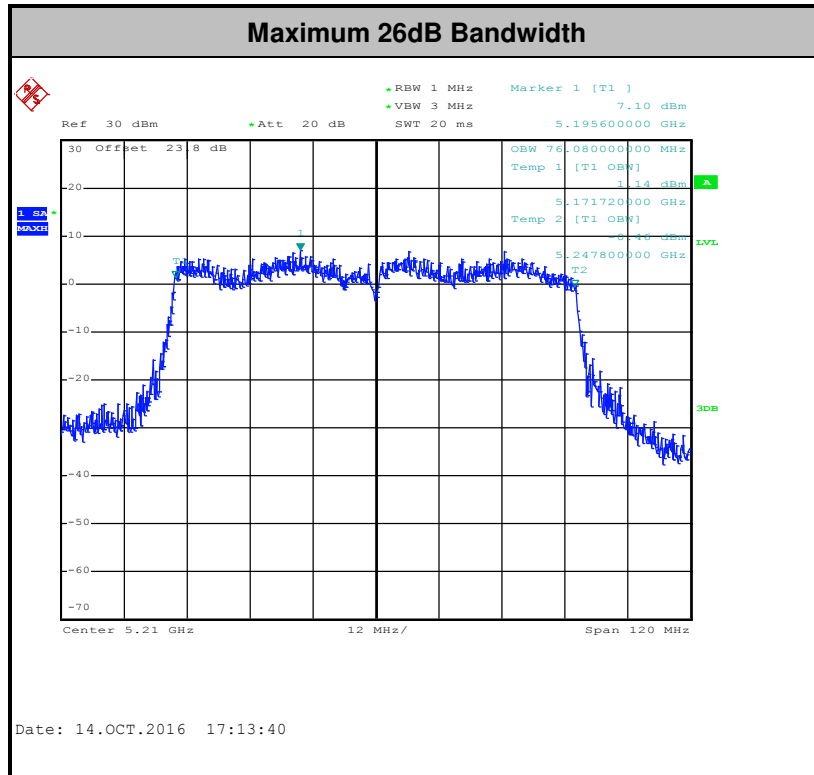

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03 for CDD modes.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

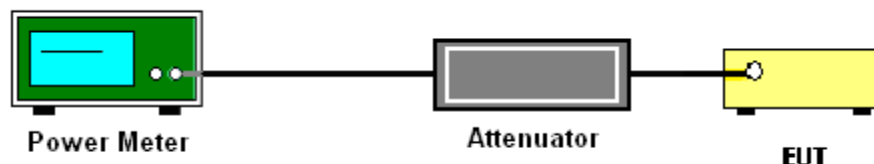

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output ANSI C63.10-2013.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

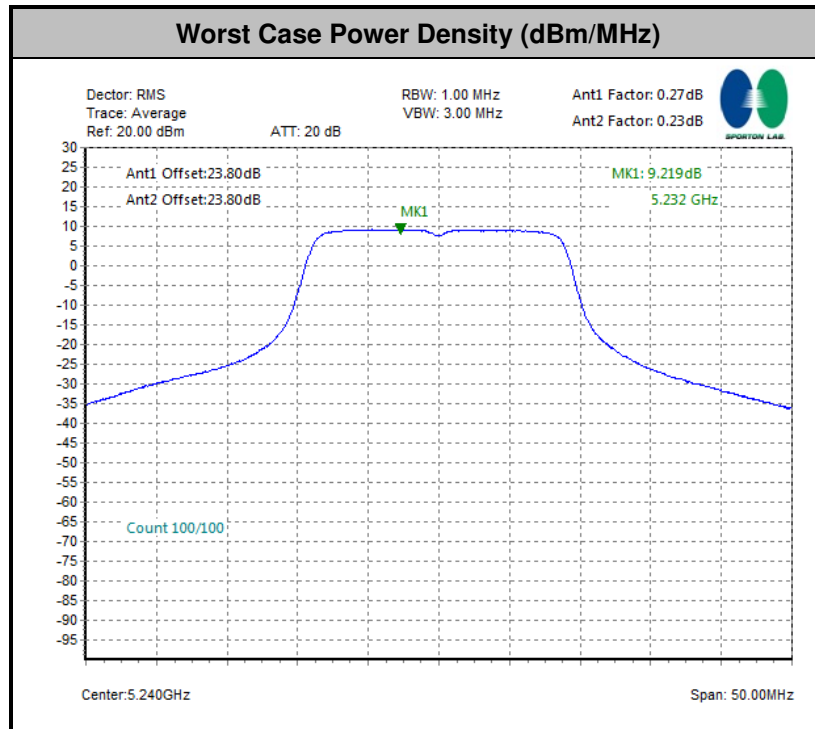

Note: Average Power Density (dB) = Measured value + Duty Factor

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 D02 v01r03 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For Conducted Measurement Setup:

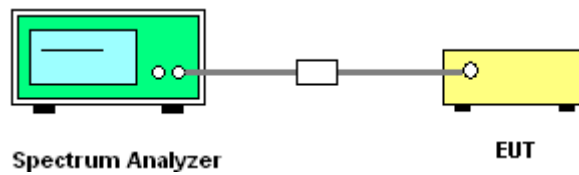


For radiated emissions below 30MHz

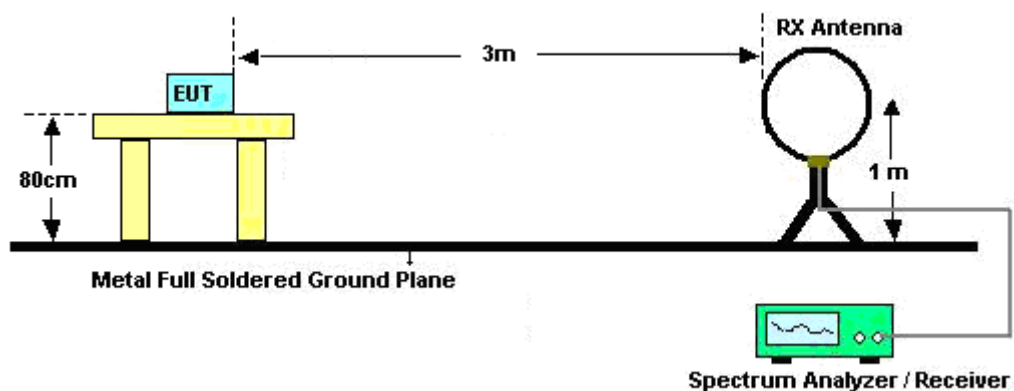

For radiated emissions from 30MHz to 1GHz

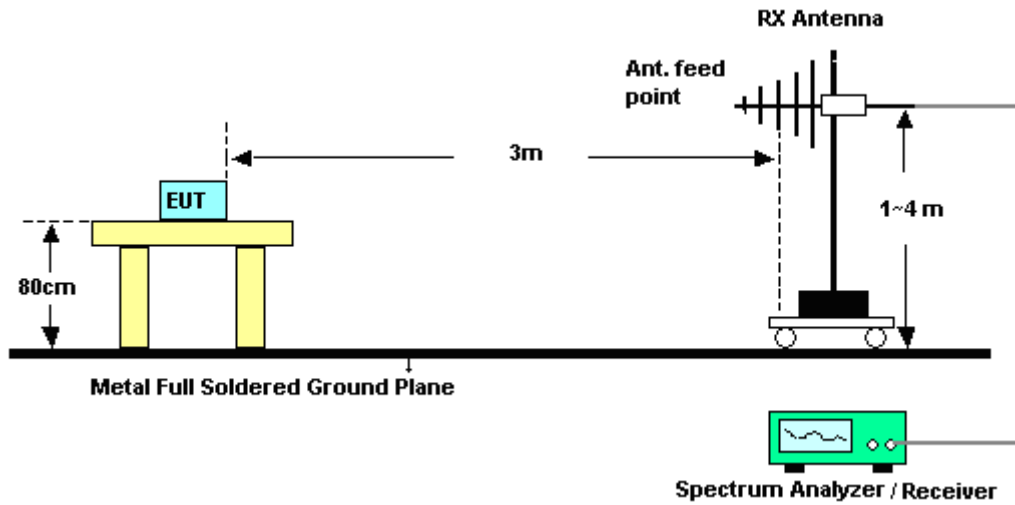

For radiated emissions above 1GHz

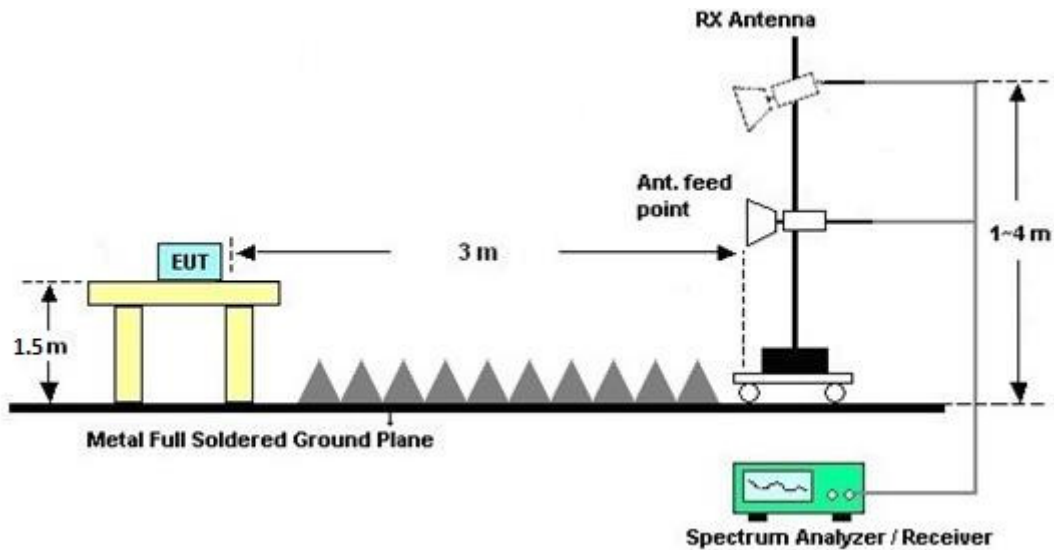

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.4.6 Test Result of Conducted Spurious at Band Edges in the Restricted Band

Please refer to Appendix E and F.

3.4.7 Test Result of Conducted Spurious Emission in the Restricted Band

Please refer to Appendix E and F.

3.4.8 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.4.9 Duty Cycle

Please refer to Appendix D.

3.4.10 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

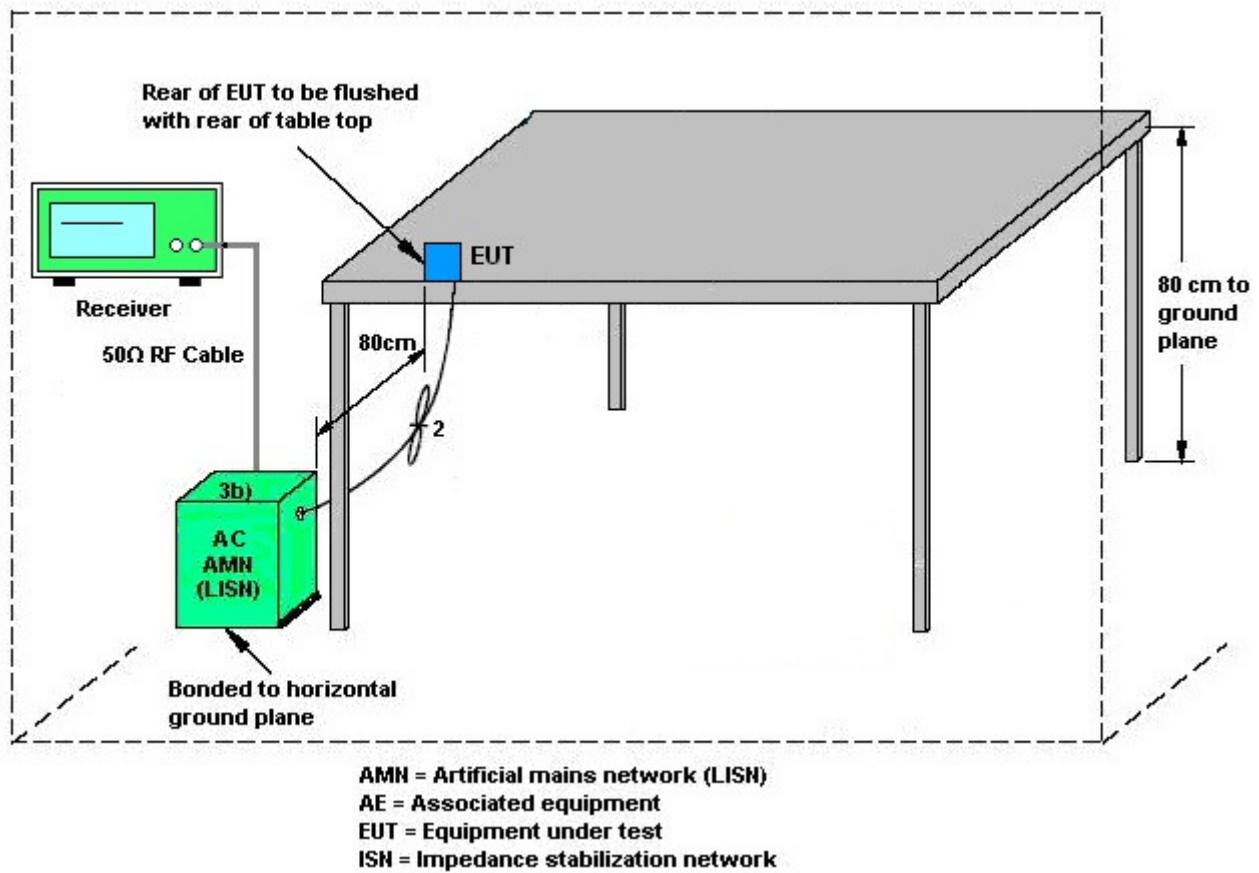

3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	23~24℃
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (5GHz) Link + PoE + LAN Link		

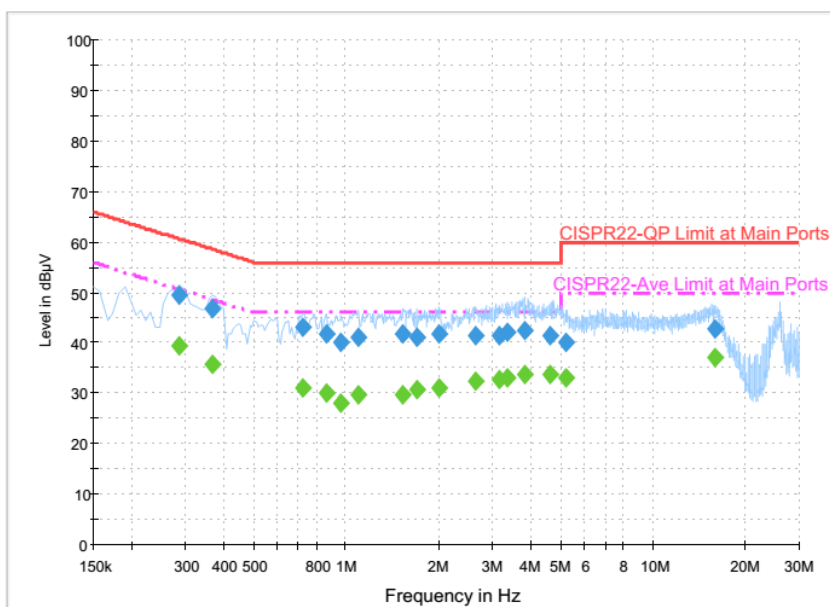


Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.286000	49.4	Off	L1	19.6	11.2	60.6
0.366000	46.7	Off	L1	19.6	11.9	58.6
0.726000	43.2	Off	L1	19.6	12.8	56.0
0.862000	41.8	Off	L1	19.7	14.2	56.0
0.966000	40.0	Off	L1	19.7	16.0	56.0
1.102000	41.1	Off	L1	19.7	14.9	56.0
1.534000	41.8	Off	L1	19.7	14.2	56.0
1.702000	41.1	Off	L1	19.7	14.9	56.0
2.022000	41.7	Off	L1	19.7	14.3	56.0
2.654000	41.5	Off	L1	19.4	14.5	56.0
3.150000	41.5	Off	L1	19.7	14.5	56.0
3.366000	42.1	Off	L1	19.7	13.9	56.0
3.830000	42.3	Off	L1	19.8	13.7	56.0
4.630000	41.5	Off	L1	19.9	14.5	56.0
5.230000	40.1	Off	L1	19.9	19.9	60.0
15.894000	42.7	Off	L1	20.5	17.3	60.0




Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (5GHz) Link + PoE + LAN Link		

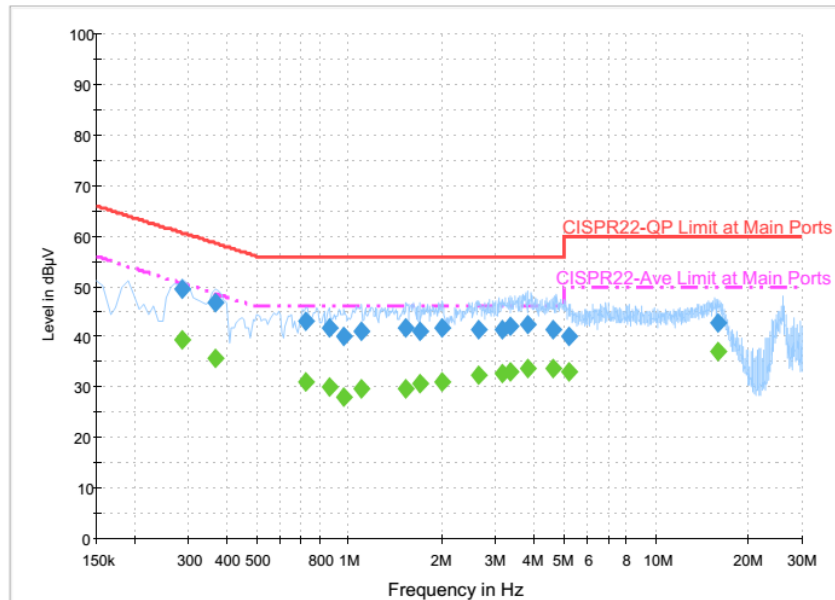**Final Result : Average**

Frequency (MHz)	Average (dB μ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.286000	39.4	Off	L1	19.6	11.2	50.6
0.366000	35.8	Off	L1	19.6	12.8	48.6
0.726000	31.2	Off	L1	19.6	14.8	46.0
0.862000	30.0	Off	L1	19.7	16.0	46.0
0.966000	28.0	Off	L1	19.7	18.0	46.0
1.102000	29.6	Off	L1	19.7	16.4	46.0
1.534000	29.9	Off	L1	19.7	16.1	46.0
1.702000	30.6	Off	L1	19.7	15.4	46.0
2.022000	31.1	Off	L1	19.7	14.9	46.0
2.654000	32.4	Off	L1	19.4	13.6	46.0
3.150000	32.8	Off	L1	19.7	13.2	46.0
3.366000	33.3	Off	L1	19.7	12.7	46.0
3.830000	33.8	Off	L1	19.8	12.2	46.0
4.630000	33.6	Off	L1	19.9	12.4	46.0
5.230000	32.9	Off	L1	19.9	17.1	50.0
15.894000	37.3	Off	L1	20.5	12.7	50.0




Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (5GHz) Link + PoE + LAN Link		

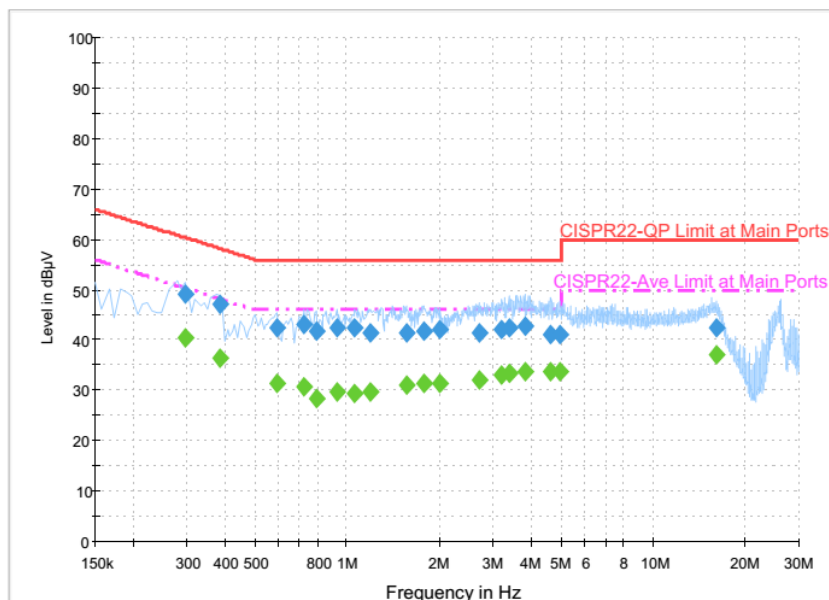**Final Result : QuasiPeak**

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.294000	49.2	Off	N	19.6	11.2	60.4
0.382000	47.0	Off	N	19.6	11.2	58.2
0.590000	42.5	Off	N	19.6	13.5	56.0
0.726000	43.1	Off	N	19.6	12.9	56.0
0.790000	41.8	Off	N	19.6	14.2	56.0
0.926000	42.4	Off	N	19.6	13.6	56.0
1.062000	42.6	Off	N	19.6	13.4	56.0
1.190000	41.5	Off	N	19.6	14.5	56.0
1.558000	41.6	Off	N	19.7	14.4	56.0
1.782000	42.0	Off	N	19.7	14.0	56.0
2.014000	42.0	Off	N	19.7	14.0	56.0
2.694000	41.5	Off	N	19.4	14.5	56.0
3.198000	42.1	Off	N	19.7	13.9	56.0
3.382000	42.4	Off	N	19.7	13.6	56.0
3.830000	42.8	Off	N	19.7	13.2	56.0
4.654000	41.0	Off	N	19.8	15.0	56.0
4.950000	41.3	Off	N	19.8	14.7	56.0
16.158000	42.5	Off	N	20.5	17.5	60.0



Test Mode :	Mode 1	Temperature :	23~24℃
Test Engineer :	Arthur Hsieh	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (5GHz) Link + PoE + LAN Link		

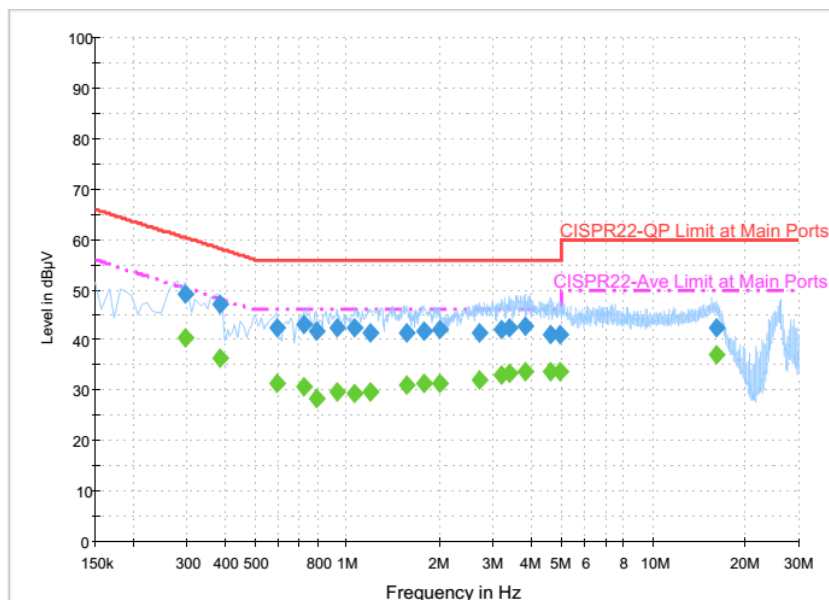**Final Result : QuasiPeak**

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.294000	40.4	Off	N	19.6	10.0	50.4
0.382000	36.3	Off	N	19.6	11.9	48.2
0.590000	31.3	Off	N	19.6	14.7	46.0
0.726000	30.7	Off	N	19.6	15.3	46.0
0.790000	28.5	Off	N	19.6	17.5	46.0
0.926000	29.6	Off	N	19.6	16.4	46.0
1.062000	29.4	Off	N	19.6	16.6	46.0
1.190000	29.7	Off	N	19.6	16.3	46.0
1.558000	31.1	Off	N	19.7	14.9	46.0
1.782000	31.3	Off	N	19.7	14.7	46.0
2.014000	31.5	Off	N	19.7	14.5	46.0
2.694000	32.1	Off	N	19.4	13.9	46.0
3.198000	33.2	Off	N	19.7	12.8	46.0
3.382000	33.5	Off	N	19.7	12.5	46.0
3.830000	33.7	Off	N	19.7	12.3	46.0
4.654000	33.8	Off	N	19.8	12.2	46.0
4.950000	33.8	Off	N	19.8	12.2	46.0
16.158000	37.2	Off	N	20.5	12.8	50.0

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup



3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

	Chain Port 0	Chain Port 1	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant 1 (dBi)	Ant 2 (dBi)	(dBi)	(dBi)	(dB)	(dB)
5.2G Band	2.00	2.00	2.00	5.01	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Dec. 02, 2015	Oct. 04 2016 ~ Oct. 22, 2016	Dec. 01, 2016	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Jul. 28, 2016	Oct. 04 2016 ~ Oct. 22, 2016	Jul. 27, 2017	Conducted (TH02-HY)
Power Sensor	DARE	RPR3006W	13I00030SN O31	9kHz~6GHz	Sep. 21, 2016	Oct. 04, 2016 ~ Oct. 22, 2016	Sep. 20, 2017	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 28, 2016	Oct. 04, 2016 ~ Oct. 22, 2016	Jul. 27, 2017	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 17, 2016	Oct. 04, 2016 ~ Oct. 22, 2016	Jun. 16, 2017	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 11, 2016	Oct. 04 2016 ~ Oct. 22, 2016	Jul. 10, 2017	Conducted (TH02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Oct. 21, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Oct. 21, 2016	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Oct. 21, 2016	Dec. 01, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 14, 2015	Oct. 21, 2016	Dec. 13, 2016	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Oct. 19, 2016 ~ Oct. 23, 2016	Sep. 01, 2017	Radiation (03CH12-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 20, 2015	Oct. 19, 2016 ~ Oct. 23, 2016	Nov. 19, 2016	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 21, 2016	Oct. 19, 2016 ~ Oct. 23, 2016	Mar. 20, 2017	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N 0602	30MHz~1GHz	Nov. 17, 2015	Oct. 19, 2016 ~ Oct. 23, 2016	Nov. 16, 2016	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 21, 2015	Oct. 19, 2016 ~ Oct. 23, 2016	Dec. 20, 2016	Radiation (03CH12-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Oct. 19, 2016~ Oct. 23, 2016	Feb. 14, 2017	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 02, 2015	Oct. 19, 2016 ~ Oct. 23, 2016	Nov. 01, 2016	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1815698	1GHz~18GHz	Dec. 14, 2015	Oct. 19, 2016 ~ Oct. 23, 2016	Dec. 13, 2016	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Jan. 30, 2016	Oct. 19, 2016 ~ Oct. 23, 2016	Jan. 29, 2017	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Oct. 19, 2016 ~ Oct. 23, 2016	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Oct. 19, 2016 ~ Oct. 23, 2016	N/A	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 02, 2015	Oct. 19, 2016 ~ Oct. 23, 2016	Nov. 01, 2016	Radiation (03CH12-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 24, 2016	Oct. 07, 2016 ~ Oct. 18, 2016	Aug. 23, 2017	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9030A	MY54200485	3Hz ~ 44GHz	Mar. 21, 2016	Oct. 07, 2016 ~ Oct. 18, 2016	Mar. 20, 2017	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 20, 2015	Oct. 07, 2016 ~ Oct. 18, 2016	Nov. 19, 2016	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	N/A	Mar. 10, 2016	Oct. 07, 2016 ~ Oct. 18, 2016	Mar. 09, 2017	Radiation (03CH13-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
---	-----



Appendix A. Conducted Test Results

Test Engineer:	AC Chang and Aking Chang	Temperature:	21~25	°C
Test Date:	2016/10/04 ~ 2016/10/22	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	17.60	17.70	23.65	23.45	-	-	22.46	-	
11a	6Mbps	2	44	5220	17.90	17.60	23.10	22.70	-	-	22.46	-	
11a	6Mbps	2	48	5240	17.65	17.75	24.50	23.40	-	-	22.47	-	
HT20	MCS0	2	36	5180	18.70	18.65	24.20	25.30	-	-	22.71	-	
HT20	MCS0	2	44	5220	18.55	18.70	25.10	24.50	-	-	22.68	-	
HT20	MCS0	2	48	5240	18.65	18.70	25.30	24.45	-	-	22.71	-	
HT40	MCS0	2	38	5190	36.80	36.70	46.08	45.00	-	-	23.01	-	
HT40	MCS0	2	46	5230	37.30	37.10	73.08	62.19	-	-	23.01	-	
VHT80	MCS0	2	42	5210	76.08	75.84	89.92	87.84	-	-	23.01	-	

TEST RESULTS DATA
Average Power Table

FCC Band I															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	36	5180	0.25	0.22	16.09	15.22	18.69	30.00		2.00			Pass
11a	6Mbps	2	44	5220	0.25	0.22	16.10	15.52	18.83	30.00		2.00			Pass
11a	6Mbps	2	48	5240	0.25	0.22	16.45	15.92	19.20	30.00		2.00			Pass
HT20	MCS0	2	36	5180	0.27	0.23	16.88	16.23	19.58	30.00		2.00			Pass
HT20	MCS0	2	44	5220	0.27	0.23	18.37	17.75	21.08	30.00		2.00			Pass
HT20	MCS0	2	48	5240	0.27	0.23	18.77	18.38	21.59	30.00		2.00			Pass
HT40	MCS0	2	38	5190	0.53	0.46	15.04	14.05	17.58	30.00		2.00			Pass
HT40	MCS0	2	46	5230	0.53	0.46	20.85	20.00	23.45	30.00		2.00			Pass
VHT20	MCS0	2	36	5180	0.27	0.23	16.82	16.21	19.53	30.00		2.00			Pass
VHT20	MCS0	2	44	5220	0.27	0.23	18.27	17.73	21.02	30.00		2.00			Pass
VHT20	MCS0	2	48	5240	0.27	0.23	18.70	18.34	21.53	30.00		2.00			Pass
VHT40	MCS0	2	38	5190	0.46	0.49	14.93	13.94	17.47	30.00		2.00			Pass
VHT40	MCS0	2	46	5230	0.46	0.49	21.57	20.70	24.17	30.00		2.00			Pass
VHT80	MCS0	2	42	5210	0.89	0.90	15.18	14.20	17.73	30.00		2.00			Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	36	5180	0.25	0.22			7.08	17.00		5.01		Pass	
11a	6Mbps	2	44	5220	0.25	0.22			6.72	17.00		5.01		Pass	
11a	6Mbps	2	48	5240	0.25	0.22			7.05	17.00		5.01		Pass	
HT20	MCS0	2	36	5180	0.27	0.23			7.64	17.00		5.01		Pass	
HT20	MCS0	2	44	5220	0.27	0.23			8.73	17.00		5.01		Pass	
HT20	MCS0	2	48	5240	0.27	0.23			9.22	17.00		5.01		Pass	
HT40	MCS0	2	38	5190	0.53	0.46			2.45	17.00		5.01		Pass	
HT40	MCS0	2	46	5230	0.53	0.46			8.88	17.00		5.01		Pass	
VHT80	MCS0	2	42	5210	0.89	0.90			0.82	17.00		5.01		Pass	

TEST RESULTS DATA
Frequency Stability

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	36	5180	5179.975	-0.025	-4.83	50	120	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	-30	120	
11a	6Mbps	1	36	5180	5179.950	-0.050	-9.65	20	132	
11a	6Mbps	1	36	5180	5179.975	-0.025	-4.83	20	108	
11a	6Mbps	1	36	5180	5179.950	-0.050	-9.65	20	120	



Appendix B. Radiated Spurious Emission

Test Engineer :	Peter Chiu, Karl Hou, and Nick Yu	Temperature :	21~23°C
		Relative Humidity :	54~58%

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		5002.6	59.2	-14.8	74	47.21	31.6	11.34	30.95	229	2	P	H
		5145.6	47.46	-6.54	54	35.48	31.72	11.21	30.95	229	2	A	H
	*	5180	95.28	-	-	83.27	31.75	11.21	30.95	229	2	P	H
	*	5180	86.39	-	-	74.38	31.75	11.21	30.95	229	2	A	H
													H
													H
		5019.5	59.35	-14.65	74	47.35	31.61	11.34	30.95	324	32	P	V
		5091	47.55	-6.45	54	35.55	31.68	11.27	30.95	324	32	A	V
	*	5180	96.59	-	-	84.58	31.75	11.21	30.95	324	32	P	V
	*	5180	88.01	-	-	76	31.75	11.21	30.95	324	32	A	V
													V
													V
802.11a CH 44 5220MHz		5062.66	60.26	-13.74	74	48.29	31.65	11.27	30.95	224	0	P	H
		5086.06	47.52	-6.48	54	35.53	31.67	11.27	30.95	224	0	A	H
	*	5220	95.24	-	-	83.24	31.77	11.18	30.95	224	0	P	H
	*	5220	85.68	-	-	73.68	31.77	11.18	30.95	224	0	A	H
		5389.92	60.63	-13.37	74	48.07	31.91	11.6	30.95	224	0	P	H
		5426.4	48.11	-5.89	54	35.49	31.93	11.64	30.95	224	0	A	H
		5079.04	58.84	-15.16	74	46.85	31.67	11.27	30.95	321	32	P	V
		5116.74	47.63	-6.37	54	35.65	31.69	11.24	30.95	321	32	A	V
	*	5220	97.4	-	-	85.4	31.77	11.18	30.95	321	32	P	V
	*	5220	87.27	-	-	75.27	31.77	11.18	30.95	321	32	A	V
		5367.84	59.69	-14.31	74	47.23	31.89	11.52	30.95	321	32	P	V
		5409.6	48.09	-5.91	54	35.52	31.92	11.6	30.95	321	32	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 48 5240MHz		5107.12	59.13	-14.87	74	47.15	31.69	11.24	30.95	210	137	P	H
		5002.08	47.47	-6.53	54	35.48	31.6	11.34	30.95	210	137	A	H
	*	5240	95.74	-	-	83.64	31.79	11.26	30.95	210	137	P	H
	*	5240	86.93	-	-	74.83	31.79	11.26	30.95	210	137	A	H
		5399.76	59.09	-14.91	74	46.52	31.92	11.6	30.95	210	137	P	H
		5452.08	48.15	-5.85	54	35.5	31.96	11.64	30.95	210	137	A	H
		5028.08	58.96	-15.04	74	46.97	31.63	11.31	30.95	329	31	P	V
		5124.8	47.52	-6.48	54	35.52	31.71	11.24	30.95	329	31	A	V
	*	5240	97.1	-	-	85	31.79	11.26	30.95	329	31	P	V
	*	5240	88.18	-	-	76.08	31.79	11.26	30.95	329	31	A	V
		5358.48	59.28	-14.72	74	46.83	31.88	11.52	30.95	329	31	P	V
		5442.96	48.08	-5.92	54	35.44	31.95	11.64	30.95	329	31	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	63.91	-10.09	74	64.66	39.59	17.13	57.47	397	319	P	H
		10360	50.23	-3.77	54	50.98	39.59	17.13	57.47	397	319	A	H
		15540	44.68	-29.32	74	43.34	38.26	21.61	58.53	100	0	P	H
													H
		10360	67.75	-6.25	74	68.5	39.59	17.13	57.47	371	315	P	V
		10360	53.46	-0.54	54	54.21	39.59	17.13	57.47	371	315	A	V
		15540	47.8	-26.2	74	46.46	38.26	21.61	58.53	100	0	P	V
													V
802.11a CH 44 5220MHz		10440	64.01	-9.99	74	64.43	39.69	17.22	57.33	400	320	P	H
		10440	50.55	-3.45	54	50.97	39.69	17.22	57.33	400	320	A	H
		15660	49.26	-24.74	74	47.74	38.11	21.7	58.29	100	0	P	H
													H
		10440	67.57	-6.43	74	67.99	39.69	17.22	57.33	395	316	P	V
		10440	53.59	-0.41	54	54.01	39.69	17.22	57.33	395	316	A	V
		15660	51.2	-22.8	74	49.68	38.11	21.7	58.29	100	0	P	V
													V
802.11a CH 48 5240MHz		10480	64.7	-9.3	74	64.89	39.77	17.27	57.23	400	321	P	H
		10480	50.24	-3.76	54	50.43	39.77	17.27	57.23	400	321	A	H
		15720	49.08	-24.92	74	47.44	38.03	21.76	58.15	100	0	P	H
													H
		10480	67.22	-6.78	74	67.41	39.77	17.27	57.23	392	315	P	V
		10480	53.51	-0.49	54	53.7	39.77	17.27	57.23	392	315	A	V
		15720	52.66	-21.34	74	51.02	38.03	21.76	58.15	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5101.4	58.69	-15.31	74	46.72	31.68	11.24	30.95	237	3	P	H
		5010.66	47.67	-6.33	54	35.67	31.61	11.34	30.95	237	3	A	H
	*	5178	98.42	-	-	86.41	31.75	11.21	30.95	237	3	P	H
	*	5178	87.08	-	-	75.07	31.75	11.21	30.95	237	3	A	H
													H
													H
		5072.54	59.38	-14.62	74	47.39	31.67	11.27	30.95	355	33	P	V
		5143.52	47.5	-6.5	54	35.52	31.72	11.21	30.95	355	33	A	V
	*	5178	99.61	-	-	87.6	31.75	11.21	30.95	355	33	P	V
	*	5178	88.29	-	-	76.28	31.75	11.21	30.95	355	33	A	V
													V
													V
802.11n HT20 CH 44 5220MHz		5116.48	59.26	-14.74	74	47.28	31.69	11.24	30.95	349	353	P	H
		5126.62	47.55	-6.45	54	35.55	31.71	11.24	30.95	349	353	A	H
	*	5222	100.01	-	-	87.93	31.77	11.26	30.95	349	353	P	H
	*	5222	88.46	-	-	76.38	31.77	11.26	30.95	349	353	A	H
		5432.88	59.74	-14.26	74	47.1	31.95	11.64	30.95	349	353	P	H
		5430.72	48.22	-5.78	54	35.58	31.95	11.64	30.95	349	353	A	H
		5096.46	59.35	-14.65	74	47.35	31.68	11.27	30.95	322	30	P	V
		5061.1	47.79	-6.21	54	35.82	31.65	11.27	30.95	322	30	A	V
	*	5222	101.02	-	-	88.94	31.77	11.26	30.95	322	30	P	V
	*	5222	89.35	-	-	77.27	31.77	11.26	30.95	322	30	A	V
		5358.48	59.62	-14.38	74	47.17	31.88	11.52	30.95	322	30	P	V
		5444.4	48.08	-5.92	54	35.44	31.95	11.64	30.95	322	30	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 48 5240MHz		5135.72	59.12	-14.88	74	47.12	31.71	11.24	30.95	344	354	P	H
		5127.4	47.5	-6.5	54	35.5	31.71	11.24	30.95	344	354	A	H
	*	5242	100.54	-	-	88.43	31.8	11.26	30.95	344	354	P	H
	*	5242	89.23	-	-	77.12	31.8	11.26	30.95	344	354	A	H
		5425.2	59.57	-14.43	74	46.95	31.93	11.64	30.95	344	354	P	H
		5453.76	48.24	-5.76	54	35.59	31.96	11.64	30.95	344	354	A	H
		5122.72	58.8	-15.2	74	46.8	31.71	11.24	30.95	340	32	P	V
		5003.12	47.49	-6.51	54	35.5	31.6	11.34	30.95	340	32	A	V
	*	5242	101.54	-	-	89.43	31.8	11.26	30.95	340	32	P	V
	*	5242	90.2	-	-	78.09	31.8	11.26	30.95	340	32	A	V
		5437.68	59.59	-14.41	74	46.95	31.95	11.64	30.95	340	32	P	V
		5437.2	48.14	-5.86	54	35.5	31.95	11.64	30.95	340	32	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	66.41	-7.59	74	67.16	39.59	17.13	57.47	259	5	P	H
		10360	51.5	-2.5	54	52.25	39.59	17.13	57.47	259	5	A	H
		15540	50.21	-23.79	74	48.87	38.26	21.61	58.53	100	0	P	H
													H
		10360	68.7	-5.3	74	69.45	39.59	17.13	57.47	235	135	P	V
		10360	53.61	-0.39	54	54.36	39.59	17.13	57.47	235	135	A	V
		15540	51.74	-22.26	74	50.4	38.26	21.61	58.53	100	0	P	V
													V
802.11n HT20 CH 44 5220MHz		10440	68.34	-5.66	74	68.66	39.79	17.22	57.33	268	6	P	H
		10440	53.67	-0.33	54	53.99	39.79	17.22	57.33	268	6	A	H
		15660	58.21	-15.79	74	56.84	37.96	21.7	58.29	391	46	P	H
		15660	43.59	-10.41	54	42.22	37.96	21.7	58.29	391	46	A	H
		10440	68.2	-5.8	74	68.62	39.69	17.22	57.33	191	67	P	V
		10440	53.85	-0.15	54	54.27	39.69	17.22	57.33	191	67	A	V
		15660	62.3	-11.7	74	60.93	37.96	21.7	58.29	169	58	P	V
		15660	46.62	-7.38	54	45.25	37.96	21.7	58.29	169	58	A	V
802.11n HT20 CH 48 5240MHz		10480	67.34	-0.86	68.2	67.43	39.87	17.27	57.23	258	1	P	H
		15720	55.46	-18.54	74	54.04	37.81	21.76	58.15	139	167	P	H
		15720	40.25	-13.75	54	38.83	37.81	21.76	58.15	139	167	A	H
													H
		10480	67.66	-0.54	68.2	67.75	39.87	17.27	57.23	189	116	P	V
		15720	59.56	-14.44	74	58.14	37.81	21.76	58.15	213	58	P	V
		15720	44.53	-9.47	54	43.11	37.81	21.76	58.15	213	58	A	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5012.48	58.09	-15.91	74	46.18	31.52	11.34	30.95	338	346	P	H
		5036.14	48.13	-5.87	54	36.24	31.53	11.31	30.95	338	346	A	H
	*	5190	91	-	-	79.09	31.68	11.18	30.95	338	346	P	H
	*	5190	80.27	-	-	68.36	31.68	11.18	30.95	338	346	A	H
		5427.36	59.46	-14.54	74	46.85	31.92	11.64	30.95	338	346	P	H
		5360.88	48.86	-5.14	54	36.42	31.87	11.52	30.95	338	346	A	H
		5103.74	59.59	-14.41	74	47.7	31.6	11.24	30.95	346	39	P	V
		5015.86	48.24	-5.76	54	36.33	31.52	11.34	30.95	346	39	A	V
	*	5190	93.21	-	-	81.3	31.68	11.18	30.95	346	39	P	V
	*	5190	82.4	-	-	70.49	31.68	11.18	30.95	346	39	A	V
		5455.92	59.8	-14.2	74	47.16	31.95	11.64	30.95	346	39	P	V
		5355.84	48.83	-5.17	54	36.41	31.85	11.52	30.95	346	39	A	V
802.11n HT40 CH 46 5230MHz		5017.94	59.2	-14.8	74	47.29	31.52	11.34	30.95	211	135	P	H
		5046.8	48.38	-5.62	54	36.47	31.55	11.31	30.95	211	135	A	H
	*	5230	97.36	-	-	85.32	31.73	11.26	30.95	211	135	P	H
	*	5230	86.35	-	-	74.31	31.73	11.26	30.95	211	135	A	H
		5363.28	58.96	-15.04	74	46.52	31.87	11.52	30.95	211	135	P	H
		5403.36	48.78	-5.22	54	36.23	31.9	11.6	30.95	211	135	A	H
		5067.6	58.9	-15.1	74	47.01	31.57	11.27	30.95	333	38	P	V
		5133.38	48.33	-5.67	54	36.41	31.63	11.24	30.95	333	38	A	V
	*	5236	99.26	-	-	87.22	31.73	11.26	30.95	333	38	P	V
	*	5236	88.44	-	-	76.4	31.73	11.26	30.95	333	38	A	V
		5436.24	59.33	-14.67	74	46.71	31.93	11.64	30.95	333	38	P	V
		5426.4	49.02	-4.98	54	36.41	31.92	11.64	30.95	333	38	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	58.72	-15.28	74	59.31	39.71	17.13	57.43	254	1	P	H
		10380	45.66	-8.34	54	46.25	39.71	17.13	57.43	254	1	A	H
		15570	45.52	-28.48	74	44.19	38.15	21.64	58.46	100	0	P	H
													H
		10380	61.44	-12.56	74	62.03	39.71	17.13	57.43	181	132	P	V
		10380	48.7	-5.3	54	49.29	39.71	17.13	57.43	181	132	A	V
		15570	47.01	-26.99	74	45.68	38.15	21.64	58.46	100	0	P	V
													V
802.11n HT40 CH 46 5230MHz		10460	64.09	-9.91	74	64.35	39.82	17.22	57.3	250	2	P	H
		10460	51.08	-2.92	54	51.34	39.82	17.22	57.3	250	2	A	H
		15690	57.82	-16.18	74	56.43	37.88	21.73	58.22	165	233	P	H
		15690	43.48	-10.52	54	42.09	37.88	21.73	58.22	165	233	A	H
		10460	66.06	-7.94	74	66.32	39.82	17.22	57.3	180	131	P	V
		10460	53.35	-0.65	54	53.61	39.82	17.22	57.3	180	131	A	V
		15690	64.85	-9.15	74	63.46	37.88	21.73	58.22	168	59	P	V
		15690	49.75	-4.25	54	48.36	37.88	21.73	58.22	168	59	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5087.88	58.73	-15.27	74	46.83	31.58	11.27	30.95	335	347	P	H
		5017.68	49.62	-4.38	54	37.71	31.52	11.34	30.95	335	347	A	H
	*	5210	89.25	-	-	77.3	31.72	11.18	30.95	335	347	P	H
	*	5210	78.7	-	-	66.75	31.72	11.18	30.95	335	347	A	H
		5401.92	59.63	-14.37	74	47.08	31.9	11.6	30.95	335	347	P	H
		5438.16	50.23	-3.77	54	37.61	31.93	11.64	30.95	335	347	A	H
		5139.88	58.68	-15.32	74	46.74	31.65	11.24	30.95	334	37	P	V
		5143.52	49.9	-4.1	54	37.99	31.65	11.21	30.95	334	37	A	V
	*	5210	90.76	-	-	78.81	31.72	11.18	30.95	334	37	P	V
	*	5210	80.05	-	-	68.1	31.72	11.18	30.95	334	37	A	V
		5435.28	59.5	-14.5	74	46.88	31.93	11.64	30.95	334	37	P	V
		5415.84	50.01	-3.99	54	37.44	31.92	11.6	30.95	334	37	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 1 5150~5250MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		10420	55.73	-18.27	74	56.15	39.77	17.18	57.37	245	6	P	H
		10420	42.84	-11.16	54	43.26	39.77	17.18	57.37	245	6	A	H
		15630	45.92	-28.08	74	44.54	38	21.7	58.32	100	0	P	H
													H
		10420	59.26	-14.74	74	59.68	39.77	17.18	57.37	182	124	P	V
		10420	45.83	-8.17	54	46.25	39.77	17.18	57.37	182	124	A	V
		15630	46.42	-27.58	74	45.04	38	21.7	58.32	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 LF		78.6	33.68	-6.32	40	51.4	13.66	1.06	32.44	-	-	P	H
		137.46	34.53	-8.97	43.5	47.52	18	1.43	32.42	-	-	P	H
		234.39	45.13	-0.87	46	58.2	17.45	1.83	32.35	100	56	QP	H
	*	234.39	46.64	0.64	46	59.71	17.45	1.83	32.35	100	56	P	H
		447	32.67	-13.33	46	39.01	23.15	2.89	32.38	-	-	P	H
		650	33.73	-12.27	46	36.52	26	3.61	32.4	-	-	P	H
		712.3	34.16	-11.84	46	36.07	26.58	3.89	32.38	-	-	P	H
													H
													H
													H
													H
													H
		36.75	35.76	-4.24	40	45.26	22.18	0.78	32.46	100	311	QP	V
		36.75	37.77	-2.23	40	47.27	22.18	0.78	32.46	100	311	P	V
		77.25	36.47	-3.53	40	54.3	13.55	1.06	32.44	100	116	QP	V
		77.25	39.66	-0.34	40	57.49	13.55	1.06	32.44	100	116	P	V
		234.39	39.6	-6.4	46	52.67	17.45	1.83	32.35	-	-	P	V
		374.9	27.08	-18.92	46	35.16	21.81	2.44	32.33	-	-	P	V
		500.2	29.7	-16.3	46	34.71	24.2	3.19	32.4	-	-	P	V
		650	33.92	-12.08	46	36.71	26	3.61	32.4	-	-	P	V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Peter Chiu, Karl Hou, and Nick Yu	Temperature :	21~23°C
		Relative Humidity :	54~58%




Note symbol

-L	Low channel location
-R	High channel location






Band 1 - 5150~5250MHz




WIFI 802.11a (Band Edge @ 3m)

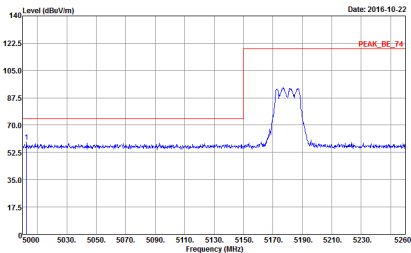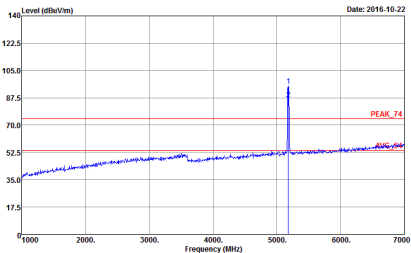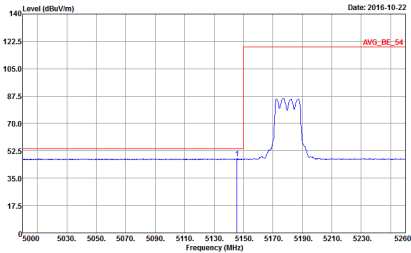WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH36 5180MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 1	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 1
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 1	Left blank

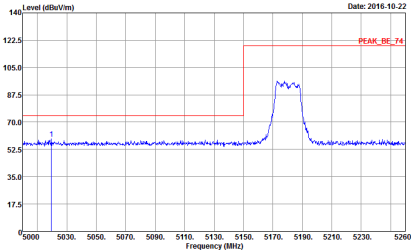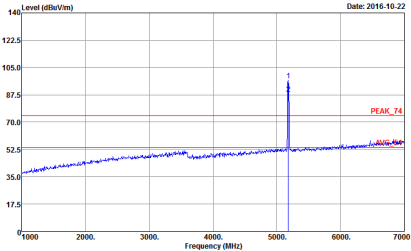
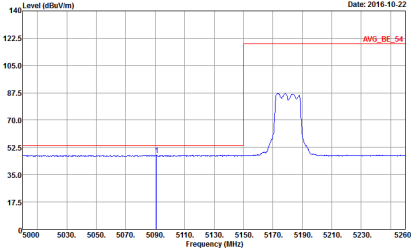


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH36 5180MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN 9120D_1328 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 600709 : 1	 Site : 03CH12-HY Condition : PEAK_74 3m HORN 9120D_1328 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 600709 : 1
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN 9120D_1328 VERTICAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Project : Peak Mode : 600709 : 1	Left blank

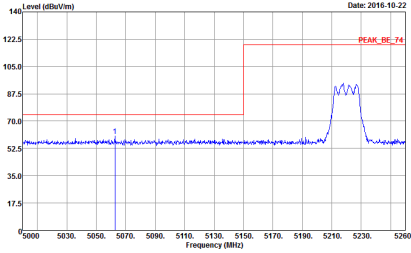
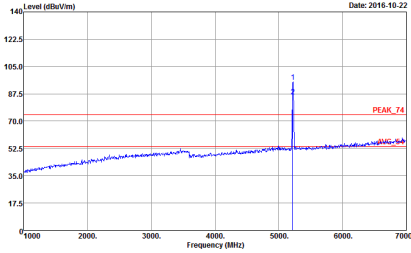
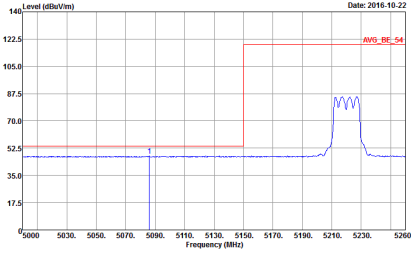


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 2	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 2
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 2	Left blank

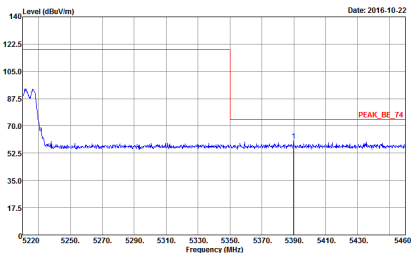
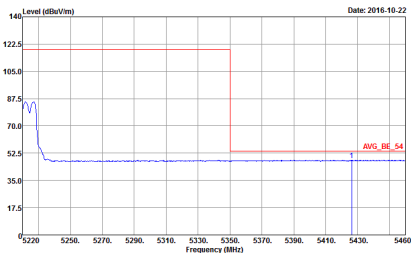


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 2	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 2	Left blank

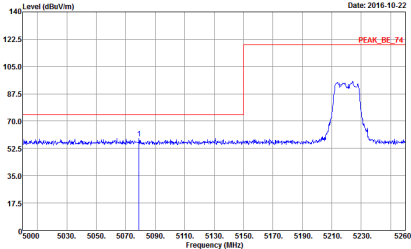
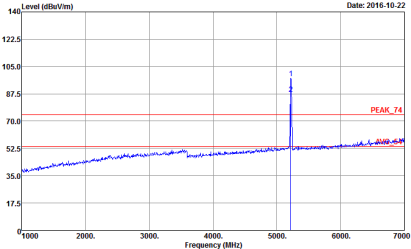
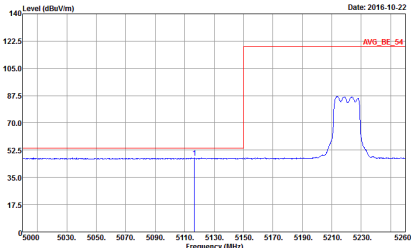


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 2	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 2
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 2	Left blank

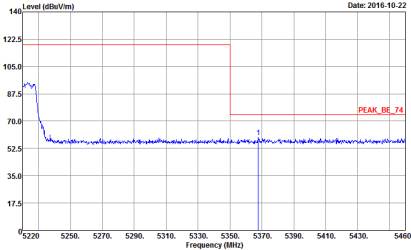
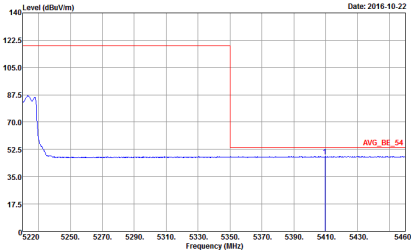


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 600709 : 2	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Project : Peak Mode : 600709 : 2	Left blank

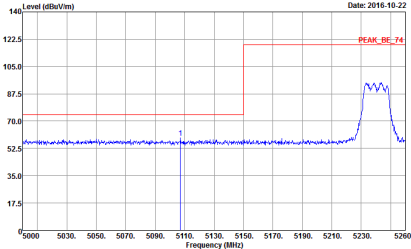
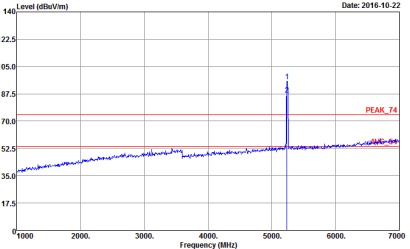
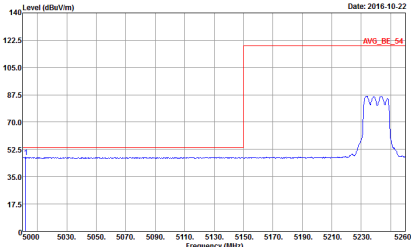


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 3	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 3
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 3	Left blank

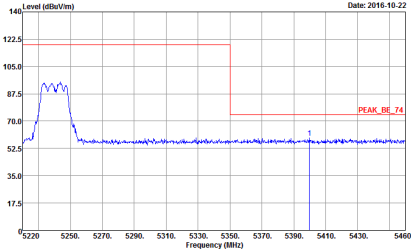
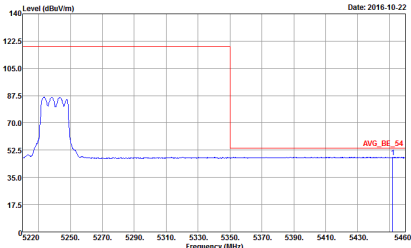


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 600709 Mode : 3	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Project : 600709 Mode : 3	Left blank

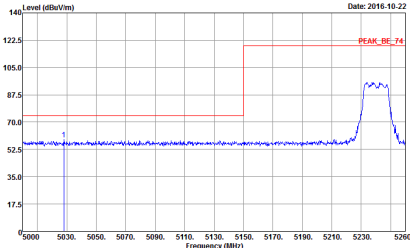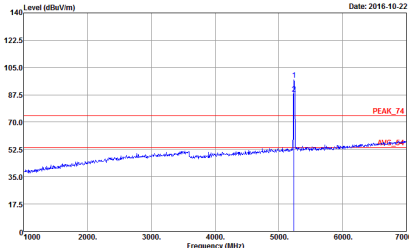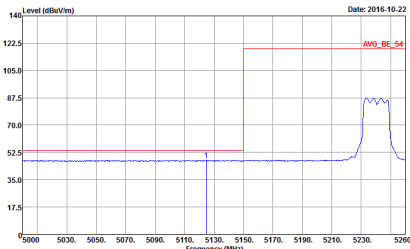




WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 3	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 3
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 3	Left blank

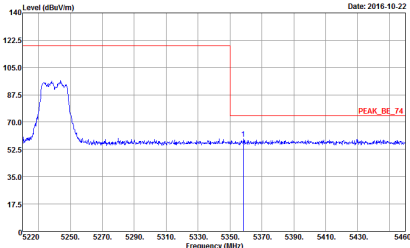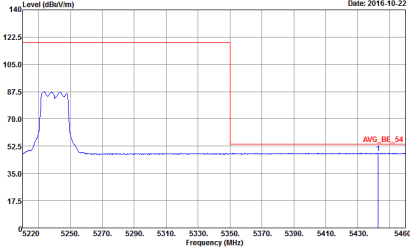




WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 3	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 3	Left blank






Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

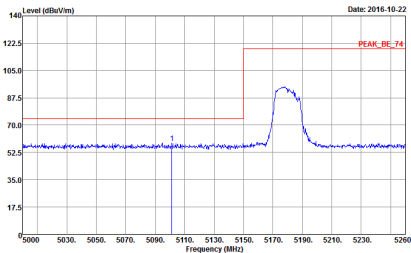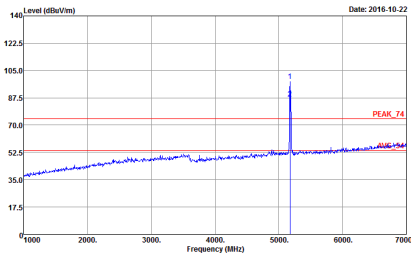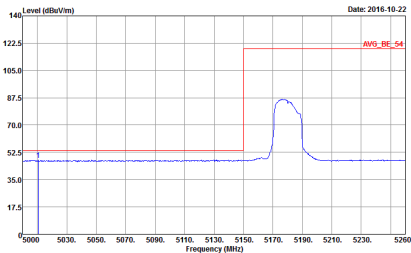WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH36 5180MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 4	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 4
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 4	Left blank

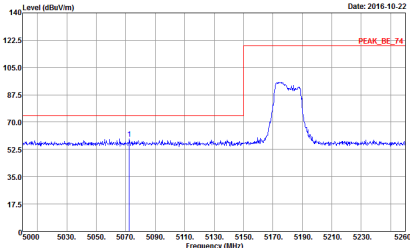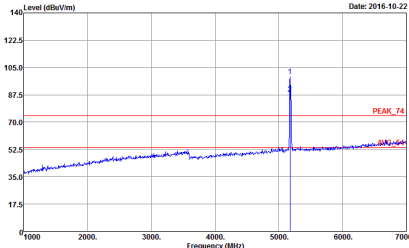
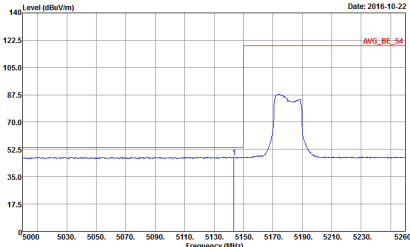


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH36 5180MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 4	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 4
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 4	Left blank

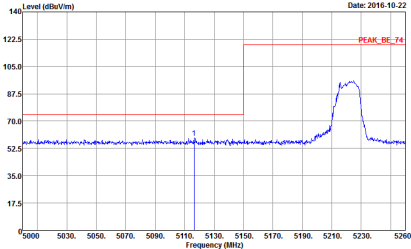
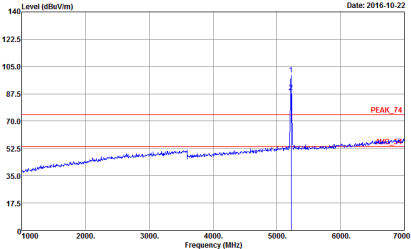



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 5	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 5
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 5	Left blank

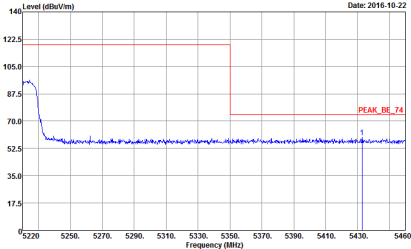
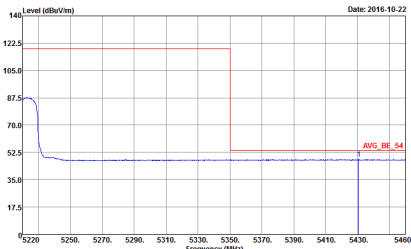


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 600709 Mode : 5	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 600709 Mode : 5	Left blank

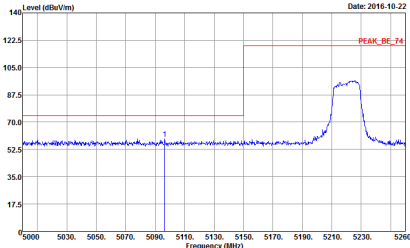
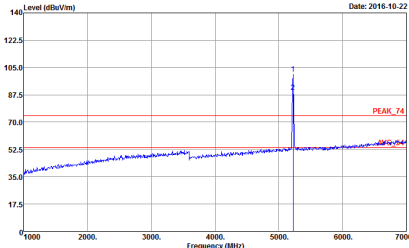
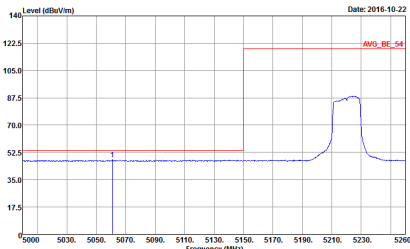


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW: 1000.000KHz VBW: 3000.000KHz SWT: Auto Detector : Peak Project : 600709 Mode : S	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL RBW: 1000.000KHz VBW: 3000.000KHz SWT: Auto Detector : Peak Project : 600709 Mode : S
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW: 1000.000KHz VBW: 1.000KHz SWT: Auto Detector : Peak Project : 600709 Mode : S	Left blank

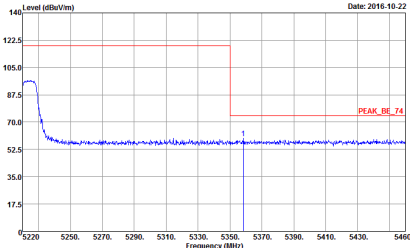
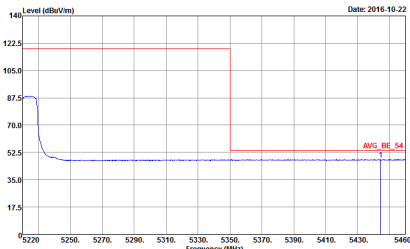


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH44 5220MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_91.20D_1328 VERTICAL RBW: 1000.000KHz VBW: 3000.000KHz SWT: Auto Detector : Peak Project : 600709 Mode : S	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_91.20D_1328 VERTICAL RBW: 1000.000KHz VBW: 3000.000KHz SWT: Auto Detector : Peak Project : 600709 Mode : S	Left blank

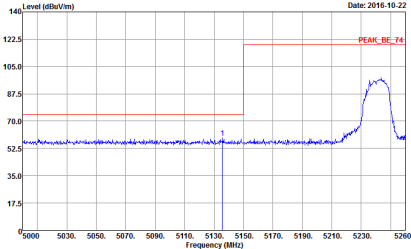
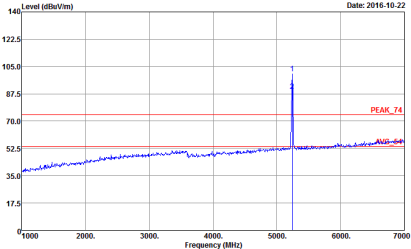
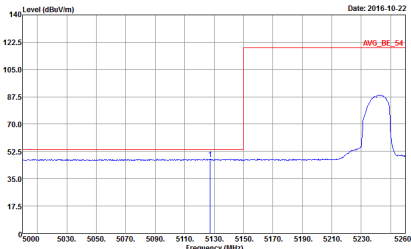


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1320 HORIZONTAL Detector : Peak Project : 600709 Mode : 6	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1320 HORIZONTAL Detector : Peak Project : 600709 Mode : 6
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1320 HORIZONTAL Detector : Peak Project : 600709 Mode : 6	Left blank

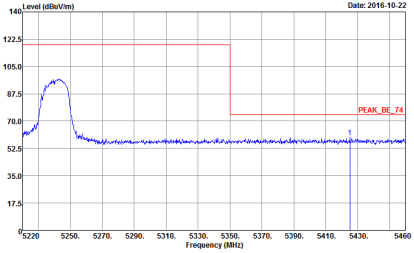
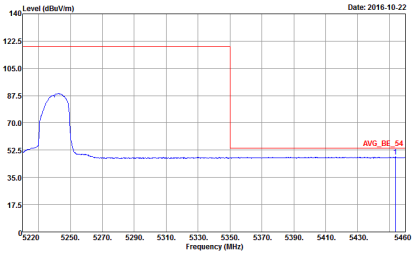


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 6	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 6	Left blank

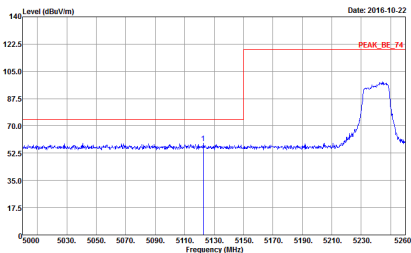
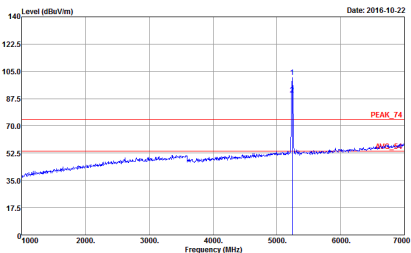
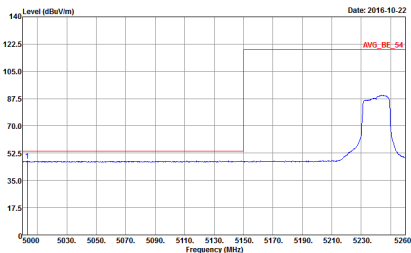


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK, RE_74 3m HORN, 9120D, 1328 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 600709 6	 Site : 03CH12-HY Condition : PEAK, RE_74 3m HORN, 9120D, 1328 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 600709 6
Avg.	 Site : 03CH12-HY Condition : AVG, RE_54 3m HORN, 9120D, 1328 VERTICAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Project : Peak Mode : 600709 6	Left blank

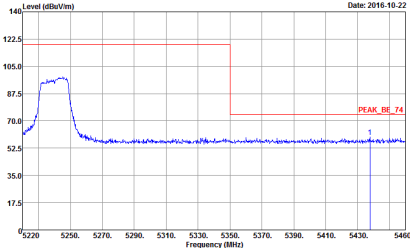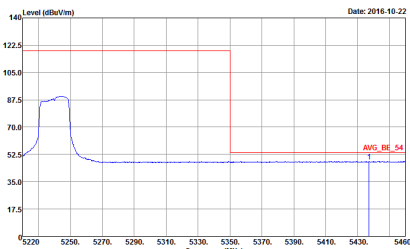

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT20 CH48 5240MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 6	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 6	Left blank




Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

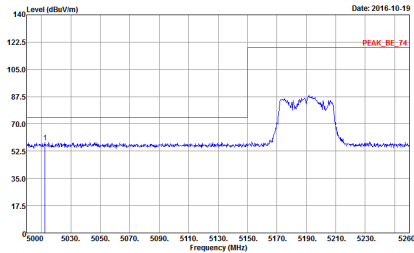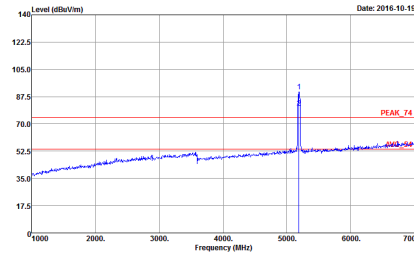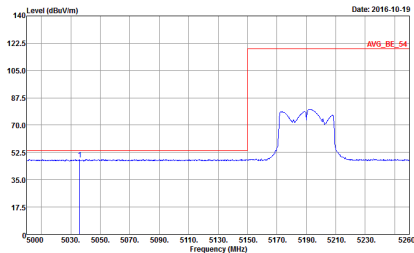WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 7	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 7
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 7	Left blank





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - R	
1+2	Horizontal	Fundamental
Peak	Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 7	Left blank
Avg.	Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 7	Left blank

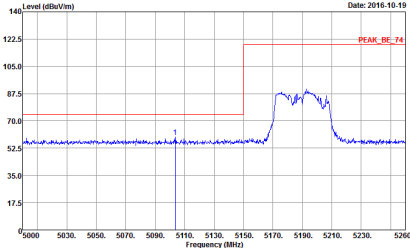
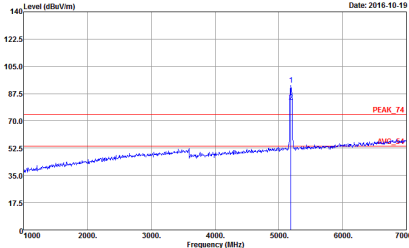
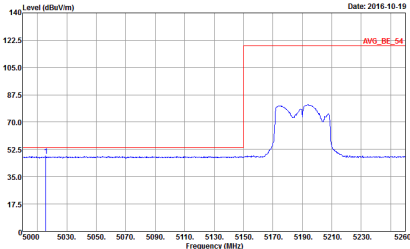


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK, RE_74 3m HORN, 9120D, 1328 VERTICAL RBW: 1000.000KHz VBW: 3000.000KHz SWT: Auto Detector : Peak Project : 600709 Mode : 7	 Site : 03CH12-HY Condition : PEAK, RE_74 3m HORN, 9120D, 1328 VERTICAL RBW: 1000.000KHz VBW: 3000.000KHz SWT: Auto Detector : Peak Project : 600709 Mode : 7
Avg.	 Site : 03CH12-HY Condition : AVG, RE_54 3m HORN, 9120D, 1328 VERTICAL RBW: 1000.000KHz VBW: 3000.000KHz SWT: Auto Detector : Peak Project : 600709 Mode : 7	Left blank

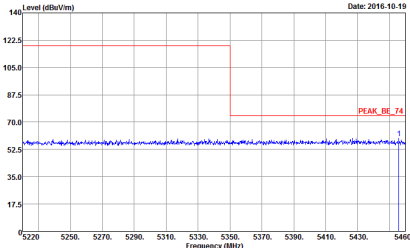
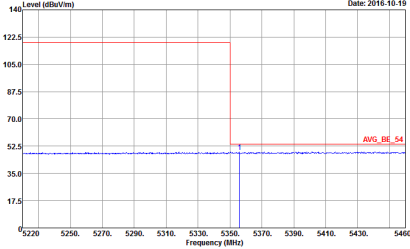


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 7	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 7	Left blank

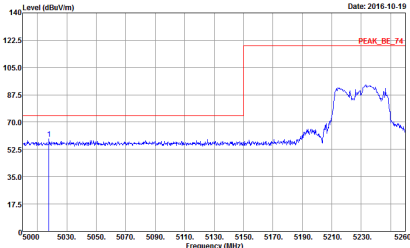
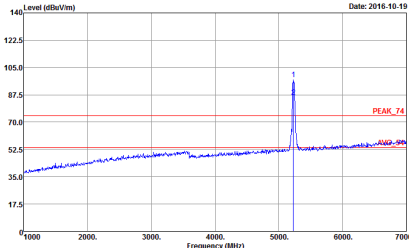



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 0	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 0
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 0	Left blank

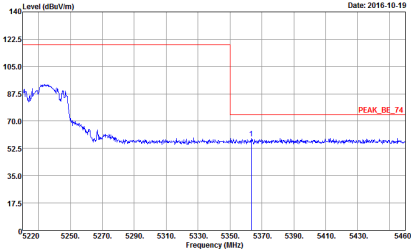
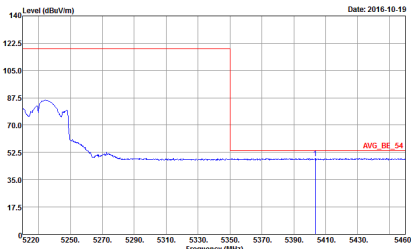


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 8	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 8	Left blank

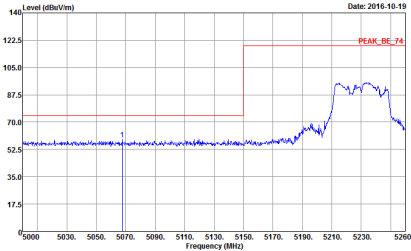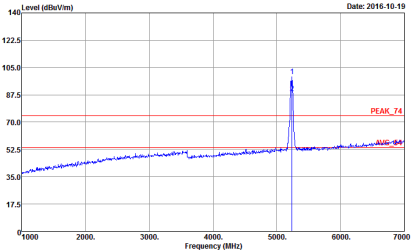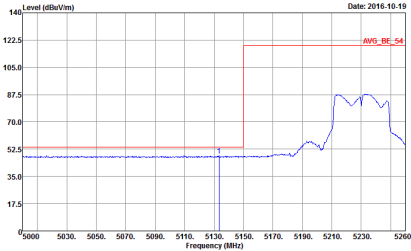

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 600709 Date: 2016-10-19	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 600709 Date: 2016-10-19
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL Detector : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Project : Peak Mode : 600709 Date: 2016-10-19	Left blank

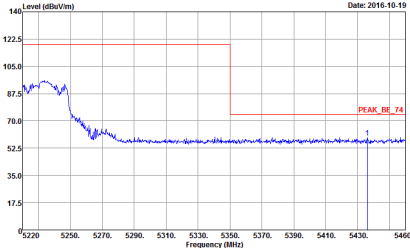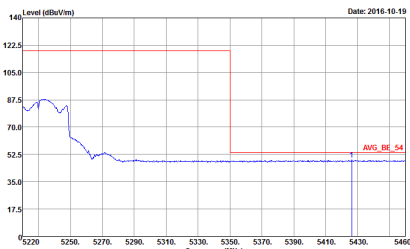



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH46 5230MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : B	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : B	Left blank






Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - L	
1+2	Horizontal	Fundamental
Peak	Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 9	Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 9
Avg.	Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 9	Left blank

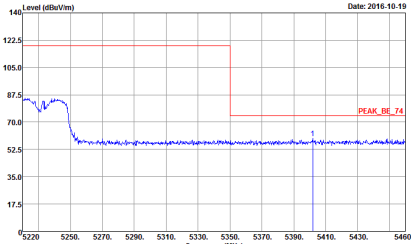
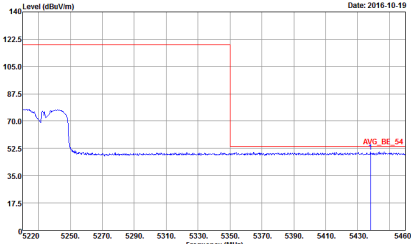


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 600709 : 9	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Project : Peak Mode : 600709 : 9	Left blank

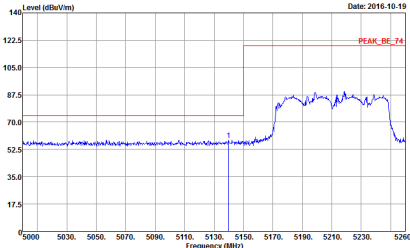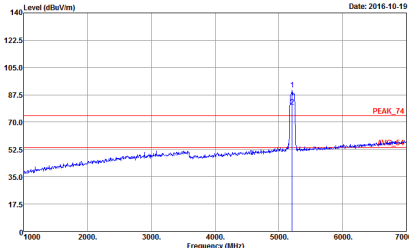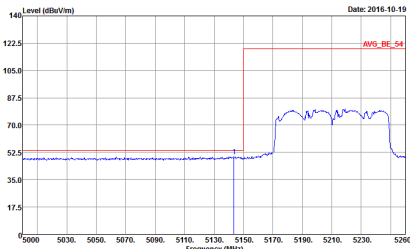

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 9	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 9
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 9	Left blank

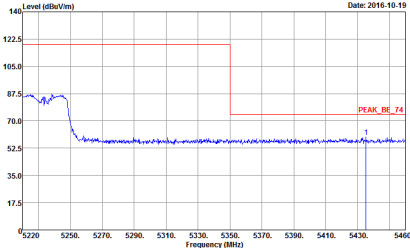
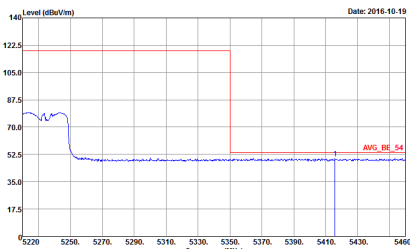


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 9	Left blank
Avg.	 Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 600709 Mode : 9	Left blank



Band 1 - 5150~5250MHz



WIFI 802.11a (Harmonic @ 3m)

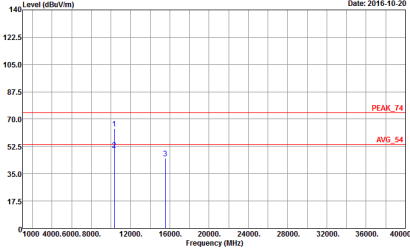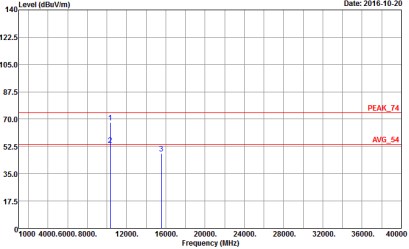WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH36 5180MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 1 Setting : 16	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 600709 Mode : 1 Setting : 16





WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH44 5220MHz	
1+2	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2016-10-20 Frequency (MHz) Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 2 Setting : 16	Level (dBuV/m) Date: 2016-10-20 Frequency (MHz) Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 600709 Mode : 2 Setting : 16

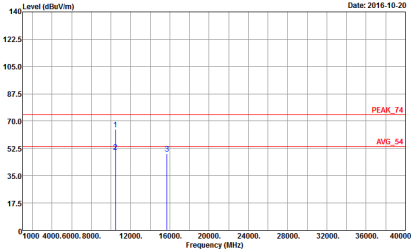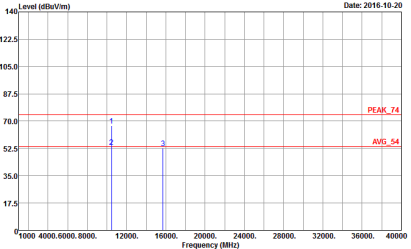



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH48 5240MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 3 Setting : 16.5	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 600709 Mode : 3 Setting : 16.5





Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

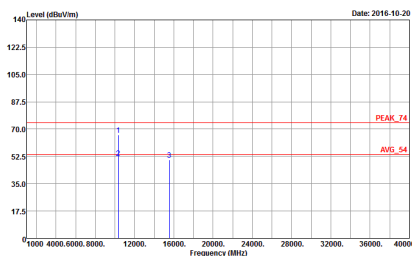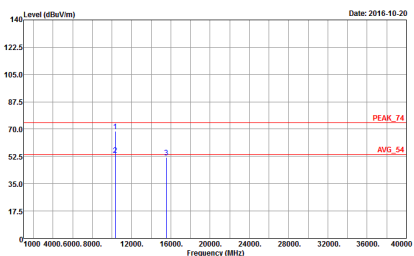WIFI	Band 1 5150~5250MHz Harmonic @ 3m																									
ANT	802.11n HT20 CH36 5180MHz																									
1+2	Horizontal	Vertical																								
Peak Avg.	<table><tr><td>Site</td><td>: 03CH12-HY</td></tr><tr><td>Condition</td><td>: PEAK_74 3m HORN_9120D_1328 HORIZONTAL</td></tr><tr><td>Detector</td><td>: Peak</td></tr><tr><td>Project</td><td>: 600709</td></tr><tr><td>Mode</td><td>: 4</td></tr><tr><td>Setting</td><td>: 17</td></tr></table>	Site	: 03CH12-HY	Condition	: PEAK_74 3m HORN_9120D_1328 HORIZONTAL	Detector	: Peak	Project	: 600709	Mode	: 4	Setting	: 17	<table><tr><td>Site</td><td>: 03CH12-HY</td></tr><tr><td>Condition</td><td>: PEAK_74 3m HORN_9120D_1328 VERTICAL</td></tr><tr><td>Detector</td><td>: Peak</td></tr><tr><td>Project</td><td>: 600709</td></tr><tr><td>Mode</td><td>: 4</td></tr><tr><td>Setting</td><td>: 17</td></tr></table>	Site	: 03CH12-HY	Condition	: PEAK_74 3m HORN_9120D_1328 VERTICAL	Detector	: Peak	Project	: 600709	Mode	: 4	Setting	: 17
	Site	: 03CH12-HY																								
Condition	: PEAK_74 3m HORN_9120D_1328 HORIZONTAL																									
Detector	: Peak																									
Project	: 600709																									
Mode	: 4																									
Setting	: 17																									
Site	: 03CH12-HY																									
Condition	: PEAK_74 3m HORN_9120D_1328 VERTICAL																									
Detector	: Peak																									
Project	: 600709																									
Mode	: 4																									
Setting	: 17																									

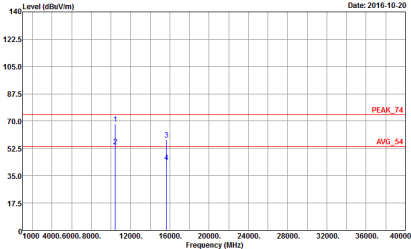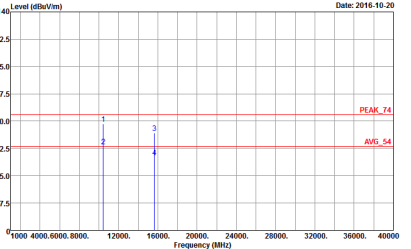



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH44 5220MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : S Setting : 18.5	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 600709 Mode : S Setting : 18.5

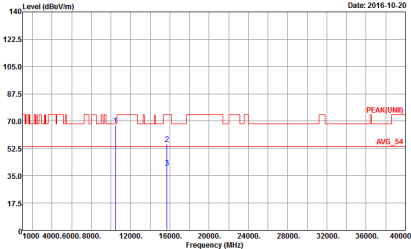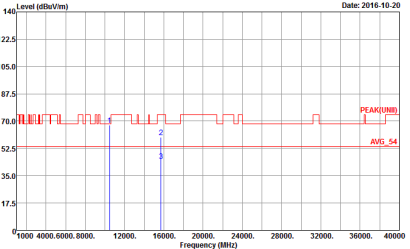



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT20 CH48 5240MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 6 Power : 19	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 600709 Mode : 6 Power : 19



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

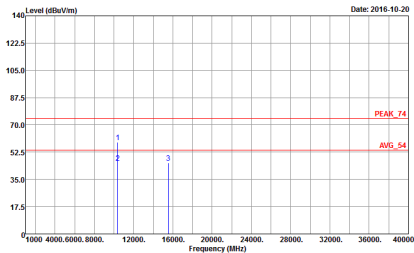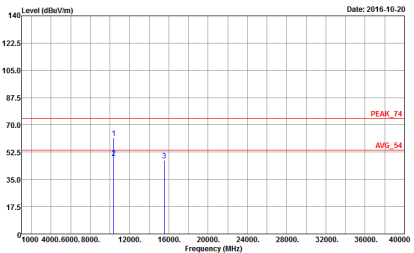WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT40 CH38 5190MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 7	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 600709 Mode : 7

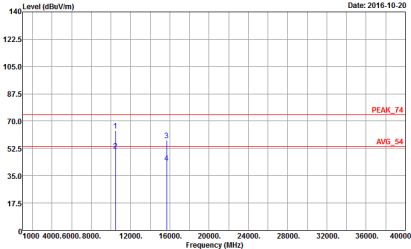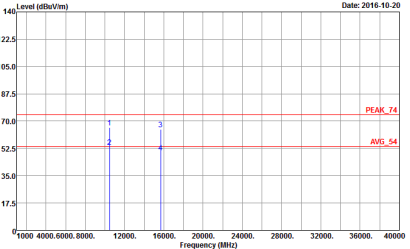



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT40 CH46 5230MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : B	 Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 600709 Mode : B



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)


WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz	
1+2	Horizontal	Vertical
Peak Avg.	Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 600709 Mode : 9	Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 600709 Mode : 9

Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)

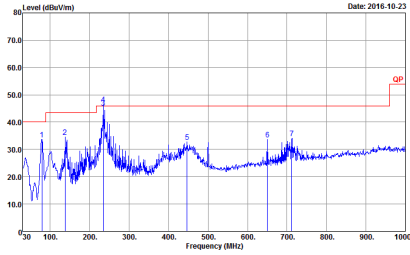
WIFI	5GHz WIFI	
ANT	802.11n HT20 LF	
1+2	Horizontal	Vertical
QP / Peak	 Site : 03CH12-HY Condition : QP 3m BILOG_6111D_37059 HORIZONTAL Detector : Peak Project : 600709 Mode : 19	 Site : 03CH12-HY Condition : QP 3m BILOG_6111D_37059 VERTICAL Detector : Peak Project : 600709 Mode : 19

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2	802.11a for Ant 1	94.37	1340.00	0.75	1kHz
1+2	802.11a for Ant 2	95.07	1350.00	0.74	1kHz
1+2	5GHz 802.11n HT20 for Ant 1	94.03	1260.00	0.79	1kHz
1+2	5GHz 802.11n HT20 for Ant 2	94.78	1270.00	0.79	1kHz
1+2	5GHz 802.11n HT40 for Ant 1	88.57	620.00	1.61	3kHz
1+2	5GHz 802.11n HT40 for Ant 2	90.00	630.00	1.59	3kHz
1+2	5GHz 802.11ac VHT80 for Ant 1	81.44	316.00	3.16	10kHz
1+2	5GHz 802.11ac VHT80 for Ant 2	81.25	312.00	3.21	10kHz

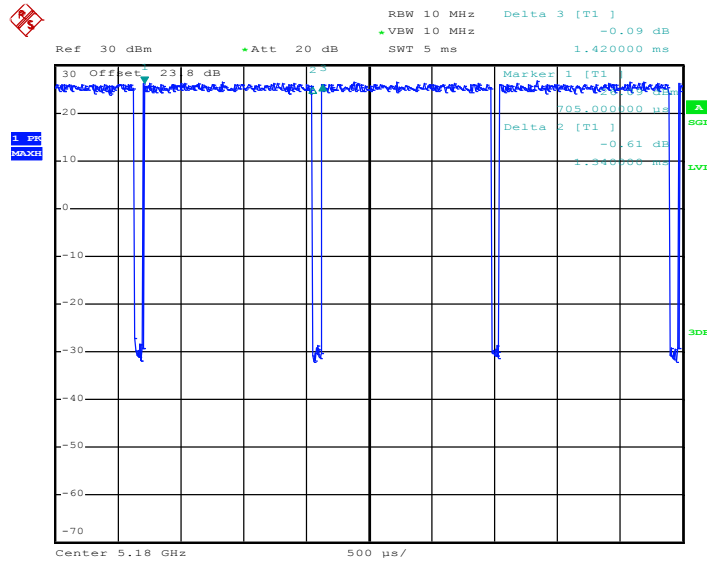
MIMO <Ant. 1+2(1)>
802.11a


Date: 4.OCT.2016 21:47:46

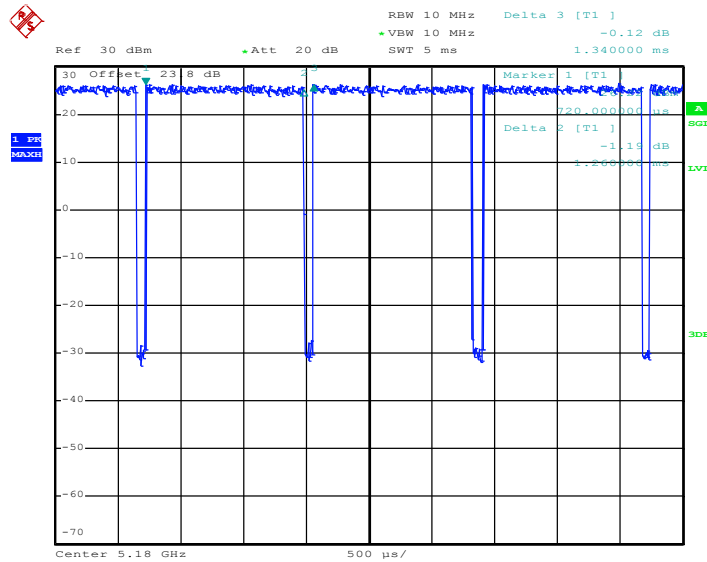802.11n HT20


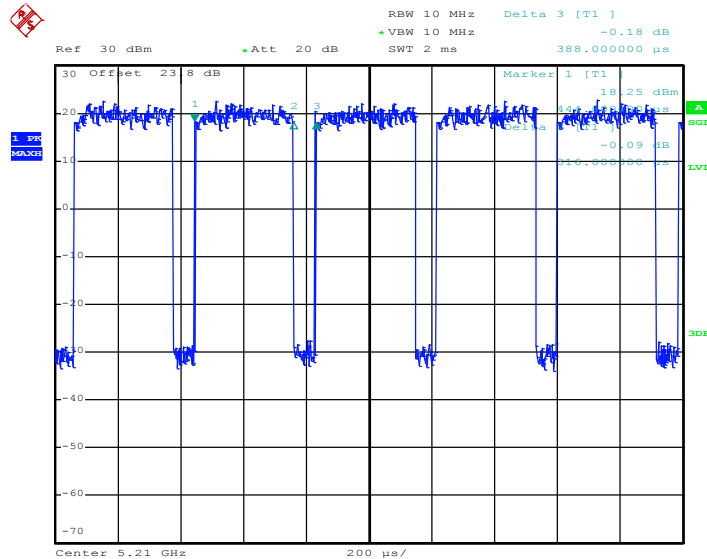
Date: 4.OCT.2016 21:51:30

802.11n HT40

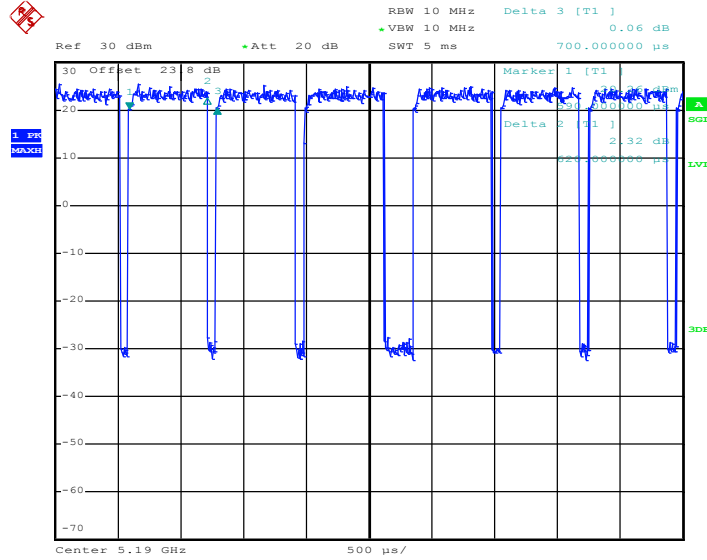

Date: 4.OCT.2016 22:06:00


802.11ac VHT80



Date: 4.OCT.2016 22:16:27


MIMO <Ant. 1+2(2)>

802.11a

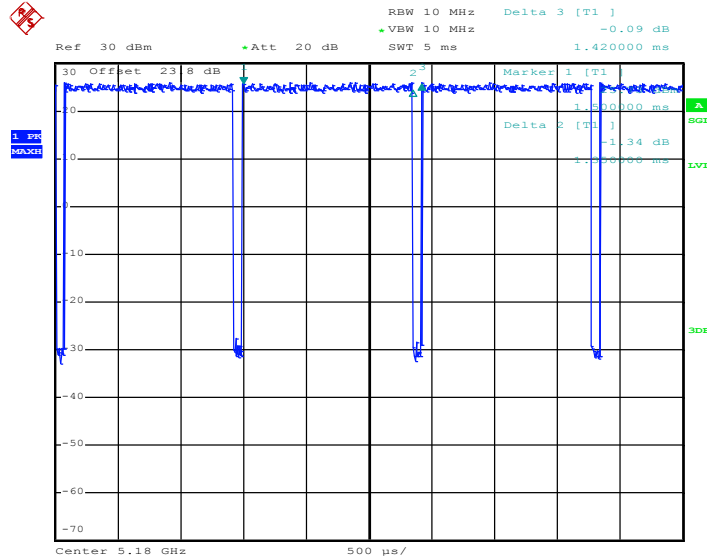


Date: 4.OCT.2016 21:49:10

802.11n HT20

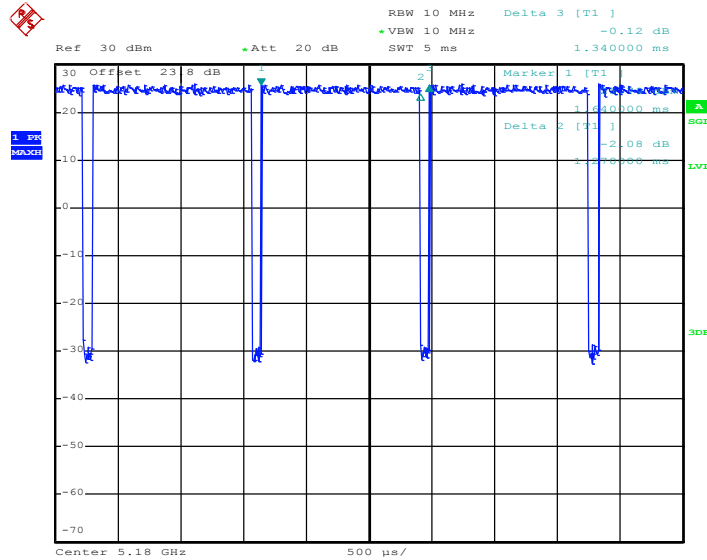


Date: 4.OCT.2016 21:52:44

802.11n HT40

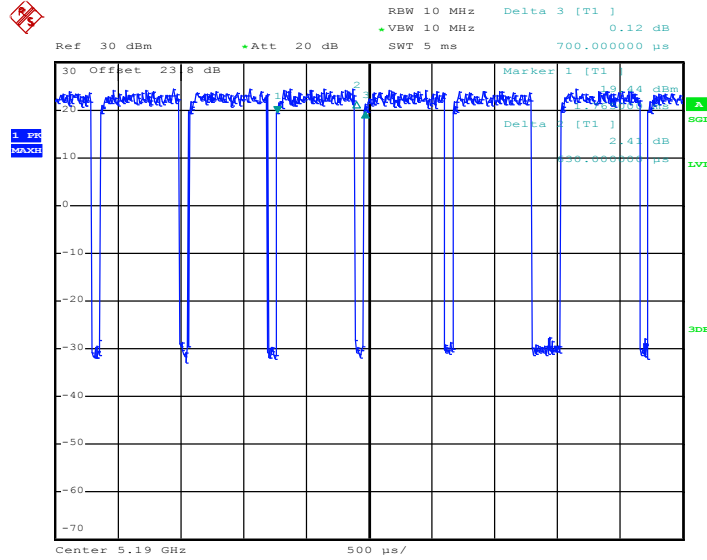

Date: 4.OCT.2016 22:06:47

802.11ac VHT80

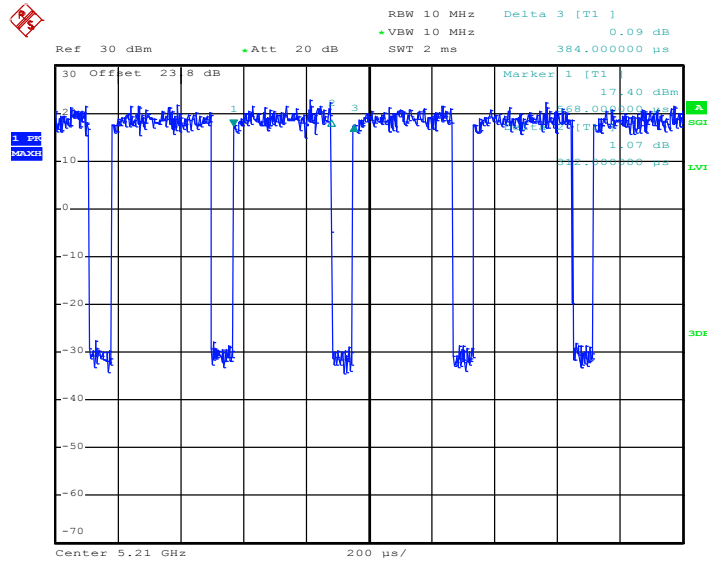

Date: 4.OCT.2016 22:09:06



Appendix E. Conducted Spurious Emission in the Restricted Band

Test Engineer :	Citta Ke and Rover Lee	Temperature :	23°C
		Relative Humidity :	55%



Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Aux	Peak	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Factor	Avg.	
1+2(1)		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	(dB)	(dB)	(dB)	(P/A)	
802.11a CH 36 5180MHz		5149.76	-31	-9.8	-21.2	-40.57	2	4.56		3.01	P	
		5150	-42.29	-1.09	-41.2	-51.86	2	4.56		3.01	A	
	*	5180	17.18	-	-	7.6	2	4.57		3.01	P	
	*	5180	11.64	-	-	2.06	2	4.57		3.01	A	
		5392.32	-41.39	-20.19	-21.2	-51.12	2	4.72		3.01	P	
		5376.96	-51.42	-10.22	-41.2	-61.15	2	4.72		3.01	A	
802.11a CH 44 5220MHz		5148.2	-30.15	-8.95	-21.2	-39.72	2	4.56		3.01	P	
		5149.76	-42.44	-1.24	-41.2	-52.01	2	4.56		3.01	A	
	*	5220	21.45	-	-	11.85	2	4.59		3.01	P	
	*	5220	16.21	-	-	6.61	2	4.59		3.01	A	
		5415.84	-39.24	-18.04	-21.2	-48.98	2	4.73		3.01	P	
		5352.72	-49.62	-8.42	-41.2	-59.32	2	4.69		3.01	A	



WIFI Ant. 1+2(1)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11a CH 48 5240MHz		5134.42	-39.26	-18.06	-21.2	-48.82	2	4.55		3.01		P	
		5148.46	-49.15	-7.95	-41.2	-58.72	2	4.56		3.01		A	
	*	5238	21.77	-	-	12.16	2	4.6		3.01		P	
	*	5238	15.32	-	-	5.71	2	4.6		3.01		A	
		5389.68	-39.26	-18.06	-21.2	-48.99	2	4.72		3.01		P	
		5359.2	-49.21	-8.01	-41.2	-58.93	2	4.71		3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2(1)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11a CH 36 5180MHz		10360	-53.18	-31.98	-21.2	-34.1	2	7.26	31.35	3.01		P	
		15540	-53.47	-32.27	-21.2	-35.79	2	8.79	31.48	3.01		P	
802.11a CH 44 5220MHz		10440	-48.84	-27.64	-21.2	-29.73	2	7.26	31.38	3.01		P	
		15660	-39.52	-18.32	-21.2	-21.85	2	8.8	31.48	3.01		P	
		15660	-43.53	-2.33	-41.2	-25.86	2	8.8	31.48	3.01		A	
802.11a CH 48 5240MHz		10480	-50.54	-29.34	-21.2	-31.41	2	7.26	31.4	3.01		P	
		15720	-30.99	-9.79	-21.2	-13.32	2	8.8	31.48	3.01		P	
		15720	-42.08	-0.88	-41.2	-24.41	2	8.8	31.48	3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2(1)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11n HT20 CH 36 5180MHz		5147.16	-30.41	-9.21	-21.2	-39.98	2	4.56		3.01		P	
		5149.76	-42.81	-1.61	-41.2	-52.38	2	4.56		3.01		A	
	*	5180	15.5	-	-	5.92	2	4.57		3.01		P	
	*	5180	9.83	-	-	0.25	2	4.57		3.01		A	
		5382.96	-44.02	-22.82	-21.2	-53.75	2	4.72		3.01		P	
		5352.72	-54.02	-12.82	-41.2	-63.72	2	4.69		3.01		A	
802.11n HT20 CH 44 5220MHz		5148.2	-27.72	-6.52	-21.2	-37.29	2	4.56		3.01		P	
		5150	-41.76	-0.56	-41.2	-51.33	2	4.56		3.01		A	
	*	5220	20.92	-	-	11.32	2	4.59		3.01		P	
	*	5220	15.35	-	-	5.75	2	4.59		3.01		A	
		5391.6	-37.91	-16.71	-21.2	-47.64	2	4.72		3.01		P	
		5350.32	-48.54	-7.34	-41.2	-58.24	2	4.69		3.01		A	



WIFI Ant. 1+2(1)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11n HT20 CH 48 5240MHz		5148.98	-39.07	-17.87	-21.2	-48.64	2	4.56		3.01		P	
		5149.76	-48.99	-7.79	-41.2	-58.56	2	4.56		3.01		A	
	*	5238	21.38	-	-	11.77	2	4.6		3.01		P	
	*	5238	14.62	-	-	5.01	2	4.6		3.01		A	
		5428.32	-39.16	-17.96	-21.2	-48.9	2	4.73		3.01		P	
		5350.56	-49.48	-8.28	-41.2	-59.18	2	4.69		3.01		A	
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2(1)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11n HT20 CH 36 5180MHz		10360	-54	-32.8	-21.2	-34.92	2	7.26	31.35	3.01		P	
		15540	-56.87	-35.67	-21.2	-39.19	2	8.79	31.48	3.01		P	
802.11n HT20 CH 44 5220MHz		10440	-50.18	-28.98	-21.2	-31.07	2	7.26	31.38	3.01		P	
		15660	-33.25	-12.05	-21.2	-15.58	2	8.8	31.48	3.01		P	
		15660	-43.86	-2.66	-41.2	-26.19	2	8.8	31.48	3.01		A	
802.11n HT20 CH 48 5240MHz		10480	-49.18	-27.98	-21.2	-30.05	2	7.26	31.4	3.01		P	
		15720	-31.33	-10.13	-21.2	-13.66	2	8.8	31.48	3.01		P	
		15720	-41.64	-0.44	-41.2	-23.97	2	8.8	31.48	3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2(1)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11n HT40 CH 38 5190MHz		5150	-31.8	-10.6	-21.2	-41.37	2	4.56		3.01		P	
		5149.76	-42.16	-0.96	-41.2	-51.73	2	4.56		3.01		A	
	*	5190	9.63	-	-	0.05	2	4.57		3.01		P	
	*	5190	3.16	-	-	-6.42	2	4.57		3.01		A	
		5363.04	-43.3	-22.1	-21.2	-53.02	2	4.71		3.01		P	
		5369.28	-54.07	-12.87	-41.2	-63.79	2	4.71		3.01		A	
802.11n HT40 CH 46 5230MHz		5147.94	-30.9	-9.7	-21.2	-40.47	2	4.56		3.01		P	
		5149.76	-41.57	-0.37	-41.2	-51.14	2	4.56		3.01		A	
	*	5230	15.79	-	-	6.19	2	4.59		3.01		P	
	*	5230	9.78	-	-	0.18	2	4.59		3.01		A	
		5372.64	-37.84	-16.64	-21.2	-47.56	2	4.71		3.01		P	
		5350.8	-47.74	-6.54	-41.2	-57.44	2	4.69		3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2(1)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11n HT40 CH 38 5190MHz		10380	-60.77	-39.57	-21.2	-41.68	2	7.26	31.36	3.01		P	
		15570	-64.08	-42.88	-21.2	-46.4	2	8.79	31.48	3.01		P	
802.11n HT40 CH 46 5230MHz		10460	-52.77	-31.57	-21.2	-33.65	2	7.26	31.39	3.01		P	
		15690	-46.14	-24.94	-21.2	-28.47	2	8.8	31.48	3.01		P	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2(1)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11ac VHT80 CH 42 5210MHz		5130	-24.07	-2.87	-21.2	-33.63	2	4.55		3.01		P	
		5141.44	-41.94	-0.74	-41.2	-51.5	2	4.55		3.01		A	
	*	5210	8.65	-	-	-0.93	2	4.57		3.01		P	
	*	5210	0.42	-	-	-9.16	2	4.57		3.01		A	
		5366.64	-42.85	-21.65	-21.2	-52.57	2	4.71		3.01		P	
		5354.64	-56.76	-15.56	-41.2	-66.46	2	4.69		3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 1 5150~5250MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2(1)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11ac VHT80 CH 42 5210MHz		10420	-61.85	-40.65	-21.2	-42.75	2	7.26	31.37	3.01		P	
		15630	-55.76	-34.56	-21.2	-38.09	2	8.8	31.48	3.01		P	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Aux		Peak	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Factor		Avg.	
1+2(1)		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	(dB)	(dB)	(dB)		(P/A)	
802.11n HT40 LF		66.18	-94.53	-39.33	-55.2	-67.69	2	0.39	32.24	3.01		P	
		106.14	-91.07	-39.37	-51.7	-64.35	2	0.46	32.19	3.01		P	
		250.05	-102.5	-53.3	-49.2	-76.2	2	0.84	32.15	3.01		P	
		650	-69.8	-20.6	-49.2	-44.05	2	1.42	32.18	3.01		P	
		776.7	-82.4	-33.2	-49.2	-57	2	1.58	31.99	3.01		P	
		974.8	-93.72	-52.52	-41.2	-69.77	2	1.8	30.76	3.01		P	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Aux	Peak	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Factor	Avg.	
1+2(2)		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	(dB)	(dB)	(dB)	(P/A)	
802.11a CH 36 5180MHz		5145.34	-29.46	-8.26	-21.2	-39.03	2	4.56		3.01	P	
		5150	-41.55	-0.35	-41.2	-51.12	2	4.56		3.01	A	
	*	5180	17.95	-	-	8.37	2	4.57		3.01	P	
	*	5180	11.12	-	-	1.54	2	4.57		3.01	A	
		5425.2	-43.56	-22.36	-21.2	-53.3	2	4.73		3.01	P	
		5353.44	-53.26	-12.06	-41.2	-62.96	2	4.69		3.01	A	
802.11a CH 44 5220MHz		5149.5	-27.98	-6.78	-21.2	-37.55	2	4.56		3.01	P	
		5150	-41.7	-0.5	-41.2	-51.27	2	4.56		3.01	A	
	*	5220	22.53	-	-	12.93	2	4.59		3.01	P	
	*	5220	15.79	-	-	6.19	2	4.59		3.01	A	
		5371.92	-40.35	-19.15	-21.2	-50.07	2	4.71		3.01	P	
		5355.84	-50.81	-9.61	-41.2	-60.51	2	4.69		3.01	A	



802.11a CH 48 5240MHz		5147.42	-31.72	-10.52	-21.2	-41.29	2	4.56		3.01		P	
		5149.76	-45.33	-4.13	-41.2	-54.9	2	4.56		3.01		A	
	*	5242	23.04	-	-	13.43	2	4.6		3.01		P	
	*	5242	16.06	-	-	6.45	2	4.6		3.01		A	
		5351.04	-37.48	-16.28	-21.2	-47.18	2	4.69		3.01		P	
		5350.32	-49.24	-8.04	-41.2	-58.94	2	4.69		3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2(2)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11a CH 36 5180MHz		10360	-44.28	-23.08	-21.2	-25.2	2	7.26	31.35	3.01		P	
		15540	-50.28	-29.08	-21.2	-32.6	2	8.79	31.48	3.01		P	
802.11a CH 44 5220MHz		10440	-41.51	-20.31	-21.2	-22.4	2	7.26	31.38	3.01		P	
		15660	-48.55	-27.35	-21.2	-30.88	2	8.8	31.48	3.01		P	
802.11a CH 48 5240MHz		10480	-48.2	-27	-21.2	-29.07	2	7.26	31.4	3.01		P	
		15720	-37.59	-16.39	-21.2	-19.92	2	8.8	31.48	3.01		P	
		15720	-46.28	-5.08	-41.2	-28.61	2	8.8	31.48	3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2(2)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11n HT20 CH 36 5180MHz		5149.5	-30.25	-9.05	-21.2	-39.82	2	4.56		3.01		P	
		5149.76	-41.5	-0.3	-41.2	-51.07	2	4.56		3.01		A	
	*	5182	16.53	-	-	6.95	2	4.57		3.01		P	
	*	5182	10.56	-	-	0.98	2	4.57		3.01		A	
		5387.76	-42.41	-21.21	-21.2	-52.14	2	4.72		3.01		P	
		5389.2	-52.92	-11.72	-41.2	-62.65	2	4.72		3.01		A	
802.11n HT20 CH 44 5220MHz		5147.68	-29.41	-8.21	-21.2	-38.98	2	4.56		3.01		P	
		5149.24	-41.68	-0.48	-41.2	-51.25	2	4.56		3.01		A	
	*	5218	23	-	-	13.4	2	4.59		3.01		P	
	*	5218	15.38	-	-	5.78	2	4.59		3.01		A	
		5367.12	-39.35	-18.15	-21.2	-49.07	2	4.71		3.01		P	
		5379.6	-50.27	-9.07	-41.2	-60	2	4.72		3.01		A	



802.11n HT20 CH 48 5240MHz		5138.06	-33.27	-12.07	-21.2	-42.83	2	4.55		3.01		P	
		5150	-44.25	-3.05	-41.2	-53.82	2	4.56		3.01		A	
	*	5240	22.21	-	-	12.6	2	4.6		3.01		P	
	*	5240	15.85	-	-	6.24	2	4.6		3.01		A	
		5353.44	-37.43	-16.23	-21.2	-47.13	2	4.69		3.01		P	
		5350.32	-48.77	-7.57	-41.2	-58.47	2	4.69		3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2(2)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11n HT20 CH 36 5180MHz		10360	-45.66	-24.46	-21.2	-26.58	2	7.26	31.35	3.01		P	
		15540	-54.36	-33.16	-21.2	-36.68	2	8.79	31.48	3.01		P	
802.11n HT20 CH 44 5220MHz		10440	-44.41	-23.21	-21.2	-25.3	2	7.26	31.38	3.01		P	
		15660	-45.36	-24.16	-21.2	-27.69	2	8.8	31.48	3.01		P	
802.11n HT20 CH 48 5240MHz		10480	-47.49	-26.29	-21.2	-28.36	2	7.26	31.4	3.01		P	
		15720	-37.84	-16.64	-21.2	-20.17	2	8.8	31.48	3.01		P	
		15720	-46.88	-5.68	-41.2	-29.21	2	8.8	31.48	3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2(2)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11n HT40 CH 38 5190MHz		5150	-30.56	-9.36	-21.2	-40.13	2	4.56		3.01		P	
		5149.76	-41.53	-0.33	-41.2	-51.1	2	4.56		3.01		A	
	*	5190	10.49	-	-	0.91	2	4.57		3.01		P	
	*	5190	4.23	-	-	-5.35	2	4.57		3.01		A	
		5387.28	-45.42	-24.22	-21.2	-55.15	2	4.72		3.01		P	
		5396.64	-56.27	-15.07	-41.2	-66.02	2	4.74		3.01		A	
802.11n HT40 CH 46 5230MHz		5147.94	-31.63	-10.43	-21.2	-41.2	2	4.56		3.01		P	
		5149.5	-42.39	-1.19	-41.2	-51.96	2	4.56		3.01		A	
	*	5220	16.64	-	-	7.04	2	4.59		3.01		P	
		5410.32	-41.67	-20.47	-21.2	-51.42	2	4.74		3.01		P	
		5353.92	-51.1	-9.9	-41.2	-60.8	2	4.69		3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2(2)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11n HT40 CH 38 5190MHz		10380	-52.9	-31.7	-21.2	-33.81	2	7.26	31.36	3.01		P	
		15570	-65.69	-44.49	-21.2	-48.01	2	8.79	31.48	3.01		P	
802.11n HT40 CH 46 5230MHz		10460	-51.06	-29.86	-21.2	-31.94	2	7.26	31.39	3.01		P	
		15690	-51.82	-30.62	-21.2	-34.15	2	8.8	31.48	3.01		P	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2(2)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11ac VHT80 CH 42 5210MHz		5129.74	-21.49	-0.29	-21.2	-31.05	2	4.55		3.01		P	
		5127.4	-42.01	-0.81	-41.2	-51.57	2	4.55		3.01		A	
	*	5210	9.36	-	-	-0.22	2	4.57		3.01		P	
	*	5210	0.32	-	-	-9.26	2	4.57		3.01		A	
		5353.68	-44.97	-23.77	-21.2	-54.67	2	4.69		3.01		P	
		5352	-58.5	-17.3	-41.2	-68.2	2	4.69		3.01		A	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												


Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2(2)	Note	Frequency (MHz)	Level (dBm)	Over Limit (dB)	Limit Line (dBm)	Read Level (dBm)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)		Peak Avg. (P/A)	
802.11ac VHT80 CH 42 5210MHz		10420	-56.85	-35.65	-21.2	-37.75	2	7.26	31.37	3.01		P	H
		15630	-59.78	-38.58	-21.2	-42.11	2	8.8	31.48	3.01		P	H
													H
													H
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Aux		Peak	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Factor		Avg.	
1+2(2)		(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	(dB)	(dB)	(dB)		(P/A)	
802.11n HT20 LF		109.38	-103.55	-51.85	-51.7	-76.83	2	0.46	32.19	3.01		P	
		173.1	-104.11	-52.41	-51.7	-77.59	2	0.69	32.22	3.01		P	
		237.36	-103.55	-54.35	-49.2	-77.23	2	0.84	32.17	3.01		P	
		650	-79.14	-29.94	-49.2	-53.39	2	1.42	32.18	3.01		P	
		776	-86.53	-37.33	-49.2	-61.13	2	1.58	31.99	3.01		P	
		969.2	-97.1	-55.9	-41.2	-73.08	2	1.78	30.81	3.01		P	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix F. Conducted Spurious Emission in the Restricted Band Plots

Test Engineer :	Citta Ke and Rover Lee	Temperature :	23°C
		Relative Humidity :	55%

Note symbol

-L	Low channel location
-R	High channel location





Band 1 - 5150~5250MHz




WIFI 802.11a (Band Edge)

WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH36 5180MHz - L	
1+2(1)	Band Edge	Fundamental
Peak	Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch36 ANT : 1+2(1) Setting : 18.5	Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch36 ANT : 1+2(1) Setting : 18.5
Avg.	Site : 03CH13-HY Condition : FCC CLASS-BUAVG_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch36 ANT : 1+2(1) Setting : 18.5	Left blank

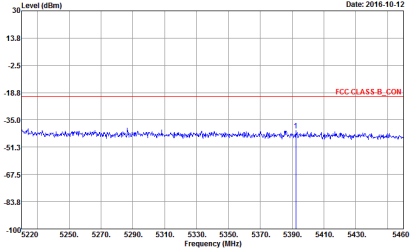
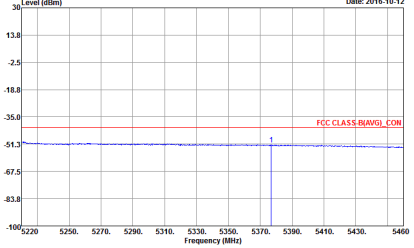


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH36 5180MHz - R	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH36 ANT : 1+2(1) Setting : 18.5	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_AVG_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH36 ANT : 1+2(1) Setting : 18.5	Left blank

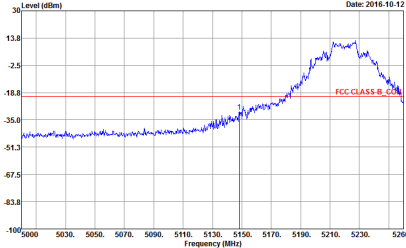
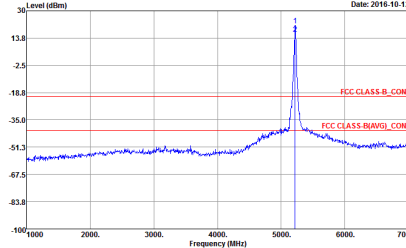
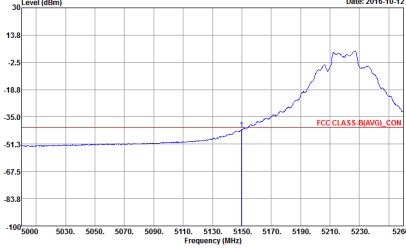


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH44 5220MHz - L	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 83CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch44 ANT : 1+2(1) Setting : 27	 Site : 83CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch44 ANT : 1+2(1) Setting : 27
Avg.	 Site : 83CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch44 ANT : 1+2(1) Setting : 27	Left blank

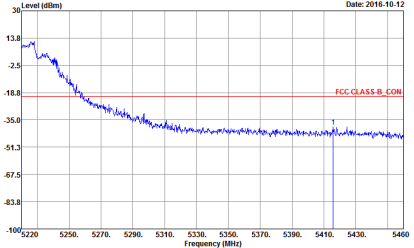
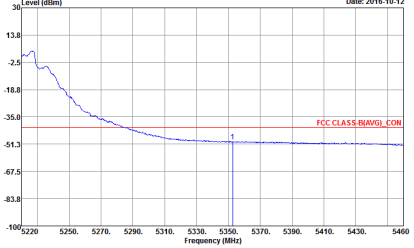


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH44 5220MHz - R	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch44 ANT : 1+2(1) Setting : 27	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch44 ANT : 1+2(1) Setting : 27	Left blank

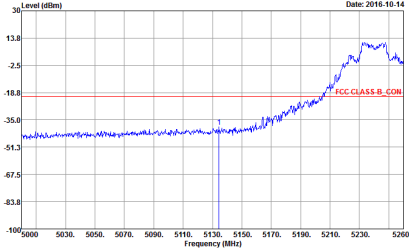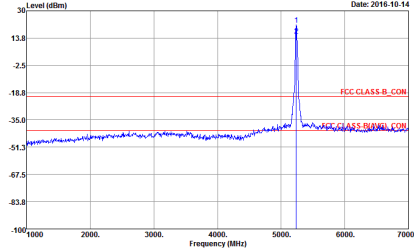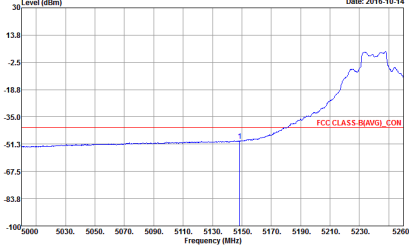

WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH48 5240MHz - L	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 83CH134Y Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch48 ANT : 1+2(1) Setting : 25	 Site : 83CH134Y Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch48 ANT : 1+2(1) Setting : 25
Avg.	 Site : 83CH134Y Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch48 ANT : 1+2(1) Setting : 25	Left blank

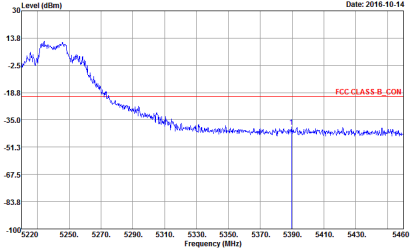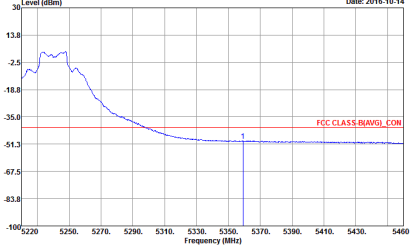



WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH48 5240MHz - R	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 83CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch48 ANT : 1+2(1) Setting : 20	Left blank
Avg.	 Site : 83CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch48 ANT : 1+2(1) Setting : 20	Left blank






Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge)

WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH36 5180MHz - L	
1+2(1)	Band Edge	Fundamental
Peak	Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n/20)_Tx_Ch36 ANT : 1+2(1) Setting : 18	Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n/20)_Tx_Ch36 ANT : 1+2(1) Setting : 18
Avg.	Site : 03CH13-HY Condition : FCC CLASS-B_AVG_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n/20)_Tx_Ch36 ANT : 1+2(1) Setting : 18	Left blank

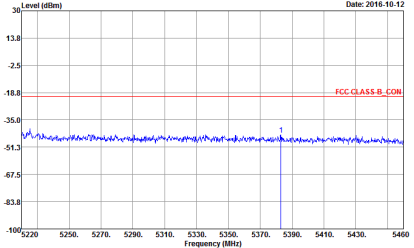
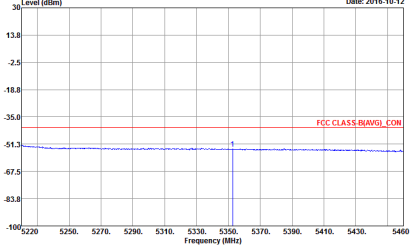


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH36 5180MHz - R	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n20)_Tx_Ch36 ANT : 1+2(1) Setting : 18	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_AVG_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n20)_Tx_Ch36 ANT : 1+2(1) Setting : 18	Left blank

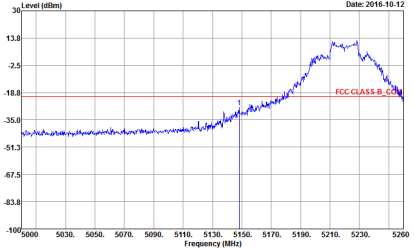
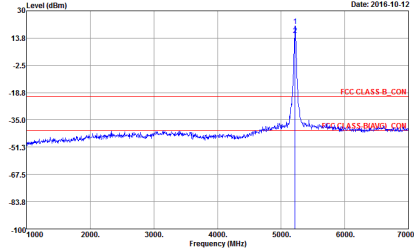
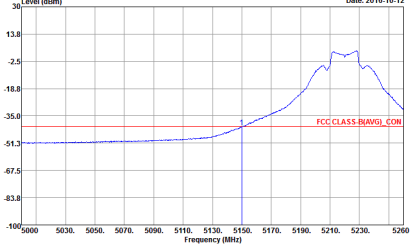


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH44 5220MHz - L	
1+2(1)	Band Edge	Fundamental
Peak	 Level (dBm) Frequency (MHz) Date: 2016-10-12 FCC CLASS B_CON Site : 83CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_Ch44 ANT : 1+2(1) Setting : 26.5	 Level (dBm) Frequency (MHz) Date: 2016-10-12 FCC CLASS-B_CON Site : 83CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_Ch44 ANT : 1+2(1) Setting : 26.5
Avg.	 Level (dBm) Frequency (MHz) Date: 2016-10-12 FCC CLASS-B(AVG)_CON Site : 83CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_Ch44 ANT : 1+2(1) Setting : 26.5	Left blank

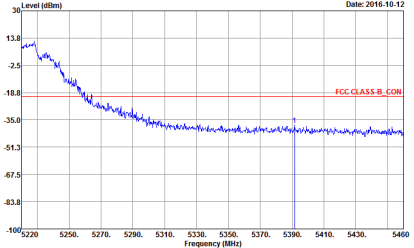
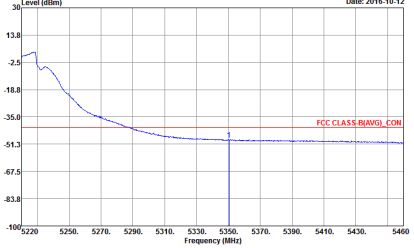


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH44 5220MHz - R	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n20)_Tx_Ch44 ANT : 1+2(1) Setting : 20.5	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_AVG_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n20)_Tx_Ch44 ANT : 1+2(1) Setting : 20.5	Left blank

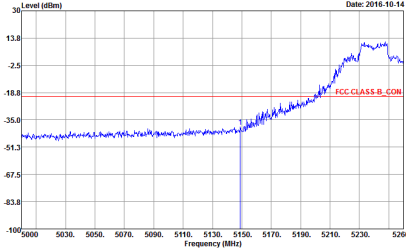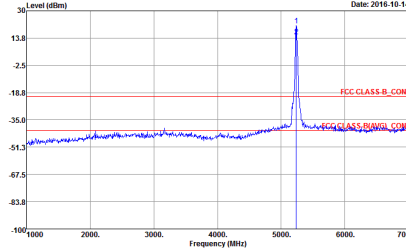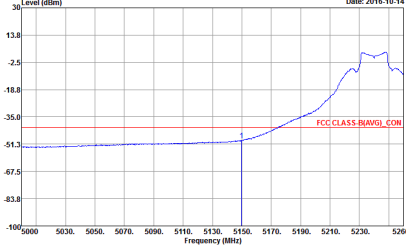




WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH48 5240MHz - L	
1+2(1)	Band Edge	Fundamental
Peak	 Level (dBm) Frequency (MHz) Date: 2016-10-14 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(1) Setting : 26.5	 Level (dBm) Frequency (MHz) Date: 2016-10-14 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(1) Setting : 26.5
Avg.	 Level (dBm) Frequency (MHz) Date: 2016-10-14 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(1) Setting : 26.5	Left blank

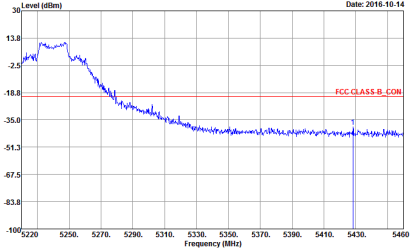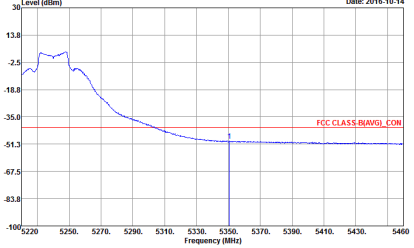



WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH48 5240MHz - R	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(1) Setting : 20.5	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(1) Setting : 20.5	Left blank






Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge)

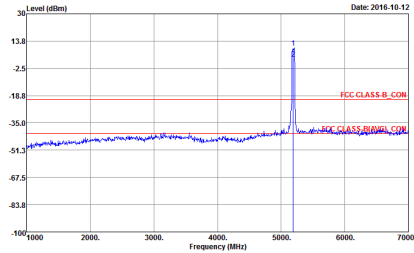WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT40 CH38 5190MHz - L	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch38 ANT : 1+2(1) Setting : 15	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch38 ANT : 1+2(1) Setting : 15
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch38 ANT : 1+2(1) Setting : 15	Left blank

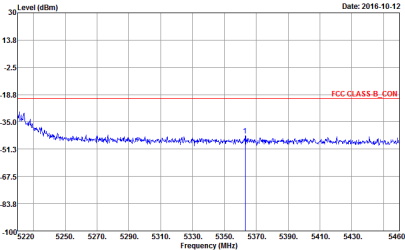
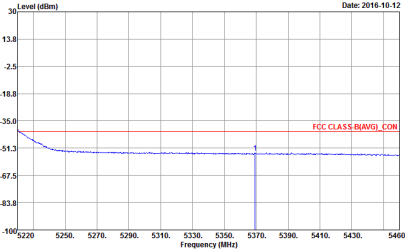


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT40 CH38 5190MHz - R	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n40)_Tx_Ch38 ANT : 1+2(1) Setting : 15	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_AVG_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n40)_Tx_Ch38 ANT : 1+2(1) Setting : 15	Left blank

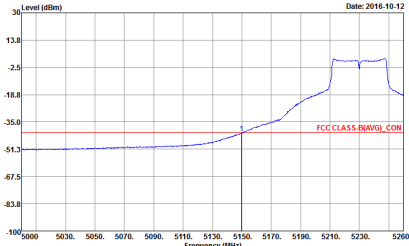




WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT40 CH46 5230MHz - L	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch46 ANT : 1+2(1) Setting : 22	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch46 ANT : 1+2(1) Setting : 22
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch46 ANT : 1+2(1) Setting : 22	Left blank

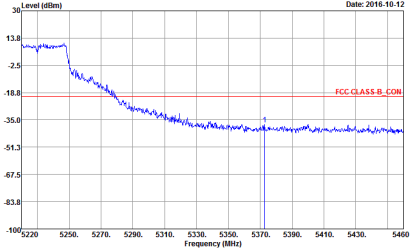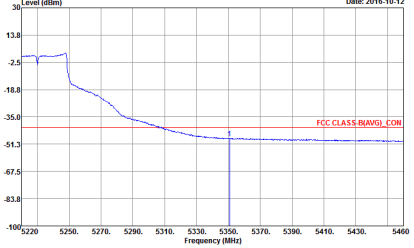



WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT40 CH46 5230MHz - R	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n40)_Tx_CH46 ANT : 1+2(1) Setting : 22	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163M23 Mode : 11a(n40)_Tx_CH46 ANT : 1+2(1) Setting : 22	Left blank



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge)

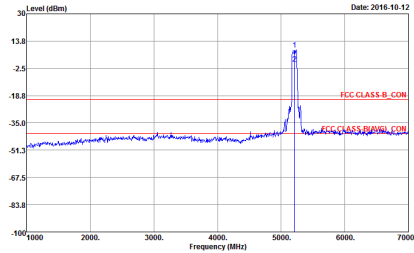WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11ac VHT80 CH42 5210MHz - L	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11ac(BI)_Tx_CH42 ANT : 1+2(1) Setting : 16	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11ac(BI)_Tx_CH42 ANT : 1+2(1) Setting : 16
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11ac(BI)_Tx_CH42 ANT : 1+2(1) Setting : 16	Left blank

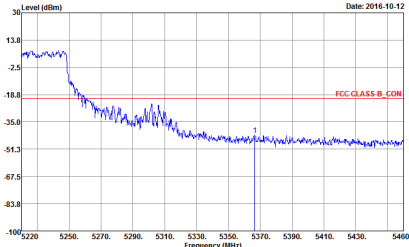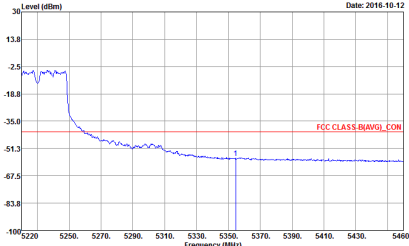


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11ac VHT80 CH42 5210MHz - R	
1+2(1)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11ac(80)_Tx_CH42 ANT : 1+2(1) Setting : 16	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11ac(80)_Tx_CH42 ANT : 1+2(1) Setting : 16	Left blank



Band 1 - 5150~5250MHz


WIFI 802.11a (Harmonic)

WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11a CH36 5180MHz	
1+2(1)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS B, CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH36 ANT : 14Z(1) Setting : 18.5	Left blank



Band 1 - 5150~5250MHz


WIFI 802.11a (Harmonic)

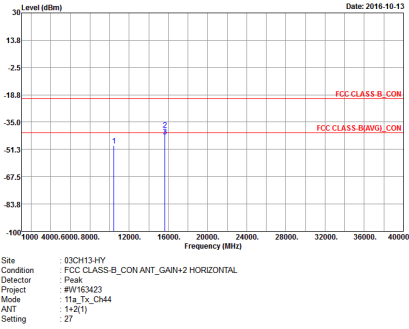WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11a CH44 5220MHz	
1+2(1)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS B_CON ANT_GARH+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH44 ANT : 1+2(1) Setting : 27	Left blank




Band 1 - 5150~5250MHz

WIFI 802.11a (Harmonic)


WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11a CH48 5240MHz	
1+2(1)		
Peak Avg.	 Site : 83CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch48 ANT : 1+2(1) Setting : 20	Left blank




Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic)

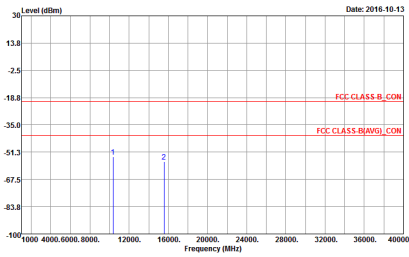WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT20 CH36 5180MHz	
1+2(1)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tr_Ch36 ANT : 1+2(1) Setting : 10	Left blank

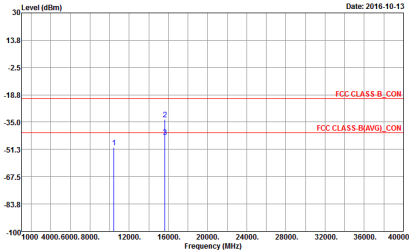


WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT20 CH44 5220MHz	
1+2(1)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_Ch44 ANT : 1+2(1) Setting : 25.5	Left blank

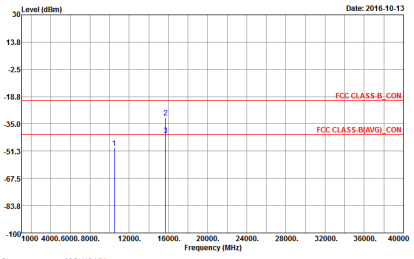


WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT20 CH48 5240MHz	
1+2(1)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC-CLASS-B-CON ANT_GARH+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(20)_Tx_CH48 ANT : 1+2(1) Setting : 26.5	Left blank



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic)

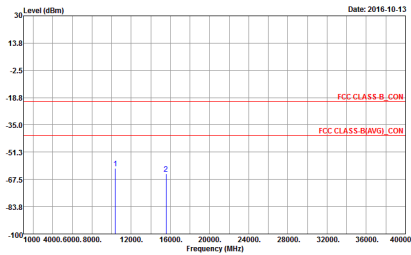WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT40 CH38 5190MHz	
1+2(1)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIH+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch38 ANT : 1+2(1) Setting : 15	Left blank

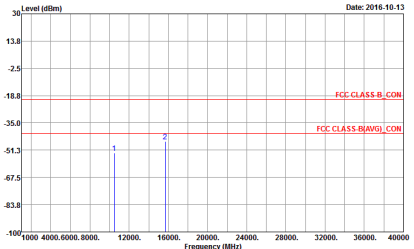

WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT40 CH46 5230MHz	
1+2(1)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS B_CON ANT_GARH2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_CM5 ANT : 1+2(1) Setting : 22	Left blank




Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic)

WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11ac VHT80 CH42 5210MHz	
1+2(1)		
Peak Avg.	Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11ac(80)_Tx_CH42 ANT : 1+2(1) Setting : 16	Left blank






Emission below 1GHz
5GHz WIFI 802.11n HT40 (LF)

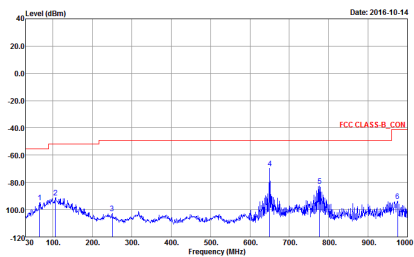WIFI	5GHz WIFI	
ANT	802.11n HT40 LF	
1+2(1)		
QP / Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_CH46 ANT : 1+2(1) Setting : 22	Left blank





Band 1 - 5150~5250MHz




WIFI 802.11a (Band Edge)

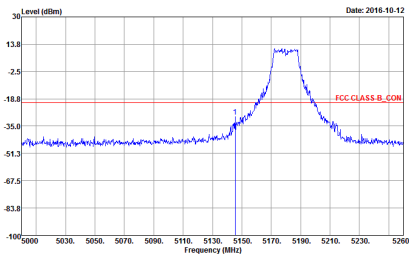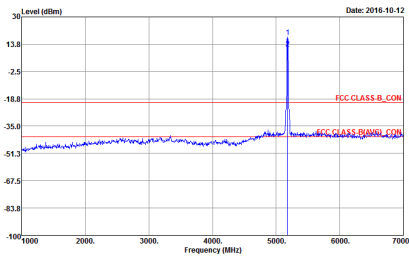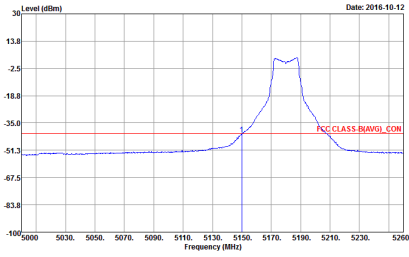WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH36 5180MHz - L	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH36 ANT : 1+2(2) Setting : 20	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH36 ANT : 1+2(2) Setting : 20
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_AVG_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH36 ANT : 1+2(2) Setting : 20	Left blank

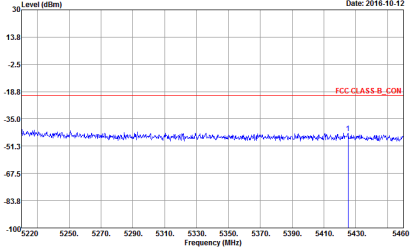
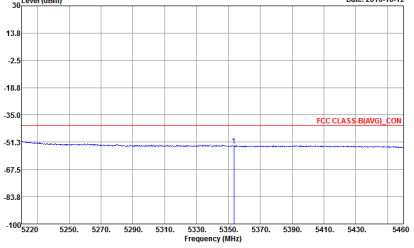


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH36 5180MHz - R	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 83CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH36 ANT : 1+2(2) Setting : 20	Left blank
Avg.	 Site : 83CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH36 ANT : 1+2(2) Setting : 20	Left blank

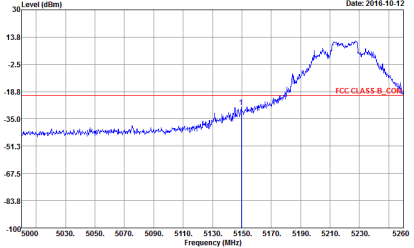
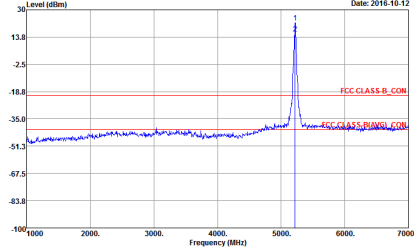
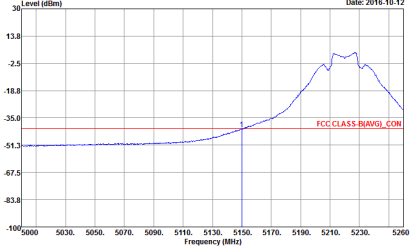


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH44 5220MHz - L	
1+2(2)	Band Edge	Fundamental
Peak	 Level (dBm) Frequency (MHz) Date: 2016-10-12 FCC CLASS B_CON Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch44 ANT : 1+2(2) Setting : 29	 Level (dBm) Frequency (MHz) Date: 2016-10-12 FCC CLASS B_CON FCC CLASS B(AVG)_CON Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch44 ANT : 1+2(2) Setting : 29
Avg.	 Level (dBm) Frequency (MHz) Date: 2016-10-12 FCC CLASS B(AVG)_CON Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch44 ANT : 1+2(2) Setting : 29	Left blank

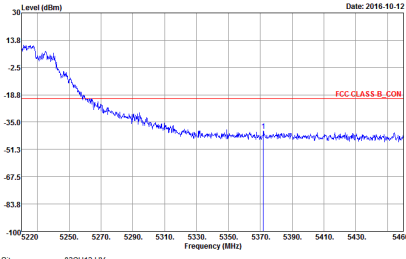
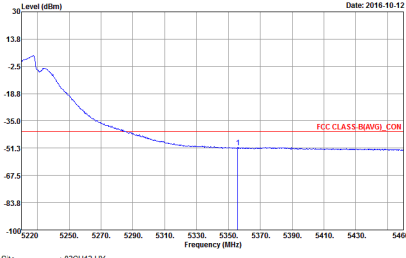


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH44 5220MHz - R	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a Tx_Ch44 ANT : 1+2(2) Setting : 29	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a Tx_Ch44 ANT : 1+2(2) Setting : 29	Left blank

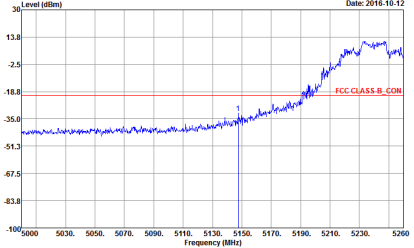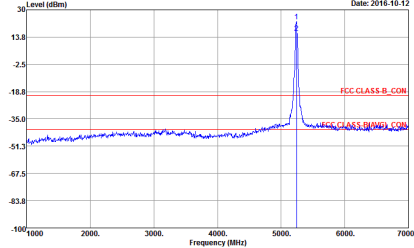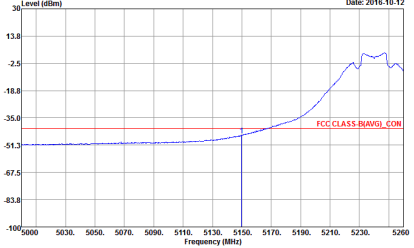




WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH48 5240MHz - L	
1+2(2)	Band Edge	Fundamental
Peak	 Level (dBm) Frequency (MHz) Date: 2016-10-12 FCC CLASS B_CON Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH48 ANT : 1+2(2) Setting : 30	 Level (dBm) Frequency (MHz) Date: 2016-10-12 FCC CLASS B_CON FCC CLASS B(AVG)_CON Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH48 ANT : 1+2(2) Setting : 30
Avg.	 Level (dBm) Frequency (MHz) Date: 2016-10-12 FCC CLASS B(AVG)_CON Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_CH48 ANT : 1+2(2) Setting : 30	Left blank

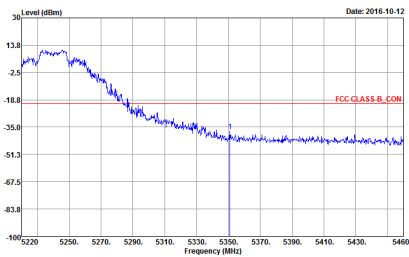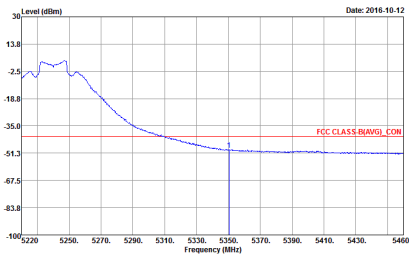



WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11a CH48 5240MHz - R	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a Tx_CH48 ANT : 1+2(2) Setting : 30	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a Tx_CH48 ANT : 1+2(2) Setting : 30	Left blank






Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge)

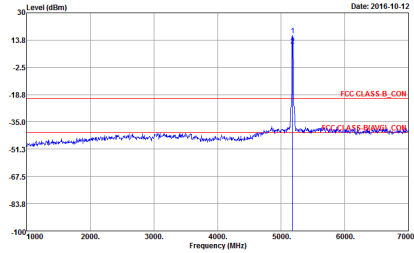WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH36 5180MHz - L	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_Ch36 ANT : 1+2(2) Setting : 19.5	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_Ch36 ANT : 1+2(2) Setting : 19.5
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_Ch36 ANT : 1+2(2) Setting : 19.5	Left blank

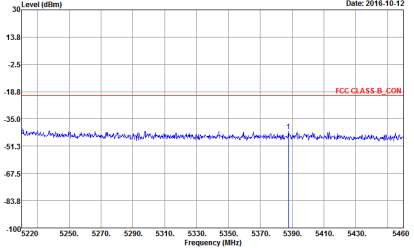
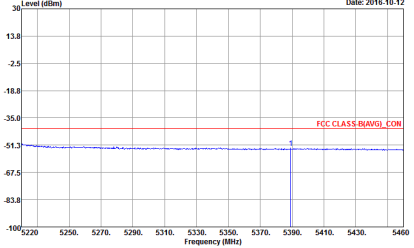


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH36 5180MHz - R	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH36 ANT : 1+2(2) Setting : 19.5	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH36 ANT : 1+2(2) Setting : 19.5	Left blank

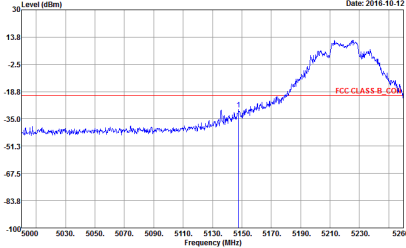
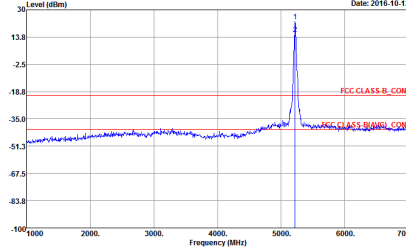
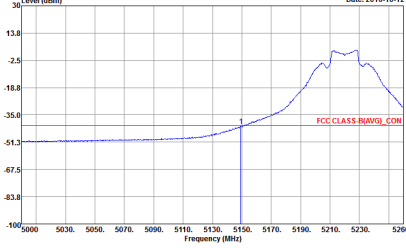


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH44 5220MHz - L	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 83CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH44 ANT : 1+2(2) Setting : 28	 Site : 83CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH44 ANT : 1+2(2) Setting : 28
Avg.	 Site : 83CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH44 ANT : 1+2(2) Setting : 28	Left blank

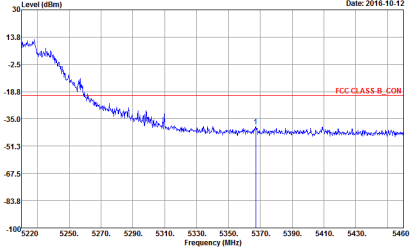
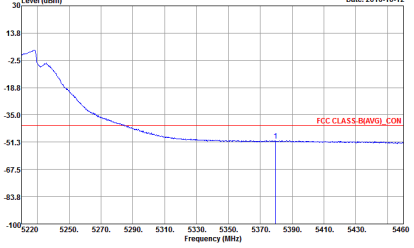


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH44 5220MHz - R	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tr_Ch44 ANT : 1+2(2) Setting : 20	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tr_Ch44 ANT : 1+2(2) Setting : 20	Left blank

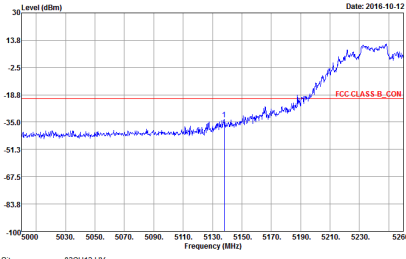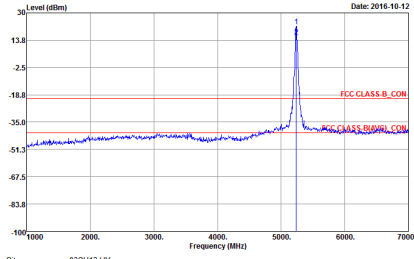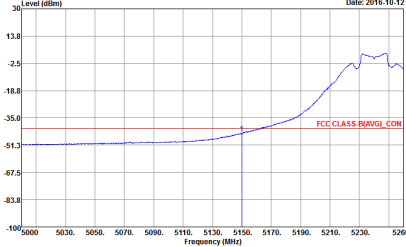

WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH48 5240MHz - L	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(2) Setting : 30	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(2) Setting : 30
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(2) Setting : 30	Left blank

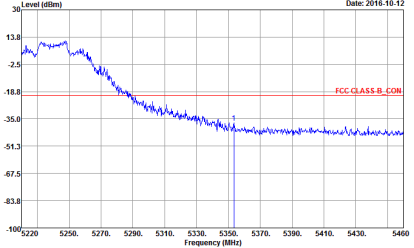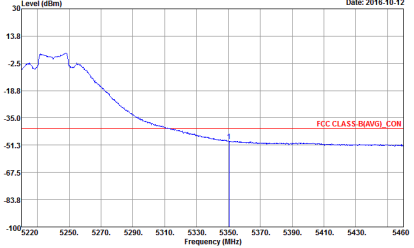



WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT20 CH48 5240MHz - R	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(2) Setting : 30	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH48 ANT : 1+2(2) Setting : 30	Left blank






Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge)

WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT40 CH38 5190MHz - L	
1+2(2)	Band Edge	Fundamental
Peak	Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch38 ANT : 1+2(2) Setting : 17	Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch38 ANT : 1+2(2) Setting : 17
Avg.	Site : 03CH13-HY Condition : FCC CLASS-B_AVG_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch38 ANT : 1+2(2) Setting : 17	Left blank

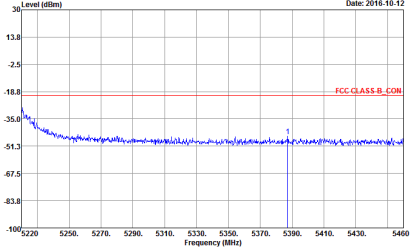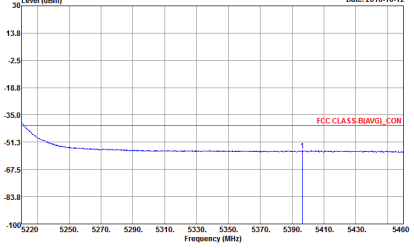

WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT40 CH38 5190MHz - R	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tr_Ch38 ANT : 1+2(2) Setting : 17	Left blank
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tr_Ch38 ANT : 1+2(2) Setting : 17	Left blank

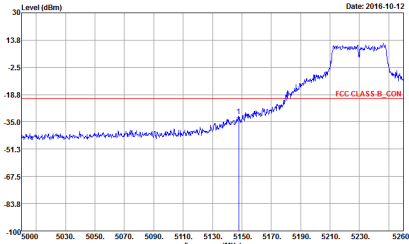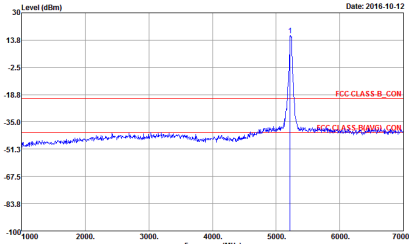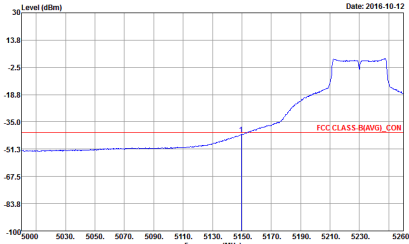




WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT40 CH46 5230MHz - L	
1+2(2)	Band Edge	Fundamental
Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch46 ANT : 1+2(2) Setting : 23	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch46 ANT : 1+2(2) Setting : 23
Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_Ch46 ANT : 1+2(2) Setting : 23	Left blank





WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11n HT40 CH46 5230MHz - R	
1+2(2)	Band Edge	Fundamental
Peak	Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_CH46 ANT : 1+2(2) Setting : 23	Left blank
Avg.	Site : 03CH13-HY Condition : FCC CLASS-B(AVG)_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_CH46 ANT : 1+2(2) Setting : 23	Left blank



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge)

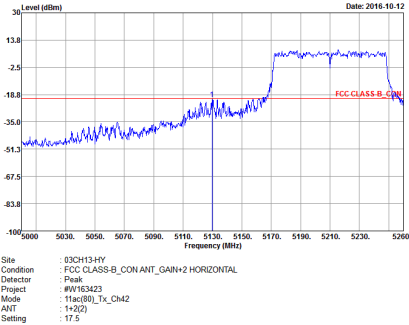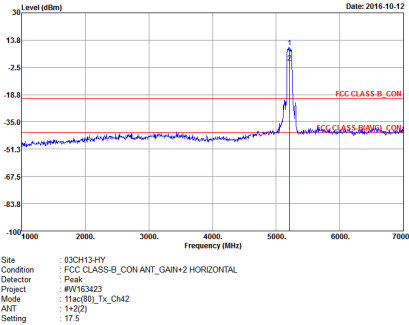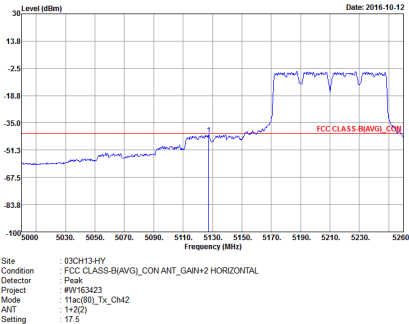WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11ac VHT80 CH42 5210MHz - L	
1+2(2)	Band Edge	Fundamental
Peak		
Avg.		Left blank

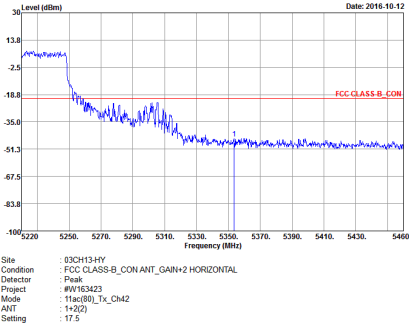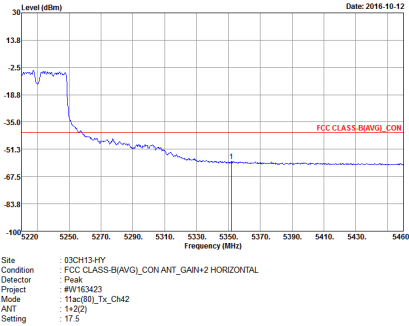


WIFI	Band 1 5150~5250MHz Band Edge	
ANT	802.11ac VHT80 CH42 5210MHz - R	
1+2(2)	Band Edge	Fundamental
Peak		Left blank
Avg.		Left blank




Band 1 5150~5250MHz


WIFI 802.11a (Harmonic)

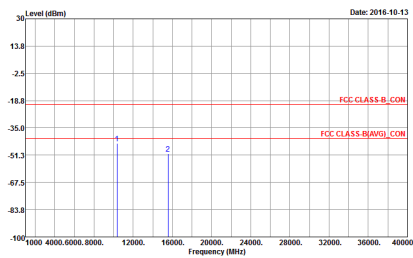WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11a CH36 5180MHz	
1+2(2)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIH+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a Tx_CH36 ANT : 1+2(2) Setting : 20	Left blank

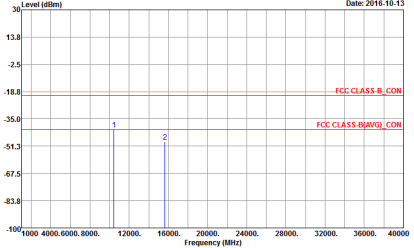


WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11a CH44 5220MHz	
1+2(2)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch44 ANT : 1+2(2) Setting : 25	Left blank

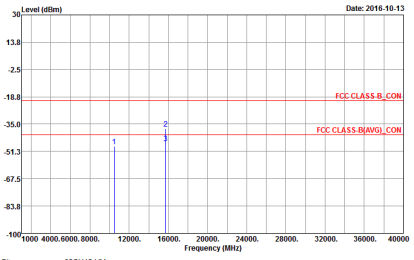


WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11a CH48 5240MHz	
1+2(2)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS B1_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a_Tx_Ch48 ANT : 1+2(2) Setting : 30	Left blank




Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic)

WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT20 CH36 5180MHz	
1+2(2)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIH+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n20)_Tx_CH36 ANT : 1+2(2) Setting : 19.5	Left blank

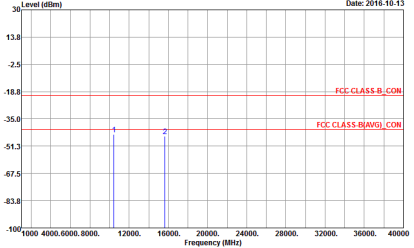


WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT20 CH44 5220MHz	
1+2(2)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #04163423 Mode : 11a(n20)_Tr_CH44 ANT : 1+2(2) Setting : 20	Left blank

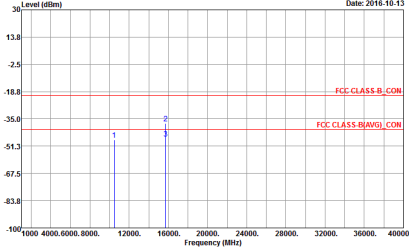


WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT20 CH48 5240MHz	
1+2(2)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON.ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(20)_Tx_CH48 ANT : 1+2(2) Setting : 30	Left blank



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic)

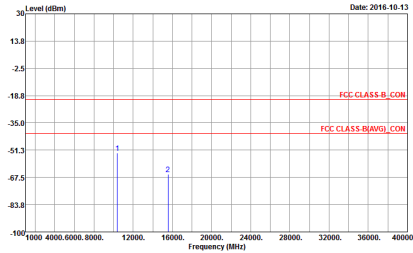
WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT40 CH38 5190MHz	
1+2(2)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GARHV2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_CA38 ANT : 1+2(2) Setting : 17	Left blank

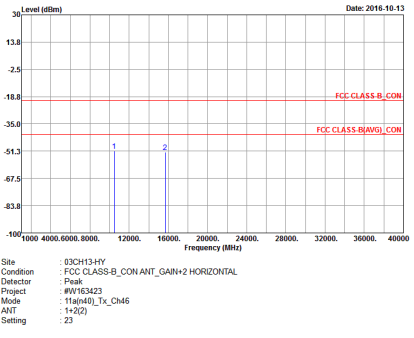

WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11n HT40 CH46 5230MHz	
1+2(2)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(n40)_Tx_CH46 ANT : 1+2(2) Setting : 23	Left blank




Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic)

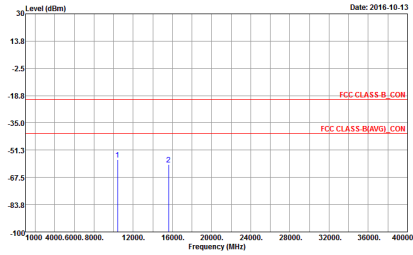WIFI	Band 1 5150~5250MHz Harmonic	
ANT	802.11ac VHT80 CH42 5210MHz	
1+2(2)		
Peak Avg.	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11ac(80)_Tx_CH42 ANT : 1+2(2) Setting : 17.5	Left blank



Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)

WIFI	5GHz WIFI	
ANT	802.11n HT20 LF	
1+2(2)		
QP / Peak	 Site : 03CH13-HY Condition : FCC CLASS-B_CON ANT_GAIN+2 HORIZONTAL Detector : Peak Project : #W163423 Mode : 11a(20)_Tx_Ch36 ANT : 1+2(2) Setting : 19.5	Left blank