




Connect Display 13"

PoE-powered, 13" Full HD touchscreen display designed for UniFi Connect.

The Connect Display 13" (UC Display13) is a PoE-powered, HD touchscreen display designed for UniFi Connect. The UC Display13 offers robust functionality with its two presentation modes: Digital Signage and Protect. In Digital Signage Mode, the UC Display13 showcases your custom, multimedia playlists in either landscape or portrait mode, and gives you the ability to schedule when they are presented. This display is ideal for businesses, hotels, convention centers, and other populated venues that need an intuitive, centrally managed content broadcasting solution to enhance the experience of clients and patrons. In Protect Mode, the UC Display13 provides the same intuitive camera management experience as the UniFi Protect application. With its included table mount and optional recessed or wall mounts (sold separately), the UC Display13 can be staged virtually anywhere within your space, and can be set up in minutes with the UniFi Connect web application or mobile app.

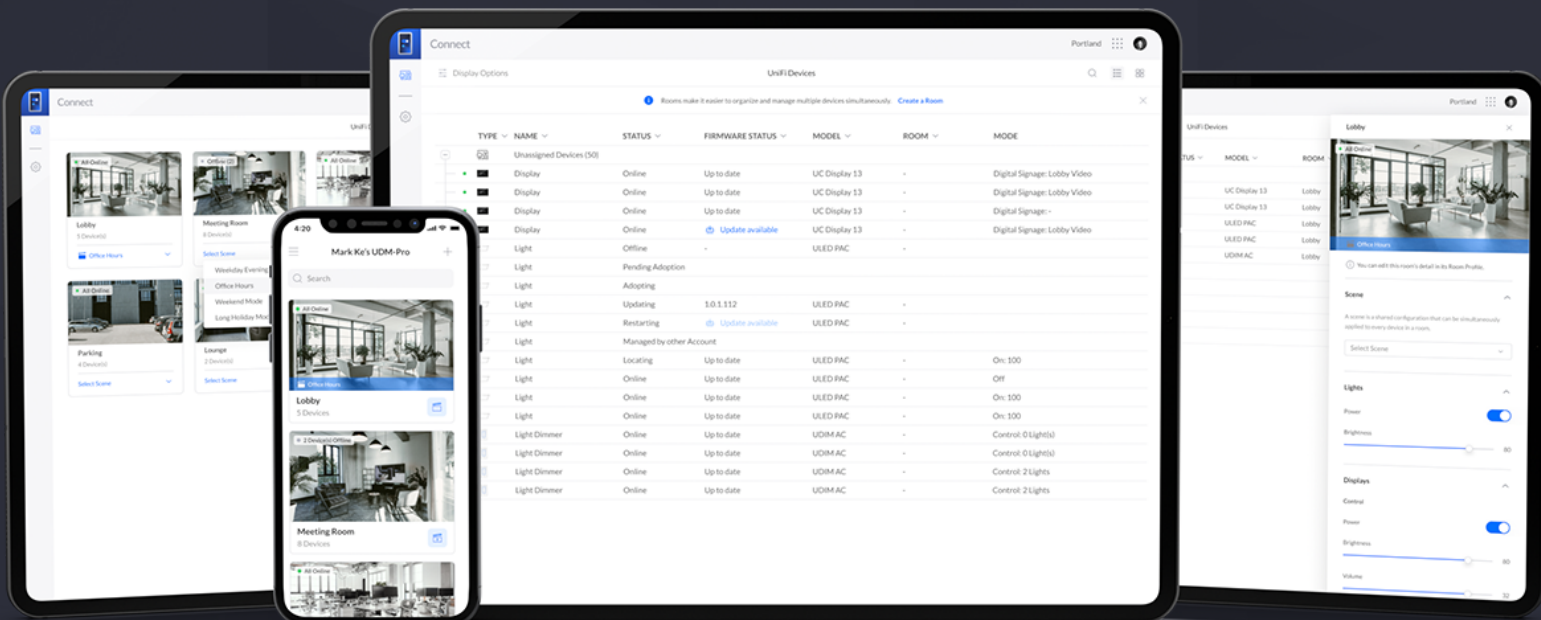

Mechanical

Dimensions	Without table stand: 315.8 x 197.6 x 48.8 mm (12.4 x 7.8 x 1.9") With table stand: 315.8 x 235.9 x 125.5 mm (12.4 x 9.3 x 4.9")
Weight	Without table stand: 1.2 kg (2.65 lb) With table stand: 1.94 kg (4.28 lb)
Mounting	Table stand (included) Recessed mount (optional) Surface mount (optional)

Hardware

Display size	337 mm (13.3") diagonal
Resolution	1920 x 1080 FHD (16:9)
Display luminance	340 nits (typical)
Touch screen technology	Capacitive multi-touch
Processor	Octa-core ARM® Cortex®-A53 at 2.2 GHz
Memory	Storage: 32 GB RAM: 2 GB
Power input	802.3at PoE+, 48VDC, 0.5A
Connectivity	(1) GbE RJ45 port (1) USB-C port (for accessory UC-DisplayCam only) Bluetooth® 4.2 Wi-Fi 2.4G b/g/n/ac, BW 20/40 MHz Wi-Fi 5G a/n/ac, BW 20/40/80 MHz
Button	Factory reset
Sensors	TOF (time of flight), NFC, G sensor (3-axis accelerometer)
NFC reading range	< 10 mm (< 0.4")
NFC standards	ISO 14443A, 14443B, 15693
NFC technology	NFC Tag 1, 2, 3, 4, 5 MIFARE Classic MIFARE Plus MIFARE Ultralight MIFARE DESFire EV1/EV2
Embedded front camera	5 MP
Microphone	Yes
Speaker	Yes
Operating temperature	0 to 40° C (32 to 104° F)



Operating humidity	20 - 90% noncondensing
--------------------	------------------------

Certifications	FCC, IC
----------------	---------

Software

Application	UniFi Connect
-------------	---------------

Minimum software requirements	Web browser (Chrome™ recommended)
-------------------------------	-----------------------------------

Mobile apps	UniFi Connect iOS™ and Android™
-------------	---------------------------------

E-label Access

E-label and warning statements can be found in the device/controller GUI under Device > Overview > E-label info