


Cloud Gateway Fiber

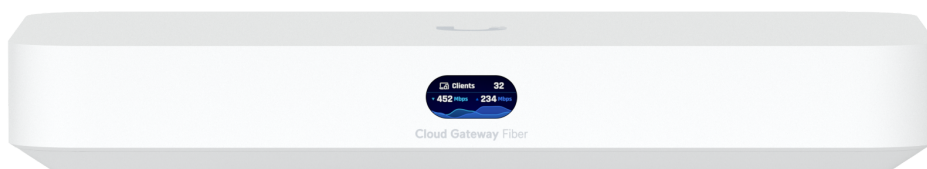

Compact multi-WAN UniFi Gateway featuring 10 GbE, PoE output, and a complete suite of advanced routing features.**Mechanical**

Dimensions	212.8 x 127.6 x 30 mm (8.4 x 5 x 1.2")
Weight	696 g (1.5 lb)
Enclosure material	Polycarbonate

Hardware

Processor	Quad-core ARM® Cortex®-A73 at 2.2 GHz
Memory information	3 GB DDR4
NVR storage	Selectable NVMe SSD up to 2 TB* *Sold separately.
Management interface	Ethernet Bluetooth
Networking interface	LAN: (1) 10G SFP+ port (4) 2.5 GbE RJ45 ports WAN: (1) 10G SFP+ port (1) 10 GbE RJ45 port
PoE interface	(1) PoE+ (Pair A 1, 2+; 3, 6-)
IDS/IPS throughput	9.3 Gbps
Power method	DC jack (54V DC/1.1A)
Supported voltage range	100–240V AC
Max. power consumption	29.4W (Excluding PoE output)
PoE budget	30W
Max. PoE wattage per port by PSE	30W
Voltage range PoE mode	50–57V DC
ESD/EMP protection	Air: ± 4kV, contact: ± 8kV
LCM display	0.96" status display
Button	(1) Factory reset
Ambient operating temperature	0 to 40° C (32 to 104° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

LEDs

Ethernet	Green: Link/activity Amber: PoE powered
SFP+	Green: Link/activity



Specifications are subject to change. Ubiquiti products are sold with a limited warranty described at: www.ui.com/support/warranty

©2025 Ubiquiti Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, UniFi, and UniFi Network are trademarks or registered trademarks of Ubiquiti Inc. in the United States and in other countries. Arm and Cortex are registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere. All other trademarks are the property of their respective owners.

