



427 West 12800 South
Draper, UT 84020

Test Report Certification

FCC ID	SWX-UDR5GM
IC ID	6545A-UDR5GM
Equipment Under Test	UDR-5G-Max
Test Report Serial Number	TR10368_01
Date of Test(s)	17, 21, 25 April; 9 and 23 September 2025
Report Issue Date	24 September 2025

Test Specification	Applicant
47 CFR FCC Part 15, Subpart C RSS-247 Issue 3 (August 2023)	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.



NVLAP LAB CODE 600241-0

Certification of Engineering Report

This report has been prepared by Unified Compliance Laboratory (UCL) to document compliance of the device described below with the requirement of Federal Communication Commissions (FCC) Part 15, Subpart C. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested with the specifications provided by the manufacturer.

Applicant	Ubiquiti Inc.
Manufacturer	Ubiquiti Inc.
Brand Name	UBIQUITI
Model Number	UDR-5G-Max
FCC ID	SWX-UDR5GM
IC ID	6545A-UDR5GM

On this 24th day of September 2025, I individually and for Unified Compliance Laboratory certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge and are made in good faith. Unified Compliance laboratory is not responsible for incorrect information provided by the manufacturer.

Although NVLAP has accredited the Unified Compliance Laboratory testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. federal government.

Unified Compliance Laboratory


Written By: Joseph W. Jackson
Reviewed By: Kimberly DeBole

Revision History		
Revision	Description	Date
01	Original Report Release	24 September 2025

Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT	6
2.2	Description of EUT	6
2.3	EUT and Support Equipment	6
2.4	Interface Ports on EUT	7
2.5	Operating Environment.....	7
2.6	Operating Modes.....	7
2.7	EUT Exercise Software.....	7
2.8	Block Diagram of Test Configuration	8
2.9	Modification Incorporated/Special Accessories on EUT.....	8
2.10	Deviation, Opinions Additional Information or Interpretations from Test Standard.....	8
3	Test Specification, Method and Procedures.....	9
3.1	Test Specification.....	9
3.2	Methods & Procedures.....	9
3.3	FCC Part 15, Subpart C	9
3.4	Results.....	10
3.5	Test Location	10
4	Test Equipment	11
4.1	Conducted Emissions at Mains Ports.....	11
4.2	Direct Connect at the Antenna Port Tests.....	11
4.3	Radiated Emissions	12
4.4	Equipment Calibration	13
4.5	Measurement Uncertainty	13
5	Test Results.....	14
5.1	§15.203 Antenna Requirements.....	14
5.2	§15.203 Conducted Emissions at Mains Ports Data	15
5.3	§15.247(a)(2) Emissions Bandwidth.....	17
5.4	§15.247(b)(3) Maximum Average Output Power	17
5.5	§15.247(d) Spurious Emissions	18
5.6	§15.247(e) Maximum Average Power Spectral Density	23

1 Client Information

1.1 Applicant

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

1.2 Manufacturer

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

2 Equipment Under Test (EUT)

2.1 Identification of EUT

Brand Name	UBIQUITI
Model Number	UDR-5G-Max
Serial Number	34AF60
Dimensions (cm)	11.0 x 11.0 x 25.0

2.2 Description of EUT

The UDR-5G-Max is a WiFi 7 UniFi Desk Cloud Gateway with a broadband 5G network. The UDR-5G-Max has one 10 GbE SFP+ port and 4 RJ45 PoE ports. The UDR-5G-Max transmits in the 2.4 GHz, 5 GHz, and 6 GHz frequency bands using internal integral antennas. The UDR-5G-Max has a Bluetooth transmitter for system management. The UDR-5G-Max is powered by 54 VDC from a 100 - 240 Volts AC Mains power adapter.

This report covers the circuitry of the device subject to FCC Part 15, Subpart C. The circuitry of the device subject to FCC Part 15 Subpart B was found to be compliant and is covered under a separate Unified Compliance Laboratory test report.

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: UBIQUITI MN: UDR-5G-Max (Note 1) SN: 34AF60	Desktop Gateway	See Section 2.4
BN: UBIQUITI MN: ADS-60SH-54-354060E SN: N/A	Power Adapter	See Section 2.4
BN: Dell MN: XPS 13 SN: N/A	Laptop Computer	Ethernet/un-shielded Cat 5

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT

Name of Ports	No. of Ports Fitted to EUT	Cable Description/Length
54 VDC Power Port	1	2 conductor power cable from power adapter/150 cm
10 GbE SFP WAN	1	Shielded cat 5E/7m
PoE Input	4	Unshielded Cat 5E/7m

2.5 Operating Environment

Power Supply	120 Volts AC Mains to 54 VDC
AC Mains Frequency	60 Hz
Temperature	22.7 – 23.8 °C
Humidity	23.5 – 28.5 %
Barometric Pressure	1009 mBar

2.6 Operating Modes

The UDR-5G-Max was connected to a personal computer laptop and tested using test software in order to enable to constant duty cycle greater or equal to 98% of the Bluetooth transceiver.

2.7 EUT Exercise Software

EUT firmware version 1.0 was used to operate the transmitter using a constant transmit mode.

2.8 Block Diagram of Test Configuration

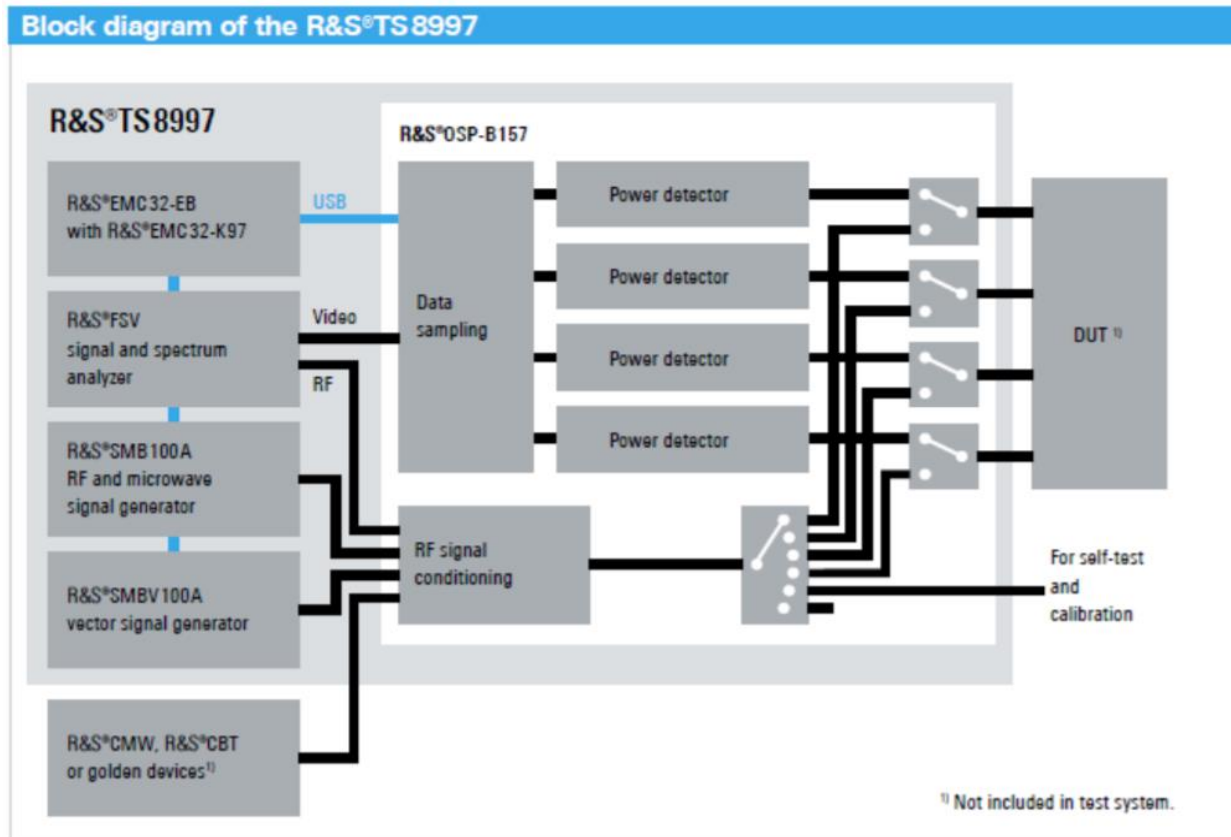


Diagram 1: Test Configuration Block Diagram

2.9 Modification Incorporated/Special Accessories on EUT

There were no modifications made to the EUT during testing to comply with the specification.

2.10 Deviation, Opinions Additional Information or Interpretations from Test Standard

There were no deviations, opinions, additional information or interpretations from the test specification.

3 Test Specification, Method and Procedures

3.1 Test Specification

Title	47 CFR FCC Part 15, Subpart C 15.203, 15.207 and 15.247 Limits and methods of measurement of radio interference characteristics of radio frequency devices.
Purpose of Test	The tests were performed to demonstrate initial compliance

3.2 Methods & Procedures

3.2.1 47 CFR FCC Part 15 Section 15.203

See test standard for details.

3.2.2 47 CFR FCC Part 15 Section 15.207

See test standard for details.

3.2.3 47 CFR FCC Part 15 Section 15.247

See test standard for details.

3.3 FCC Part 15, Subpart C

3.3.1 Summary of Tests

FCC Section	ISED Section	Environmental Phenomena	Frequency Range (MHZ)	Result
15.203	N/A	Antenna requirements	Structural Requirement	Compliant
15.207	RSS-Gen	Conducted Disturbance at Mains Port	0.15 to 30	Compliant
15.247(a)	RSS-247 § 5.2	Bandwidth Requirement	2400 to 2483.5	Compliant
15.247(b)	RSS-247 § 5.4	Peak Output Power	2400 to 2483.5	Compliant
15.247(d)	RSS-247 § 5.4	Antenna Conducted Spurious Emissions	0.009 to 40000	N/A
15.247(d)	RSS-247 § 5.4	Radiated Spurious Emissions	0.009 to 40000	Compliant
15.247(e)	RSS-247 § 5.2	Peak Power Spectral Density	2400 to 2483.5	Compliant
The testing was performed according to the procedures in ANSI C63.10-2013, KDB 558074 and 47 CFR Part 15. Where applicable, KDB 662911 was followed to sum required measurements.				

3.4 Results

In the configuration tested, the EUT complied with the requirements of the specification.

3.5 Test Location

Testing was performed at the Unified Compliance Laboratory 3-Meter and 10-Meter chambers located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2026. This site has also been registered with Innovations, Science and Economic Development (ISED) department and was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2026.

Unified Compliance Laboratory has been assigned Designation Number US5037 by the FCC and Conformity Assessment Number US0223 by ISED.

4 Test Equipment

4.1 Conducted Emissions at Mains Ports

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	AFJ	FFT3010	UCL-6754	2/27/2025	2/27/2026
LISN	AFJ	LS16C/10	UCL-6749	3/3/2025	3/3/2026
ISN	Teseq	ISN T800	UCL-2971	3/31/2025	3/31/2026
AC Power Source	Laplace Instruments	AC1000A	UCL-2857	N/A	N/A
Test Software	UCL	Revision 1	UCL-3107	N/A	N/A

Table 1: List of equipment used for Conducted Emissions Testing at Mains Port

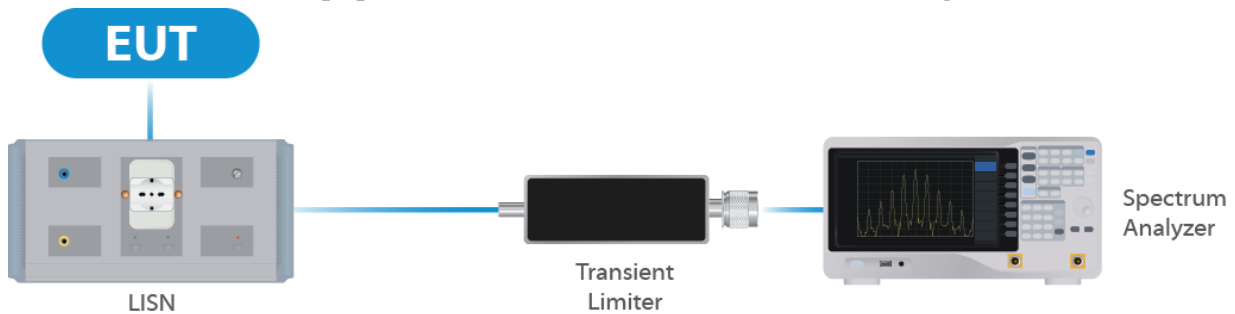


Figure 1: Conducted Emissions Test

4.2 Direct Connect at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	R&S	FSV40	UCL-2861	1/16/2025	1/16/2026
Signal Generator	R&S	SMB100A	UCL-2864	N/A	N/A
Vector Signal Generator	R&S	SMBV100A	UCL-2873	N/A	N/A
Switch Extension	R&S	OSP-B157WX	UCL-2867	4/28/2025	1/16/2026
Switch Extension	R&S	OSP-150W	UCL-2870	4/28/2025	1/16/2026
Test Software	R&S	EMC32	UCL-9442	--	--

Table 2: List of equipment used for Direct Connect at the Antenna Port

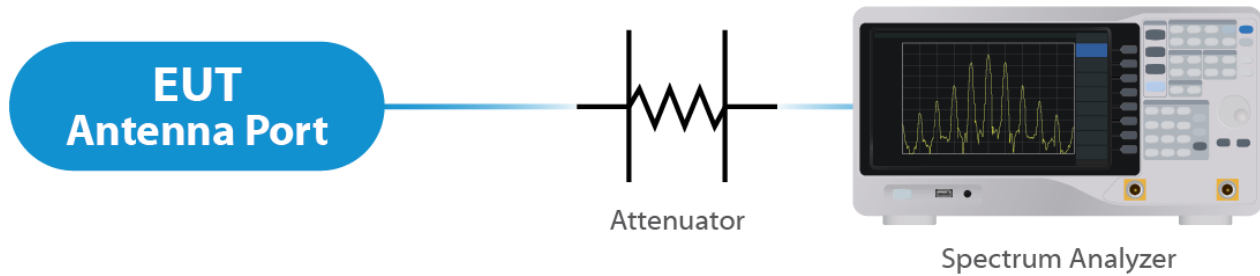


Figure 2: Direct Connect at the Antenna Port Test

4.3 Radiated Emissions

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	Keysight	N9038A	UCL-2778	12/27/2024	12/27/2025
Pre-Amplifier 9 kHz – 1 GHz	Sonoma Instruments	310N	UCL-2889	1/19/2024	1/19/2026
Broadband Antenna	ETS-Lindgren	3142E	UCL-9782	2/6/2025	2/6/2026
Double Ridge Horn Antenna	Scwarzbeck	BBHA 9120D	UCL-3065	4/2/2025	4/2/2027
Log Periodic	Scwarzbeck	STLP 9129	UCL-3068	2/11/2025	2/4/2027
10 - 40 GHz Horn Antenna	ETS-Lindgren	3116C	UCL-7209	6/6/2024	6/6/2026
1 – 18 GHz Amplifier	Com-Power	PAM 118A	UCL-3833	7/22/2025	7/22/2026
Test Software	Nexio	BatEMC	UCL-5253 & UCL-5249	N/A	N/A

Table 3: List of equipment used for Radiated Emissions

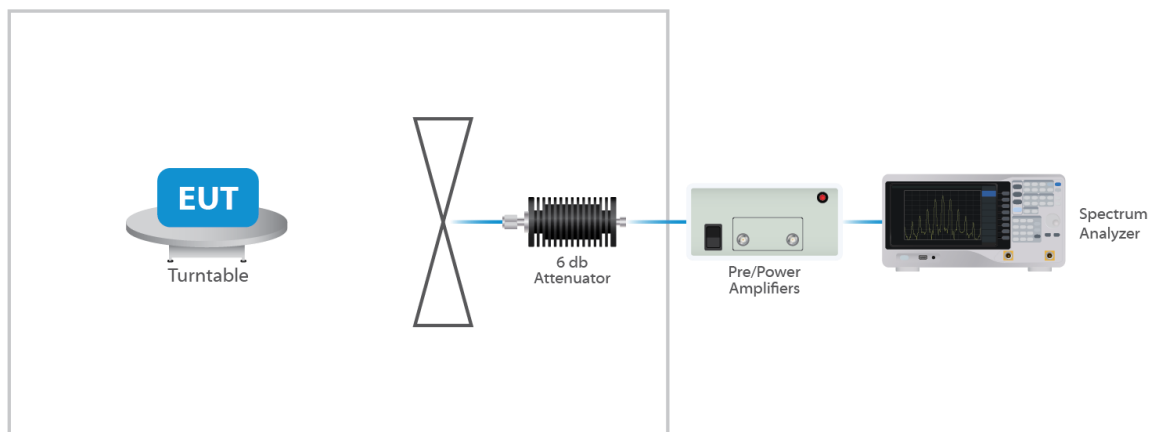


Figure 3: Radiated Emissions Test

4.4 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or Unified Compliance Laboratory personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to traceability is on file and is available for examination upon request.

4.5 Measurement Uncertainty

Test	Uncertainty ($\pm$ dB)	Confidence (%)
Conducted Emissions	1.44	95
Radiated Emissions (9 kHz to 30 MHz)	2.50	95
Radiated Emissions (30 MHz to 1 GHz)	4.38	95
Radiated Emissions (1 GHz to 18 GHz)	4.37	95
Radiated Emissions (18 GHz to 40 GHz)	3.93	95
Direct Connect Tests	K Factor	Value
Emissions Bandwidth	2	2.0%
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band Edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

5 Test Results


5.1 §15.203 Antenna Requirements

The EUT uses an internal integral antenna. As per the manufacturer, the Maximum gain of the antenna is 6 dBi. The antenna is not user replaceable.

Results


The EUT complied with the specification

5.2 §15.203 Conducted Emissions at Mains Ports Data

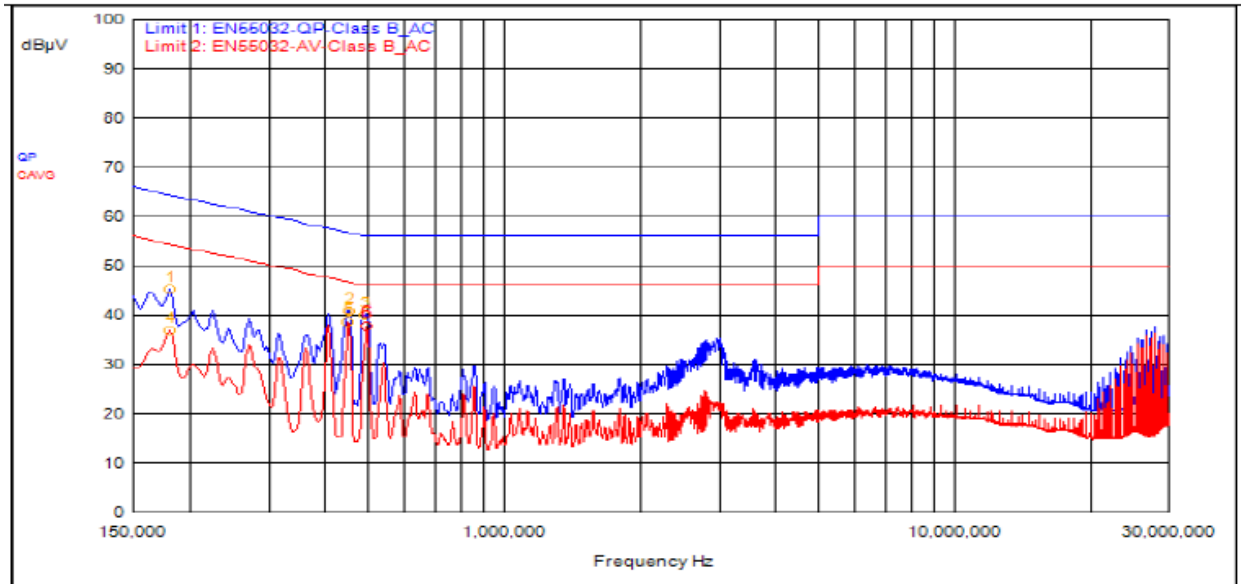

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit 1	Limit 1 Dist.	Limit 2	Limit 2 Dist.	P/F
MU	MHz	dB	dB	dB	Type	dBμV	dBμV	dBμV	dB	dBμV	dB	P/F
2	453,000kHz	9.64			QPeak	31.09	40.73	56.82	-16.09			
3	489,000kHz	9.64			QPeak	30.26	39.90	56.18	-16.29			
1	180,000kHz	9.62			QPeak	35.61	45.23	64.49	-19.25			
4	180,000kHz	9.62			C_AVG	27.39	37.01			54.49	-17.47	
5	450,000kHz	9.64			C_AVG	29.08	38.72			46.88	-8.16	
6	495,000kHz	9.64			C_AVG	28.19	37.83			46.08	-8.25	

Graph 1: Conducted Emissions Plot - Neutral

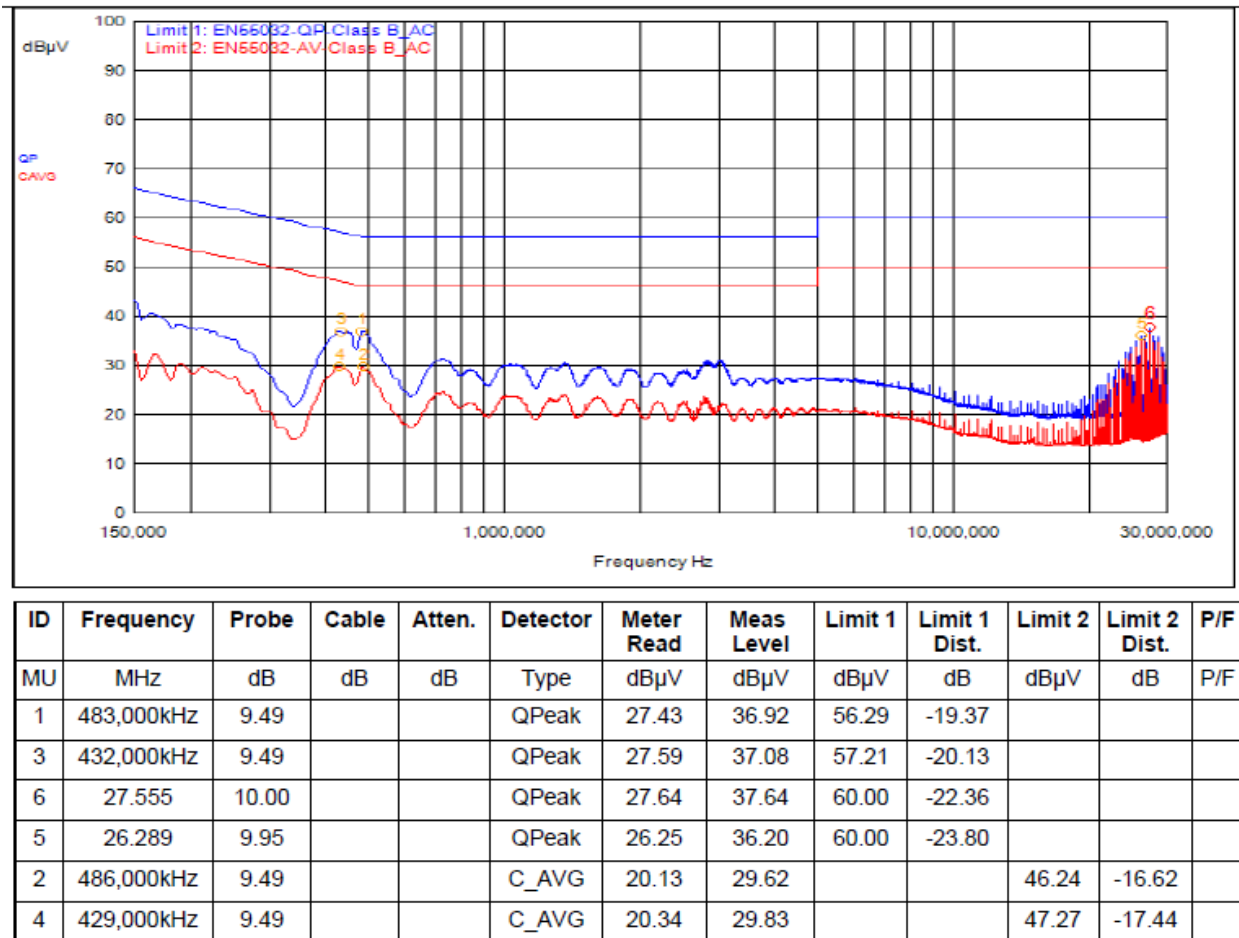

Graph 2: Conducted Emissions Plot – Line 1

Result

The EUT complied with the specification limit.

5.3 §15.247(a)(2) Emissions Bandwidth

Frequency (MHz)	Emissions 6 dB Bandwidth (MHz)	Emissions 99% Bandwidth (MHz)
2402	0.7	1.0
2442	0.6	1.0
2480	0.7	1.0

Result

In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plot within the Annex).

5.4 §15.247(b)(3) Maximum Average Output Power

The maximum average RF conducted output power measured for this device was 2.22 dBm or 1.67 mW. The limit is 30 dBm or 1 Watt when using antennas with 6 dBi or less gain. The antenna has a gain of 6 dBi.

Frequency (MHz)	Measured Output Power (dBm)	Output Power (mW)
2402	2.22	1.67
2442	0.89	1.23
2480	1.79	1.51

Result

In the configuration tested, the maximum average RF output power was less than 1 watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plot within the Annex).

5.5 §15.247(d) Spurious Emissions

5.5.1 Radiated Spurious Emissions in the Restricted Bands of §15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emissions was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emissions that fell into the restricted bands of §15.205. The tables show the worst-case emissions measured from the EUT. For frequencies above 18.0 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limits. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units. Plots of the band edges are shown in the annex.

Correction Factor = Antenna Factor (dBi) + Cable Loss (dB) - Pre-Amplifier Gain (dB), and is added to the Receiver reading.

Result

All emissions in the restricted bands of §15.205 met the limits specified in §15.209; therefore, the EUT complies with the specification.

QuasiPeak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
672.84 MHz	27.27	37.0	-9.73	142	1	Vertical	-4.98
679.48 MHz	25.91	37.0	-11.09	319	4	Vertical	-5.04
843.36 MHz	37.89	37.0	-9.11	212	3.83	Vertical	-2.69
53.11 MHz	27.01	30.0	-2.99	114	2.05	Horizontal	-11.81
675.93 MHz	25.98	37.0	-11.02	247	2.64	Horizontal	-4.98
843.50 MHz	27.96	37.0	-9.04	237	3.52	Horizontal	-2.68

Table 4: Radiated Emissions 30 – 1000 MHz

Peak

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
10.93 GHz	57.04	74.0	-16.96	338	1.838	Vertical	11.94
11.51 GHz	55.95	74.0	-18.05	95	1.643	Vertical	11.20
14.70 GHz	59.76	74.0	-14.24	357	4	Vertical	15.02
10.95 GHz	56.57	74.0	-17.43	283	3.798	Horizontal	11.74
14.68 GHz	59.24	74.0	-14.76	229	3.798	Horizontal	15.00
14.71 GHz	59.51	74.0	-14.49	61	1.838	Horizontal	14.95

Avg

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
10.93 GHz	43.55	54.0	-10.45	338	1.838	Vertical	11.94
11.51 GHz	42.64	54.0	-11.36	95	1.643	Vertical	11.20
14.70 GHz	46.50	54.0	-7.50	357	4	Vertical	15.02
10.95 GHz	43.21	54.0	-10.79	283	3.798	Horizontal	11.74
14.68 GHz	46.45	54.0	-7.55	229	3.798	Horizontal	15.00
14.71 GHz	46.51	54.0	-7.49	61	1.838	Horizontal	14.95

Table 5: Radiated Emissions 1 – 17 GHz at the Lowest Frequency

Peak

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
10.95 GHz	56.36	74.0	-17.64	158	3.307	Vertical	11.68
11.08 GHz	55.22	74.0	18.78	231	2.82	Vertical	10.70
14.64 GHz	58.65	74.0	15.35	52	1.5	Vertical	14.87
14.99 GHz	58.02	74.0	15.98	97	4	Vertical	14.10
10.93 GHz	56.48	74.0	-17.52	340	3.798	Horizontal	11.90
11.07 GHz	55.73	74.0	-18.27	209	3.798	Horizontal	10.71
14.62 GHz	58.37	74.0	-15.63	261	2.325	Horizontal	14.81
14.74 GHz	59.35	74.0	-14.65	219	1.638	Horizontal	14.76

Avg

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
10.95 GHz	43.01	54.0	-10.99	158	3.307	Vertical	11.68
11.08 GHz	42.26	54.0	-11.74	231	2.82	Vertical	10.70
14.64 GHz	45.56	54.0	-8.44	52	1.5	Vertical	14.87
14.99 GHz	45.25	54.0	-8.75	97	4	Vertical	14.10
10.93 GHz	43.38	54.0	-10.62	340	3.798	Horizontal	11.90
11.07 GHz	42.41	54.0	-11.59	209	3.798	Horizontal	10.71
14.62 GHz	45.55	54.0	-8.45	261	2.325	Horizontal	14.81
14.74 GHz	45.57	54.0	-8.43	219	1.638	Horizontal	14.76

Table 6: Radiated Emissions 1 – 17 GHz at the Middle Frequency

Peak

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
11.03 GHz	55.72	74.0	-18.28	233	2.816	Vertical	10.82
12.40 GHz	58.39	74.0	-15.61	161	1.5	Vertical	11.15
13.90 GHz	59.12	74.0	-14.88	298	1.6876	Vertical	13.47
14.93 GHz	60.01	74.0	-13.99	215	1.638	Vertical	14.23
10.94 GHz	56.74	74.0	-17.26	40	1.638	Horizontal	11.84
10.95 GHz	56.25	74.0	-17.75	247	1.638	Horizontal	11.71
12.40 GHz	55.55	74.0	-18.45	235	4	Horizontal	11.15
14.62 GHz	58.96	74.0	-15.04	159	2.325	Horizontal	14.83
14.84 GHz	58.53	74.0	-15.47	346	1.638	Horizontal	14.31

Avg

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
11.03 GHz	42.15	54.0	-11.85	233	2.816	Vertical	10.82
12.40 GHz	44.23	54.0	-9.72	161	1.5	Vertical	11.15
13.90 GHz	45.50	54.0	-8.50	298	1.6876	Vertical	13.47
14.93 GHz	45.72	54.0	-8.28	215	1.638	Vertical	14.23
10.94 GHz	43.51	54.0	-10.49	40	1.638	Horizontal	11.84
10.95 GHz	43.29	54.0	10.71	247	1.638	Horizontal	11.71
12.40 GHz	42.53	54.0	-11.47	235	4	Horizontal	11.15
14.62 GHz	45.87	54.0	-8.13	159	2.325	Horizontal	14.83
14.84 GHz	45.46	54.0	-8.54	346	1.638	Horizontal	14.31

Table 7: Radiated Emissions 1 – 17 GHz at the Highest Frequency

Peak

Frequency	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
27.60 GHz	55.40	74.0	-18.60	36	Vertical	3.59
35.10 GHz	57.72	74.0	-16.28	255	Vertical	5.42
39.51 GHz	60.38	74.0	-13.62	248	Vertical	6.96
33.82 GHz	56.07	74.0	-17.93	120	Horizontal	5.18
34.96 GHz	57.89	74.0	-16.11	5	Horizontal	5.90
35.67 GHz	57.13	74.0	-16.87	61	Horizontal	5.76
39.39 GHz	60.20	74.0	-13.80	280	Horizontal	6.40

Avg

Frequency	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
27.60 GHz	41.56	54.0	-12.44	36	Vertical	3.59
35.10 GHz	41.58	54.0	-12.42	255	Vertical	5.42
39.51 GHz	44.92	54.0	-9.08	248	Vertical	6.96
33.82 GHz	42.17	54.0	-11.83	120	Horizontal	5.18
34.96 GHz	41.76	54.0	-12.24	5	Horizontal	5.90
35.67 GHz	41.72	54.0	-12.28	61	Horizontal	5.76
39.39 GHz	44.06	54.0	-9.94	280	Horizontal	6.40

Table 8: Radiated Emissions 17 – 40 GHz at the Middle Frequency (worse case)

5.6 §15.247(e) Maximum Average Power Spectral Density

The maximum average power spectral density conducted from the intentional radiator of the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. Results of this testing are summarized.

Frequency (MHz)	Measurement (dBm)	Criteria (dBm)
2402	-4.26	8.0
2442	-5.52	8.0
2480	-4.75	8.0

Result

The maximum average power spectral density was less than the limit of 8 dBm; therefore, the EUT complies with the specification.

-- End of Test Report --