



427 West 12800 South
Draper, UT 84020

Test Report Certification

FCC ID	SWX-UG3TE
ISED ID	6545A-UG3TE
Equipment Under Test	UTP-G3-Touch-Enterprise
Test Report Serial Number	TR8467_02
Date of Test(s)	1 – 4, 17 – 18, 24 – 25 August and 19 September 2023
Report Issue Date	1 May 2025

Test Specification	Applicant
47 CFR FCC Part 15, Subpart E	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.



NVLAP LAB CODE 600241-0

Certification of Engineering Report


This report has been prepared by Unified Compliance Laboratory (UCL) to document compliance of the device described below with the requirement of Federal Communication Commissions (FCC) Part 15, Subpart E. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

Applicant	Ubiquiti Inc.
Manufacturer	Ubiquiti Inc.
Brand Name	UBIQUITI
Model Number	UTP-G3-Touch-Enterprise
FCC ID	SWX-UG3TE
ISED ID	6545A-UG3TE

On this 1st day of May 2025, I individually and for Unified Compliance Laboratory certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge and are made in good faith.

Although NVLAP has accredited the Unified Compliance Laboratory testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. federal government.

Unified Compliance Laboratory


Written By: Joseph W. Jackson
Reviewed By: Richard L. Winter

Revision History		
Revision	Description	Date
01	Original Report Release	21 September 2023
02	Change FCC and ISED ID Code, Model Name and Issue Date	1 May 2025

Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT	6
2.2	Description of EUT	6
2.3	EUT and Support Equipment	6
2.4	Interface Ports on EUT	7
2.5	Operating Environment.....	7
2.6	Operating Modes.....	7
2.7	EUT Exercise Software.....	7
2.8	Block Diagram of Test Configuration	8
2.9	Modification Incorporated/Special Accessories on EUT.....	8
2.10	Deviation, Opinions Additional Information or Interpretations from Test Standard.....	8
3	Test Specification, Method and Procedures.....	9
3.1	Test Specification.....	9
3.2	Methods & Procedures.....	9
3.3	FCC Part 15, Subpart E.....	9
3.4	Results.....	9
3.5	Test Location	10
4	Test Equipment	11
4.1	Conducted Emissions at Mains Ports.....	11
4.2	Direct Connect at the Antenna Port Tests.....	11
4.3	Radiated Emissions	12
4.4	Equipment Calibration	13
4.5	Measurement Uncertainty	13
5	Test Results.....	14
5.1	§15.203 Antenna Requirements.....	14
5.2	Conducted Emissions at Mains Ports Data	14
5.3	§15.403(i) 26 dB Emissions Bandwidth	16
5.4	§15.407(a)(2) Maximum Average Output Power	17
5.5	§15.407(b) Spurious Emissions	18
5.6	§15.407(a) Maximum Power Spectral Density	28

1 Client Information

1.1 Applicant

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

1.2 Manufacturer

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

2 Equipment Under Test (EUT)

2.1 Identification of EUT

Brand Name	UBIQUITI
Model Number	UTP-G3-Touch-Enterprise
Serial Number	0418D6A3F63B
Dimensions (cm)	25.4 x 13.5 x 18.3

2.2 Description of EUT

The UniFi Talk Phone G3 Touch Enterprise (UTP-G3-Touch-Enterprise) is an 802.3at PoE+ powered desk phone with touch screen, camera and easy setup with UniFi Talk service via Bluetooth. The UTP-G3-Touch-Enterprise has an Ethernet port and WiFi connection with 2.4GHz and 5GHz radio. The UTP-Touch-Enterprise can also be powered via USB-C 5V DC power supply.

Band	WiFi Mode	Modulation Bandwidth	Modulation Type	Frequency (MHz)
UNII-1	a	20 MHz	OFDM	5180, 5200, 5220, 5240
	ac	20 MHz	VHT	5180, 5200, 5220, 5240
	ac	40 MHz	VHT	5190, 5230
	ac	80 MHz	VHT	5210

This report covers the circuitry of the device subject to FCC Part 15, Subpart E. The circuitry of the device subject to FCC Part 15 Subpart B was found to be compliant and is covered under a separate Unified Compliance Laboratory test report.

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: UBIQUITI MN: UTP-G3-Touch-Enterprise SN: 0418D6A3F63B	UniFi Telephone Set	See section 2.4
BN: Dell MN: XPS SN: N/A	Laptop Computer	USB Cable (See Note 2)
BN: UBIQUITI MN: E015-1G050300VU SN: N/A	USB-C Power Adapter	USB-C Cable (Note 2)

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT

Name of Ports	No. of Ports Fitted to EUT	Cable Description/Length
Ethernet Port	1	Unshielded Cat 5e Ethernet Cable
AC (PoE Injector)	1	3 Conductor power cord/80cm
AC (USB-C)	1	2 conductor/2 meters

2.5 Operating Environment

Power Supply	120 VAC to 48V PoE or USB-C Power
AC Mains Frequency	60 Hz
Temperature	23.0 – 26.5 °C
Humidity	33.2 – 48.1 %
Barometric Pressure	1019 mBar

2.6 Operating Modes

The UTP-G3-Touch-Enterprise was tested using test software in order to enable a constant transmission. The measurements within this report are corrected to reference a 100% duty cycle. All emission modes of 802.11 a/ac were investigated. All measurements are reported with the worst-case mode (802.11ac) unless otherwise stated.

2.7 EUT Exercise Software

EUT firmware version 1.0 was used to operate the transmitter using a constant transmit mode.

2.8 Block Diagram of Test Configuration

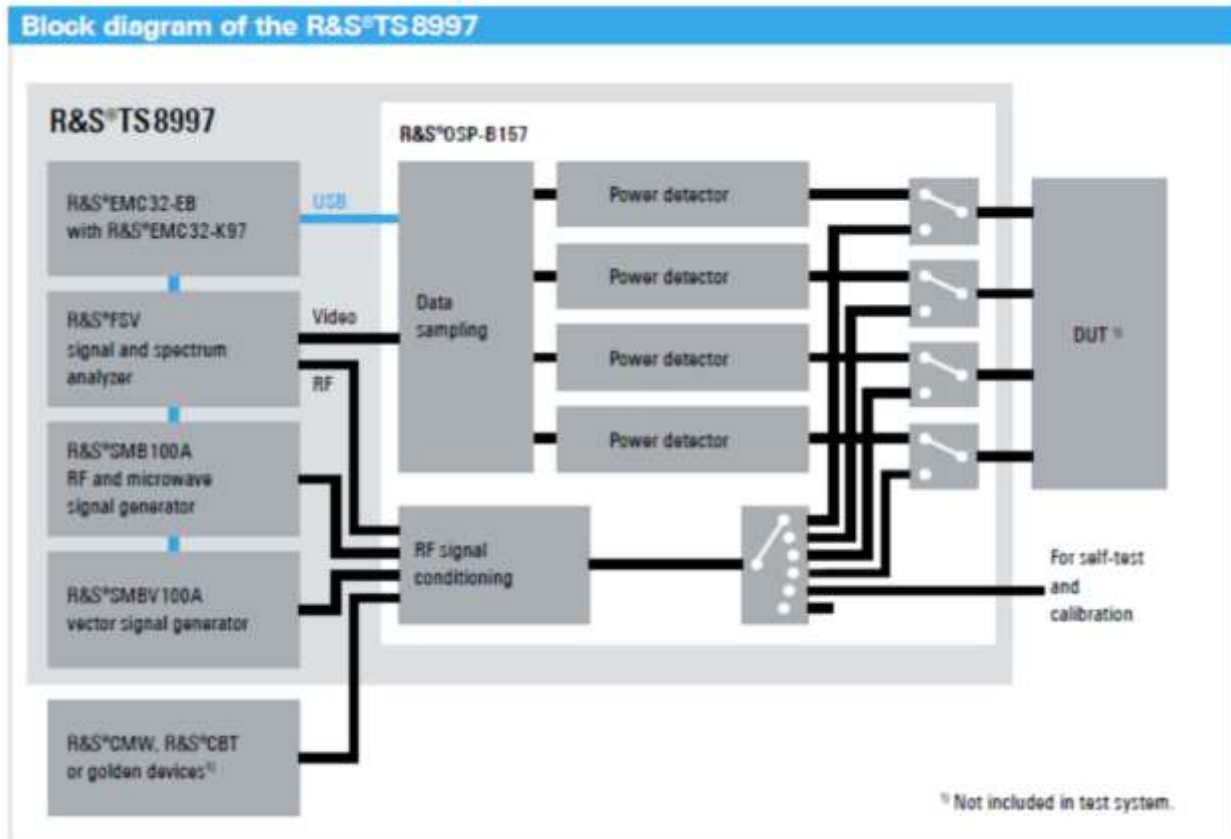


Diagram 1: Test Configuration Block Diagram

2.9 Modification Incorporated/Special Accessories on EUT

There were no modifications made to the EUT during testing to comply with the specification.

2.10 Deviation, Opinions Additional Information or Interpretations from Test Standard

There were no deviations, opinions, additional information or interpretations from the test specification.

3 Test Specification, Method and Procedures

3.1 Test Specification

Title	47 CFR FCC Part 15, Subpart E, Section 15.407 Limits and methods of measurement of radio interference characteristics of Unlicensed National Information Infrastructure Devices
Purpose of Test	The tests were performed to demonstrate initial compliance

3.2 Methods & Procedures

3.2.1 47 CFR FCC Part 15 Section 15.407

See test standard for details.

3.3 FCC Part 15, Subpart E

3.3.1 Summary of Tests

FCC Section	ISED Section	Environmental Phenomena	Frequency Range (MHZ)	Result
15.407(a)	N/A	Antenna requirements	Structural Requirement	Compliant
15.407(b)	RSS-Gen	Conducted Disturbance at Mains Port	0.15 to 30	Compliant
15.407(c)	RSS-247 §6.2.2, §6.2.3	Bandwidth Requirement	5180 to 5210	Compliant
15.407(e)	RSS-247 §6.2.2, §6.2.3	Peak Output Power	5180 to 5210	Compliant
15.407(f)	RSS-247 §6.2.2, §6.2.3	Antenna Conducted Spurious Emissions	0.009 to 40000	N/A
15.407(g)	RSS-247 §6.2.2, §6.2.3	Radiated Spurious Emissions	0.009 to 40000	Compliant
15.407(h)	RSS-247 §6.2.2, §6.2.3	Peak Power Spectral Density	5180 to 5210	Compliant
The testing was performed according to the procedures in ANSI C63.10-2013, KDB 789033 and 47 CFR Part 15. Where applicable, KDB 662911 was followed to sum required measurements.				

3.4 Results

In the configuration tested, the EUT complied with the requirements of the specification.

3.5 Test Location

Testing was performed at the Unified Compliance Laboratory 3-Meter and 10-Meter chambers located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2024. This site has also been registered with Innovations, Science and Economic Development (ISED) department as was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2024.

Unified Compliance Laboratory has been assigned Designation Number US5037 by the FCC and Conformity Assessment Number US0223 by ISED.

4 Test Equipment

4.1 Conducted Emissions at Mains Ports

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	AFJ	FFT3010	UCL-6754	2/22/2023	2/22/2024
LISN	AFJ	LS16C/10	UCL-6749	12/6/2021	12/6/2023
ISN	Teseq	ISN T800	UCL-2974	6/27/2022	6/27/2024
LISN	Com-Power	LIN-120C	UCL-2612	1/24/2023	1/24/2024
AC Power Source	Laplace Instruments	AC1000A	UCL-2857	N/A	N/A
Test Software	UCL	Revision 1	UCL-3107	N/A	N/A

Table 1: List of equipment used for Conducted Emissions Testing at Mains Port

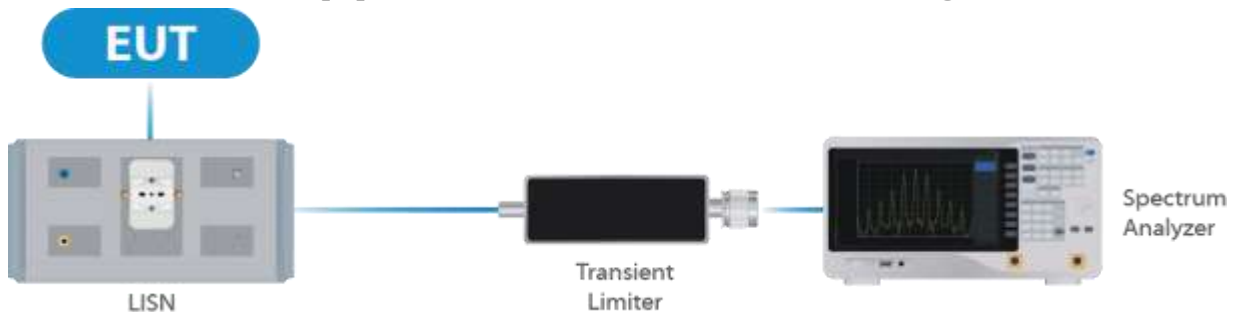


Figure 1: Conducted Emissions Test

4.2 Direct Connect at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	R&S	FSV40	UCL-2861	11/7/2022	11/7/2023
Signal Generator	R&S	SMB100A	UCL-2864	N/A	N/A
Vector Signal Generator	R&S	SMBV100A	UCL-2873	N/A	N/A
Switch Extension	R&S	OSP-B157WX	UCL-2867	2/22/2023	2/22/2024
Switch Extension	R&S	OSP-150W	UCL-2870	2/22/2023	2/22/2024

Table 2: List of equipment used for Direct Connect at the Antenna Port

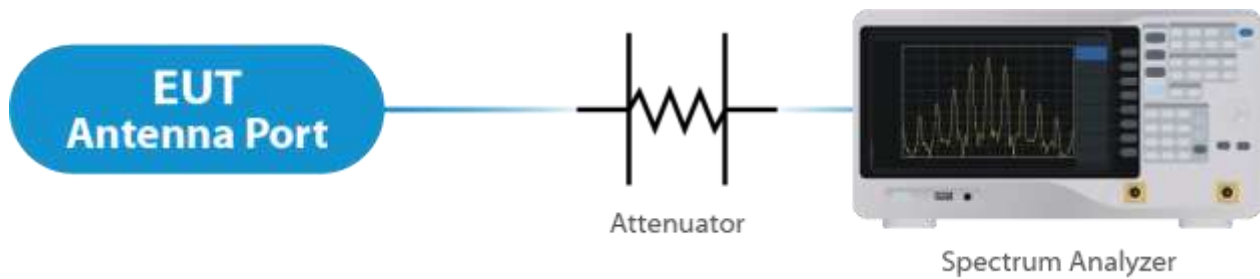


Figure 2: Direct Connect at the Antenna Port Test



Figure 3: Output Power Measurement

4.3 Radiated Emissions

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	Keysight	N9038A	UCL-2778	1/27/2023	1/27/2024
Pre-Amplifier 9 kHz – 1 GHz	Sonoma Instruments	310N	UCL-2889	10/7/2021	10/7/2023
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3062	2/22/2023	2/22/2025
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3071	1/11/2023	1/11/2025
Double Ridge Horn Antenna	Scwarzbeck	BBHA 9120D	UCL-3065	9/22/2022	9/22/2024
Log Periodic	Scwarzbeck	STLP 9129	UCL-3068	1/27/2023	1/27/2025
15 - 40 GHz Horn Antenna	Scwarzbeck	BBHA 9170	UCL-2487	6/09/2022	6/09/2024
1 – 18 GHz Amplifier	Com-Power	PAM 118A	UCL-3833	12/9/2022	12/9/2023
Test Software	UCL	Revision 1	UCL-3108	N/A	N/A

Table 3: List of equipment used for Radiated Emissions

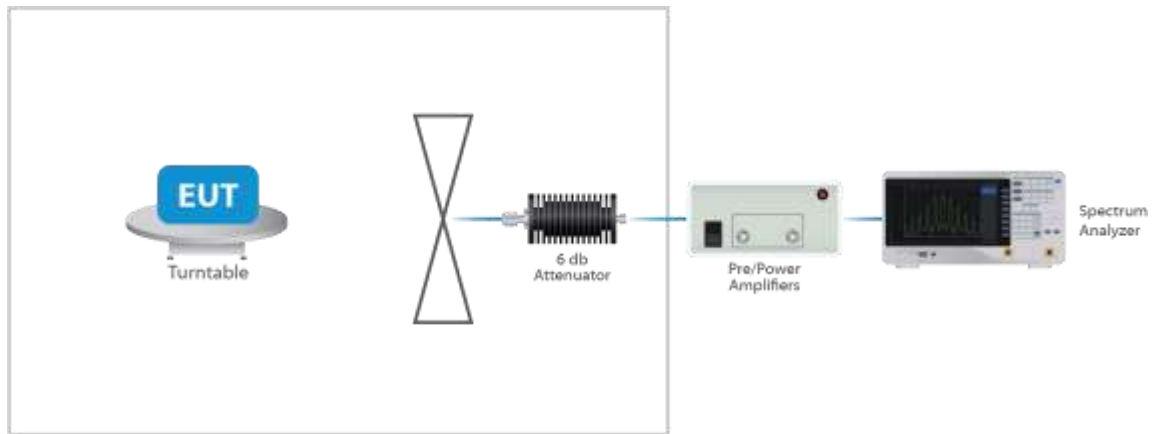


Figure 4: Radiated Emissions Test

4.4 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or Unified Compliance Laboratory personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to traceability is on file and is available for examination upon request.

4.5 Measurement Uncertainty

Test	Uncertainty ($\pm$ dB)	Confidence (%)
Conducted Emissions	1.44	95
Radiated Emissions (9 kHz to 30 MHz)	2.50	95
Radiated Emissions (30 MHz to 1 GHz)	4.38	95
Radiated Emissions (1 GHz to 18 GHz)	4.37	95
Radiated Emissions (18 GHz to 40 GHz)	3.93	95
Direct Connect Tests	K Factor	Value
Emissions Bandwidth	2	2.0%
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band Edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

5 Test Results

5.1 §15.203 Antenna Requirements


The EUT uses an integral antenna structure. Per the manufacturer, the maximum gain of the antenna per chain is 4.2 dBi. This is an 802.11 device and utilizes CDD as described in KDB 662911 D01. The antenna is not user replaceable.

Results


The EUT complied with the specification

5.2 Conducted Emissions at Mains Ports Data

5.2.1 Line

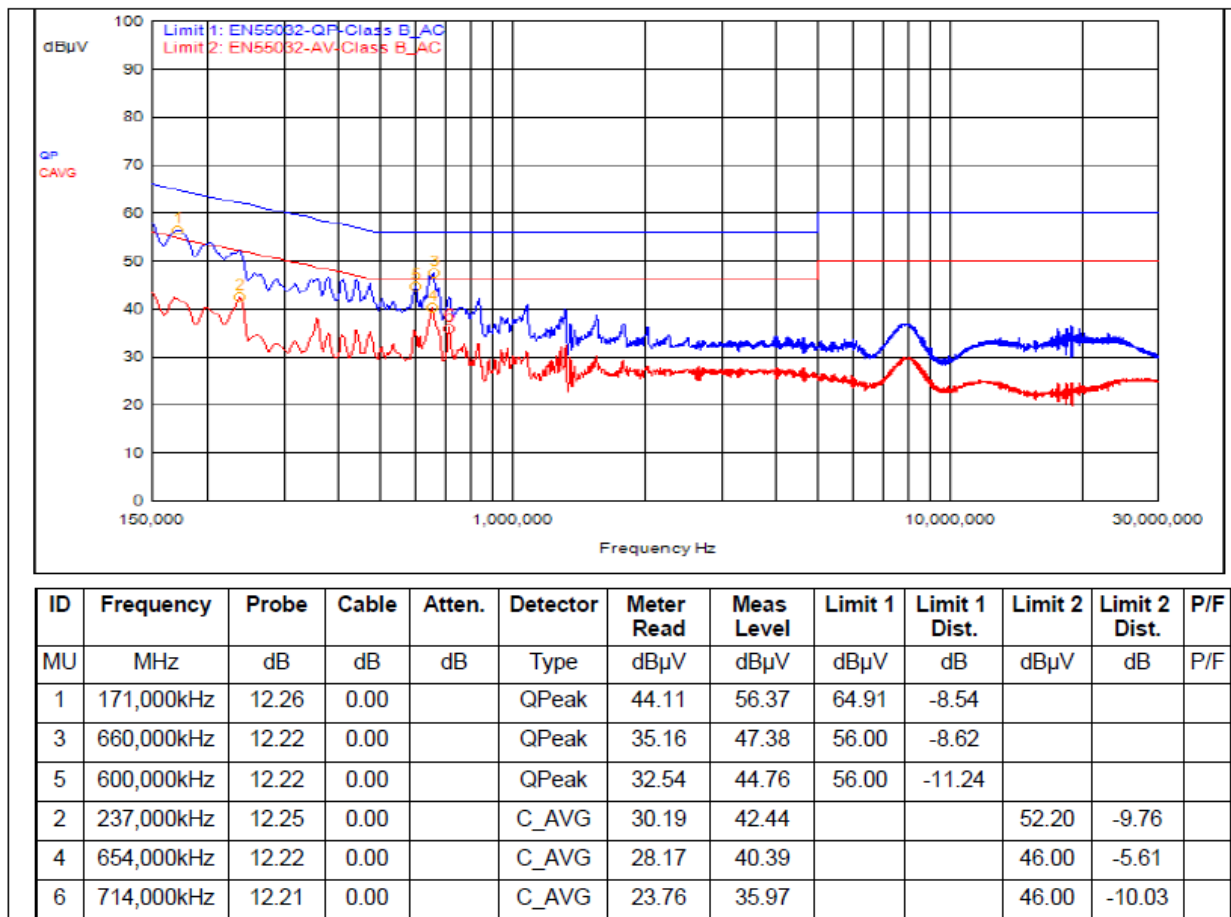

5.2.2 Neutral

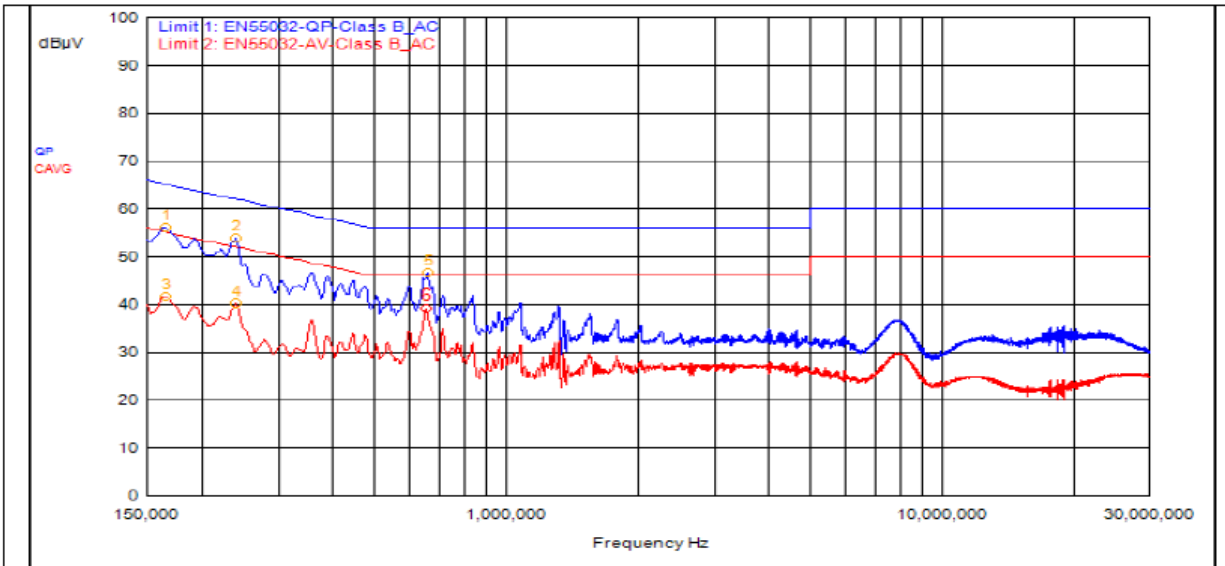

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit 1	Limit 1 Dist.	Limit 2	Limit 2 Dist.	P/F
MU	MHz	dB	dB	dB	Type	dBμV	dBμV	dBμV	dB	dBμV	dB	P/F
2	240,000kHz	12.32	0.00		QPeak	41.47	53.79	62.10	-8.31			
1	165,000kHz	12.23	0.00		QPeak	43.92	56.15	65.21	-9.06			
5	660,000kHz	12.17	0.00		QPeak	34.52	46.69	56.00	-9.31			
3	165,000kHz	12.23	0.00		C_AVG	29.50	41.73			55.21	-13.47	
4	240,000kHz	12.32	0.00		C_AVG	27.95	40.27			52.10	-11.83	
6	654,000kHz	12.17	0.00		C_AVG	27.03	39.20			46.00	-6.80	

Result

The EUT complied with the specification limit.

5.3 §15.403(i) 26 dB Emissions Bandwidth

All chains were measured under the guidance of KDB 789033 Section II.C. and KDB 66291 D01. Please see associated annex for details on instrument settings.

Nominal BW (MHz)	Frequency (MHz)	99% Bandwidth (MHz)	Emissions 26 dB Bandwidth (MHz)
20	5180	22.7	38.3
20	5200	21.2	37.0
20	5240	24.2	39.3
20	5180	24.4	40.7
20	5200	22.7	38.5
20	5240	26.8	42.4
40	5190	53.0	85.7
40	5230	60.5	89.7
80	5210	96.5	183.0

Result

All chains were tested and the highest bandwidth per chain is reported above.

The 26 dB bandwidths are reported for information purposes. Please see Annex for all bandwidth measurements.

5.4 §15.407(a)(2) Maximum Average Output Power

All chains were measured and summed under the guidance of KDB 789033 Section II. E.2. and KDB 66291 D01. Please see associated annex for details on instrument settings.

The maximum average RF conducted output power measured for this device was 18.95 dBm or 78.52 mW. The limit is 30 dBm, or 1 Watt when using an antenna with 6 dBi or less gain. The antenna has a gain of 4.2 dBi.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power	Measured EIRP	Measured PSD
OFDM 20	5180	Mcs0	20	17.73	21.93	5.10
OFDM 20	5210	Mcs0	20	17.32	21.52	4.54
OFDM 20	5240	Mcs0	20	18.14	22.34	5.35
VHT 20	5180	Mcs0	20	17.84	22.04	4.86
VHT 20	5210	Mcs0	20	17.51	21.71	4.54
VHT 20	5240	Mcs0	20	18.21	22.41	5.22
VHT 40	5190	Mcs0	20	18.17	22.37	2.63
VHT 40	5230	Mcs0	20	18.95	23.15	3.26
VHT 80	5180	Mcs0	20	18.33	22.53	-0.25

Result

In the configuration tested, the maximum summed average RF output power was less than 1 watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots in attached Annex).

5.5 §15.407(b) Spurious Emissions


5.5.1 Radiated Spurious Emissions in the Restricted Bands of § 15.205

The EUT uses various power settings based on the channel in use. In order to reduce test time, the radiated spurious emissions at the lowest, middle, and highest channel were measured at the maximum power of TP20, as this setting was found to be worst case for spurious emissions. Power was subsequently reduced during in-band and band edge testing. The band edge at the restricted band ending at 5150 MHz was measured using radiated measurement or conducted at the antenna port methods. [For radiated] All emissions modes were tested, and the worst-case measurement are shown below. For frequencies above 1 GHz, a measurement of 3 meters was used. For frequencies below 1 GHz, a measurement distance of 10 meters was used.

Correction Factor = Antenna Factor + Cable Loss - Pre-Amplifier Gain, and is added to the Receiver reading.

Result


All emissions in the restricted bands of § 15.205 met the limits specified in § 15.209; therefore, the EUT complies with the specification. All emissions me the limits specified in § 15.407(b). Representative band edge plots are included in this report. See Annex for Conducted Band edge plots.

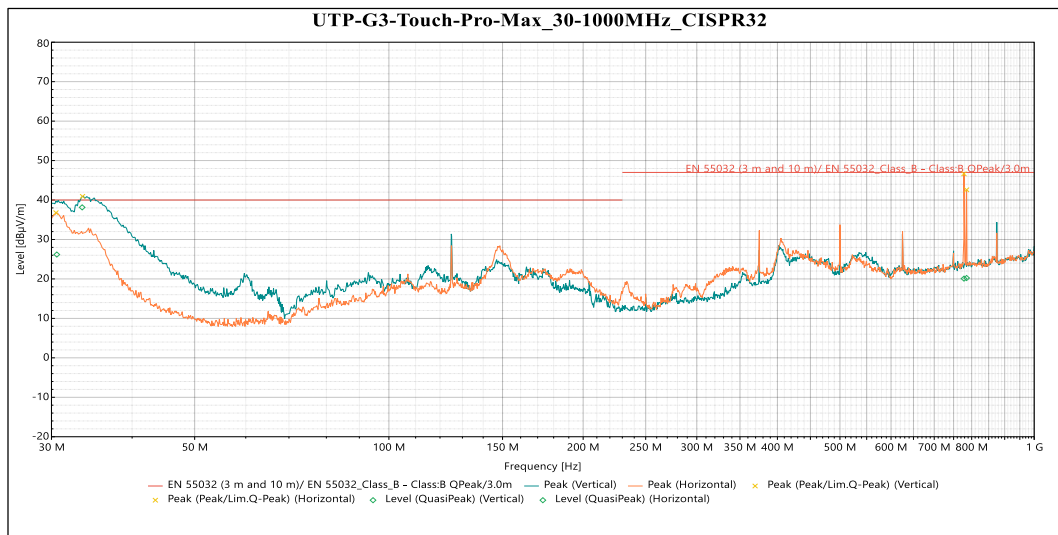

QuasiPeak

Frequency	Level (dBuV/m)	Limit (dBuV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
33.471 MHz	38.136	40	-1.864	192	1	Vertical	-9.673
30.577 MHz	26.176	40	-13.824	243	1.138	Horizontal	-8.105
778.43 MHz	20.085	47	-26.915	244	1.677	Horizontal	-5.11
785.71 MHz	20.231	47	-26.769	88	3.121	Horizontal	-5.112

Table 4: Spurious Emissions 30 – 1000 MHz

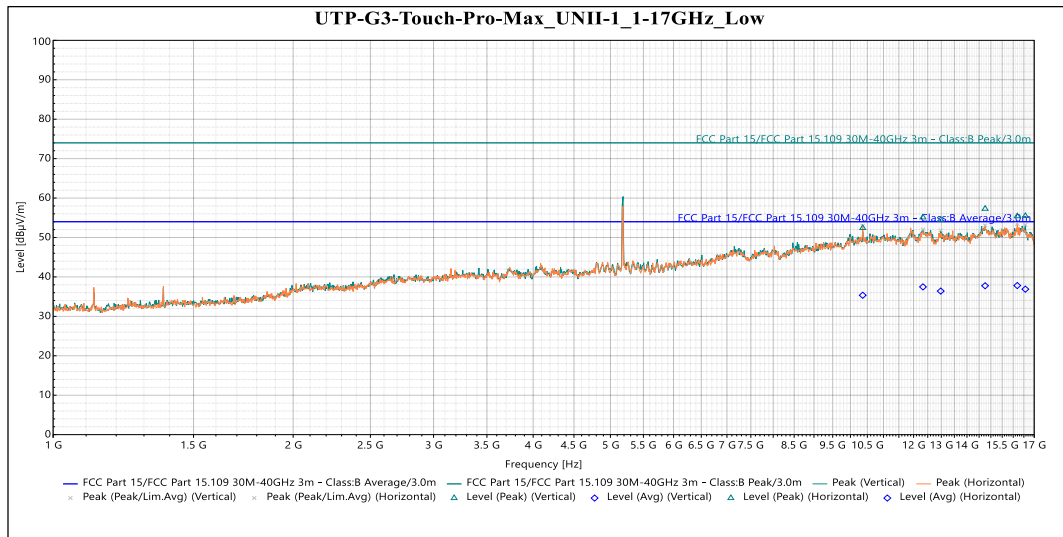


Peak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
12.33 GHz	55.095	74	-18.905	296	3.285	Vertical	16.634
12.979 GHz	54.524	74	-19.476	130	1.5	Vertical	16.678
16.571 GHz	55.457	74	-18.543	258	1.63	Vertical	18.392
10.361 GHz	52.407	74	-21.593	80	3.809	Horizontal	14.857
14.753 GHz	57.294	74	-16.706	92	2.407	Horizontal	17.042
16.188 GHz	55.396	74	-18.604	355	2.71	Horizontal	17.882

Avg

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
12.33 GHz	37.474	54	-16.526	296	3.285	Vertical	16.634
12.979 GHz	36.411	54	-17.589	130	1.5	Vertical	16.678
16.571 GHz	36.889	54	-17.111	258	1.63	Vertical	18.392
10.361 GHz	35.347	54	-18.653	80	3.809	Horizontal	14.857
14.753 GHz	37.758	54	-16.242	92	2.407	Horizontal	17.042
16.188 GHz	37.812	54	-16.188	355	2.71	Horizontal	17.882

Table 5: Transmitting on the Lowest Frequency 1 – 17 GHz

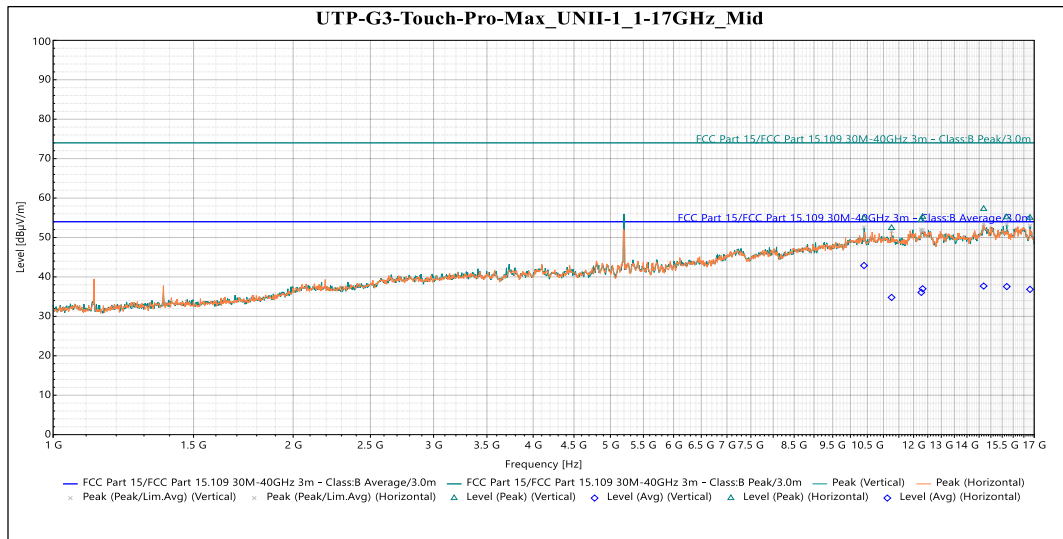


Peak

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
10.4 GHz	54.894	74	-19.106	230	3.108	Vertical	14.914
12.27 GHz	54.473	74	-19.527	37	2.933	Vertical	16.478
15.706 GHz	55.133	74	-18.867	90	3.635	Vertical	16.164
16.796 GHz	55.014	74	-18.986	33	3.81	Vertical	18.702
11.26 GHz	52.427	74	-21.573	56	2.407	Horizontal	15.013
12.318 GHz	55.251	74	-18.749	46	3.073	Horizontal	16.69
14.691 GHz	57.264	74	-16.736	15	2.055	Horizontal	17.349

Avg

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
10.4 GHz	42.889	54	-11.111	230	3.108	Vertical	14.914
12.27 GHz	36.074	54	-17.926	37	2.933	Vertical	16.478
15.706 GHz	37.553	54	-16.447	90	3.635	Vertical	16.164
16.796 GHz	36.842	54	-17.158	33	3.81	Vertical	18.702
11.26 GHz	34.801	54	-19.199	56	2.407	Horizontal	15.013
12.318 GHz	36.995	54	-17.005	46	3.073	Horizontal	16.69
14.691 GHz	37.683	54	-16.317	15	2.055	Horizontal	17.349

Table 6: Transmitting on the Middle Frequency 1 – 17 GHz

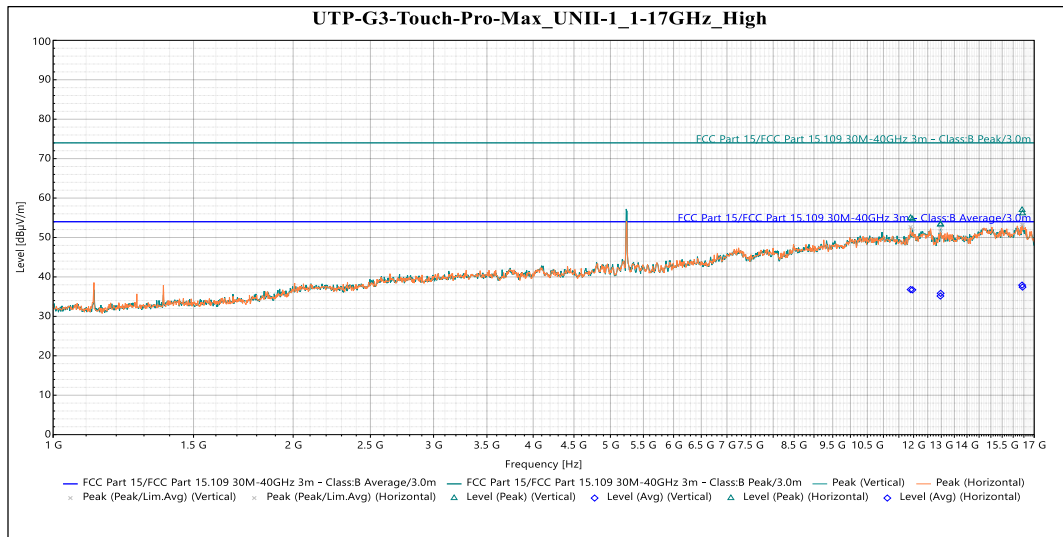


Peak

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
11.96 GHz	54.637	74	-19.363	133	1.63	Vertical	16.476
12.975 GHz	53.351	74	-20.649	167	2.708	Vertical	16.641
16.438 GHz	56.145	74	-17.855	306	3.969	Vertical	18.224
11.897 GHz	54.969	74	-19.031	83	3.108	Horizontal	16.518
12.966 GHz	53.308	74	-20.692	41	3.81	Horizontal	16.557
16.415 GHz	56.978	74	-17.022	96	3.634	Horizontal	18.094

Avg

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
11.96 GHz	36.716	54	-17.284	133	1.63	Vertical	16.476
12.975 GHz	35.844	54	-18.156	167	2.708	Vertical	16.641
16.438 GHz	37.418	54	-16.582	306	3.969	Vertical	18.224
11.897 GHz	36.786	54	-17.214	83	3.108	Horizontal	16.518
12.966 GHz	35.163	54	-18.837	41	3.81	Horizontal	16.557
16.415 GHz	37.922	54	-16.078	96	3.634	Horizontal	18.094

Table 7: Transmitting on the Highest Frequency 1 – 17 GHz

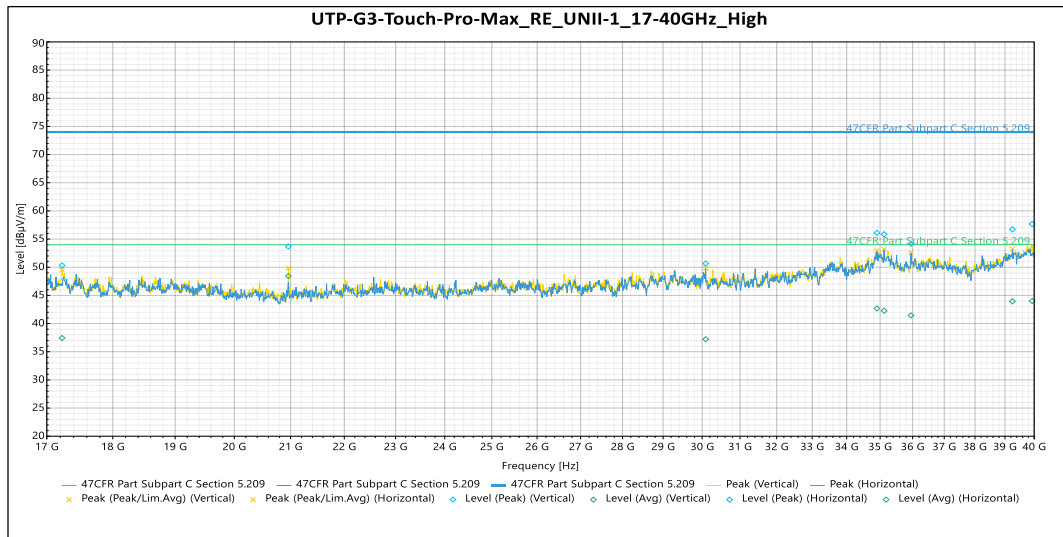

Peak


Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
17.227 GHz	50.313	74	-23.687	86	Vertical	-1.125
20.96 GHz	53.677	74	-20.323	177	Vertical	-2.233
34.904 GHz	56.106	74	-17.894	213	Vertical	5.108
39.929 GHz	57.685	74	-16.315	225	Vertical	5.661
30.091 GHz	50.658	74	-23.342	214	Horizontal	-1.046
35.123 GHz	55.863	74	-18.137	224	Horizontal	5.026
35.951 GHz	54.157	74	-19.843	176	Horizontal	3.868
39.253 GHz	56.719	74	-17.281	316	Horizontal	5.953

Avg


Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
17.227 GHz	37.43	54	-16.57	86	Vertical	-1.125
20.96 GHz	48.439	54	-5.561	177	Vertical	-2.233
34.904 GHz	42.684	54	-11.316	213	Vertical	5.108
39.929 GHz	43.998	54	-10.002	225	Vertical	5.661
30.091 GHz	37.222	54	-16.778	214	Horizontal	-1.046
35.123 GHz	42.267	54	-11.733	224	Horizontal	5.026
35.951 GHz	41.457	54	-12.543	176	Horizontal	3.868
39.253 GHz	43.937	54	-10.063	316	Horizontal	5.953

Table 8: Transmitting on the Highest Frequency 17 – 40 GHz (worse case)


5.5.2 Band Edge

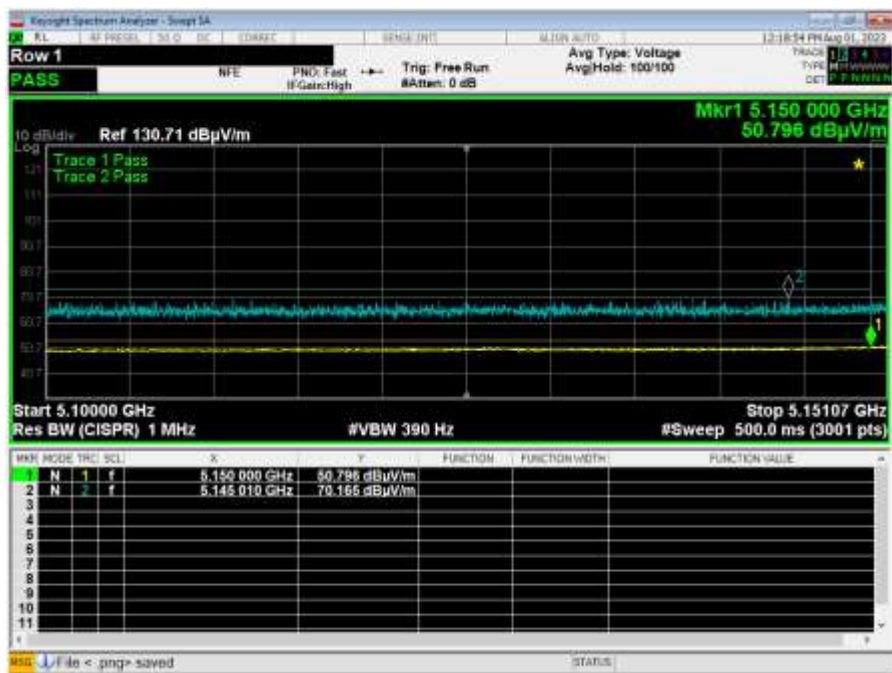


Plot 1: OFDM 20 MHz 5180 MHz

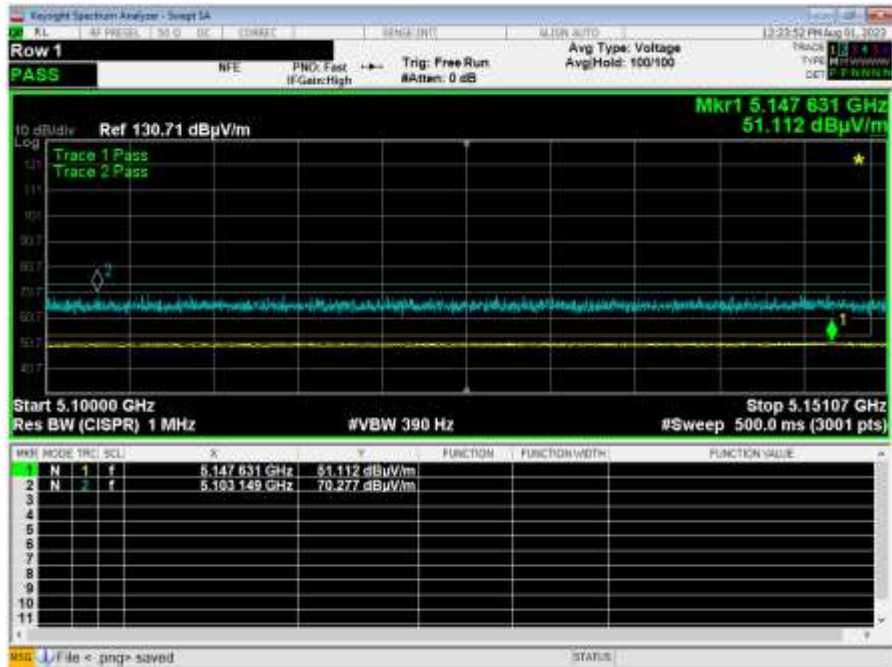


Plot 2: OFDM 20 MHz 5200 MHz

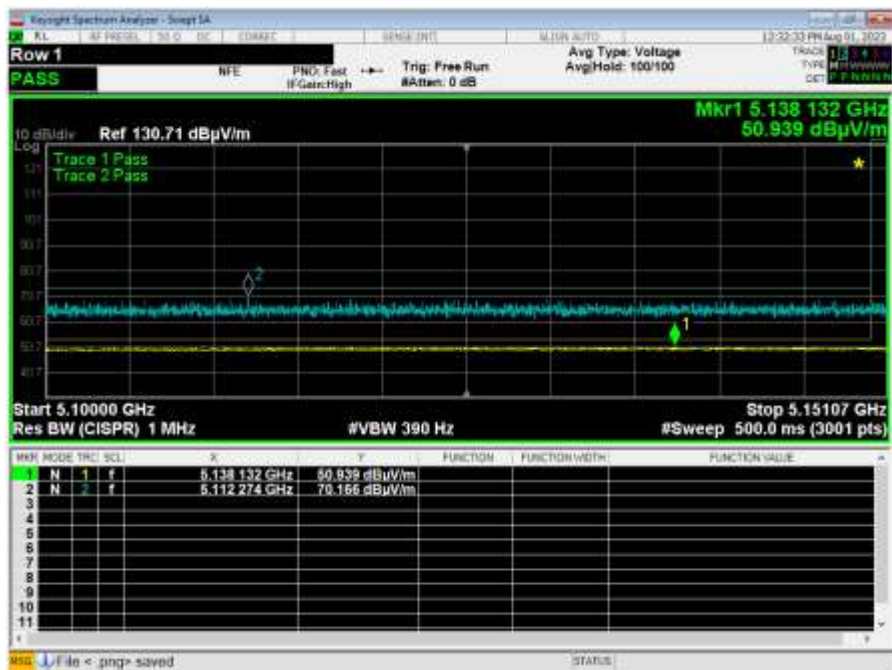


Plot 3: OFDM 20 MHz 5240 MHz

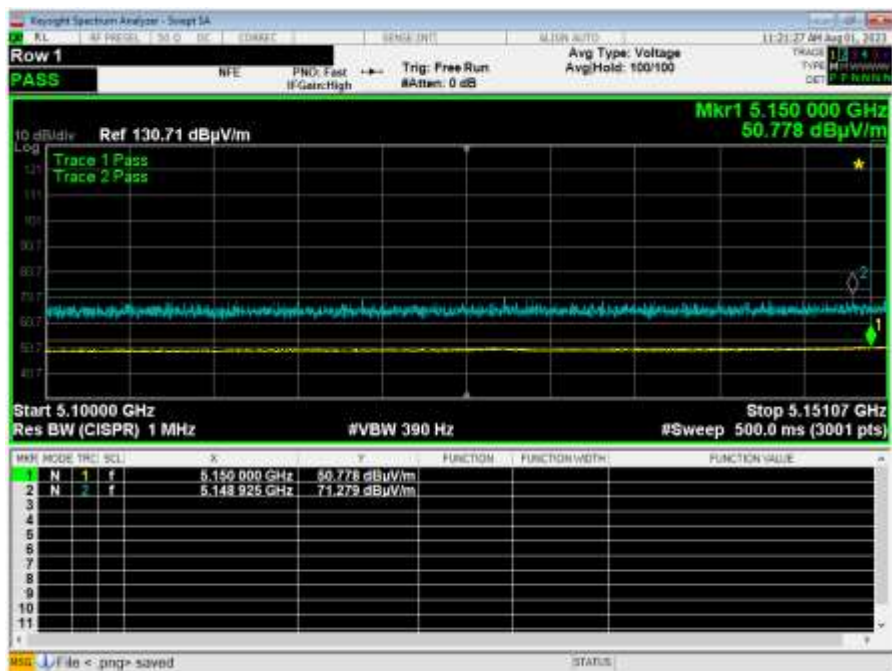


Plot 4: VHT 20 MHz 5180 MHz

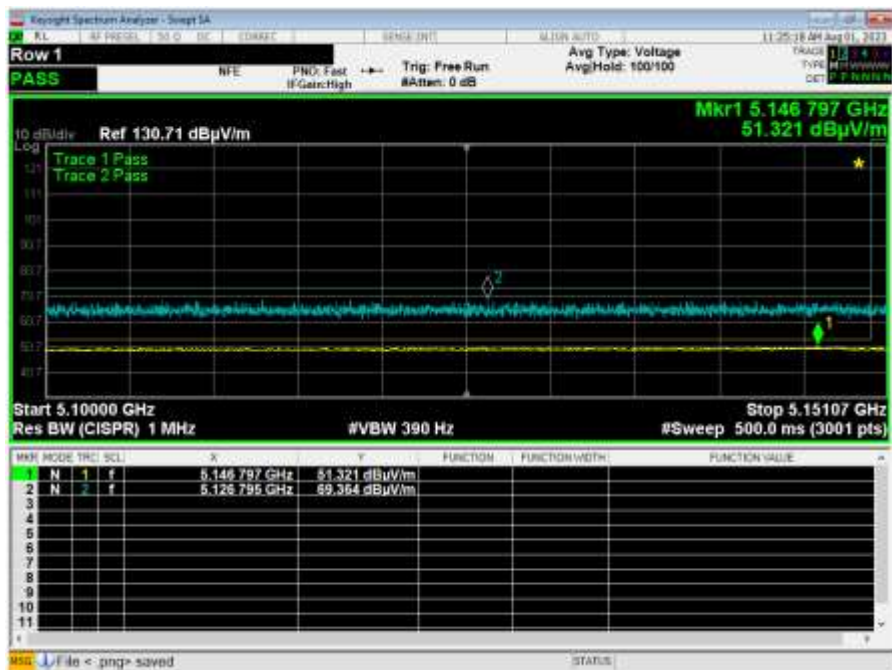


Plot 5: VHT 20 MHz 5200 MHz

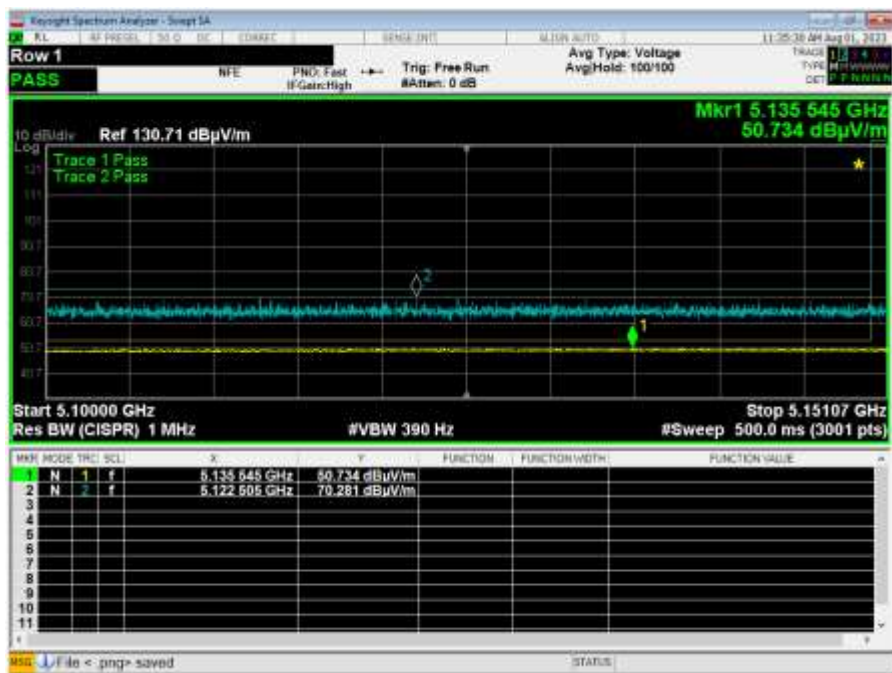


Plot 6: VHT 20 MHz 5240 MHz

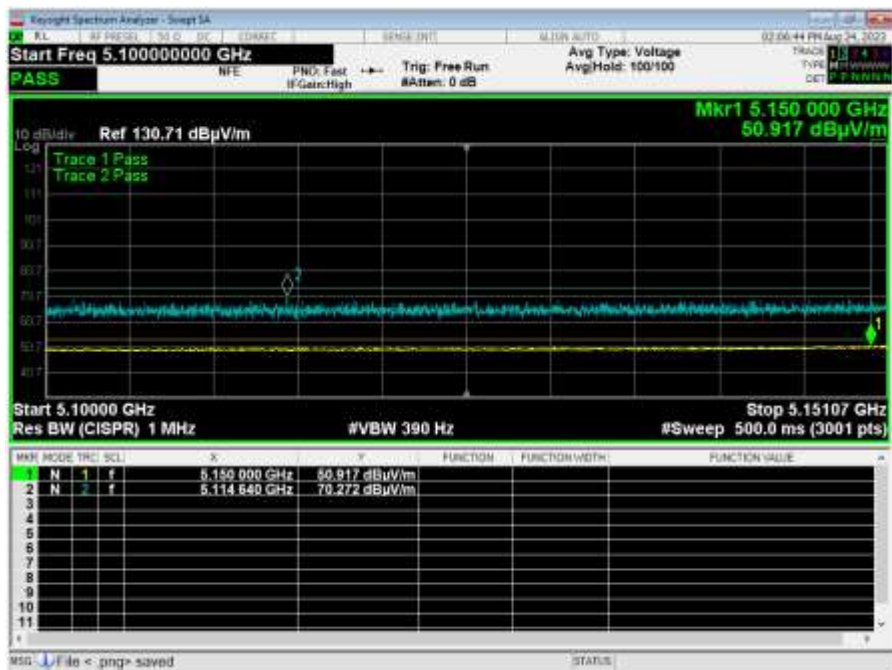

Plot 7: VHT 40 MHz 5190 MHz

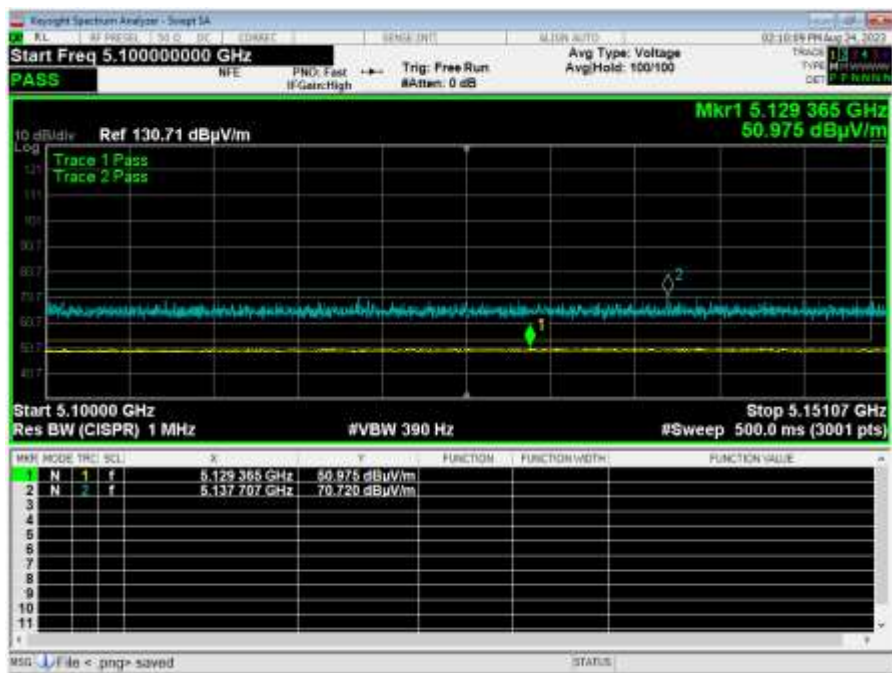

Plot 8: VHT 40 MHz 5230 MHz

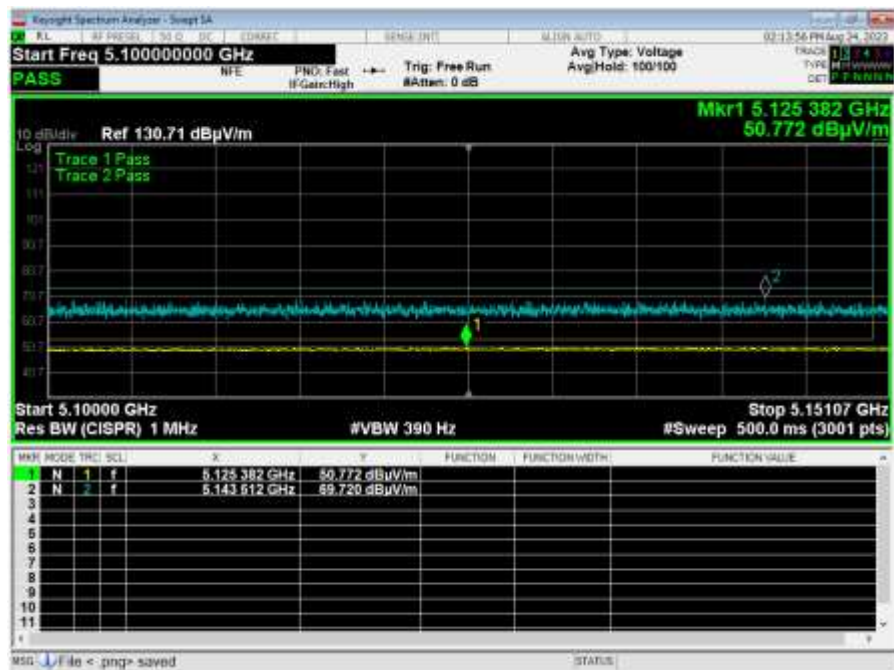

Plot 9: VHT 80 MHz 5210 MHz

5.6 §15.407(a) Maximum Power Spectral Density

All chains were measured and summed under the guidance of KDB 789033 Section II. F. and KDB 66291 D01. Please see associated annex for details on instrument settings.

The maximum average power spectral density conducted from the intentional radiator of the antenna shall not be greater than 17 dBm in any 1 MHz band during any time interval of continuous transmission.

As per KDB 662911, when the EUT is using spatial-multiplexing in HT to HE modes, there is not additional array gain to accommodate.

Results of this testing are summarized.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Measured PSD
OFDM 20	5180	Mcs0	20	5.10
OFDM 20	5210	Mcs0	20	4.54
OFDM 20	5240	Mcs0	20	5.35
VHT 20	5180	Mcs0	20	4.86
VHT 20	5210	Mcs0	20	4.54
VHT 20	5240	Mcs0	20	5.22
VHT 40	5190	Mcs0	20	2.63
VHT 40	5230	Mcs0	20	3.26
VHT 80	5180	Mcs0	20	-0.25

Result

The maximum summed average power spectral density was less than the limit of 17dBm; therefore, the EUT complies with the specification.

-- End of Test Report --