

UNVR Instant



Compact UniFi Protect NVR with 3.5" HDD support, featuring an integrated 6-port PoE switch, integrated HDMI View Port, and a capacity for (1) 4K camera and (6) Full HD cameras.

Mechanical

Dimensions	220 x 220 x 47 mm (8.7 x 8.7 x 1.9")
Weight	1.04 kg (2.3 lb)
Enclosure materials	Polycarbonate
Storage capacity	(1) 3.5" drive bay

Hardware

Processor	Quad-core ARM® Cortex®-A55 at 1.7 GHz
Memory information	4 GB
Networking interface	(1) GbE RJ45 uplink (6) GbE RJ45 downlink (All PoE) (1) HDMI
Management interface	Ethernet Bluetooth
Power method	Universal AC input, 100-240VAC, 1.5A Max, 50/60 Hz
Power supply	AC/DC, Internal, 60W
Max. power consumption	9W (Excluding PoE out & HDD power consumption)
Max. power budget for drives	11W
Total available PoE	40W
Max. PoE wattage per port by PSE	15.4W
Voltage range PoE mode	44-57V
LEDs	Ethernet, PoE
Button	(1) Factory reset
Display	1.14" screen
Ambient operating temperature	0 to 40° C (32 to 104° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	FCC, IC, CE, Electrical Safety, UL


Software

Web application	UniFi Protect
Mobile app	UniFi Protect iOS™ and Android™



Specifications are subject to change. Ubiquiti products are sold with a limited warranty described at: www.ui.com/support/warranty

©2025 Ubiquiti Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, UniFi Protect, and UniFi are trademarks or registered trademarks of Ubiquiti Inc. in the United States and in other countries. Arm and Cortex are registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere. All other trademarks are the property of their respective owners.

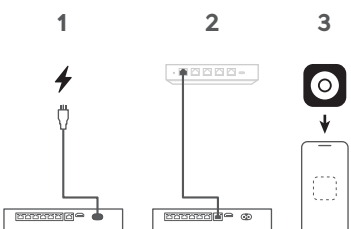

Installation Guide

[illegible]

