

FCC RADIO TEST REPORT

Applicant..... : Ubiquiti, Inc
Address..... : 685 Third Avenue, 27th Floor, New York NY 10017, USA
Manufacturer..... : Ubiquiti, Inc
Address..... : 685 Third Avenue, 27th Floor, New York NY 10017, USA
Factory..... : Details please refer to page 2
Address..... : Details please refer to page 2
Product Name..... : UniFi UPS 2U Pro

Brand Name..... :

UBIQUITI or



or

Model No. : UPS-2U-Pro

FCC ID..... : SWX-UPS2UP

Measurement Standard..... : 47 CFR FCC Part 15, Subpart C (Section 15.247)

Receipt Date of Samples..... : February 10, 2026

Date of Tested..... : February 10, 2026 to April 20, 2026

Date of Report..... : April 29, 2026

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.


Prepared by

Jenny Liu / Project Engineer


Approved by

Iori Fan / Authorized Signatory

Appendix-Factory information

Factory 1	: Voltronic Power Technology(SHENZHEN)Corp.
Address	: 1-5F, Building 5 & 1F Building 7 & 1F Building 9, RunDongSheng Industrial Park, No.467, Section Xixiang, National Highway 107, LongZhu Community, Xixiang, Bao An District, Shenzhen, China
Factory 2	: Zhongshan Voltronic Power Electronics Limited
Address	: No.8 Shichong Road, Zhongshan Torch Hi-Tech Industrial Development Zone, Zhongshan, Guangdong, China
Factory 3	: VOLTRONIC POWER TECHNOLOGY CORP
Address	: No. 428 1-11 Floor, No. 430 1-11 Floor, Baozhang Rd., Bauxin Vil., Xizhi Dist., New Taipei City 221034, Taiwan
Factory 4	: VOLTRONIC POWER TECHNOLOGY (VIETNAM) COMPANY LIMITED
Address	: Lot I7-4-1, Dai Dong- Hoan Son Industrial Park, Tan Hong Ward, Tu Son Town and Dai Dong Commune, Tien Du District, Bac Ninh Province, VietNam

Table of Contents

1. Summary of Test Result.....	5
2. General Description of EUT	6
3. Test Channels and Modes Detail	9
4. Configuration of EUT	9
5. Modification of EUT	9
6. Description of Support Device.....	10
7. Test Facility and Location	11
8. Applicable Standards and References.....	12
9. Deviations and Abnormalities from Standard Conditions	12
10. Test Conditions	13
11. Measurement Uncertainty	14
12. Sample Calculations	15
13. Test Items and Results	16
13.1 Conducted Emissions Measurement	16
13.2 Maximum Conducted Output Power Measurement.....	20
13.3 6dB Bandwidth Measurement.....	24
13.4 Power Spectral Density Measurement	27
13.5 Band Edge and Conducted Spurious Emissions Measurement.....	29
13.6 Radiated Spurious Emissions and Restricted Bands Measurement.....	35
13.7 Antenna Requirement	61
14. Test Equipment List.....	62

1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.207 (a)	AC Power Conducted Emission	PASS	---
§15.247(b)(3)	Maximum Conducted Output Power	PASS	---
§15.247(a)(2)	6dB Bandwidth	PASS	---
§15.247(e)	Power Spectral Density	PASS	---
§15.247(d), §15.209, §15.205	Band Edge	PASS	---
§15.247(d)	Conducted Spurious Emissions	PASS	---
§15.247(d), §15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	PASS	---
§15.203	Antenna Requirement	PASS	---

2. General Description of EUT

Product Information	
Product Name:	UniFi UPS 2U Pro
Main Model Name:	UPS-2U-Pro
Additional Model Name:	N/A
Model difference:	N/A
S/N:	2602-0719
Brand Name:	 UBIQUITI or
Hardware Version:	Main board: 71-306702 DET+PROG board: 71-306651 SW board: 71-306652 COMM CONN board: 71-306836 TVSS board: 71-002138 OUTLET board: 71-002170 COMM board: 71-306650 CNTL board: 71-306666
Software Version:	1.0
Rating:	Input: 120V~, 50/60Hz, 16A Max Output: 120V~, 50/60Hz, 16A Max, 1920VA / 1920W Internal Battery: DC 72V
Temperature range:	0°C~40°C(Declared by the manufacturer)
Typical Arrangement:	Table-top
I/O Port:	Refer to the user manual
Accessories Information	
Adapter:	N/A
Cable:	Power cord: 1.8m, unshielded, detachable
Other:	N/A

Additional Information	
Note:	N/A
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.
Technical Specification (BLE)	
Bluetooth Version:	V5.4
Frequency Range:	2402-2480MHz
Modulation Type:	GFSK
Number of Channel:	40 (refer to following channel list for details)
Channel Space:	2MHz
Antenna Type:	PCB Antenna
Number of Antenna:	1
Antenna Gain:	6 dBi (Declared by the manufacturer)
RF PHY Support:	1Mbps, 2Mbps
Remark: This report only applies to BLE feature of the EUT.	


Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	-	-
13	2428	27	2456	-	-

3. Test Channels and Modes Detail

Mode		Channel		Frequency (MHz)	Modulation	RF PHY (Mbps)
1	TX	Low	0	2402	GFSK	1, 2
2		Mid	19	2440	GFSK	1, 2
3		High	39	2480	GFSK	1, 2
4	BT Link	---	---	---	---	---

Note: TX mode means that the EUT was programmed to be in continuously transmitting mode.

4. Configuration of EUT

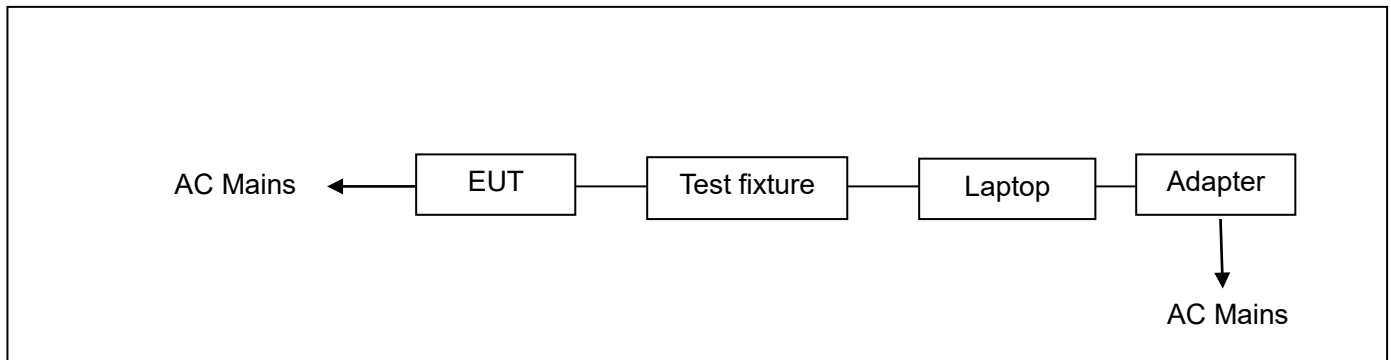

5. Modification of EUT

No modifications are made to the EUT during all test items.

6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
1.	Laptop	Lenovo	R720-15 1KBN	PF0Z35FH	I/P: AC 100-240V 50-60Hz, 1.5A O/P: DC 20V 6.75A AC Line: 1.10m unshielded DC Line: 1.15m unshielded with a core	Provided by the lab
2.	Adapter of Laptop	Delta	ADL135N DC3A	---		Provided by the lab
3.	Test fixture	---	---	---	----	Provide by the Manufacturer

No.	Test Software	Modulation	Power Setting
1.	EspRFTTestTool_v4.6_Manual.exe	GFSK	9

7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	The Laboratory has been assessed and proved to be in compliance with CNAS/CL01 Listed by CNAS, August 13, 2018 The Certificate Registration Number is L5795. The Certificate is valid until August 13, 2030 The Laboratory has been assessed and proved to be in compliance with ISO17025 Listed by A2LA, November 01, 2017 The Certificate Registration Number is 4429.01 The Certificate is valid until December 31, 2027 Listed by FCC, November 06, 2017 Test Firm Registration Number: 907417 Test Firm Designation Number: CN1214 Listed by ISED, June 08, 2017 The Certificate Registration Number. Is 9743A The CAB identifier number: CN0015
Test Site Location	:	Room 101, 1101, Building 2, No. 61, Hongmei Section, Wangsha Road, Hongmei Town, Dongguan, Guangdong, People's Republic of China

8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Test Standards:

47 CFR Part 15, Subpart C, 15.247

ANSI C63.10-2020+Cor 1-2023

References Test Guidance:

DTS KDB 558074 D01 15.247 Meas Guidance v05r02

Remark:

The EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	AC Power Conducted Emission	1-4	AC 120V 60Hz	Sean	See note 1
2.	Max. Conducted Output Power	1-3	DC 72V	Sean	See note 1
3.	6dB Bandwidth	1-3	DC 72V	Sean	See note 1
4.	Power Spectral Density	1-3	DC 72V	Sean	See note 1
5.	Band Edge and Conducted Spurious Emissions	1-3	DC 72V	Sean	See note 1
6.	Radiated Spurious Emissions and Restricted Bands	1-4	DC 72V AC 120V 60Hz	Sean	See note 1
7..	Antenna Requirement	---	---	---	---

Note:

1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35℃, 30~70%, 86~106kPa.
2. DC 72V come from Internal battery. Only the worst case was recorded in the report.

11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	±2.46 dB	---
2.	Radiated Emission	9kHz ~ 30MHz	±5.63 dB	---
		30MHz ~ 1GHz	±5.63 dB	---
		1GHz ~ 18GHz	±5.16 dB	---
		18GHz ~ 40GHz	±5.16 dB	---
3.	Conducted Spurious Emissions	10Hz ~ 40GHz	±1.06 dB	---
4.	RF Output Power	10Hz ~ 40GHz	±1.08 dB	---
5.	Power Spectral Density	10Hz ~ 40GHz	±1.08 dB	---
6.	Occupied Channel Bandwidth	---	±1.05%	---

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.2740	28.29	20.61	48.90	61.00	-12.10	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver reading Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation Measurement = Reading + Corrector Factor Limit = Limit stated in standard Margin = Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Radiated Spurious Emissions and Restricted Bands						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
186.1700	39.83	-8.63	31.20	43.50	-12.30	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver reading Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier Measurement = Reading + Corrector Factor Limit = Limit stated in standard Over = Margin, which calculated by Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

13. Test Items and Results

13.1 Conducted Emissions Measurement


LIMIT

According to the requirements of FCC PART 15.207, the limits are as follows:

Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

- Note:
1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.
 2. The lower limit shall apply at the transition frequencies.
 3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

BLOCK DIAGRAM OF TEST SETUP

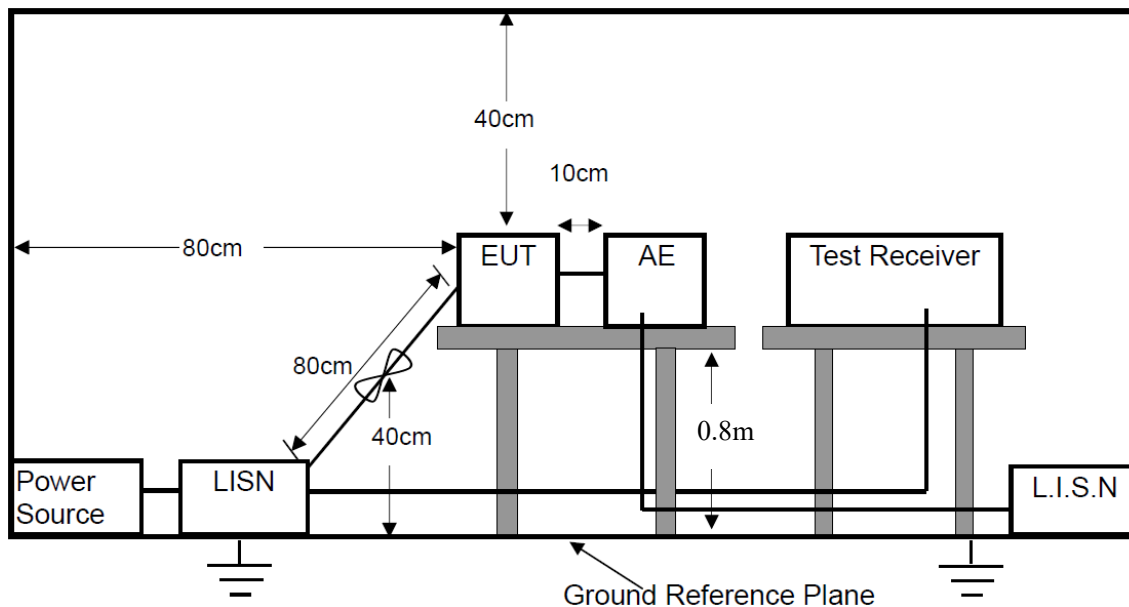

TEST PROCEDURES

- a. The EUT was placed on a wooden table 0.8m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

TEST RESULTS

PASS


Please refer to the following pages of the worst case.

M/N: UPS-2U-Pro	Testing Voltage: AC 120V 60Hz
Phase: L1	Detector: QP & AVG
Test Mode: 1	

Conducted Emission Measurement

Date: 2026/3/18

Time: 11:09:43

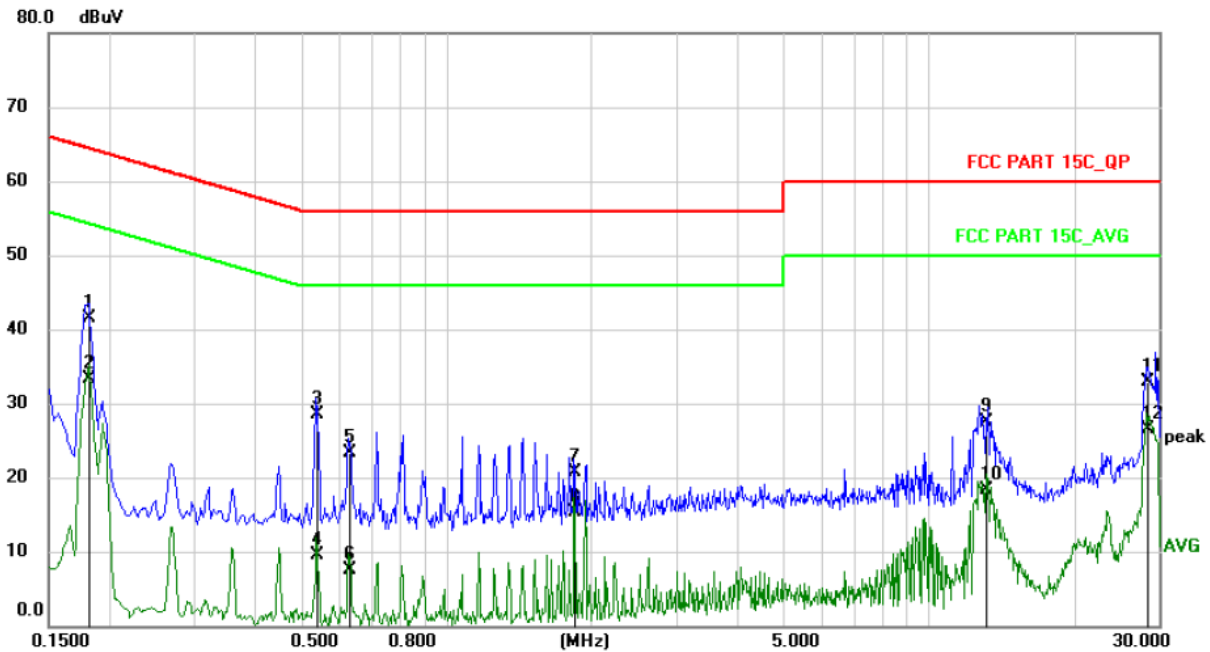


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1819	29.90	11.60	41.50	64.40	-22.90	QP	
2 *	0.1819	21.70	11.60	33.30	54.40	-21.10	AVG	
3	0.5380	16.59	12.01	28.60	56.00	-27.40	QP	
4	0.5380	-2.41	12.01	9.60	46.00	-36.40	AVG	
5	0.6300	11.30	12.00	23.30	56.00	-32.70	QP	
6	0.6300	-4.40	12.00	7.60	46.00	-38.40	AVG	
7	1.8460	8.79	11.91	20.70	56.00	-35.30	QP	
8	1.8460	3.39	11.91	15.30	46.00	-30.70	AVG	
9	13.1419	16.34	11.16	27.50	60.00	-32.50	QP	
10	13.1419	7.24	11.16	18.40	50.00	-31.60	AVG	
11	28.4420	20.83	12.07	32.90	60.00	-27.10	QP	
12	28.4420	14.53	12.07	26.60	50.00	-23.40	AVG	

M/N: UPS-2U-Pro	Testing Voltage: AC 120V 60Hz
Phase: N	Detector: QP & AVG
Test Mode: 1	

Conducted Emission Measurement

Date: 2026/3/18

Time: 11:00:14

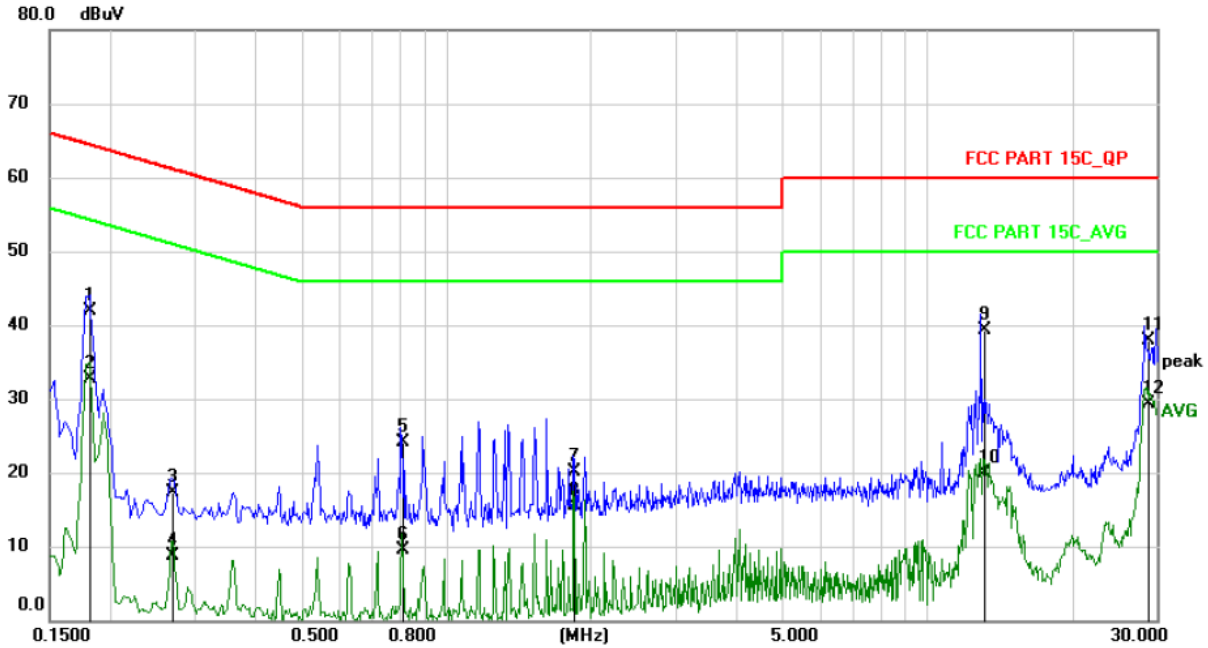

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1819	30.40	11.60	42.00	64.40	-22.40	QP	
2	0.1819	21.20	11.60	32.80	54.40	-21.60	AVG	
3	0.2700	5.48	11.82	17.30	61.12	-43.82	QP	
4	0.2700	-3.12	11.82	8.70	51.12	-42.42	AVG	
5	0.8100	12.12	11.98	24.10	56.00	-31.90	QP	
6	0.8100	-2.38	11.98	9.60	46.00	-36.40	AVG	
7	1.8460	8.31	11.89	20.20	56.00	-35.80	QP	
8	1.8460	3.61	11.89	15.50	46.00	-30.50	AVG	
9 *	13.0620	28.17	11.23	39.40	60.00	-20.60	QP	
10	13.0620	8.67	11.23	19.90	50.00	-30.10	AVG	
11	28.6500	25.73	12.17	37.90	60.00	-22.10	QP	
12	28.6500	17.23	12.17	29.40	50.00	-20.60	AVG	

13.2 Maximum Conducted Output Power Measurement


LIMIT

For system using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1 Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi. The e.i.r.p. shall not exceed 4W.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

ANSI C63.10-2020+Cor 1-2023, Section 11.9.2

TEST RESULTS


PASS

Please refer to the following tables.


GFSK					
Channel	Frequency (MHz)	RF PHY (Mbps)	Peak Output Power (dBm)	Limit (dBm)	Result
0	2402	1	2.202	≤30	PASS
19	2440	1	1.773	≤30	PASS
39	2480	1	4.036	≤30	PASS
0	2402	2	2.014	≤30	PASS
19	2440	2	1.591	≤30	PASS
39	2480	2	3.841	≤30	PASS

RF PHY(1Mbps)


GFSK / Low Channel

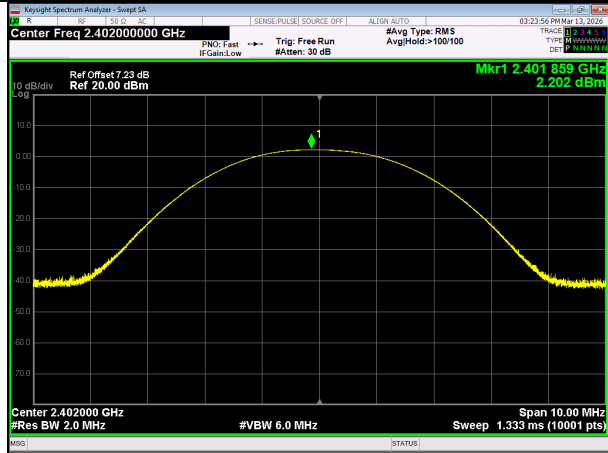

GFSK / Mid Channel

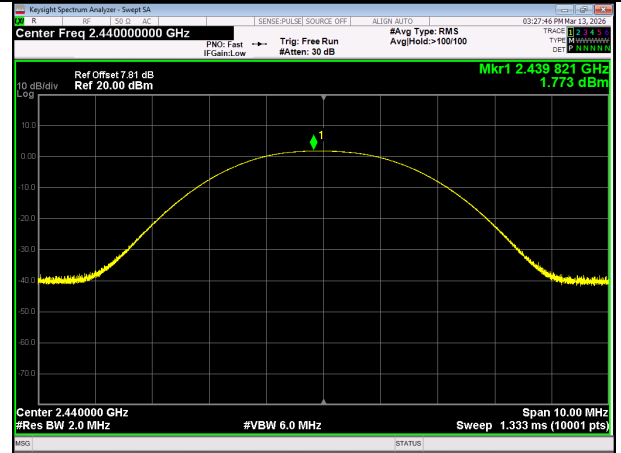


GFSK / High Channel

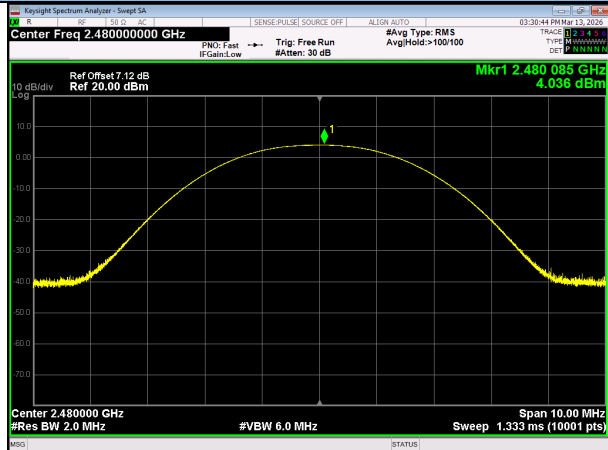


Black

RF PHY(2Mbps)


GFSK / Low Channel

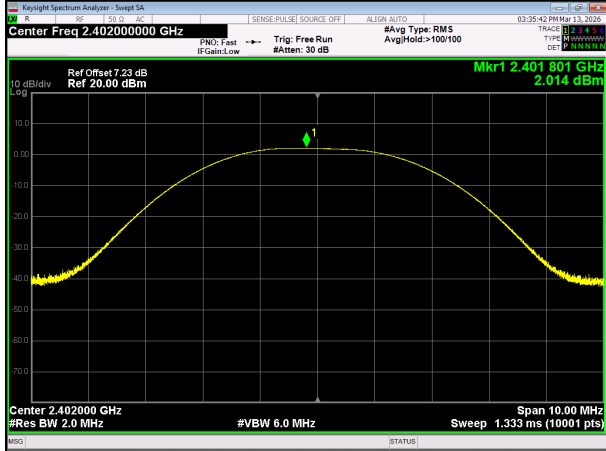

GFSK / Mid Channel

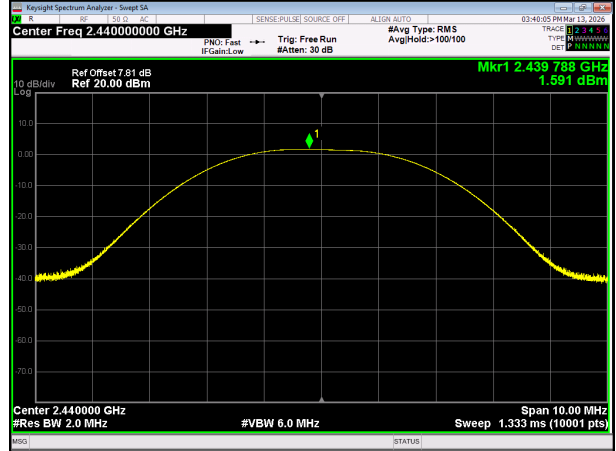

GFSK / High Channel

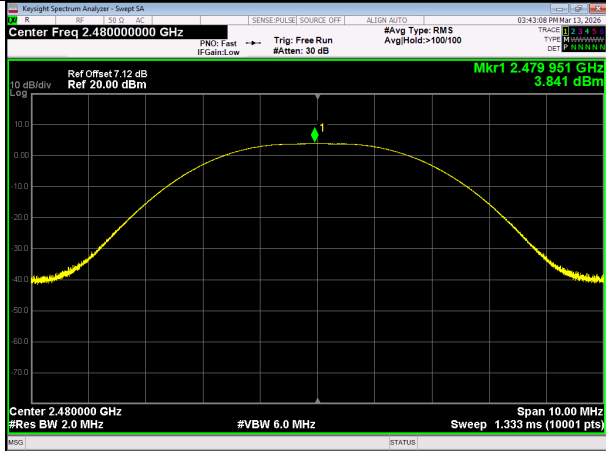


Black

13.3 6dB Bandwidth Measurement

LIMIT

The minimum 6dB bandwidth shall be at least 500 kHz

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v05r02):

- a. Set the RBW = shall be in the range of 1% to 5% of the OBW but not less than 100KHz.
- b. Set the VBW $\geq 3 \times$ RBW
- c. Set the Detector = peak.
- d. Set the Sweep time = No faster than coupled (auto) time.
- e. Set the Trace mode = max hold.
- f. Allow trace to fully stabilize.

Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

TEST RESULTS


PASS

Please refer to the following tables.


GFSK						
Channel	Frequency (MHz)	RF PHY (Mbps)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB Limit (MHz)	Result
0	2402	1	0.6685	-	>0.5	PASS
19	2440	1	0.6689	-	>0.5	PASS
39	2480	1	0.6699	-	>0.5	PASS
0	2402	2	1.331	-	>0.5	PASS
19	2440	2	1.338	-	>0.5	PASS
39	2480	2	1.350	-	>0.5	PASS

Test Plots of 6dB Bandwidth


RF PHY 1Mbps 2402MHz

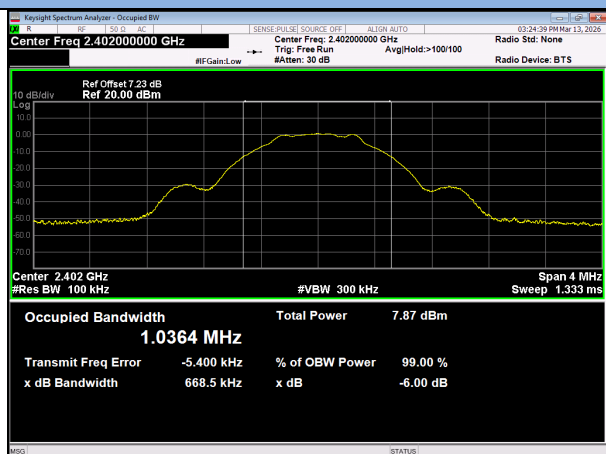


RF PHY 1Mbps 2440MHz

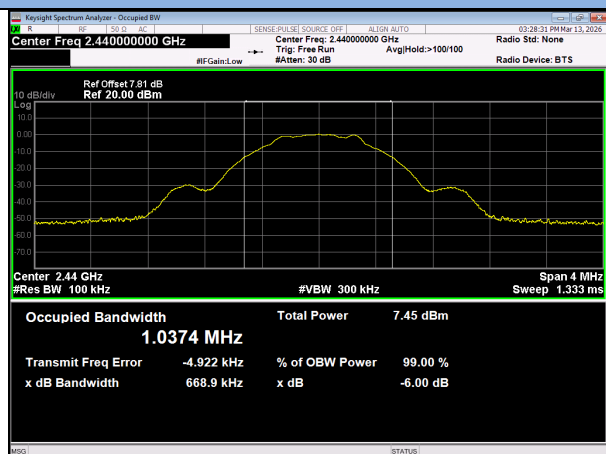


RF PHY 1Mbps 2480MHz

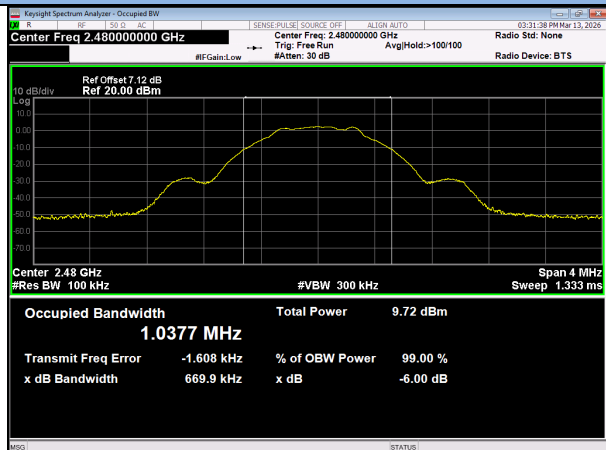


RF PHY 2Mbps 2402MHz

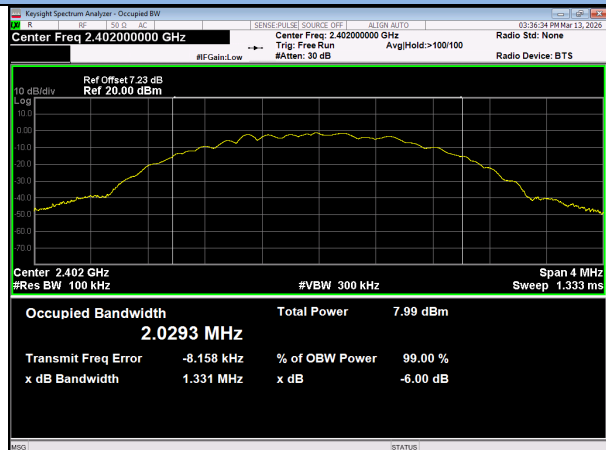

RF PHY 2Mbps 2440MHz

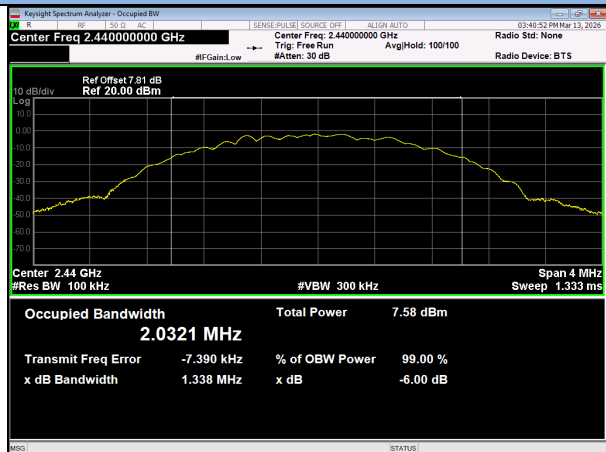

RF PHY 2Mbps 2480MHz

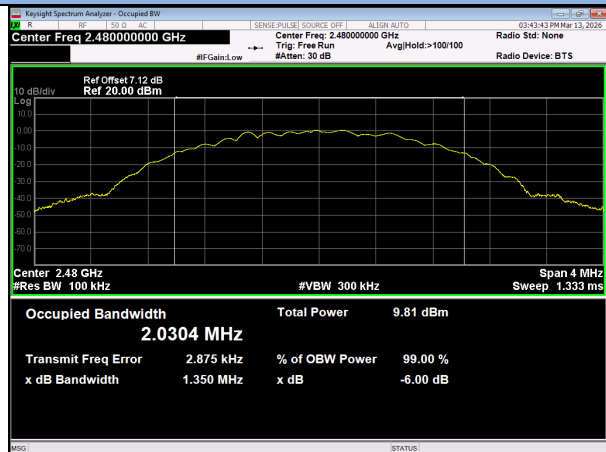


13.4 Power Spectral Density Measurement

LIMIT

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v05r02):

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100\text{KHz}$
- Set the VBW $\geq 3 \times \text{RBW}$.
- Set the Detector = peak.
- Set the Sweep time = auto couple.
- Set the Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS


PASS

Please refer to the following tables.


GFSK					
Channel	Frequency (MHz)	RF PHY (Mbps)	PSD dBm / 3kHz	Limit dBm / 3kHz	Results
0	2402	1	-14.143	8	PASS
19	2440	1	-14.266	8	PASS
39	2480	1	-11.692	8	PASS
0	2402	2	-18.83	8	PASS
19	2440	2	-19.266	8	PASS
39	2480	2	-17.001	8	PASS

Test Plots of Power Spectral Density


RF PHY 1Mbps 2402MHz

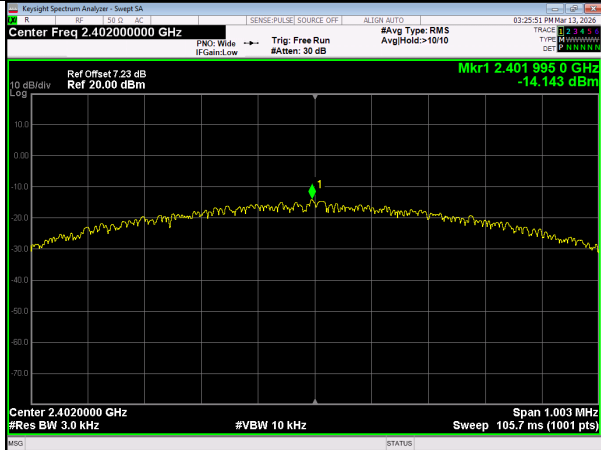


RF PHY 1Mbps 2440MHz

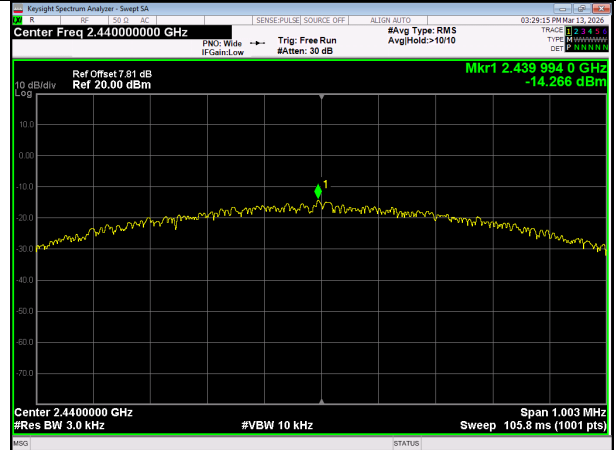

RF PHY 1Mbps 2480MHz

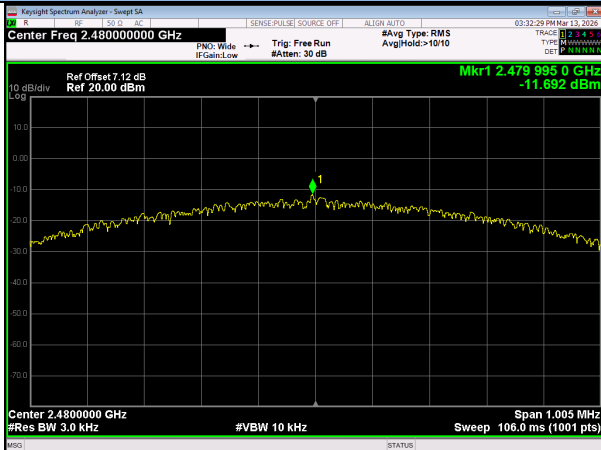


RF PHY 2Mbps 2402MHz

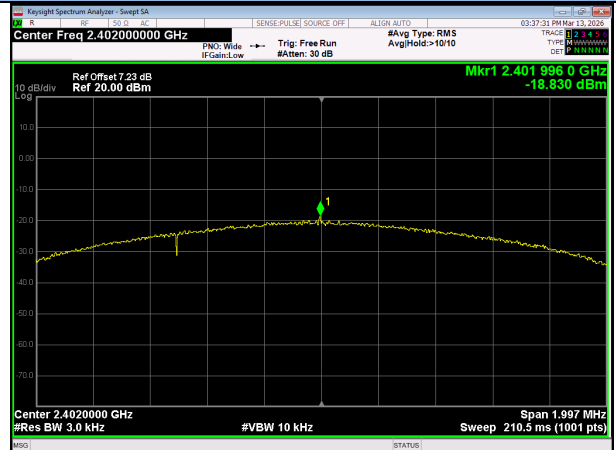

RF PHY 2Mbps 2440MHz



RF PHY 2Mbps 2480MHz

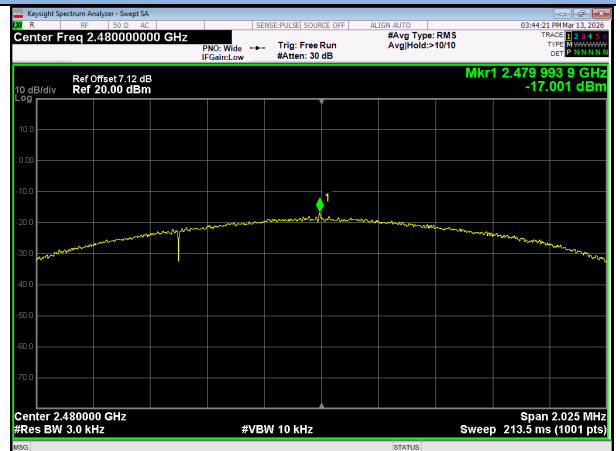


13.5 Band Edge and Conducted Spurious Emissions Measurement

LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to ANSI C63.10-2020, Section 11.11

Measurement Procedure REF

- a. Set the RBW = 100 kHz.
- b. Set the VBW $\geq$ 300 kHz.
- c. Set the Detector = peak.
- d. Set the Sweep time = auto couple.
- e. Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure OOB

- a. Set RBW = 100 kHz.
- b. Set VBW $\geq$ 300 kHz.
- c. Set the Detector = peak.
- d. Set the Sweep = auto couple.
- e. Set the Trace Mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum amplitude level.


TEST RESULTS

PASS


Please refer to the following test tables of the worst case.

Band Edge


RF PHY 1Mbps Low Channel

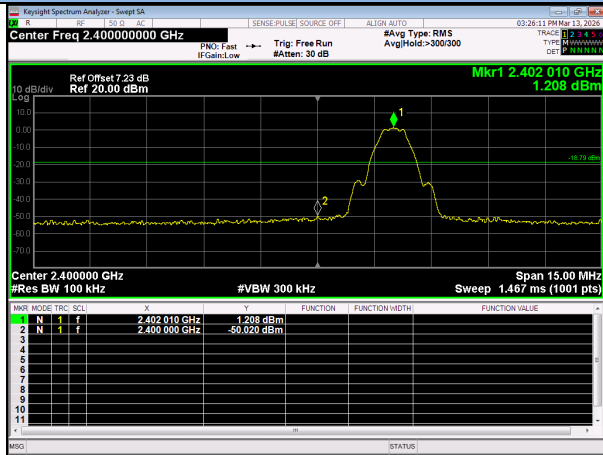


RF PHY 1Mbps High Channel

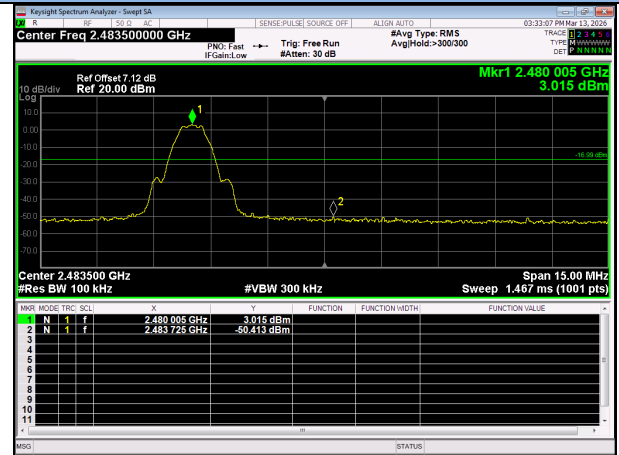

RF PHY 2Mbps Low Channel


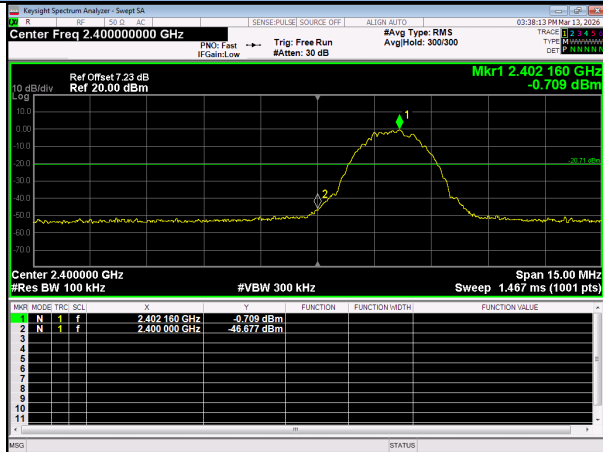


RF PHY 2Mbps High Channel


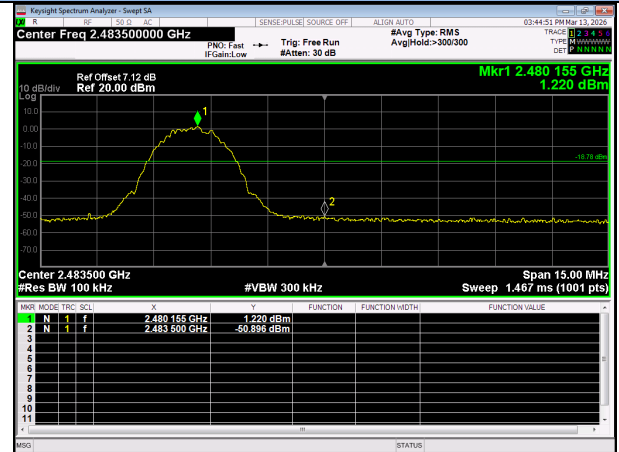


Conducted Spurious Emissions (GFSK: 1Mbps)



Low Channel / 30MHz~26.5GHz

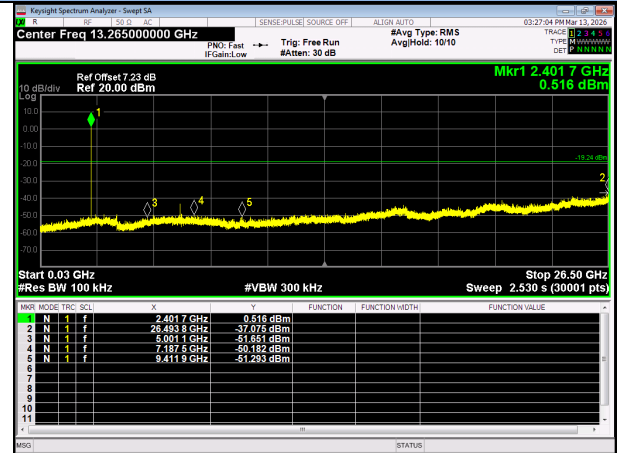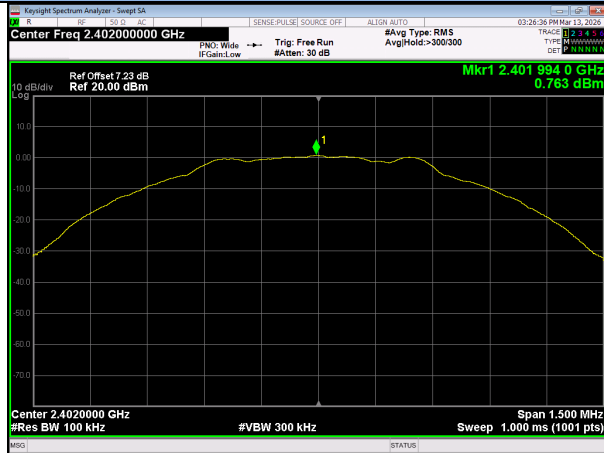

Mid Channel / 30MHz~26.5GHz

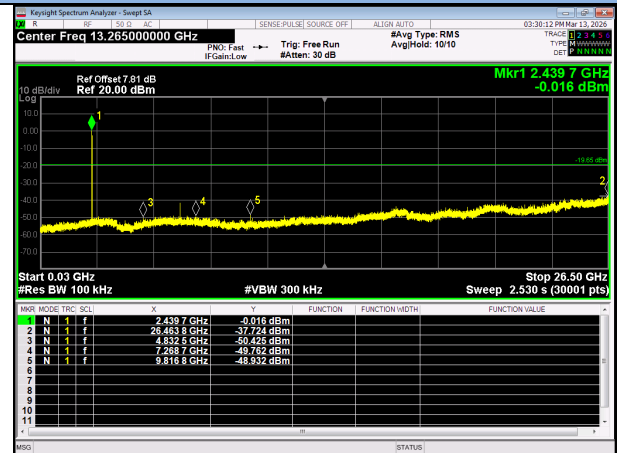
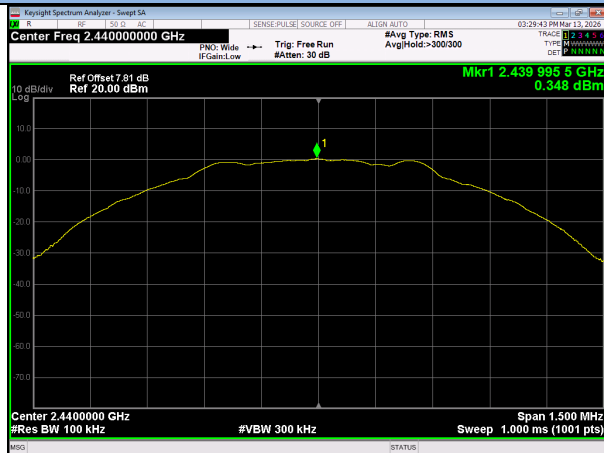


High Channel / 30MHz~26.5GHz

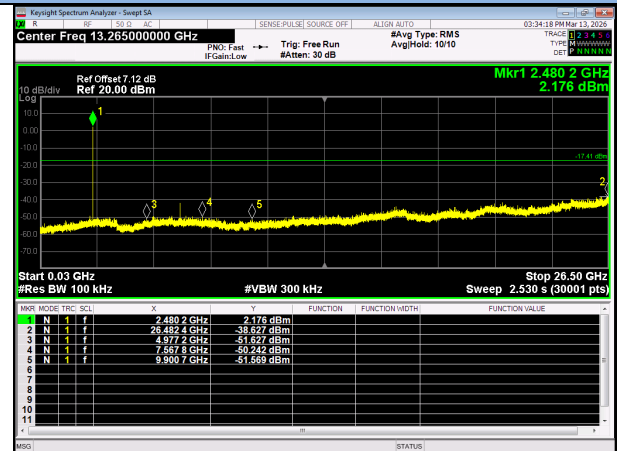
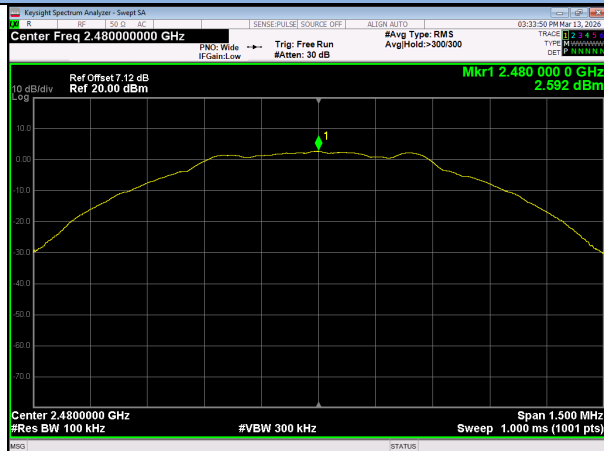


Conducted Spurious Emissions (GFSK: 2Mbps)



Low Channel / 30MHz~26.5GHz

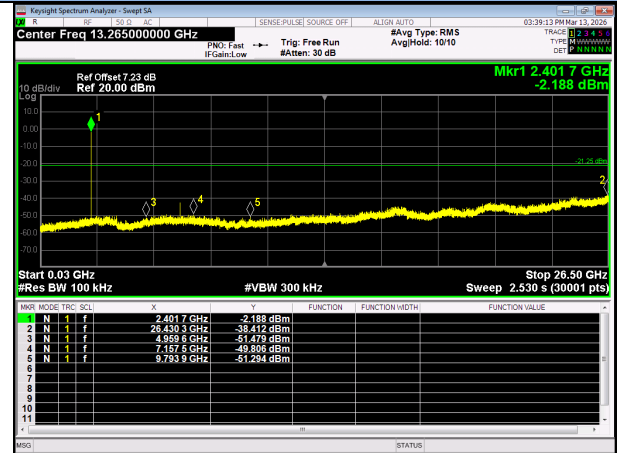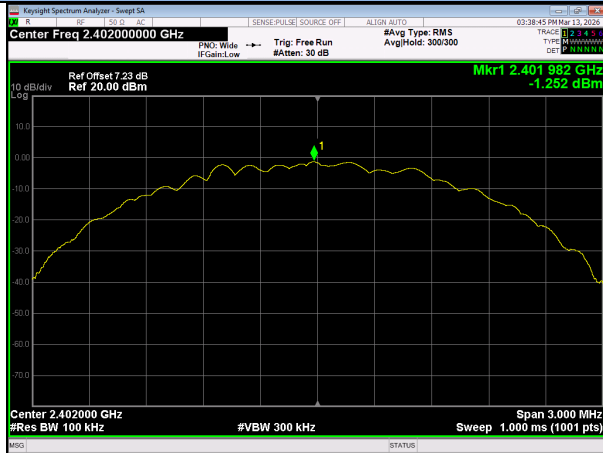

Mid Channel / 30MHz~26.5GHz

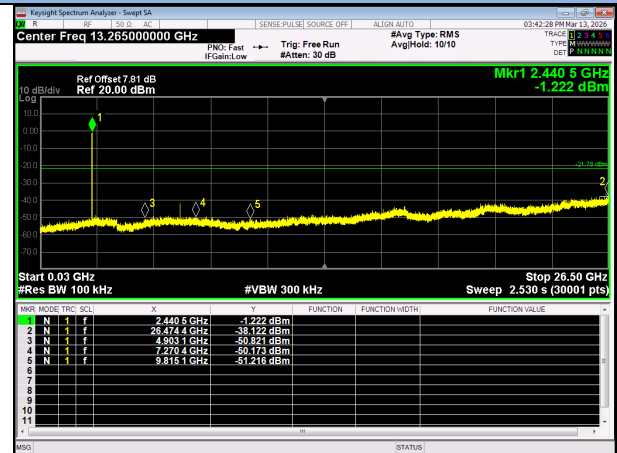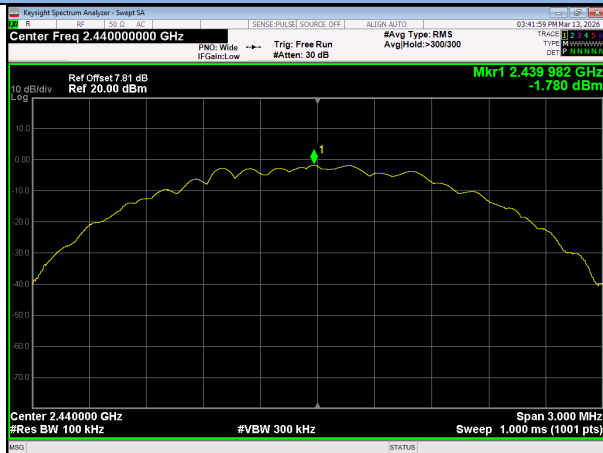

High Channel / 30MHz~26.5GHz

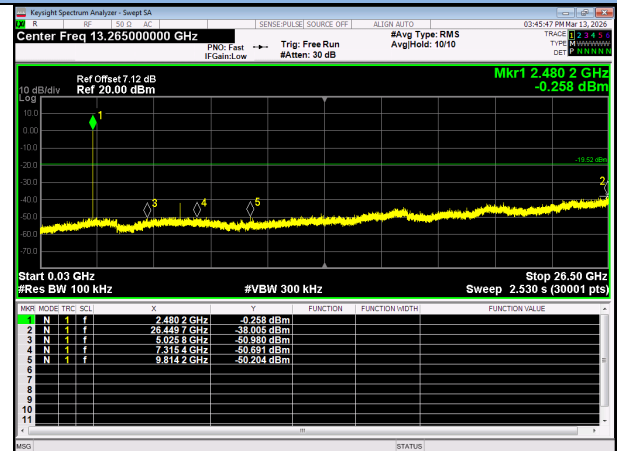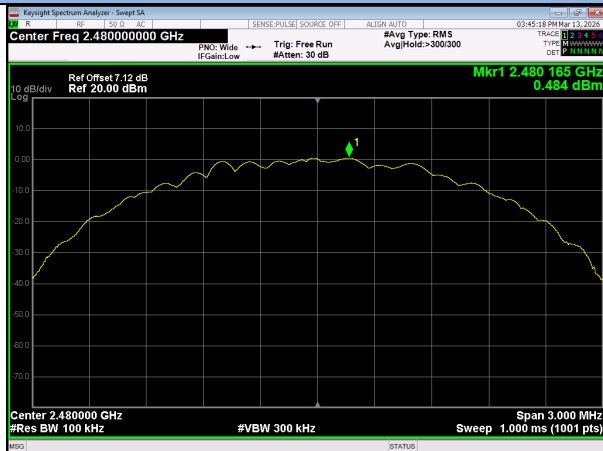

13.6 Radiated Spurious Emissions and Restricted Bands Measurement


LIMIT

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500


- Remark: (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V/m}$.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
- (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

BLOCK DIAGRAM OF TEST SETUP


For Radiated Emission below 30MHz

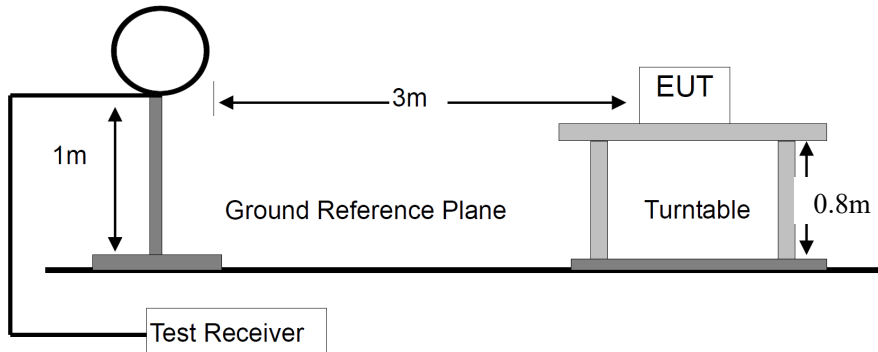

For Radiated Emission 30-1000MHz

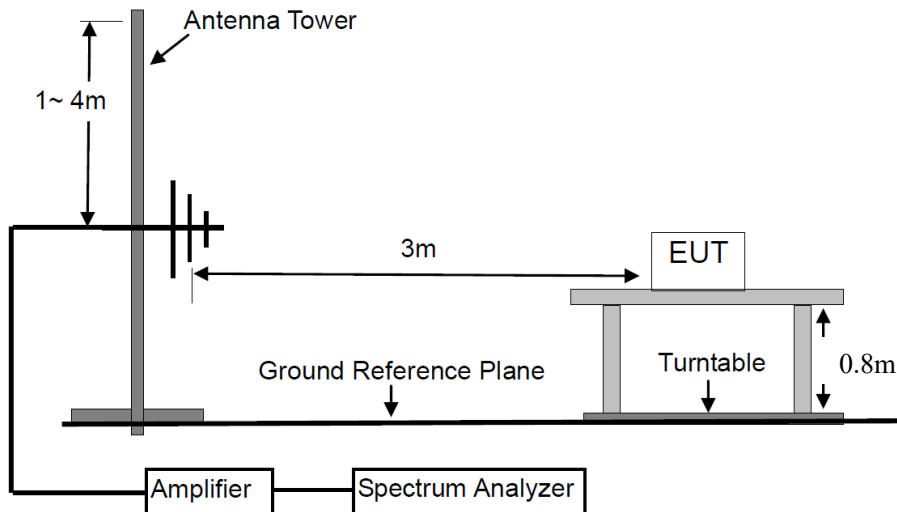

For Radiated Emission Above 1000MHz.

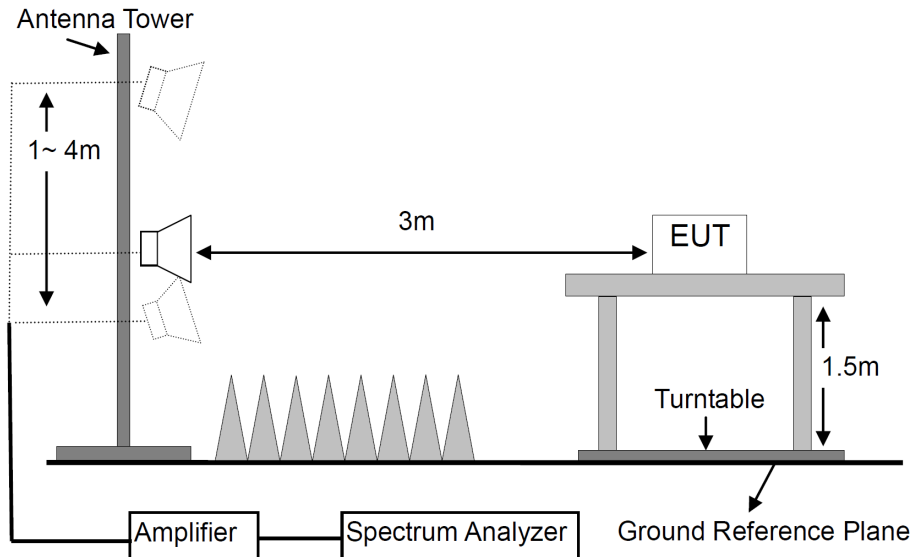

TEST PROCEDURES

- Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, de on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find

the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.

- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution Bandwidth	Video Bandwidth
0.009~0.15	QP & AVG	200 Hz	1 kHz
0.15~30	QP & AVG	10 kHz	30 kHz
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

TEST RESULTS

PASS


Please refer to the following pages of the worst case.

M/N: UPS-2U-Pro	Testing Voltage: AC 120V 60Hz
Polarization: Horizontal	Detector: QP
Test Mode: 4	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/21

Time: 9:13:47

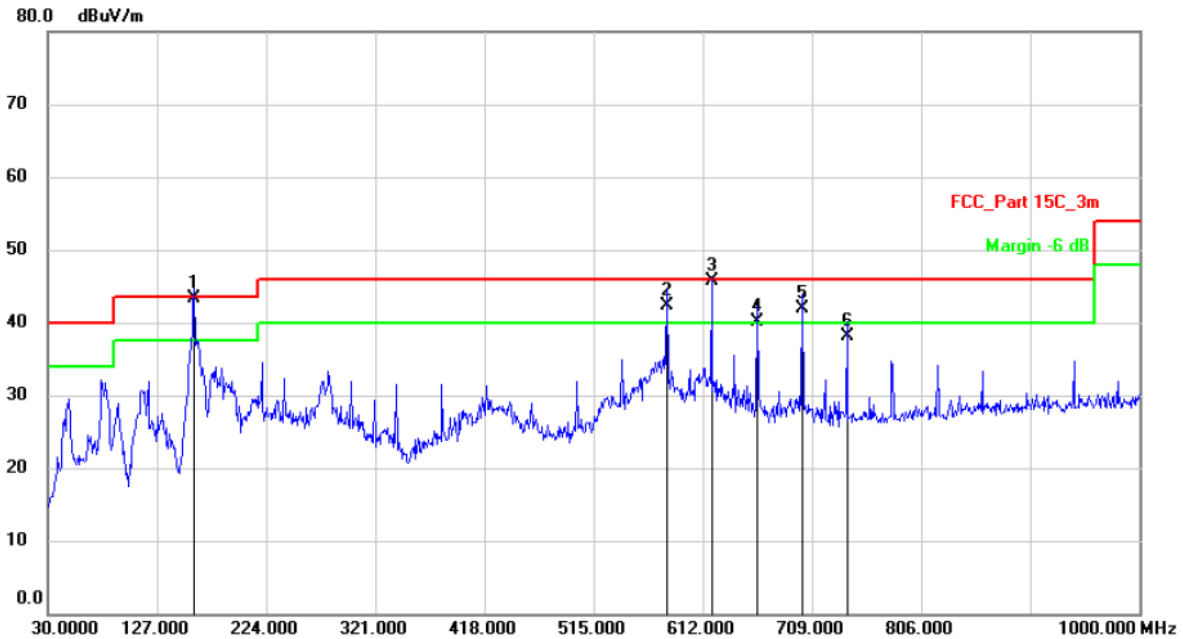

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	159.9800	55.52	-12.22	43.30	43.50	-0.20	QP	
2	!	579.9900	43.21	-0.81	42.40	46.00	-3.60	QP	
3	!	619.7600	45.83	-0.13	45.70	46.00	-0.30	QP	
4	!	660.5000	39.68	0.52	40.20	46.00	-5.80	QP	
5	!	700.2700	40.70	1.30	42.00	46.00	-4.00	QP	
6		740.0400	36.32	1.88	38.20	46.00	-7.80	QP	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: UPS-2U-Pro	Testing Voltage: AC 120V 60Hz
Polarization: Vertical	Detector: QP
Test Mode: 4	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/21

Time: 9:20:59

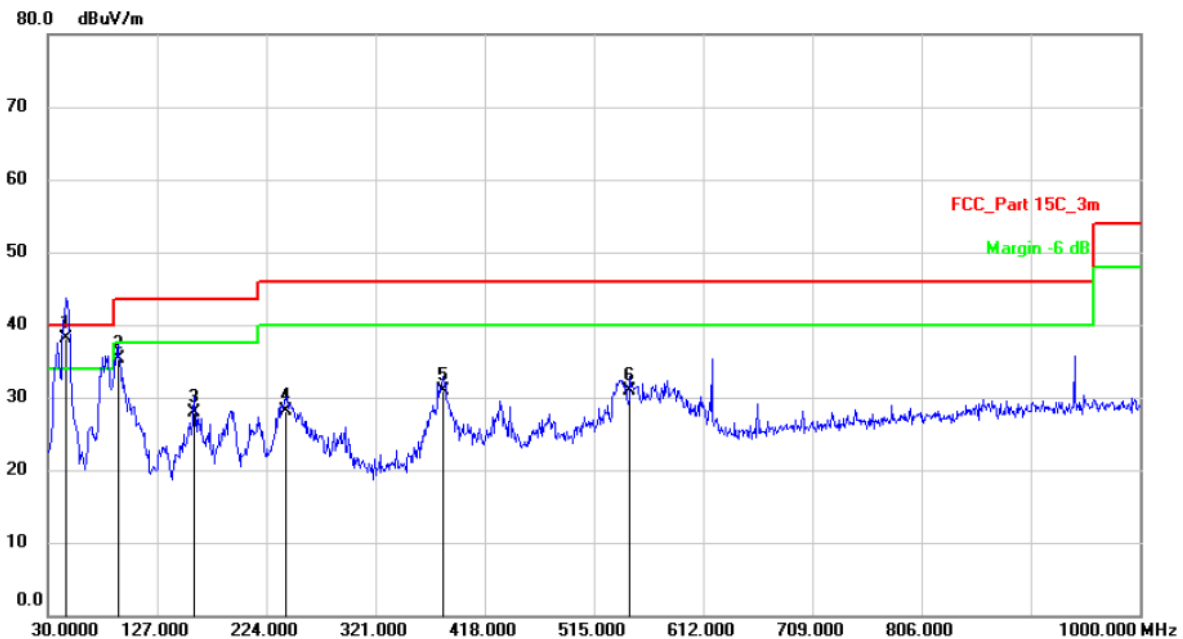

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	46.4900	45.61	-7.51	38.10	40.00	-1.90	QP	
2		92.0800	46.06	-10.76	35.30	43.50	-8.20	QP	
3		159.9800	40.22	-12.22	28.00	43.50	-15.50	QP	
4		241.4600	36.27	-8.07	28.20	46.00	-17.80	QP	
5		381.1400	35.74	-4.84	30.90	46.00	-15.10	QP	
6		547.0100	32.53	-1.63	30.90	46.00	-15.10	QP	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Horizontal	Detector: PK, AVG
Test Mode: GFSK (Low Channel)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 15:50:46

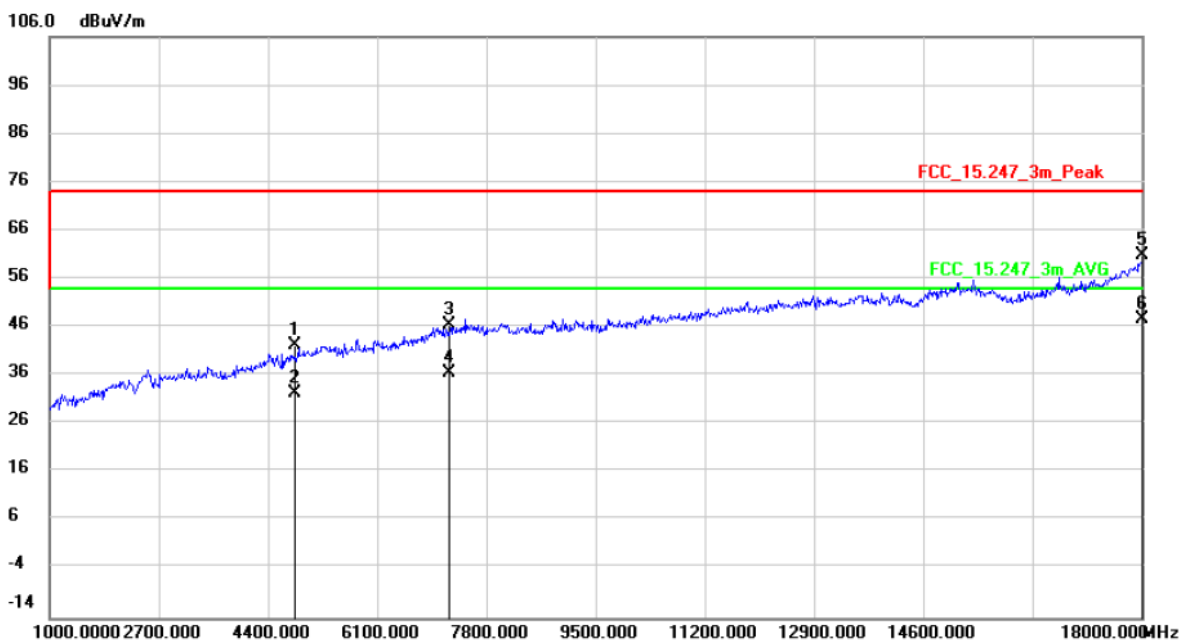

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		4804.000	38.44	3.80	42.24	74.00	-31.76	peak
2		4804.000	28.44	3.80	32.24	54.00	-21.76	AVG
3		7206.000	37.83	8.66	46.49	74.00	-27.51	peak
4		7206.000	27.82	8.66	36.48	54.00	-17.52	AVG
5		18000.000	40.04	20.74	60.78	74.00	-13.22	peak
6	*	18000.000	26.95	20.74	47.69	54.00	-6.31	AVG

M/N: UPS-2U-Pro

Testing Voltage: DC 72V

Polarization: Vertical

Detector: PK, AVG

Test Mode: GFSK (Low Channel)


Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 15:57:53

106.0 dBuV/m

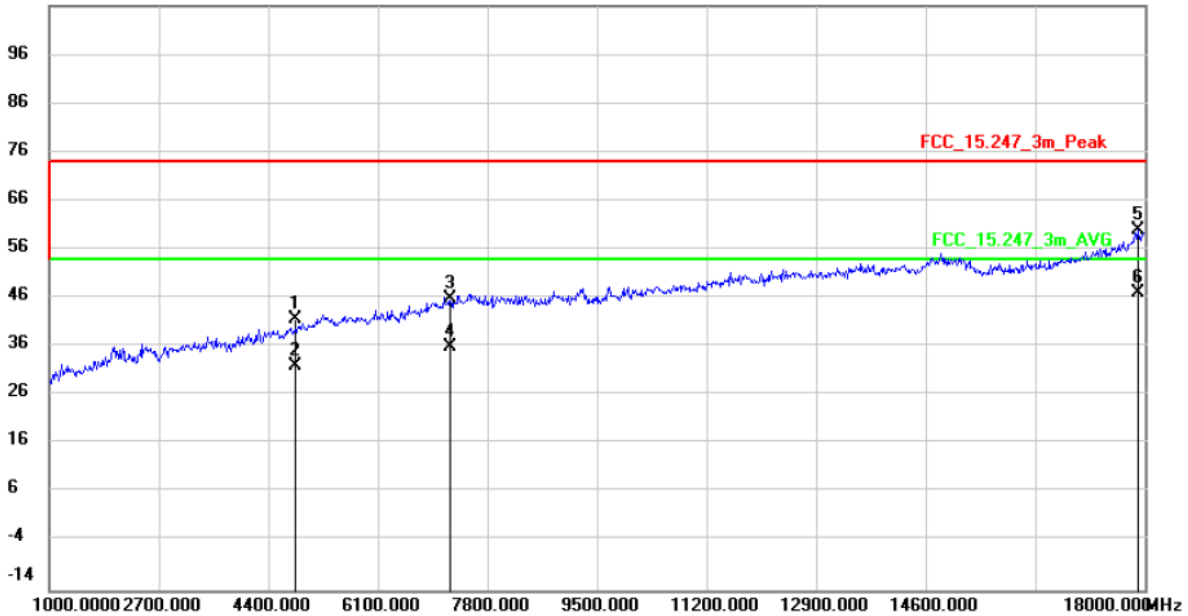


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	37.78	3.80	41.58	74.00	-32.42	peak	
2		4804.000	28.16	3.80	31.96	54.00	-22.04	AVG	
3		7206.000	37.31	8.66	45.97	74.00	-28.03	peak	
4		7206.000	27.19	8.66	35.85	54.00	-18.15	AVG	
5		17898.000	39.64	20.26	59.90	74.00	-14.10	peak	
6	*	17898.000	26.67	20.26	46.93	54.00	-7.07	AVG	

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Horizontal	Detector: PK, AVG
Test Mode: GFSK (Low Channel)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 17:32:48

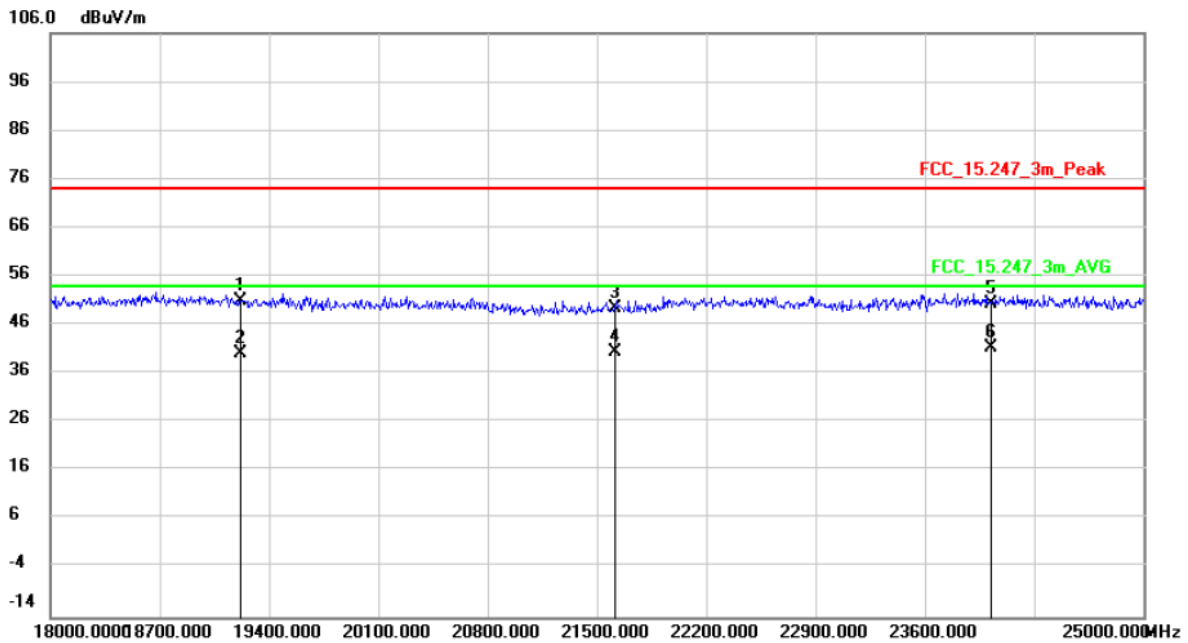


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		19216.000	43.80	7.09	50.89	74.00	-23.11	peak	
2		19216.000	33.07	7.09	40.16	54.00	-13.84	AVG	
3		21618.000	44.38	4.98	49.36	74.00	-24.64	peak	
4		21618.000	35.54	4.98	40.52	54.00	-13.48	AVG	
5		24020.000	45.05	5.44	50.49	74.00	-23.51	peak	
6	*	24020.000	35.92	5.44	41.36	54.00	-12.64	AVG	

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Vertical	Detector: PK, AVG
Test Mode: GFSK (Low Channel)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 17:39:09

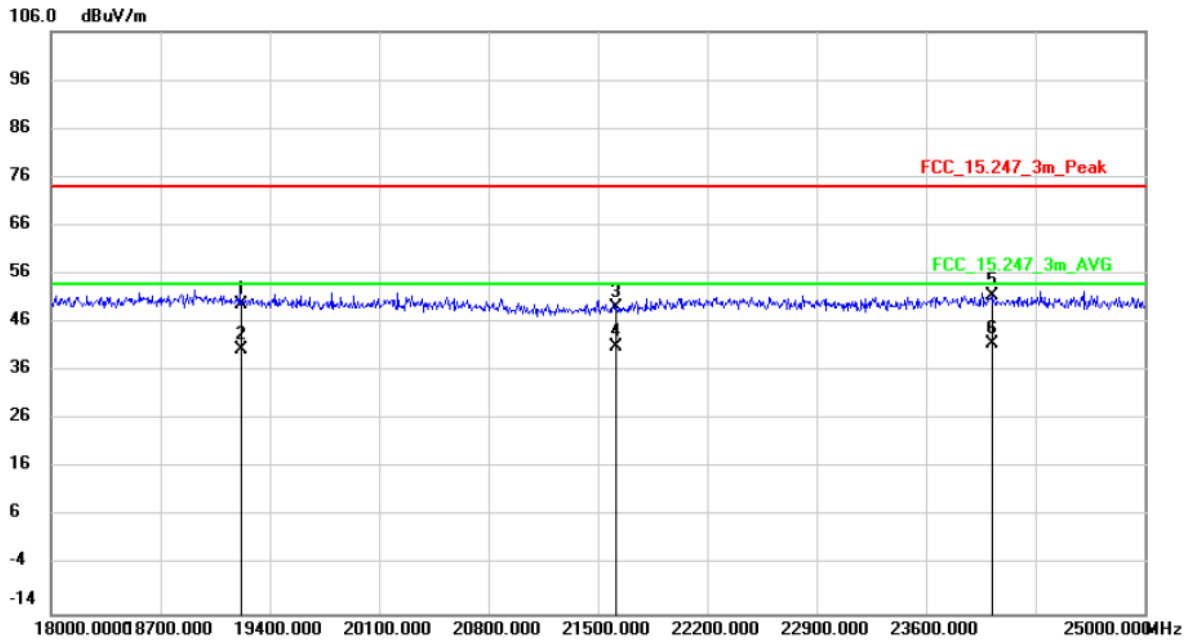


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		19216.000	42.62	7.09	49.71	74.00	-24.29	peak
2		19216.000	33.24	7.09	40.33	54.00	-13.67	AVG
3		21618.000	44.05	4.98	49.03	74.00	-24.97	peak
4		21618.000	36.09	4.98	41.07	54.00	-12.93	AVG
5		24020.000	46.05	5.44	51.49	74.00	-22.51	peak
6	*	24020.000	36.11	5.44	41.55	54.00	-12.45	AVG

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Horizontal	Detector: PK, AVG
Test Mode: GFSK (Middle Channel)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 16:12:06

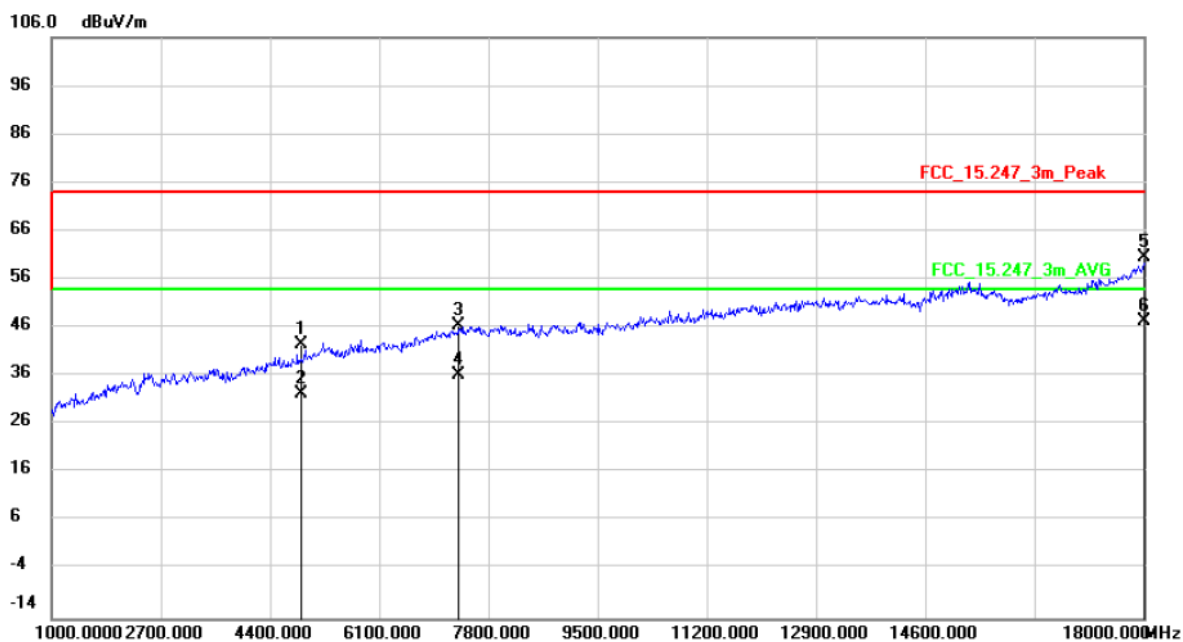

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		4880.000	38.62	4.05	42.67	74.00	-31.33	peak
2		4880.000	28.33	4.05	32.38	54.00	-21.62	AVG
3		7320.000	37.56	9.01	46.57	74.00	-27.43	peak
4		7320.000	27.31	9.01	36.32	54.00	-17.68	AVG
5		18000.000	39.77	20.74	60.51	74.00	-13.49	peak
6	*	18000.000	26.55	20.74	47.29	54.00	-6.71	AVG

M/N: UPS-2U-Pro

Testing Voltage: DC 72V

Polarization: Vertical

Detector: PK, AVG

Test Mode: GFSK (Middle Channel)


Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 16:05:31

106.0 dBuV/m

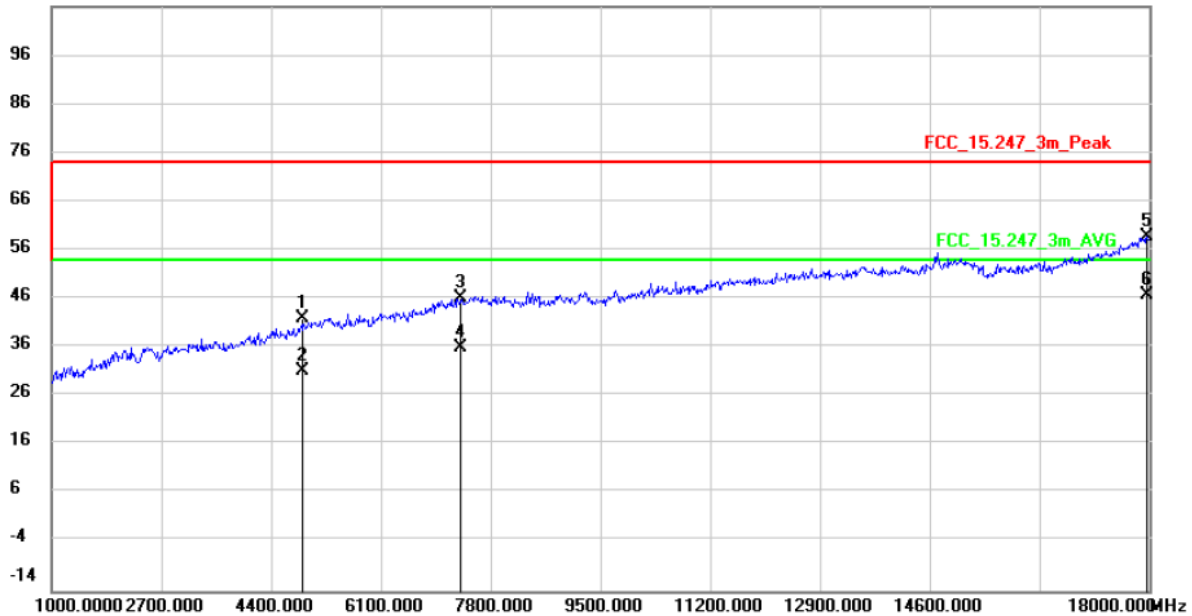


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4880.000	37.81	4.05	41.86	74.00	-32.14	peak	
2		4880.000	27.20	4.05	31.25	54.00	-22.75	AVG	
3		7320.000	37.05	9.01	46.06	74.00	-27.94	peak	
4		7320.000	26.92	9.01	35.93	54.00	-18.07	AVG	
5		17966.000	38.12	20.58	58.70	74.00	-15.30	peak	
6	*	17966.000	26.25	20.58	46.83	54.00	-7.17	AVG	

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Horizontal	Detector: PK, AVG
Test Mode: GFSK (Middle Channel)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 17:53:55

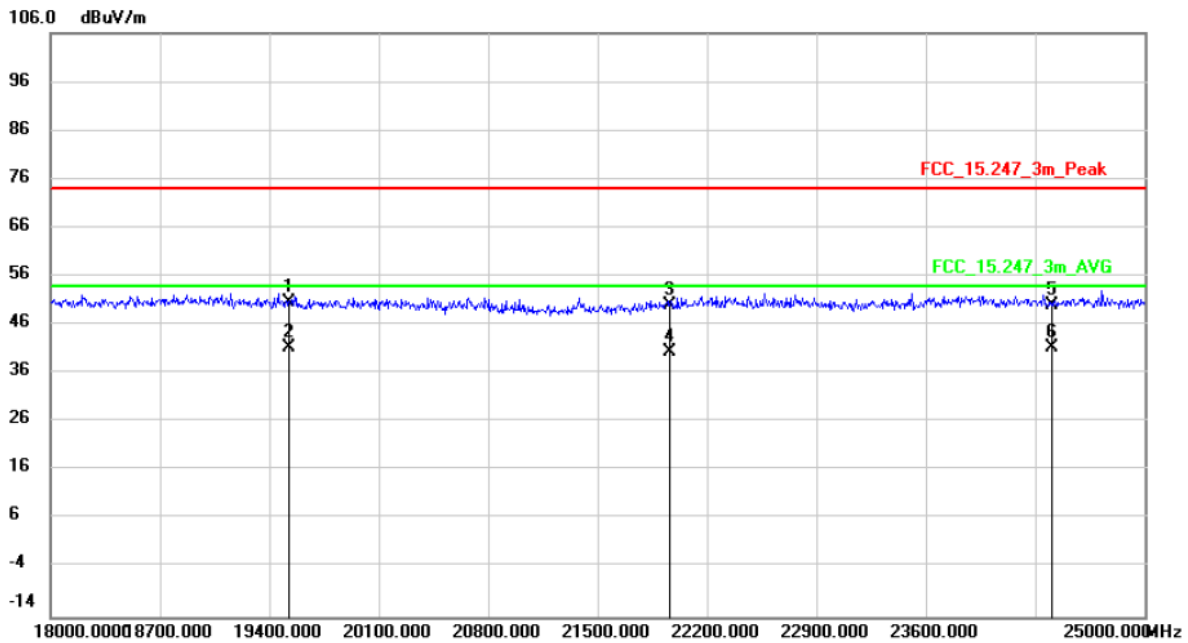

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		19520.000	44.12	6.68	50.80	74.00	-23.20	peak	
2		19520.000	34.67	6.68	41.35	54.00	-12.65	AVG	
3		21960.000	44.51	5.43	49.94	74.00	-24.06	peak	
4		21960.000	35.02	5.43	40.45	54.00	-13.55	AVG	
5		24400.000	44.50	5.67	50.17	74.00	-23.83	peak	
6	*	24400.000	35.72	5.67	41.39	54.00	-12.61	AVG	


M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Vertical	Detector: PK, AVG
Test Mode: GFSK (Middle Channel)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 17:46:13

106.0 dBuV/m

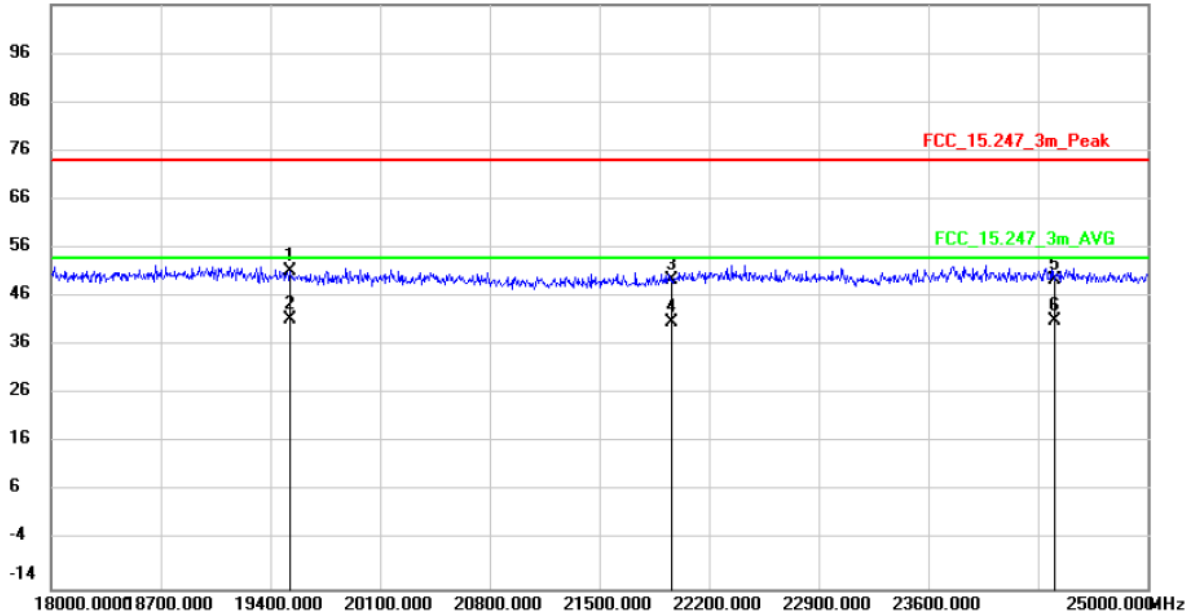


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	19520.000	44.47	6.68	51.15	74.00	-22.85	peak	
2 *	19520.000	34.55	6.68	41.23	54.00	-12.77	AVG	
3	21960.000	44.11	5.43	49.54	74.00	-24.46	peak	
4	21960.000	35.23	5.43	40.66	54.00	-13.34	AVG	
5	24400.000	43.85	5.67	49.52	74.00	-24.48	peak	
6	24400.000	35.41	5.67	41.08	54.00	-12.92	AVG	

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Horizontal	Detector: PK, AVG
Test Mode: GFSK (High Channel)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 16:19:31

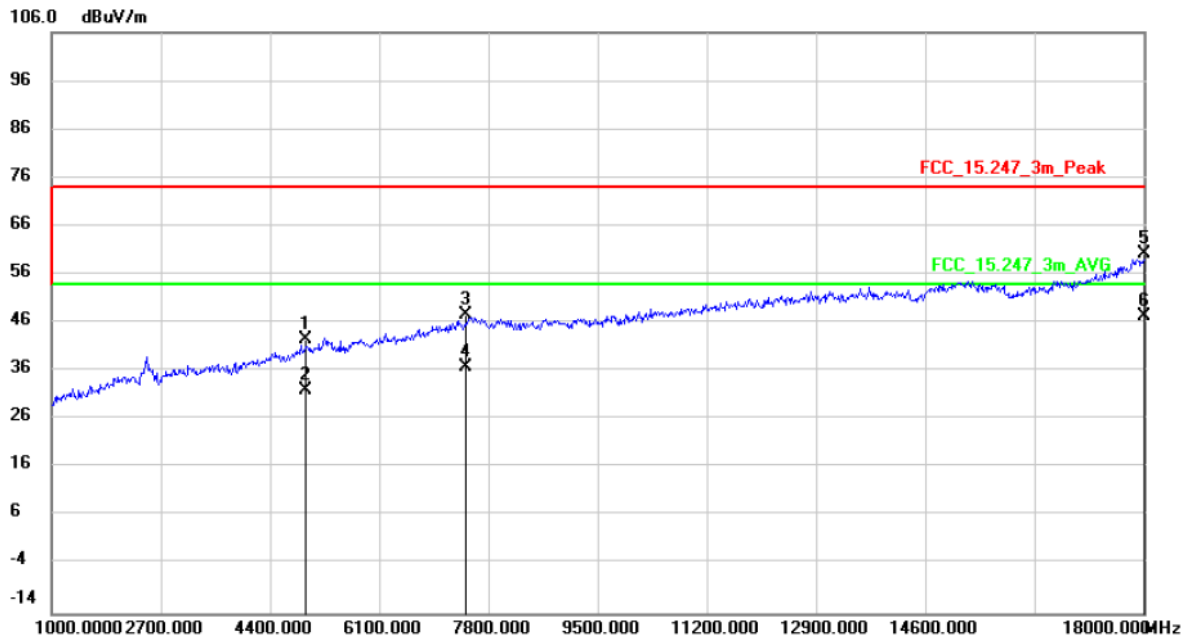

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	38.30	4.30	42.60	74.00	-31.40	peak	
2		4960.000	27.88	4.30	32.18	54.00	-21.82	AVG	
3		7440.000	37.93	9.60	47.53	74.00	-26.47	peak	
4		7440.000	27.26	9.60	36.86	54.00	-17.14	AVG	
5		18000.000	39.65	20.74	60.39	74.00	-13.61	peak	
6	*	18000.000	26.64	20.74	47.38	54.00	-6.62	AVG	


M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Vertical	Detector: PK, AVG
Test Mode: GFSK (High Channel)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 16:26:32

106.0 dBuV/m

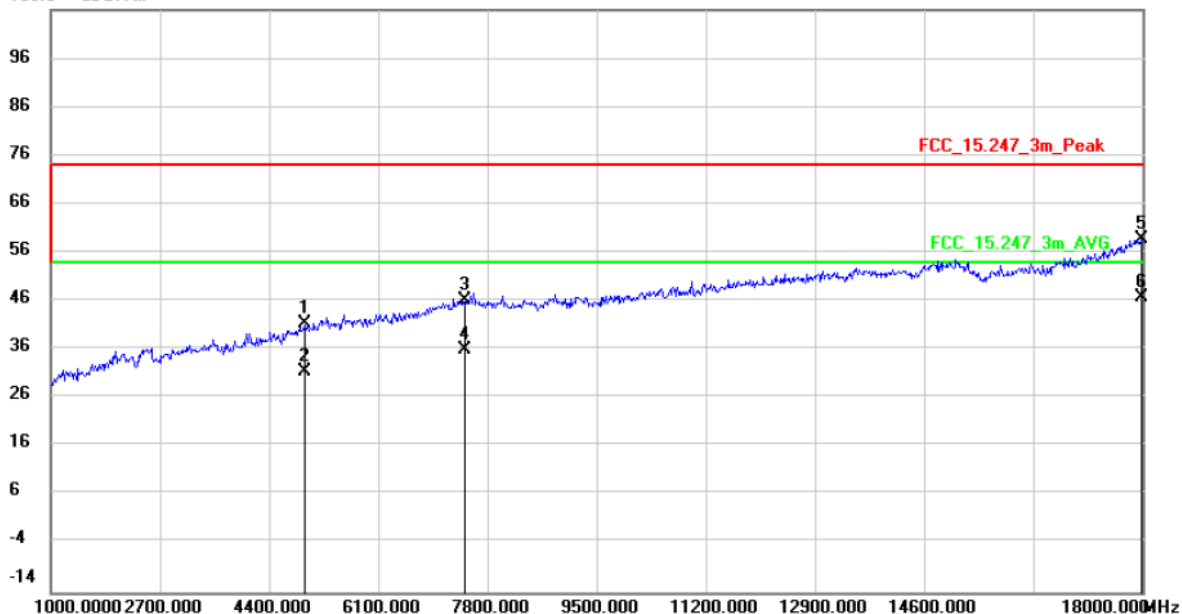

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	37.14	4.30	41.44	74.00	-32.56	peak	
2		4960.000	27.07	4.30	31.37	54.00	-22.63	AVG	
3		7440.000	36.44	9.60	46.04	74.00	-27.96	peak	
4		7440.000	26.29	9.60	35.89	54.00	-18.11	AVG	
5		17983.000	38.13	20.66	58.79	74.00	-15.21	peak	
6	*	17983.000	26.20	20.66	46.86	54.00	-7.14	AVG	

M/N: UPS-2U-Pro

Testing Voltage: DC 72V

Polarization: Horizontal

Detector: PK, AVG


Test Mode: GFSK (High Channel)

Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 18:00:01

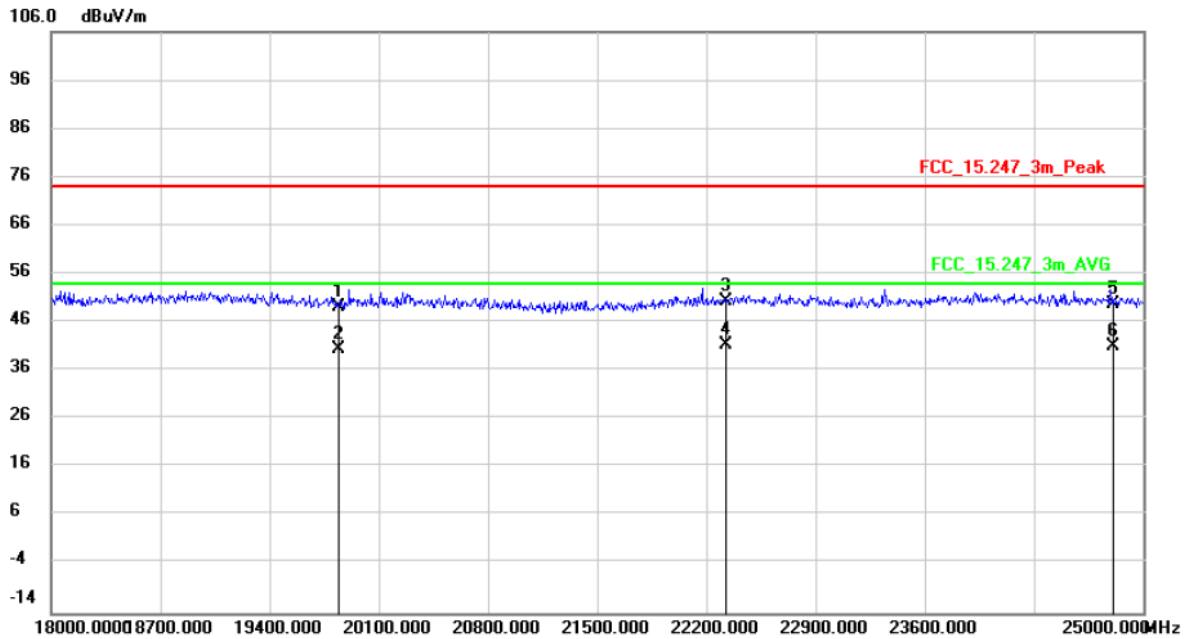

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		19840.000	42.69	6.57	49.26	74.00	-24.74	peak
2		19840.000	33.95	6.57	40.52	54.00	-13.48	AVG
3		22320.000	44.77	5.53	50.30	74.00	-23.70	peak
4	*	22320.000	35.80	5.53	41.33	54.00	-12.67	AVG
5		24800.000	43.94	5.72	49.66	74.00	-24.34	peak
6		24800.000	35.35	5.72	41.07	54.00	-12.93	AVG


M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Vertical	Detector: PK, AVG
Test Mode: GFSK (High Channel)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 18:07:18

106.0 dBuV/m

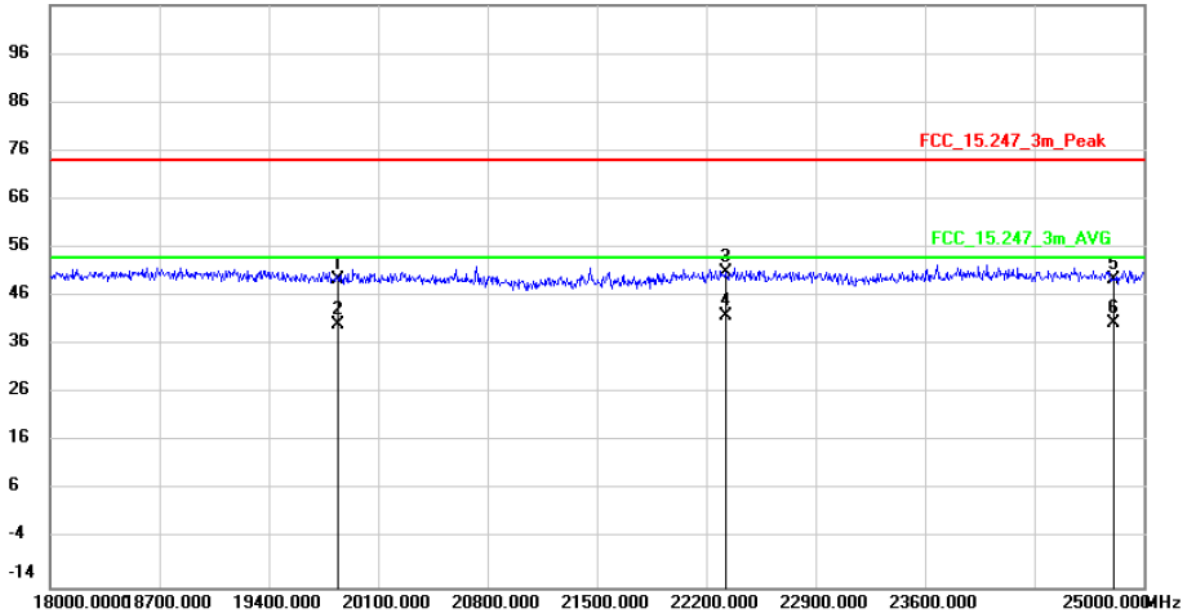


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		19840.000	42.76	6.57	49.33	74.00	-24.67	peak
2		19840.000	33.56	6.57	40.13	54.00	-13.87	AVG
3		22320.000	45.54	5.53	51.07	74.00	-22.93	peak
4	*	22320.000	36.55	5.53	42.08	54.00	-11.92	AVG
5		24800.000	43.73	5.72	49.45	74.00	-24.55	peak
6		24800.000	34.81	5.72	40.53	54.00	-13.47	AVG

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge (1Mbps)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 16:32:42

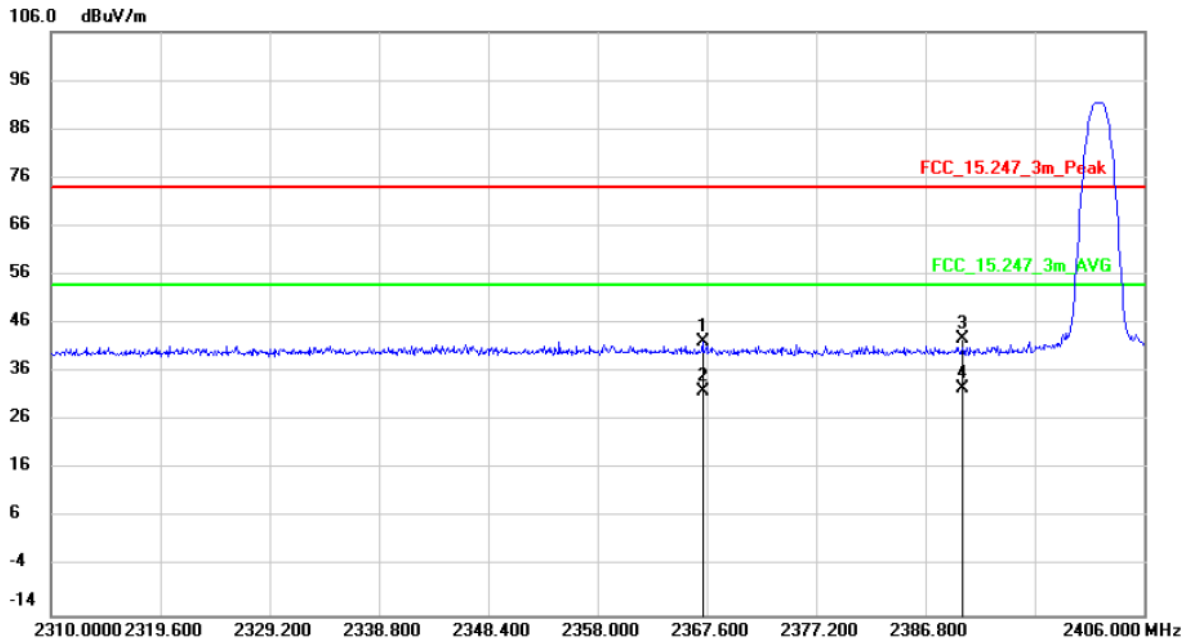

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		2367.216	45.35	-3.01	42.34	74.00	-31.66	peak
2		2367.216	35.07	-3.01	32.06	54.00	-21.94	AVG
3		2390.000	45.93	-2.98	42.95	74.00	-31.05	peak
4	*	2390.000	35.75	-2.98	32.77	54.00	-21.23	AVG


M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge (1Mbps)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 16:40:13

106.0 dBuV/m

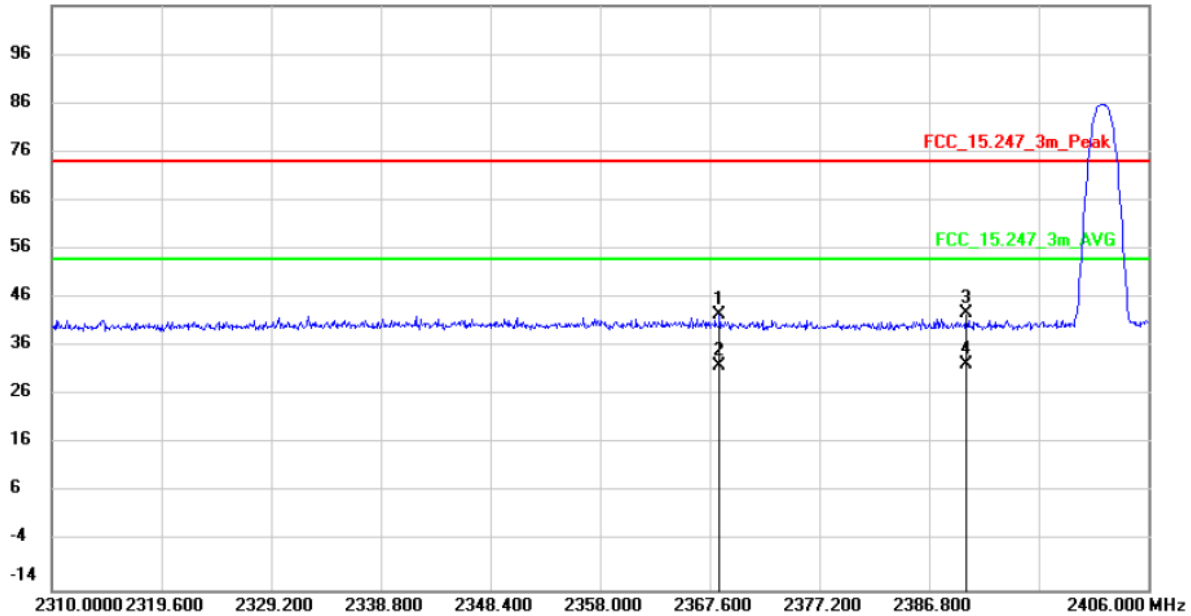


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2368.464	45.64	-3.01	42.63	74.00	-31.37	peak	
2		2368.464	35.07	-3.01	32.06	54.00	-21.94	AVG	
3		2390.000	45.73	-2.98	42.75	74.00	-31.25	peak	
4	*	2390.000	35.31	-2.98	32.33	54.00	-21.67	AVG	

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge (1Mbps)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 16:47:23

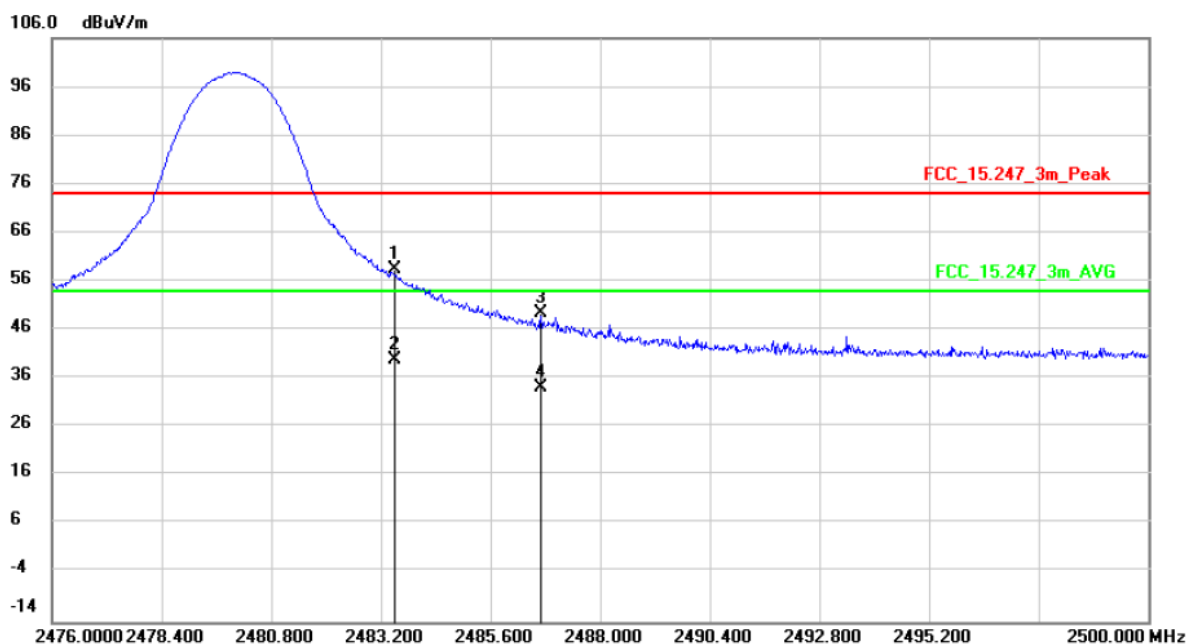

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		2483.500	61.18	-2.84	58.34	74.00	-15.66	peak
2	*	2483.500	42.69	-2.84	39.85	54.00	-14.15	AVG
3		2486.704	52.15	-2.83	49.32	74.00	-24.68	peak
4		2486.704	37.08	-2.83	34.25	54.00	-19.75	AVG


M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge (1Mbps)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 16:55:33

106.0 dBuV/m

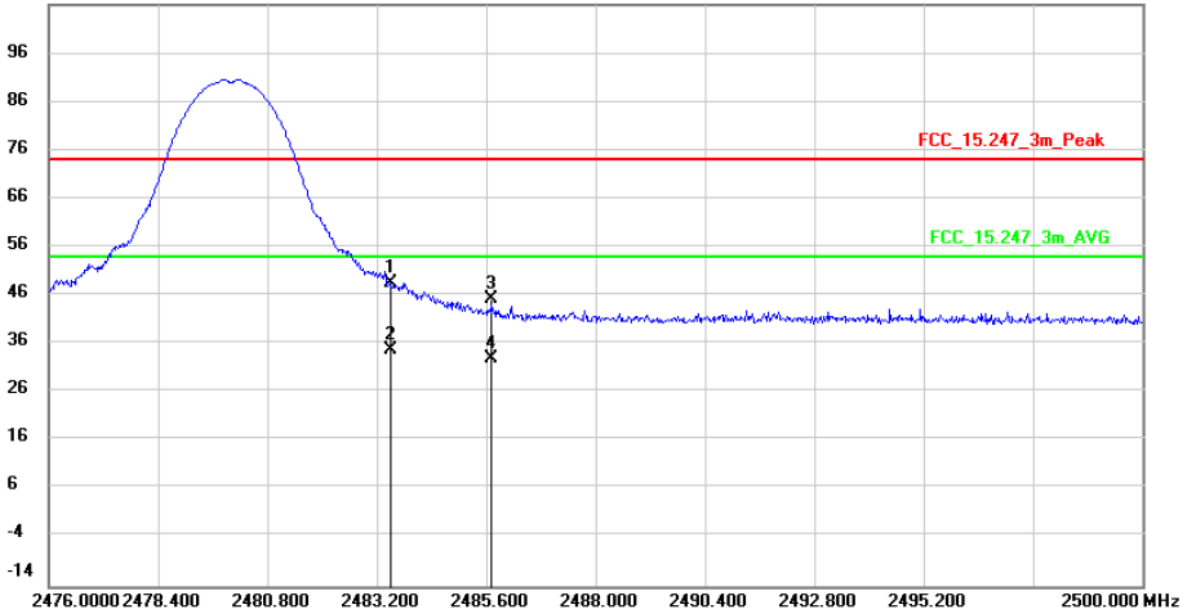

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2483.500	51.45	-2.84	48.61	74.00	-25.39	peak	
2	*	2483.500	37.46	-2.84	34.62	54.00	-19.38	AVG	
3		2485.720	48.16	-2.83	45.33	74.00	-28.67	peak	
4		2485.720	35.93	-2.83	33.10	54.00	-20.90	AVG	


M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge (2Mbps)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 17:18:56

106.0 dBuV/m

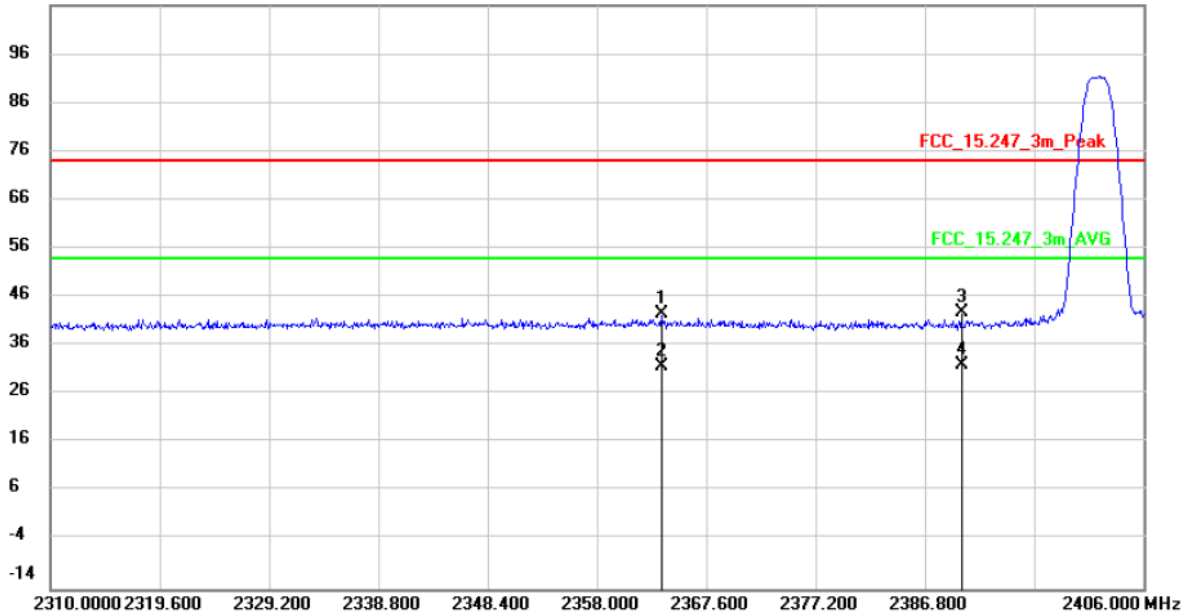

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2363.664	45.60	-3.02	42.58	74.00	-31.42	peak	
2		2363.664	34.84	-3.02	31.82	54.00	-22.18	AVG	
3		2390.000	45.94	-2.98	42.96	74.00	-31.04	peak	
4	*	2390.000	34.91	-2.98	31.93	54.00	-22.07	AVG	


M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge (2Mbps)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 17:25:13

106.0 dBuV/m

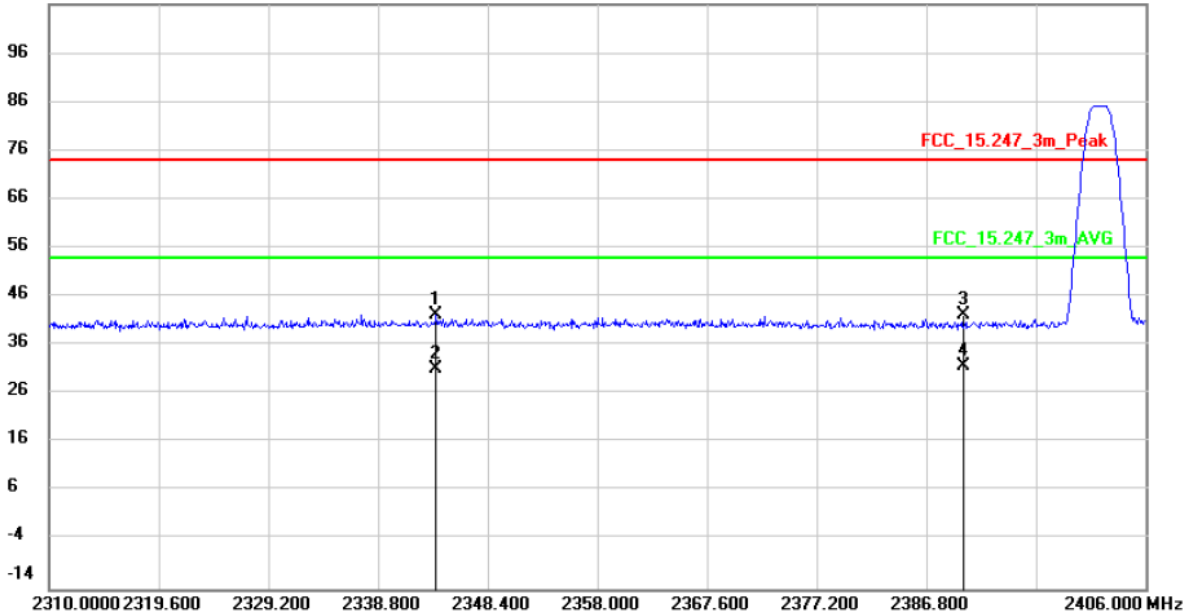


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2343.888	45.16	-3.04	42.12	74.00	-31.88	peak	
2		2343.888	34.16	-3.04	31.12	54.00	-22.88	AVG	
3		2390.000	45.25	-2.98	42.27	74.00	-31.73	peak	
4	*	2390.000	34.64	-2.98	31.66	54.00	-22.34	AVG	

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge (2Mbps)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 17:11:36

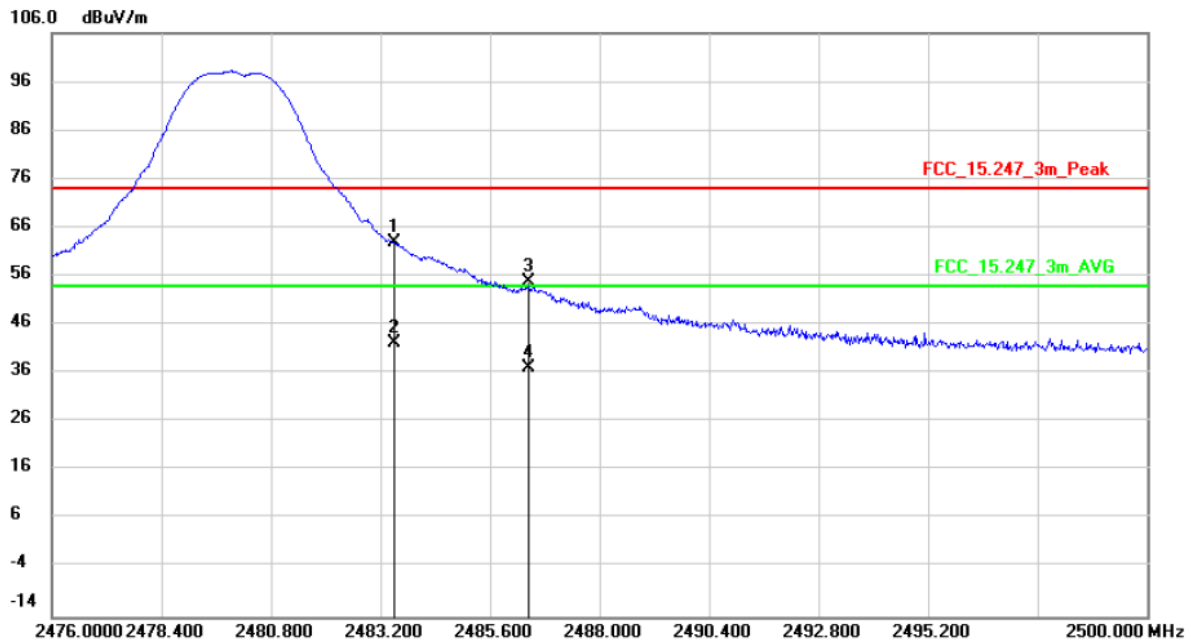


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	65.88	-2.84	63.04	74.00	-10.96	peak	
2		2483.500	45.17	-2.84	42.33	54.00	-11.67	AVG	
3		2486.440	57.65	-2.83	54.82	74.00	-19.18	peak	
4		2486.440	40.08	-2.83	37.25	54.00	-16.75	AVG	

M/N: UPS-2U-Pro	Testing Voltage: DC 72V
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge (2Mbps)	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/14

Time: 17:04:30

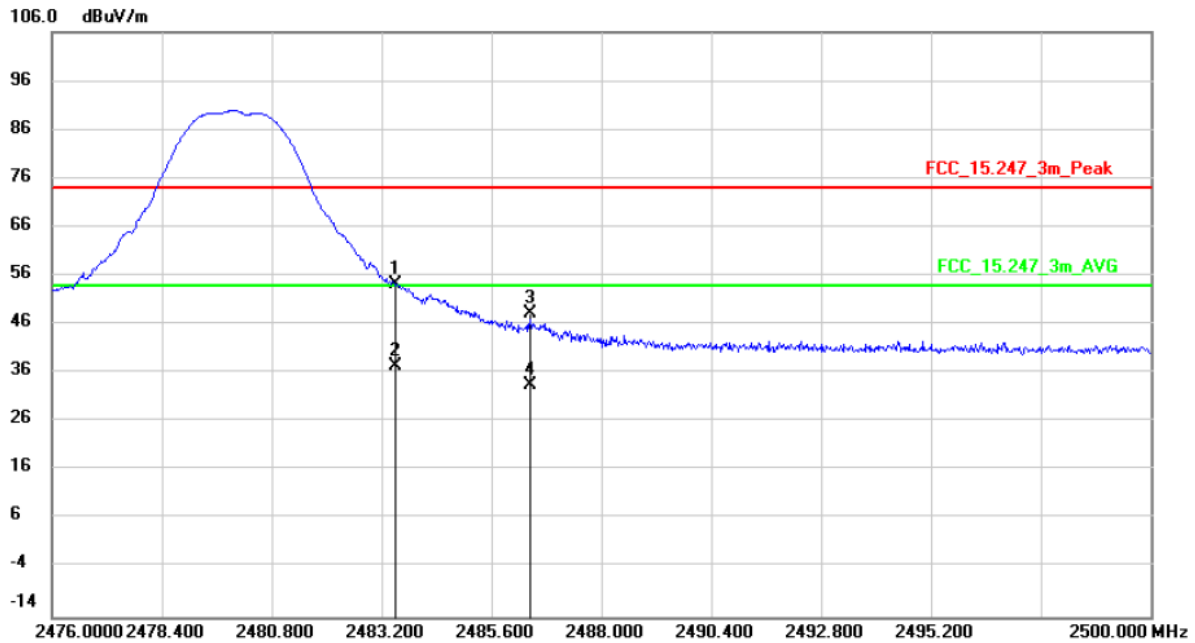

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2483.500	57.22	-2.84	54.38	74.00	-19.62	peak	
2	*	2483.500	40.36	-2.84	37.52	54.00	-16.48	AVG	
3		2486.440	51.17	-2.83	48.34	74.00	-25.66	peak	
4		2486.440	36.27	-2.83	33.44	54.00	-20.56	AVG	

13.7 Antenna Requirement

STANDARD APPLICABLE

According to of FCC part 15C section 15.203 and 15.247:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

ANTENNA CONNECTED CONSTRUCTION

The antenna is PCB antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 6dBi, Therefore, the antenna is considered to meet the requirement.

14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Before Last Cal.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 12, 2025	Aug. 21, 2025	1 Year
2.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 12, 2025	Aug. 21, 2025	1 Year
3.	L.I.S.N	Schwarzbeck	NNLK8129	00558	Mar. 12, 2025	Aug. 23, 2025	1 Year
4.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar. 12, 2025	Aug. 21, 2025	1 Year
5.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 12, 2025	Aug. 21, 2025	1 Year
6.	Spectrum Analyzer	Keysight	N9020A	MY50510314	Mar. 12, 2025	Aug. 21, 2025	1 Year
7.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 12, 2025	Aug. 22, 2025	1 Year
8.	Spectrum Analyzer	Keysight	N9010B	MY62170254	Mar. 12, 2025	Aug. 21, 2025	1 Year
9.	Antenna	Schwarzbeck	VULB9163	01552	Mar. 23, 2024	Aug. 16, 2025	2 Year
10.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2024	Aug. 16, 2025	2 Year
11.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2024	Aug. 16, 2025	2 Year
12.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 12, 2025	Aug. 21, 2025	1 Year
13.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 12, 2025	Aug. 23, 2025	1 Year
14.	Communication Tester	Rohde & Schwarz	CMW500	109851	Mar. 12, 2025	Aug. 28, 2025	1 Year
15.	Power Sensor	DARE	RPR3006W	15I00041SN O64	Mar. 12, 2025	Aug. 28, 2025	1 Year
16.	Horn Antenna	COM-Power	AH-840	10100020	Mar. 23, 2024	Aug. 28, 2025	2 Year
17.	Temperature & Humidity Chamber	Wanshun	SS-HWHS-80	N/A	Mar. 12, 2025	Aug. 09, 2025	1 Year
18.	DC Source	ZHAOXIN	KXN305D	N/A	Mar. 12, 2025	Aug. 23, 2025	1 Year
19.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A	N/A
20.	Chamber	YIHENG	9*6*6m	N/A	Mar. 10, 2025	Sep. 22, 2025	2 Year
21.	Test Software	MWRF	MTS 8310, V2.0.0.0	N/A	N/A	N/A	N/A
22.	Test Software	EZ	EZ EMC, NTC-3A1.1	N/A	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---