




Datasheet
UP-SuperLink

SuperLink

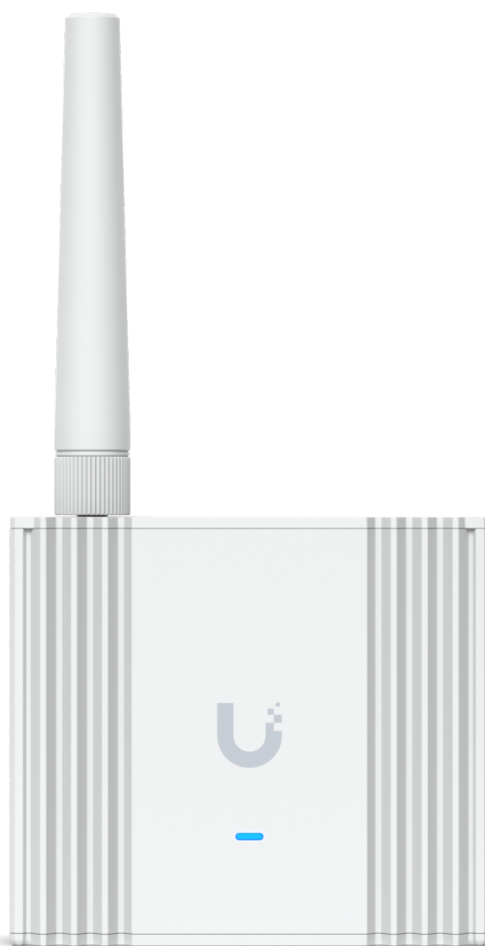

UI.COM

Proprietary super long-range, low-latency wireless gateway for professional sensors and devices.

Mechanical

Dimensions	With antenna: 159.3 x 81.9 x 26 mm (6.3 x 3.2 x 1") With DIN rail mount: 159.3 x 81.9 x 38.5 mm (6.3 x 3.2 x 1.5") With pole/wall mount: 159.3 x 81.9 x 30.5 mm (7.5 x 3.2 x 1.2")
Weight	179 g (6.3 oz)
Enclosure material	Polycarbonate, aluminum alloy
Mount materials	Polycarbonate

Hardware

Networking interface	(1) 10/100 MbE RJ45 port
Management interface	BLE, proprietary Sub-G
Power method	PoE USB Type-C, 5V, 1A
Max. power consumption	3.4W
ESD/EMP protection	Air: ± 8kV, contact: ± 4kV
Antenna	Bluetooth Sub-G LoRa
Antenna gain	Bluetooth: 1 dBi LoRa: 1 dBi
Max. TX power	Bluetooth: 20 dBm LoRa: 27 dBm
Max. range	2 km (1.2 mi)
LED	(1) B/W
Button	Factory reset
Ambient operating temperature	0 to 40° C (32 to 104° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE

Software

Web application	UniFi Protect
Mobile apps	UniFi Protect iOS™ and Android™

E-label and warning statements can be found in the device/controller GUI under Device > Overview > E-label info



Specifications are subject to change. Ubiquiti products are sold with a limited warranty described at: www.ui.com/support/warranty

©2024 Ubiquiti Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, UniFi Protect, and UniFi are trademarks or registered trademarks of Ubiquiti Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.