



427 West 12800 South
Draper, UT 84020

Test Report Certification

FCC ID	SWX-UTRLR
IC ID	6545A-UTRLR
Equipment Under Test	UTR-LR
Test Report Serial Number	TR11004_01
Date of Test(s)	17 - 19, 22 - 23 June 2026
Report Issue Date	31 July 2026

Test Specification	Applicant
47 CFR FCC Part 15, Subpart C RSS-247, Issue 4 (July 2025)	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.



NVLAP LAB CODE 600241-0

Certification of Engineering Report

This report has been prepared by Unified Compliance Laboratory (UCL) to document compliance of the device described below with the requirement of Federal Communication Commissions (FCC) Part 15, Subpart C. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested with the specifications provided by the manufacturer.

Applicant	Ubiquiti Inc.
Manufacturer	Ubiquiti Inc.
Brand Name	UBIQUITI
Model Number	UTR-LR
FCC ID	SWX-UTRLR
IC ID	6545A-UTRLR

On this 31st day of July 2026, I individually and for Unified Compliance Laboratory certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge and are made in good faith. Unified Compliance laboratory is not responsible for incorrect information provided by the manufacturer.

Although NVLAP has accredited the Unified Compliance Laboratory testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. federal government.

Unified Compliance Laboratory


Written By: Joseph W Jackson
Reviewed By: Kimberly DeBole

Revision History		
Revision	Description	Date
01	Original Report Release	31 July 2026

Table of Contents

1	Client Information	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT)	6
2.1	Identification of EUT.....	6
2.2	Description of EUT.....	6
2.3	EUT and Support Equipment.....	6
2.4	Interface Ports on EUT	7
2.5	Operating Environment	7
2.6	Operating Modes	7
2.7	EUT Exercise Software	7
2.8	Block Diagram of Test Configuration	8
2.9	Modification Incorporated/Special Accessories on EUT	8
2.10	Deviation, Opinions Additional Information or Interpretations from Test Standard	8
3	Test Specification, Method and Procedures	9
3.1	Test Specification	9
3.2	Methods & Procedures	9
3.3	FCC Part 15, Subpart C	9
3.4	Results.....	10
3.5	Test Location	10
4	Test Equipment.....	11
4.1	Conducted Emissions at Mains Ports	11
4.2	Direct Connect at the Antenna Port Tests.....	11
4.3	Radiated Emissions.....	12
4.4	Equipment Calibration.....	13
4.5	Measurement Uncertainty.....	13
5	Test Results.....	14
5.1	§15.203 Antenna Requirements.....	14
5.2	§15.207 Conducted Emissions at Mains Ports Data.....	15
5.3	§15.247(a)(2) Emissions Bandwidth	17
5.4	§15.247(b)(3) Maximum Average Output Power	18
5.5	§15.247(d) Spurious Emissions.....	20
5.6	§15.247(e) Maximum Average Power Spectral Density	32

1 Client Information

1.1 Applicant

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance Officer

1.2 Manufacturer

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance Officer

2 Equipment Under Test (EUT)

2.1 Identification of EUT

Brand Name	UBIQUITI
Model Number	UTR-LR
Serial Number	E6D95A
Dimensions (cm)	6.5 x 9.6 x 1.9

2.2 Description of EUT

The UniFi Travel Router Long-Range (UTR-LR) is a compact travel router and VPN functionality for secure connections on the go. The UTR-LR has 2x2 2.4 GHz and 2x2 5GHz dual-band wireless transmitters. The UTR-LR has a Bluetooth transmitter for management control. The UTR is an indoor device and is powered from a USB-C power port.

For CDD transmissions, directional gain is calculated as follows:

Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB

NANT = number of transmit antennas and

NSS = number of spatial streams. NSS = 1 considered worst case.

For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for $\text{NANT} \leq 4$;

For PSD measurements when $\text{Nss}=1$: Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB + Antenna Gain (dBi). Or $3.01 \text{ dB} + 4 \text{ dBi} = 7.01 \text{ dBi}$.

This report covers the circuitry of the device subject to FCC Part 15, Subpart C. The circuitry of the device subject to FCC Part 15 Subpart B was found to be compliant and is covered under a separate Unified Compliance Laboratory test report.

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: UBIQUITI MN: UTR-LR (Note 1) SN: E6D95A	Wireless Router	See Section 2.4
BN: UBIQUITI MN: E005-1I050100VU SN: N/A	USB Power Adapter	2 Conductor power cord to AC mains/80cm

BN: Dell MN: XPS 13 SN: N/A	Laptop Personal Computer	Unshielded Cat 5e cable/3 meters
-----------------------------------	--------------------------	----------------------------------

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT

Name of Ports	No. of Ports Fitted to EUT	Cable Description/Length
USB-C Power	1	2 conductor power to AC mains/80cm
USB-C Passthrough	1	USB-C cable/3 meters
Ethernet	2	Unshielded Cat 5e cable/3 meters

2.5 Operating Environment

Power Supply	120 Volts AC Main to USB-C
AC Mains Frequency	60 Hz
Temperature	22.4 - 25.2 °C
Humidity	21.8 - 27.4 %
Barometric Pressure	1011 mBar

2.6 Operating Modes

The UTR-LR was connected to a personal computer laptop and tested using test software in order to enable to constant duty cycle. The measurements within this report are corrected to reference a 100% duty cycle. All emission modes of 802.11 b/g/n were investigated. All measurements are reported with the worst-case mode (802.11n maximum conducted output power and maximum power spectral density) unless otherwise stated.

2.7 EUT Exercise Software

EUT firmware version 1.0 was used to operate the transmitter using a constant transmit mode.

2.8 Block Diagram of Test Configuration

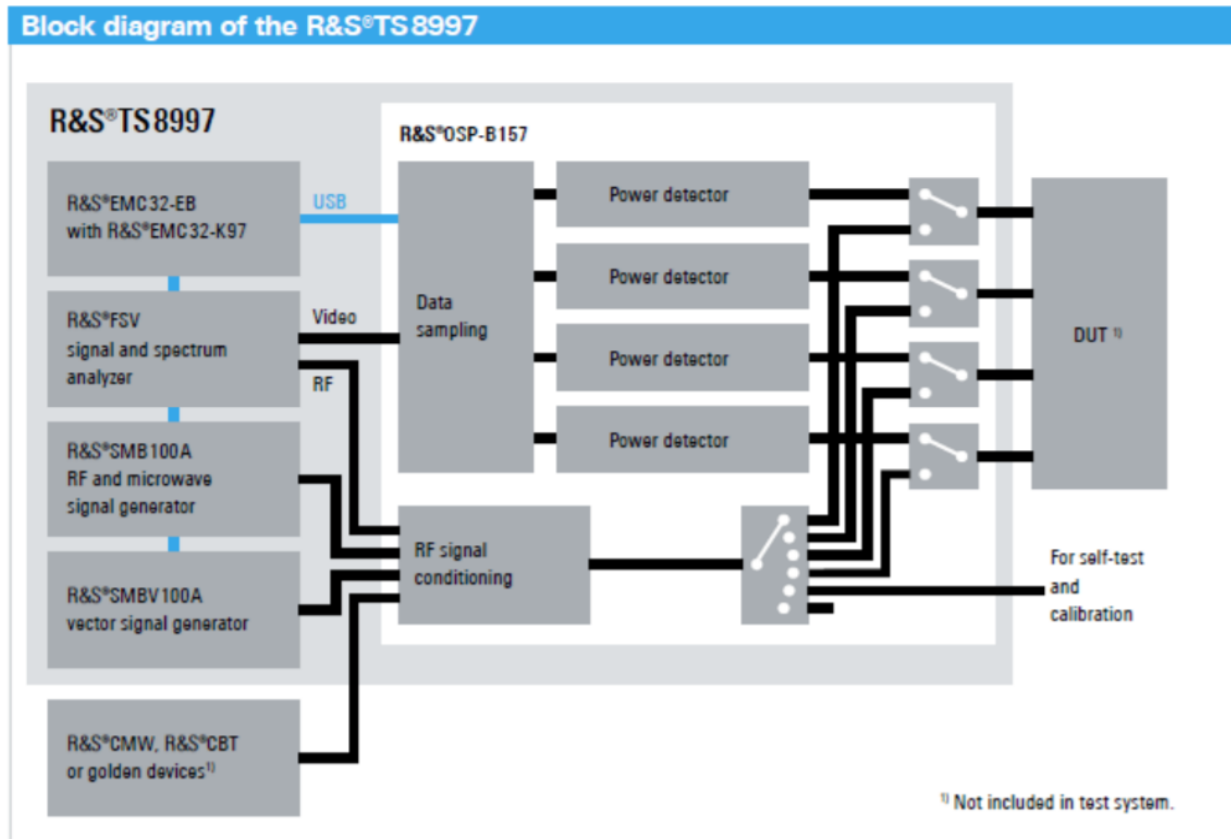


Diagram 1: Test Configuration Block Diagram

2.9 Modification Incorporated/Special Accessories on EUT

There were no modifications made to the EUT during testing to comply with the specification.

2.10 Deviation, Opinions Additional Information or Interpretations from Test Standard

There were no deviations, opinions, additional information or interpretations from the test specification.

3 Test Specification, Method and Procedures

3.1 Test Specification

Title	47 CFR FCC Part 15, Subpart C 15.203, 15.207 and 15.247 Limits and methods of measurement of radio interference characteristics of radio frequency devices.
Purpose of Test	The tests were performed to demonstrate initial compliance

3.2 Methods & Procedures

3.2.1 47 CFR FCC Part 15 Section 15.203

See test standard for details.

3.2.2 47 CFR FCC Part 15 Section 15.207

See test standard for details.

3.2.3 47 CFR FCC Part 15 Section 15.247

See test standard for details.

3.3 FCC Part 15, Subpart C

3.3.1 Summary of Tests

FCC Section	ISED Section	Environmental Phenomena	Frequency Range (MHZ)	Result
15.203	N/A	Antenna requirements	Structural Requirement	Compliant
15.207	RSS-Gen	Conducted Disturbance at Mains Port	0.15 to 30	Compliant
15.247(a)	RSS-247 § 5.2	Bandwidth Requirement	2412 to 2462	Compliant
15.247(b)	RSS-247 § 5.4	Peak Output Power	2412 to 2462	Compliant
15.247(d)	RSS-247 § 5.4	Antenna Conducted Spurious Emissions	0.009 to 26000	N/A
15.247(d)	RSS-247 § 5.4	Radiated Spurious Emissions	0.009 to 26000	Compliant
15.247(e)	RSS-247 § 5.2	Peak Power Spectral Density	2412 to 2462	Compliant
The testing was performed according to the procedures in ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, KDB 558074 and 47 CFR Part 15. Where applicable, KDB 662911 was followed to sum required measurements.				

3.4 Results

In the configuration tested, the EUT complied with the requirements of the specification.

3.5 Test Location

Testing was performed at the Unified Compliance Laboratory 3-Meter and 10-Meter chambers located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2027. This site has also been registered with Innovations, Science and Economic Development (ISED) department and was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2027.

Unified Compliance Laboratory has been assigned Registration Number 376708 by the FCC, MRA Designation Number US5037 and Conformity Assessment Number US0223 by ISED.

4 Test Equipment

4.1 Conducted Emissions at Mains Ports

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	AFJ	FFT3010	UCL-2500	11/18/2025	11/18/2026
LISN	AFJ	LS16C/10	UCL-2512	8/12/2025	8/12/2026
ISN	Teseq	ISN T800	UCL-2971	3/4/2026	3/4/2027
AC Power Source	Laplace Instruments	AC1000A	UCL-2857	N/A	N/A
Test Software	AFJ	AFJ FFT3010	UCL-3107	N/A	N/A

Table 1: List of equipment used for Conducted Emissions Testing at Mains Port

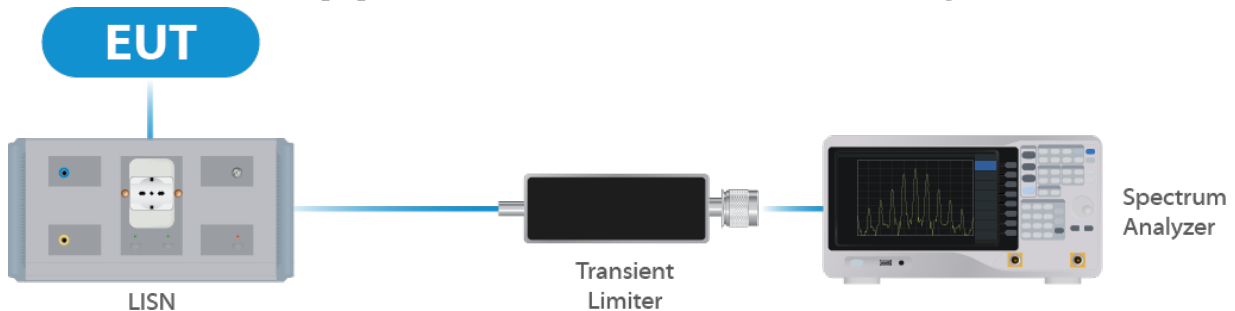


Figure 1: Conducted Emissions Test

4.2 Direct Connect at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	R&S	FSV40	UCL-2861	3/18/2026	3/18/2027
Signal Generator	R&S	SMB100A	UCL-2864	N/A	N/A
Vector Signal Generator	R&S	SMBV100A	UCL-2873	N/A	N/A
Switch Extension	R&S	OSP-B157WX	UCL-2867	4/7/2026	4/7/2027
Switch Extension	R&S	OSP-150W	UCL-2870	4/6/2026	4/6/2027
Test Software	R&S	EMC32	UCL-9442	--	--

Table 2: List of equipment used for Direct Connect at the Antenna Port

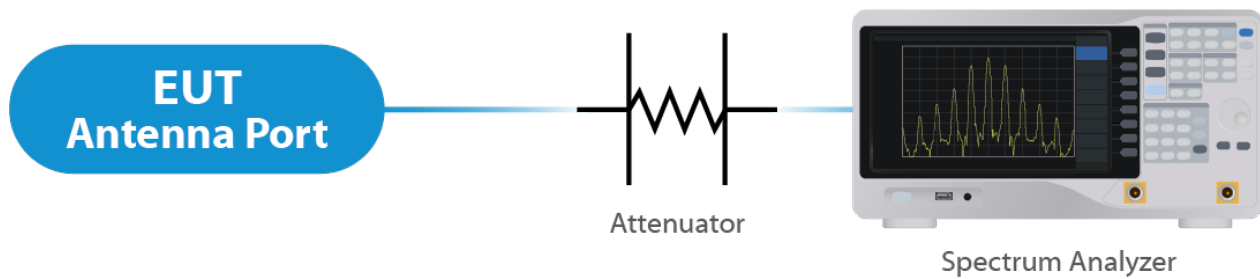


Figure 2: Direct Connect at the Antenna Port Test

4.3 Radiated Emissions

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	Keysight	N9038A	UCL-2778	12/18/2025	12/18/2026
Pre-Amplifier 9 kHz – 1 GHz	Sonoma Instruments	310N	UCL-2889	7/22/2025	7/22/2026
Tri Log Antenna	Scwarzbeck	VULB 9163	UCL-3062	12/16/2025	12/16/2027
Double Ridge Horn Antenna	Scwarzbeck	BBHA 9120D	UCL-3065	4/2/2025	4/2/2027
Log Periodic	Scwarzbeck	STLP 9129	UCL-3068	2/11/2025	2/4/2027
15 - 40 GHz Horn Antenna	Scwarzbeck	BBHA 9170	UCL-2487	4/7/2025	4/7/2027
1 – 18 GHz Amplifier	Com-Power	PAM 118A	UCL-3833	7/22/2025	7/22/2026
Test Software	Nexio	BatEMC	UCL-5253 & UCL-5249	N/A	N/A

Table 3: List of equipment used for Radiated Emissions

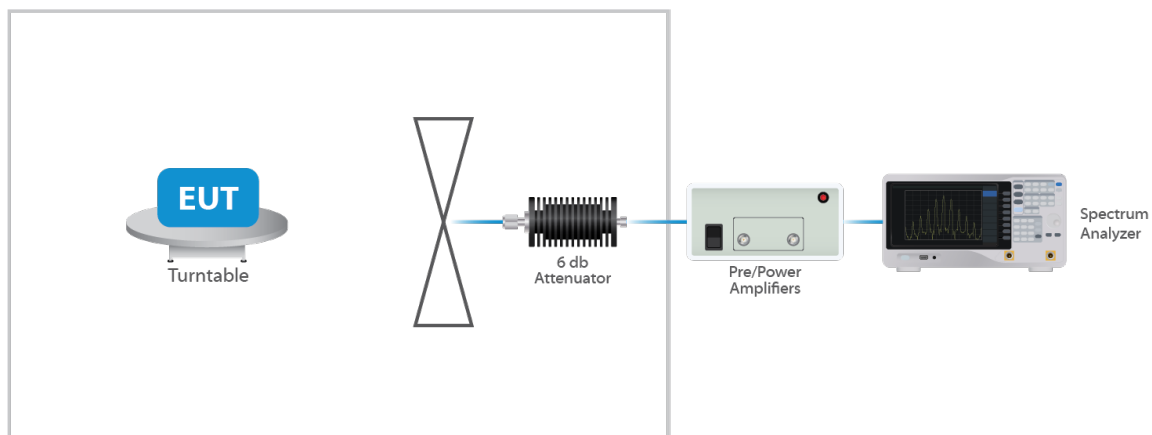


Figure 3: Radiated Emissions Test

4.4 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or Unified Compliance Laboratory personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to traceability is on file and is available for examination upon request.

4.5 Measurement Uncertainty

Test	Uncertainty ($\pm$ dB)	Confidence (%)
Conducted Emissions	1.44	95
Radiated Emissions (9 kHz to 30 MHz)	2.50	95
Radiated Emissions (30 MHz to 1 GHz)	4.38	95
Radiated Emissions (1 GHz to 18 GHz)	4.37	95
Radiated Emissions (18 GHz to 40 GHz)	3.93	95
Direct Connect Tests	K Factor	Value
Emissions Bandwidth	2	2.0%
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band Edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

5 Test Results

5.1 §15.203 Antenna Requirements

The EUT uses an integral internal antenna. As per the manufacturer, the maximum gain of the antenna is 4 dBi. The antenna is not user replaceable.


This is an 802.11 device and utilizes CDD as described in KDB 662911 D01.

See Section 2.2 for directional gain calculation.

Results


The EUT complied with the specification

5.2 §15.207 Conducted Emissions at Mains Ports Data

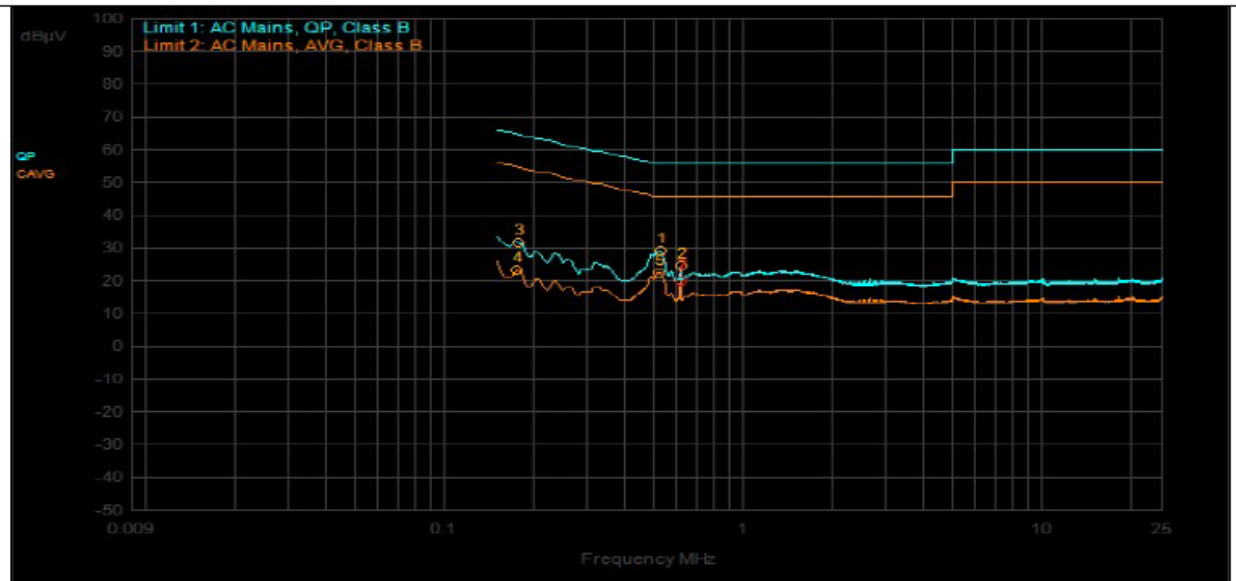

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit 1	Limit 1 Dist.	Limit 2	Limit 2 Dist.	P/F
MU	MHz	dB	dB	dB	Type	dBµV	dBµV	dBµV	dB	dBµV	dB	P/F
1	525,000kHz	9.52	0.00		QPeak	19.47	28.99	56.00	-27.01			
2	615,000kHz	9.50	0.00		QPeak	15.04	24.54	56.00	-31.46			
3	177,000kHz	9.51	0.00		QPeak	22.06	31.57	64.63	-33.05			
4	174,000kHz	9.51	0.00		C_AVG	13.81	23.32			54.77	-31.45	
5	522,000kHz	9.52	0.00		C_AVG	13.04	22.56			46.00	-23.44	
7	615,000kHz	9.50	0.00		C_AVG	10.33	19.83			46.00	-26.17	

Graph 1: Conducted Emissions Plot - Neutral

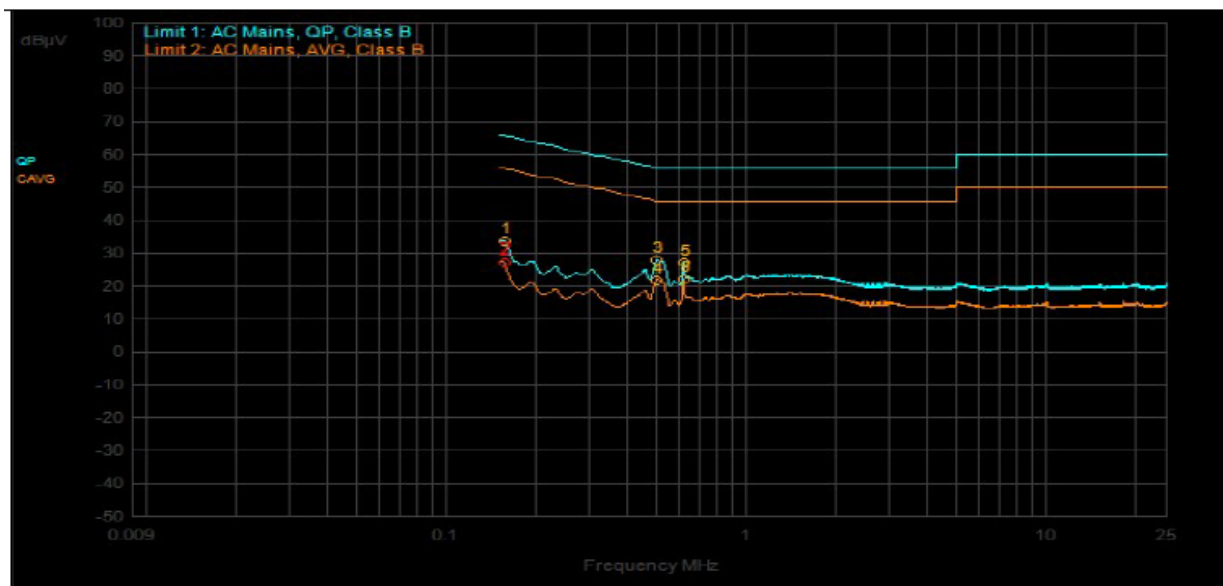

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit 1	Limit 1 Dist.	Limit 2	Limit 2 Dist.	P/F
MU	MHz	dB	dB	dB	Type	dBμV	dBμV	dBμV	dB	dBμV	dB	P/F
3	501,000kHz	9.59	0.00		QPeak	18.30	27.89	56.00	-28.11			
5	615,000kHz	9.61	0.00		QPeak	17.30	26.91	56.00	-29.09			
1	156,000kHz	9.52	0.00		QPeak	24.17	33.69	65.67	-31.99			
2	156,000kHz	9.52	0.00		C_AVG	17.49	27.01			55.67	-28.66	
4	498,000kHz	9.59	0.00		C_AVG	12.22	21.81			46.03	-24.23	
8	615,000kHz	9.61	0.00		C_AVG	12.55	22.16			46.00	-23.84	

Graph 2: Conducted Emissions Plot – Line 1

Result

The EUT complied with the specification limit.

5.3 §15.247(a)(2) Emissions Bandwidth

All chains were measured under the guidance of KDB 558074 Section 8.2. and KDB 662911 D01. Please see associated annex for details on instrument settings.

Mode	Frequency (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth (MHz)
b	2412	13.0	8.2
	2437	33.0	11.2
	2462	13.3	8.2
g	2412	17.0	16.4
	2437	24.3	16.5
	2462	17.0	16.6
n 20	2412	18.0	17.9
	2437	23.5	17.9
	2462	18.5	17.9
n 40	2422	37.0	36.5
	2437	37.0	36.4
	2452	36.5	36.4

Result

All chains were tested and the highest bandwidth per chain is reported above.

In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plot within the Annex).

5.4 §15.247(b)(3) Maximum Average Output Power

All chains were measured and summed under the guidance of KDB 558074 Section 8.3.2.3. and KDB 662911 D01. Please see associated annex for details on instrument settings.

See Section 2.2 for directional gain calculation.

The maximum average RF conducted output power measured for this device was 24.25 dBm or 266.07 mW. The limit is 30 dBm or 1 Watt when using antennas with 6 dBi or less gain. The antenna has a gain of 4 dBi.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Total Summed Output Power * (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dBm)
b 20	2412	Mcs0_Nss2	39	21.16	4	25.16	36	-10.84
	2417	Mcs0_Nss2	40	21.38	4	25.38	36	-10.62
	2422	Mcs0_Nss2	41	21.79	4	25.79	36	-10.21
	2427	Mcs0_Nss2	42	22.30	4	26.30	36	-9.70
	2432	Mcs0_Nss2	42	22.50	4	26.50	36	-9.50
	2437	Mcs0_Nss2	42	24.25	4	28.25	36	-7.75
	2442	Mcs0_Nss2	42	22.72	4	26.72	36	-9.28
	2447	Mcs0_Nss2	41	22.34	4	26.34	36	-9.66
	2452	Mcs0_Nss2	41	22.38	4	26.38	36	-9.62
	2457	Mcs0_Nss2	40	21.89	4	25.89	36	-10.11
	2462	Mcs0_Nss2	38	21.00	4	25.00	36	-11.00
g 20	2412	Mcs0_Nss2	30	17.76	4	21.76	36	-14.24
	2417	Mcs0_Nss2	32	18.63	4	22.63	36	-13.37
	2422	Mcs0_Nss2	34	19.50	4	23.50	36	-12.50
	2427	Mcs0_Nss2	38	21.13	4	25.13	36	-10.87
	2432	Mcs0_Nss2	40	21.91	4	25.91	36	-10.09
	2437	Mcs0_Nss2	40	21.96	4	25.96	36	-10.04
	2442	Mcs0_Nss2	40	22.05	4	26.05	36	-9.95
	2447	Mcs0_Nss2	40	22.06	4	26.06	36	-9.94
	2452	Mcs0_Nss2	37	21.08	4	25.08	36	-10.92
	2457	Mcs0_Nss2	33	19.44	4	23.44	36	-12.56
	2462	Mcs0_Nss2	29	17.38	4	21.38	36	-14.62
n 20	2412	Mcs0_Nss2	28	16.64	4	20.64	36	-15.36

	2417	Mcs0_Nss2	35	19.89	4	23.89	36	-12.11
	2422	Mcs0_Nss2	35	19.92	4	23.92	36	-12.08
	2427	Mcs0_Nss2	35	20.02	4	24.02	36	-11.98
	2432	Mcs0_Nss2	38	21.21	4	25.21	36	-10.79
	2437	Mcs0_Nss2	40	21.91	4	25.91	36	-10.09
	2442	Mcs0_Nss2	40	22.05	4	26.05	36	-9.95
	2447	Mcs0_Nss2	37	21.13	4	25.13	36	-10.87
	2452	Mcs0_Nss2	37	21.11	4	25.11	36	-10.89
	2457	Mcs0_Nss2	34	19.86	4	23.86	36	-12.14
	2462	Mcs0_Nss2	27	16.39	4	20.39	36	-15.61
n 40	2422	Mcs0_Nss2	29	16.53	4	20.53	36	-15.47
	2437	Mcs0_Nss2	32	18.29	4	22.29	36	-13.71
	2452	Mcs0_Nss2	28	16.21	4	20.21	36	-15.79

Result

In the configuration tested, the maximum average RF output power was less than 1 watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plot within the Annex).

* Gated EIRP shown in the Annex is the conducted measurement

5.5 §15.247(d) Spurious Emissions

5.5.1 Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The table show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency and upper frequency. Shown below are plot(s) with the EUT tuned to the upper and lower channels. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be attenuated 30 dB below the highest power spectral density level measured within the authorized band as measured with a 100 kHz RBW.

Result

Conducted spurious emissions were attenuated 30 dB or more below the fundamental; therefore, the EUT complies with the specification.


5.5.2 Radiated Spurious Emissions in the Restricted Bands of §15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emissions was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emissions that fell into the restricted bands of §15.205. The tables show the worst-case emissions measured from the EUT. For frequencies above 18.0 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limits. The emissions in the restricted bans must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units. Plots of the band edges are also shown.

Correction Factor = Antenna Factor (dBi) + Cable Loss (dB) - Pre-Amplifier Gain (dB), and is added to the Receiver reading.

Result


All emissions in the restricted bands of §15.205 met the limits specified in §15.209; therefore, the EUT complies with the specification.

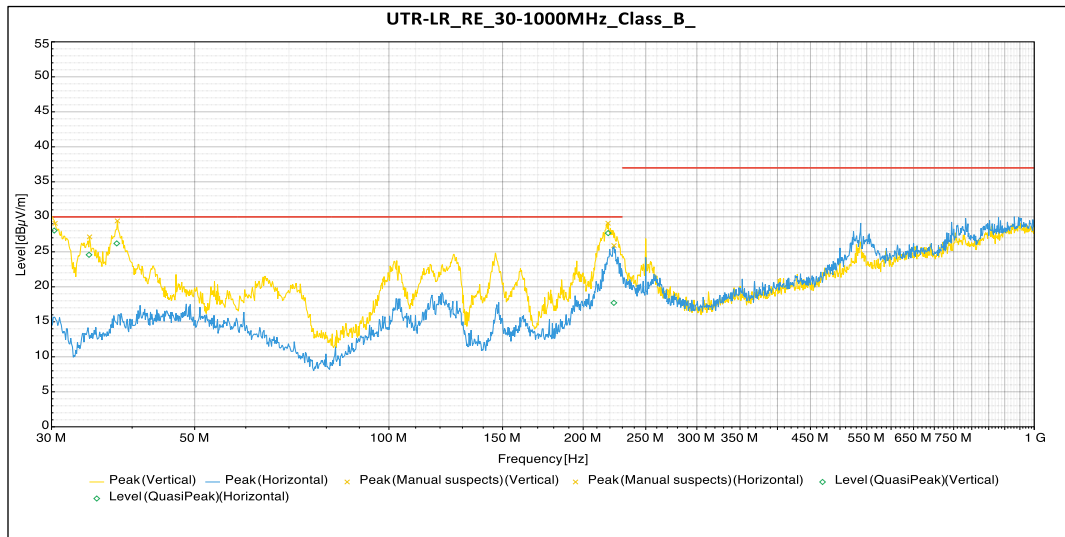

QuasiPeak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
30.29 MHz	28.04	30.0	-1.96	115	1.05	Vertical	-17.22
34.30 MHz	24.57	30.0	-5.43	185	1.48	Vertical	-16.13
37.87 MHz	26.20	30.00	-3.80	218	1.02	Vertical	-14.13
218.64 MHz	27.67	30.0	-2.33	167	1.13	Vertical	-14.10
223.14 MHz	17.71	30.0	-12.29	290	2.97	Horizontal	-13.78

Table 4: Radiated Emissions 30 – 1000 MHz

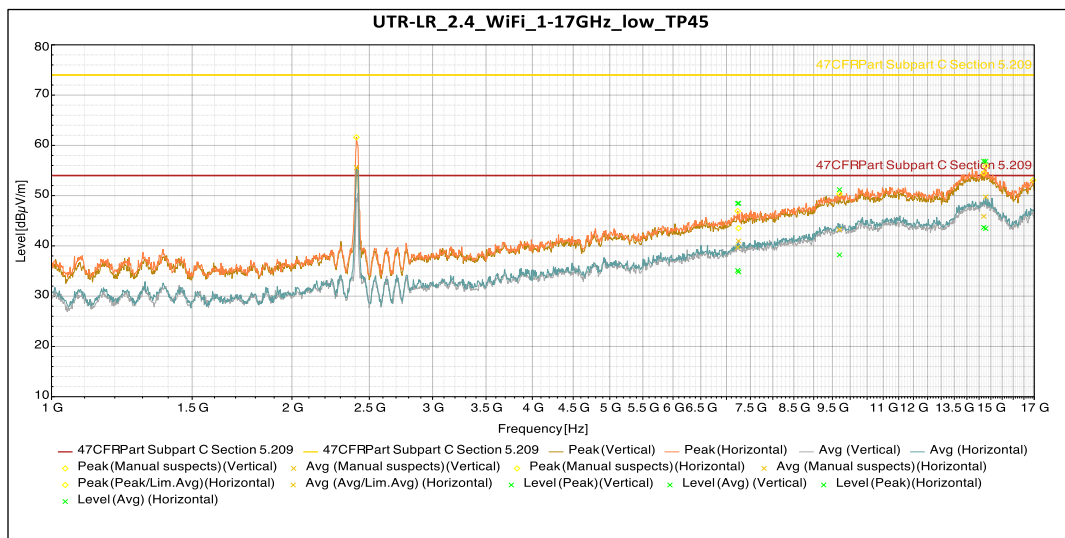


Peak

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
7.25 GHz	48.49	74.0	-25.51	118	3.307	Vertical	-0.37
9.70 GHz	51.19	74.0	-22.81	102	3.307	Vertical	5.86
14.70 GHz	56.87	74.0	-17.13	244	3.798	Vertical	11.93
7.23 GHz	48.44	74.0	-25.56	77	3.307	Horizontal	-0.44
14.78 GHz	56.83	74.0	-17.17	198	3.802	Horizontal	11.86

Avg

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
7.25 GHz	34.81	54.0	-19.19	118	3.307	Vertical	-0.37
9.70 GHz	38.22	54.0	-15.78	102	3.307	Vertical	5.86
14.70 GHz	43.67	54.0	-10.33	244	3.798	Vertical	11.93
7.23 GHz	35.12	54.0	-18.88	77	3.307	Horizontal	-0.44
14.78 GHz	43.45	54.0	-10.55	198	3.802	Horizontal	11.86

Table 5: Radiated Emissions 1 – 17 GHz at the Lowest Frequency

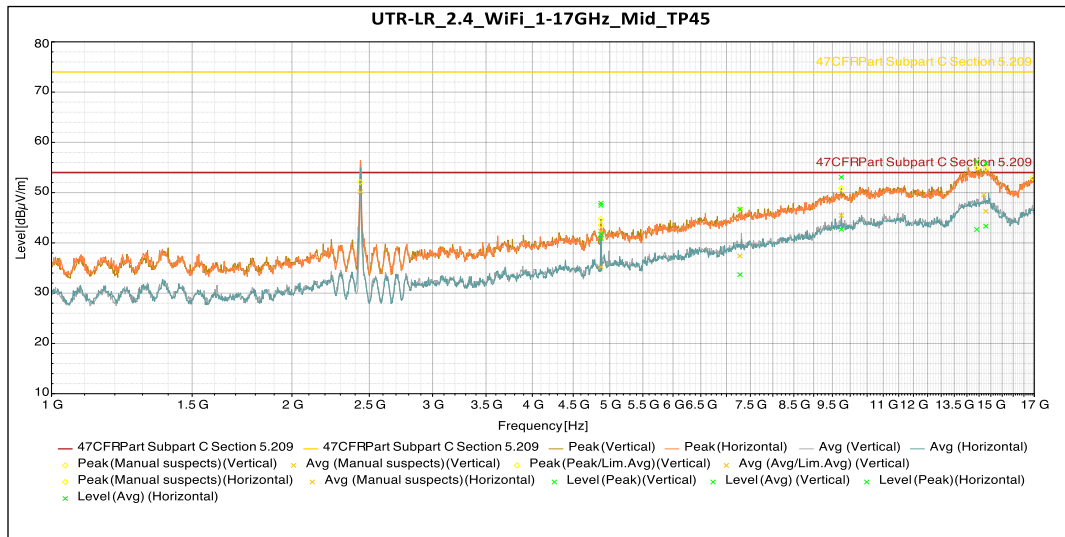


Peak

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
4.87 GHz	47.46	74.0	-25.54	162	3.798	Vertical	-7.50
9.75 GHz	53.07	74.0	-20.93	203	3.307	Vertical	5.95
14.41 GHz	56.06	74.0	-17.94	310	3.307	Vertical	11.18
4.87 GHz	47.90	74.0	-26.10	229	3.802	Horizontal	-7.50
7.28 GHz	46.70	74.0	-27.30	240	3.307	Horizontal	-0.34
14.78 GHz	55.82	74.0	-18.18	290	3.802	Horizontal	11.81

Avg

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
4.87 GHz	41.73	54.0	-12.27	162	3.798	Vertical	-7.50
9.75 GHz	42.69	54.0	-11.31	203	3.307	Vertical	5.95
14.41 GHz	42.67	54.0	-11.33	310	3.307	Vertical	11.18
4.87 GHz	40.90	54.0	-13.10	229	3.802	Horizontal	-7.50
7.28 GHz	33.68	54.0	-20.32	240	3.307	Horizontal	-0.34
14.78 GHz	43.33	54.0	-10.67	290	3.802	Horizontal	11.81

Table 6: Radiated Emissions 1 – 17 GHz at the Middle Frequency

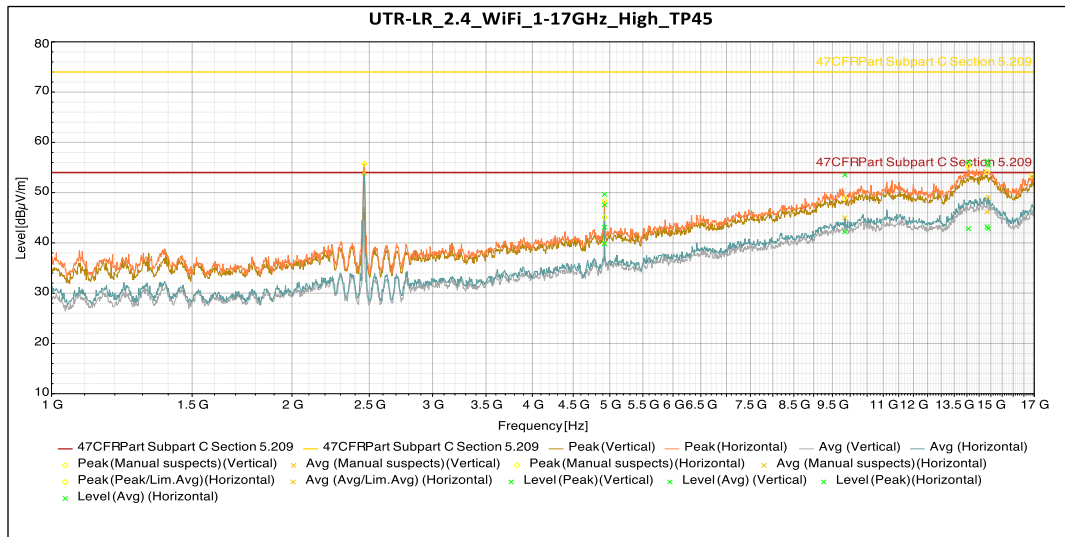


Peak

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
4.92 GHz	47.55	74.0	-26.45	86	3.802	Vertical	-7.42
14.84 GHz	56.31	74.0	-17.69	285	3.802	Vertical	11.80
4.92 GHz	49.63	74.0	-24.37	225	3.802	Horizontal	-7.42
9.85 GHz	53.55	74.0	-20.45	313	3.802	Horizontal	5.70
14.06 GHz	56.07	74.0	-17.93	206	3.802	Horizontal	10.93
14.89 GHz	55.47	74.0	-18.53	319	3.802	Horizontal	11.66

Avg

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
4.92 GHz	39.86	54.0	-14.14	86	3.802	Vertical	-7.42
14.84 GHz	43.21	54.0	-10.79	285	3.802	Vertical	11.80
4.92 GHz	43.10	54.0	-10.90	225	3.802	Horizontal	-7.42
9.85 GHz	42.19	54.0	-11.81	313	3.802	Horizontal	5.70
14.06 GHz	42.83	54.0	-11.17	206	3.802	Horizontal	10.93
14.89 GHz	42.85	54.0	-11.15	319	3.802	Horizontal	11.66

Table 7: Radiated Emissions 1 – 17 GHz at the Highest Frequency

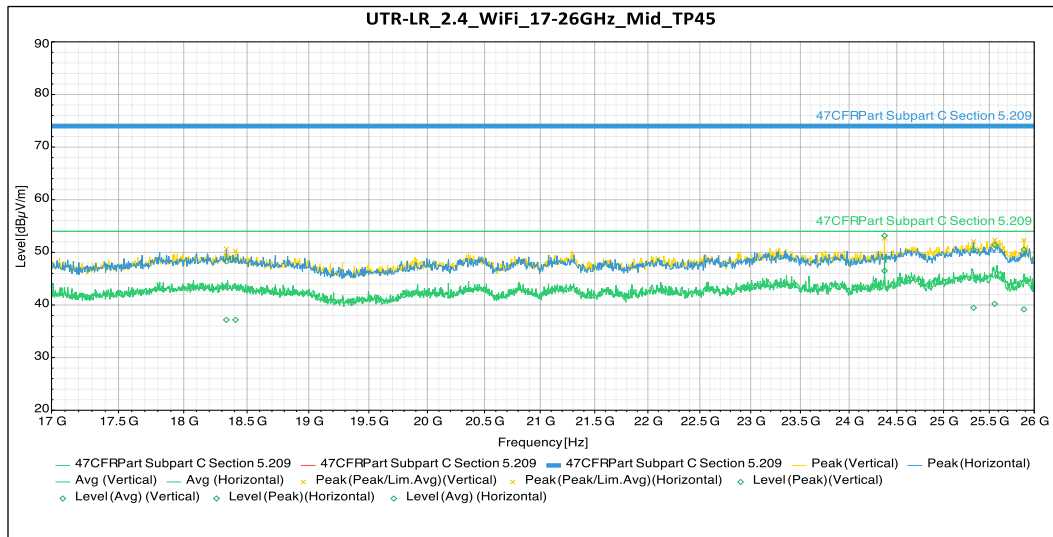

Peak


Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
18.41 GHz	48.50	74.0	-25.50	59	Vertical	-0.75
24.37 GHz	53.18	74.0	-20.82	291	Vertical	0.74
25.56 GHz	51.43	74.0	-22.57	332	Vertical	2.87
25.88 GHz	50.52	74.0	-23.48	218	Vertical	2.09
18.34 GHz	48.30	74.0	-25.70	157	Horizontal	-0.57
25.33 GHz	50.51	74.0	-23.49	298	Horizontal	2.49

Avg

Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
18.41 GHz	37.18	54.0	-16.82	59	Vertical	-0.75
24.37 GHz	46.51	54.0	-7.49	291	Vertical	0.74
25.56 GHz	40.20	54.0	-13.80	332	Vertical	2.87
25.88 GHz	39.16	54.0	-14.84	218	Vertical	2.09
18.34 GHz	37.18	54.0	-16.82	157	Horizontal	-0.57
25.33 GHz	39.47	54.0	-14.53	298	Horizontal	2.49

Table 8: Radiated Emissions 17 – 26 GHz at the Middle Frequency (worse case)


5.5.3 Band Edge

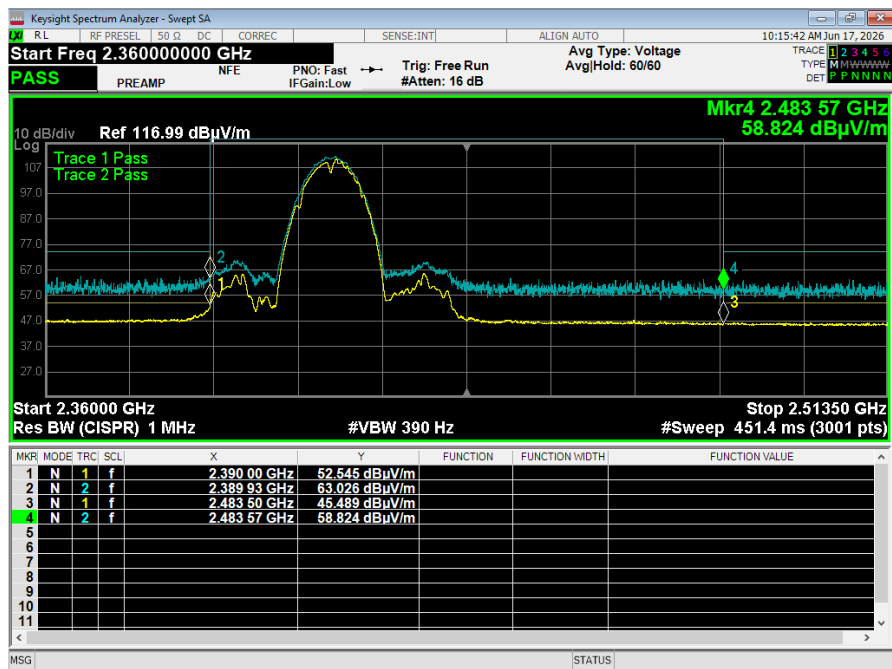


Graph 3: Lower Band Edge Plot – 2412 MHz – b Mode




Graph 4: Middle Band Edge Plot – 2437 MHz – b Mode

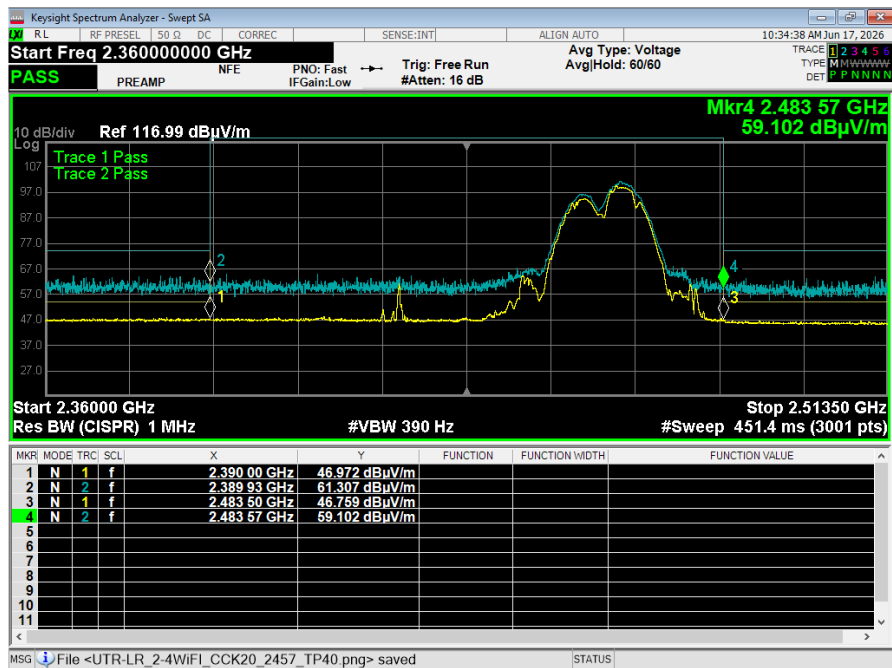


Graph 5: Upper Band Edge Plot – 2462 MHz – b Mode

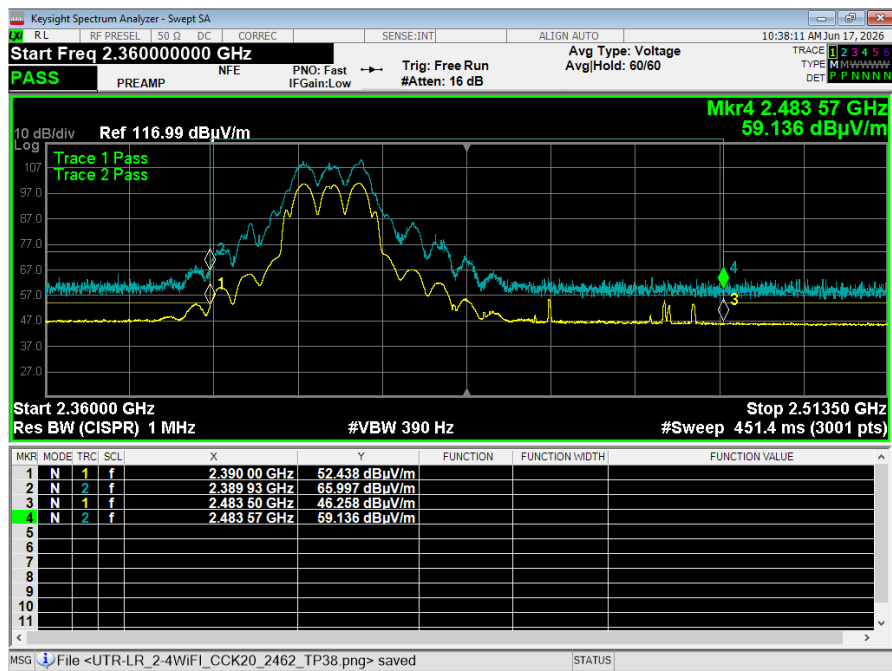


Graph 6: Lower Band Edge Plot – 2412 MHz – g Mode

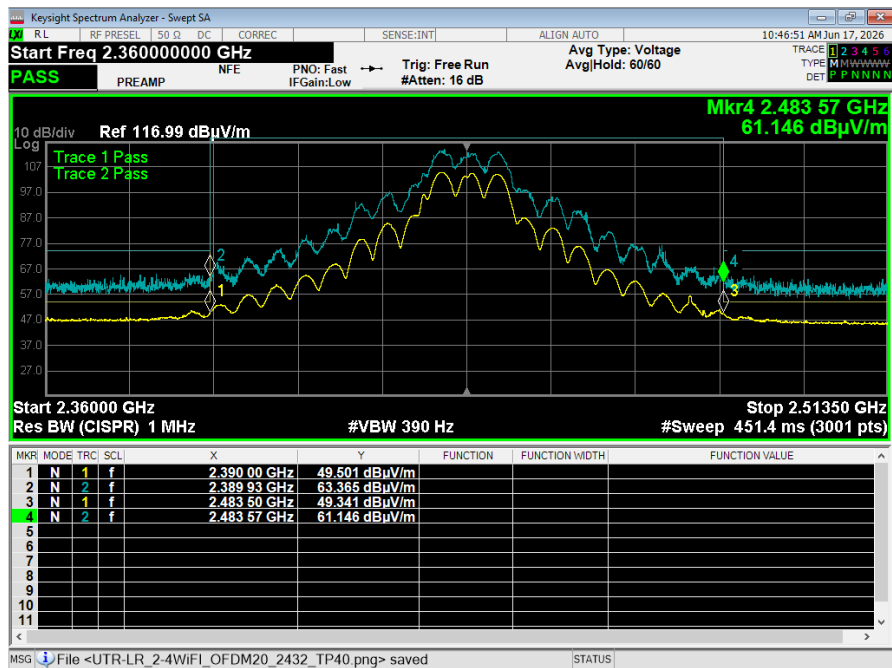


Graph 7: Middle Band Edge Plot – 2437 MHz – g Mode

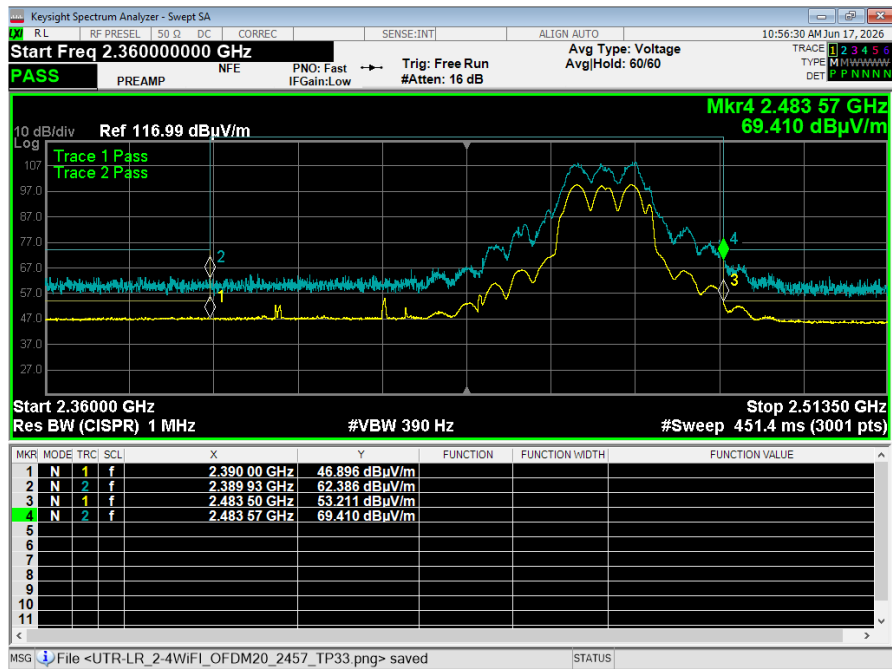


Graph 8: Upper Band Edge Plot – 2462 MHz – g Mode

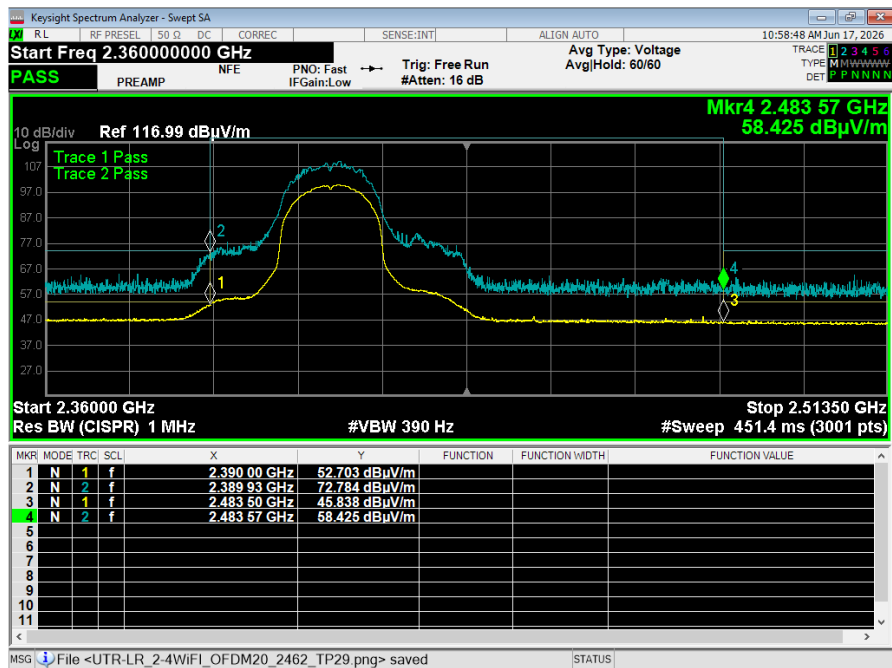


Graph 9: Lower Band Edge Plot – 2412 MHz – n20 Mode

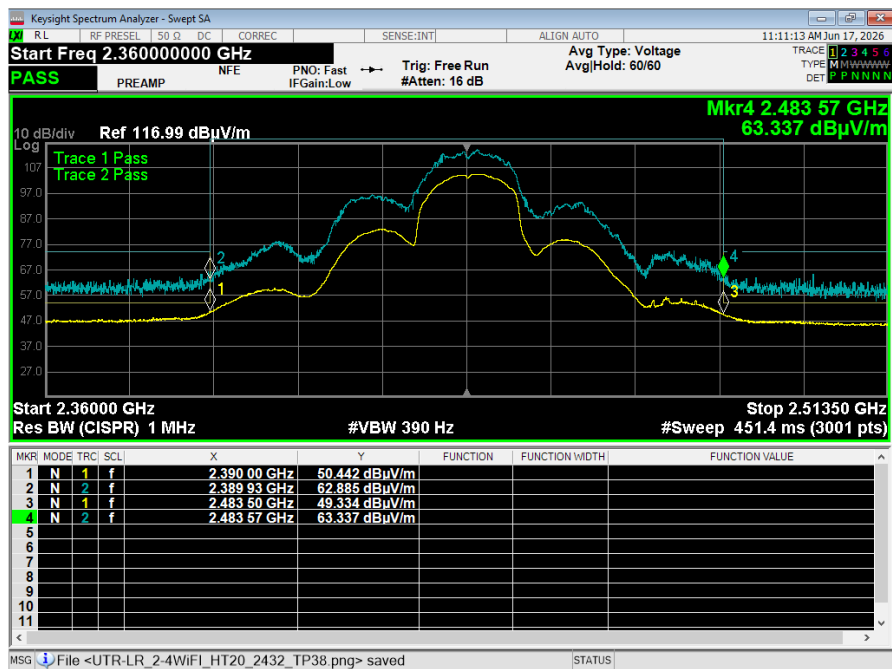

Graph 10: Middle Band Edge Plot – 2437 MHz – n20 Mode

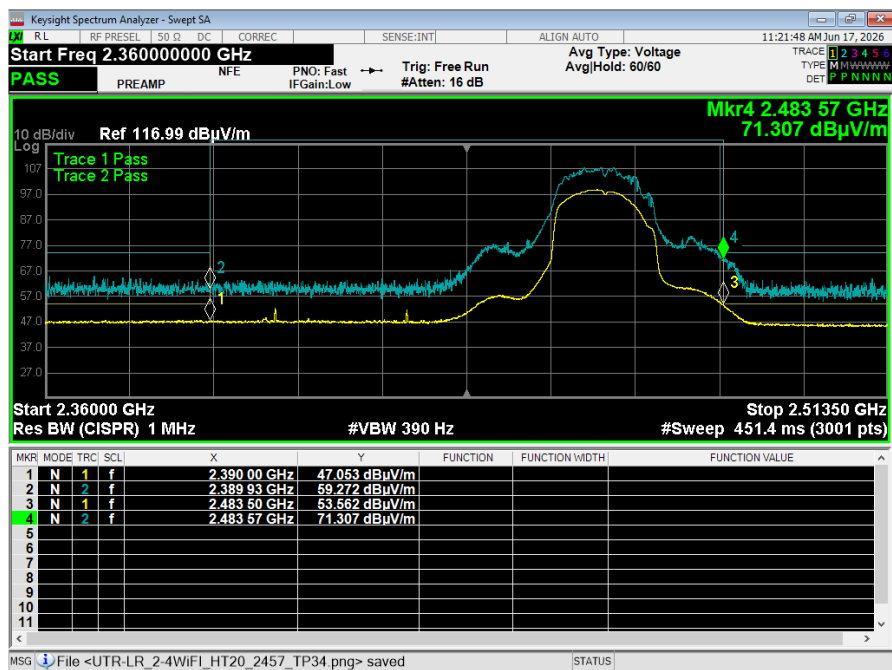


Graph 11: Upper Band Edge Plot – 2462 MHz – n20 Mode

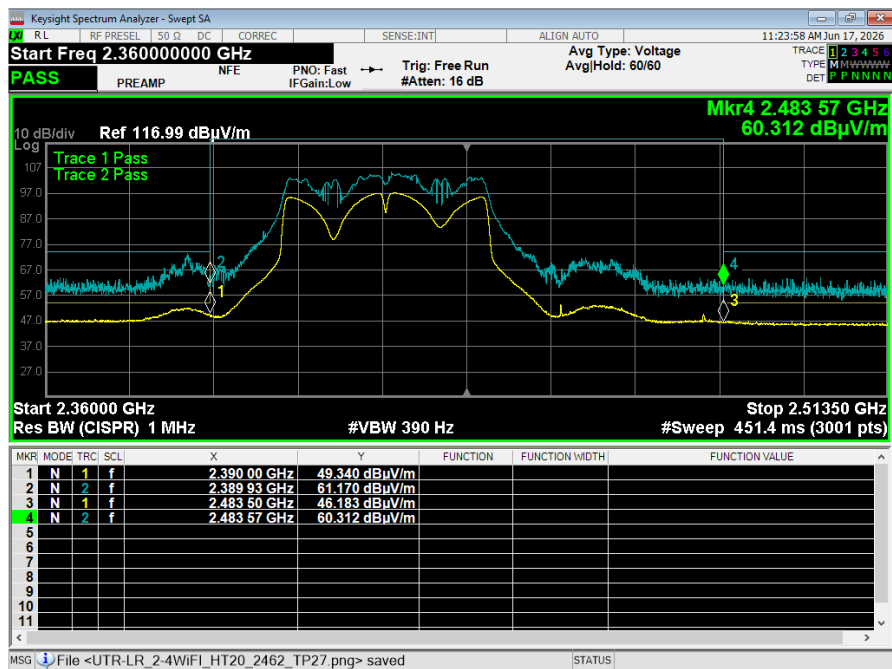

Graph 12: Lower Band Edge Plot – 2422 MHz – n40 Mode



Graph 13: Middle Band Edge Plot – 2437 MHz – n40 Mode

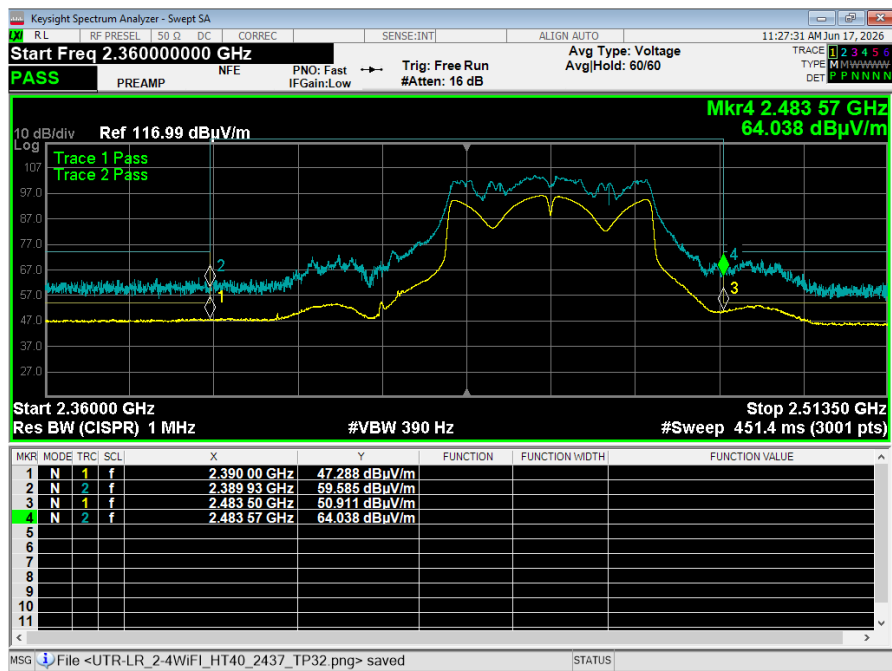

Graph 14: Upper Band Edge Plot – 2452 MHz – n40 Mode

5.6 §15.247(e) Maximum Average Power Spectral Density

All chains were measured and summed under the guidance of KDB 558074 Section 8.4. and KDB 662911 D01. Please see associated annex for details on instrument settings.

The maximum average power spectral density conducted from the intentional radiator of the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

See Section 2.2 for directional gain calculation.

Mode	Frequency (MHz)	Data Rate	TP Setting	Total Sum PSD EIRP (dBm)	Antenna Gain (dBi)	Limit (dBm)	Margin (dBm)
b	2412	Msc0_Nss2	39	-7.90	4	8.0	-15.9
	2437	Msc0_Nss2	42	-6.07	4	8.0	-14.07
	2462	Msc0_Nss2	38	-7.83	4	8.0	-15.83
g	2412	Msc0_Nss2	30	-16.09	4	8.0	-24.09
	2437	Msc0_Nss2	40	-11.49	4	8.0	-19.49
	2462	Msc0_Nss2	29	-16.48	4	8.0	-24.48
n 20	2412	Msc0_Nss2	28	-17.29	4	8.0	-25.29
	2437	Msc0_Nss2	40	-11.25	4	8.0	-19.25
	2462	Msc0_Nss2	27	-17.43	4	8.0	-25.43
n 40	2422	Msc0_Nss2	29	-18.15	4	8.0	-26.15
	2437	Msc0_Nss2	32	-17.85	4	8.0	-25.85
	2452	Msc0_Nss2	28	-20.33	4	8.0	-28.33

Result

The maximum average power spectral density was less than the limit of 8 dBm (adjusted limit of 6.99 for Nss=1); therefore, the EUT complies with the specification.

-- End of Test Report --