



Radio Test Report

Report No.: STS2601122W01

Issued for

Bartec USA LLC.

6475 19 1/2 Mile Road, Sterling Heights, MI 48314, United States

Product Name: Rite Sensor HD

Brand Name: N/A

Model Name: RS-4000

Series Model(s): N/A

FCC ID: SX8RS4000

Test Standards: FCC Part 15.231

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: Bartec USA LLC.
Address: 6475 19 1/2 Mile Road, Sterling Heights, MI 48314, United States
Manufacturer's Name: HAMATON AUTOMOTIVE TECHNOLOGY CO., LTD
Address: No.122, Changda Road, Linping, Yuhang, Hangzhou, China

Product Description

Product Name: Rite Sensor HD
Brand Name: N/A
Model Name: RS-4000
Series Model(s): N/A

Standards: FCC Part 15.231

Test Procedure: ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test:

Date of Receipt of Test Item ...: 06 Jan. 2026

Date of performance of tests ...: 06 Jan. 2026 ~ 20 Jan. 2026

Date of Issue: 20 Jan. 2026

Test Result.....: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)



**TABLE OF CONTENTS****Page**

1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.5 EQUIPMENTS LIST	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 TEST RESULTS	13
4. RADIATED EMISSION MEASUREMENT	14
4.1 RADIATED EMISSION LIMITS	14
4.2 TEST PROCEDURE	16
4.3 DEVIATION FROM TEST STANDARD	16
4.4 TEST SETUP	17
4.5 EUT OPERATING CONDITIONS	18
4.6 TEST RESULTS	18
4.7 FIELD STRENGTH CALCULATION	19
4.8 TEST RESULTS (EMISSION)	19
5. BANDWIDTH TEST	28
5.1 LIMIT	28
5.2 TEST REQUIREMENTS	28
5.3 TEST PROCEDURE	28
5.4 TEST SETUP	28
5.5 EUT OPERATION CONDITIONS	28
5.6 TEST RESULTS	29
6. TRANSMITTER TIMEOUT	31
6.1 LIMIT	31
6.2 TEST PROCEDURE	31
6.3 TEST SETUP	31



TABLE OF CONTENTS	Page
6.4 TEST RESULTS	32
7. PERIODIC OPERATION	34
7.1 TEST PROCEDURE	34
7.2 TEST SETUP	34
7.3 EUT OPERATION CONDITIONS	34
7.4 TEST RESULTS	35
8. ANTENNA REQUIREMENT	37
8.1 STANDARD REQUIREMENT	37
8.2 EUT ANTENNA	37
APPENDIX 1-PHOTOS OF TEST SETUP	38

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	20 Jan. 2026	STS2601122W01	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.231, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.205(a)/15.209/ 15.231(e)	Radiated Spurious Emission	PASS	--
15.231(e)	Transmission requirement	PASS	--
15.231(C)	20 dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

Note: (1) "N/A" denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2020.

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

IC CAB ID: CN0086



1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Rite Sensor HD	
Trade Name	N/A	
Model Name	RS-4000	
Series Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Rite Sensor HD	
	Operation Frequency:	433.92MHz
	Modulation Type:	ASK / FSK
	Antenna Designation:	Internal Antenna
	Antenna Gain(Peak)	1.2dBi
More details of EUT technical specification, please refer to the User Manual.		
Channel List	Please refer to the Note 3.	
Power Rating	Input: DC 3V	
Adapter	N/A	
Battery	Rated Voltage: 3 V	
Hardware version number	N/A	
Software version number/FVIN	N/A	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

2. Table for filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	RS-4000	Internal	N/A	1.2	Antenna

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode(433.92MHz, ASK)
Mode 2	TX Mode(433.92MHz, FSK)

	For Radiated Emission
Final Test Mode	Description
Mode 1	TX Mode(433.92MHz, ASK)
Mode 2	TX Mode(433.92MHz, FSK)

Note:

(1)The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

EUT



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
N/A	N/A	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
High-Pass Filter	HX MICROWAVE	HXLBQ-GTA14	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2025.09.27	2027.09.26
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	EM	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2025.09.22	2026.09.21
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
Signal Analyzer	Agilent	N9020A	MY51510623	2025.02.22	2026.02.21
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

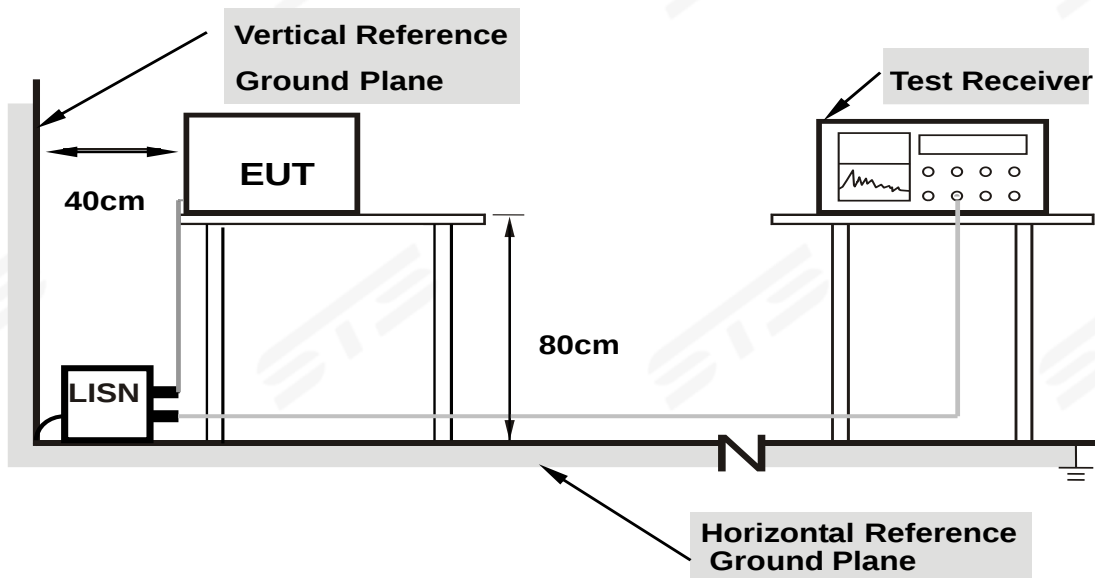

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.4 TEST RESULTS

Temperature:	N/A	Relative Humidity:	N/A
Test Voltage:	N/A	Phase :	L/N
Test Mode:	N/A		

Note: EUT is only power by battery, So it is not applicable for this test.



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on Part 15.205(a), then the Part 15.209(a), Part 15.231(e) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100**	3
88~216	150**	3
216~960	200**	3
Above 960	500	3

Fundamental Frequency (MHz)	Field Strength of fundamental (microvolts/meter)	Field Strength of Unwanted Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 1,50 **
174 - 260	1,500	1,50
260 - 470	1,500 to 5,000 **	1,50 to 5,00 **
Above 470	5,000	5,00

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Note:** linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental

field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $22.72727(F) - 2454.545$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $16.6667(F) - 2833.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in 93 Section 15.209, whichever limit permits a higher field strength.



LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 3MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



4.2 TEST PROCEDURE


- a. The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.
During test, the table was rotated 360 degrees to determine the position of the highest radiation.
- b. In the frequency range of 9KHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 3m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- c. In the frequency range 30MHz-1GHz, Bi-Log Test Antenna used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.
- d. In the frequency above 1GHz, place the measurement antenna 3m away from the EUT for each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- f. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- h. For the actual test configuration, please refer to the related Item –EUT Test Photos.
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.3 DEVIATION FROM TEST STANDARD


No deviation

4.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

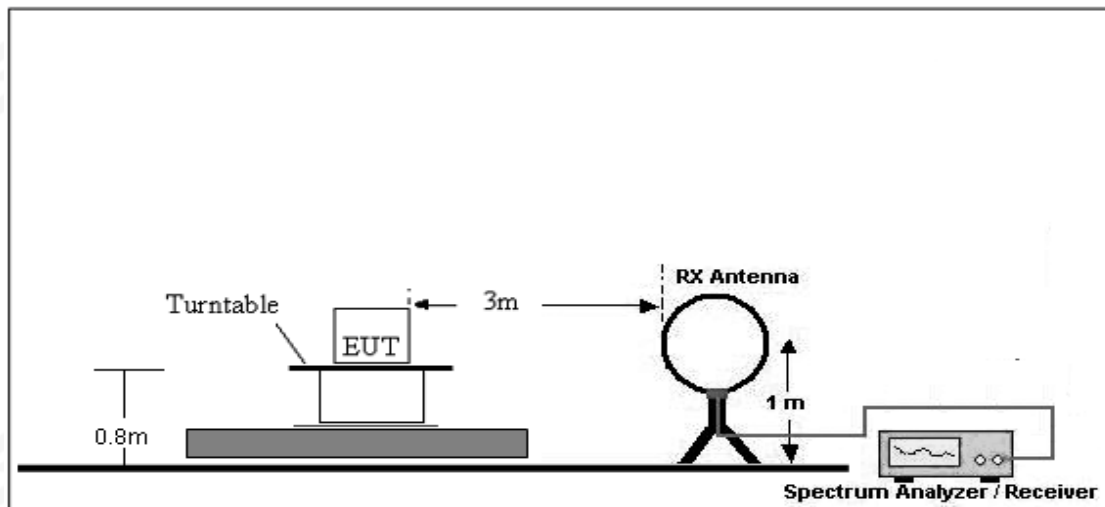

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

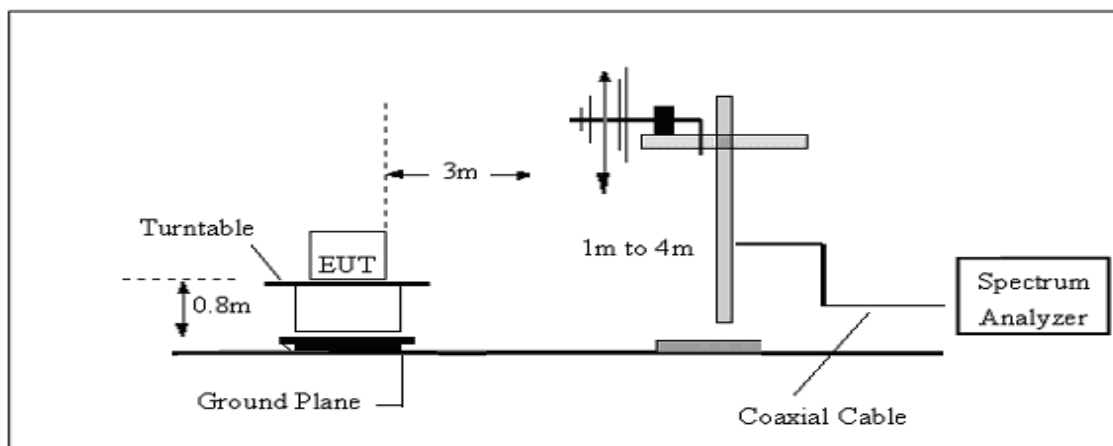

(C) Radiated Emission Test-Up Frequency Above 1GHz

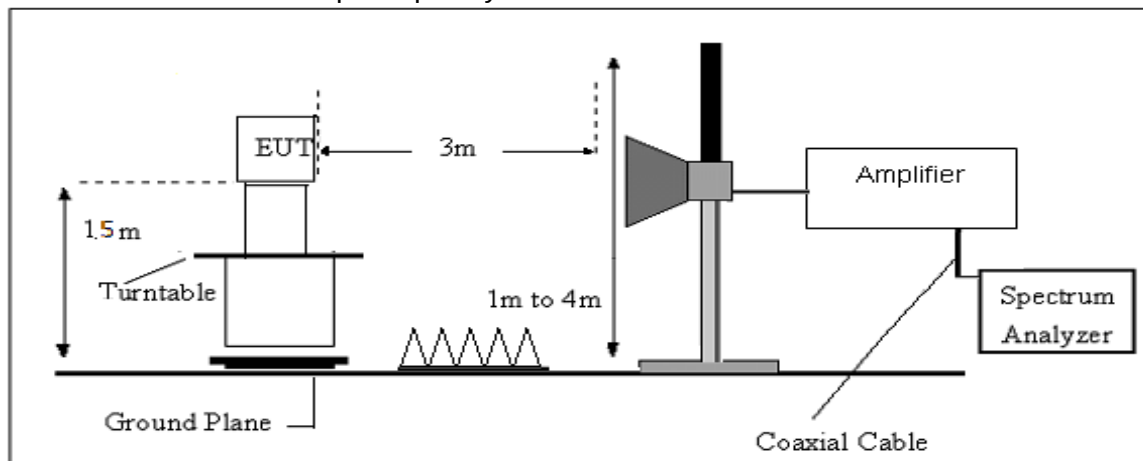

4.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS


INTRODUCTION TO PDCF

Reference: (§15.35 Measurement detector functions and bandwidths.)

- a. Part 15 of the FCC Rules provides for the operation of low power communication devices without an individual license (e.g., intrusion detectors, pulsed water tank level gauges, etc.), subject to certain requirements. Some of these devices use extremely narrow pulses to generate wideband emissions, which are measured to determine compliance with the rules. These measurements are typically performed with a receiver or spectrum analyzer. Depending on a number of factors (e.g., resolution bandwidth, pulsewidth, etc.), the spectrum analyzer may not always display the true peak value of the measured emission. This effect, called “pulse desensitization,” relates to the capabilities of the measuring instrument. For the measurement and reporting of the true peak of pulsed emissions, it may be necessary to apply a “pulse desensitization correction factor” (PDCF) to the measured value, pursuant to 47 CFR 15.35(a).

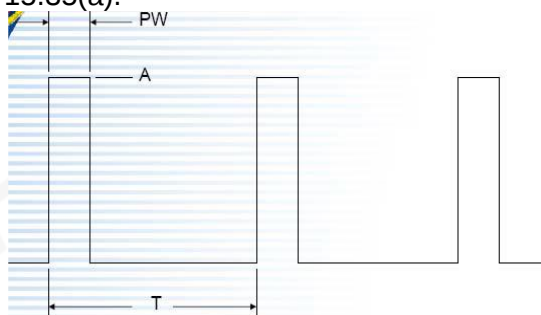

Periodic Square Pulse

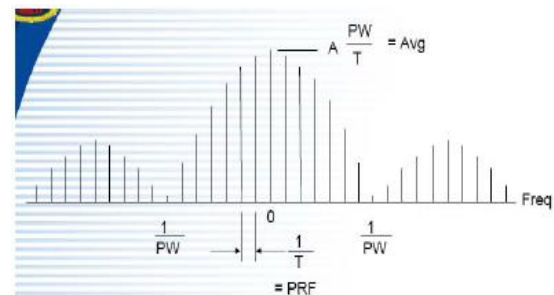

Frequency Spectrum of Periodic Square Pulse

If using spectrum analyzer to measure pulse signal, it have to make sure the RBW use is at least $2/PW$.

•When RBW is less than $2/PW$, you are able to measure the true peak level of the pulse signal. If this is the case, PDCF is required to compensate to determine true peak value.

Pulse desensitization:

315MHz, ASK

PW =28800usec,Period=100000usec, Level=A

RBW>2/PW=0.069K , PRF=1/T=0.01K ,

315MHz, FSK

PW =29600usec,Period=100000usec, Level=A

RBW>2/PW=0.068K , PRF=1/T=0.01K ,

433.92MHz, ASK

PW =16730usec,Period=100000usec, Level=A

RBW>2/PW=0.1K , PRF=1/T=0.01K ,

433.92MHz, FSK

PW =17600usec,Period=100000usec, Level=A

RBW>2/PW=0.1K , PRF=1/T=0.01K

Note: $2 / PW < RBW$, first don't need

- b. For the actual test, please refer to the ANSI C63.10,Annex C refer to section 7 for more detail



4.7 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

4.8 TEST RESULTS (EMISSION)

(Radiated Emission < 30MHz (9KHz-30MHz, H-field))

Temperature:	23.4 °C	Relative Humidity:	60%
Test Mode:	Mode 1/2	Polarization:	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance/test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



Between 30MHz – 1000 MHz

ASK

Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 3V	Phase:	Horizontal
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Results (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	30.9700	27.93	-13.35	14.58	40.00	-25.42	peak
2	393.7500	36.28	-11.42	24.86	46.00	-21.14	peak
4	733.2500	32.26	-2.35	29.91	46.00	-16.09	peak
5	831.2200	42.03	-0.70	41.33	46.00	-4.67	peak
6	920.4600	38.24	0.00	38.24	46.00	-7.76	peak


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
3	433.9200	86.17	-10.13	-	76.04	92.87	-16.83	peak
3	433.9200	86.17	-10.13	15.39	60.65	72.87	-12.22	AV

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain

80.0 dBUV/m

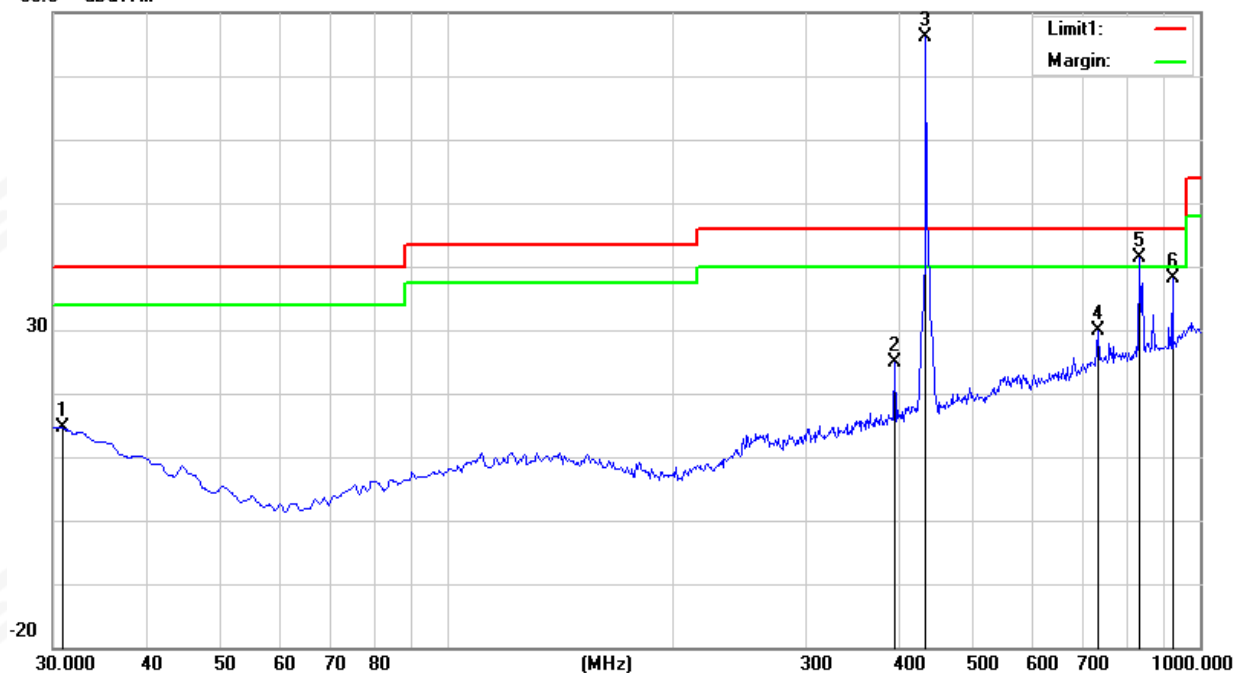



Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 3V	Phase:	Vertical
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.9700	28.53	-13.35	15.18	40.00	-24.82	peak
2	349.1300	30.53	-13.09	17.44	46.00	-28.56	peak
4	644.9800	30.76	-4.87	25.89	46.00	-20.11	peak
5	711.9100	38.11	-3.74	34.37	46.00	-11.63	peak
6	977.6900	28.78	2.52	31.30	54.00	-22.70	peak


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
3	433.9200	80.59	-10.13	-	70.46	92.87	-22.41	peak
3	433.9200	80.59	-10.13	15.39	55.07	72.87	-17.8	AV

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

80.0 dBuV/m

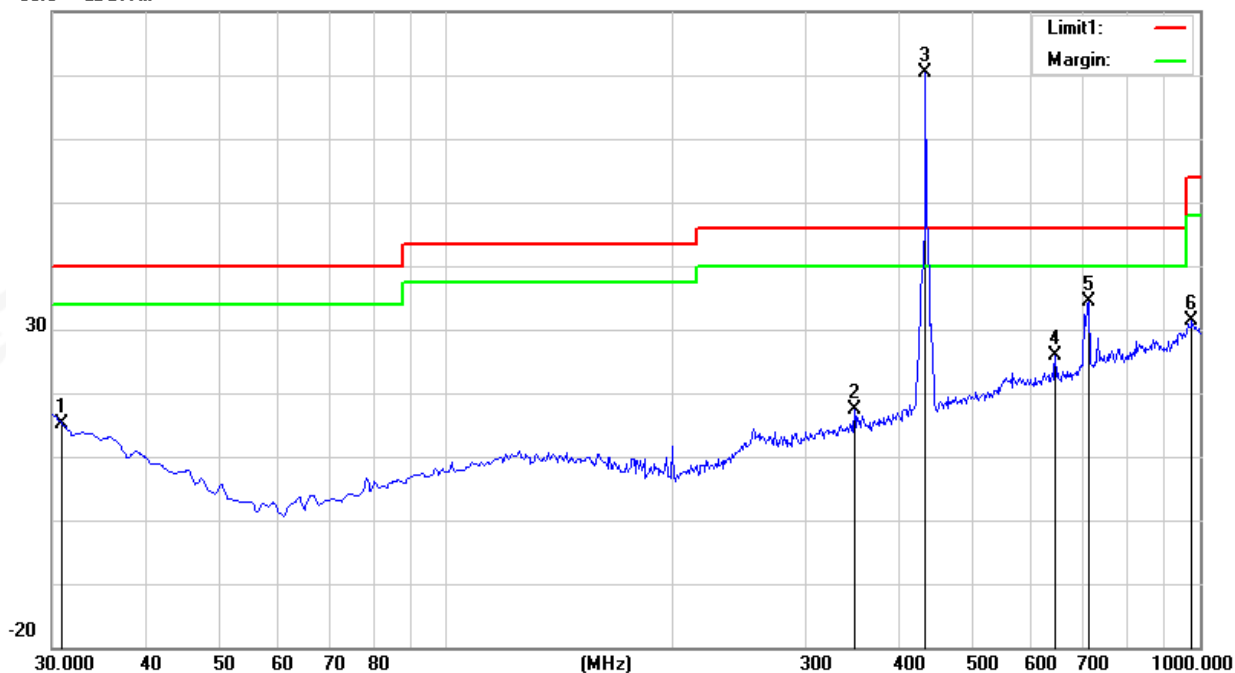



FSK

Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 3V	Phase:	Horizontal
Test Mode:	Mode 2		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.7455	28.77	-13.24	15.53	40.00	-24.47	peak
2	34.8500	29.72	-15.34	14.38	40.00	-25.62	peak
4	556.7100	29.07	-5.58	23.49	46.00	-22.51	peak
5	719.6700	40.85	-3.27	37.58	46.00	-8.42	peak
6	831.2200	41.24	-0.70	40.54	46.00	-5.46	peak


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
3	433.9200	88.39	-10.13	-	78.26	92.87	-14.61	peak
3	433.9200	88.39	-10.13	15.39	62.87	72.87	-10	AV

Remark:

1. Margin = Result (Result = Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

80.0 dBuV/m

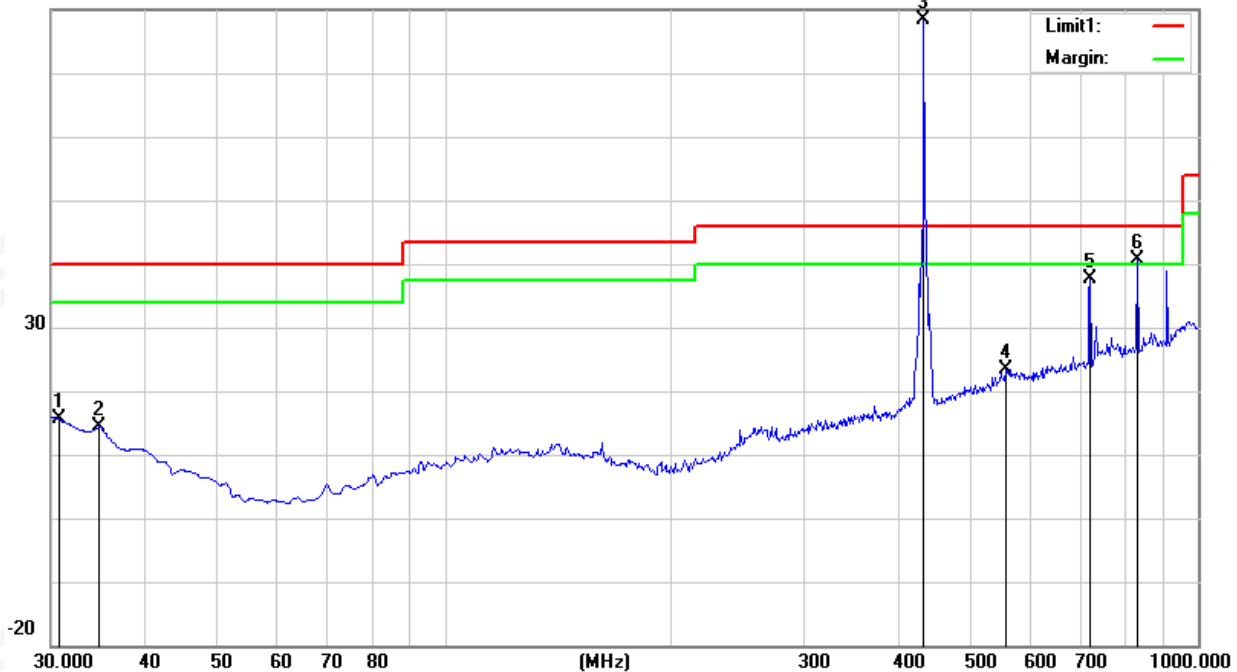



Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 3V	Phase:	Vertical
Test Mode:	Mode 2		

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Results (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	31.9400	28.27	-13.86	14.41	40.00	-25.59	peak
2	165.8000	36.94	-19.40	17.54	43.50	-25.96	peak
4	575.1400	29.38	-5.68	23.70	46.00	-22.30	peak
5	712.8800	42.74	-3.68	39.06	46.00	-6.94	peak
6	920.4600	40.12	0.00	40.12	46.00	-5.88	peak


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
3	433.9200	79.66	-10.13	-	69.53	92.87	-23.34	peak
3	433.9200	79.66	-10.13	15.39	54.14	72.87	-18.73	AV

Remark:

1. Margin = Result (Result = Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

80.0 dBUV/m

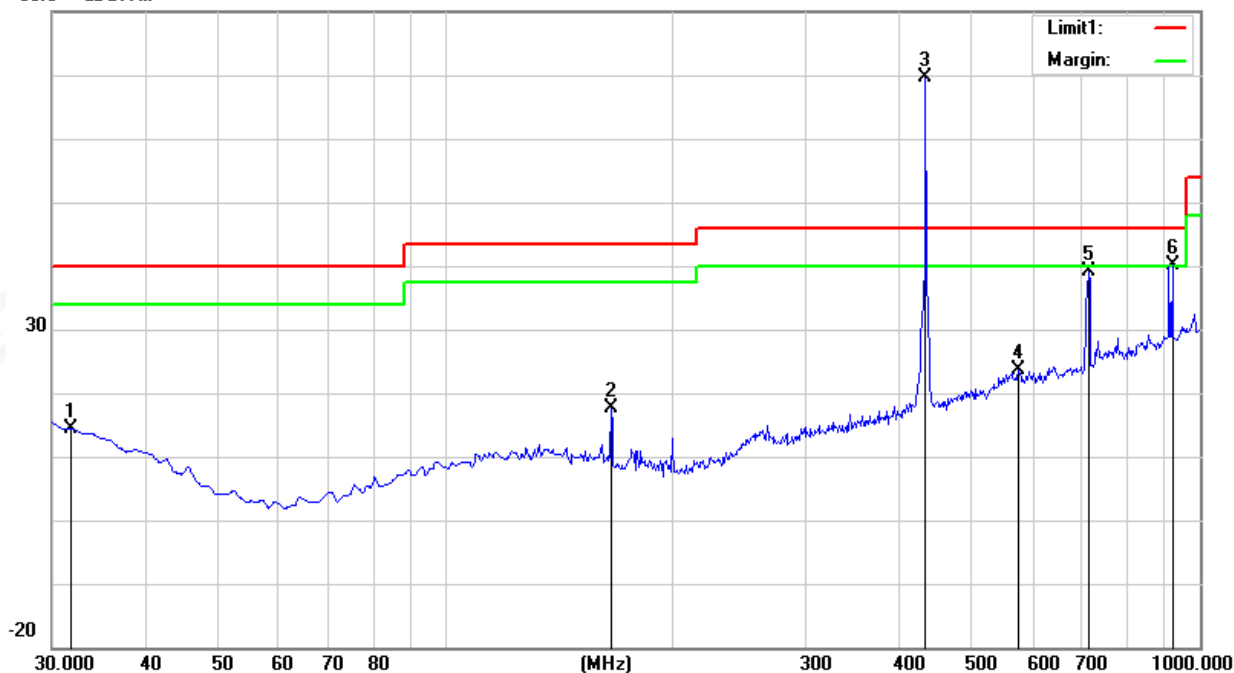




PEAK TEST RESULTS:

ASK

Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 3V	Phase:	Horizontal
Test Mode:	Mode 1		

Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1302.500	39.81	-1.33	74.0	34.19	Peak	67.90	Horizontal	Pass
1302.500	29.28	-1.33	54.0	24.72	AV	67.90	Horizontal	Pass
2251.500	43.91	2.16	74.0	30.09	Peak	358.40	Horizontal	Pass
2251.500	33.59	2.16	54.0	20.41	AV	358.40	Horizontal	Pass
2916.500	47.20	5.00	72.87	25.67	Peak	343.80	Horizontal	Pass
2916.500	35.80	5.00	52.87	17.07	AV	343.80	Horizontal	Pass
3597.000	50.26	-11.14	72.87	22.61	Peak	108.80	Horizontal	Pass
3597.000	46.57	-11.14	52.87	6.3	AV	108.80	Horizontal	Pass
4334.000	43.70	-8.44	74.0	30.30	Peak	151.60	Horizontal	Pass
4334.000	32.39	-8.44	54.0	21.61	AV	151.60	Horizontal	Pass
5984.000	47.22	-3.51	72.87	25.65	Peak	112.90	Horizontal	Pass
5984.000	36.20	-3.51	52.87	16.67	AV	112.90	Horizontal	Pass

RE_FCC Test Case_FCC 15C 1GHz-10GHz

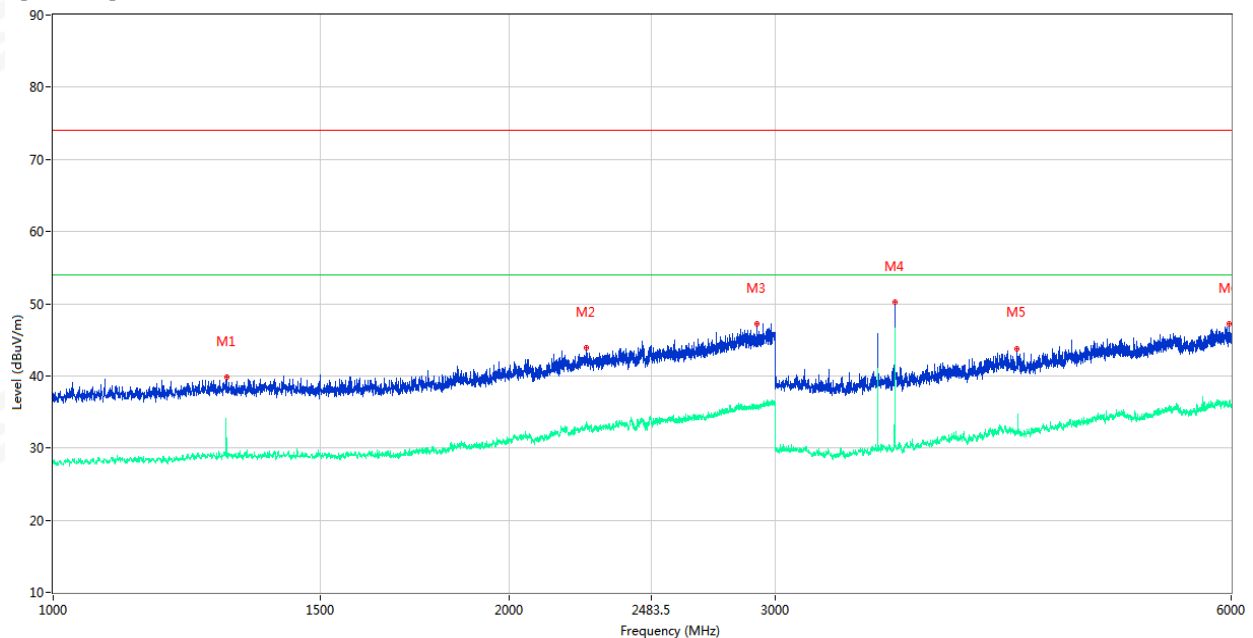




Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 3V	Phase:	Vertical
Test Mode:	Mode 1		

Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1301.500	42.35	-1.33	74.0	31.65	Peak	0.00	Vertical	Pass
1301.500	37.50	-1.33	54.0	16.50	AV	0.00	Vertical	Pass
1767.000	46.80	-0.61	72.87	26.07	Peak	102.90	Vertical	Pass
1767.000	42.98	-0.61	52.87	9.89	AV	102.90	Vertical	Pass
2518.000	46.68	3.29	72.87	26.19	Peak	187.40	Vertical	Pass
2518.000	39.90	3.29	52.87	12.97	AV	187.40	Vertical	Pass
4157.000	43.25	-8.63	74.0	30.75	Peak	70.20	Vertical	Pass
4157.000	32.79	-8.63	54.0	21.21	AV	70.20	Vertical	Pass
5041.000	46.19	-5.74	72.87	26.68	Peak	163.50	Vertical	Pass
5041.000	34.72	-5.74	52.87	18.15	AV	163.50	Vertical	Pass
5927.000	46.98	-3.58	72.87	25.89	Peak	68.40	Vertical	Pass
5927.000	36.52	-3.58	52.87	16.35	AV	68.40	Vertical	Pass

RE_FCC Test Case_FCC 15C 1GHz-10GHz

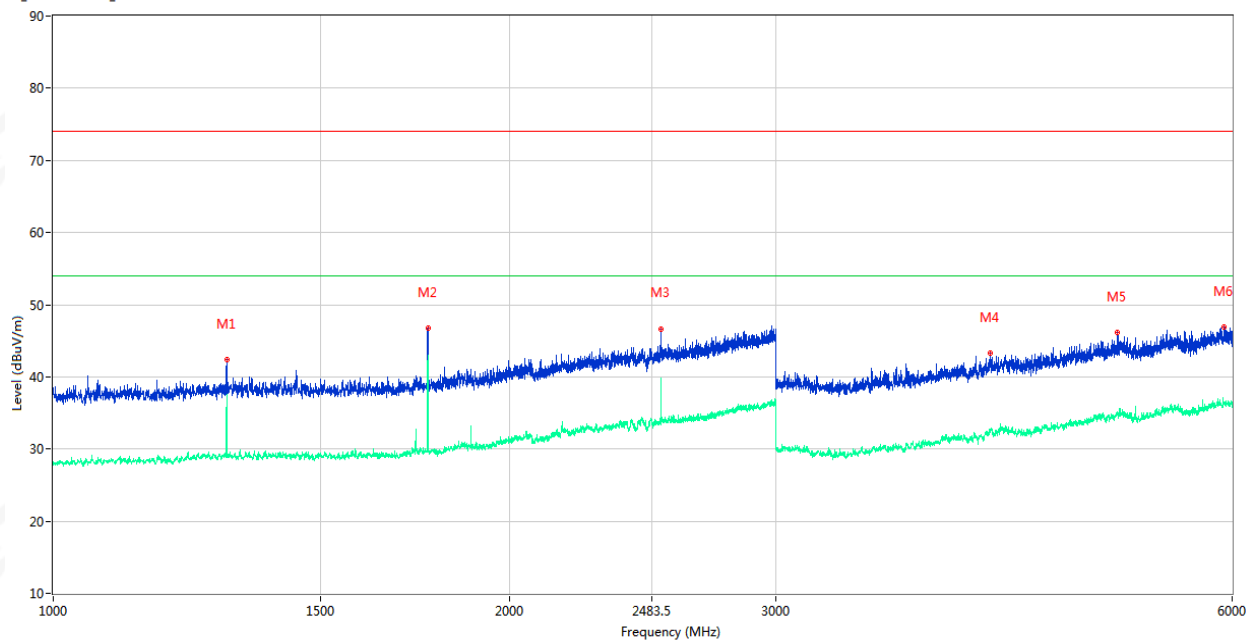




FSK

Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 3V	Phase:	Horizontal
Test Mode:	Mode 2		

Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1342.500	40.52	-1.27	74.0	33.48	Peak	68.00	Horizontal	Pass
1342.500	29.01	-1.27	54.0	24.99	AV	68.00	Horizontal	Pass
2173.500	43.80	1.69	72.87	29.07	Peak	309.30	Horizontal	Pass
2173.500	32.27	1.69	52.87	20.60	AV	309.30	Horizontal	Pass
2968.500	47.21	5.31	72.87	25.66	Peak	91.40	Horizontal	Pass
2968.500	36.66	5.31	52.87	16.21	AV	91.40	Horizontal	Pass
4340.000	46.30	-8.43	74.0	27.70	Peak	336.50	Horizontal	Pass
4340.000	38.33	-8.43	54.0	15.67	AV	336.50	Horizontal	Pass
5417.000	46.90	-5.02	72.87	25.97	Peak	233.10	Horizontal	Pass
5417.000	35.25	-5.02	52.87	17.62	AV	233.10	Horizontal	Pass
5742.000	48.90	-4.38	72.87	23.97	Peak	101.40	Horizontal	Pass
5742.000	39.14	-4.38	52.87	13.73	AV	101.40	Horizontal	Pass

RE_FCC Test Case_FCC 15C 1GHz-10GHz

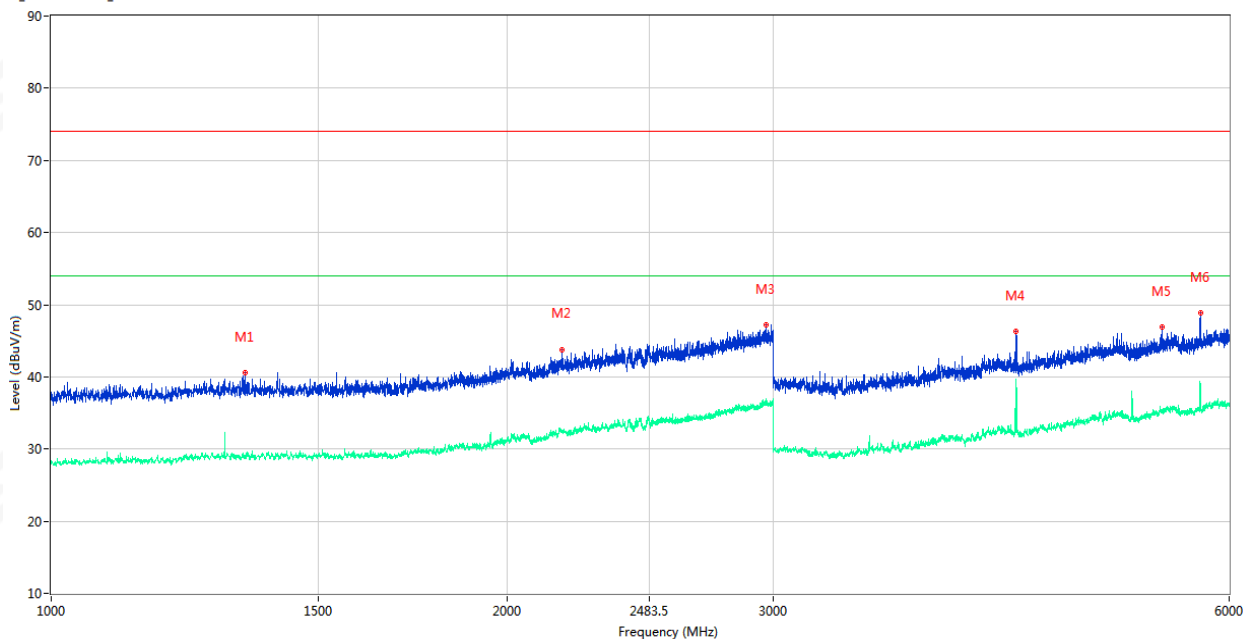




Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 3V	Phase:	Vertical
Test Mode:	Mode 2		

Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1767.000	51.90	-0.61	72.87	20.97	Peak	282.20	Vertical	Pass
1767.000	48.13	-0.61	52.87	4.74	AV	282.20	Vertical	Pass
2364.000	46.92	2.85	74.0	27.08	Peak	280.00	Vertical	Pass
2364.000	40.60	2.85	54.0	13.40	AV	280.00	Vertical	Pass
2985.500	47.10	5.39	72.87	25.77	Peak	229.40	Vertical	Pass
2985.500	36.36	5.39	52.87	16.51	AV	229.40	Vertical	Pass
3472.000	41.81	-11.20	72.87	31.06	Peak	14.00	Vertical	Pass
3472.000	33.96	-11.20	52.87	18.91	AV	14.00	Vertical	Pass
5152.000	46.22	-5.78	72.87	26.65	Peak	306.90	Vertical	Pass
5152.000	34.20	-5.78	52.87	18.67	AV	306.90	Vertical	Pass
5891.000	47.18	-3.66	72.87	25.69	Peak	329.20	Vertical	Pass
5891.000	36.45	-3.66	52.87	16.42	AV	329.20	Vertical	Pass

RE_FCC Test Case_FCC 15C 1GHz-10GHz

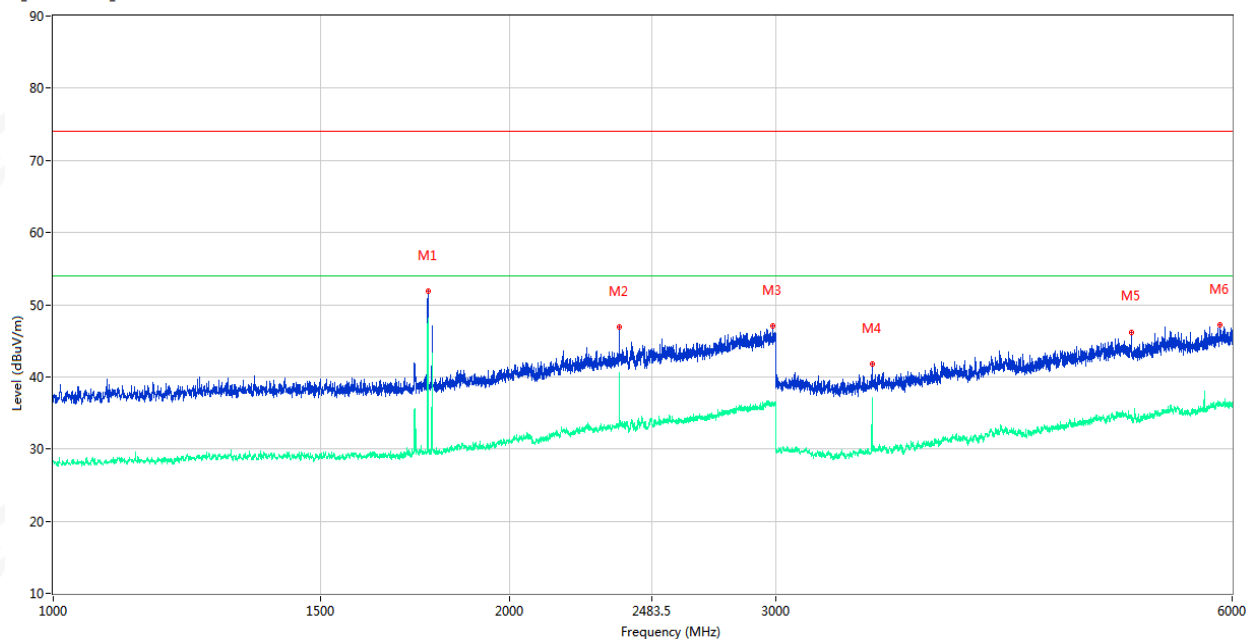

Note:

1. Above 2.6 GHz The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. The peak value is less than the AV limit, so AV data does not need to be tested.



5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15.231,Subpart C			
Section	Test Item	Limit	Result
15.231(C)	20 Bandwidth&	The20dB bandwidth of the emissions shall not exceed 0.25% of the center frequency	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth
RB	1% to 5% of the OBW
VB	$\geq 3RB$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST REQUIREMENTS

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

5.3 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: 1% to 5% of the OBW, VBW $\geq$ 3RBW, Sweep time = Auto.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS


TX mode.



5.6 TEST RESULTS

ASK


Centre Frequency (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limit (kHz)	Result
433.92	26.08	42.273	1085	PASS

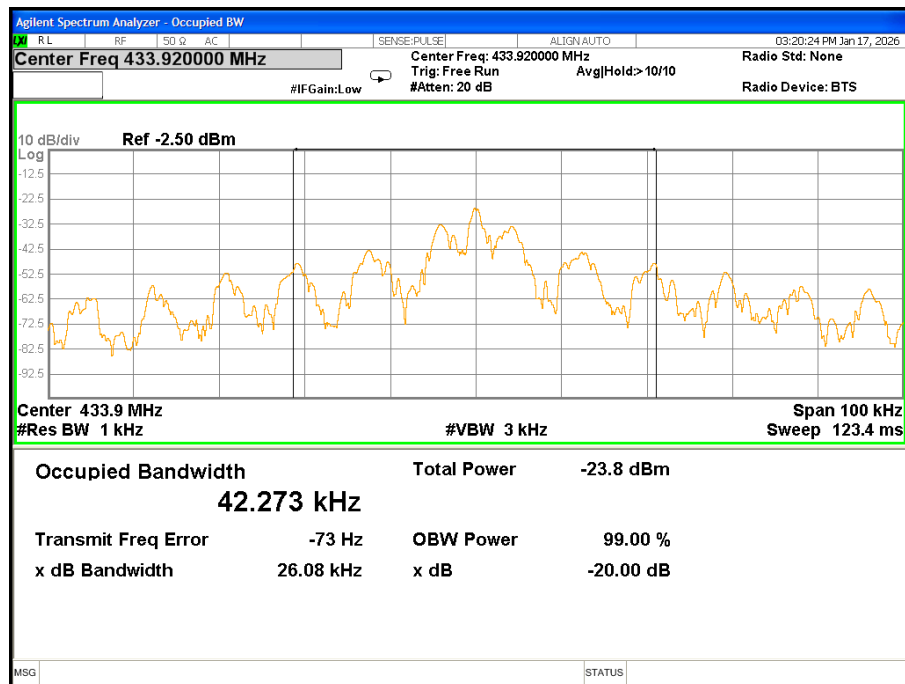



FSK

Centre Frequency (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limit (kHz)	Result
433.92	98.83	109.62	1085	PASS

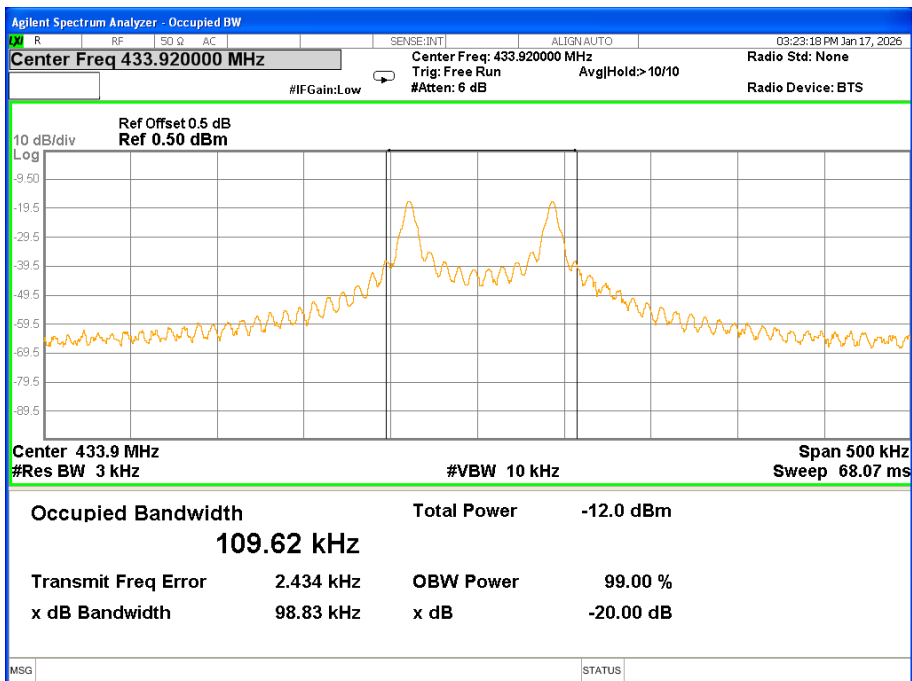

6. TRANSMITTER TIMEOUT

6.1 LIMIT

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the but in no case less than 10 seconds.

6.2 TEST PROCEDURE

- (1) Put the EUT on the support in its standard position with associated equipment and switched on.
- (2) Set center frequency of spectrum analyzer = operating frequency.
- (3) Set the spectrum analyzer as RBW=100kHz, VBW=100kHz, Span=0Hz, Adjust Sweep=Auto.
- (4) record the duration time

6.3 TEST SETUP





6.4 TEST RESULTS

ASK

Frequency(MHz)	Total cycle transmission time(s)	Each transmission time(s)	silent period between transmissions(s)
433.92	28.2	0.9	27.3
Limit	<10s	<1s	>10s and >30*(duration of transmission)
Result	Pass		





FSK

Frequency(MHz)	Total cycle transmission time(s)	Each transmission time(s)	silent period between transmissions(s)
433.92	28.2	0.9	27.3
Limit	<10s	<1s	>10s and > 30*(duration of transmission)
Result	Pass		



7. PERIODIC OPERATION

7.1 TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

The Duty Cycle Was Determined By The Following Equation: To Calculate The Actual Field Intensity, The Duty Cycle Correction Factor In Decibel Is Needed For Later Use And Can Be Obtained From Following Conversion

Duty Cycle(%)=Total On Interval In A Complete Pulse Train/ Length Of A Complete Pulse Train * %

Duty Cycle Correction Factor(dB)=20 * Log10(Duty Cycle(%))

7.2 TEST SETUP



7.3 EUT OPERATION CONDITIONS

TX mode.



7.4 TEST RESULTS

ASK


FCC Part15.231(e)	
Total On interval in a complete pulse train(ms)	17
Length of a complete pulse train(ms)	100
Duty Cycle(%)	17
Duty Cycle Correction Factor(dB)	15.39

Refer to the duty cycle plot (as below), This device meets the FCC requirement. Length of a complete pulse train

Remark:FCC part15.35(c) required that a complete pulse train is more than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

Note: Number of pulse train 1 = 1, Time of single pulse train 1 = 17ms;

Total on interval in a complete pulse train= Number of pulse train 1x Time of single pulse train
1=1x17=17ms

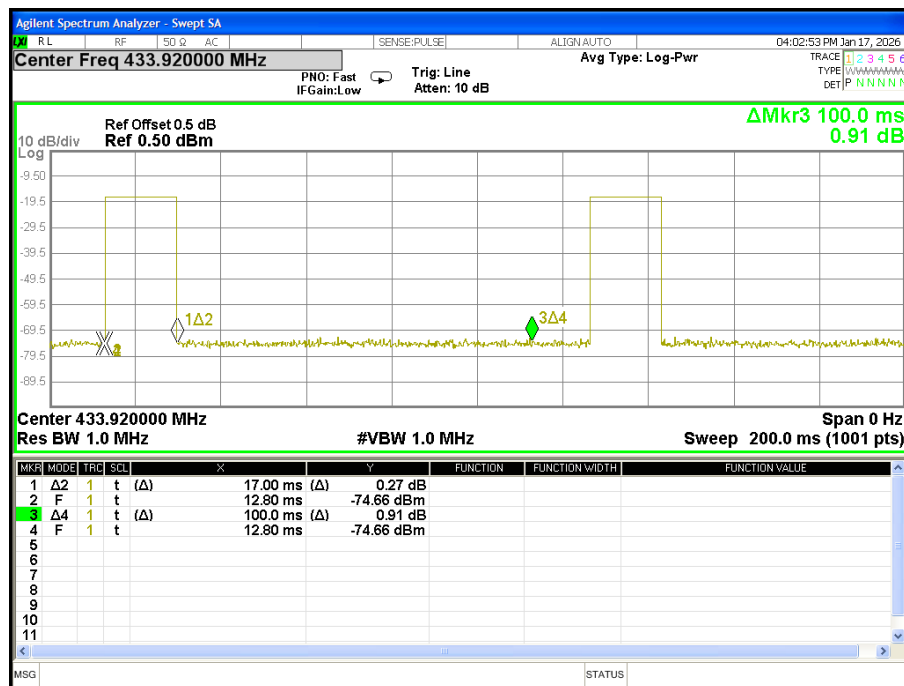



FSK


FCC Part15.231(e)	
Total On interval in a complete pulse train(ms)	17
Length of a complete pulse train(ms)	100
Duty Cycle(%)	17
Duty Cycle Correction Factor(dB)	15.39

Refer to the duty cycle plot (as below), This device meets the FCC requirement. Length of a complete pulse train

Remark:FCC part15.35(c) required that a complete pulse train is more than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

Note: Number of pulse train 1 = 1, Time of single pulse train 1 = 17ms;

Total on interval in a complete pulse train= Number of pulse train 1x Time of single pulse train 1=1x17=17ms

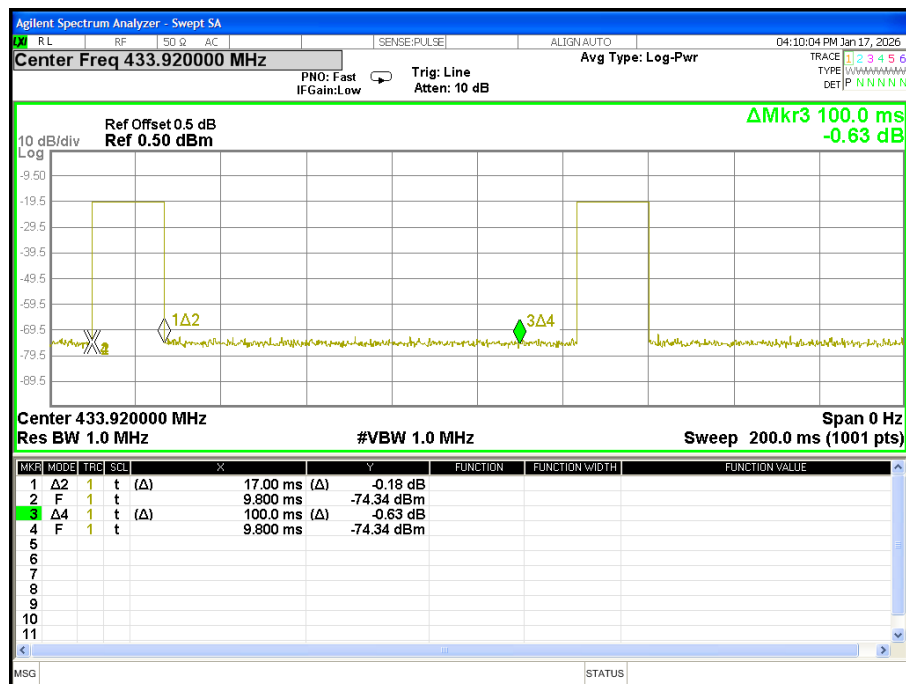



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product use a permanent ceramic printed antenna, fulfill the requirement of this section

8.2 EUT ANTENNA

The EUT antenna is Internal antenna.It conforms to the standard requirements.



APPENDIX 1-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****