





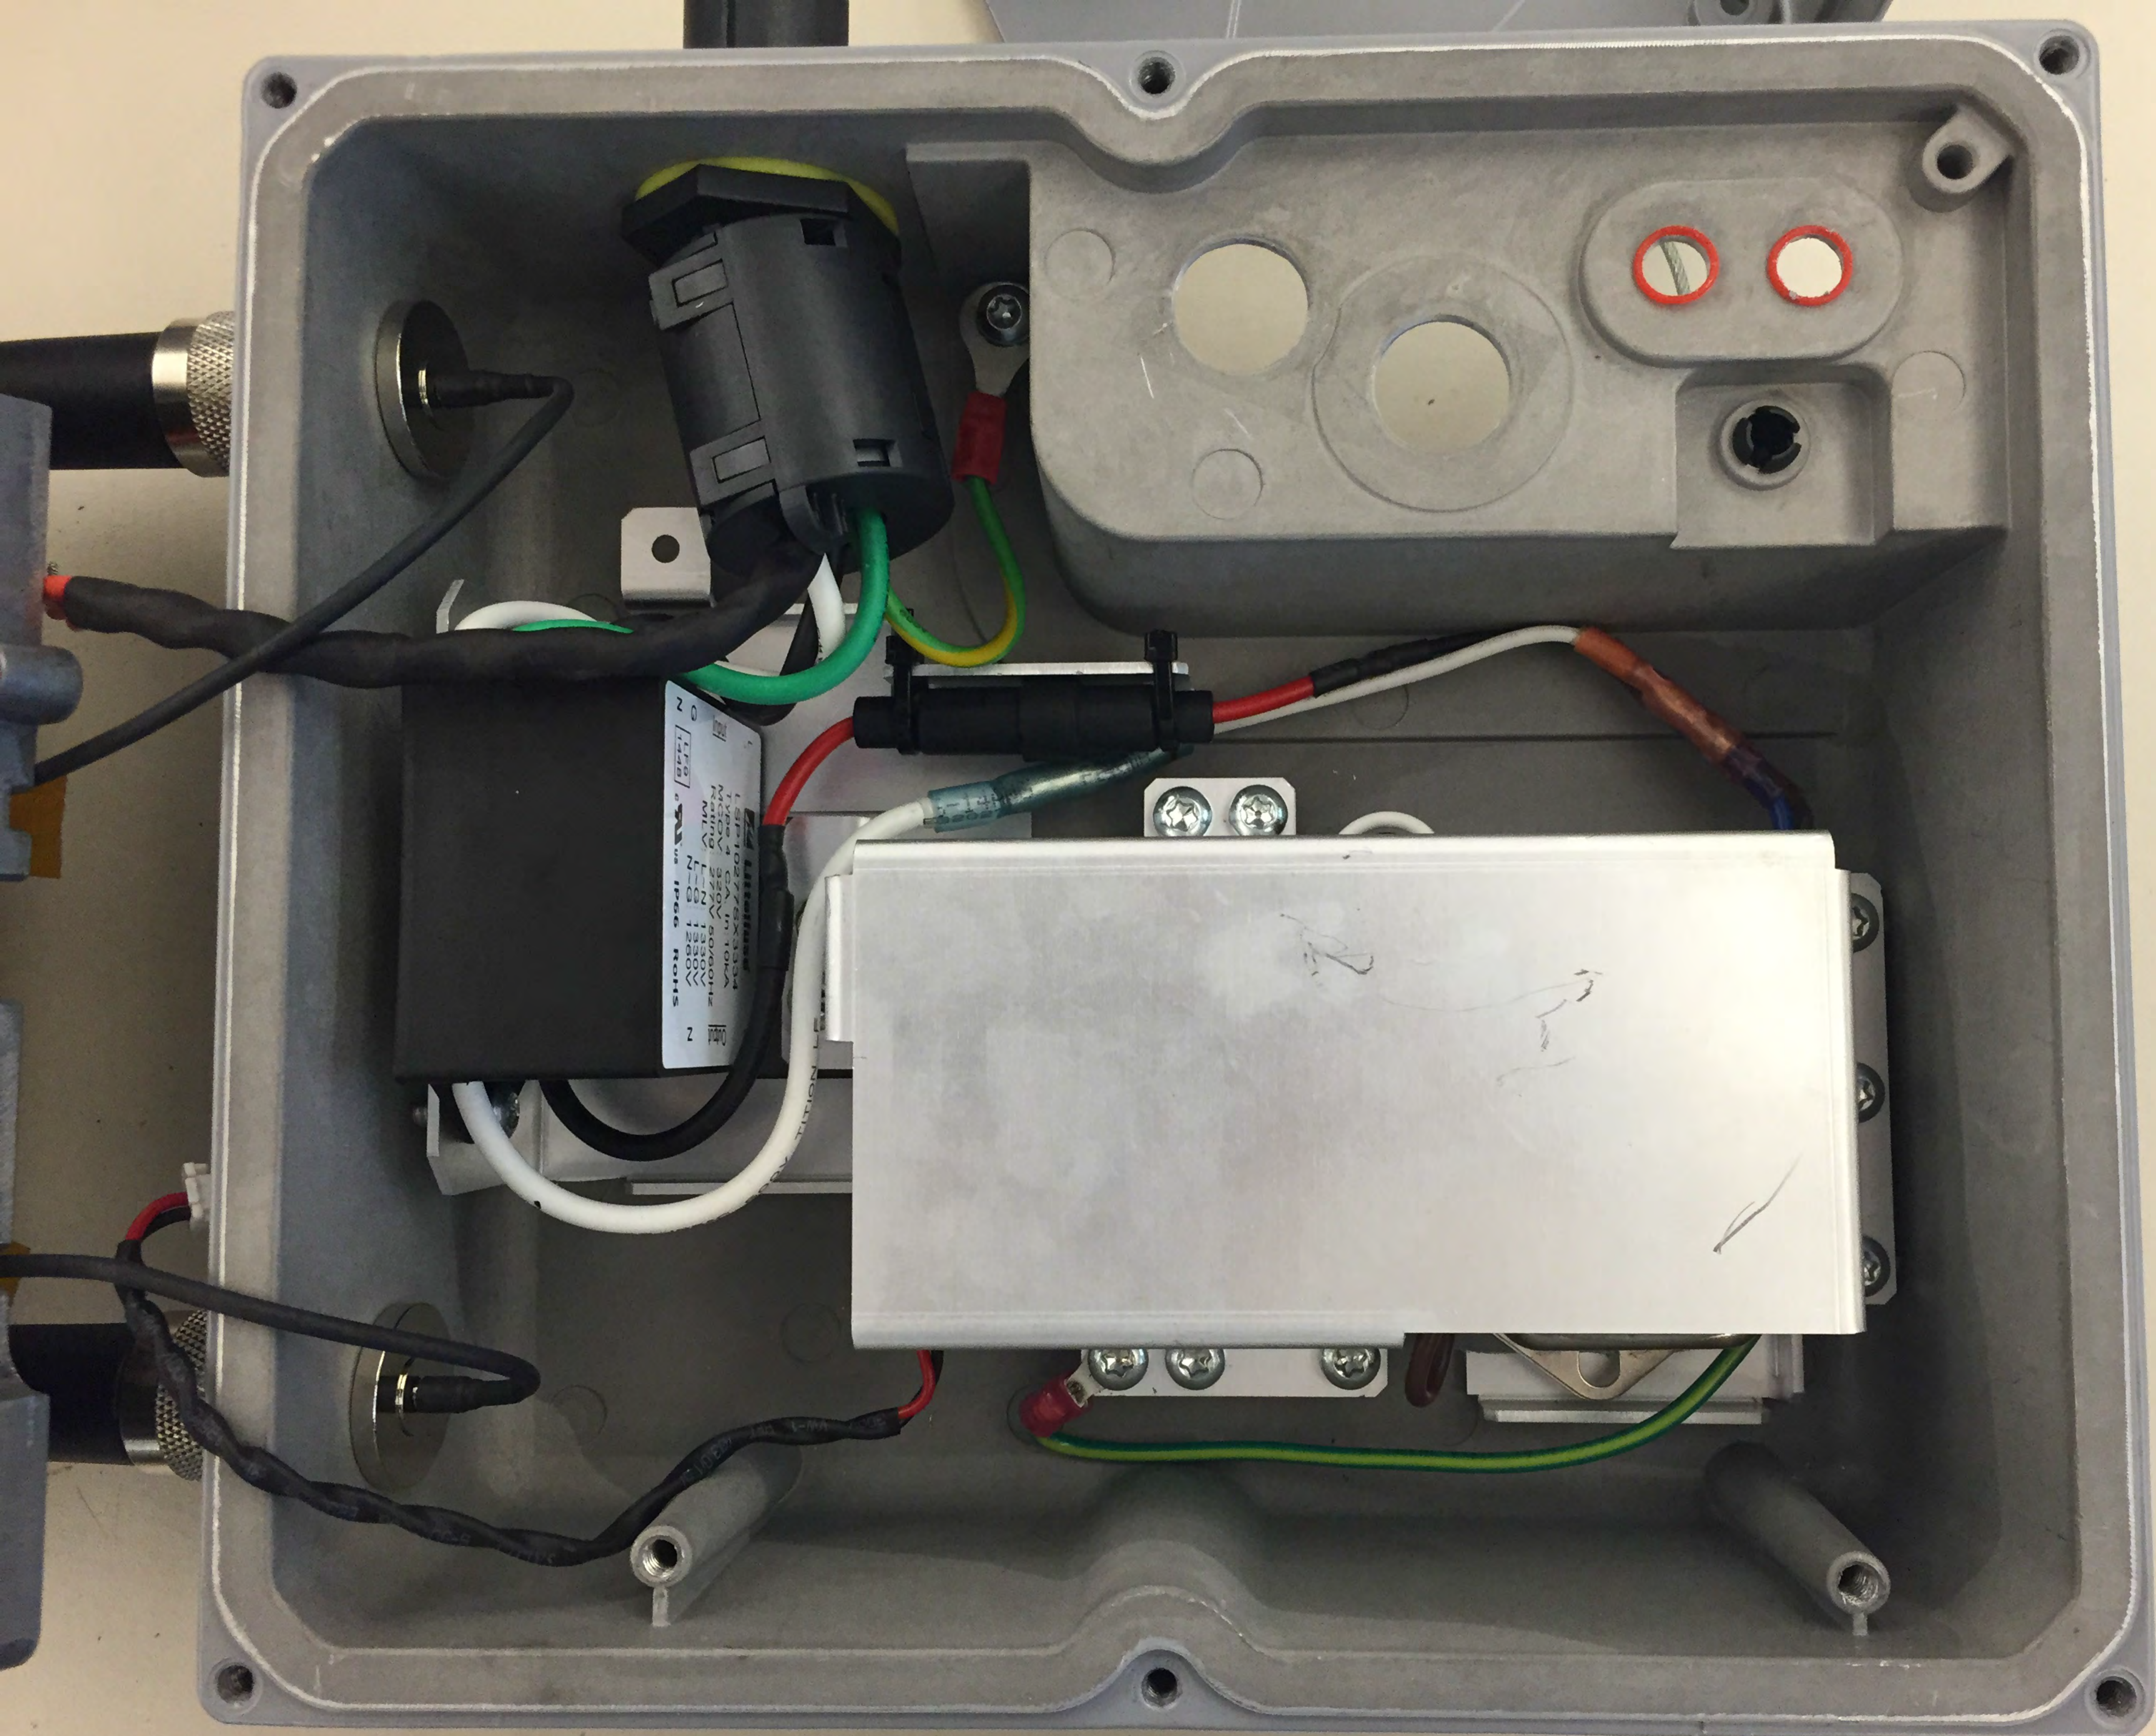

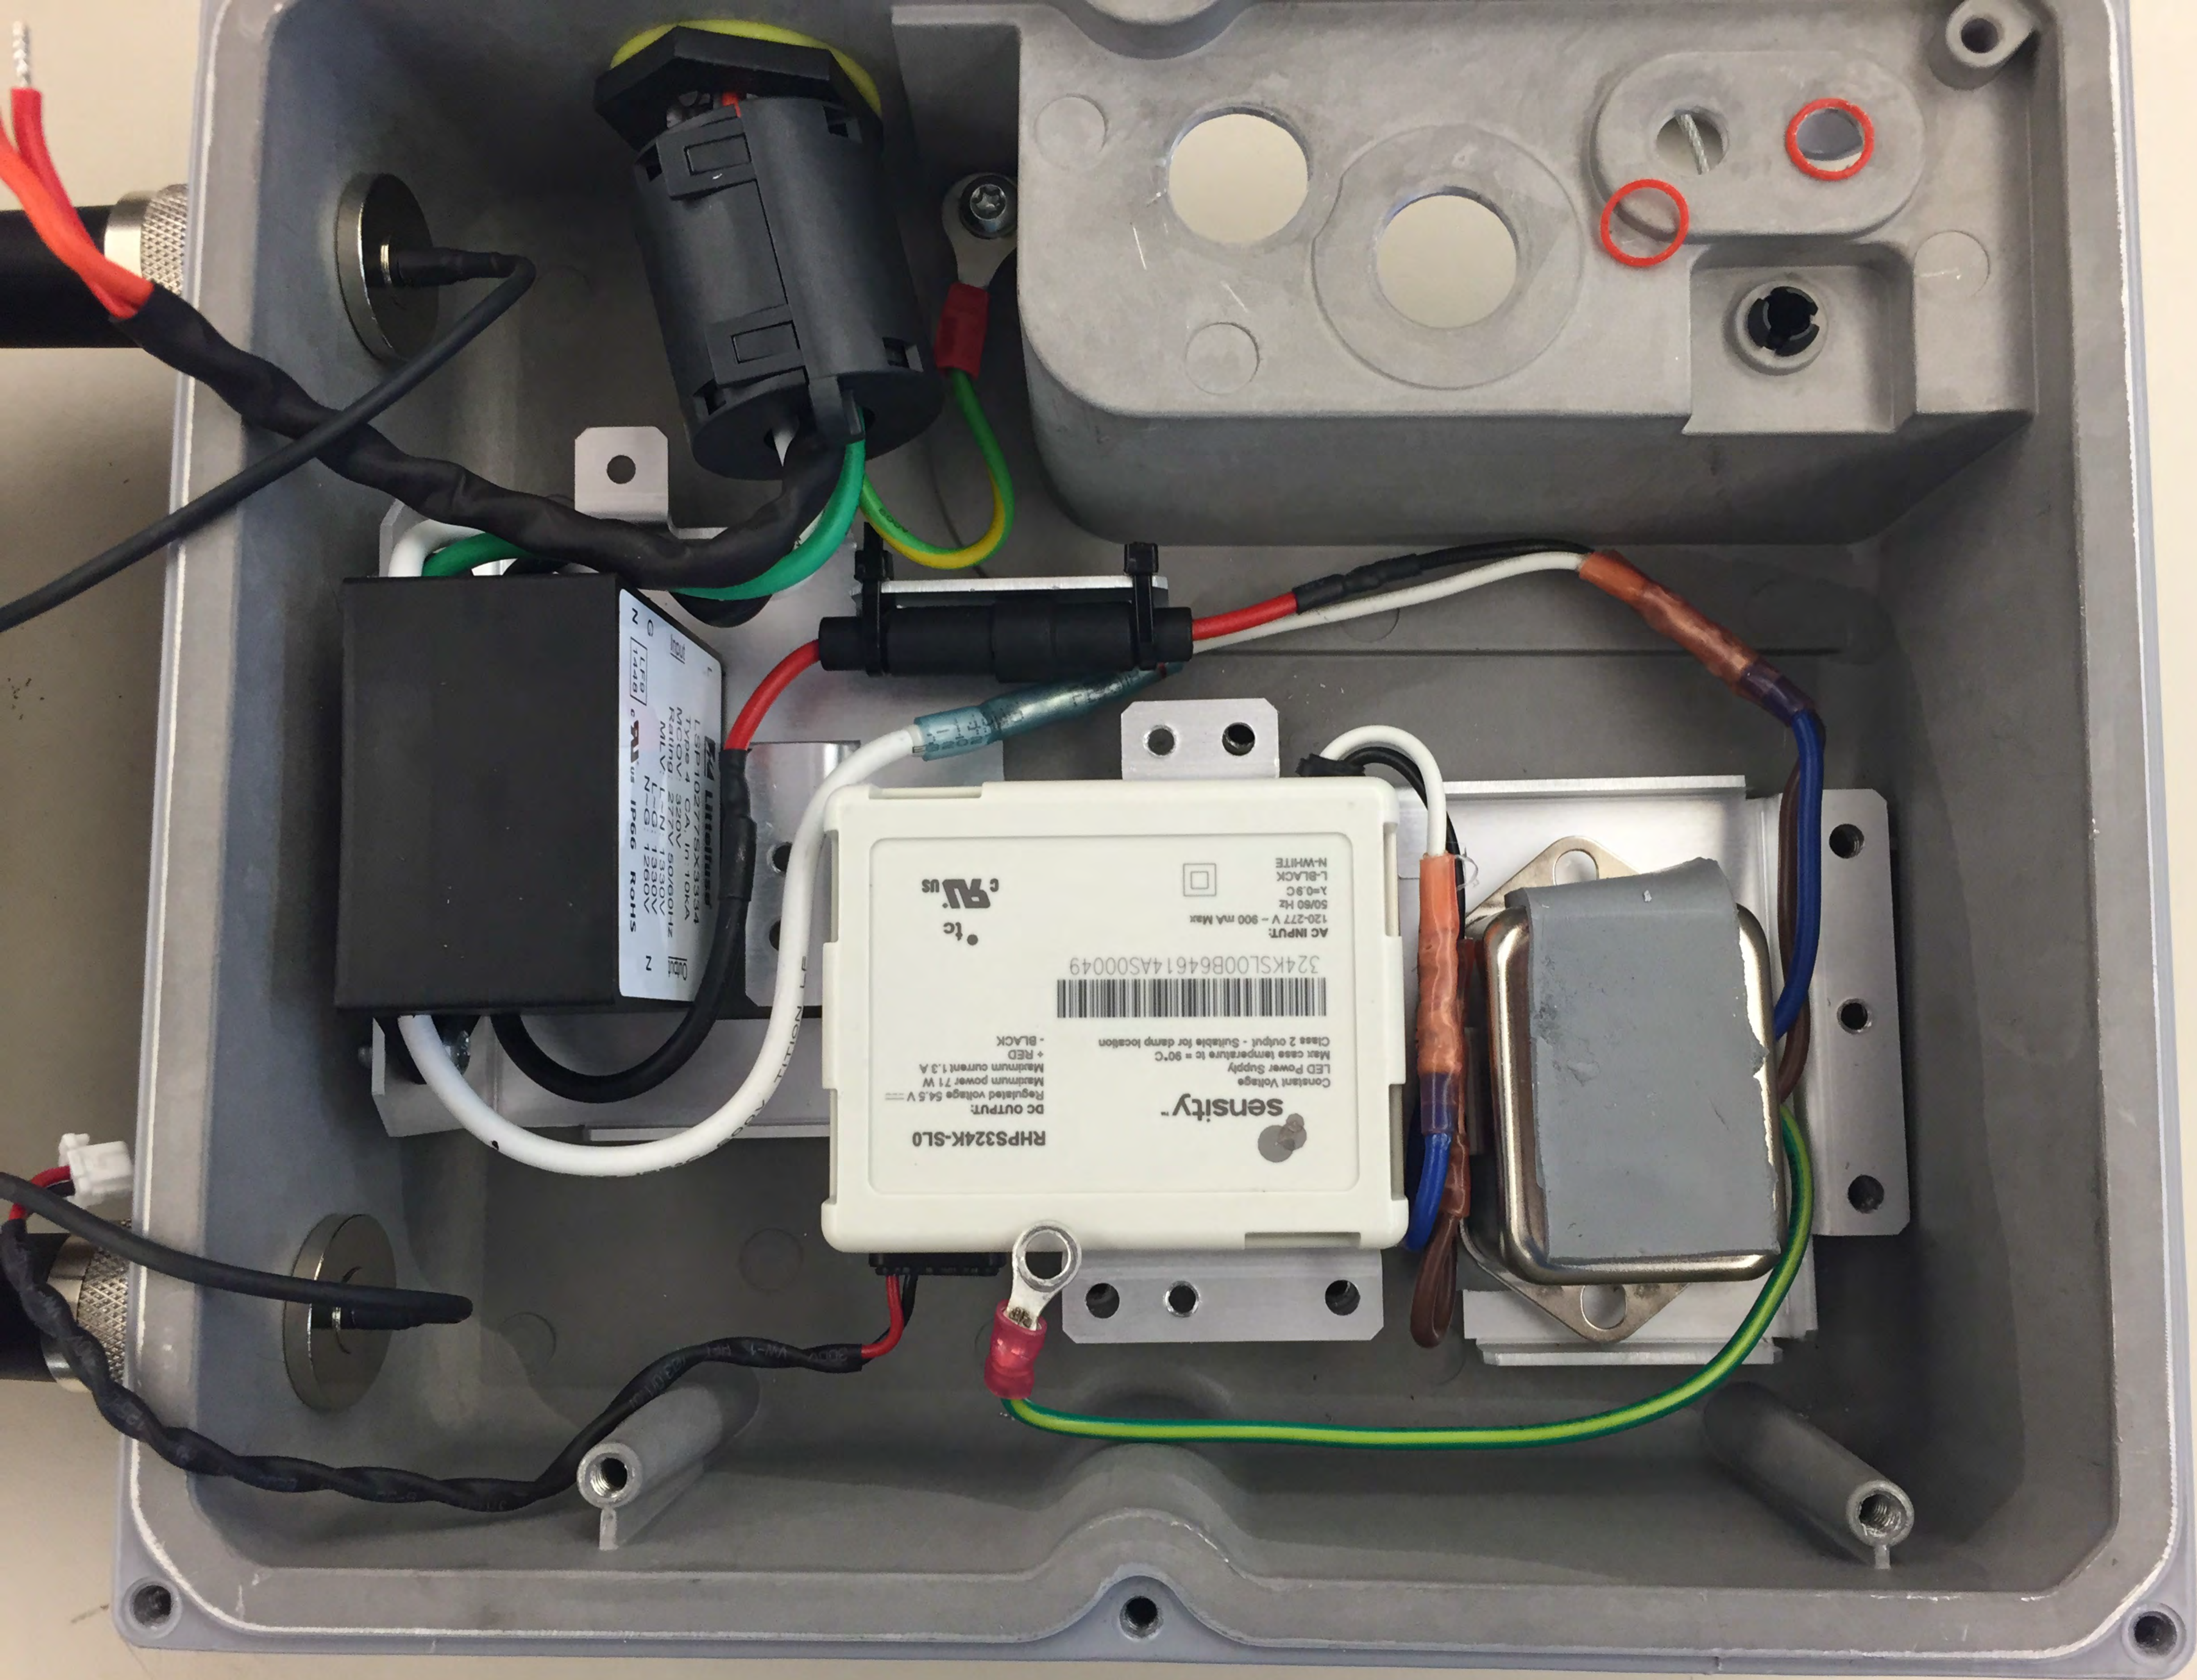


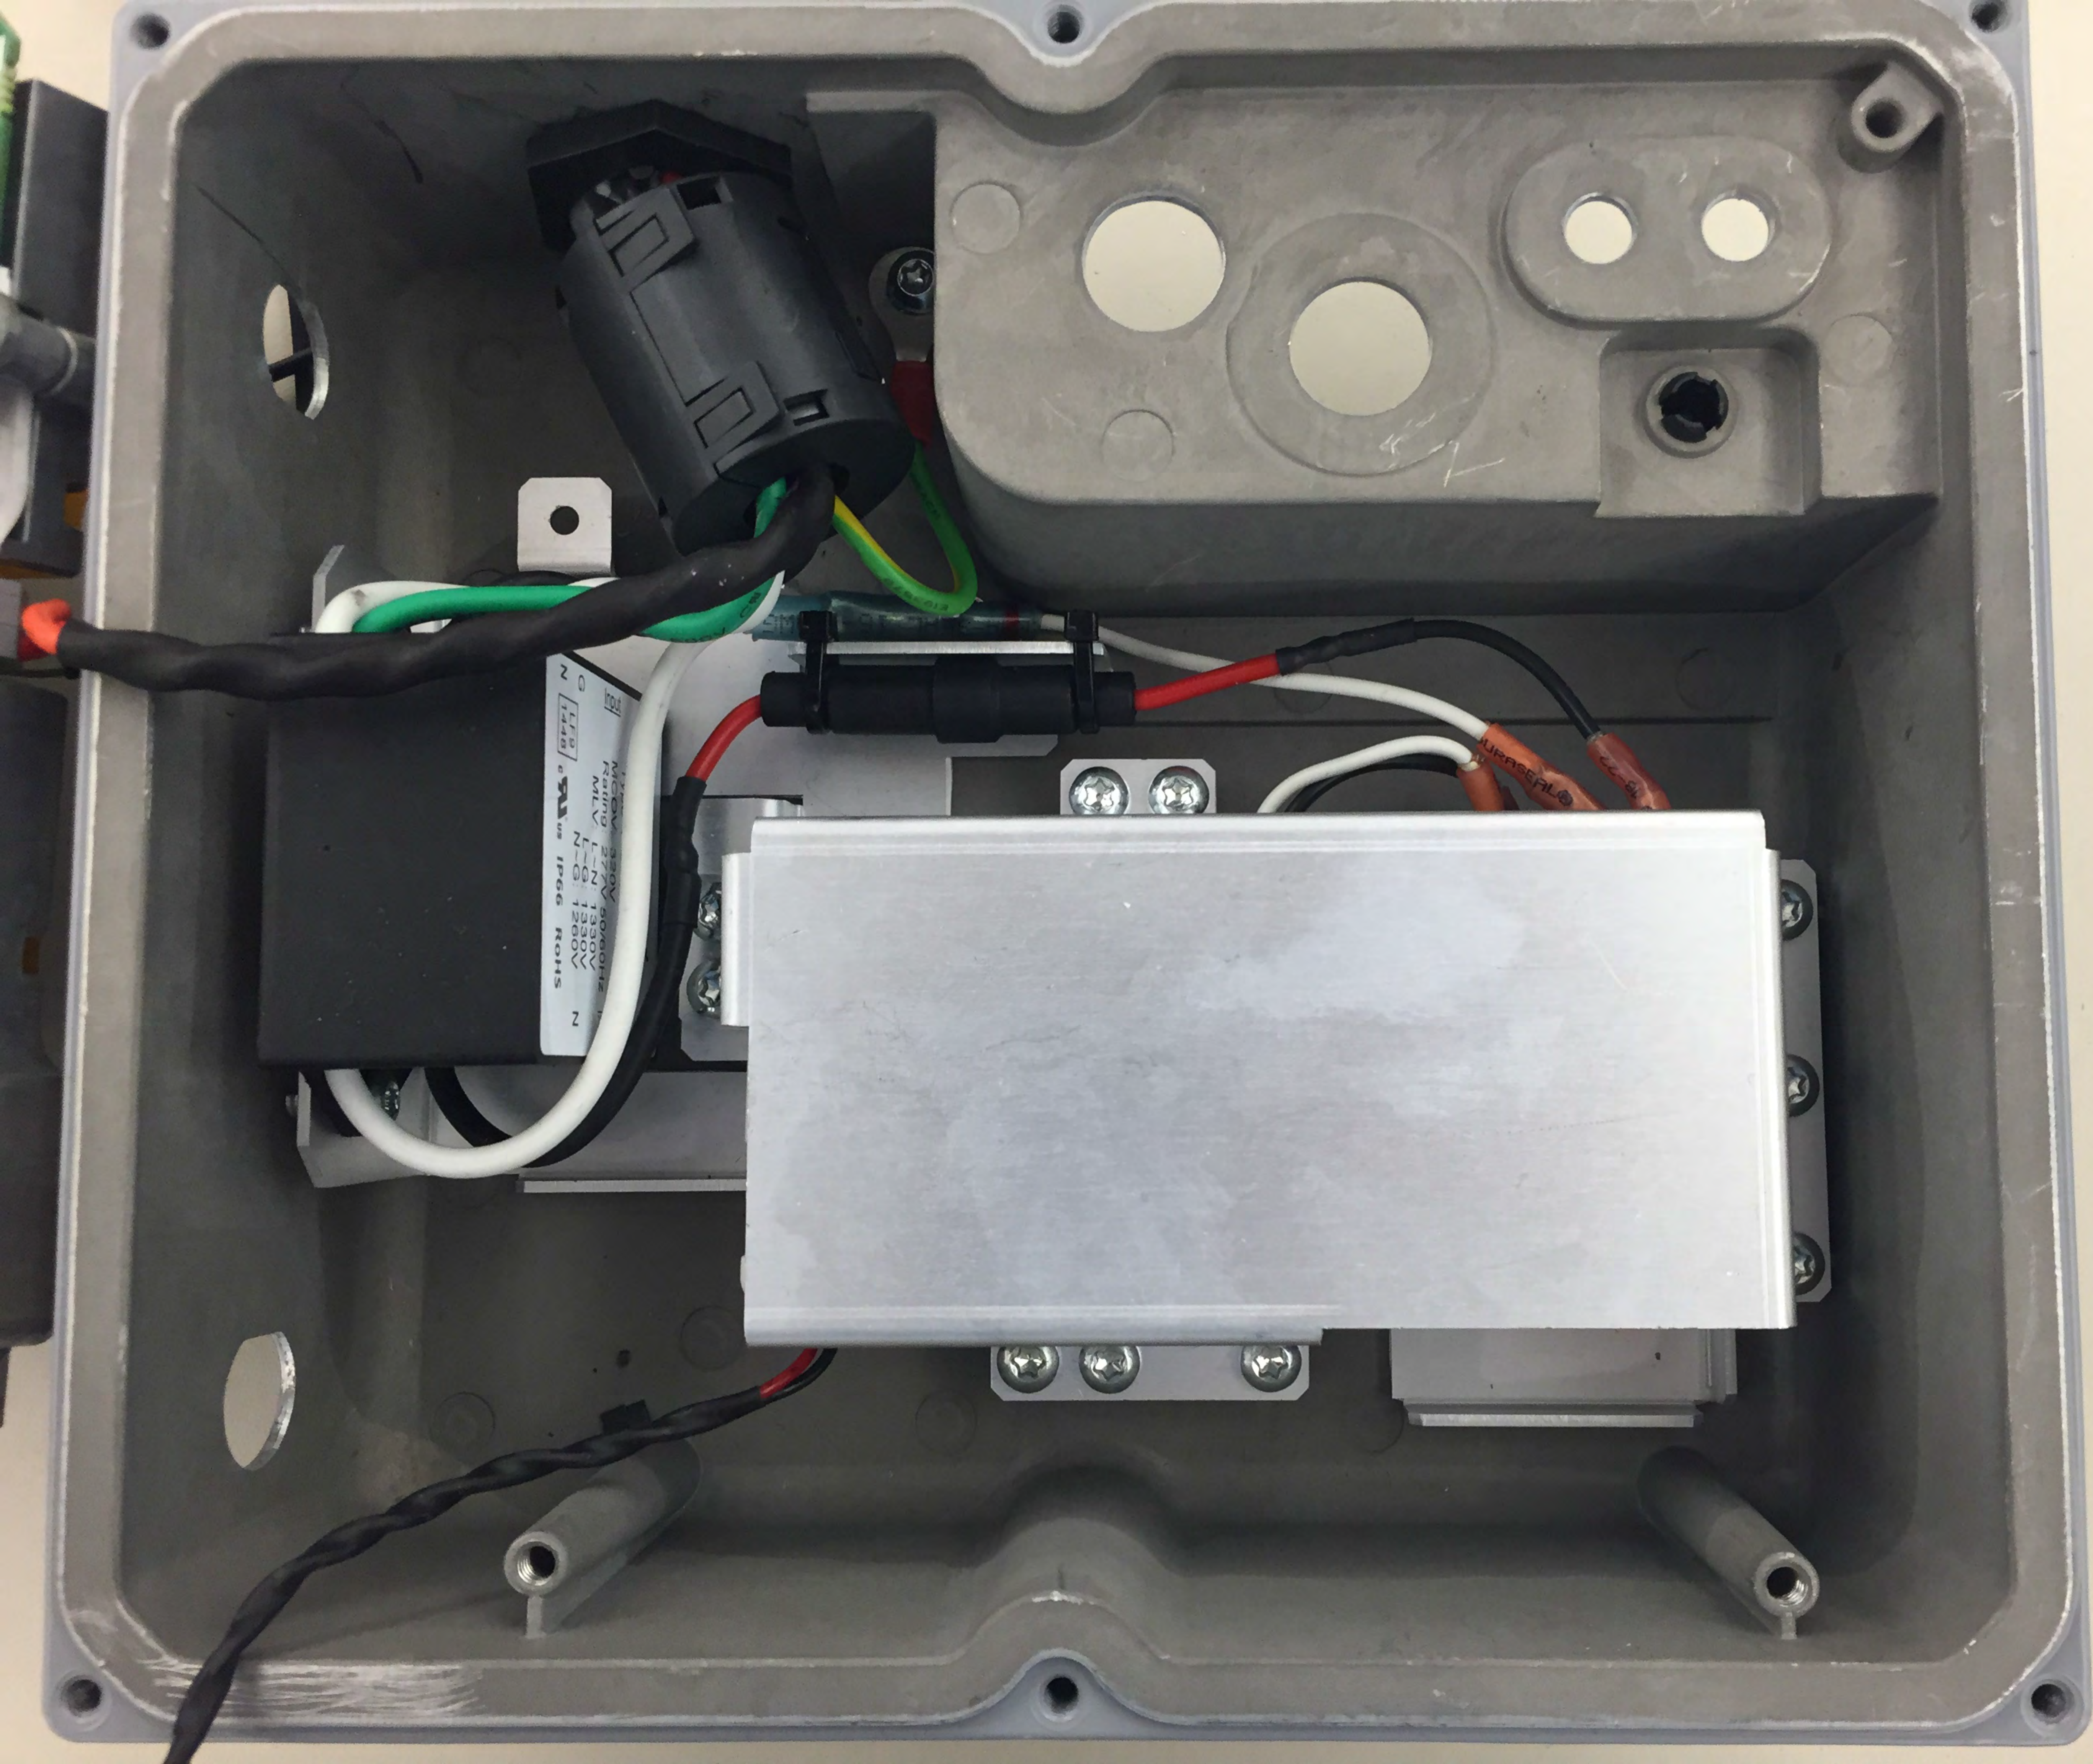


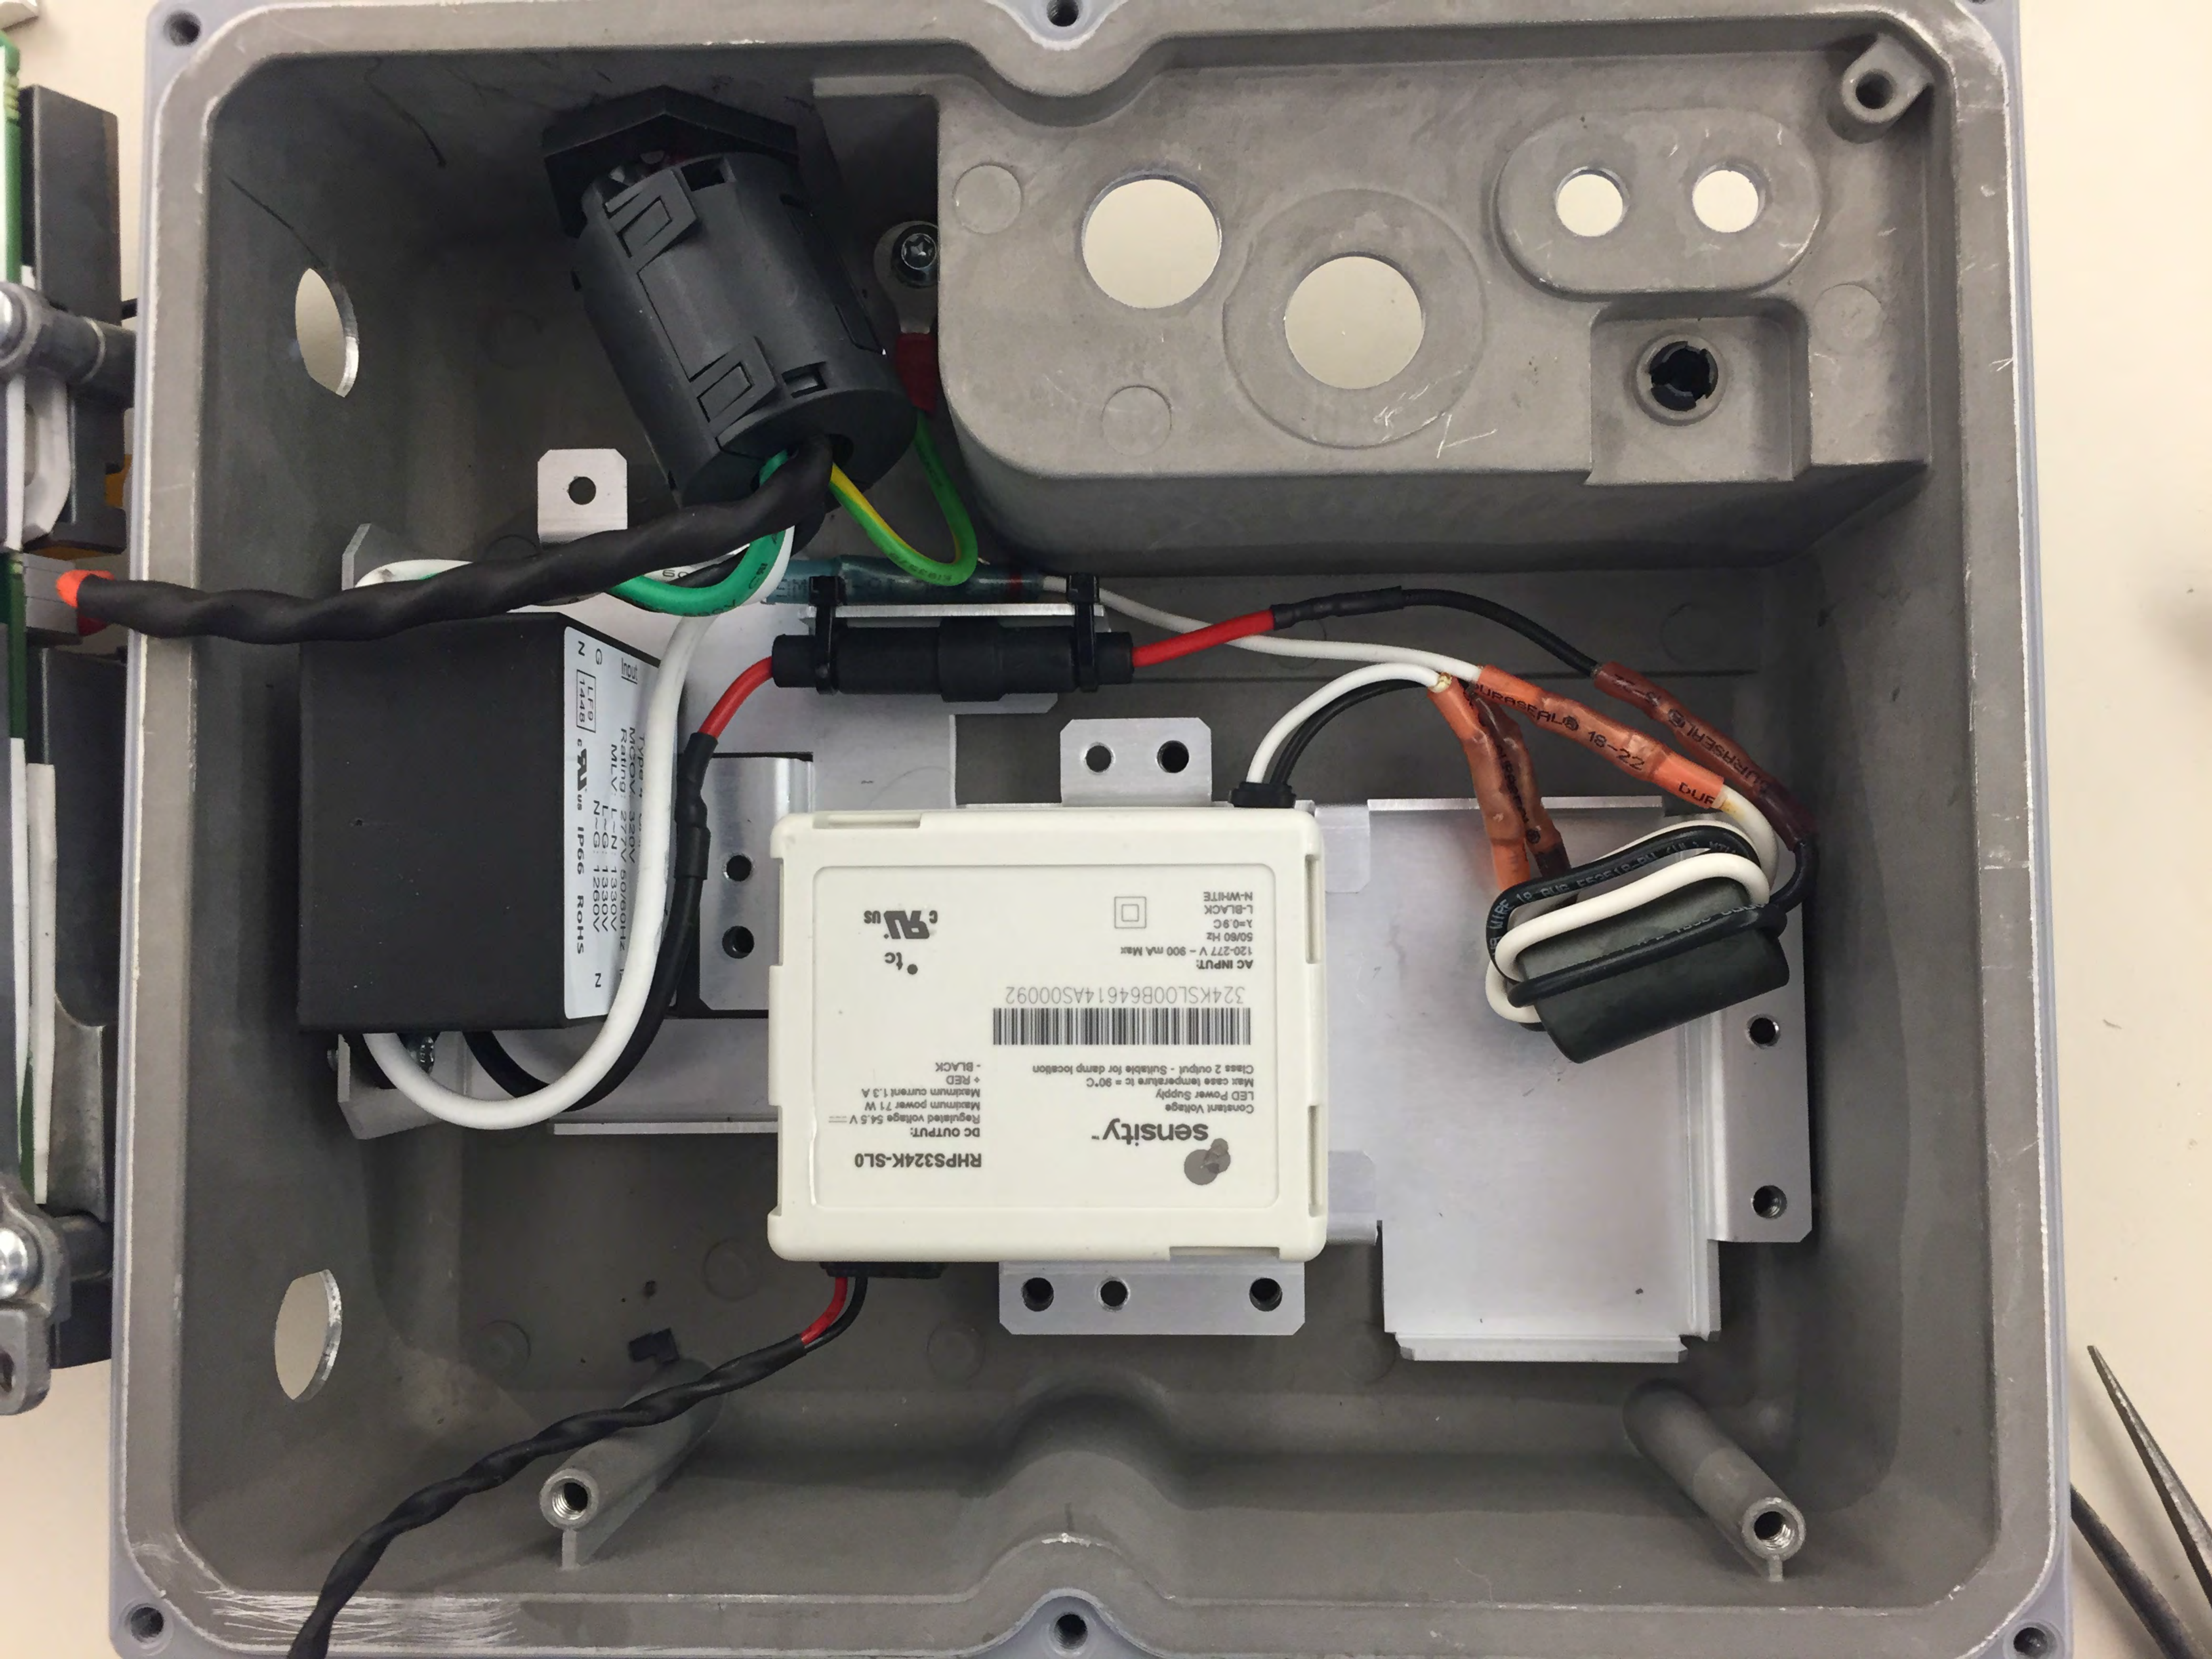

sensity
RHP324K-SL0
DC OUTPUT:
Regulated voltage 54.5 V
Maximum power 71 W
Maximum current 1.3 A
- RED
- BLACK
Class 2 output - Suitable for damp location
Max case temperature $t_c = 90^\circ\text{C}$
LED Power Supply
AC INPUT:
120-277 V - 900 mA Max
 $\lambda = 0.9\text{C}$
50/60 Hz
L-BLACK
N-WHITE
324KSL00B64614AS00092
UL
cULus

TYPE: 320V
Rating: 277V 50/60Hz
MLV: 1330V
L-Q: 1330V
N-Q: 1260V
Z
1448
cULus
IP66
RoHS
Z

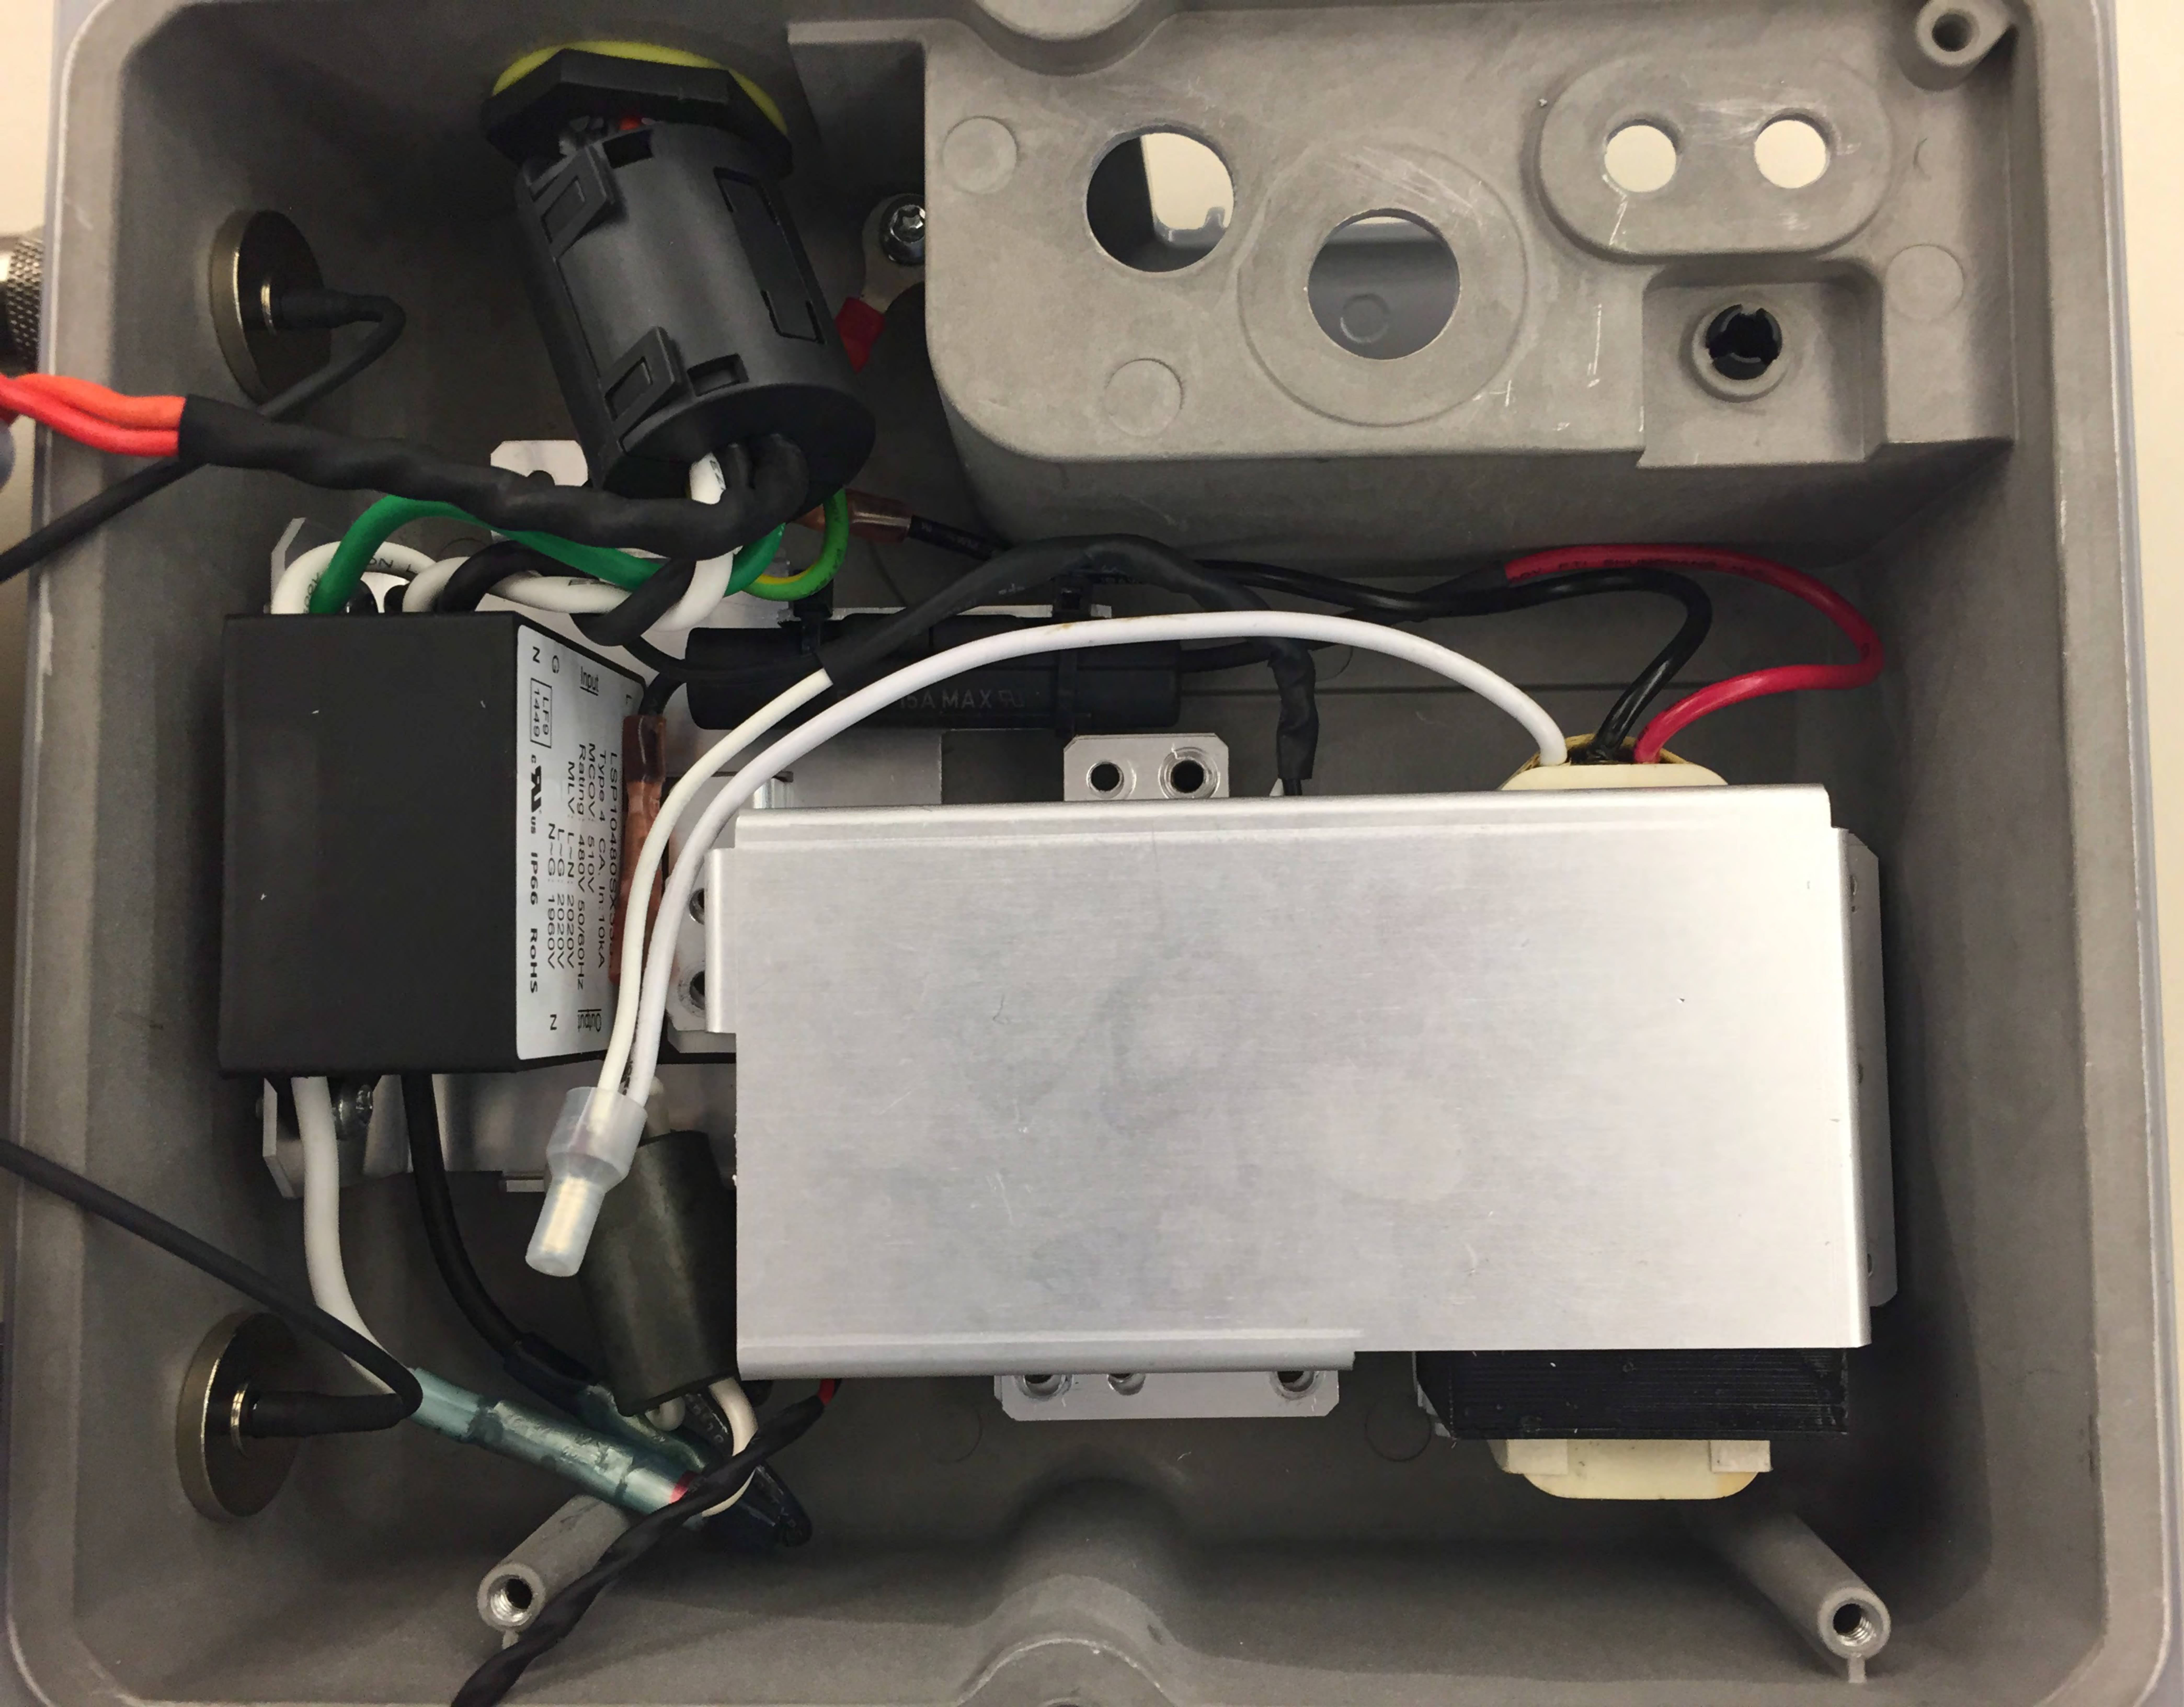

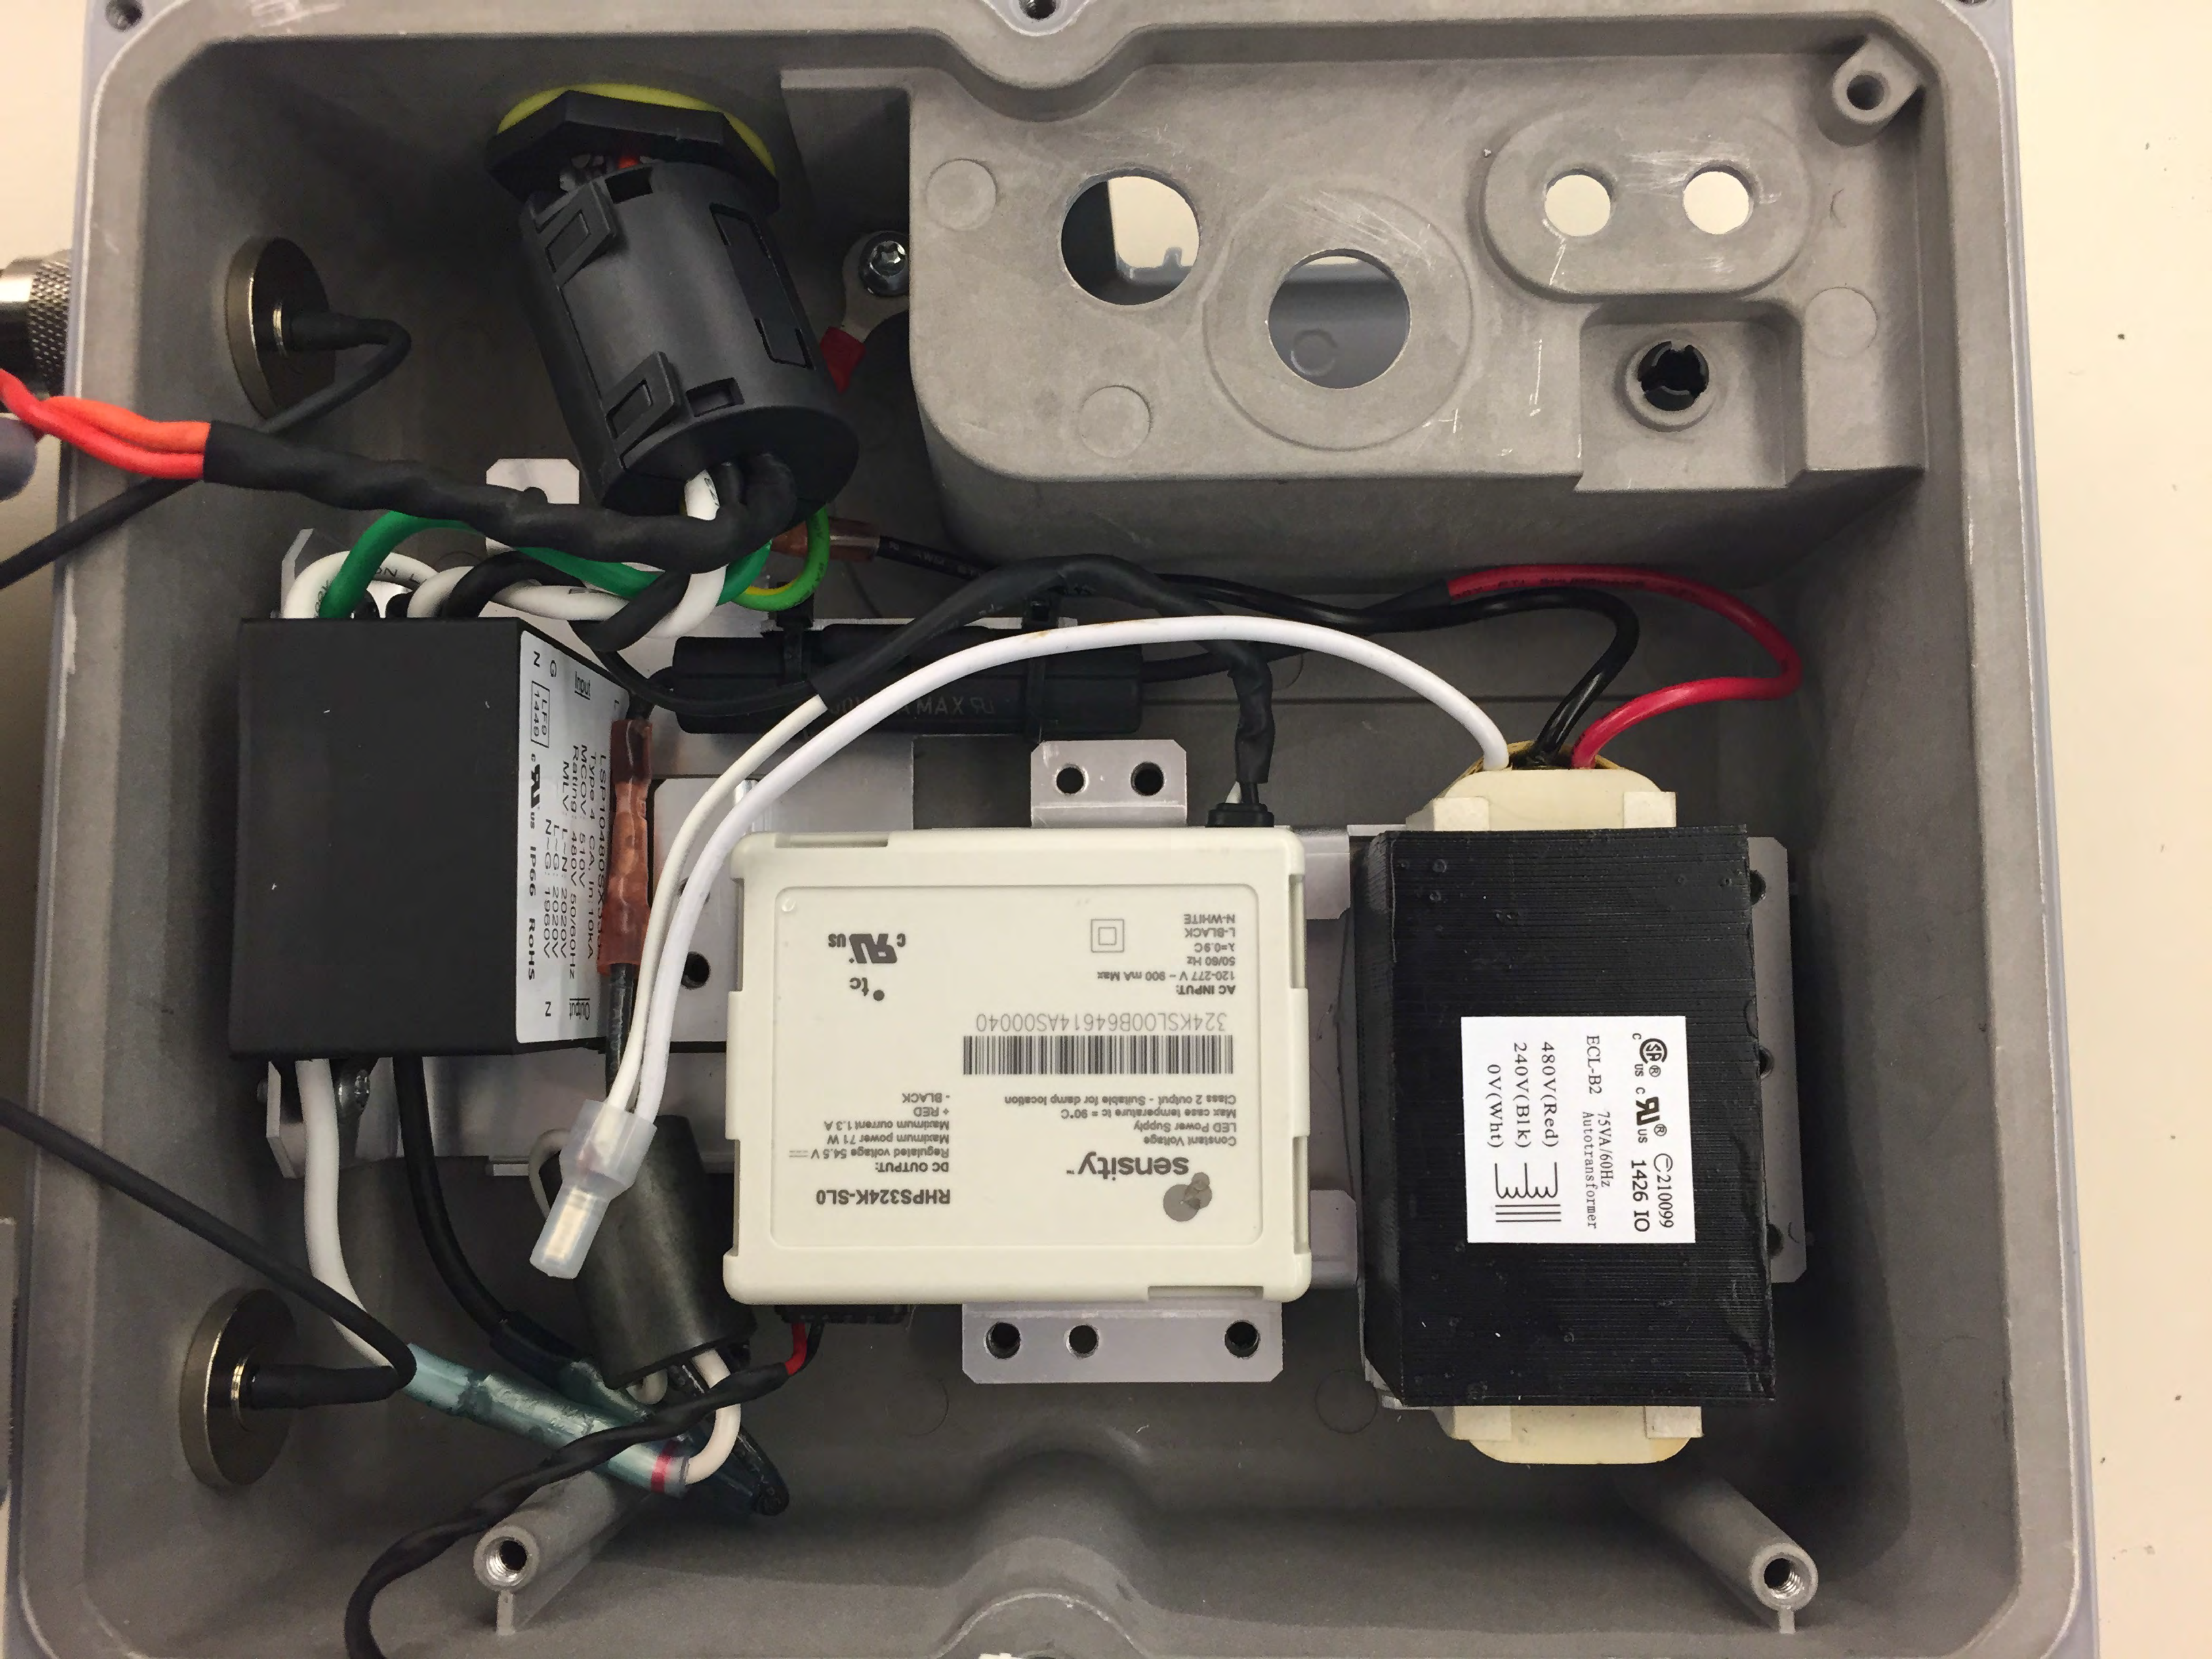

©210099
UL US 1426 IO
ECL-B2 75VA/60Hz
Autotransformer
480V(Red)
240V(Blk)
0V(Whi)

sensity
RHPSS324K-SL0
Constant Voltage
LED Power Supply
Max case temperature $t_c = 90^\circ\text{C}$
Class 2 output - Suitable for damp location
- BLACK
+ RED
Regulated voltage 54.5 V
Maximum power 71 W
Maximum current 1.3 A
DC OUTPUT:
324KSL00B64614AS00040
AC INPUT:
120-277 V ~ 900 mA Max
 $\lambda = 0.9\text{C}$
50/60 Hz
L-BLACK
N-WHITE

Output
Z
LF8
1448
e
us
IP66
RoHS

