标准书名	印刷部品规格书	版本	公差等级 / 基本尺寸	A级	B级	C级
注意事项	● 图中 ＊ 记号表示该尺寸为重点管控尺寸。 ● 量产前样品请先取得研发担当者之确认。 ● 使用模具在二具以上时各模具之检定品。 ● 交货者希望变更时，须事先取得研发担当者之承认。 ▲ 图中所用物料必须符合欧盟RoHS环保要求，送样时请附上检测报告。		5<L<10	±0.08	±0.10	±0.15
			10<L<20	±0.10	±0.15	±0.20
			20<L<40	±0.15	±0.20	±0.25

7国语言说明书　风琴折
材质：105g铜版纸双面印刷

93.5mm

187mm

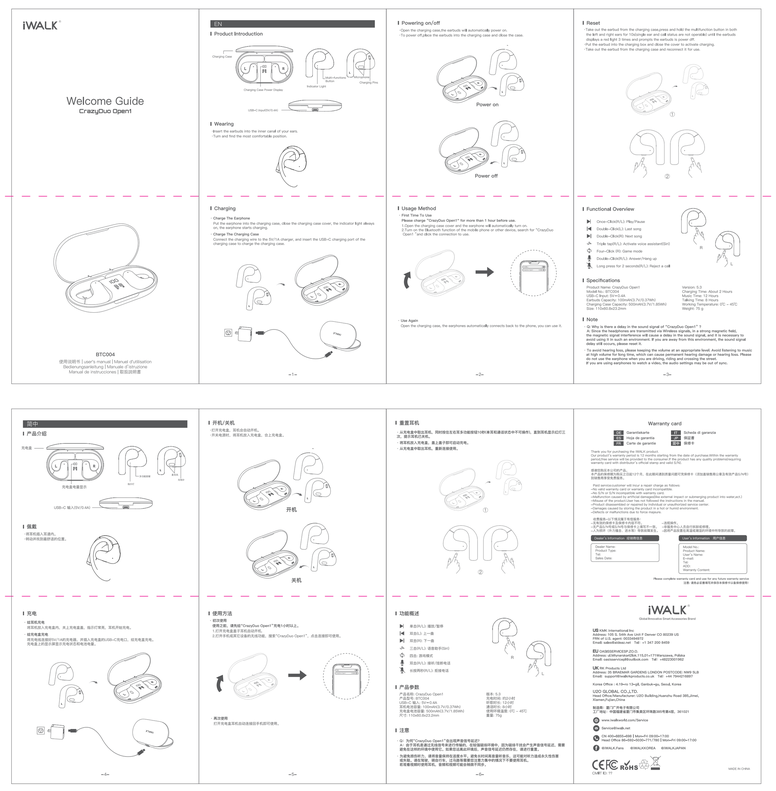

正面

背面

说明书	如图	BTC004	2024.02.23	张慧琳		谢祖乾		
部品名	部品番号	使用机种	日期	制图	确认	承认	产品颜色	

经营策略部	制造部	采购部	品牌策略部	物控部	营销部	品管部	原件保存
							研发部

厦门广开电子有限公司 U2O GLOBAL CO.,LTD.	页码	图纸规格	视图类型	公差等级	单位	比例
	1/1	A4		A	mm	1:1

FCC Warnning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection againstharmful interference in a residential installation. This equipment generates, uses and can radiateradio frequency energy and, if not installed and used in accordance with the instructions, maycause harmful interference to radio communications. However, there is no guarantee thatinterference will not occur in a particular installation. If this equipment does cause harmfulinterference to radio or television reception, which can be determined by turning the equipmentoff and on, the user is encouraged to try to correct the interference by one or more of thefollowing measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1)This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.