

标准书名		印刷部品规格书	版本	公差等级			
				基本尺寸	A级	B级	C级
注 意 事 项	● 图中 * 记号表示该尺寸为重点管控尺寸。 ● 量产前样品请先取得研发担当者之确认。 ● 使用模具在二具以上时各模具之检定品。 ● 交货者希望变更时，须事先取得研发担当者之承认。 ▲ 图中所用物料必须符合欧盟RoHS环保要求，送样时请附上检测报告。			5<L<10	±0.08	±0.10	±0.15
				10<L<20	±0.10	±0.15	±0.20
				20<L<40	±0.15	±0.20	±0.25

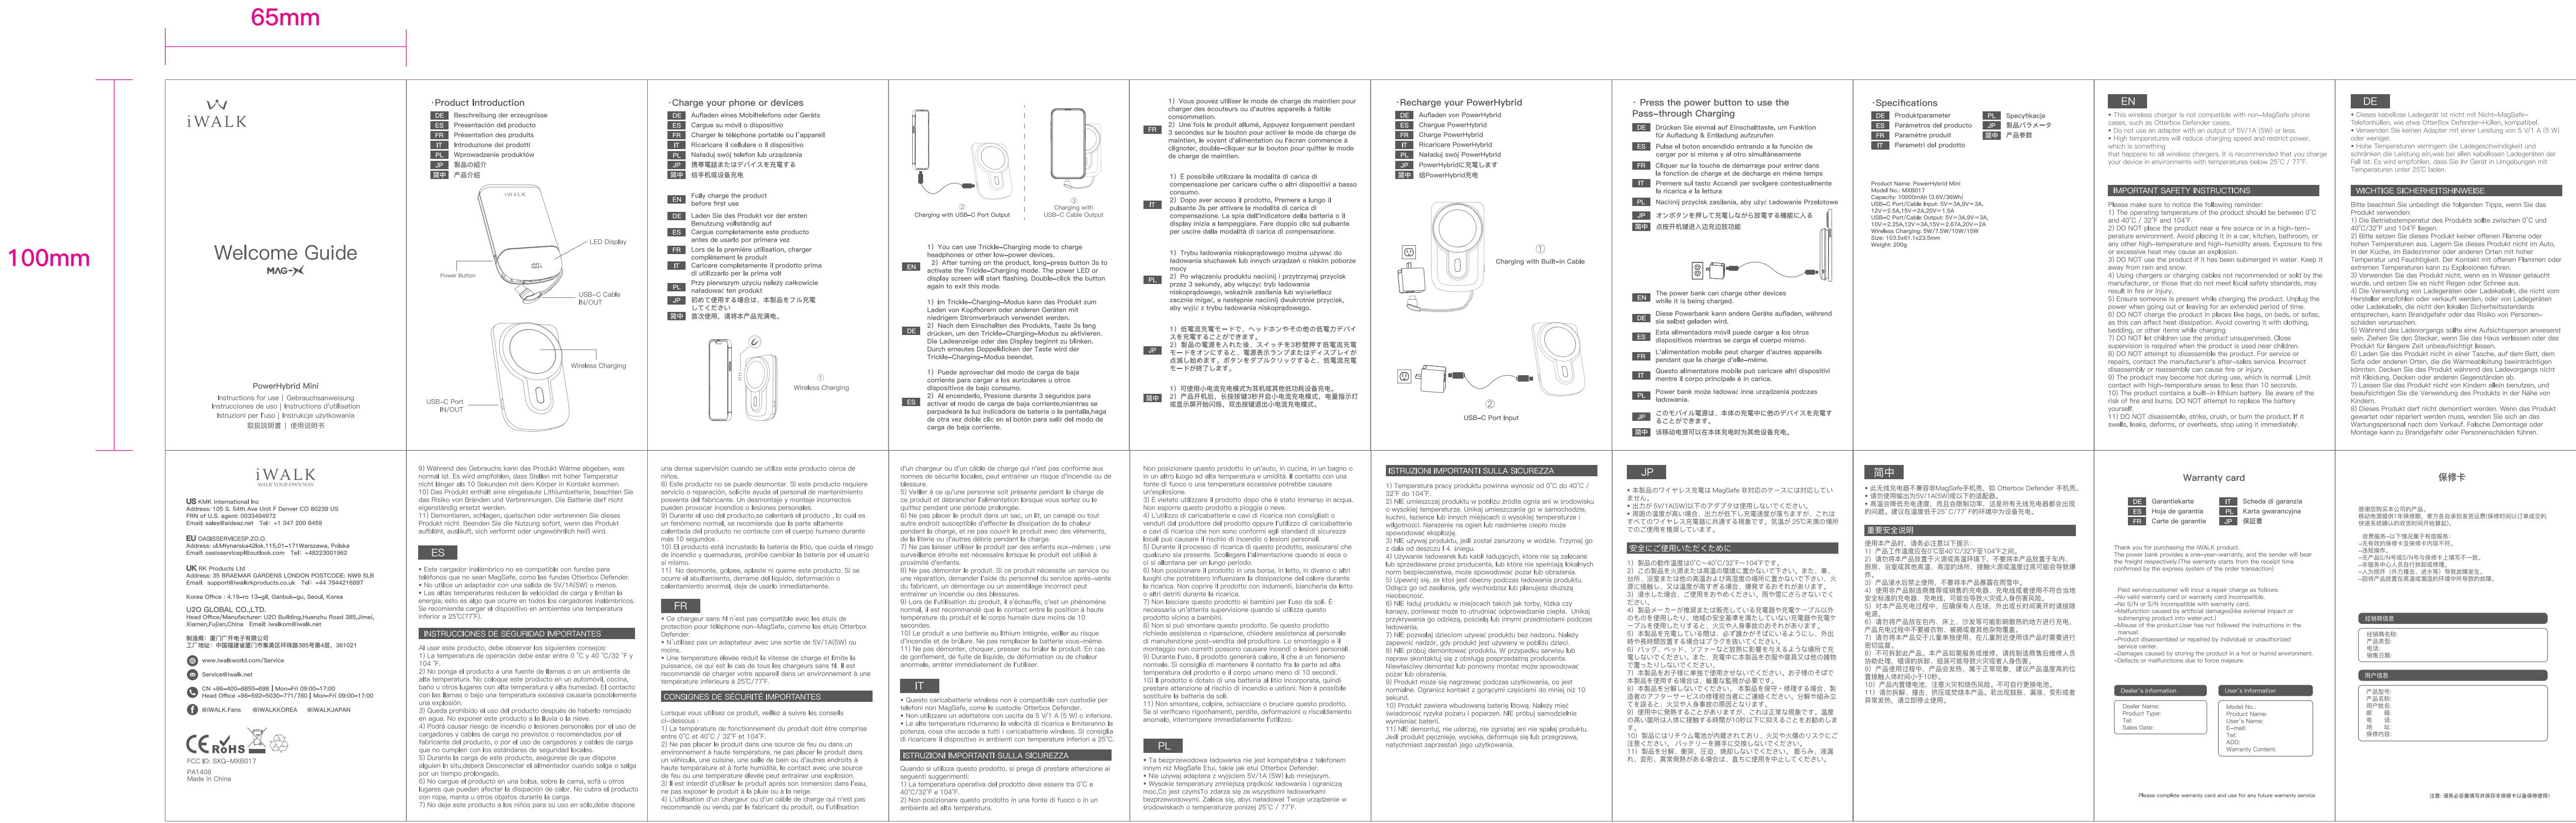
PA1408

8国语言说明书 风琴折


材质：105g铜版纸，双面印刷

印刷颜色：K 80，尺寸正负差为0.2mm

正面



反面

说明书	如图	MXB017	2024.10.18	张慧琳		谢祖乾		
部品名	部品番号	使用机种	日期	制图	确认	承认	产品颜色	
经营策略部	制造部	采购部	品牌策略部	物控部	营销部	品管部	原件保存	
							研发部	
厦门广开电子有限公司 U20 GLOBAL CO.,LTD. 页码 1/1				图纸规格	视图类型	公差等级	单位	比例
				A4		A	mm	1:1

标准书名		印刷部品规格书	版本	公差标准
注 意 事 项	● 刀模根据实际生产需求调整。 ● 量产前样品请先取得研发担当者之确认。 ● 严格按照图纸标准的工艺、材质、颜色进行生产。 ● 交货者希望变更时，须事先取得研发担当者之承认。 ▲ 图中所用物料必须符合欧盟RoHS环保要求，送样时请附上检测报告。			

天地盖：+1mm
卡盒、飞机盒：+0.5mm
EVA材质：±0.5mm
卡片：±0.2mm
说明书：±0.2mm
标签：±0.2mm
保护膜：±0.2mm

PA1302

User Tips

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.


正面

反面

卡片(刀模根据生产实际调整)

材质：150g铜版纸双面印刷覆亚膜
尺寸：100x70mm

K 80

	如图		2023.11.14	张慧琳		谢祖乾			
部品名	部品番号	使用机种	日期	制图	确认	承认			
经营策略部	制造部	采购部	品牌策略部	物控部	营销部	品管部	原件保存		
							研发部		
 厦门广开电子有限公司 U20 GLOBAL CO.,LTD.				页码	图纸规格	视图类型	单位	比例	
				1/1	A0		mm	1:1	