

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称 : 深圳市博泰盛华科技有限公司
CUSTOMER`S NAME

客 户 料 号 :
CUSTOMER`S P/N

产 品 规 格 : Y. A11. 404
PRODUCT SPEC

制 作 日 期 : 2025年6月4日
ISSUE DATE

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
李蓓	程杰	李博文	



东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

Address: No. 533, Fumin Middle Road, Dalang Town, Dongguan City

TEL: 0769-82866410

FAX: 0769-82866409

本承认书请在首批下单生产此机种前回签，否则视为贵方默认此承认书内所有内容


SPECIFICATION FOR APPROVAL

[illegible]

东莞市博红科技有限公司
DONGGUAN BOHONG TECHNOLOGY CO., LTD
SPECIFICATION FOR APPROVAL

CUSTOMER		CUSTOMER'S P/N	0
ISSUE DATE	2025年6月4日	PRODUCT SPEC	Y. A11. 404

2.DIMENSION: mm

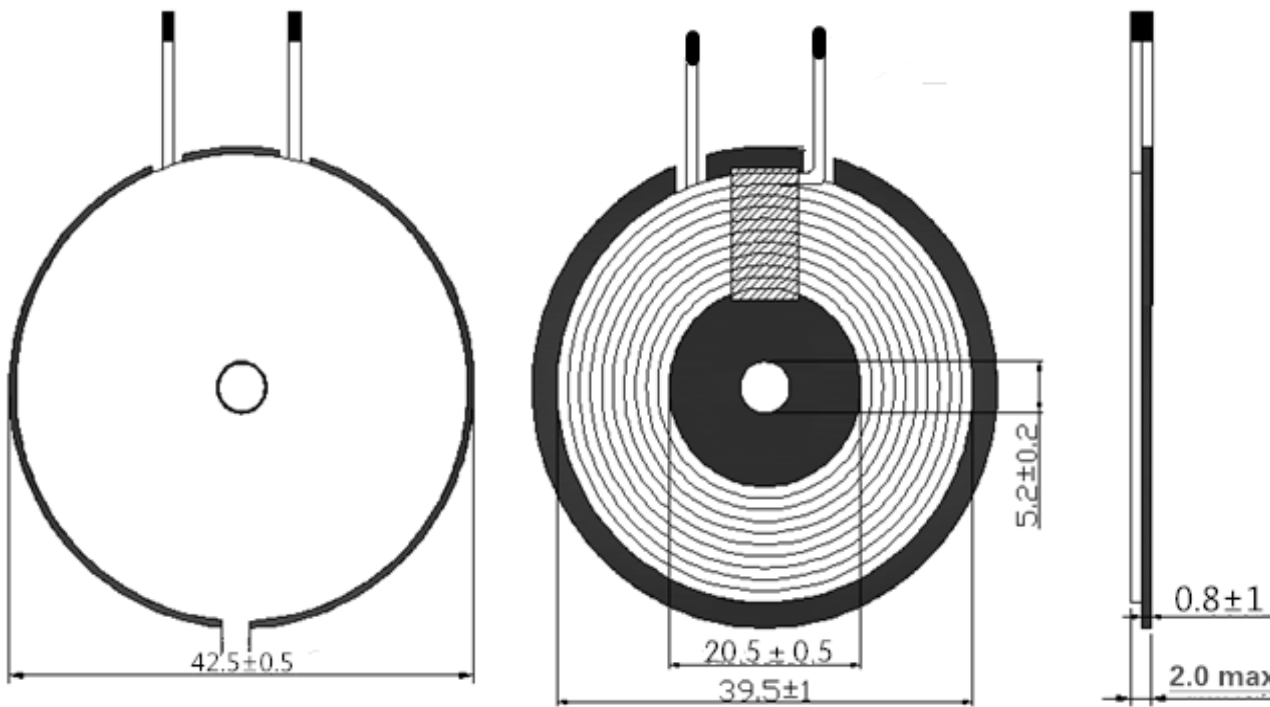

注:

1. 线圈居中贴平磁片，不可翘起；
2. 线圈表面整洁，无脏污；
3. 背贴双面胶，带拉手；
4. 包3mm高温胶带
5. 引线需扭线，剪锡头2MM

Notes:
Attach the coil to the center of the magnetic sheet and keep it flat; no warping is allowed.
The coil surface shall be clean and free of dirt.
Attach double-sided adhesive tape to the back with a pull tab.
Wrap with 3mm high-temperature tape.
Twist the lead wires and cut the solder ends to 2mm.
The coil temperature is 155° C, and the rated current is 1.8A.


6.线圈温度155°，额定电流1.8A

ISSUE	李蓓	CHECK	程杰	APPROVAL	李博文
BY		BY		BY	

东莞市博红科技有限公司
DONGGUAN BOHONG TECHNOLOGY CO., LTD
SPECIFICATION FOR APPROVAL

CUSTOMER		CUSTOMER'S P/N	0
ISSUE DATE	2025年6月4日	PRODUCT SPEC	Y. A11. 404

4.CIRCUIT DIAGRAM

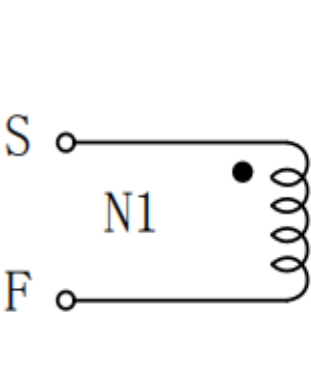

" • ": POLARITY/极性

5.WINDING

NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	Ø0.08*24*2P	10	/	CCW

6.CHARACTERISTIC

ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	6.5uH±5%	LCR1062 100KHz/1V AT 25°C±2°C

--	--	--	--

东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

CUSTOMER		CUSTOMER'S P/N	0
ISSUE DATE	2025年6月4日	PRODUCT SPEC	Y. A11. 404

备 忘 录

序号	内 容	处理方法	签 名	日 期
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				