

FCC Test Report

Report No.: 2405T74420EA-M1

Applicant: FEIT ELECTRIC COMPANY

Address: 4901 GREGG ROAD PICO RIERA,CA

Product Name: Tape Light

Product Model: TAPE192/CCT/REM

MultipleModels: N/A

Trade Mark: Commercial Electric

FCC ID: SYW-TAPE192CCT

Standards: FCC CFR Title 47 Part 15C (§15.231)

Test Date: 2024-07-15

Test Result: Complied

Report Date: 2024-08-13

Reviewed by:

Frank Yin

Approved by

Jacob Kong

Frank Yin
Project Engineer

Jacob Kong
Manager

Prepared by:

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen,
Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

Announcement

1. This test report shall not be reproduced except in full, without the written approval of World Alliance Testing & Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Report No.	Issued Date	Description
00	2405T74420EA	2024-07-23	Original
01	2405T74420EA-M1	2024-08-13	Change the product model to TAPE192/CCT/REM

Note: this is a modify report that change the product model according to the applicant's requirement, current version 01 replace the previous version 00, the previous version 00 changed to invalid when current version issued.

Contents

1	General Information	4
1.1	Client Information	4
1.2	Product Description of EUT	4
1.3	Antenna information	4
1.4	Related Submittal(s)/Grant(s).....	4
1.5	Measurement Uncertainty	5
1.6	Laboratory Location.....	5
1.7	Test Methodology	5
2	Description of Measurement.....	6
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment	6
2.3	Test Setup.....	7
2.4	Test Procedure	8
2.5	Measurement Method.....	9
2.6	Measurement Equipment	10
3	Test Results	11
3.1	Test Summary.....	11
3.2	Limit	12
3.3	AC Line Conducted Emissions Test Data.....	13
3.4	Radiated emission Test Data.....	14
3.5	Duty Cycle	20
3.6	Deactivation Testing	23
3.7	Bandwidth Test Data.....	24
4	Test Setup Photo.....	25
5	E.U.T Photo	26

1 General Information

1.1 Client Information

Applicant:	FEIT ELECTRIC COMPANY
Address:	4901 GREGG ROAD PICO RIERA,CA
Manufacturer:	FEIT ELECTRIC COMPANY
Address:	4901 GREGG ROAD PICO RIERA,CA

1.2 Product Description of EUT

The EUT is Tape Light that contains 433.92MHz transmitter, this report covers the full testing of the 433.92MHz transmitter.

Sample Serial Number	2KZC-1 & 2KZC-2 (assigned by WATC)
Sample Received Date	2024-05-08
Sample Status	Good Condition
Frequency Range	433.92MHz
Maximum E-field Strength:	64.08dBuV/m@3m
Modulation Technology	ASK
Antenna Gain [#]	0dBi
Spatial Streams [#]	1TX
Power Supply	DC 1.5V*2 AAA battery
Adapter Information	N/A
Modification	Sample No Modification by the test lab

1.3 Antenna information

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
Device Antenna information:	
The antenna is an internal antenna which cannot replace by end-user. Please see product internal photos for details.	

1.4 Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s)

1.5 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions		±3.14dB
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Bandwidth		0.34%
Note 1: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. Note 2: The Decision Rule is based on simple acceptance with ISO Guide 98-4:2012 Clause 8.2 (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)		

1.6 Laboratory Location

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: ga@watc.com.cn

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

ANSI C63.10-2020

2 Description of Measurement

2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	433.92	/	/	/	/
According to ANSI C63.10-2013 chapter 5.6.1 Table 11 requirement, select middle channel, in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
/	/	1	433.92	/	/


Worst-Case Configuration:
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report
According to applicant, all the keys with same power setting, the EUT was configured to an engineering mode that with continue transmitting when power on for the testing.
All keys were evaluated the duty cycle, only the worst case duty cycle was recorded in report.

2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

2.3 Test Setup


1) Conducted emission measurement:

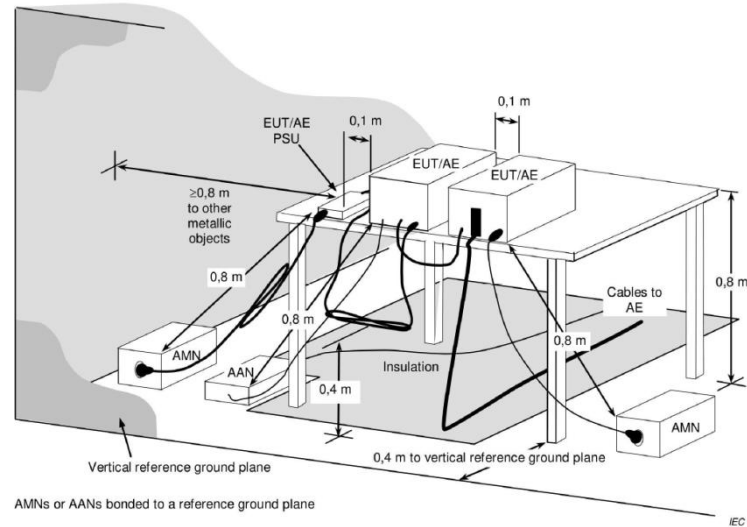


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:

Below 30MHz (3m SAC)

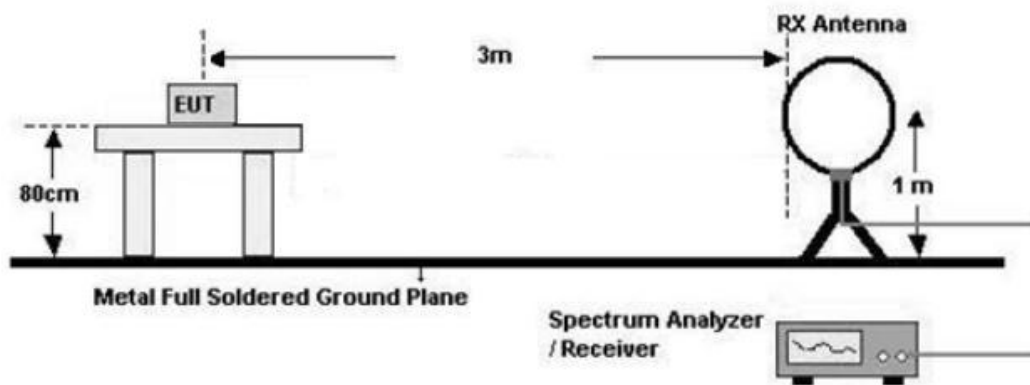

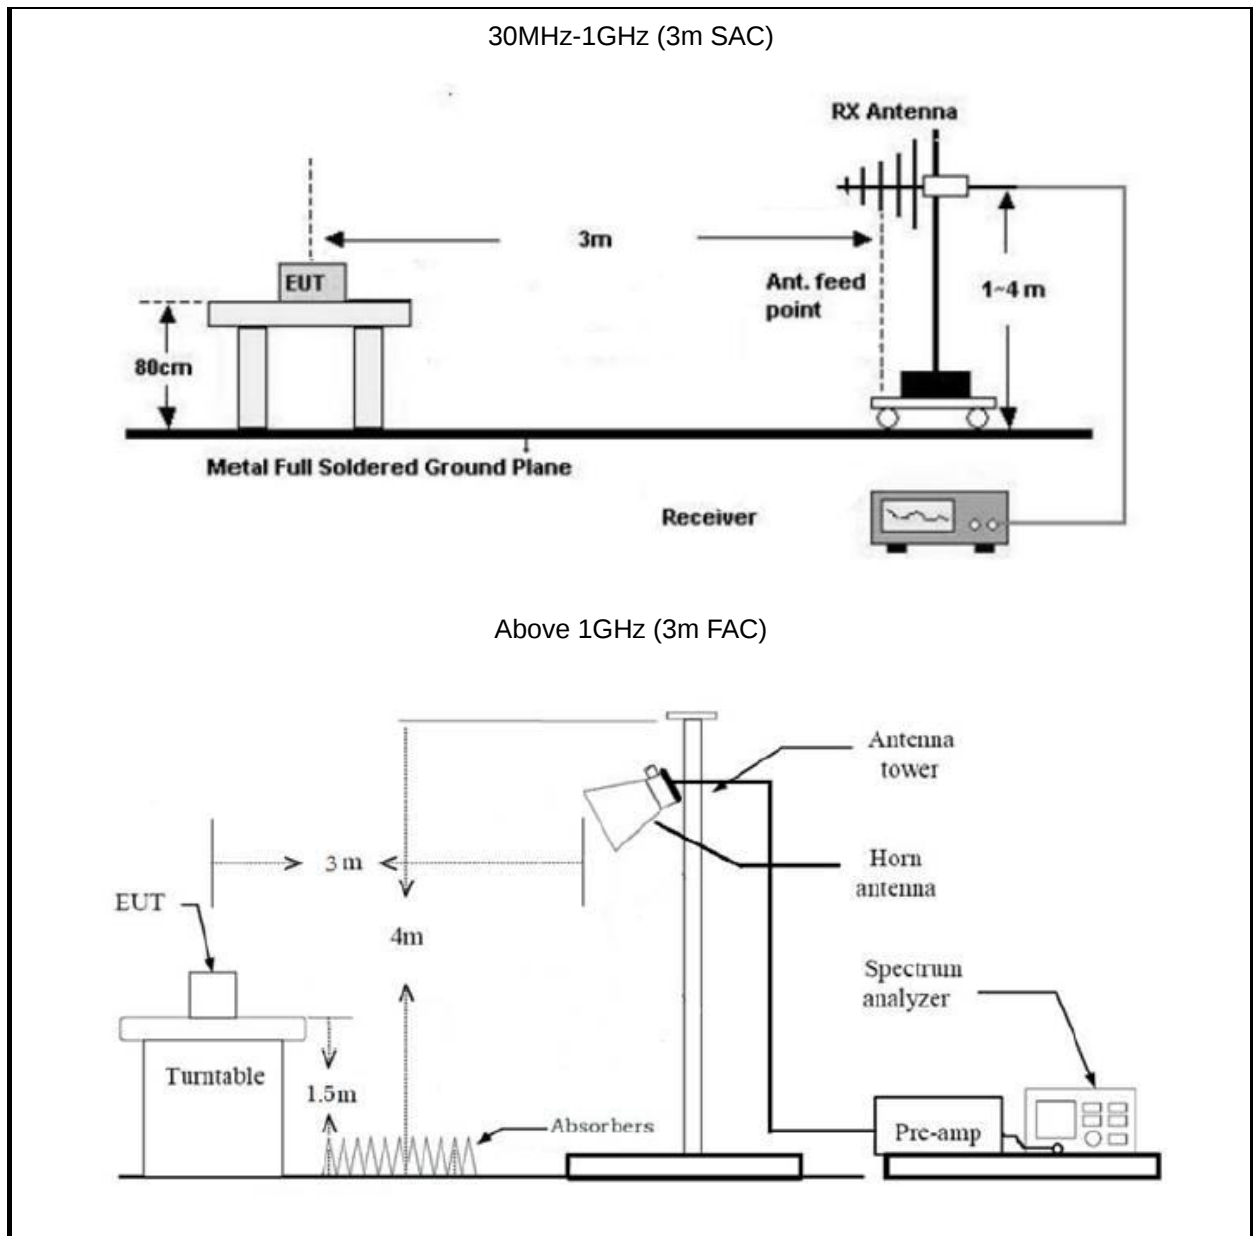

2.4 Test Procedure

Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

Radiated Emission Procedure:

a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30

MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.

2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above 18GHz).
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

Bandwidth Test:

1. Use the same setup for radiated above 1GHz, found the maximum fundamental level.
2. Change the spectrum analyzer setting for bandwidth testing
3. Test the bandwidth and record the result

2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2020 Section 6.2
20dB Emission Bandwidth	ANSI C63.10-2020 Section 6.9.2
Deactivation Test	ANSI C63.10-2013 Section 7.4
Field strength of fundamental and Radiated emission	ANSI C63.10-2013 Section 6.3&6.4&6.5&6.6

2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2024/6/4	2025/6/3
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2024/6/4	2025/6/3
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2024/6/4	2025/6/3
COM-POWER	preamplifier	PAM-118A	18040152	2024/6/4	2025/6/3
BACL	Loop Antenna	1313-1A	4010611	2024/2/7	2027/2/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2026/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2026/7/5
N/A	Coaxial Cable	N/A	NO.9	2024/6/4	2025/6/3
N/A	Coaxial Cable	N/A	NO.14	2024/6/4	2025/6/3
N/A	Coaxial Cable	N/A	NO.15	2024/6/4	2025/6/3
N/A	Coaxial Cable	N/A	NO.16	2024/6/4	2025/6/3
N/A	Coaxial Cable	N/A	NO.17	2024/6/4	2025/6/3
Audix	Test Software	E3	191218 V9	/	/

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary

FCC/ISED Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207(a)	AC Line Conducted Emissions	Compliance
FCC §15.231(c)	20dB Emission Bandwidth	Compliance
FCC §15.231(a)	Deactivation Testing	Compliance
FCC §15.205, §15.209, §15.231(b)	Field strength of fundamental and Radiated emission	Compliance

3.2 Limit

Test items	Limit																					
AC Line Conducted Emissions	See details §15.207 (a)																					
20dB Emission Bandwidth	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz.																					
Deactivation Testing	A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.																					
Field strength of fundamental and Radiated emission	In addition to the provisions of § 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:																					
	<table><tr><th>Fundamental frequency (MHz)</th><th>Field strength of fundamental (microvolts/meter)</th><th>Field strength of spurious emissions (microvolts/meter)</th></tr><tr><td>40.66–40.70</td><td>2,250</td><td>225</td></tr><tr><td>70–130</td><td>1,250</td><td>125</td></tr><tr><td>130–174</td><td>¹ 1,250 to 3,750</td><td>¹ 125 to 375</td></tr><tr><td>174–260</td><td>3,750</td><td>375</td></tr><tr><td>260–470</td><td>¹ 3,750 to 12,500</td><td>¹ 375 to 1,250</td></tr><tr><td>Above 470</td><td>12,500</td><td>1,250</td></tr></table>	Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)	40.66–40.70	2,250	225	70–130	1,250	125	130–174	¹ 1,250 to 3,750	¹ 125 to 375	174–260	3,750	375	260–470	¹ 3,750 to 12,500	¹ 375 to 1,250	Above 470	12,500	1,250
	Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)																			
	40.66–40.70	2,250	225																			
	70–130	1,250	125																			
	130–174	¹ 1,250 to 3,750	¹ 125 to 375																			
	174–260	3,750	375																			
	260–470	¹ 3,750 to 12,500	¹ 375 to 1,250																			
	Above 470	12,500	1,250																			
	¹ Linear interpolations.																					
The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.																						
Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in § 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of § 15.205 shall be demonstrated using the measurement instrumentation specified in that section.																						
The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.																						

3.3 AC Line Conducted Emissions Test Data

Not Applicable, the device only powered by battery

3.4 Radiated emission Test Data


9 kHz-30MHz:


Test Date:	2024-07-15	Test By:	Bard Huang
Environment condition:	Temperature: 24.5°C; Relative Humidity:65%; ATM Pressure: 100.2kPa		

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:

Test Date:	2024-07-15	Test By:	Bard Huang
Environment condition:	Temperature: 24.5°C; Relative Humidity:65%; ATM Pressure: 100.2kPa		

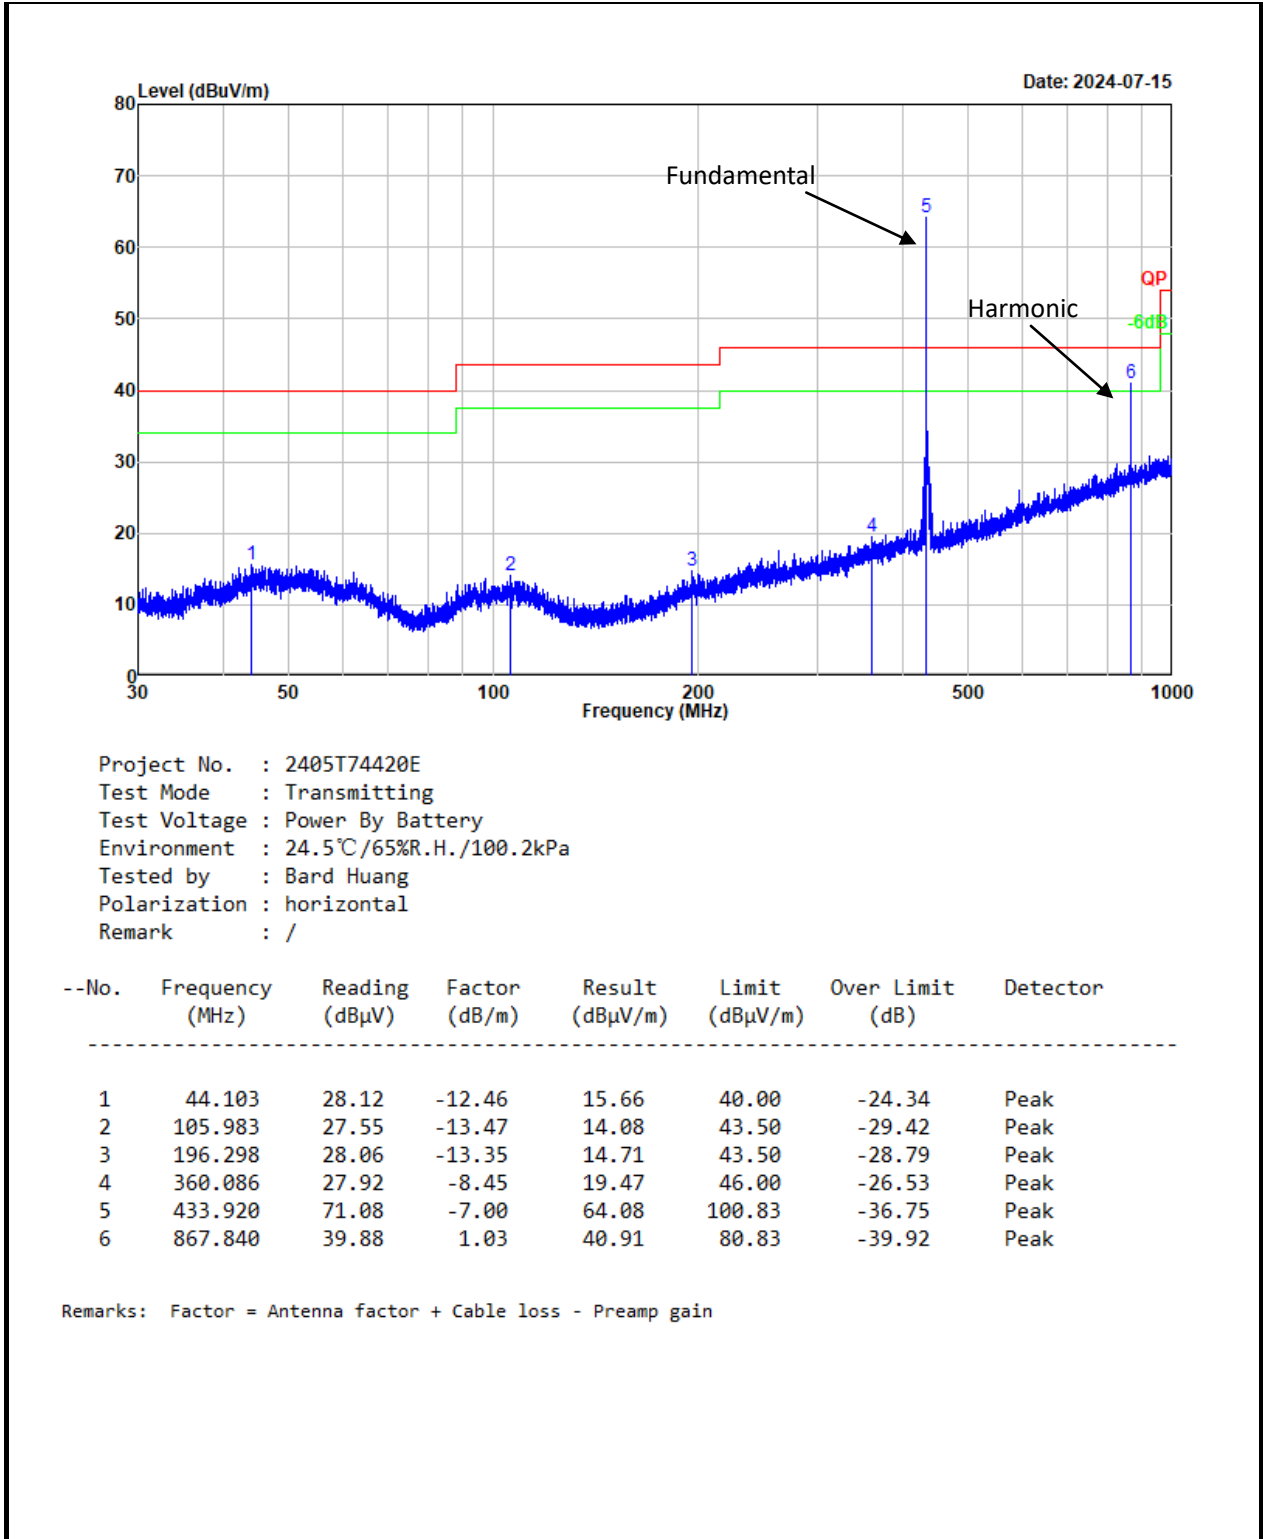

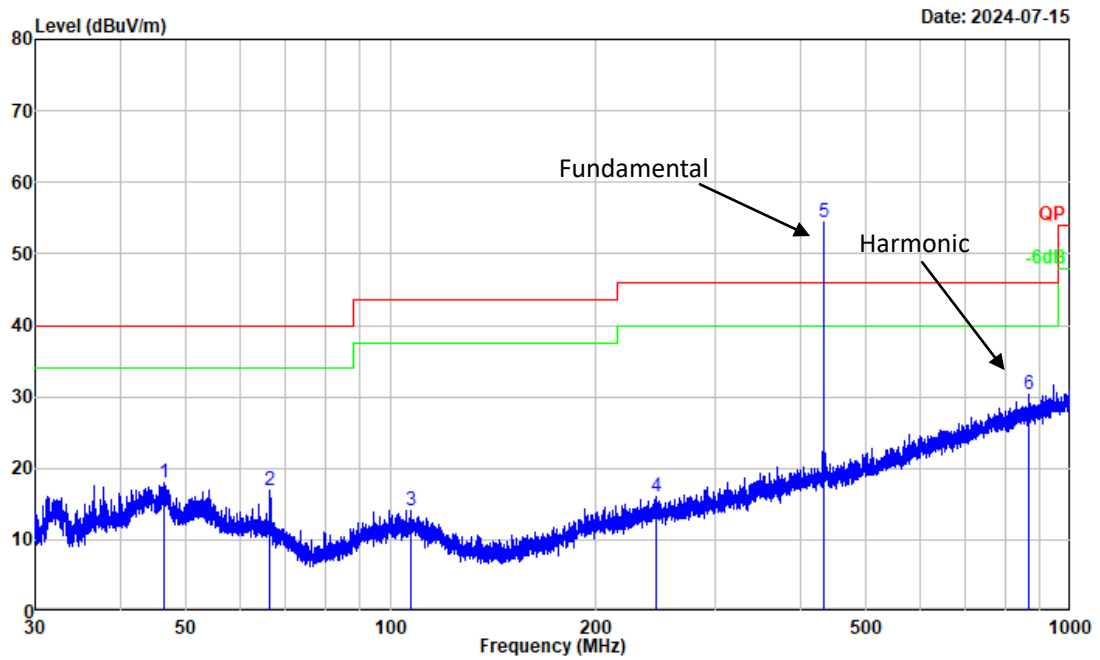

Project No. : 2405T74420E
Test Mode : Transmitting
Test Voltage : Power By Battery
Environment : 24.5°C/65%R.H./100.2kPa
Tested by : Bard Huang
Polarization : vertical
Remark : /

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	46.485	30.28	-12.23	18.05	40.00	-21.95	Peak
2	66.331	31.40	-14.50	16.90	40.00	-23.10	Peak
3	107.198	27.64	-13.54	14.10	43.50	-29.40	Peak
4	246.231	27.88	-11.74	16.14	46.00	-29.86	Peak
5	433.920	61.50	-7.00	54.50	100.83	-46.33	Peak
6	867.840	29.37	1.03	30.40	80.83	-50.43	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:


Result = Reading + Factor

Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Result – Limit

Above 1GHz:


Test Date:	2024-07-15	Test By:	Bard Huang
Environment condition:	Temperature: 24.5°C; Relative Humidity:65%; ATM Pressure: 100.2kPa		

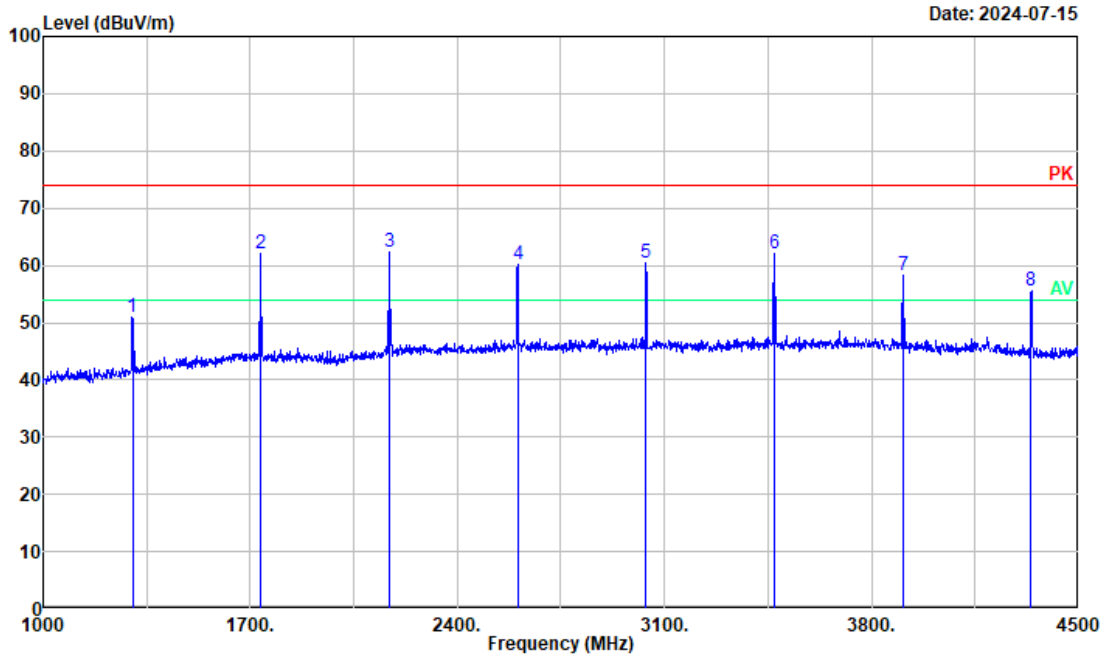

Project No. : 2405T74420E
 Test Mode : Transmitting
 Test Voltage : Power By Battery
 Environment : 24.5°C/65%R.H./100.2kPa
 Tested by : Bard Huang
 Polarization : horizontal
 Remark : /

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	1301.760	56.35	-5.52	50.83	74.00	-23.17	Peak
2	1735.680	65.30	-3.12	62.18	80.83	-18.65	Peak
3	2169.600	65.71	-3.34	62.37	80.83	-18.46	Peak
4	2603.520	62.90	-2.65	60.25	80.83	-20.58	Peak
5	3037.440	63.60	-3.05	60.55	80.83	-20.28	Peak
6	3471.360	64.72	-2.69	62.03	80.83	-18.80	Peak
7	3905.280	60.94	-2.80	58.14	74.00	-15.86	Peak
8	4339.200	59.44	-3.88	55.56	74.00	-18.44	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

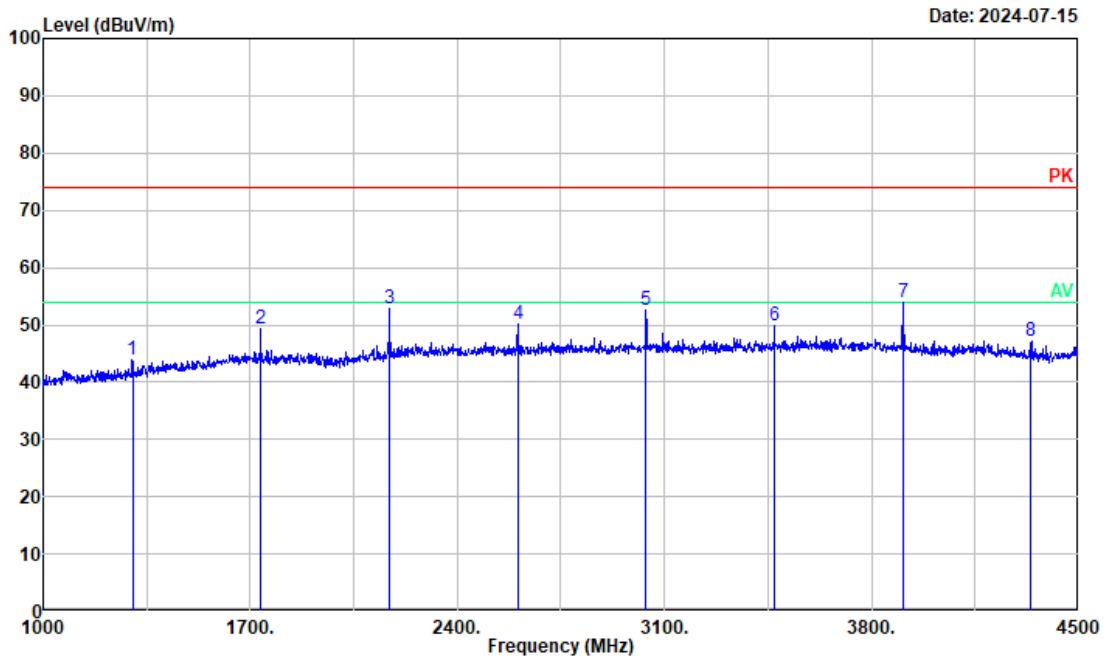

Project No. : 2405T74420E
Test Mode : Transmitting
Test Voltage : Power By Battery
Environment : 24.5°C/65%R.H./100.2kPa
Tested by : Bard Huang
Polarization : vertical
Remark : /

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector

1	1301.760	49.35	-5.52	43.83	74.00	-30.17	Peak
2	1735.680	52.53	-3.12	49.41	80.83	-31.42	Peak
3	2169.600	56.17	-3.34	52.83	80.83	-28.00	Peak
4	2603.520	52.72	-2.65	50.07	80.83	-30.76	Peak
5	3037.440	55.63	-3.05	52.58	80.83	-28.25	Peak
6	3471.360	52.67	-2.69	49.98	80.83	-30.85	Peak
7	3905.280	56.86	-2.80	54.06	74.00	-19.94	Peak
8	4339.200	51.06	-3.88	47.18	74.00	-26.82	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:

Result = Reading + Factor

Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Result – Limit

The emission levels of other frequencies that were lower than the limit 20dB not show in test report.

Field strength of average:

Frequency (MHz)	Peak level (dBμV)	Polar	Duty cycle Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
433.920	64.08	horizontal	-8.91	55.17	80.83	-25.66	Fundamental
433.920	54.50	vertical	-8.91	45.59	80.83	-35.24	Fundamental
867.840	40.91	horizontal	-8.91	32.00	60.83	-28.83	Harmonic
1301.760	50.83	horizontal	-8.91	41.92	54.00	-12.08	Harmonic
1735.680	62.18	horizontal	-8.91	53.27	60.83	-7.56	Harmonic
2169.600	62.37	horizontal	-8.91	53.46	60.83	-7.37	Harmonic
2603.520	60.25	horizontal	-8.91	51.34	60.83	-9.49	Harmonic
3037.440	60.55	horizontal	-8.91	51.64	60.83	-9.19	Harmonic
3471.360	62.03	horizontal	-8.91	53.12	60.83	-7.71	Harmonic
3905.280	58.14	horizontal	-8.91	49.23	54.00	-4.77	Harmonic
4339.200	55.56	horizontal	-8.91	46.65	54.00	-7.35	Harmonic
867.840	30.40	vertical	-8.91	21.49	60.83	-39.34	Harmonic
1301.76	43.83	vertical	-8.91	34.92	54.00	-19.08	Harmonic
1735.680	49.41	vertical	-8.91	40.50	60.83	-20.33	Harmonic
2169.600	52.83	vertical	-8.91	43.92	60.83	-16.91	Harmonic
2603.520	50.07	vertical	-8.91	41.16	60.83	-19.67	Harmonic
3037.440	52.58	vertical	-8.91	43.67	60.83	-17.16	Harmonic
3471.360	49.98	vertical	-8.91	41.07	60.83	-19.76	Harmonic
3905.280	54.06	vertical	-8.91	45.15	54.00	-8.85	Harmonic
4339.200	47.18	vertical	-8.91	38.27	54.00	-15.73	Harmonic

Remark:

Average Amplitude= Peak level + Duty Cycle Factor

Margin = Average Amplitude - Limit

3.5 Duty Cycle

Test Date:	2024-07-15	Test By:	Bard Huang
Environment condition:	Temperature: 24.5°C; Relative Humidity:65%; ATM Pressure: 100.2kPa		


Subpulse	Ton Duration [ms]	Number of pulse	Total On time [ms]	Period of the pulse train [ms]	Duty Cycle [%]
1	8.3188	1	29.71014	82.826	35.87
2	0.52174	41			
Duty cycle Factor[dB]:		-8.91			


Remark:

Total On time= Ton1*N1+Ton2*N2

Duty Cycle=(Total On time)/Tp


Duty Cycle Factor=20*log(Duty Cycle)

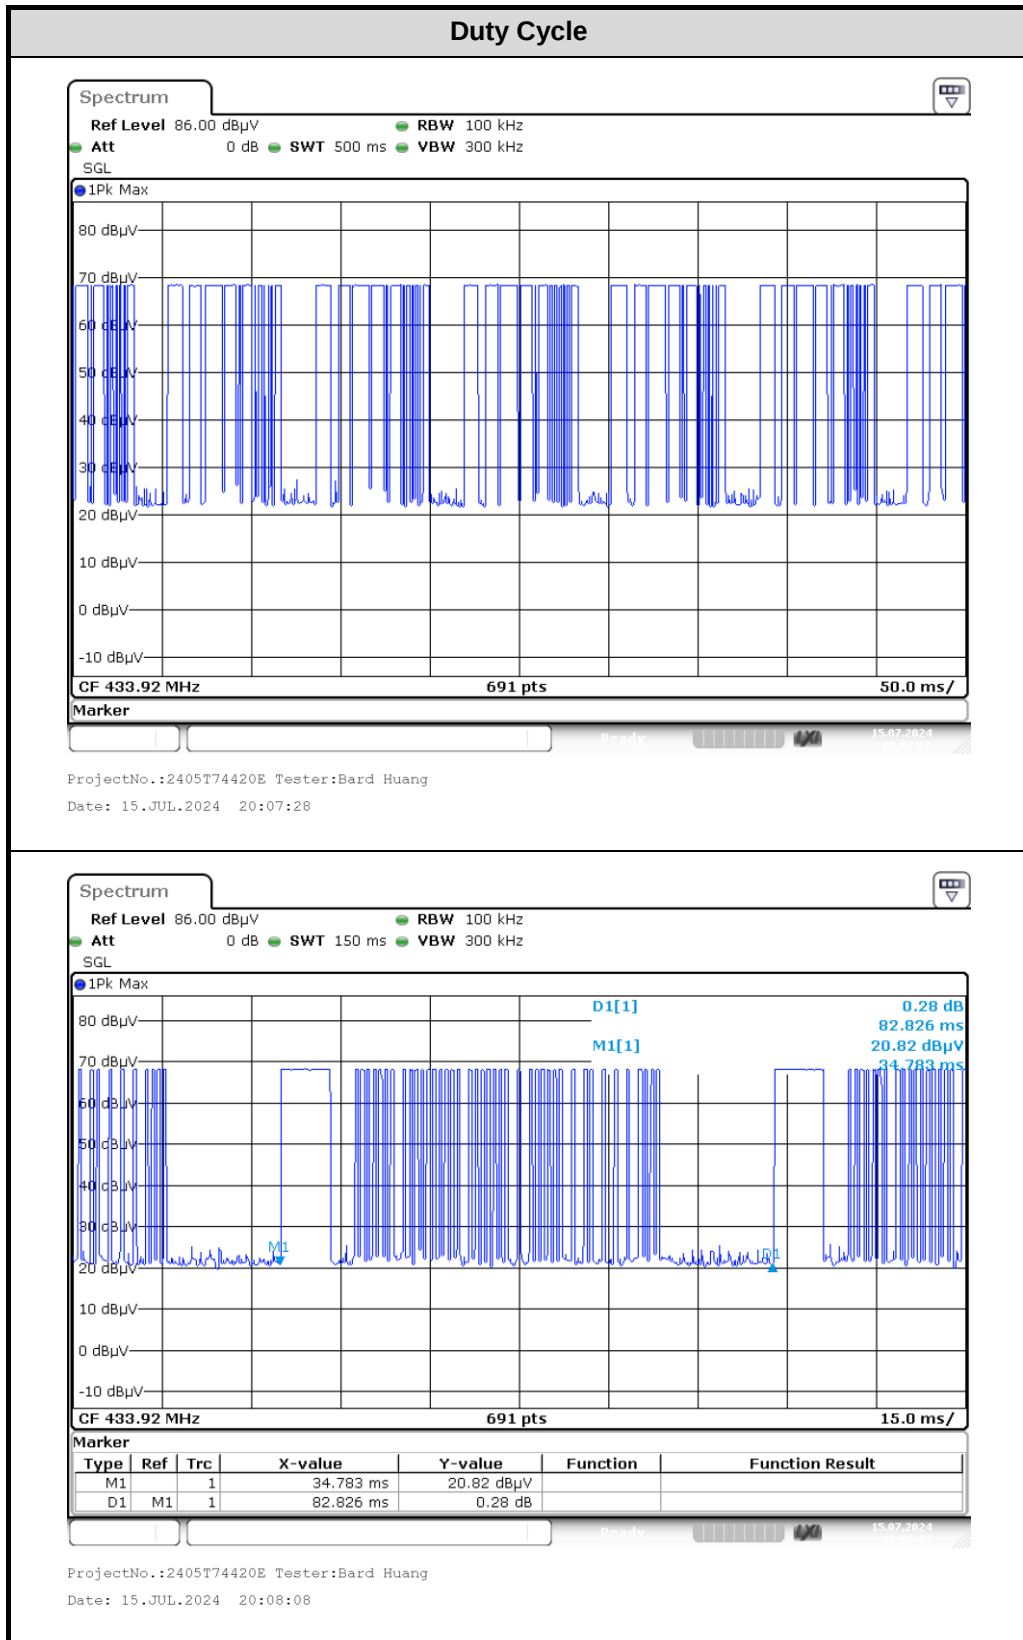

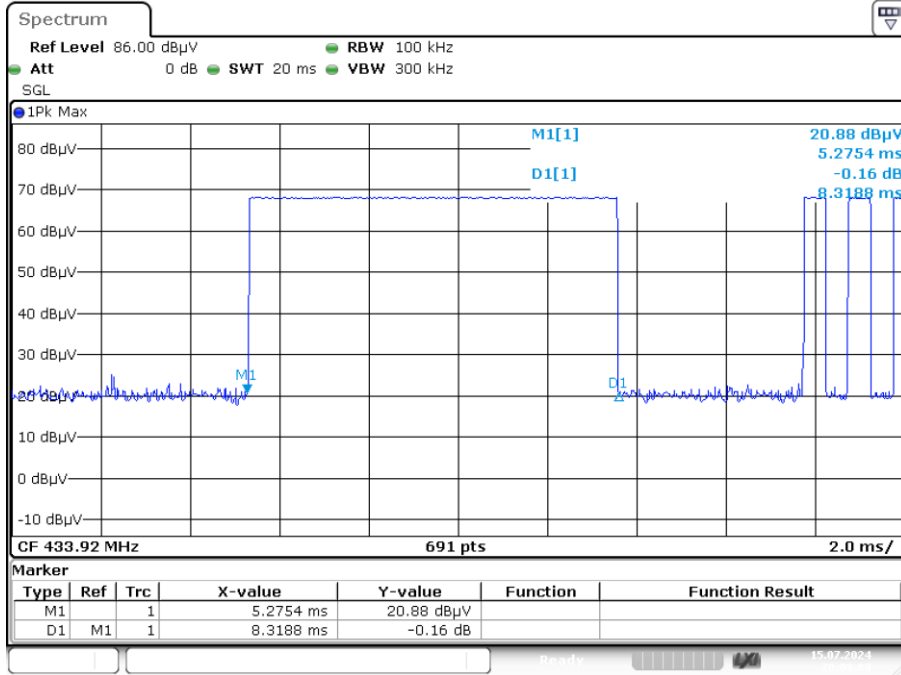

ProjectNo.:2405T74420E Tester:Bard Huang

Date: 15.JUL.2024 20:09:08

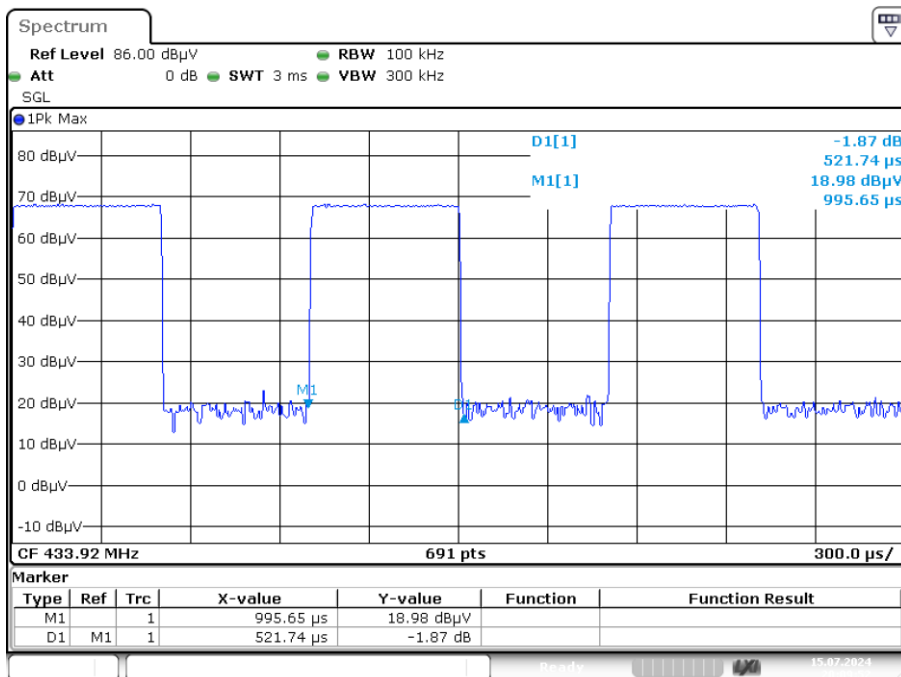

ProjectNo.:2405T74420E Tester:Bard Huang


Date: 15.JUL.2024 20:09:52

3.6 Deactivation Testing

Test Date:	2024-07-15	Test By:	Bard Huang
Environment condition:	Temperature: 24.5°C; Relative Humidity:65%; ATM Pressure: 100.2kPa		

Channel Frequency [MHz]	Deactivation time[s]	Limit[s]	Verdict
433.92	0.609	≤5	Pass

Test Plots:

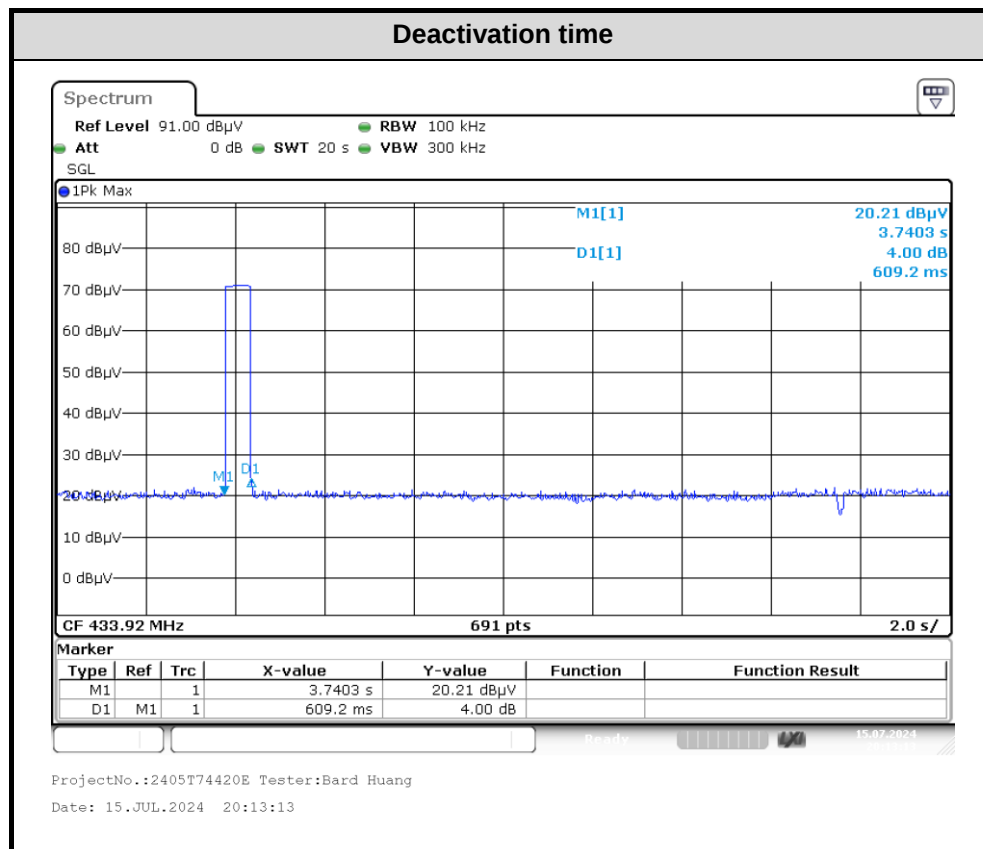


3.7 Bandwidth Test Data

Test Date:	2024-07-15	Test By:	Bard Huang
Environment condition:	Temperature: 24.5°C; Relative Humidity:65%; ATM Pressure: 100.2kPa		

Channel Frequency [MHz]	20dB BW [kHz]	Limit[kHz]	Verdict
433.92	6.15	1084.8	Pass

Note: Limit $\leq$ Center frequency*0.25%=433.92MHz*0.25%=1.0848MHz

Test Plots:

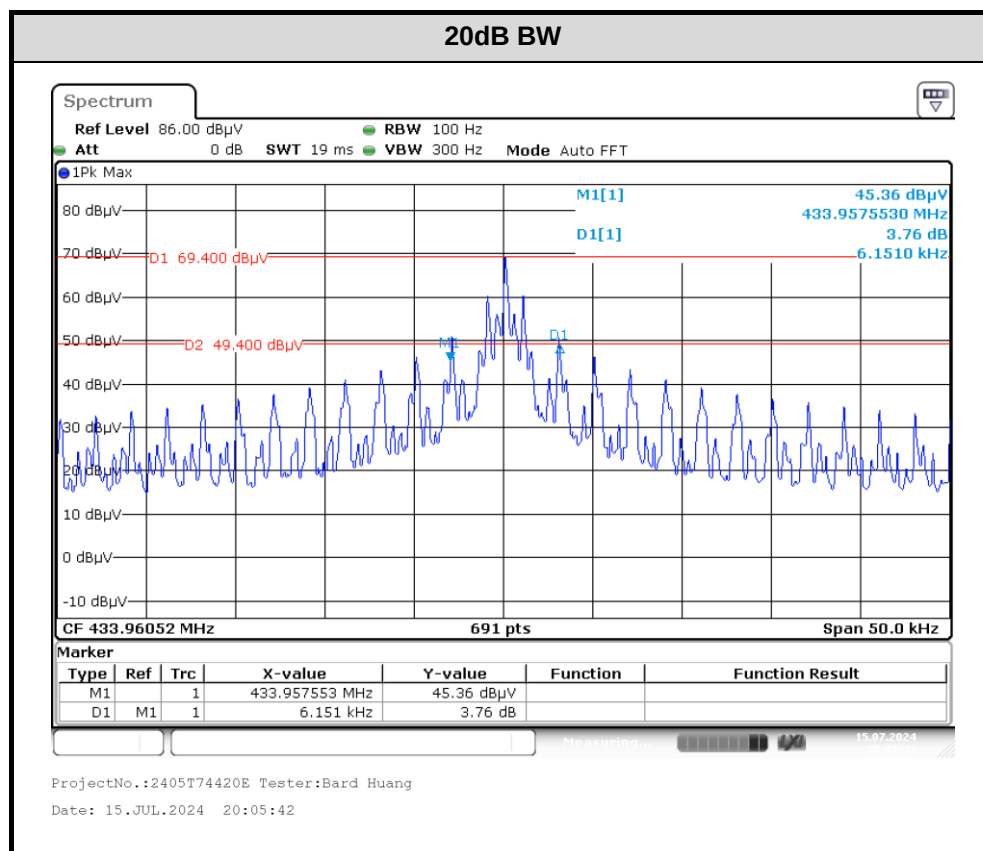

4 Test Setup Photo

Please refer to the attachment 2405T74420E-M1 Test Setup photo.

5 E.U.T Photo

Please refer to the attachment 2405T74420E-M1 External photo and 2405T74420E-M1 Internal photo.

---End of Report---