

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)



## Test Report

Product Name: 27 MHz TRANSMITTER

FCC ID: SZ23351T27

Applicant:

**PLANET TOYS (HK) LTD.  
1107 CHINACHEM GOLDEN PLAZA  
77 MODY ROAD, TSIMSHATSUI EAST  
KOWLOON  
HONG KONG**

APPLICANT: PLANET TOYS (HK) LTD.

FCC ID: SZ23351T27

REPORT #: V:\P\PLANET\_SZ2\2408UT5A\2408UT5ATestReport.doc

COVER SHEET

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TABLE OF CONTENTS LIST

**APPLICANT:** PLANET TOYS (HK) LTD.

**FCC ID:** SZ23351T27

### TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST  
PAGE 2.....TEST PROCEDURE  
PAGE 3.....RADIATION INTERFERENCE TEST DATA  
PAGE 4.....OCCUPIED BANDWIDTH  
PAGE 5.....OCCUPIED BANDWIDTH PLOT

### EXHIBITS INCLUDING:

BLOCK DIAGRAM  
SCHEMATIC  
INSTRUCTION MANUAL  
LABEL SAMPLE  
LABEL LOCATION  
EXTERNAL PHOTOGRAPHS  
INTERNAL PHOTOGRAPHS  
OPERATIONAL DESCRIPTION  
TEST SET UP PHOTOGRAPHS

APPLICANT: PLANET TOYS (HK) LTD.

FCC ID: SZ23351T27

REPORT #: V:\P\PLANET\_SZ2\2408UT5A\2408UT5ATestReport.doc

TABLE OF CONTENTS

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## EMC Equipment List

| Device                        | Manufacturer     | Model     | Serial Number            | Cal/Char Date  | Due Date |
|-------------------------------|------------------|-----------|--------------------------|----------------|----------|
| 3/10-Meter OATS               | TEI              | N/A       | N/A                      | Listed 3/27/04 | 3/26/07  |
| 3-Meter OATS                  | TEI              | N/A       | N/A                      | Listed 1/11/06 | 1/10/09  |
| Biconnical Antenna            | Eaton            | 94455-1   | 1057                     | CAL 12/12/05   | 12/12/07 |
| Biconnical Antenna            | Eaton            | 94455-1   | 1096                     | CAL 8/17/04    | 8/17/06  |
| Biconnical Antenna            | Electro-Metrics  | BIA-25    | 1171                     | CAL 4/29/05    | 4/29/07  |
| Blue Tower Quasi-Peak Adapter | HP               | 85650A    | 2811A01279               | CAL 4/13/05    | 4/13/07  |
| Blue Tower RF Preselector     | HP               | 85685A    | 2926A00983               | CAL 9/5/05     | 9/5/07   |
| Blue Tower Spectrum Analyzer  | HP               | 8568B     | 2928A04729<br>2848A18049 | CAL 4/13/05    | 4/13/07  |
| LISN                          | Electro-Metrics  | ANS-25/2  | 2604                     | CAL 8/27/04    | 8/27/06  |
| LISN                          | Electro-Metrics  | EM-7820   | 2682                     | CAL 4/28/05    | 4/28/07  |
| Log-Periodic Antenna          | Eaton            | 96005     | 1243                     | CAL 12/14/05   | 12/14/07 |
| Passive Loop Antenna          | EMC Test Systems | EMCO 6512 | 9706-1211                | CHAR 7/10/04   | 7/10/06  |

APPLICANT: PLANET TOYS (HK) LTD.

FCC ID: SZ23351T27

REPORT #: V:\P\PLANET\_SZ2\2408UT5A\2408UT5ATestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## TEST PROCEDURE

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.4-2003 using a HEWLETT PACKARD spectrum analyzer with a pre-selector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 80°C with a humidity of 76%.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

**Example:**

Freq (MHz) METER READING + ACF = FS  
33            20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

**ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES:** The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: PLANET TOYS (HK) LTD.  
FCC ID: SZ23351T27  
REPORT #: V:\P\PLANET\_SZ2\2408UT5A\2408UT5ATestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

**APPLICANT:** PLANET TOYS (HK) LTD.  
**FCC ID:** SZ23351T27  
**NAME OF TEST:** RADIATION INTERFERENCE  
**RULES PART NO.:** 15.227

**REQUIREMENTS:** CARRIER FREQUENCY WILL NOT EXCEEDS 80 dBuV/m AT 3M.  
OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

|               |                                  |
|---------------|----------------------------------|
| 30 - 88 MHz   | 40.0 dBuV/M MEASURED AT 3 METERS |
| 88 - 216 MHz  | 43.5 dBuV/M                      |
| 216 - 960 MHz | 46.0 dBuV/m                      |
| ABOVE 960 MHz | 54.0 dBuV/m                      |

## TEST DATA:

| Tuned<br>Frequency<br>MHz | Emission<br>Frequency<br>MHz | Meter<br>Reading<br>dBuV | Ant.<br>Pol | Coax<br>Loss<br>dB | Correction<br>Factor<br>dB | Field<br>Strength<br>dBuV/m | Margin<br>dB |
|---------------------------|------------------------------|--------------------------|-------------|--------------------|----------------------------|-----------------------------|--------------|
| 27.1                      | 27.13                        | 37.3                     | H           | 0.80               | 13.76                      | 51.86                       | 28.14        |
| 27.1                      | 27.13                        | 39.8                     | V           | 0.80               | 12.44                      | 53.04                       | 26.96        |

No harmonics found.

SAMPLE CALCULATION: FSdBuV/m = MR (dBuV) + ACFdB.

All measurements below 30 MHz were taken using an EMC Test Systems Passive Loop Antenna.

**TEST PROCEDURE:** The procedure used was ANSI STANDARD C63.4-2003. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The UUT was tested in 3 orthogonal planes.

**TEST RESULTS:** THE UNIT DOES MEET THE FCC REQUIREMENTS.

**PERFORMED BY:** RICHARD BLOCK

**DATE:** 11/30/05

APPLICANT: PLANET TOYS (HK) LTD.  
FCC ID: SZ23351T27  
REPORT #: V:\P\PLANET\_SZ2\2408UT5A\2408UT5ATestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

**APPLICANT:** PLANET TOYS (HK) LTD.

**FCC ID:** SZ23351T27

**NAME OF TEST:** Occupied Bandwidth

**RULES PART NO.:** 15.227

**REQUIREMENTS:** The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated to the general limits of 15.209.

## TEST DATA:

THE GRAPH ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.

**METHOD OF MEASUREMENT:** A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was taken. The vertical scale is set to 10 dB per division.

**TEST RESULTS:** The unit DOES meet the FCC requirements.

**PERFORMED BY:** RICHARD BLOCK

**DATE:** 11/30/05

APPLICANT: PLANET TOYS (HK) LTD.

FCC ID: SZ23351T27

REPORT #: V:\P\PLANET\_SZ2\2408UT5A\2408UT5ATestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [sid@timcoengr.com](mailto:sid@timcoengr.com)

## NOTES:

PLANET TOYS (HK) LTD. - FCC ID: SZ2 3351

OCCUPIED BANDWIDTH PLOT

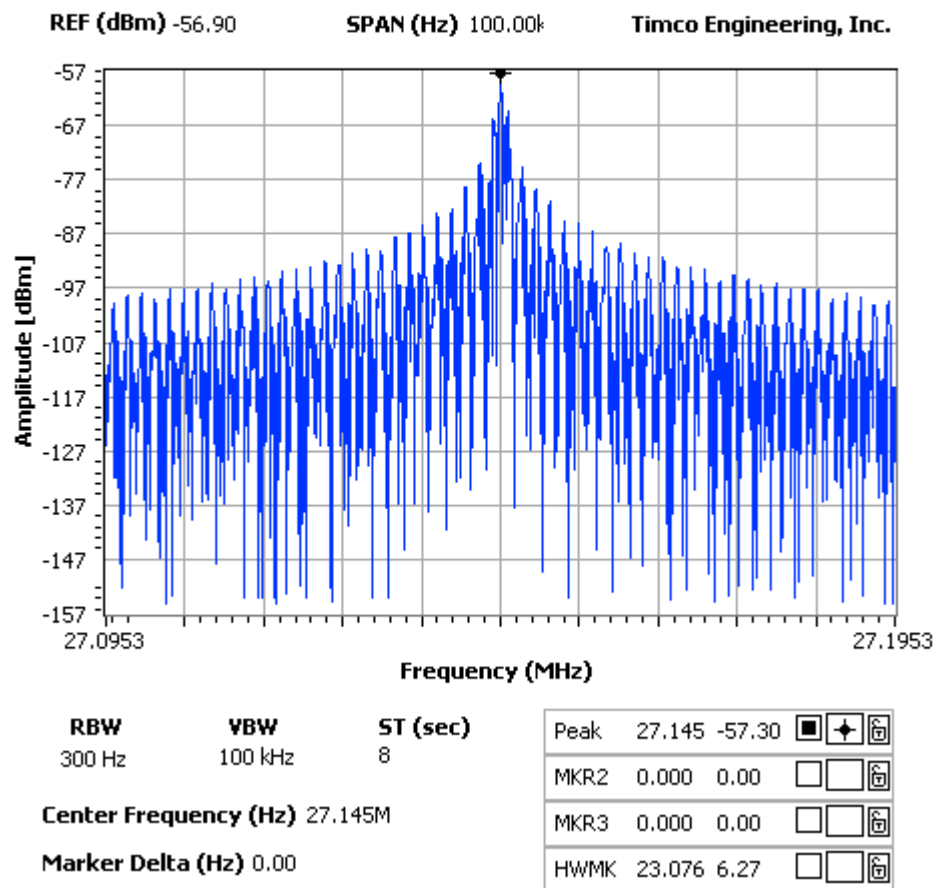

APPLICANT: PLANET TOYS (HK) LTD.

FCC ID: SZ23351T27

REPORT #: P\PLANET\_SZ2\2408UT5\2408UT5TestReport.doc