

# FCC PART 15.235 EMI MEASUREMENT AND TEST REPORT


For

## Planet Toys (HK) Ltd

1107 Chinachem Golden Plaza, 77 Mody RD, TsimShaTsui East, Kowloon, Hong Kong

**FCC ID: SZ23615T49**

September 24, 2005

|                                                                                                                                                                                                                                                   |                                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report                                                                                                                                                               | <b>Equipment Type:</b><br>Transmitter, Toy Remote Control |
| <b>Test Engineer:</b> Louise Lu                                                                                                                                |                                                           |
| <b>Report No.:</b> RSZ05091703                                                                                                                                                                                                                    |                                                           |
| <b>Receive EUT Date/<br/>Test Date:</b> September 17, 2005/September 20, 2005                                                                                                                                                                     |                                                           |
| <b>Reviewed By:</b> Chris Zeng                                                                                                                                |                                                           |
| <b>Prepared By:</b> Bay Area Compliance Lab Corp. (ShenZhen)<br>6/F, the 3rd Phase of WanLi Industrial Building, ShiHua<br>Road, FuTian Free Trade Zone, ShenZhen, Guangdong<br>518038, P.R.China<br>Tel: 86-755-33320018<br>Fax: 86-755-33320008 |                                                           |

**Note:** The test report is specially limited to the above company and this particular sample only.  
It may not be duplicated without prior written consent of Bay Area Compliance Lab  
Corp. (ShenZhen). This report **must not** be used by the client to claim product certification,  
approval, or endorsement by NVLAP, NIST or any agency of the US Government.

**TABLE OF CONTENTS**

|                                                          |           |
|----------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                          | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 3         |
| OBJECTIVE .....                                          | 3         |
| RELATED SUBMITTAL(S)/GRANT(S).....                       | 3         |
| TEST METHODOLOGY .....                                   | 3         |
| TEST FACILITY .....                                      | 3         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                    | <b>4</b>  |
| JUSTIFICATION .....                                      | 4         |
| EUT EXERCISE SOFTWARE .....                              | 4         |
| SPECIAL ACCESSORIES .....                                | 4         |
| EQUIPMENT MODIFICATIONS .....                            | 4         |
| CONFIGURATION OF TEST SETUP .....                        | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                        | 5         |
| <b>SUMMARY OF TEST RESULTS .....</b>                     | <b>6</b>  |
| <b>§15.203 - ANTENNA REQUIREMENT.....</b>                | <b>7</b>  |
| STANDARD APPLICABLE .....                                | 7         |
| <b>§15.209(A) §15.235(A) - RADIATED EMISSION .....</b>   | <b>8</b>  |
| MEASUREMENT UNCERTAINTY .....                            | 8         |
| EUT SETUP.....                                           | 8         |
| EMI TEST RECEIVER SETUP .....                            | 8         |
| TEST EQUIPMENT LIST AND DETAILS.....                     | 9         |
| TEST PROCEDURE .....                                     | 9         |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....           | 9         |
| TEST RESULTS SUMMARY .....                               | 9         |
| TEST DATA .....                                          | 10        |
| PLOT(S) OF TEST DATA .....                               | 10        |
| <b>§15.235(B) - BAND EDGES TESTING .....</b>             | <b>13</b> |
| STANDARD APPLICABLE .....                                | 13        |
| TEST PROCEDURE .....                                     | 13        |
| TEST EQUIPMENT LIST AND DETAILS.....                     | 13        |
| TEST DATA .....                                          | 13        |

---

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The Planet Toys (HK) Ltd 's product, model number: 3615 or the "EUT" as referred to in this report is a transmitter of Toy Remote Control, the product name is 1:12 scale RC. The EUT is measured approximately 15.2cm L x 11.1cm W x 6.5cm H, rated input voltage: DC 9 V battery, with permanently Antenna 52 cm.

*\* The test data gathered are from production sample, serial number: 0509027, provided by the manufacturer.*

### Objective

This Type approval report is prepared on behalf of *Planet Toys (HK) Ltd* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, section 15.203,15.205,15.209 and 15.235 rules.

### Related Submittal(s)/Grant(s)

No Related Submittals.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (ShenZhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Lab Corp. (ShenZhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China.

Test site at Bay Area Compliance Lab Corp. (ShenZhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Lab Corp. (ShenZhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>

---

## SYSTEM TEST CONFIGURATION

---

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

N/A.

### Special Accessories

N/A.

### Equipment Modifications

Bay Area Compliance Lab Corp. (ShenZhen) has not done any modification on the EUT.

## Configuration of Test Setup



Stand View




Side View



Lie View

Note: We tested Lie orientation, side orientation and stand orientation, the stand orientation is the worst mode, so we select the stand orientation to test.

## Block Diagram of Test Setup

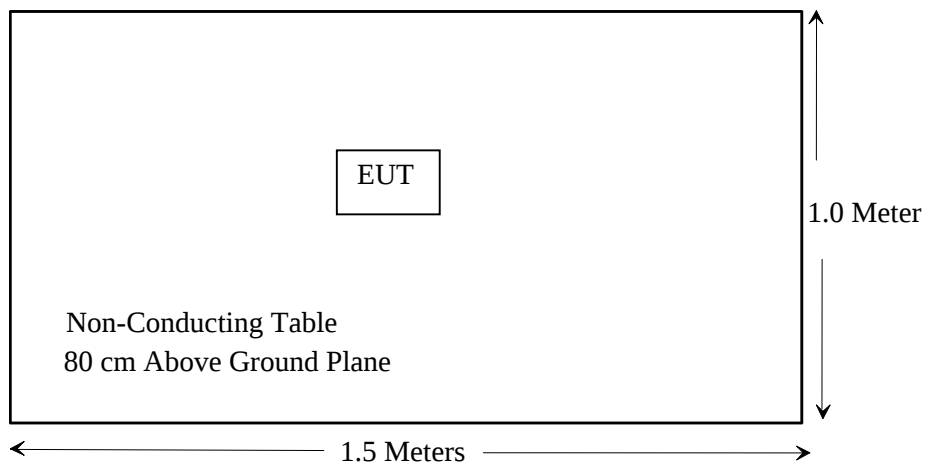

---

**SUMMARY OF TEST RESULTS**

---

| FCC RULES                | DESCRIPTION OF TEST | RESULT    |
|--------------------------|---------------------|-----------|
| §15.203                  | Antenna requirement | Compliant |
| §15.209(a)<br>§15.235(a) | Radiated Emission   | Compliant |
| §15.235(b)               | Band Edges Testing  | Compliant |

Note: The highest clocks of the EUT was 49.86 MHz.

---

## §15.203 - ANTENNA REQUIREMENT

---

### Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a permanent antenna, fulfill the requirement of this section.

Test Result: Pass


## §15.209(a) §15.235(a) - RADIATED EMISSION

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is  $\pm 4.4$  dB.

### EUT Setup

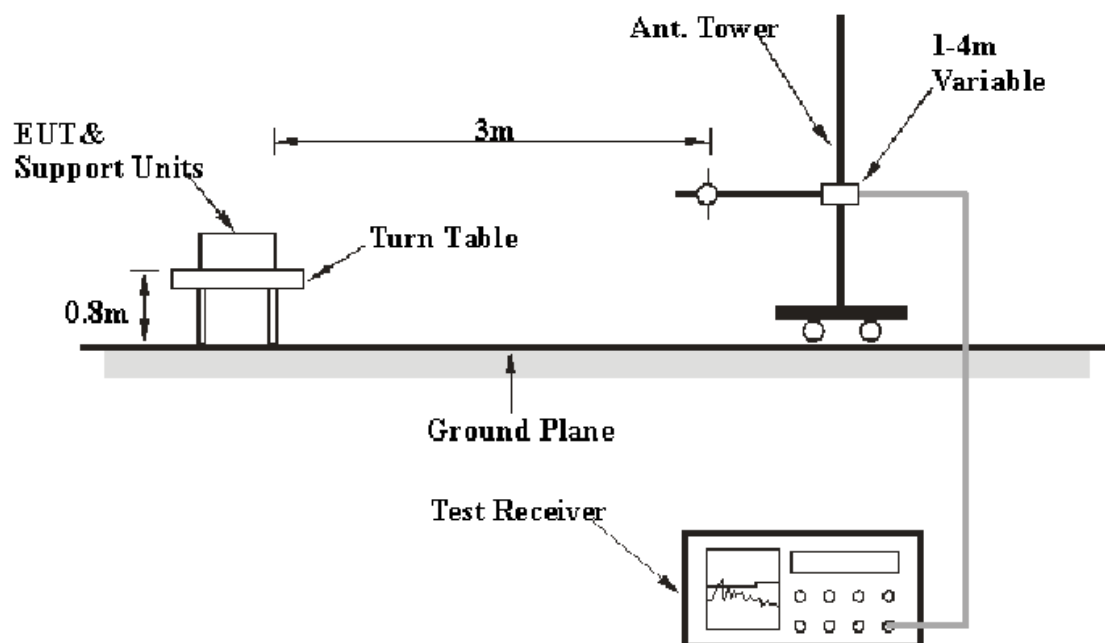

The radiated emission tests were performed in the chamber A test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and 15.235 limits.

### EMI Test Receiver Setup

The system was investigated from 30 MHz to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

| <i>Frequency Range</i> | <i>R B/W</i> | <i>Video B/W</i> | <i>IF B/W</i> |
|------------------------|--------------|------------------|---------------|
| 30 – 1000 MHz          | 100 kHz      | 300 kHz          | 120 kHz       |

## Test Equipment List and Details

| Manufacturer    | Description       | Model   | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI    | 100035        | 2005-8-17        | 2006-8-17            |
| HP              | Amplifier         | HP8447D | 2944A09795    | 2005-8-17        | 2006-8-17            |
| Sunol Sciences  | Broadband Antenna | JB1     | A040904-1     | 2005-4-28        | 2006-4-28            |

\* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.235, with the worst margin reading of:

**-17.0 dB at 151.597 MHz in the Horizontal polarization.**

**Test Data****Environmental Conditions**

|                    |          |
|--------------------|----------|
| Temperature:       | 30 °C    |
| Relative Humidity: | 55 %     |
| ATM Pressure:      | 1003mbar |


The testing was performed by Louise Lu on 2005-9-20.

Test Mode: Transmitting

| Meter     |         |           |        |       | Antenna | Cable | Amplifier | Corr.  | FCC PART 15.209&15.235 |        |        |                 |
|-----------|---------|-----------|--------|-------|---------|-------|-----------|--------|------------------------|--------|--------|-----------------|
| Frequency | Reading | Direction | Height | Polar | Loss    | loss  | Gain      | Ampl.  |                        | Limit  | Margin | Remark          |
| MHz       | dBuV    | Degree    | Meter  | H / V | dB      | dB    | dB        | dBuV/m |                        | dBuV/m | dB     |                 |
| 151.597   | 40.7    | 45        | 1.2    | H     | 13.1    | 1.1   | 28.4      | 26.5   |                        | 43.5   | -17.0  | PK(Spurious)    |
| 56.790    | 37.2    | 45        | 1.2    | H     | 7.9     | 0.7   | 28.7      | 17.1   |                        | 40.0   | -22.9  | PK(Spurious)    |
| 149.580   | 34.0    | 60        | 1.2    | V     | 13.4    | 1.1   | 28.5      | 20.0   |                        | 43.5   | -23.5  | PK(Harmonic)    |
| 71.580    | 35.5    | 45        | 1.2    | V     | 8.6     | 0.8   | 28.7      | 16.3   |                        | 40.0   | -23.7  | PK(Spurious)    |
| 59.640    | 36.4    | 45        | 1.2    | V     | 7.9     | 0.7   | 28.7      | 16.3   |                        | 40.0   | -23.7  | PK(Spurious)    |
| 199.440   | 34.4    | 60        | 1.0    | V     | 12.0    | 1.3   | 28        | 19.7   |                        | 43.5   | -23.8  | PK(Harmonic)    |
| 431.030   | 31.5    | 90        | 1.2    | H     | 16.8    | 2.2   | 28.3      | 22.2   |                        | 46.0   | -23.8  | PK(Spurious)    |
| 281.007   | 31.1    | 90        | 1.2    | H     | 13.8    | 1.5   | 27.6      | 18.8   |                        | 46.0   | -27.2  | PK(Spurious)    |
| 99.720    | 35.7    | 60        | 1.0    | V     | 8.2     | 0.9   | 28.6      | 16.3   |                        | 43.5   | -27.3  | PK(Harmonic)    |
| 99.720    | 32.8    | 270       | 1.0    | H     | 8.2     | 0.9   | 28.6      | 13.4   |                        | 43.5   | -30.2  | PK(Harmonic)    |
| 49.860    | 60.1    | 90        | 1.0    | V     | 10.8    | 0.6   | 28.8      | 42.7   |                        | 80.0   | -37.3  | AV(Fundamental) |
| 49.860    | 78.7    | 180       | 1.2    | V     | 10.8    | 0.6   | 28.8      | 61.3   |                        | 100.0  | -38.7  | PK(Fundamental) |
| 49.860    | 40.0    | 60        | 1.2    | H     | 10.8    | 0.6   | 28.8      | 22.6   |                        | 80.0   | -57.4  | AV(Fundamental) |
| 49.860    | 59.5    | 45        | 1.0    | H     | 10.8    | 0.6   | 28.8      | 42.0   |                        | 100.0  | -58.0  | PK(Fundamental) |


**Plot(s) of Test Data**

Plot(s) of Test Data is presented hereinafter as reference.

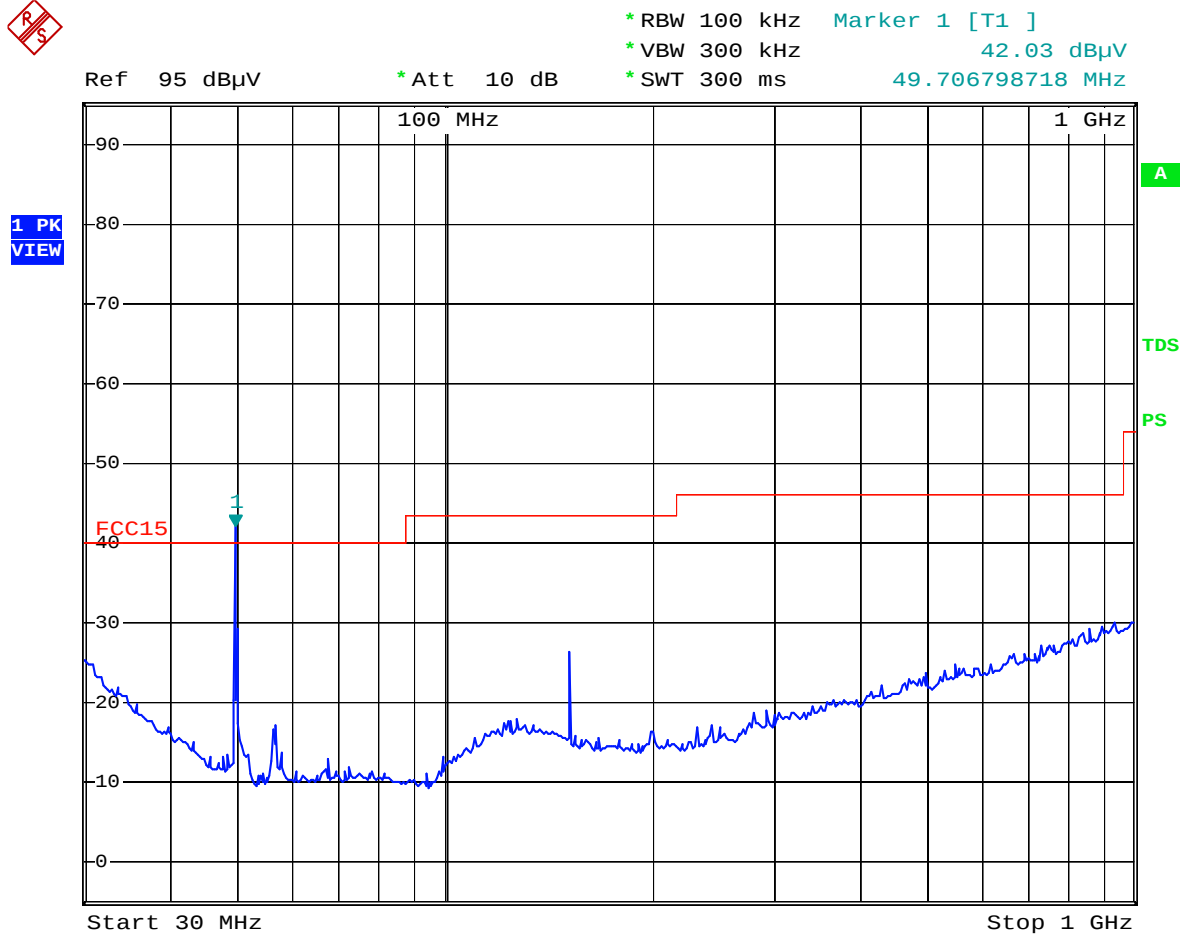

Planet 1:12 scale RC M/N:3615 transmitting ( Horizontal)

Date: 20.SEP.2005 15:44:32

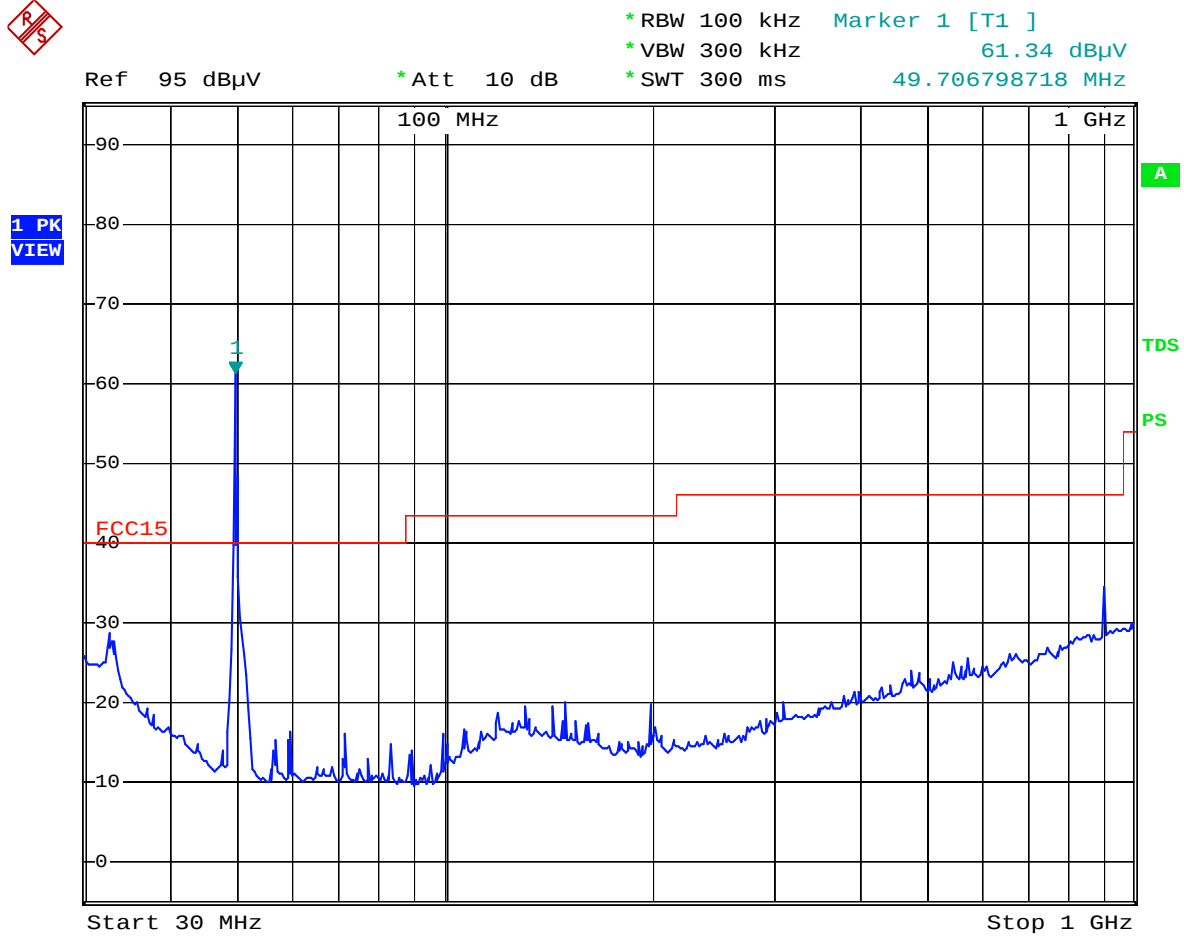

Planet 1:12 scale RC M/N:3615 transmitting ( vertical)

Date: 20.SEP.2005 15:38:37

## §15.235(b) - BAND EDGES TESTING

### Standard Applicable

The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in §15.209, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in §15.209. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

### Test Procedure

With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the test receiver setup with the START and STOP frequencies set to the EUT's operation band.

### Test Equipment List and Details

| Manufacturer    | Description       | Model   | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI    | 100035        | 2005-8-17        | 2006-8-17            |
| HP              | Amplifier         | HP8447D | 2944A09795    | 2005-8-17        | 2006-8-17            |
| Sunol Sciences  | Broadband Antenna | JB1     | A040904-1     | 2005-4-28        | 2006-4-28            |

\* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data


#### Environmental Conditions

|                    |          |
|--------------------|----------|
| Temperature:       | 20 °C    |
| Relative Humidity: | 55%      |
| ATM Pressure:      | 1000mbar |

The result has been complied with the 15.235(b), see the following plot:

| Frequency<br>MHz | Emission<br>dBμV/m | Limit<br>dBμV/m | Margin<br>dB |
|------------------|--------------------|-----------------|--------------|
| 49.81            | 35.16              | 40.0            | -4.84        |
| 49.91            | 35.40              | 40.0            | -4.60        |


49.81 MHz:

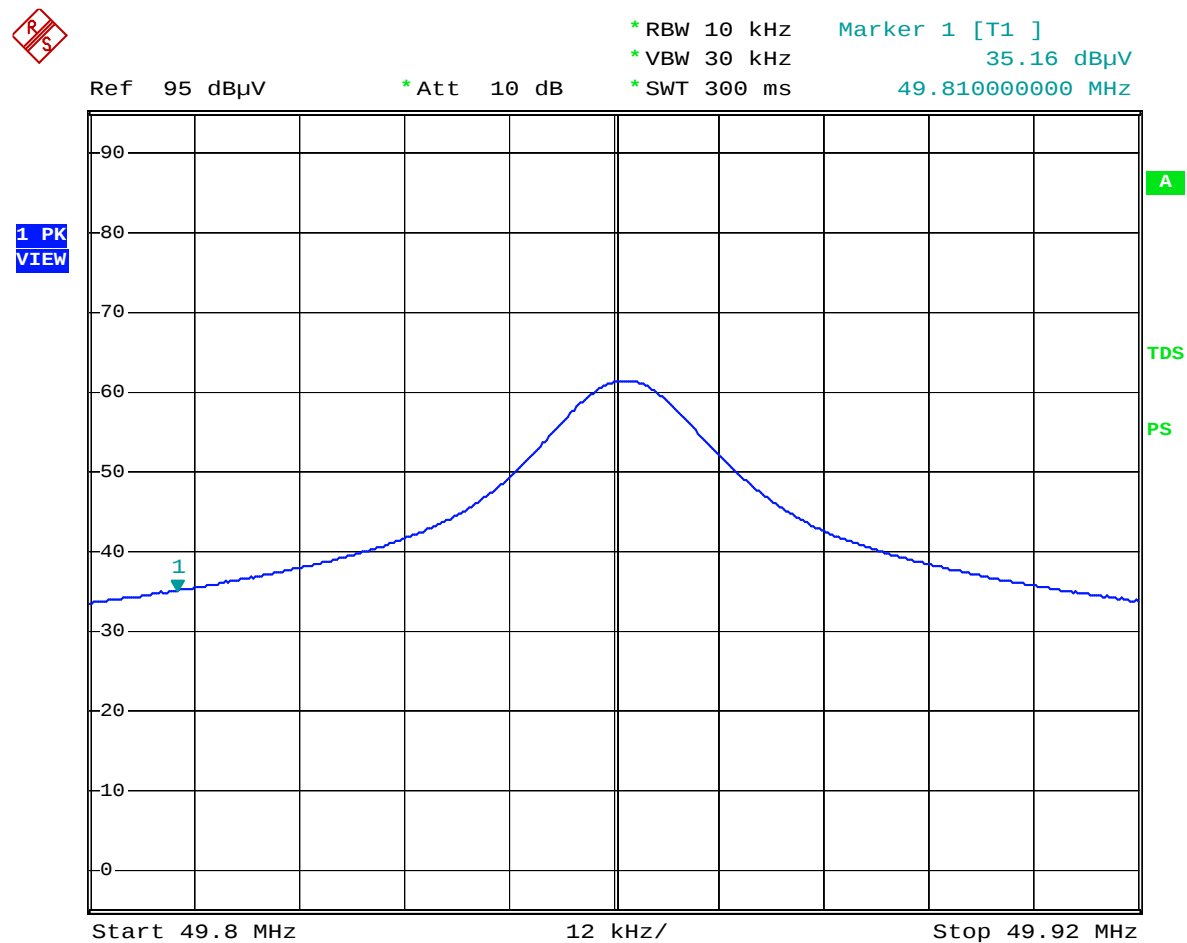

Planet 1:12 scale RC M/N:3615 transmitting 49.81MHz

Date: 20.SEP.2005 15:49:25

49.91 MHz:

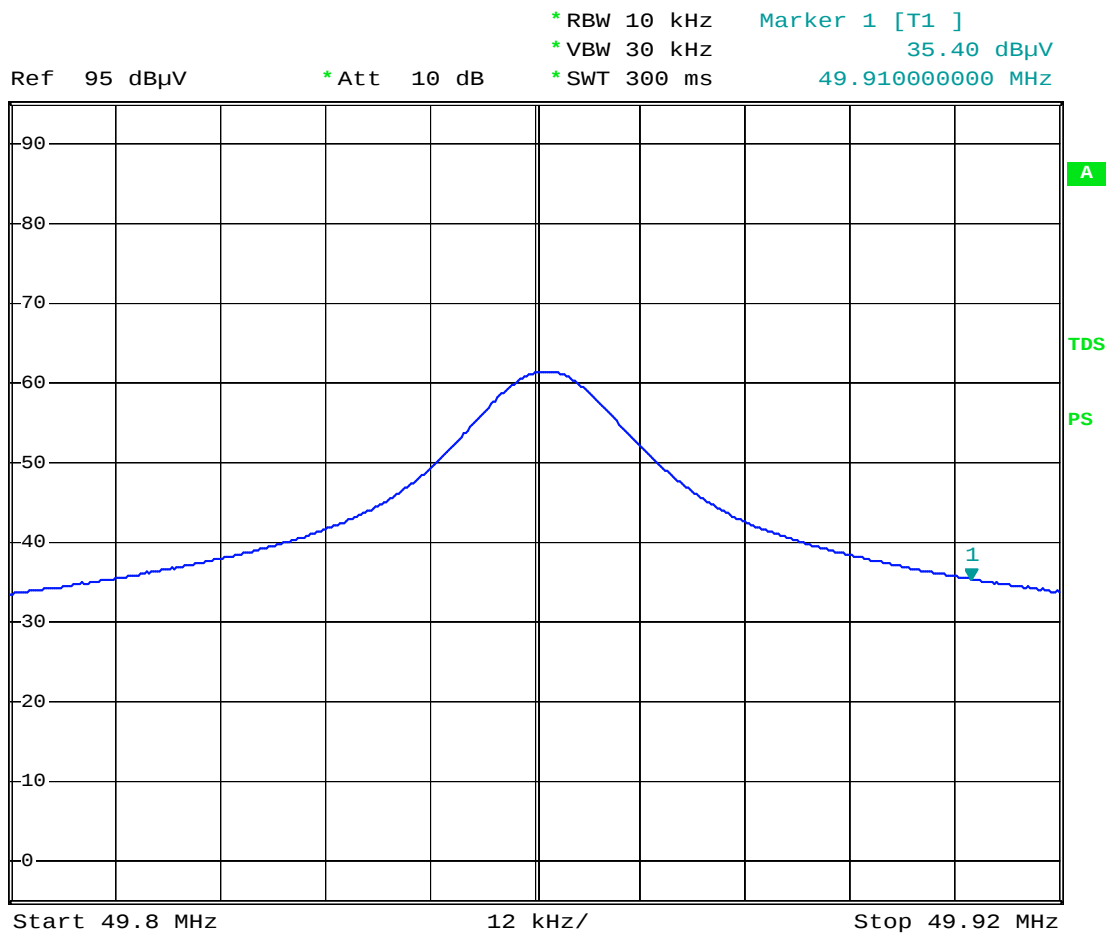1 PK  
VIEW

Planet 1:12 scale RC M/N:3615 transmitting 49.91MHz

Date: 20.SEP.2005 15:50:02