
Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2026/05/05

10_SRD 2.4GHz_SRD_CH36_Back_0mm_ANT B**DUT: Headset; Type: CFI-ZWH3**

Communication System: UID 0, WLAN 2.4G; Frequency: 2474.3958 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2474.3958$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.16$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.64, 6.51, 6.41) @ 2474.3958 MHz; Calibrated: 2025/11/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2025/11/13
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0901 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.609 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.028 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.0928 W/kg

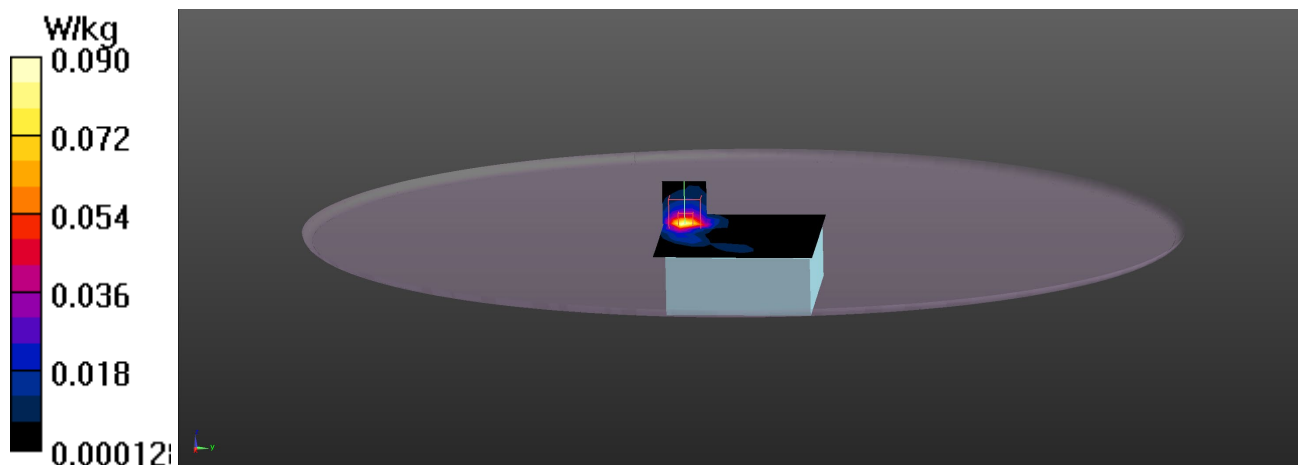

Test Laboratory: DEKRA

Date: 2026/05/05

4_Bluetooth_BT-1M_CH39_Back_0mm_ANT Main

DUT: Headset; Type: CFI-ZWH3

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2441 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.22$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.64, 6.51, 6.41) @ 2441 MHz; Calibrated: 2025/11/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2025/11/13
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0460 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.095 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.019 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 0.0562 W/kg

