FCC RF Test Report

APPLICANT	:	Weifang Goertek Electronics Co., Ltd
EQUIPMENT	:	Wireless Device
MODEL NAME	:	G0DNE
FCC ID	:	SZGG0DNE
STANDARD	:	FCC Part 15 Subpart C §15.247
CLASSIFICATION	:	(DTS) Digital Transmission System
TEST DATE(S)	:	Jan. 09, 2024 ~ Jan. 18, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

ACCREDITED
Cert #5145.01

Sporton International Inc. (ShenZhen)
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY **3**
SUMMARY OF TEST RESULT **4**
1 GENERAL DESCRIPTION **5**
1.1 Applicant 5
1.2 Product Feature of Equipment Under Test 5
1.3 Product Specification of Equipment Under Test 5
1.4 Modification of EUT 5
1.5 Testing Location 6
1.6 Test Software 6
1.7 Applicable Standards 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **8**
2.1 Carrier Frequency Channel 8
2.2 Test Mode 10
2.3 Connection Diagram of Test System 11
2.4 Support Unit used in test configuration and system 12
2.5 EUT Operation Test Setup 12
2.6 Measurement Results Explanation Example 12
3 TEST RESULT **13**
3.1 6dB and 99% Bandwidth Measurement 13
3.2 Output Power Measurement 24
3.3 Power Spectral Density Measurement 25
3.4 Conducted Band Edges and Spurious Emission Measurement 36
3.5 Radiated Band Edges and Spurious Emission Measurement 50
3.6 AC Conducted Emission Measurement 54
3.7 Antenna Requirements 56
4 LIST OF MEASURING EQUIPMENT **57**
5 MEASUREMENT UNCERTAINTY **58**
APPENDIX A. CONDUCTED TEST RESULTS
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT
APPENDIX C. RADIATED SPURIOUS EMISSION
APPENDIX D. DUTY CYCLE PLOTS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3N1513B	Rev. 01	Initial issue of report	Mar. 15, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.46 dB at 2483.52 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.93 dB at 0.16 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Weifang Goertek Electronics Co., Ltd
Gaoxin 2 Road, Free Trade Zone, Weifang, Shandong, 261205, P.R.China

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Device
Model Name	G0DNE
FCC ID	SZGG0DNE
SN Code	Conducted: LZAG6501311301M13BFC0049 Conduction: 3B27LZABEC7947 Radiation: 3B11C5124

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	<BLE(CH0-39)> 2402 MHz ~ 2480 MHz <BLE (CH2-76)> 2404 MHz ~ 2478 MHz
Number of Channels	BLE(CH0-39): 40 BLE (CH2-76): 72
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	<BLE(CH0-39)> BLE 1Mbps: 6.70 dBm (0.0047 W) BLE 2Mbps: 6.60 dBm (0.0046 W) <BLE (CH2-76)> BLE 1Mbps: 6.60 dBm (0.0046 W)
99% Occupied Bandwidth	<BLE(CH0-39)> BLE 1Mbps:1.019MHz BLE 2Mbps:2.014MHz <BLE (CH2-76)> BLE 1Mbps:1.031MHz
Antenna Type / Gain	PCB Antenna type with gain 0.5 dBi
Type of Modulation	Bluetooth LE (CH0-39): GFSK Bluetooth LE (CH2-76): GFSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	03CH01-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
BLE (CH0-39)	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
BLE (CH2-76)	2	2404	29	2431	53	2455
	3	2405	30	2432	54	2456
	4	2406	31	2433	55	2457
	5	2407	32	2434	56	2458
	6	2408	33	2435	57	2459
	7	2409	34	2436	58	2460
	8	2410	35	2437	59	2461
	9	2411	36	2438	60	2462
	10	2412	37	2439	61	2463
	11	2413	38	2440	62	2464
	12	2414	39	2441	63	2465
	13	2415	40	2442	64	2466
	14	2416	41	2443	65	2467
	15	2417	42	2444	66	2468
	16	2418	43	2445	67	2469
	17	2419	44	2446	68	2470
	18	2420	45	2447	69	2471
	19	2421	46	2448	70	2472
	20	2422	47	2449	71	2473
	21	2423	48	2450	72	2474
	22	2424	49	2451	73	2475
	26	2428	50	2452	74	2476
	27	2429	51	2453	75	2477
	28	2430	52	2454	76	2478

2.2 Test Mode

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	**Data Rate / Modulation**
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth LE (CH0-39) Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth LE (CH0-39) Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth LE (CH0-39) Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth LE (CH2-76) Tx CH02_2404 MHz_1Mbps Mode 5: Bluetooth LE (CH2-76) Tx CH22_2424 MHz_1Mbps Mode 6: Bluetooth LE (CH2-76) Tx CH26_2428 MHz_1Mbps Mode 7: Bluetooth LE (CH2-76) Tx CH76_2478 MHz_1Mbps Mode 8: Bluetooth LE (CH0-39) Tx CH00_2402 MHz _2Mbps Mode 9: Bluetooth LE (CH0-39) Tx CH19_2440 MHz _2Mbps Mode 10: Bluetooth LE (CH0-39) Tx CH39_2480 MHz _2Mbps
Radiated TCs	Mode 1: Bluetooth LE (CH0-39) Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth LE (CH0-39) Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth LE (CH0-39) Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth LE (CH2-76) Tx CH02_2404 MHz_1Mbps Mode 5: Bluetooth LE (CH2-76) Tx CH22_2424 MHz_1Mbps Mode 6: Bluetooth LE (CH2-76) Tx CH26_2428 MHz_1Mbps Mode 7: Bluetooth LE (CH2-76) Tx CH76_2478 MHz_1Mbps Mode 8: Bluetooth LE (CH0-39) Tx CH00_2402 MHz_2Mbps Mode 9: Bluetooth LE (CH0-39) Tx CH19_2440 MHz_2Mbps Mode 10: Bluetooth LE (CH0-39) Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: BT Link + EUT

2.3 Connection Diagram of Test System

For Conducted Emission:

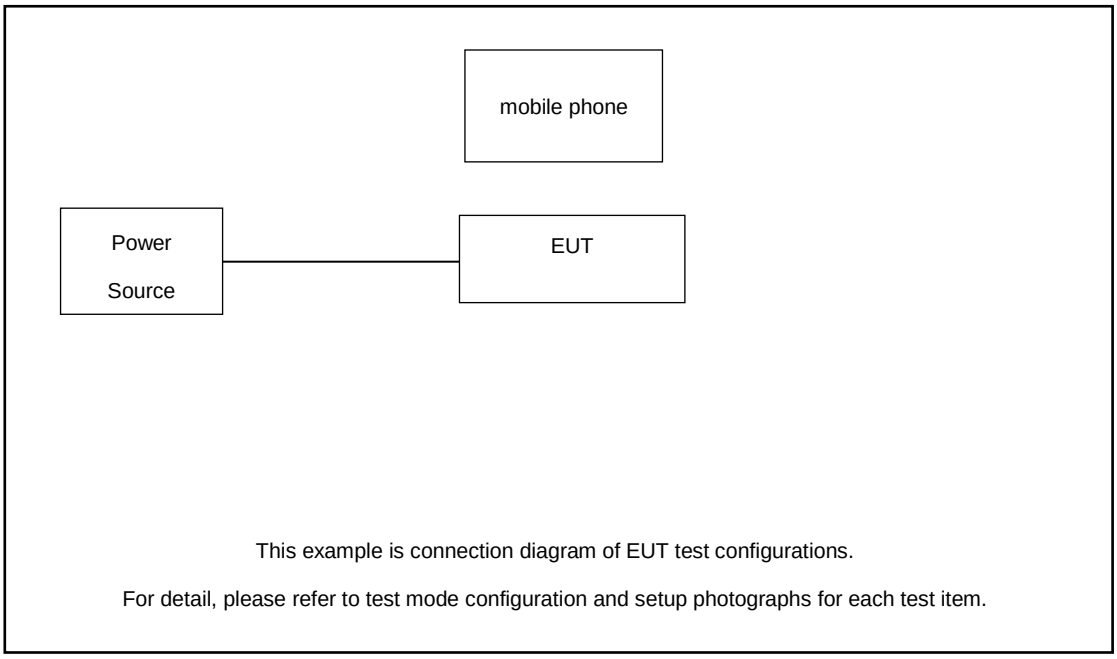

For Radiated Emission:

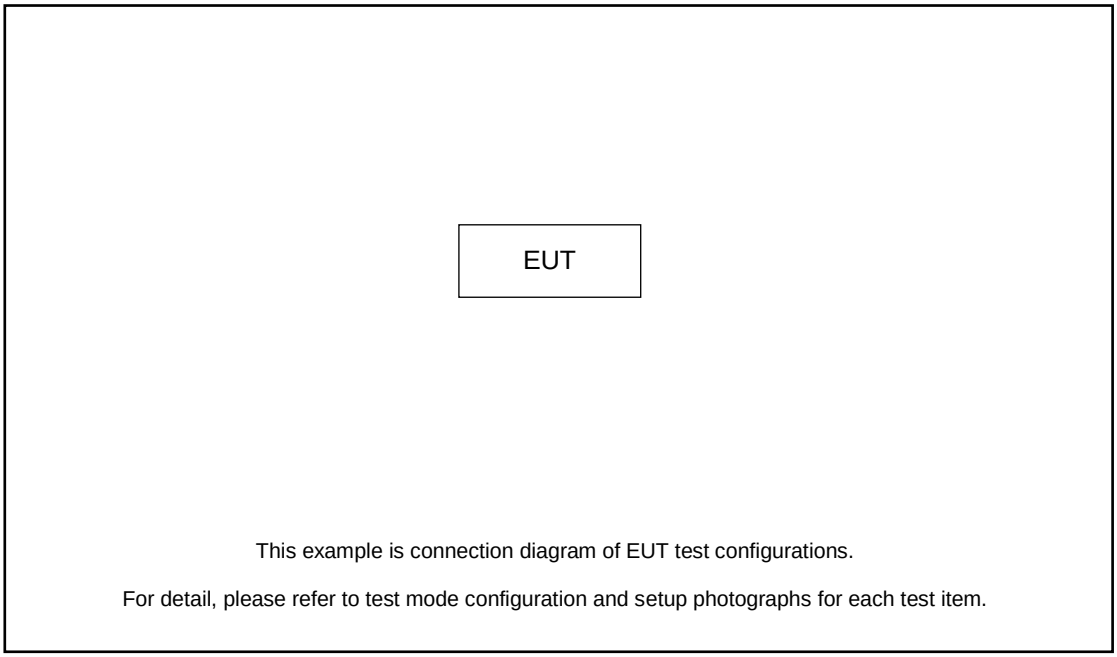

2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	mobile phone	NA	NA	NA	NA
2.	USB Cable	NA	NA	NA	NA
3.	Adapter	NA	NA	NA	NA

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the mobile phone.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.10 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 2.10 + 10 = 12.10 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

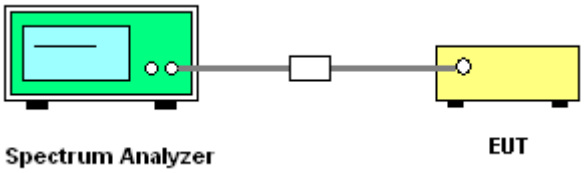

3.1.5 Test Result of 6dB Bandwidth

BLE (CH0-39) 1Mbps

6 dB Bandwidth Plot on Channel 00

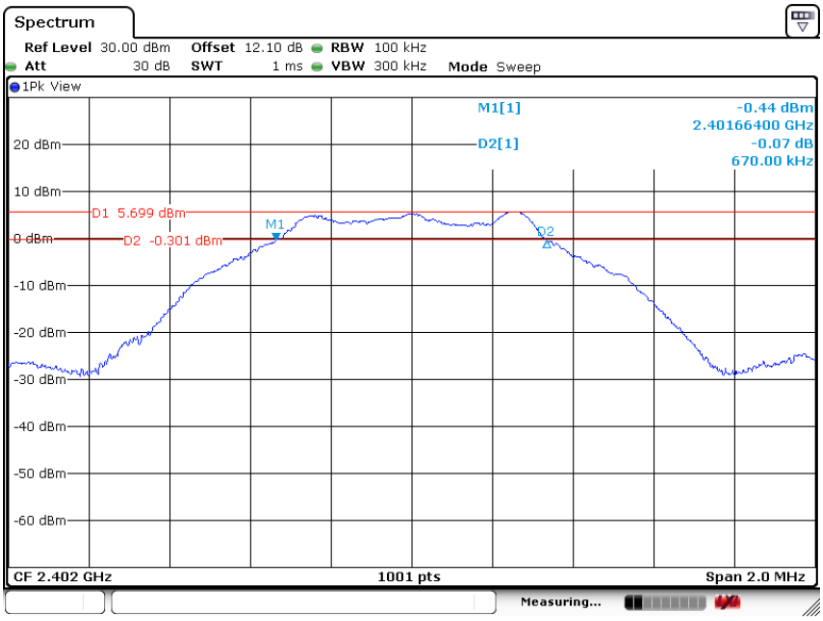

Date: 9.JAN.2024 13:18:27

6 dB Bandwidth Plot on Channel 19

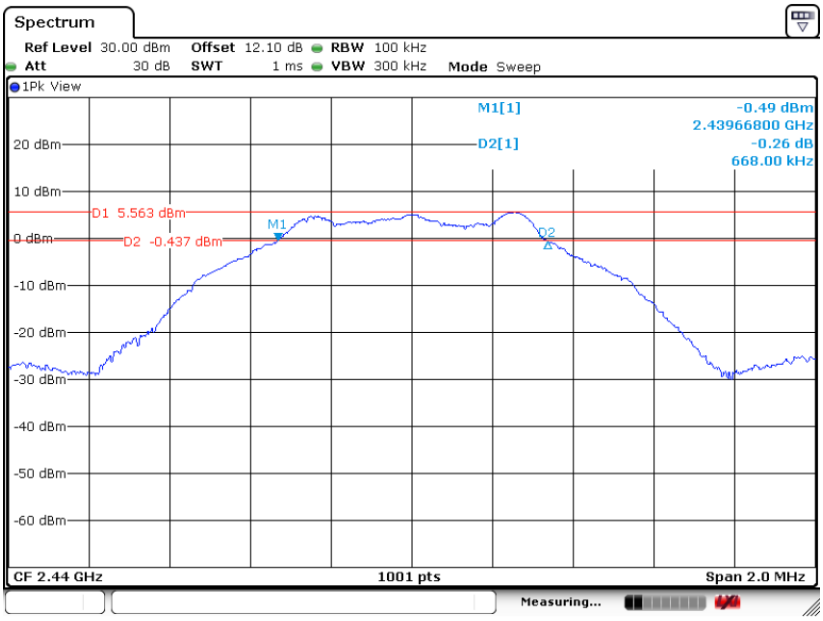

Date: 9.JAN.2024 13:21:47

6 dB Bandwidth Plot on Channel 39

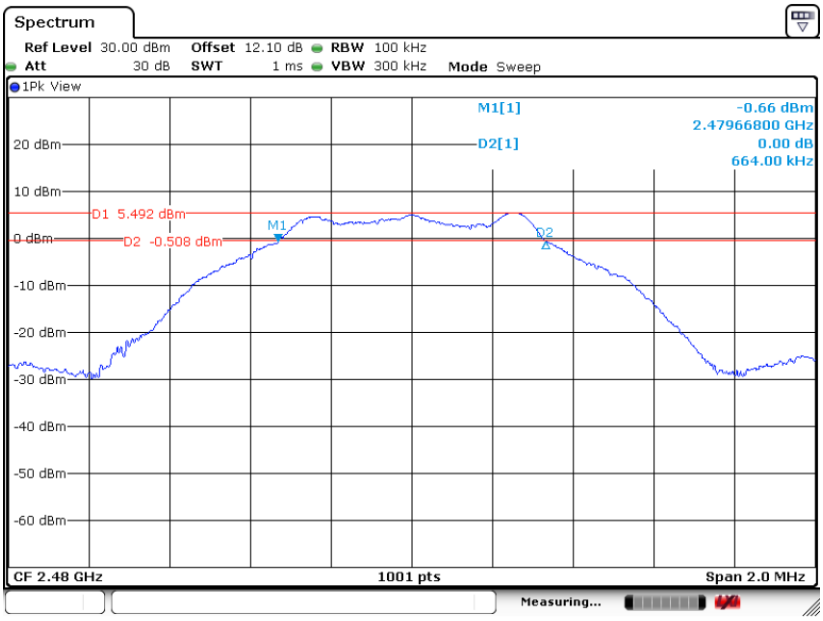

Date: 9.JAN.2024 13:23:29

BLE (CH0-39) 2Mbps

6 dB Bandwidth Plot on Channel 00

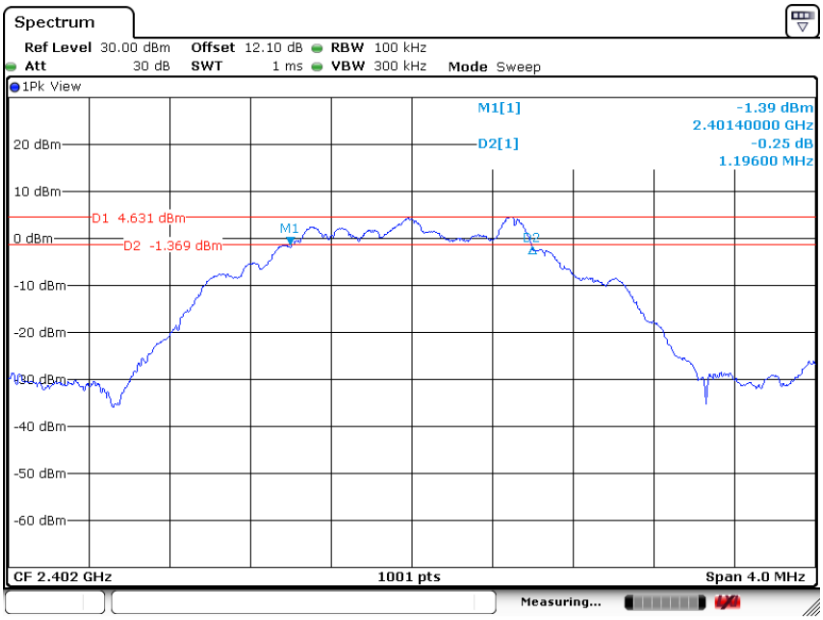

Date: 9.JAN.2024 13:25:46

6 dB Bandwidth Plot on Channel 19

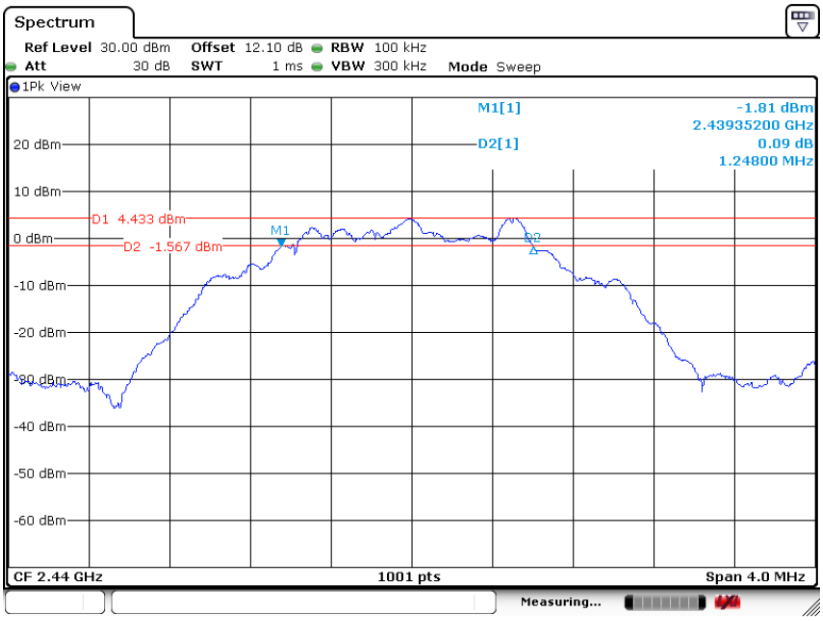

Date: 9.JAN.2024 13:27:47

6 dB Bandwidth Plot on Channel 39

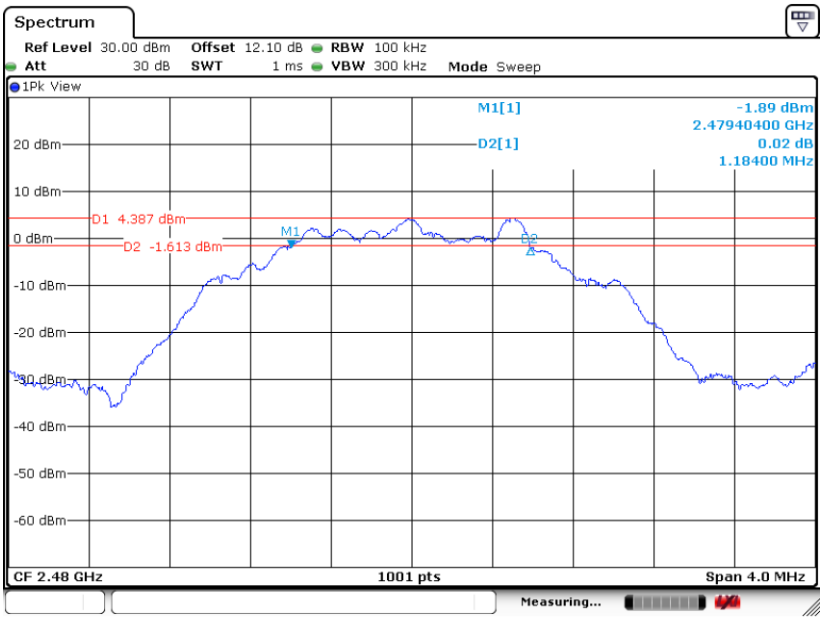

Date: 9.JAN.2024 13:29:39

BLE (CH2-76) 1Mbps

6 dB Bandwidth Plot on Channel 02

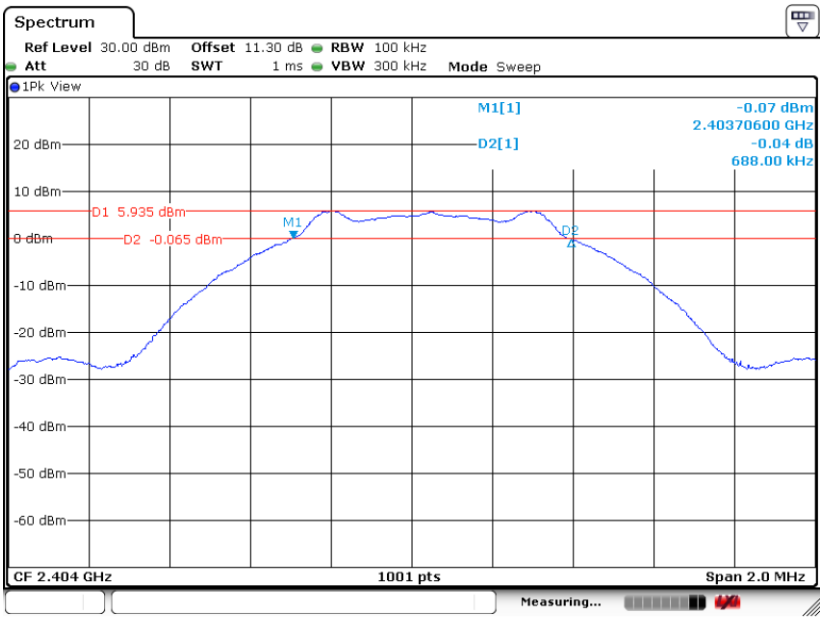

Date: 16.JAN.2024 16:38:36

6 dB Bandwidth Plot on Channel 22

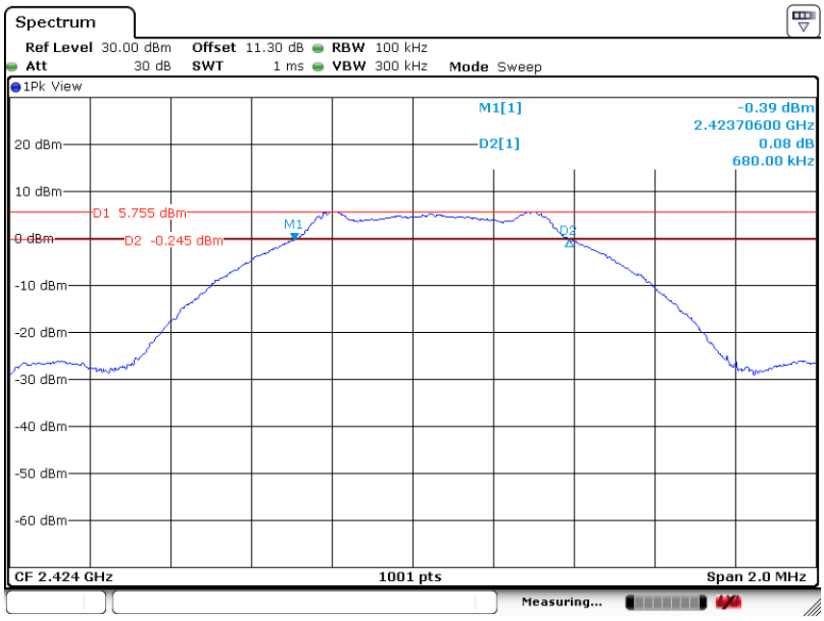

Date: 16.JAN.2024 16:41:35

6 dB Bandwidth Plot on Channel 26

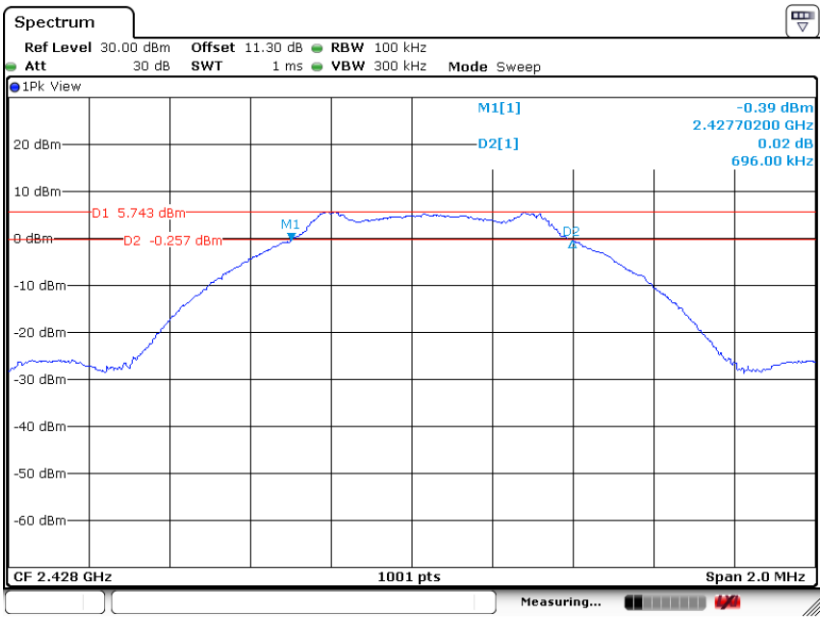

Date: 16.JAN.2024 16:43:20

6 dB Bandwidth Plot on Channel 76

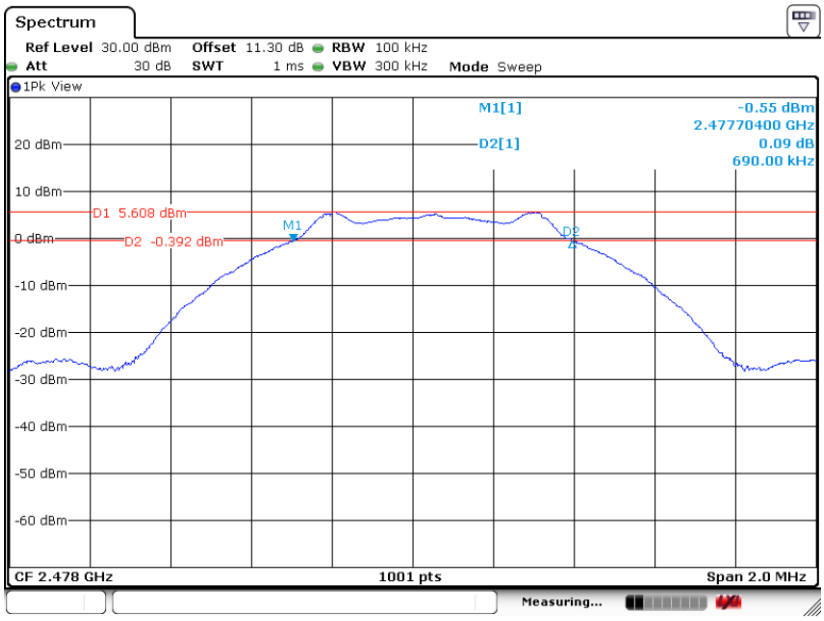

Date: 16.JAN.2024 16:56:30

3.1.6 Test Result of 99% Occupied Bandwidth

BLE (CH0-39) 1Mbps

99% Occupied Bandwidth Plot on Channel 00

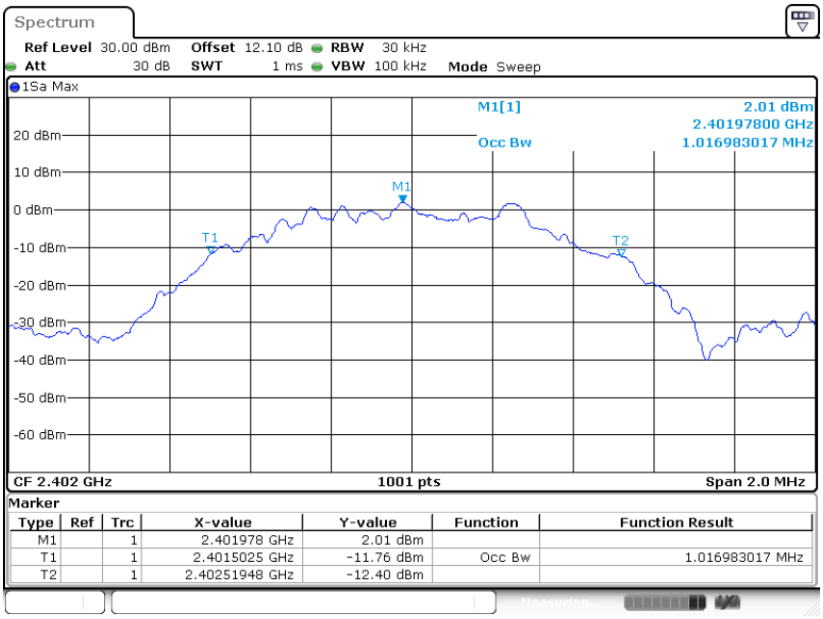

Date: 9.JAN.2024 13:18:14

99% Occupied Bandwidth Plot on Channel 19

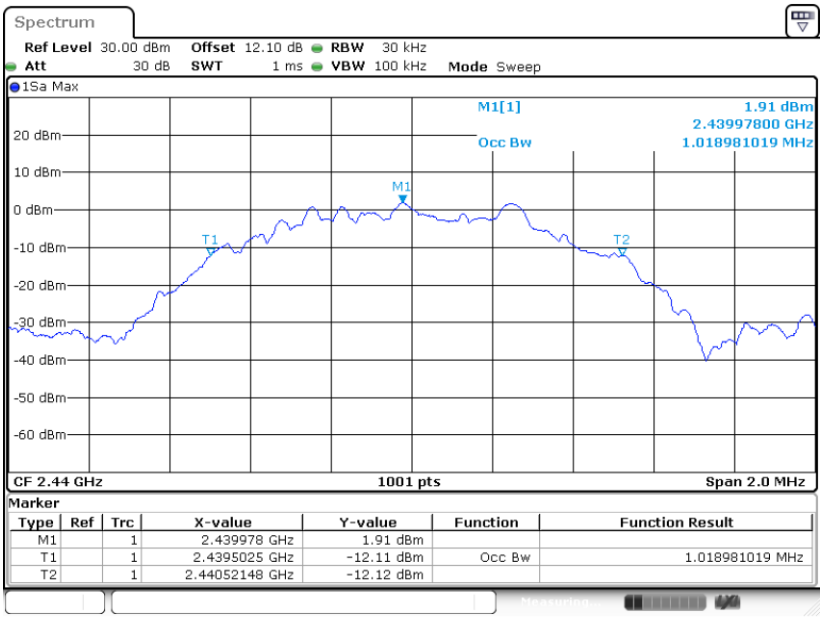

Date: 9.JAN.2024 13:21:36

99% Occupied Bandwidth Plot on Channel 39

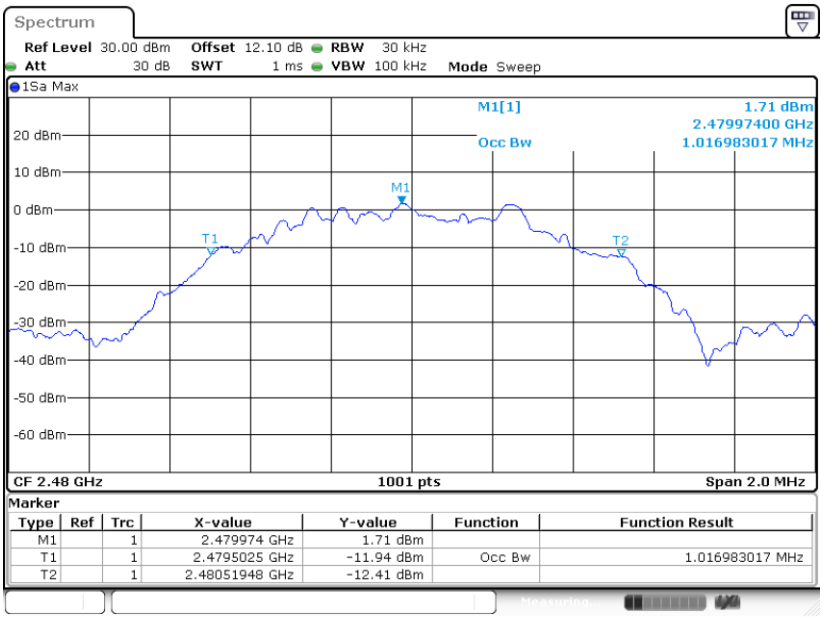

Date: 9.JAN.2024 13:23:15

BLE (CH0-39) 2Mbps

99% Occupied Bandwidth Plot on Channel 00

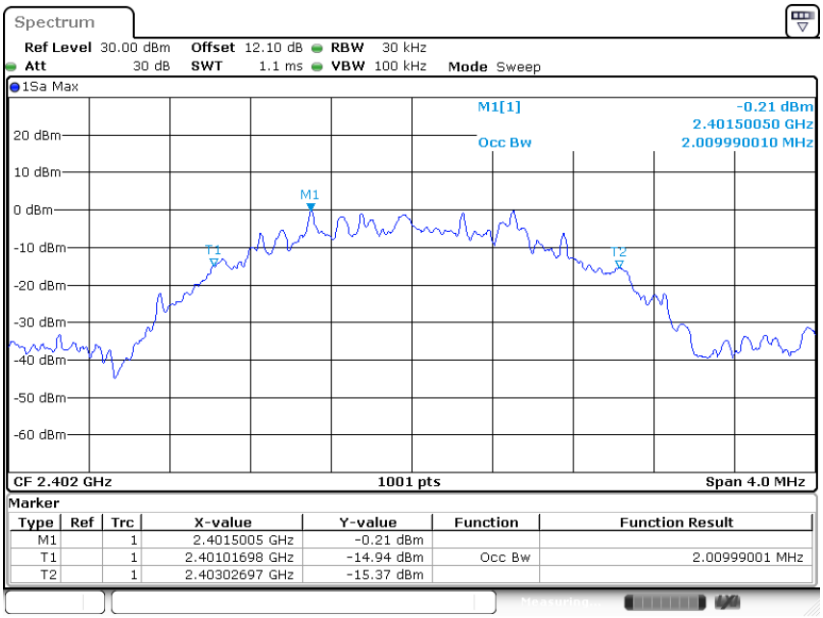

Date: 9.JAN.2024 13:25:27

99% Occupied Bandwidth Plot on Channel 19

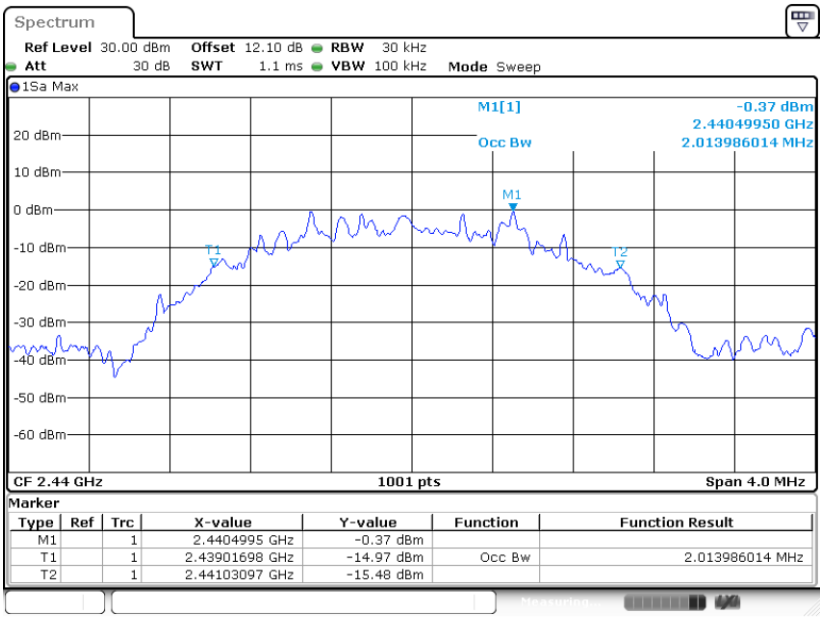

Date: 9.JAN.2024 13:27:34

99% Occupied Bandwidth Plot on Channel 39

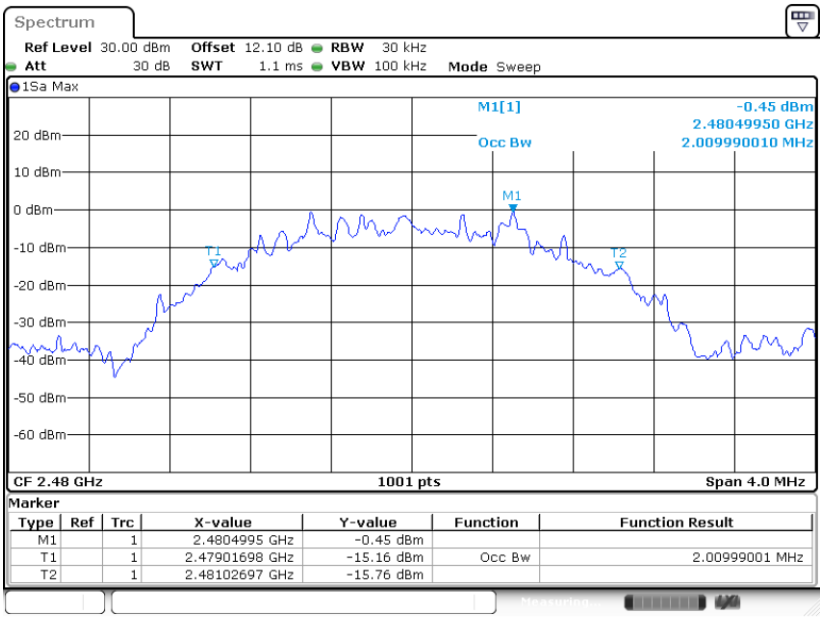

Date: 9.JAN.2024 13:29:26

BLE (CH2-76) 1Mbps

99% Occupied Bandwidth Plot on Channel 02

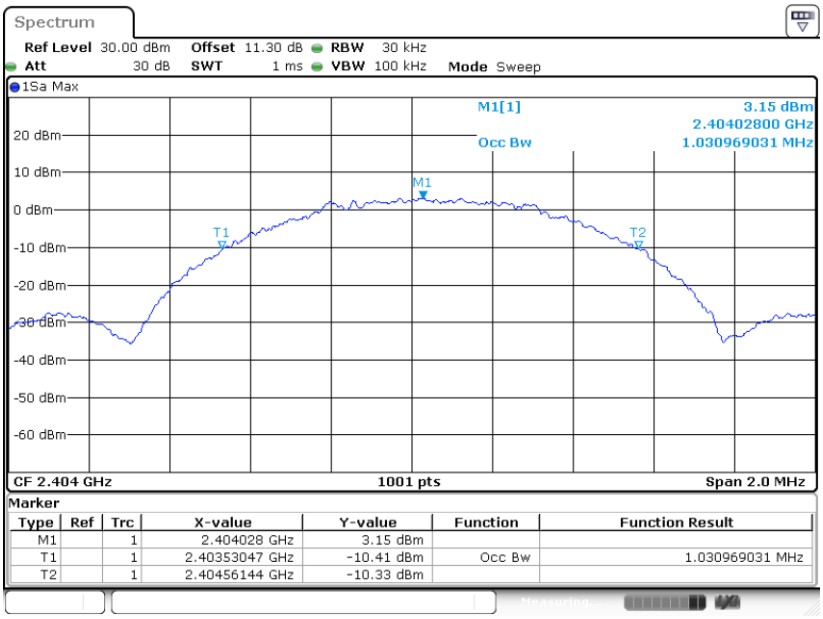

Date: 16.JAN.2024 16:37:49

99% Occupied Bandwidth Plot on Channel 22

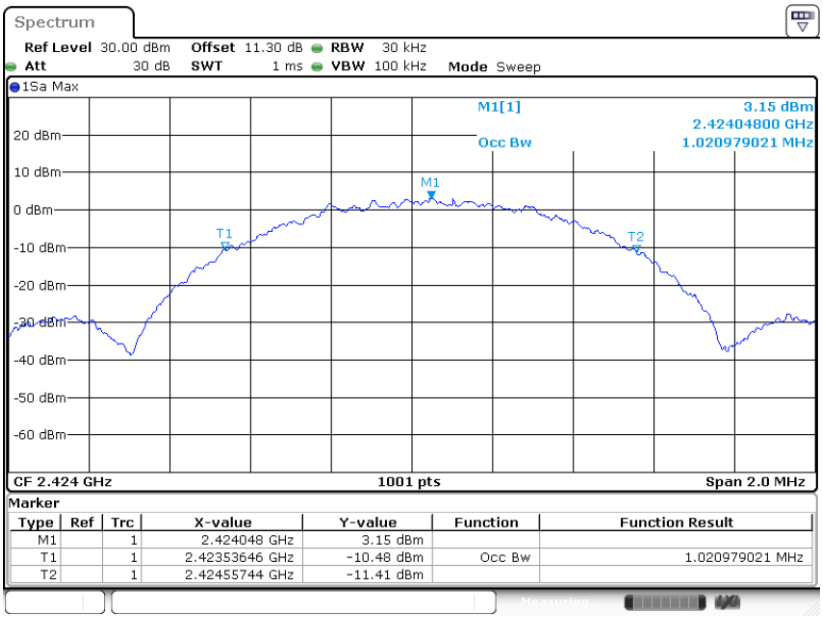

Date: 16.JAN.2024 16:41:23

99% Occupied Bandwidth Plot on Channel 26

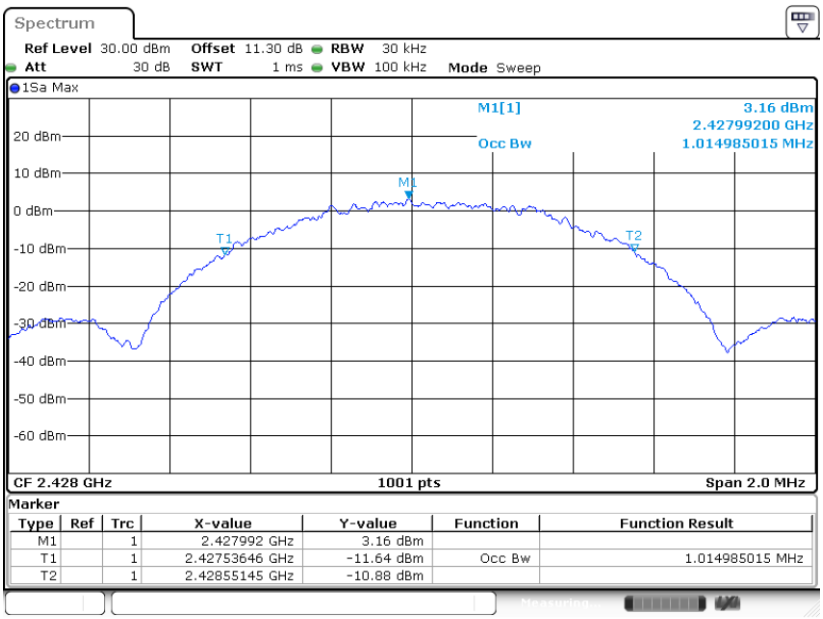

Date: 16.JAN.2024 16:43:08

99% Occupied Bandwidth Plot on Channel 76

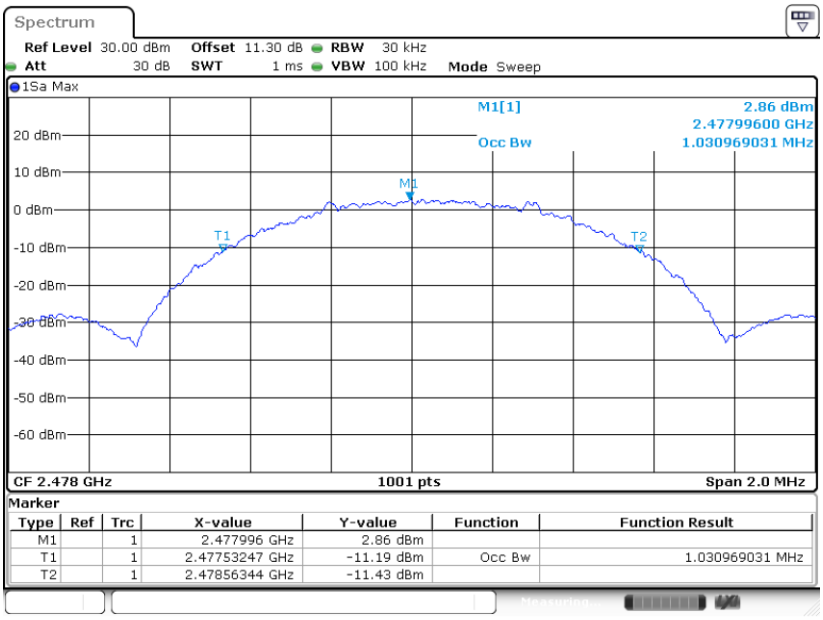

Date: 16.JAN.2024 16:56:08

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

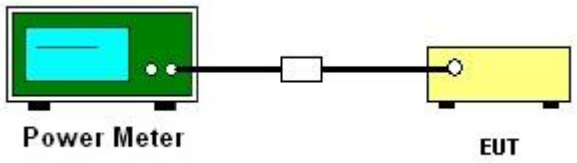

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

Note: Power setting is default.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

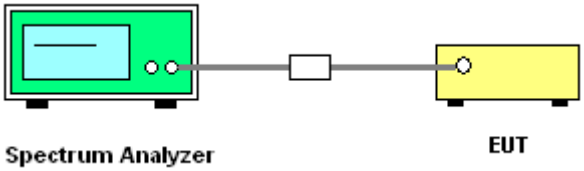

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)

BLE (CH0-39) 1Mbps

PSD 100kHz Plot on Channel 00

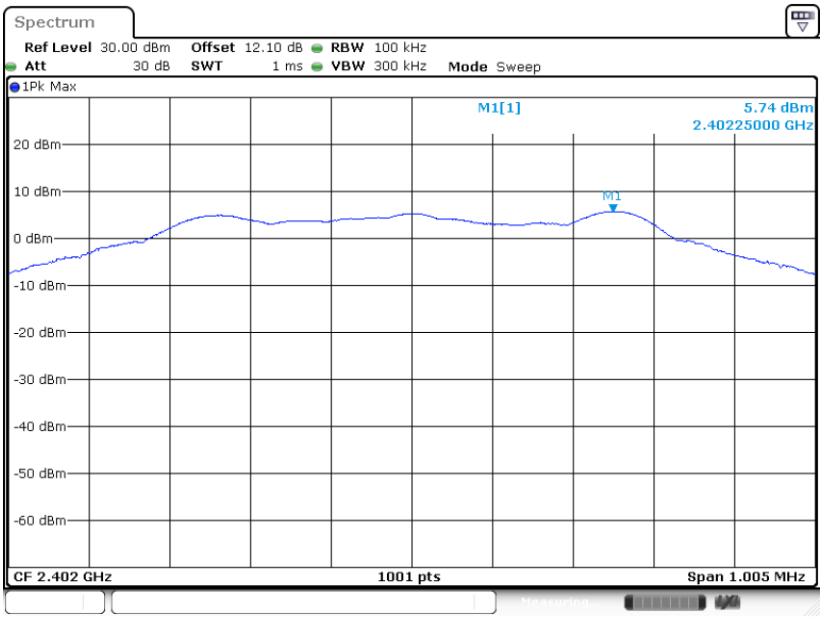

Date: 9.JAN.2024 13:18:53

PSD 100kHz Plot on Channel 19

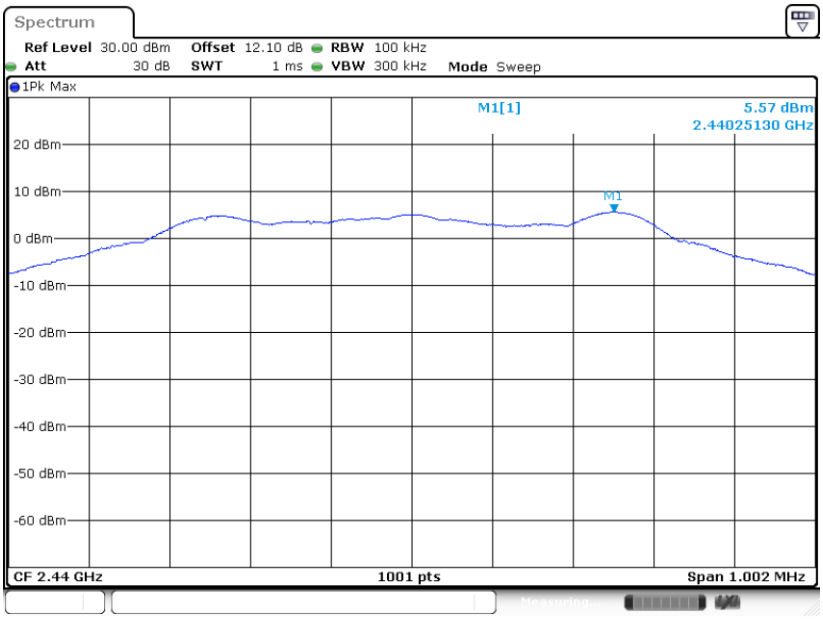

Date: 9.JAN.2024 13:22:16

PSD 100kHz Plot on Channel 39

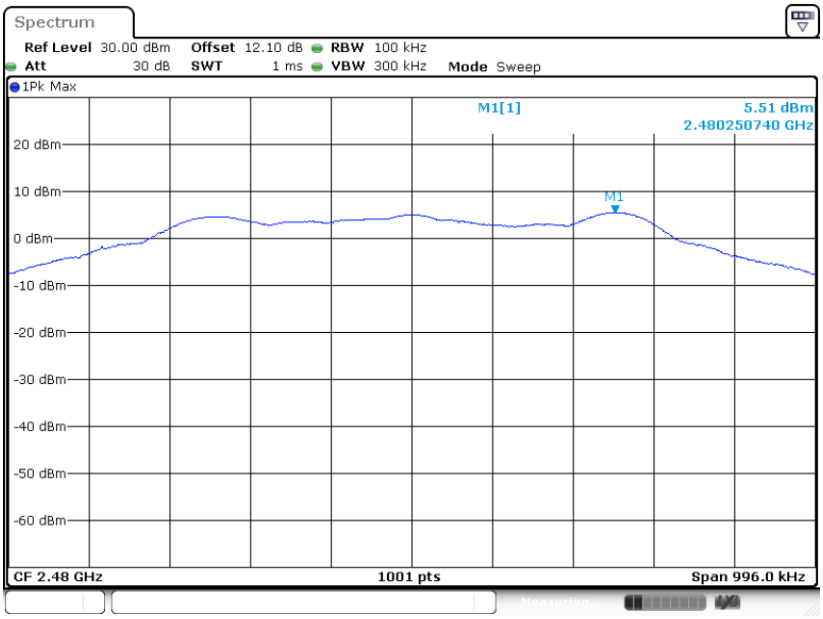

Date: 9.JAN.2024 13:24:01

BLE (CH0-39) 2Mbps

PSD 100kHz Plot on Channel 00

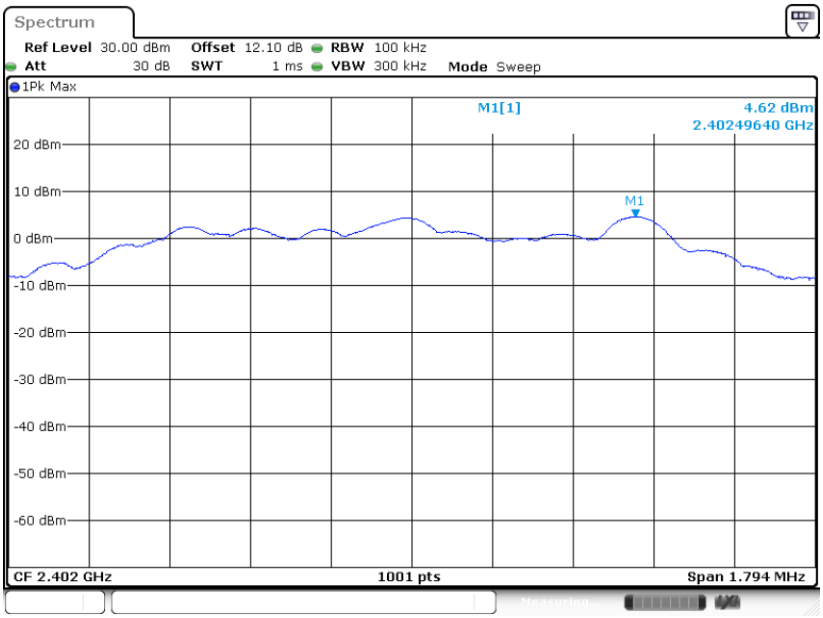

Date: 9.JAN.2024 13:26:17

PSD 100kHz Plot on Channel 19

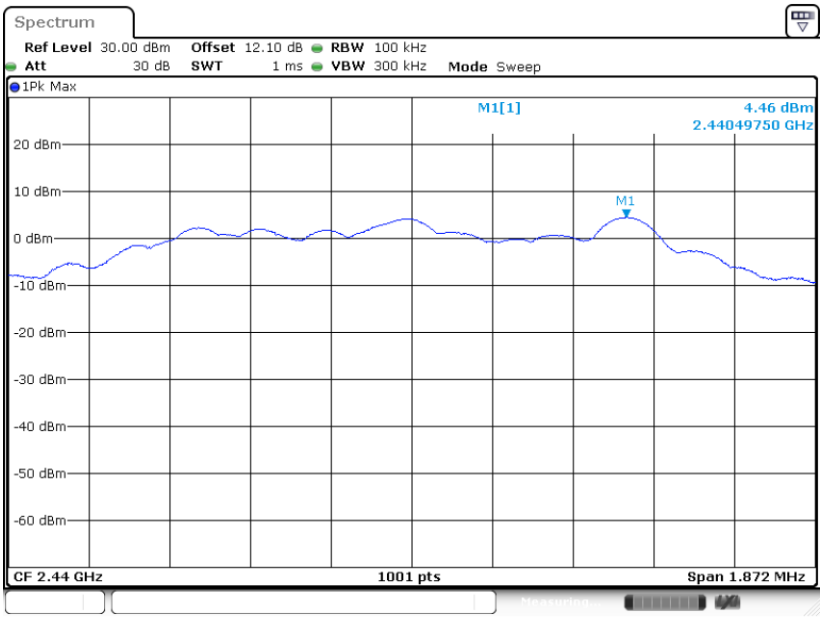

Date: 9.JAN.2024 13:28:17

PSD 100kHz Plot on Channel 39

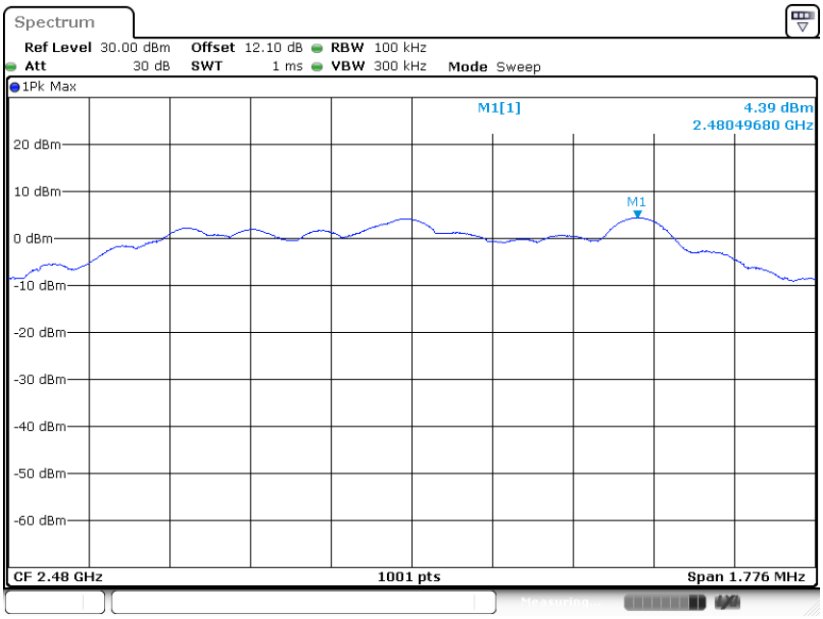

Date: 9.JAN.2024 13:30:13

BLE (CH2-76) -GFSK 1Mbps

PSD 100kHz Plot on Channel 02

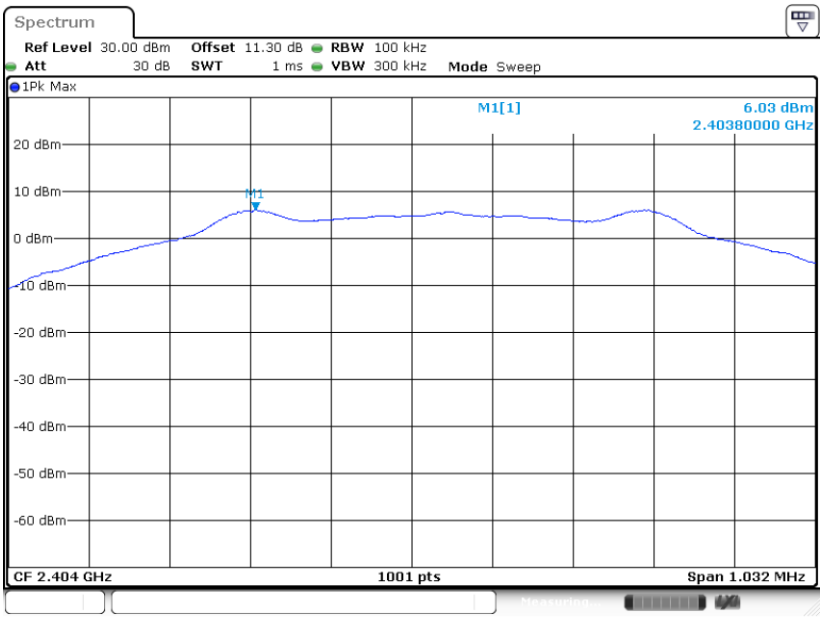

Date: 16.JAN.2024 16:39:19

PSD 100kHz Plot on Channel 22

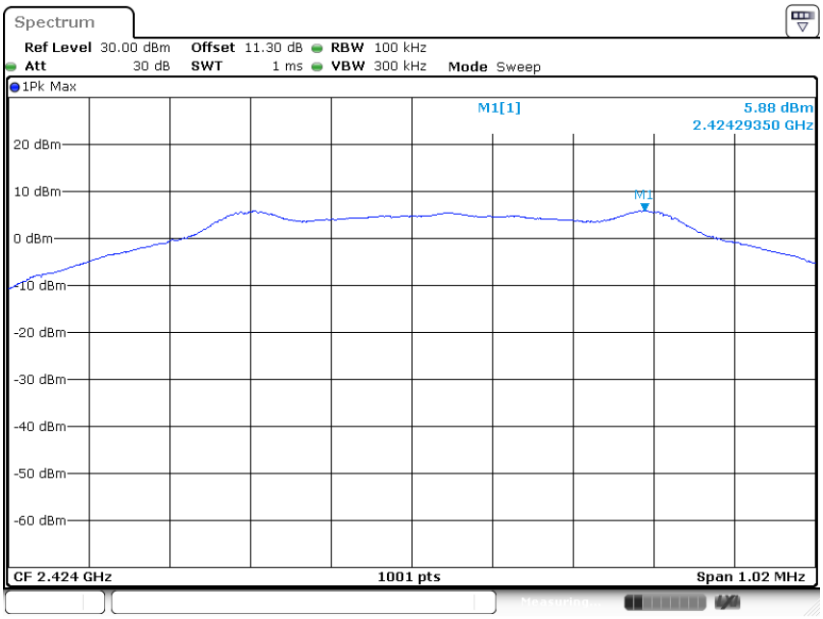

Date: 16.JAN.2024 16:42:08

PSD 100kHz Plot on Channel 26

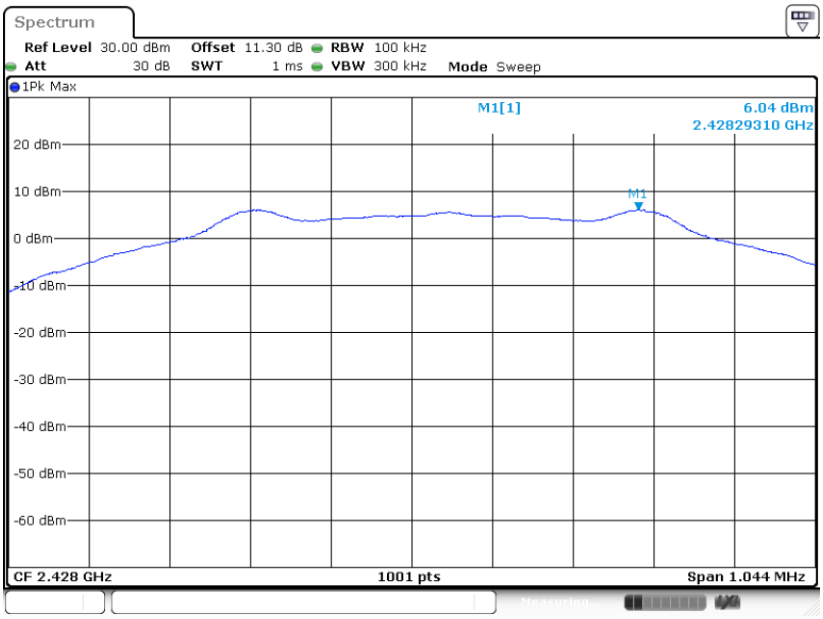

Date: 16.JAN.2024 16:43:47

PSD 100kHz Plot on Channel 76

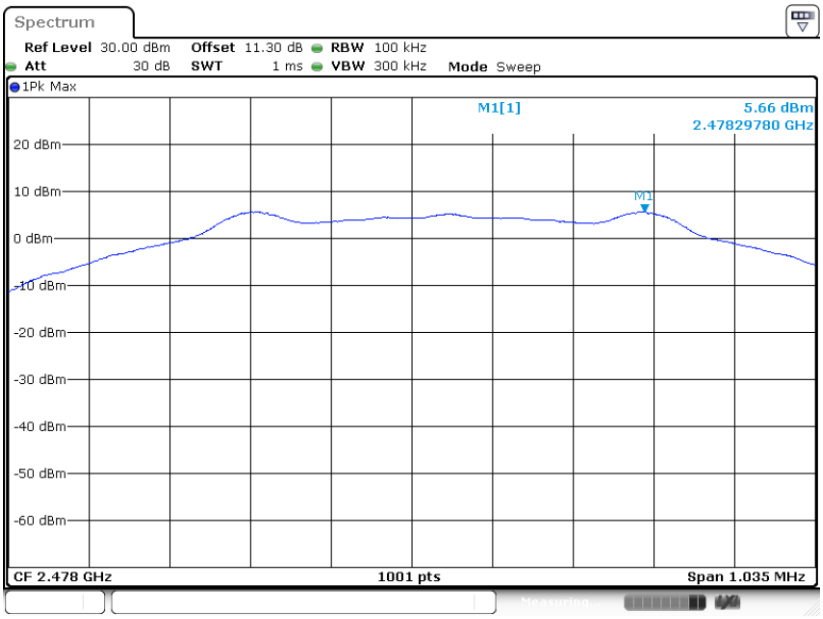

Date: 16.JAN.2024 16:56:58

3.3.7 Test Result of Power Spectral Density Plots (3kHz)

BLE (CH0-39) 1Mbps

PSD 3kHz Plot on Channel 00

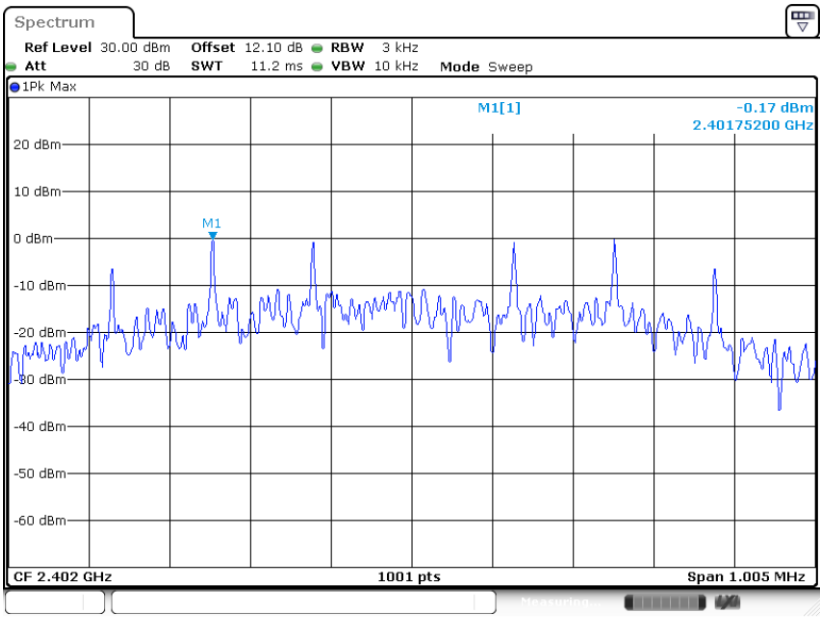

Date: 9.JAN.2024 13:18:37

PSD 3kHz Plot on Channel 19

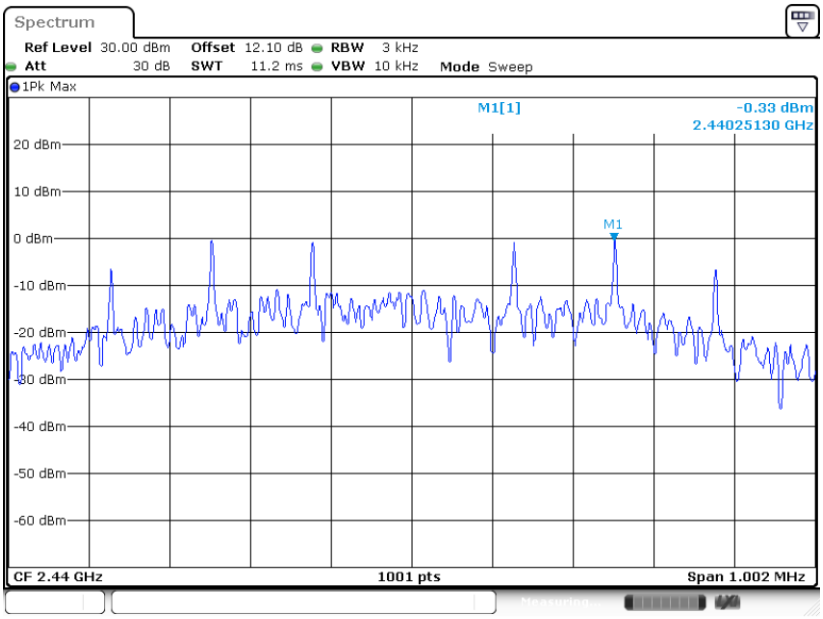

Date: 9.JAN.2024 13:21:59

PSD 3kHz Plot on Channel 39

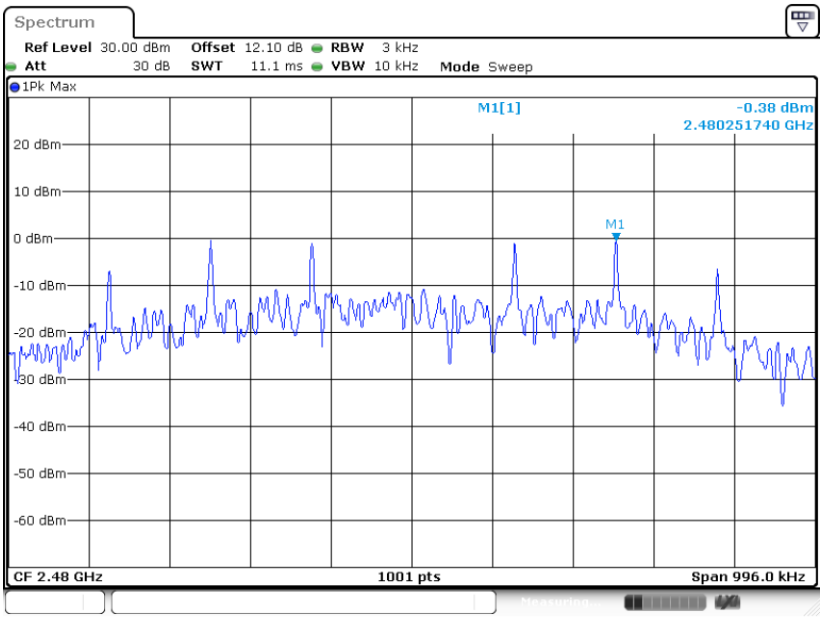

Date: 9.JAN.2024 13:23:43

BLE (CH0-39) 2Mbps

PSD 3kHz Plot on Channel 00

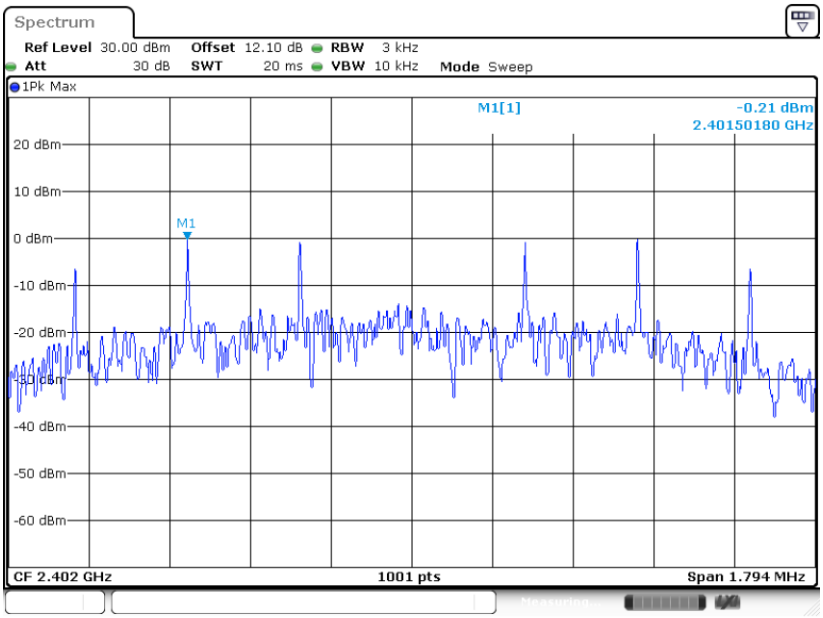

Date: 9.JAN.2024 13:26:00

PSD 3kHz Plot on Channel 19

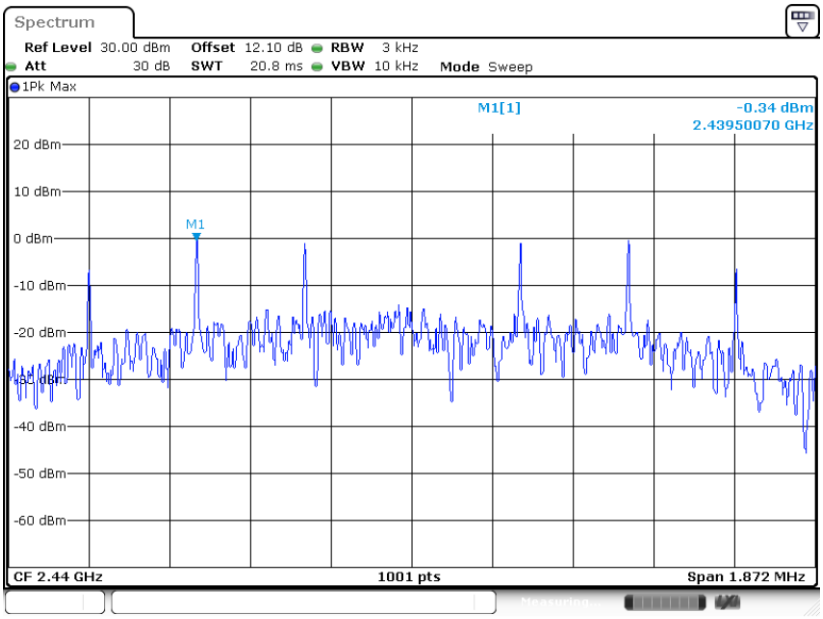

Date: 9.JAN.2024 13:28:00

PSD 3kHz Plot on Channel 39

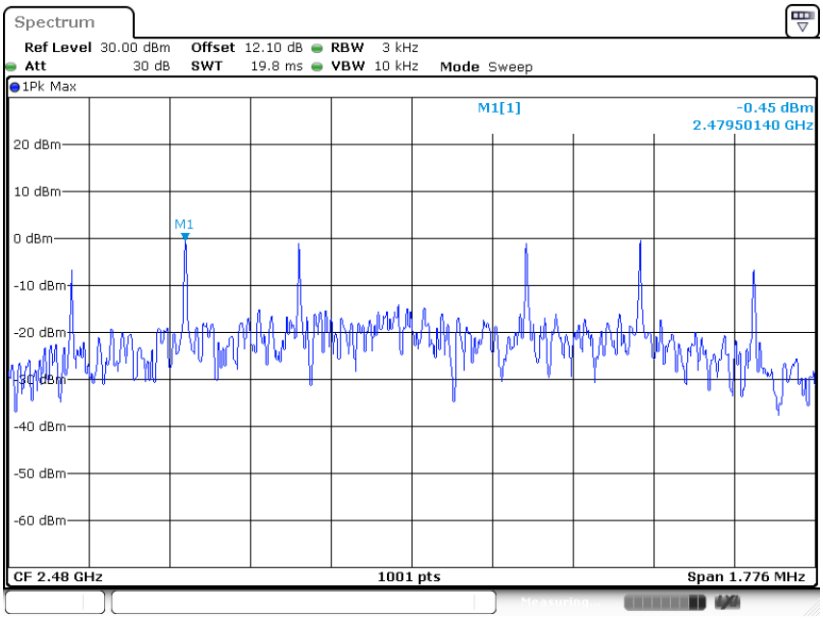

Date: 9.JAN.2024 13:29:56

BLE (CH2-76) 1Mbps

PSD 3kHz Plot on Channel 02

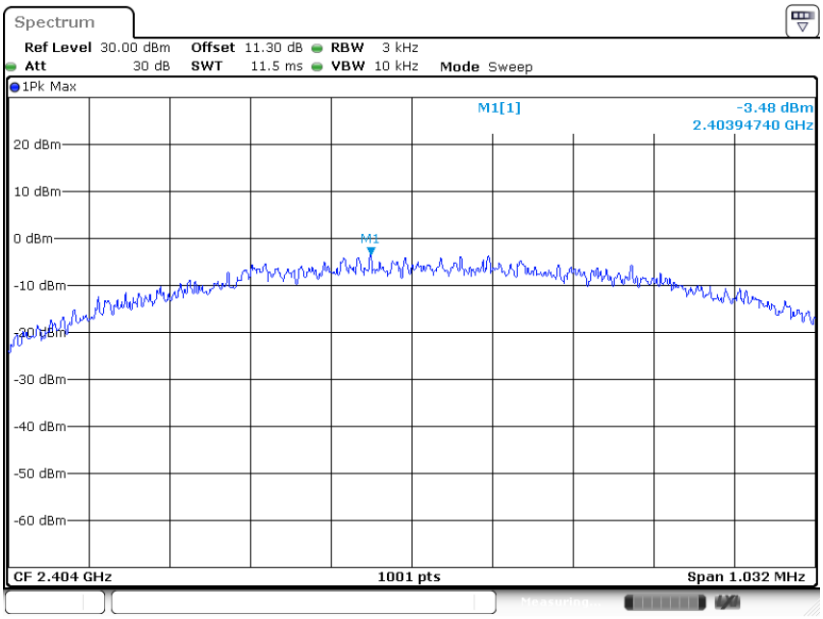

Date: 16.JAN.2024 16:38:59

PSD 3kHz Plot on Channel 22

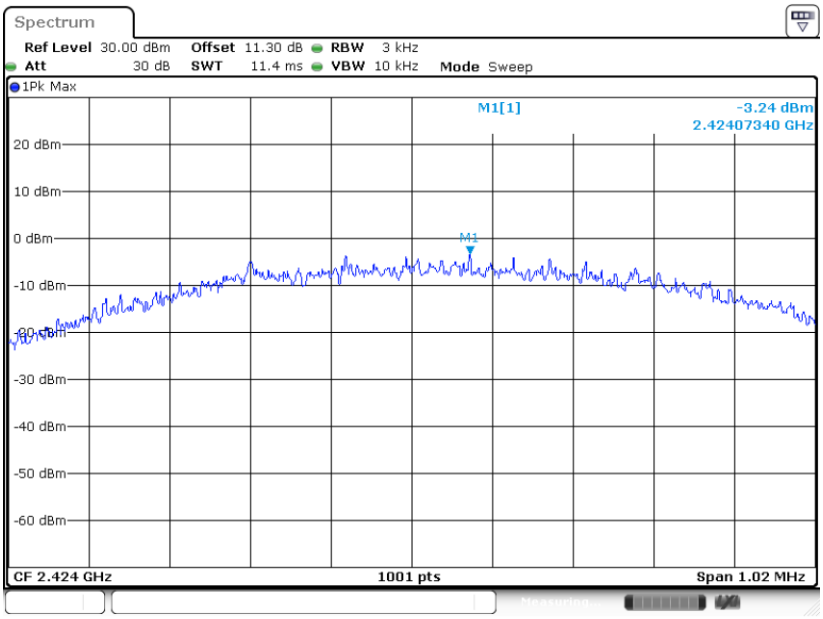

Date: 16.JAN.2024 16:41:50

PSD 3kHz Plot on Channel 26

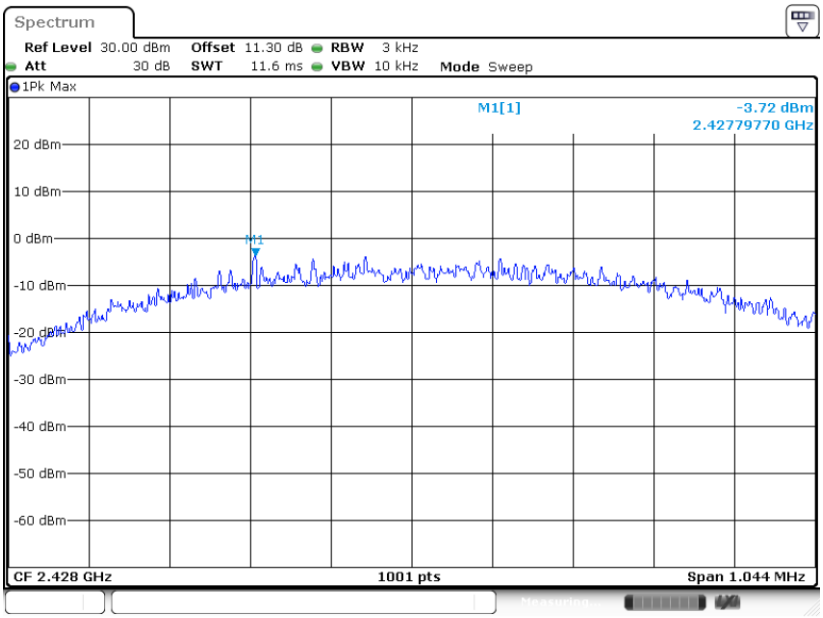

Date: 16.JAN.2024 16:43:31

PSD 3kHz Plot on Channel 76

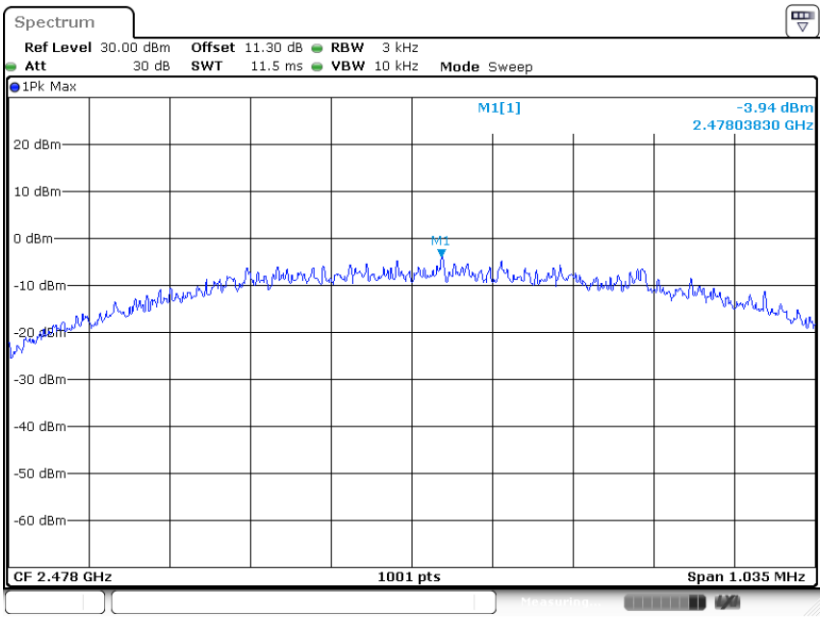

Date: 16.JAN.2024 16:56:42

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

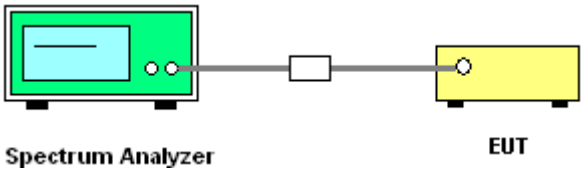

3.4.5 Test Result of Conducted Band Edges Plots

BLE (CH0-39) 1Mbps

Low Band Edge Plot on Channel 00

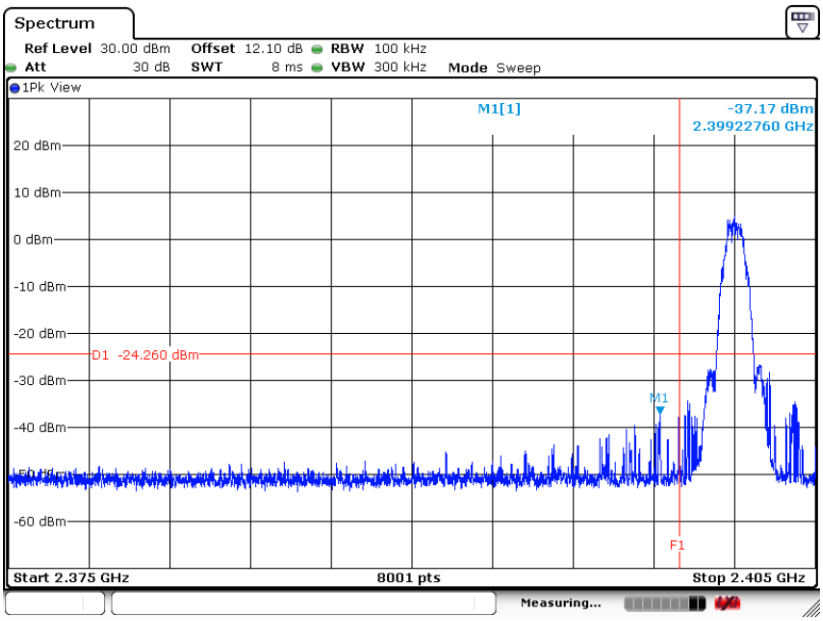

Date: 9.JAN.2024 13:19:39

High Band Edge Plot on Channel 39

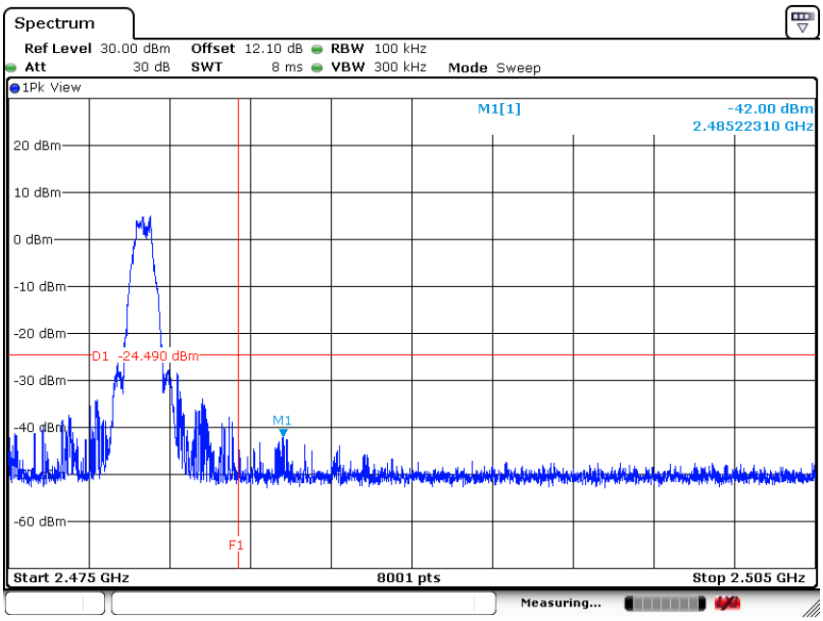

Date: 9.JAN.2024 13:24:56

BLE (CH0-39) 2Mbps

Low Band Edge Plot on Channel 00

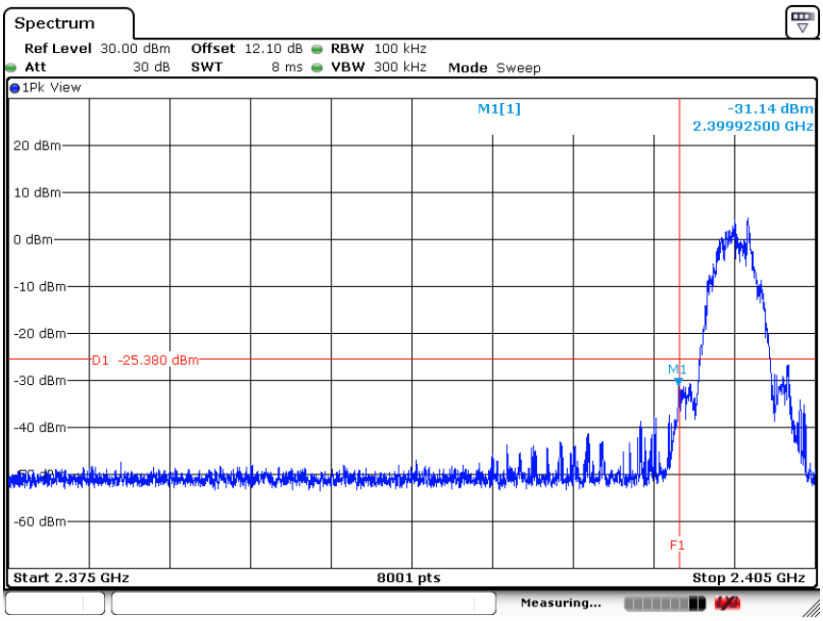

Date: 9.JAN.2024 13:27:07

High Band Edge Plot on Channel 39

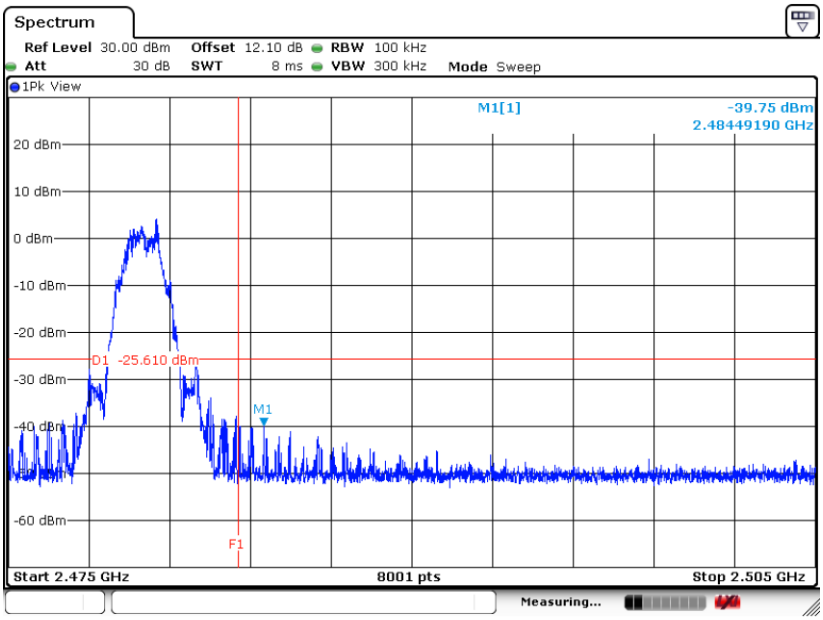

Date: 9.JAN.2024 13:30:59

BLE (CH2-76) 1Mbps

Low Band Edge Plot on Channel 02

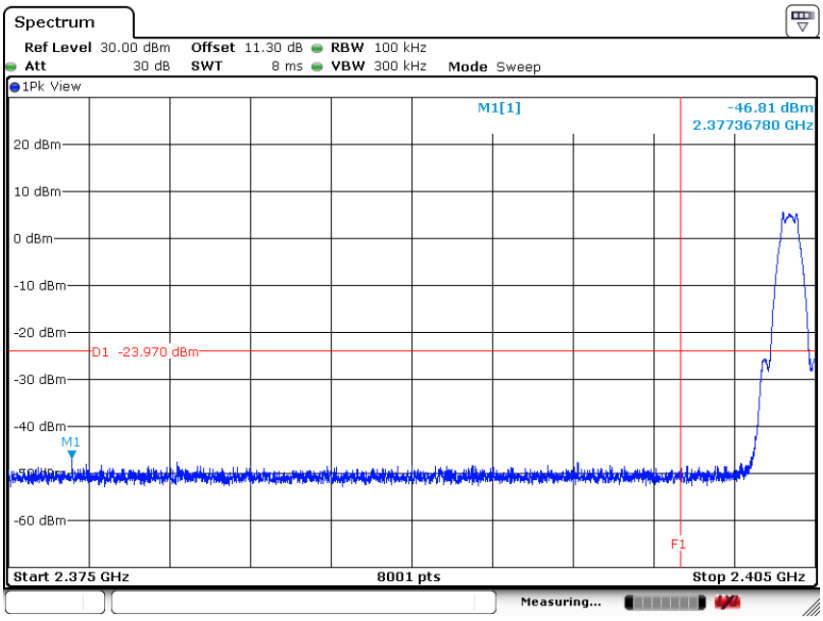

Date: 16.JAN.2024 16:40:55

High Band Edge Plot on Channel 76

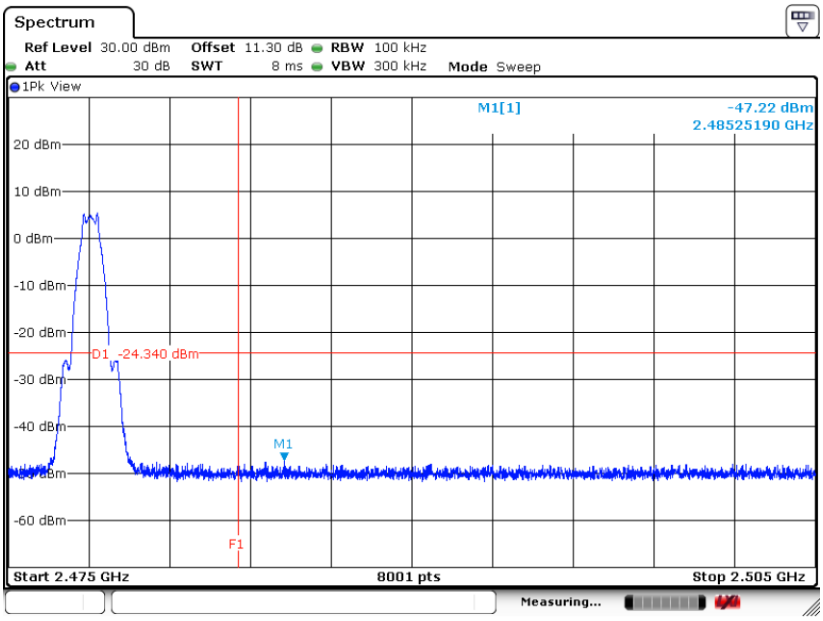

Date: 16.JAN.2024 16:59:39

3.4.6 Test Result of Conducted Spurious Emission Plots

BLE (CH0-39) 1Mbps

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

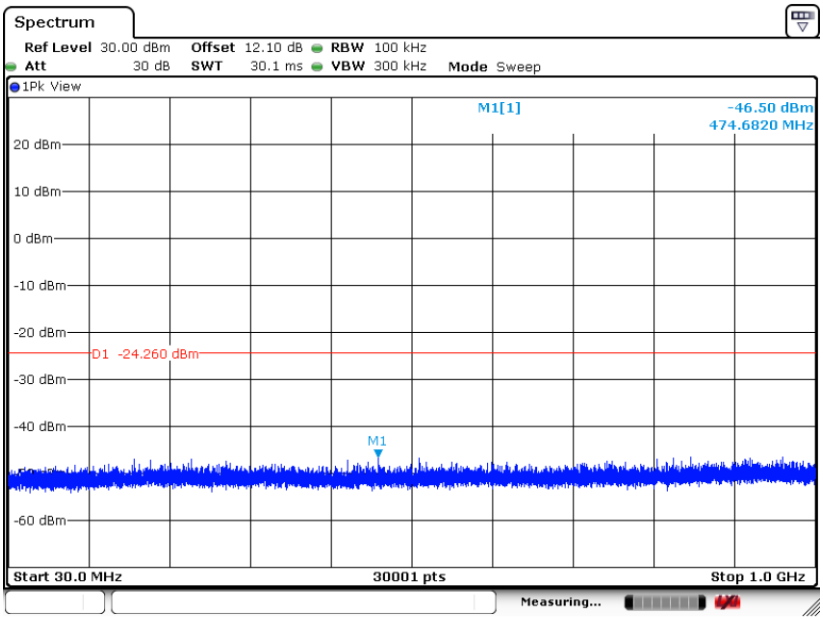

Date: 9.JAN.2024 13:19:10

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

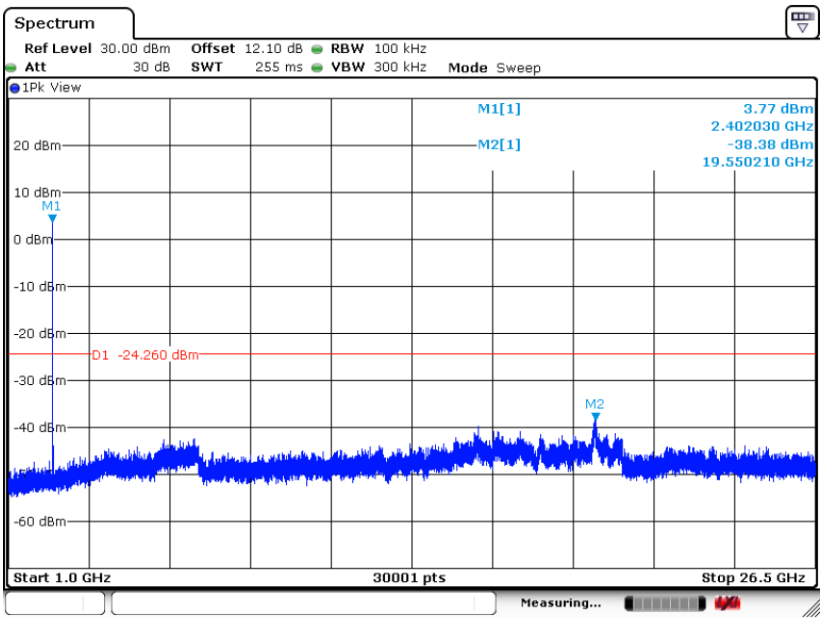

Date: 9.JAN.2024 13:19:26

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

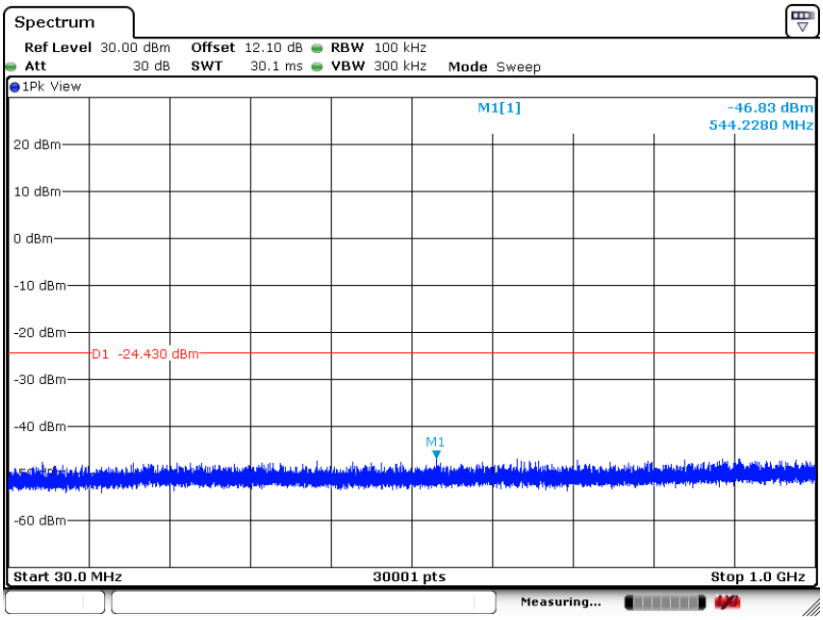

Date: 9.JAN.2024 13:22:32

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

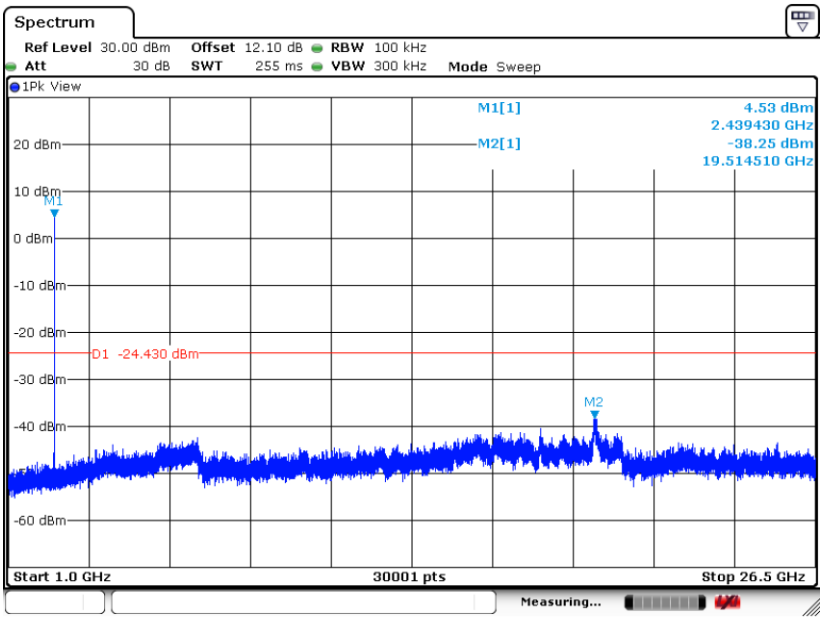

Date: 9.JAN.2024 13:22:47

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

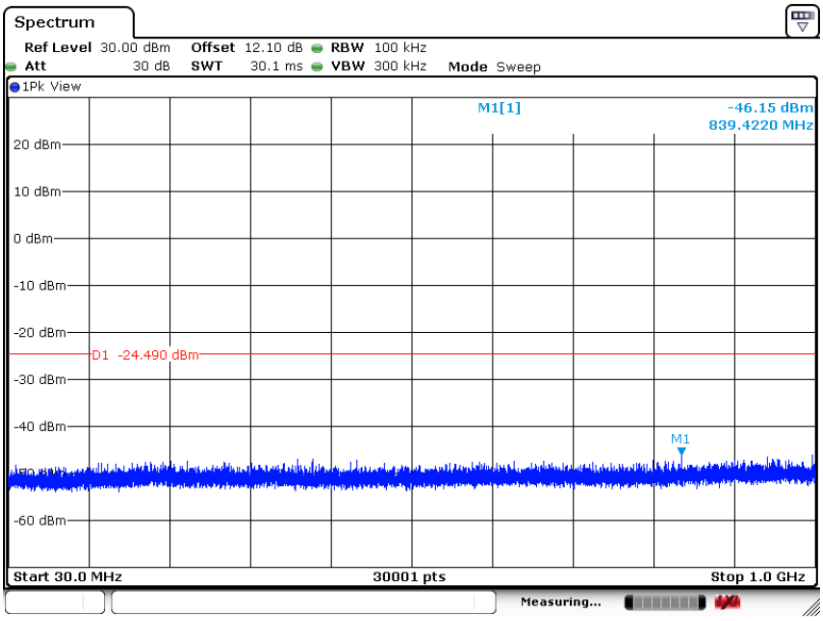

Date: 9.JAN.2024 13:24:20

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

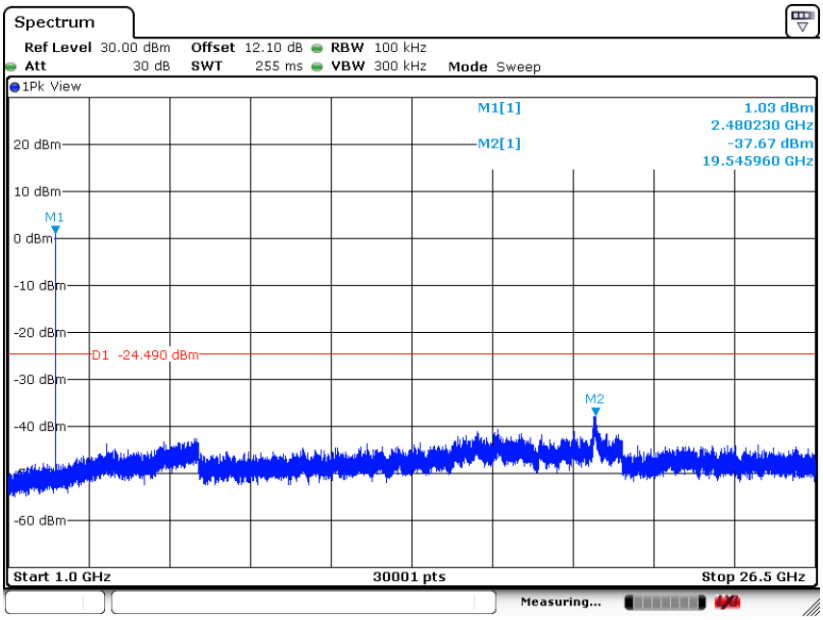

Date: 9.JAN.2024 13:24:37

BLE (CH0-39) 2Mbps

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 00

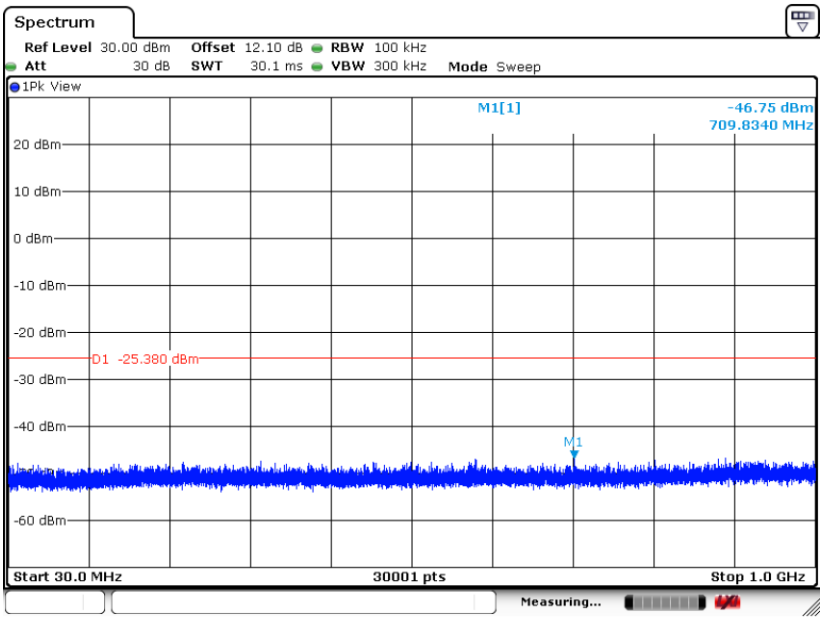

Date: 9.JAN.2024 13:26:33

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 00

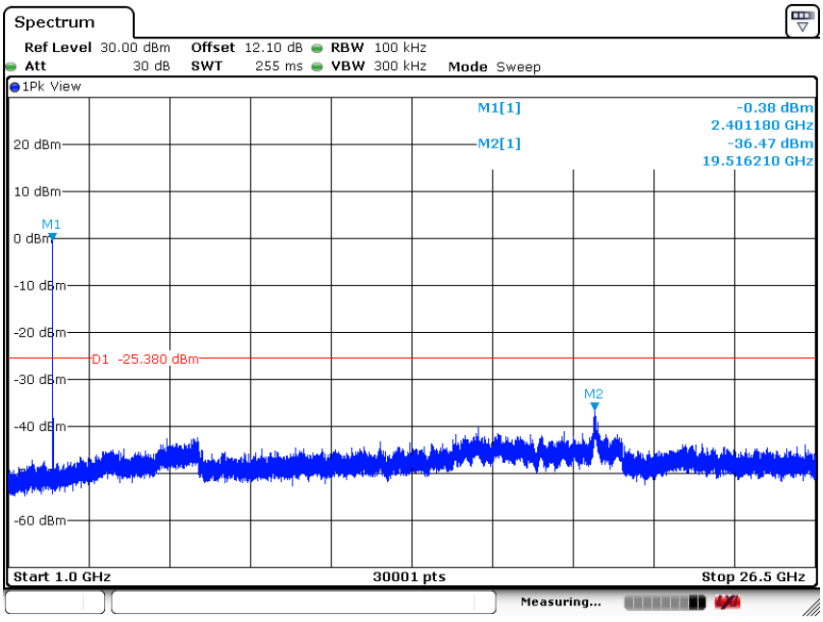

Date: 9.JAN.2024 13:26:50

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 19

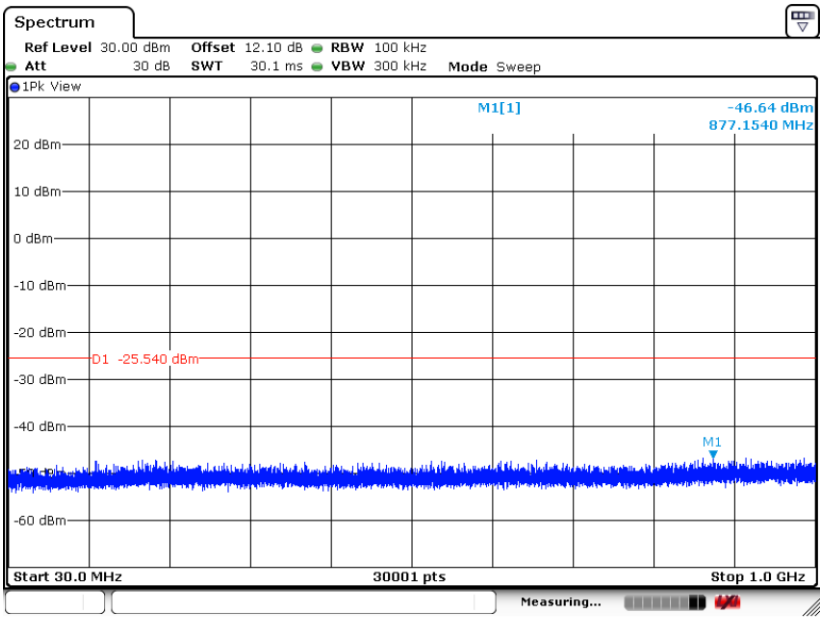

Date: 9.JAN.2024 13:28:35

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 19

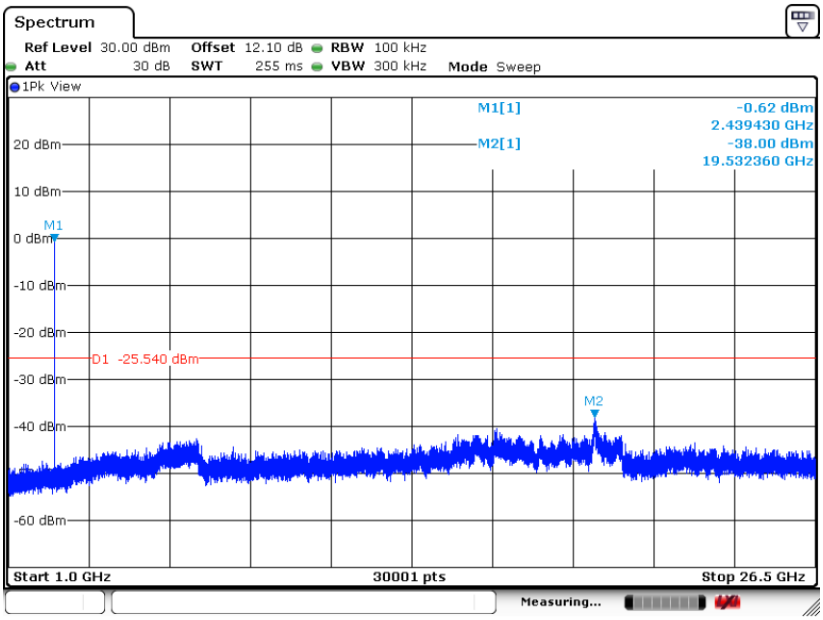

Date: 9.JAN.2024 13:28:51

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 39

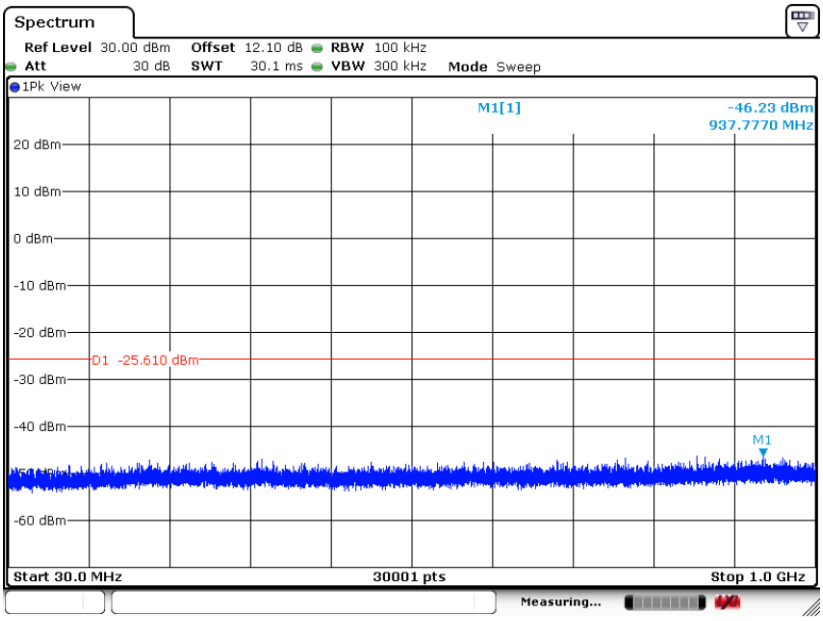

Date: 9.JAN.2024 13:30:30

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 39

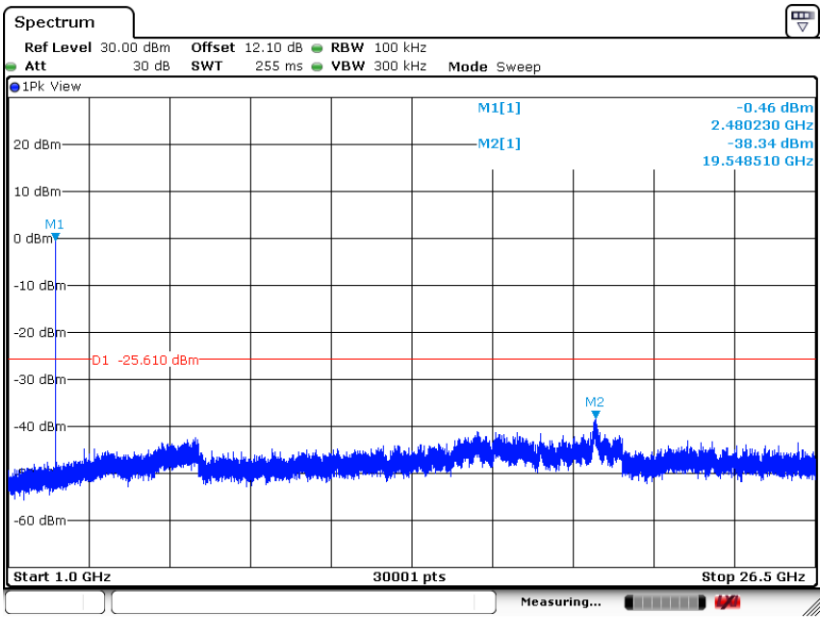

Date: 9.JAN.2024 13:30:45

BLE (CH2-76) – GFSK 1Mbps

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 02

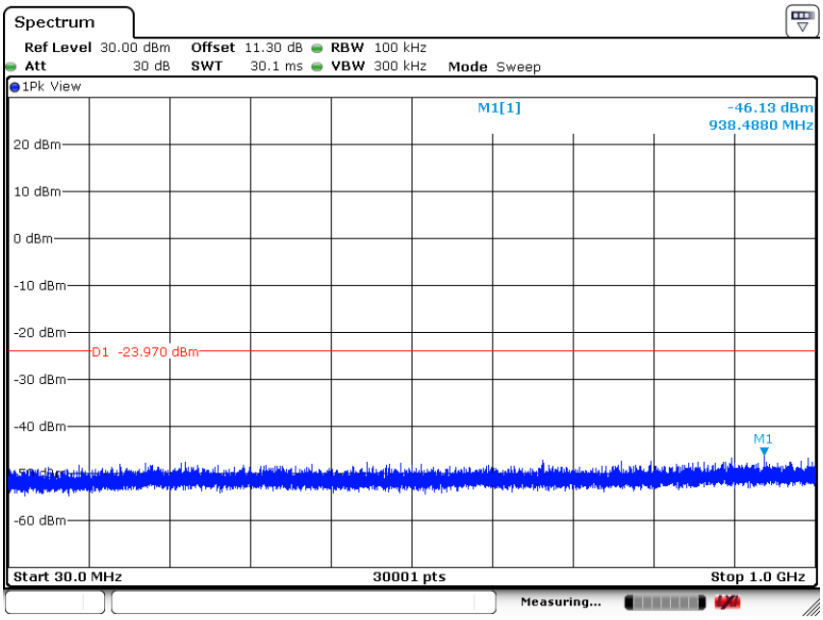

Date: 16.JAN.2024 16:39:36

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 02

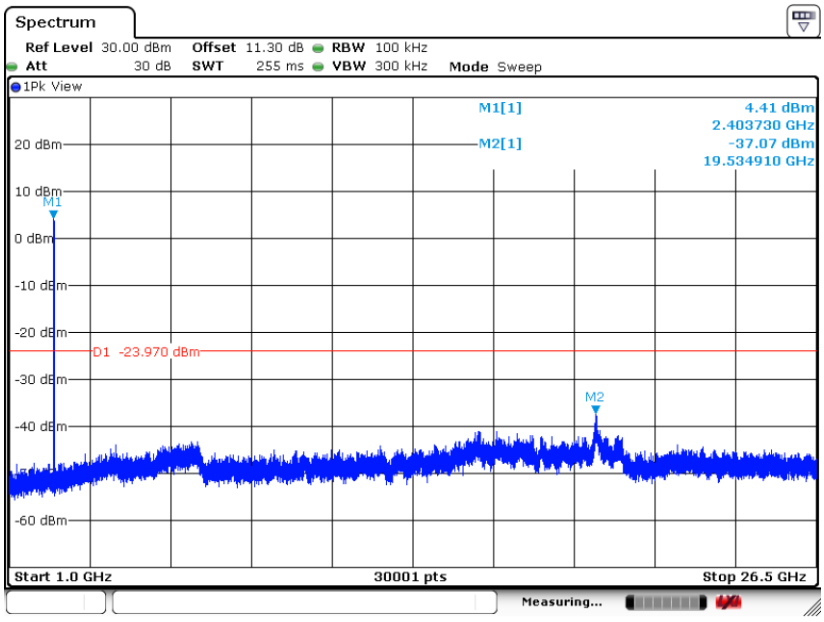

Date: 16.JAN.2024 16:39:52

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 22

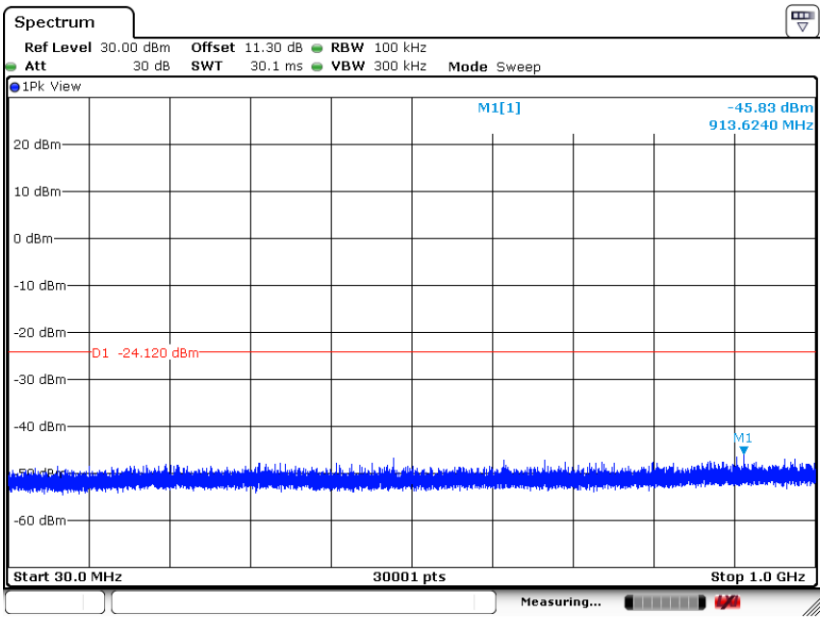

Date: 16.JAN.2024 16:42:26

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 22

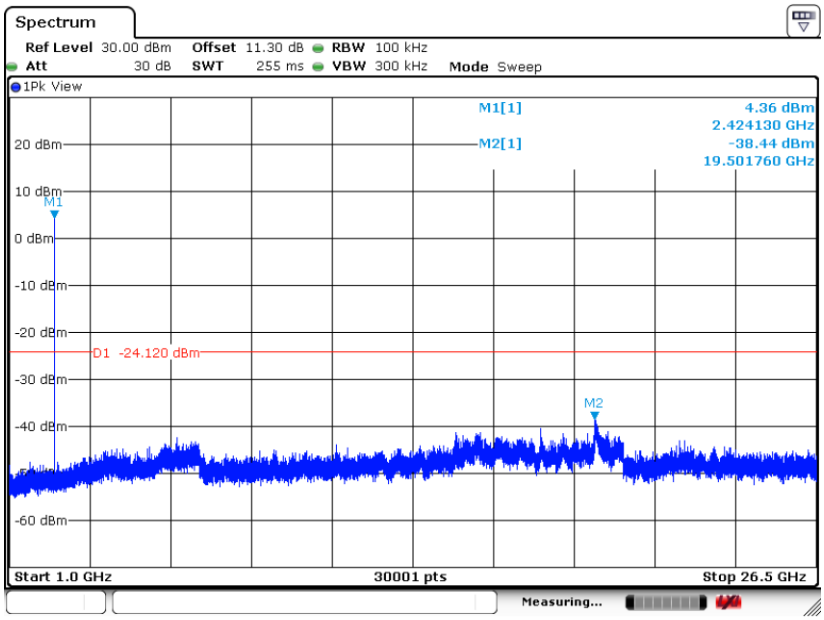

Date: 16.JAN.2024 16:42:41

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 26

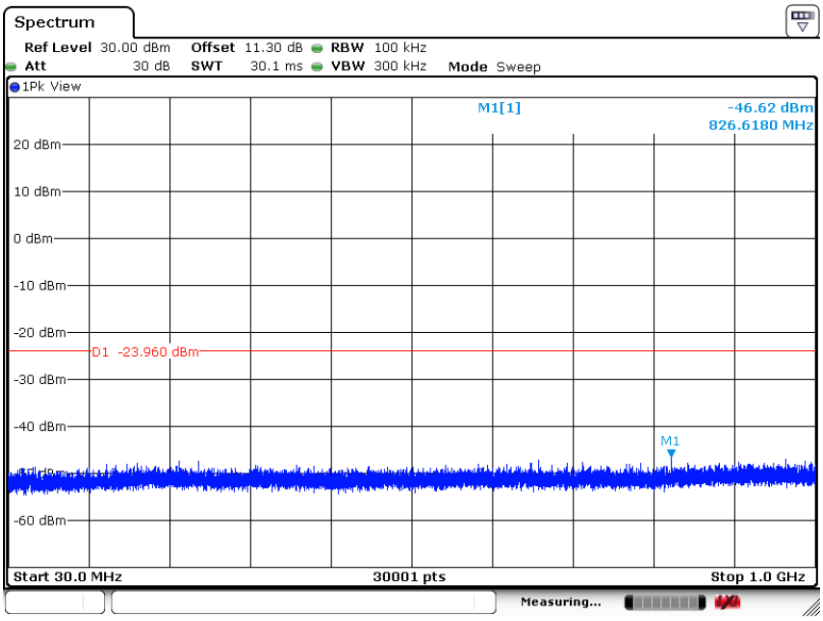

Date: 16.JAN.2024 16:44:06

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 26

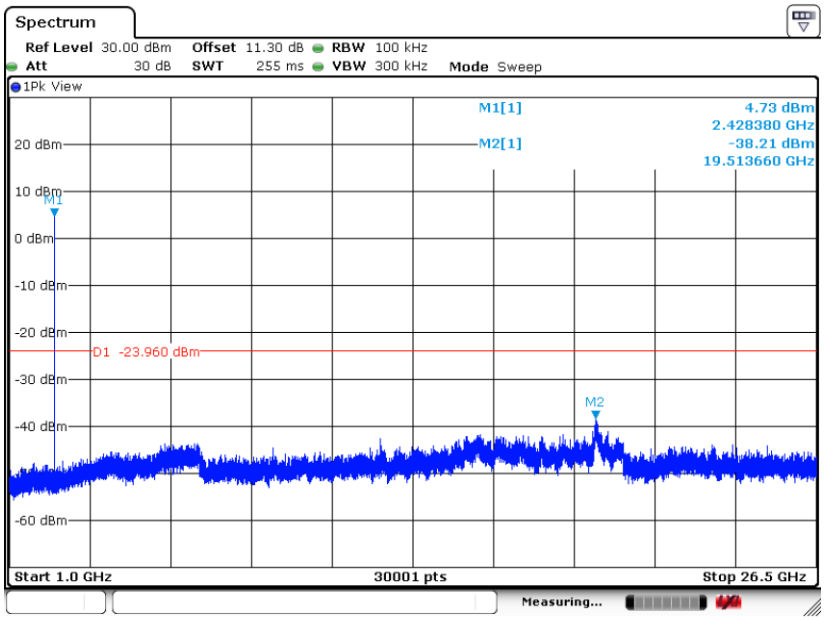

Date: 16.JAN.2024 16:44:22

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 76

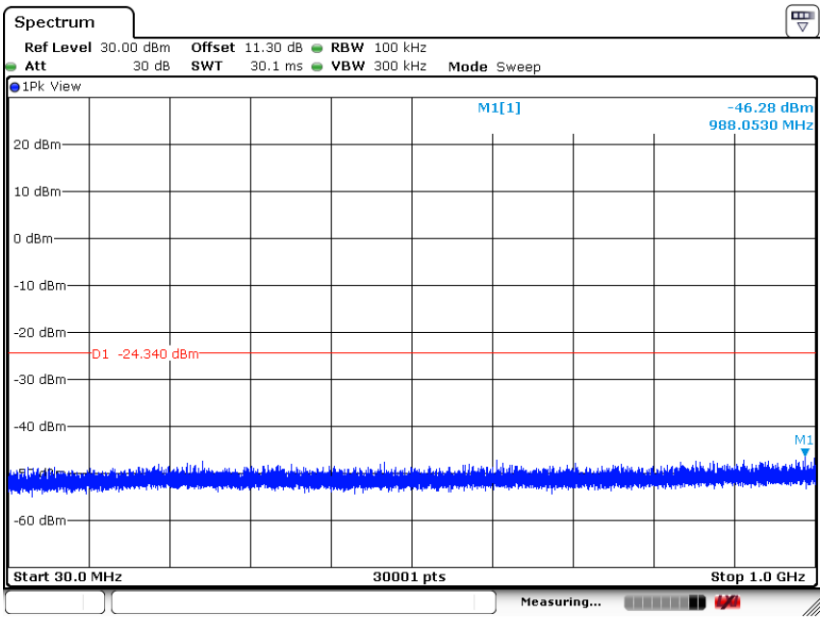

Date: 16.JAN.2024 16:57:15

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 76

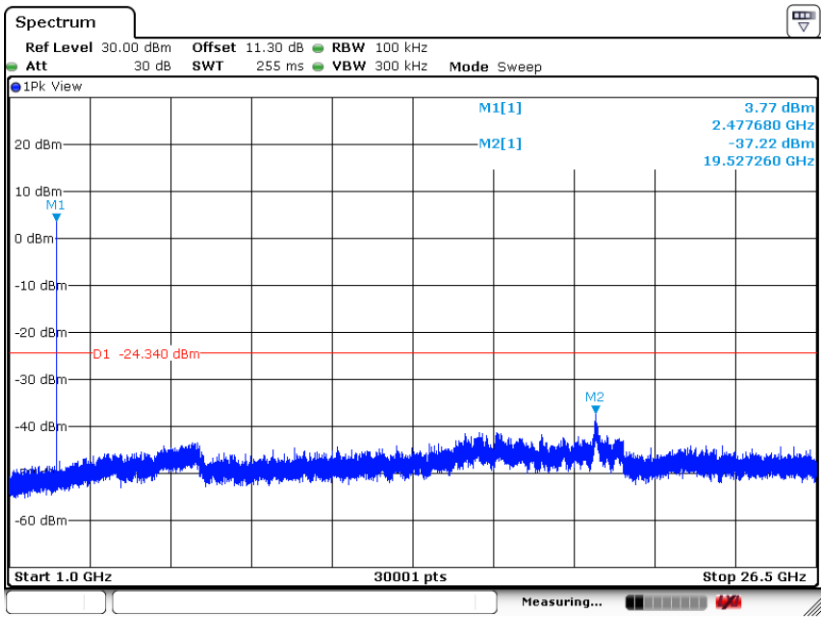

Date: 16.JAN.2024 16:57:31

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
   (1) Span shall wide enough to fully capture the emission being measured;
   (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
   (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.
   For average measurement:
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup

For radiated emissions below 30MHz

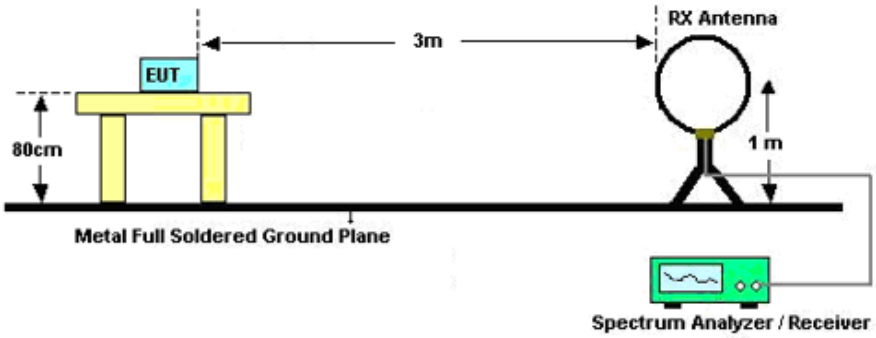

For radiated emissions from 30MHz to 1GHz

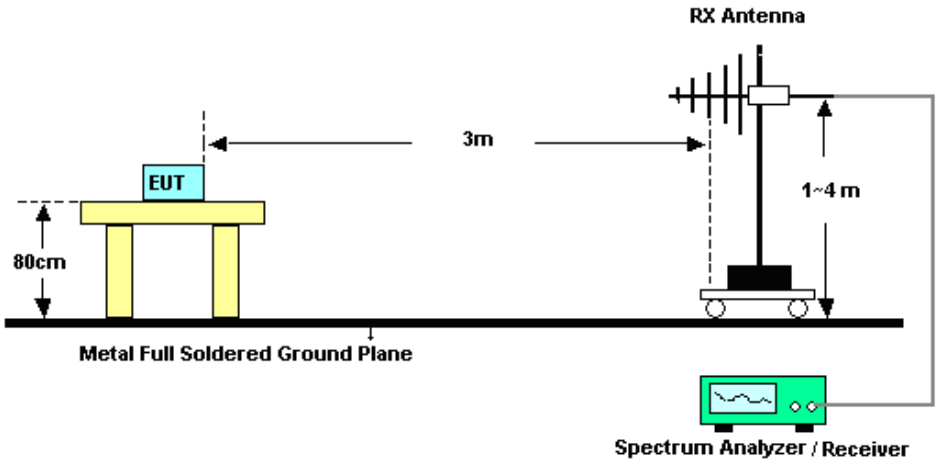

For radiated emissions above 1GHz

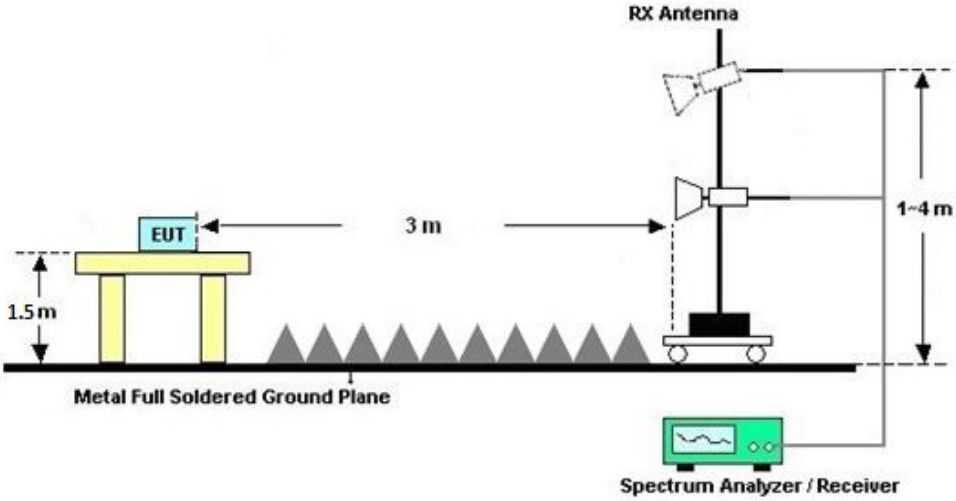

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

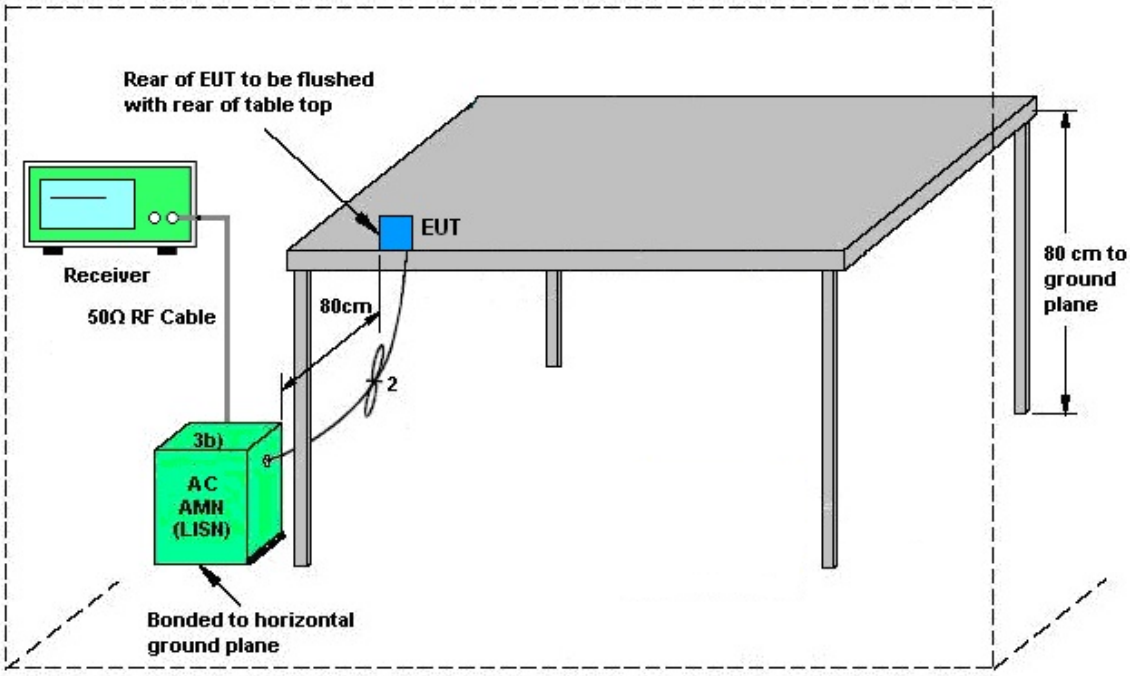

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Jan. 09, 2024~ Jan. 16, 2024	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Jan. 09, 2024~ Jan. 16, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Jan. 09, 2024~ Jan. 16, 2024	Aug. 20, 2024	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10℃ ~ 50℃ 10%RH~99%RH	Apr. 08, 2023	Jan. 09, 2024~ Jan. 16, 2024	Apr. 07, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Jan. 10, 2024~ Jan. 18, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Jan. 10, 2024~ Jan. 18, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Jan. 10, 2024~ Jan. 18, 2024	Jul. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Jan. 10, 2024~ Jan. 18, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Jan. 10, 2024~ Jan. 18, 2024	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 08, 2023	Jan. 10, 2024~ Jan. 18, 2024	Apr. 07, 2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Jan. 10, 2024~ Jan. 18, 2024	Apr. 03, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Jan. 10, 2024~ Jan. 18, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 18, 2023	Jan. 10, 2024~ Jan. 18, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Jan. 10, 2024~ Jan. 18, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Jan. 10, 2024~ Jan. 18, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 10, 2024~ Jan. 18, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 10, 2024~ Jan. 18, 2024	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Jan. 17, 2024	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Jan. 17, 2024	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Jan. 17, 2024	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Jan. 17, 2024	Jul. 06, 2024	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.1 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7 dB

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB

---------- THE END ----------

Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Liu Qiu Qiu	Temperature:	21~25	°C
Test Date:	2024/1/9~2024/1/16	Relative Humidity:	51~54	%

BLE (CH0-39) 1Mbps

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.017	0.670	0.50	Pass
BLE	1Mbps	1	19	2440	1.019	0.668	0.50	Pass
BLE	1Mbps	1	39	2480	1.017	0.664	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	3.14	6.70	30.00	0.50	7.20	36.00	Pass
BLE	1Mbps	1	19	2440	3.14	6.60	30.00	0.50	7.10	36.00	Pass
BLE	1Mbps	1	39	2480	3.14	6.60	30.00	0.50	7.10	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.74	-0.17	0.50	8.00	Pass
BLE	1Mbps	1	19	2440	5.57	-0.33	0.50	8.00	Pass
BLE	1Mbps	1	39	2480	5.51	-0.38	0.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

BLE (CH0-39) 2Mbps

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.010	1.196	0.50	Pass
BLE	2Mbps	1	19	2440	2.014	1.248	0.50	Pass
BLE	2Mbps	1	39	2480	2.010	1.184	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	4.95	6.60	30.00	0.50	7.10	36.00	Pass
BLE	2Mbps	1	19	2440	4.95	6.50	30.00	0.50	7.00	36.00	Pass
BLE	2Mbps	1	39	2480	4.95	6.50	30.00	0.50	7.00	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	4.62	-0.21	0.50	8.00	Pass
BLE	2Mbps	1	19	2440	4.46	-0.34	0.50	8.00	Pass
BLE	2Mbps	1	39	2480	4.39	-0.45	0.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Report Number : FR3N1513B

BLE (CH2-76) 1Mbps

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	2	2404	1.031	0.688	0.50	Pass
BLE	1Mbps	1	22	2424	1.021	0.680	0.50	Pass
BLE	1Mbps	1	26	2428	1.015	0.696	0.50	Pass
BLE	1Mbps	1	76	2478	1.031	0.690	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	2	2404	0.00	6.60	30.00	0.50	7.10	36.00	Pass
BLE	1Mbps	1	22	2424	0.00	6.50	30.00	0.50	7.00	36.00	Pass
BLE	1Mbps	1	26	2428	0.00	6.60	30.00	0.50	7.10	36.00	Pass
BLE	1Mbps	1	76	2478	0.00	6.40	30.00	0.50	6.90	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	2	2404	6.03	-3.48	0.50	8.00	Pass
BLE	1Mbps	1	22	2424	5.88	-3.24	0.50	8.00	Pass
BLE	1Mbps	1	26	2428	6.04	-3.72	0.50	8.00	Pass
BLE	1Mbps	1	76	2478	5.66	-3.94	0.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Appendix B. AC Conducted Emission Test Results

Test Engineer :	FangMing Liang	**Temperature :**	22~24℃
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	**Phase :**	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

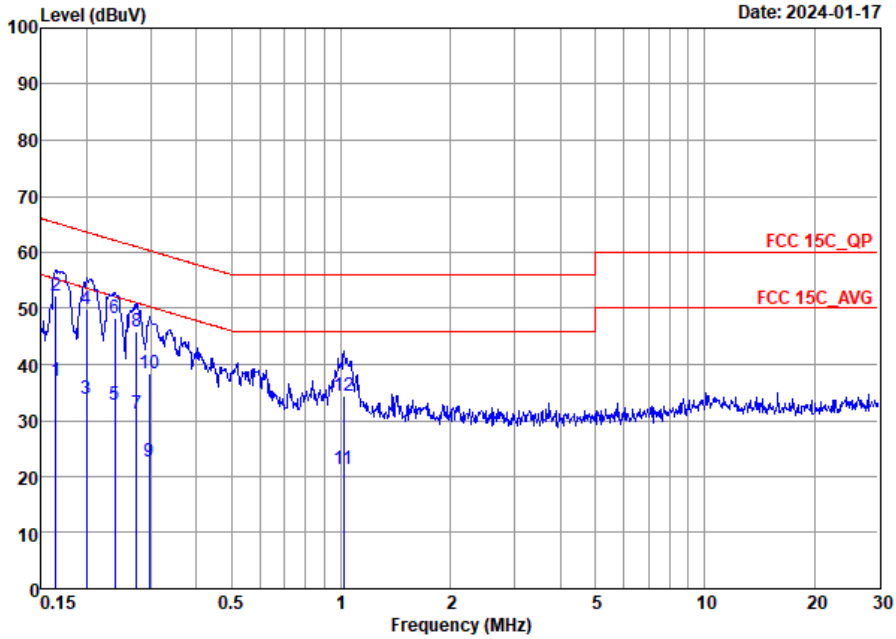

Site : CO01-SZ
Condition: FCC 15C_QP AC LISN 100063_L LINE

		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
		MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1		0.16	37.12	-18.13	55.25	16.70	10.28	10.14	Average
2	*	0.16	52.32	-12.93	65.25	31.90	10.28	10.14	QP
3		0.20	33.74	-19.88	53.62	13.10	10.49	10.15	Average
4		0.20	49.94	-13.68	63.62	29.30	10.49	10.15	QP
5		0.24	32.85	-19.28	52.13	12.50	10.20	10.15	Average
6		0.24	48.25	-13.88	62.13	27.90	10.20	10.15	QP
7		0.27	31.24	-19.74	50.98	11.01	10.08	10.15	Average
8		0.27	45.74	-15.24	60.98	25.51	10.08	10.15	QP
9		0.30	22.80	-27.52	50.32	2.60	10.05	10.15	Average
10		0.30	38.40	-21.92	60.32	18.20	10.05	10.15	QP
11		1.02	21.30	-24.70	46.00	0.90	10.24	10.16	Average
12		1.02	34.50	-21.50	56.00	14.10	10.24	10.16	QP

Test Engineer :	FangMing Liang	**Temperature :**	22~24℃
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	**Phase :**	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

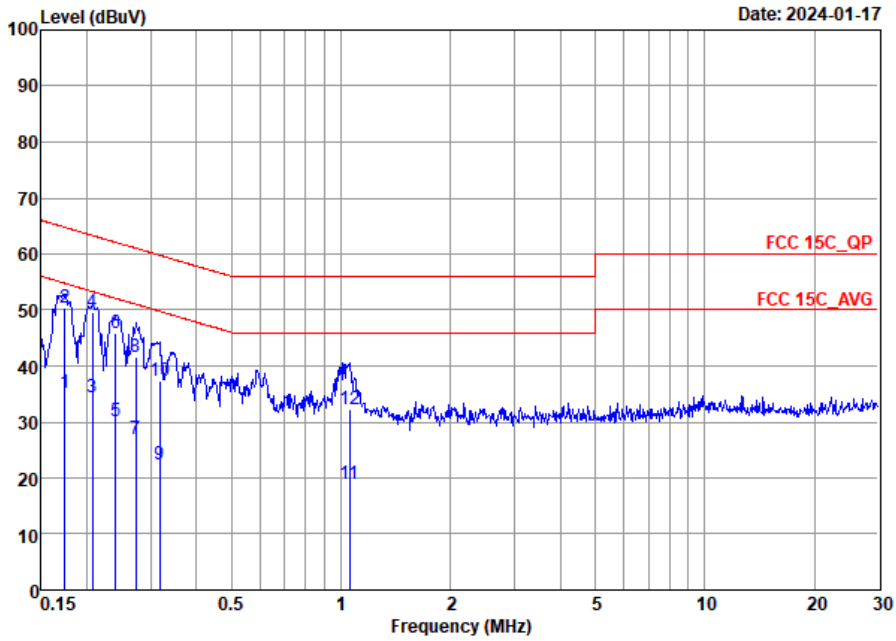

Site : CO01-SZ
Condition: FCC 15C_QP AC LISN 100063_N NEUTRAL

		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
		MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1		0.17	35.22	-19.55	54.77	14.60	10.48	10.14	Average
2		0.17	50.52	-14.25	64.77	29.90	10.48	10.14	QP
3		0.21	34.40	-18.92	53.32	14.00	10.25	10.15	Average
4	*	0.21	49.50	-13.82	63.32	29.10	10.25	10.15	QP
5		0.24	30.22	-21.86	52.08	9.90	10.17	10.15	Average
6		0.24	45.82	-16.26	62.08	25.50	10.17	10.15	QP
7		0.27	27.06	-23.97	51.03	6.60	10.31	10.15	Average
8		0.27	41.56	-19.47	61.03	21.10	10.31	10.15	QP
9		0.32	22.38	-27.42	49.80	1.79	10.43	10.16	Average
10		0.32	37.38	-22.42	59.80	16.79	10.43	10.16	QP
11		1.05	18.98	-27.02	46.00	-1.39	10.21	10.16	Average
12		1.05	32.18	-23.82	56.00	11.81	10.21	10.16	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Shiwei Wen	Relative Humidity :	48~49%
		Temperature :	24~25℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	1	BLE(CH0-39)	CH00	2402	1Mbps	-
Mode 2	2400-2483.5	1	BLE(CH0-39)	CH19	2440	1Mbps	-
Mode 3	2400-2483.5	1	BLE(CH0-39)	CH39	2480	1Mbps	-
Mode 4	2400-2483.5	1	BLE(CH0-39)	CH00	2402	2Mbps	-
Mode 5	2400-2483.5	1	BLE(CH0-39)	CH19	2440	2Mbps	-
Mode 6	2400-2483.5	1	BLE(CH0-39)	CH39	2480	2Mbps	-
Mode 7	2400-2483.5	1	BLE(CH0-39)	CH39	2480	2Mbps	LF
Mode 8	2400-2483.5	1	BLE (CH2-76)	CH 02	2404	1Mbps	-
Mode 9	2400-2483.5	1	BLE (CH2-76)	CH 22	2424	1Mbps	-
Mode 10	2400-2483.5	1	BLE (CH2-76)	CH 26	2428	1Mbps	-
Mode 11	2400-2483.5	1	BLE (CH2-76)	CH 76	2478	1Mbps	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	BLE(CH0-39)	CH00	2388.23	39.03	54.00	-14.97	V	AVERAGE	Pass	Band Edge
1	BLE(CH0-39)	CH00	4804.00	45.14	74.00	-28.86	H	Peak	Pass	Harmonic
2	BLE(CH0-39)	CH19	-	-	-	-	-	-	-	Band Edge
2	BLE(CH0-39)	CH19	7320.00	47.86	74.00	-26.14	H	Peak	Pass	Harmonic
3	BLE(CH0-39)	CH39	2484.04	45.46	54.00	-8.54	V	AVERAGE	Pass	Band Edge
3	BLE(CH0-39)	CH39	7440.00	48.56	74.00	-25.44	V	Peak	Pass	Harmonic
4	BLE(CH0-39)	CH00	2389.91	38.56	54.00	-15.44	H	AVERAGE	Pass	Band Edge
4	BLE(CH0-39)	CH00	4804.00	45.08	74.00	-28.92	V	Peak	Pass	Harmonic
5	BLE(CH0-39)	CH19	-	-	-	-	-	-	-	Band Edge
5	BLE(CH0-39)	CH19	7320.00	48.98	74.00	-25.02	V	Peak	Pass	Harmonic
6	BLE(CH0-39)	CH39	2483.52	47.54	54.00	-6.46	V	AVERAGE	Pass	Band Edge
6	BLE(CH0-39)	CH39	7440.00	47.35	74.00	-26.65	V	Peak	Pass	Harmonic
7	BLE(CH0-39)	CH39	953.44	29.94	46	-16.06	H	Peak	Pass	LF
8	BLE (CH2-76)	CH 02	2373.95	38.36	54.00	-15.64	H	AVERAGE	Pass	Band Edge
8	BLE (CH2-76)	CH 02	4808.00	49.36	74.00	-24.64	V	Peak	Pass	Harmonic
9	BLE (CH2-76)	CH 22	-	-	-	-	-	-	-	Band Edge
9	BLE (CH2-76)	CH 22	4848.00	49.18	74.00	-24.82	V	Peak	Pass	Harmonic
10	BLE (CH2-76)	CH 26	-	-	-	-	-	-	-	Band Edge
10	BLE (CH2-76)	CH 26	4856.00	49.70	74.00	-24.30	V	Peak	Pass	Harmonic
11	BLE (CH2-76)	CH 76	2487.72	38.86	54.00	-15.14	V	AVERAGE	Pass	Band Edge
11	BLE (CH2-76)	CH 76	4956.00	49.12	74.00	-24.88	V	Peak	Pass	Harmonic

Mode	1	
	Band Edge	
	2400-2483.5_Bluetooth LE(CH0-39) _CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	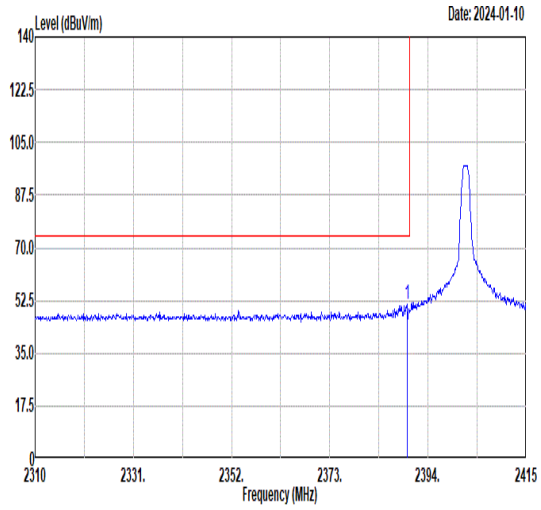 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.49 51.04 74.00 -22.96 43.10 32.26 7.76 32.08 367 247 PEAK	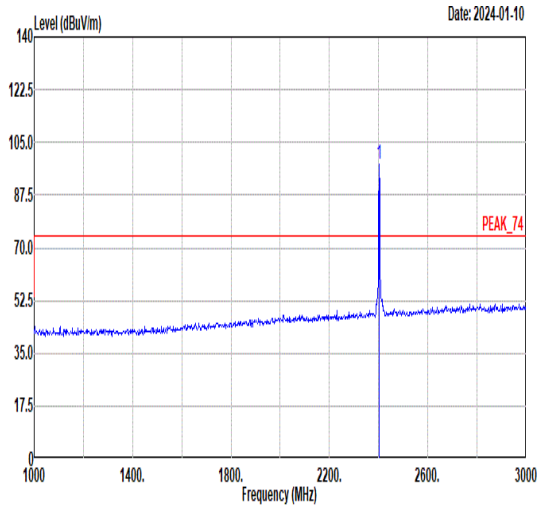 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2402.00 97.65 ------ ------ 89.66 32.28 7.79 32.08 367 247 PEAK
Avg	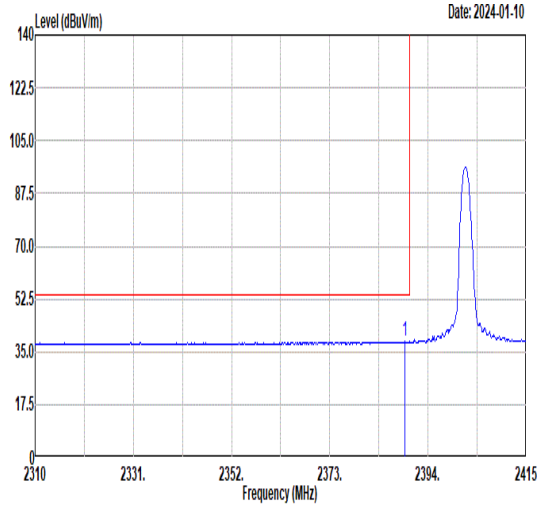 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.07 38.40 54.00 -15.60 30.46 32.26 7.76 32.08 367 247 AVERAGE	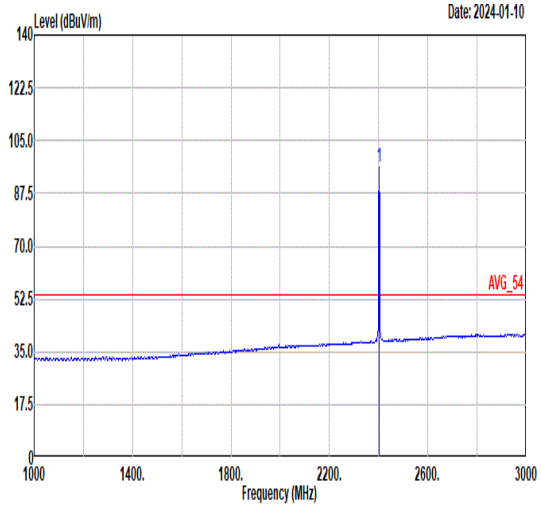 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2402.00 96.39 ------ ------ 88.40 32.28 7.79 32.08 367 247 AVERAGE

Mode	1	
	Band Edge	
	2400-2483.5_ Bluetooth LE(CH0-39) _CH00_2402MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	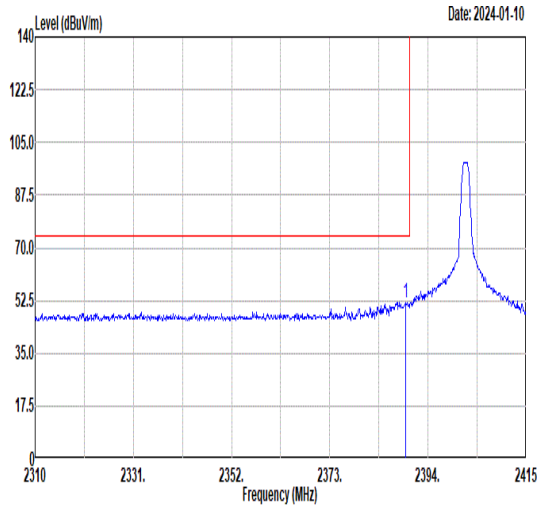 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.17 51.90 74.00 -22.10 43.96 32.26 7.76 32.08 349 10 PEAK	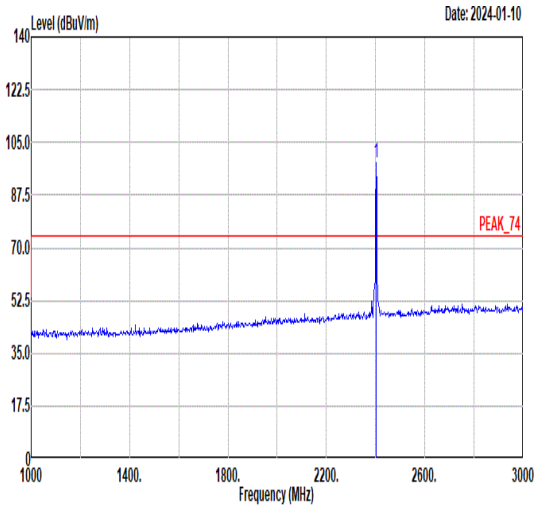 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2402.00 98.18 ------ ------ 90.19 32.28 7.79 32.08 349 10 PEAK
Avg	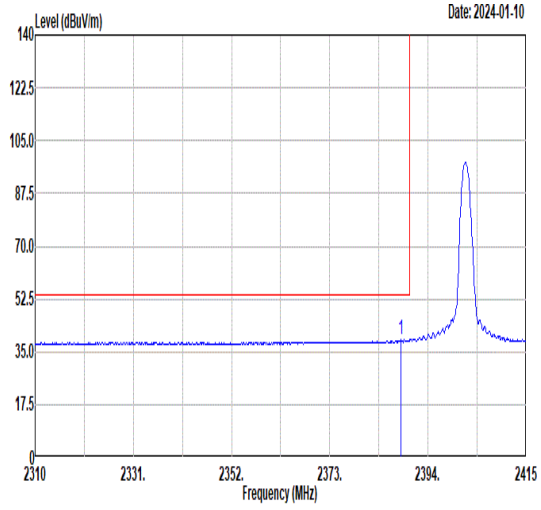 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2388.23 39.03 54.00 -14.97 31.10 32.25 7.76 32.08 349 10 AVERAGE	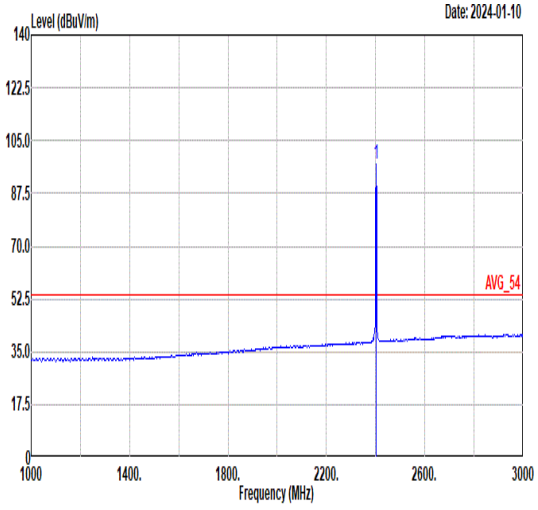 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2402.00 97.26 ------ ------ 89.27 32.28 7.79 32.08 349 10 AVERAGE

Mode	1	
	Harmonic	
	2400-2483.5_ Bluetooth LE(CH0-39) _CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	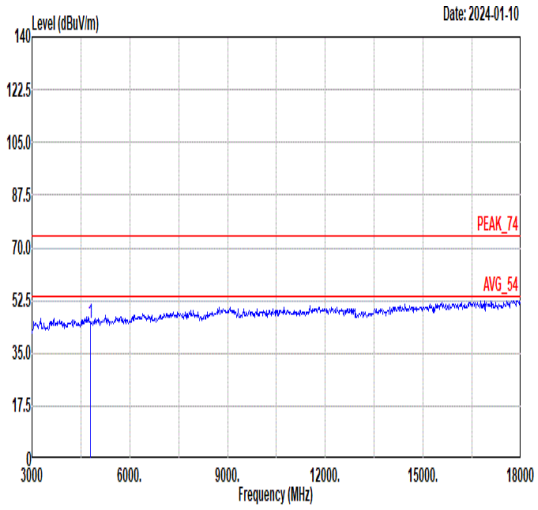 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4804.00 45.14 74.00 -28.86 50.83 34.82 11.07 51.58 -- -- Peak	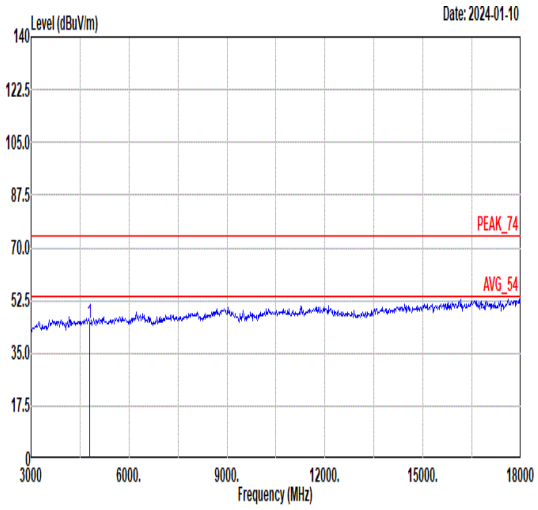 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4804.00 44.97 74.00 -29.03 50.66 34.82 11.07 51.58 -- -- Peak

Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth LE(CH0-39) _CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	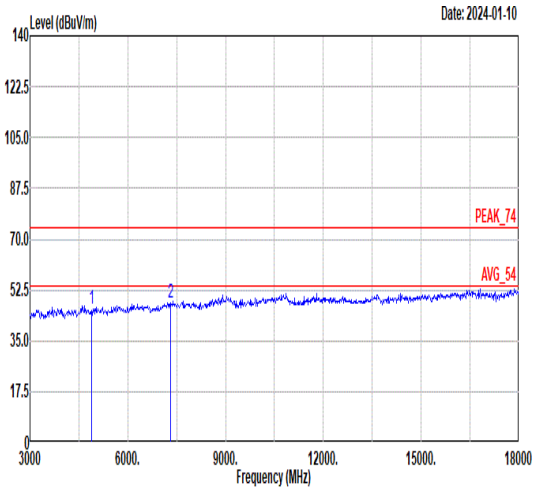 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4880.00 45.85 74.00 -28.15 51.45 34.85 11.10 51.55 -- -- Peak 2 7320.00 47.86 74.00 -26.14 49.60 36.33 13.09 51.16 -- -- Peak	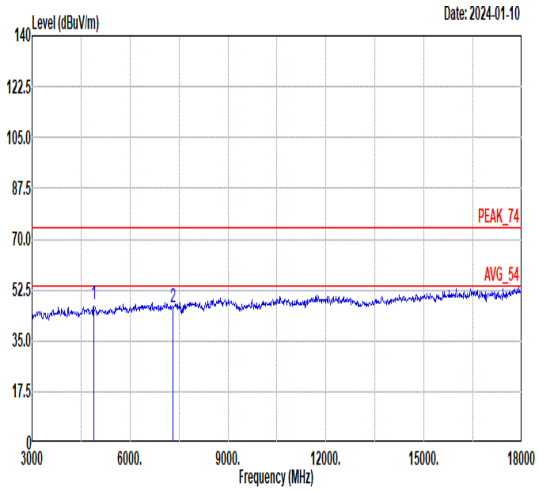 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4880.00 47.29 74.00 -26.71 52.89 34.85 11.10 51.55 -- -- Peak 2 7320.00 46.56 74.00 -27.44 48.30 36.33 13.09 51.16 -- -- Peak

Mode	3	
	Band Edge	
	2400-2483.5_Bluetooth LE(CH0-39) _CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	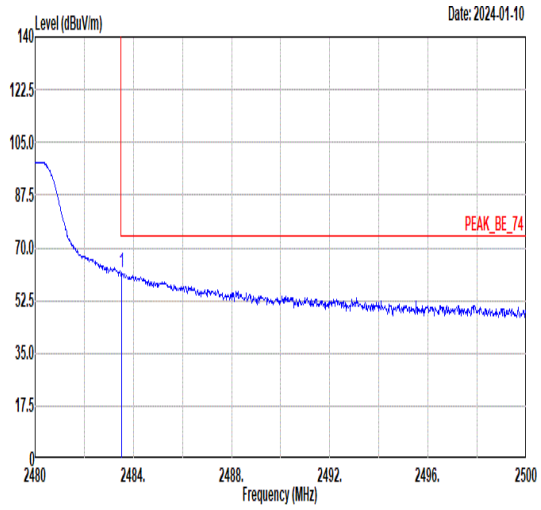 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2483.52 61.96 74.00 -12.04 53.72 32.46 7.88 32.10 341 245 PEAK	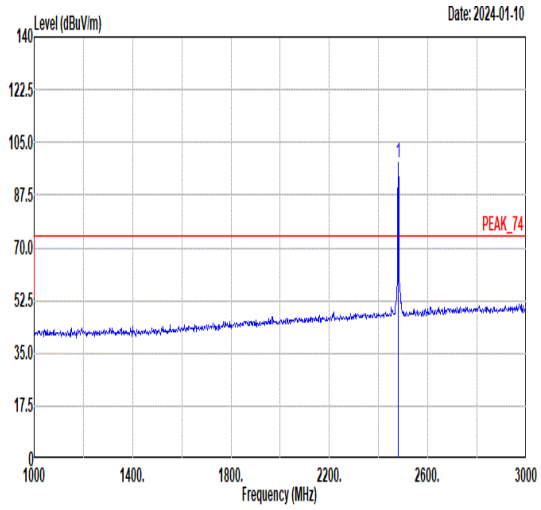 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2480.00 98.26 ------ ------ 90.03 32.46 7.87 32.10 341 245 PEAK
Avg	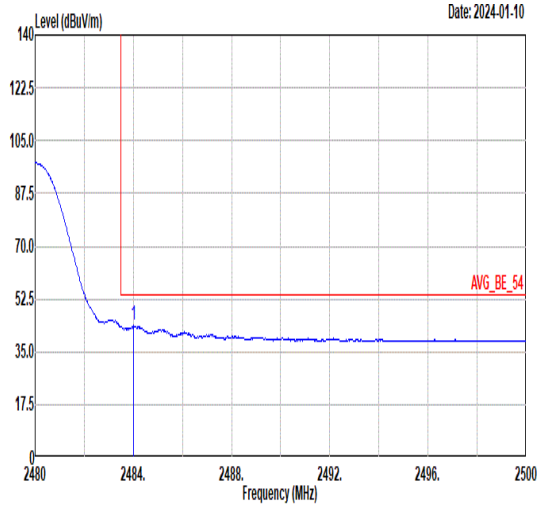 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2484.00 43.65 54.00 -10.35 35.41 32.46 7.88 32.10 341 245 AVERAGE	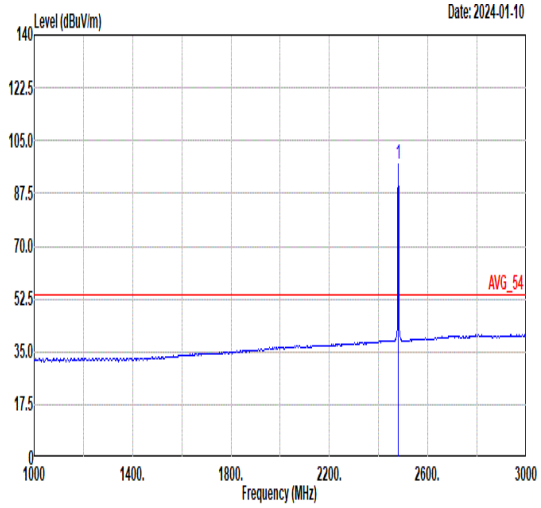 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2480.00 97.03 ------ ------ 88.80 32.46 7.87 32.10 341 245 AVERAGE

Mode	3	
	Band Edge	
	2400-2483.5_Bluetooth LE(CH0-39) _CH39_2480MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	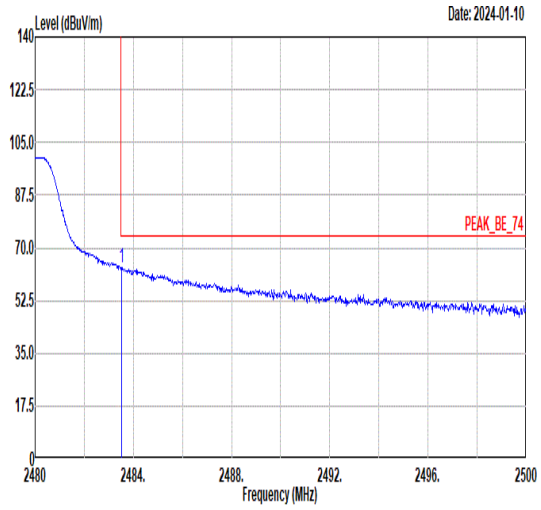 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2483.52 63.46 74.00 -10.54 55.22 32.46 7.88 32.10 367 7 PEAK	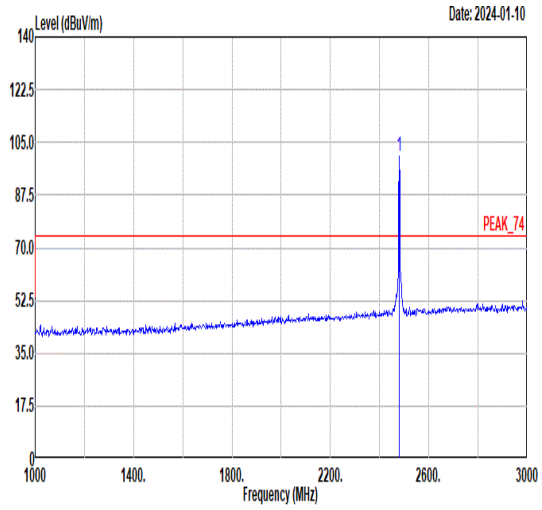 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2480.00 100.39 ------ ------ 92.16 32.46 7.87 32.10 367 7 PEAK
Avg	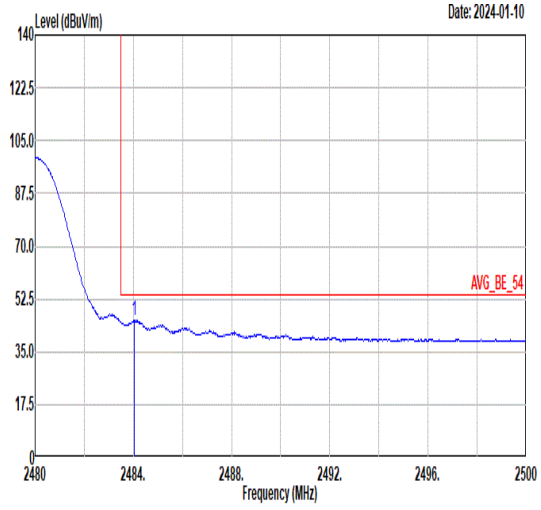 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2484.04 45.46 54.00 -8.54 37.22 32.46 7.88 32.10 367 7 AVERAGE	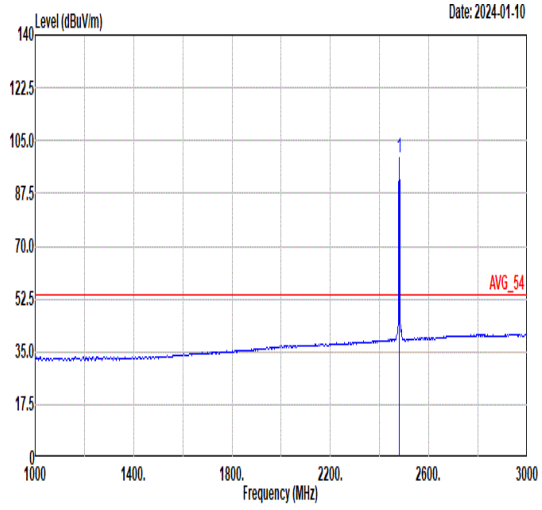 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2480.00 99.19 ------ ------ 90.96 32.46 7.87 32.10 367 7 AVERAGE

Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth LE(CH0-39) _CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	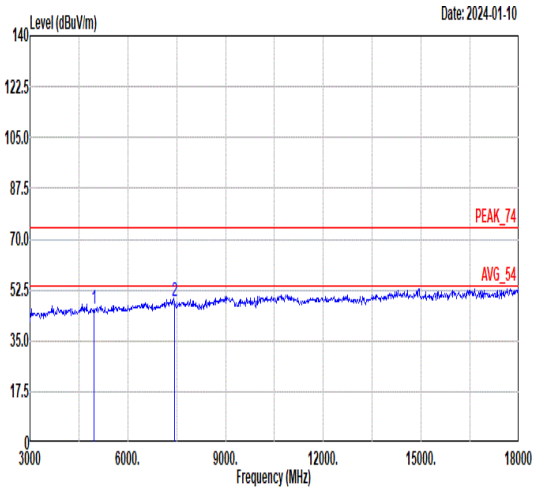 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4960.00 45.88 74.00 -28.12 51.37 34.88 11.14 51.51 -- -- Peak 2 7440.00 48.49 74.00 -25.51 50.33 36.38 12.97 51.19 -- -- Peak	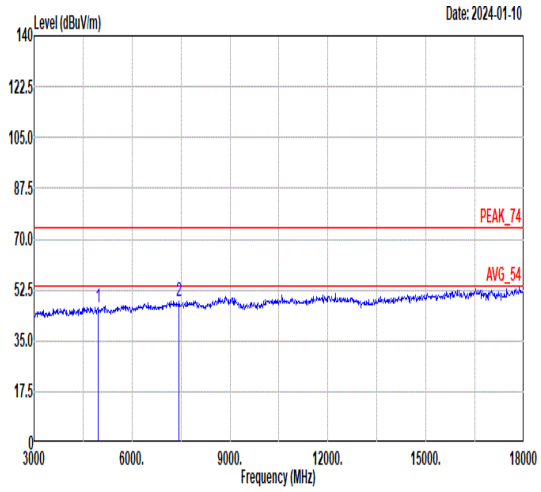 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4960.00 46.35 74.00 -27.65 51.84 34.88 11.14 51.51 -- -- Peak 2 7440.00 48.56 74.00 -25.44 50.40 36.38 12.97 51.19 -- -- Peak

Mode	4	
	Band Edge	
	2400-2483.5_Bluetooth LE(CH0-39) _CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	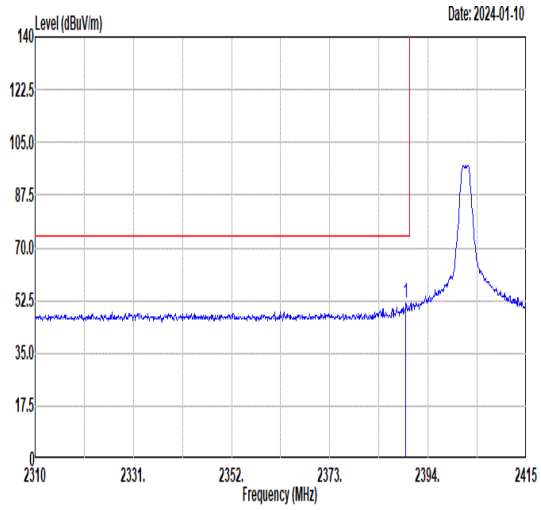 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2389.28 51.59 74.00 -22.41 43.65 32.26 7.76 32.08 368 246 PEAK	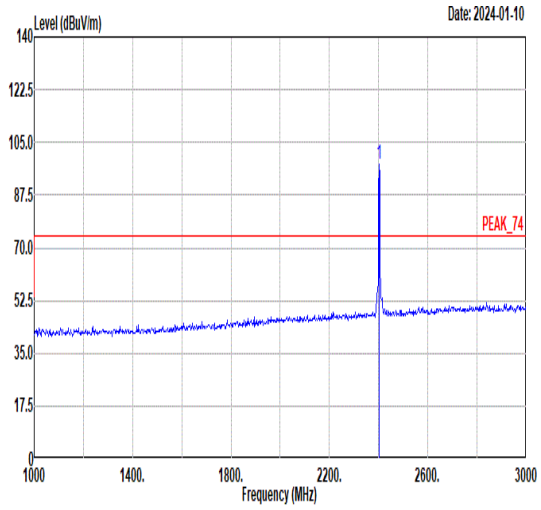 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2402.00 97.54 ------ ------ 89.55 32.28 7.79 32.08 368 246 PEAK
Avg	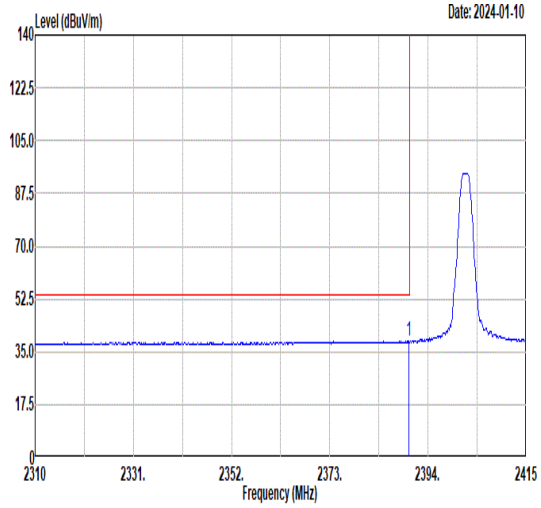 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2389.91 38.56 54.00 -15.44 30.62 32.26 7.76 32.08 368 246 AVERAGE	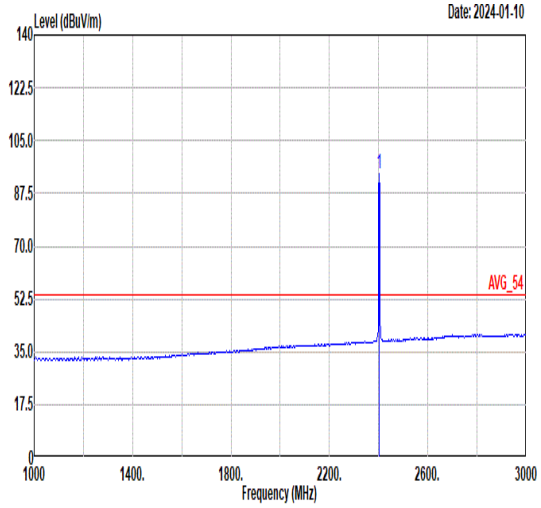 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2402.00 94.19 ------ ------ 86.20 32.28 7.79 32.08 368 246 AVERAGE

Mode	4	
	Band Edge	
	2400-2483.5_Bluetooth LE(CH0-39)_CH00_2402MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	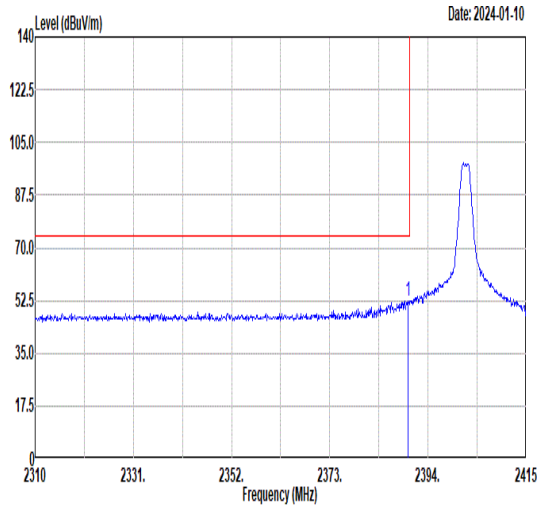 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2389.70 52.47 74.00 -21.53 44.53 32.26 7.76 32.08 350 9 PEAK	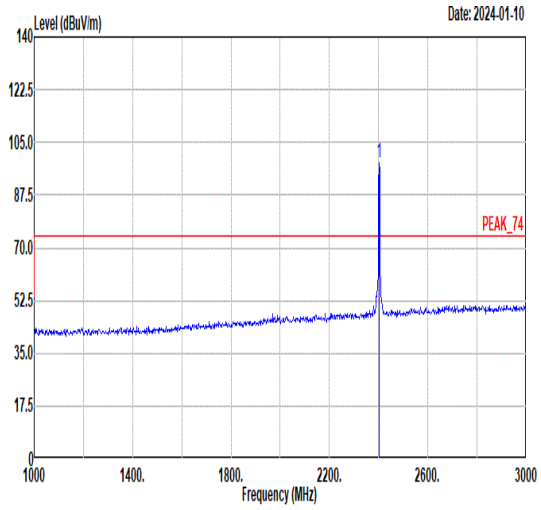 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2402.00 98.39 ------ ------ 90.40 32.28 7.79 32.08 350 9 PEAK
Avg	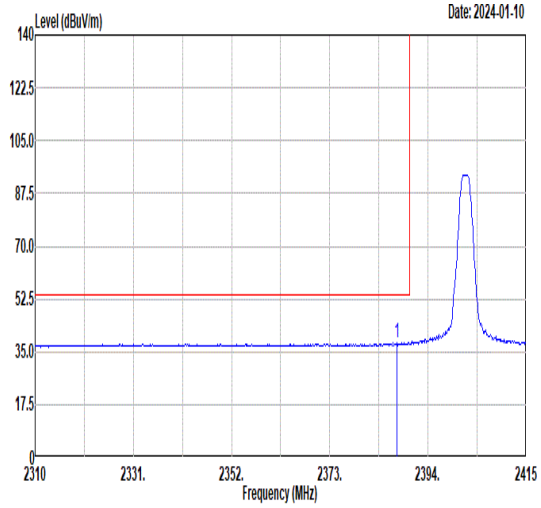 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2387.39 38.10 54.00 -15.90 30.18 32.25 7.75 32.08 350 9 AVERAGE	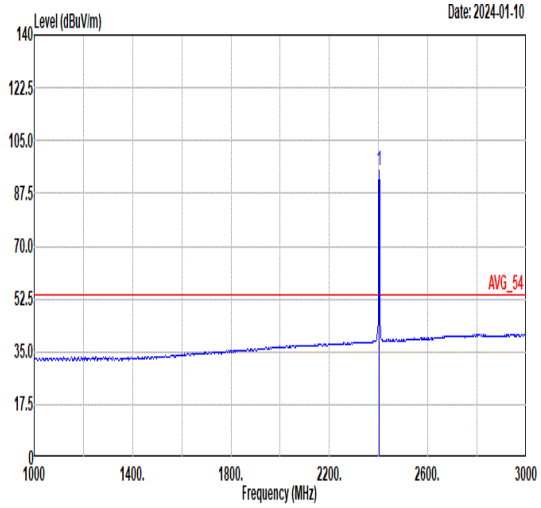 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2402.00 95.06 ------ ------ 87.07 32.28 7.79 32.08 350 9 AVERAGE

Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth LE(CH0-39) _CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	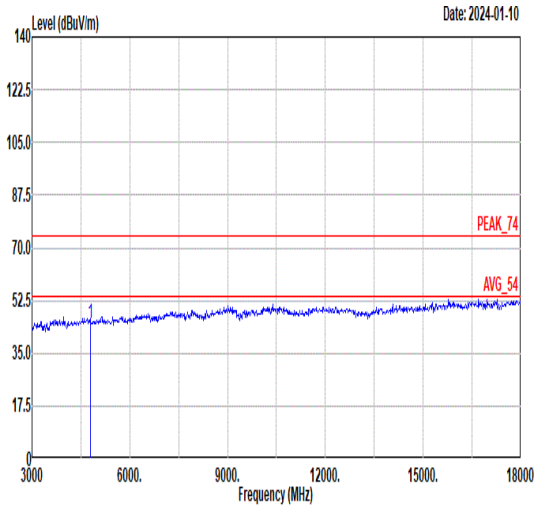 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4804.00 44.76 74.00 -29.24 50.45 34.82 11.07 51.58 -- -- Peak	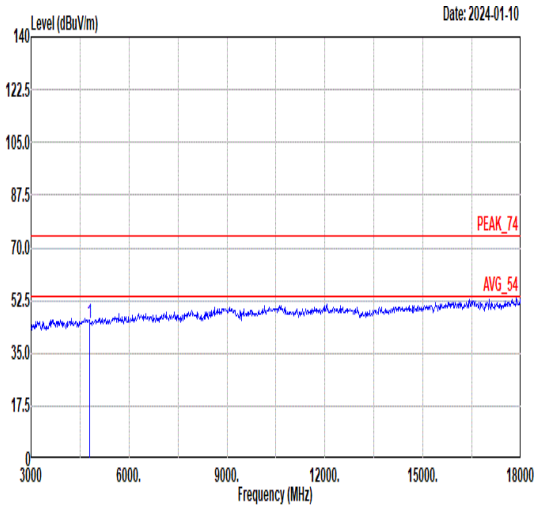 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4804.00 45.08 74.00 -28.92 50.77 34.82 11.07 51.58 -- -- Peak

Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth LE(CH0-39) _CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	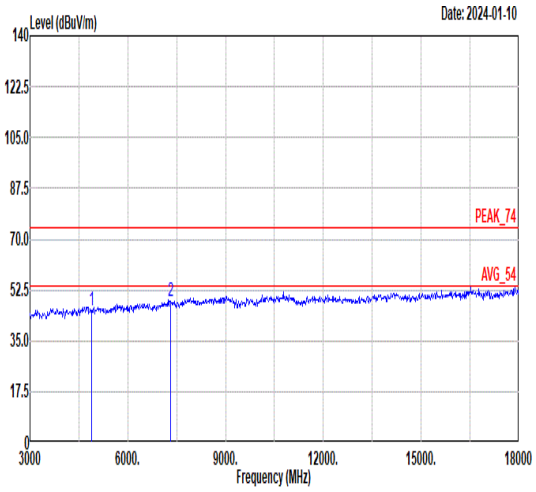 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4880.00 45.67 74.00 -28.33 51.27 34.85 11.10 51.55 -- -- Peak 2 7320.00 48.67 74.00 -25.33 50.41 36.33 13.09 51.16 -- -- Peak	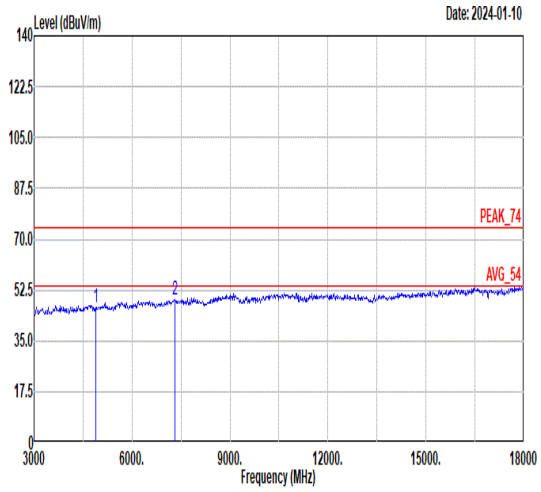 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 4880.00 46.27 74.00 -27.73 51.87 34.85 11.10 51.55 -- -- Peak 2 7320.00 48.98 74.00 -25.02 50.72 36.33 13.09 51.16 -- -- Peak

Mode	6	
	Band Edge	
	2400-2483.5_Bluetooth LE(CH0-39)_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	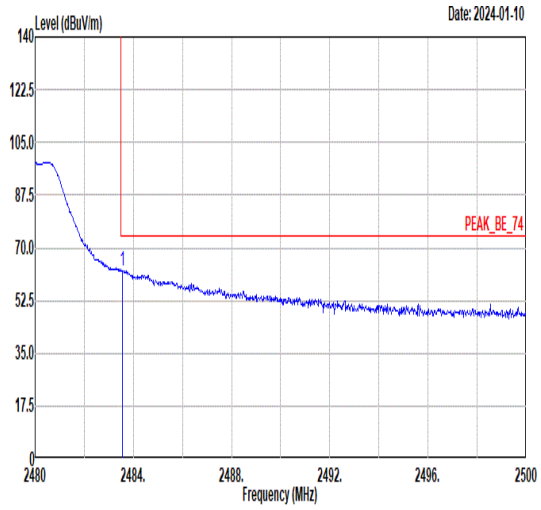 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2483.54 62.49 74.00 -11.51 54.25 32.46 7.88 32.10 390 235 PEAK	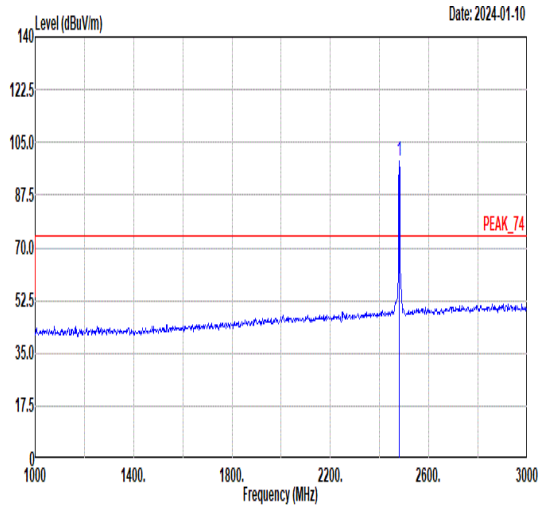 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2480.00 98.55 ------ ------ 90.32 32.46 7.87 32.10 390 235 PEAK
Avg	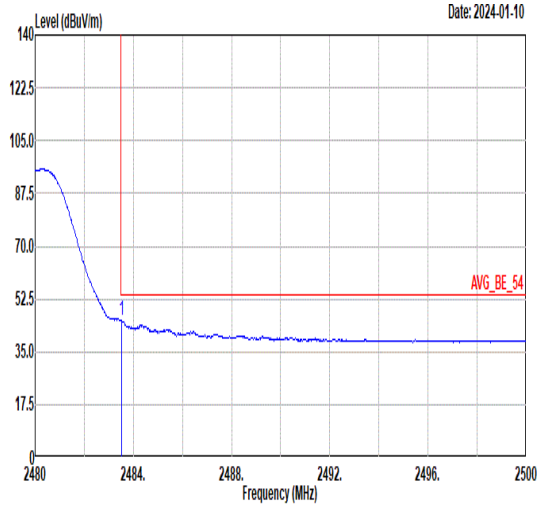 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2483.52 45.24 54.00 -8.76 37.00 32.46 7.88 32.10 390 235 AVERAGE	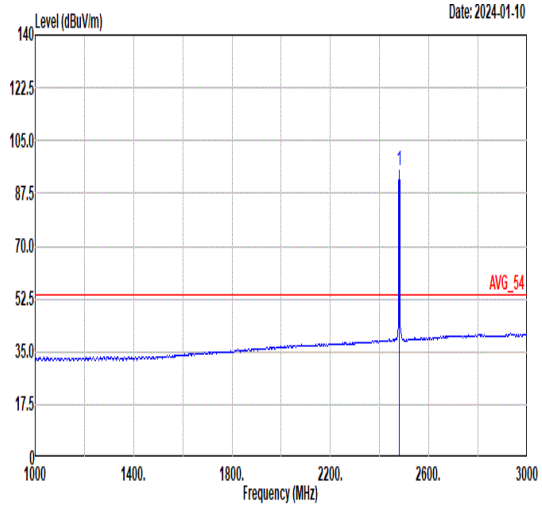 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2480.00 95.20 ------ ------ 86.97 32.46 7.87 32.10 390 235 AVERAGE

Mode	6	
	Band Edge	
	2400-2483.5_Bluetooth LE(CH0-39)_CH39_2480MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	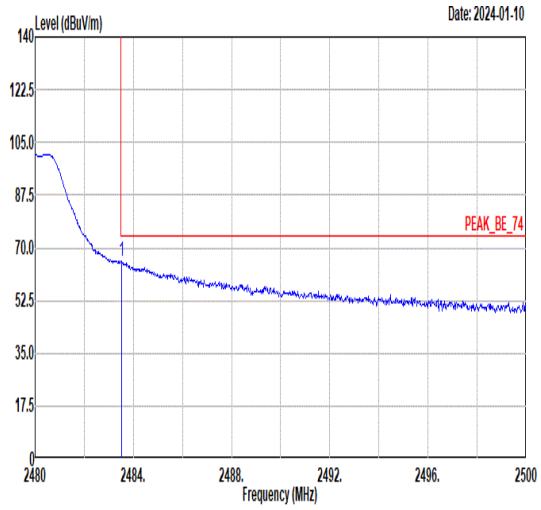 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2483.52 65.39 74.00 -8.61 57.15 32.46 7.88 32.10 365 6 PEAK	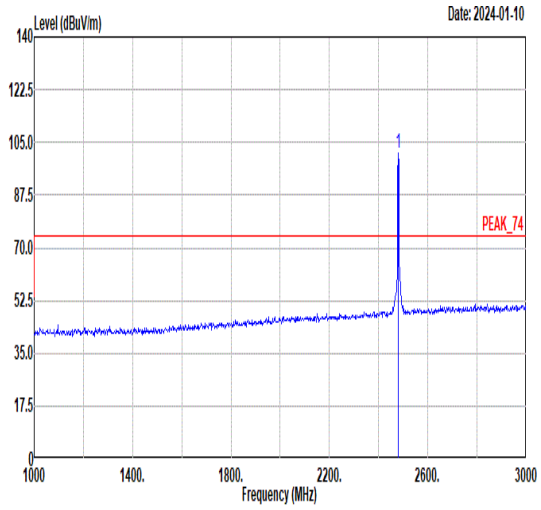 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2480.00 101.26 ------ ------ 93.03 32.46 7.87 32.10 365 6 PEAK
Avg	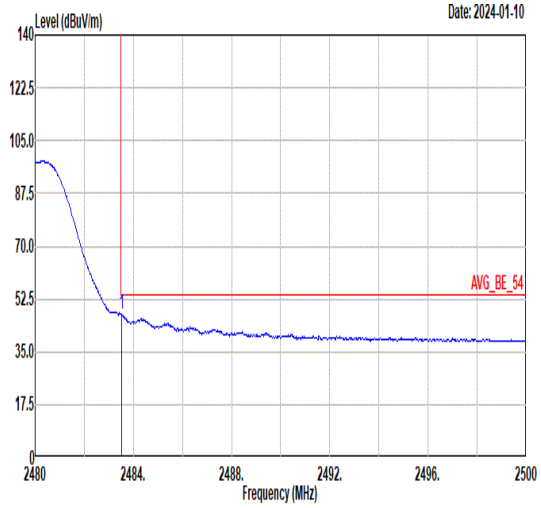 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2483.52 47.54 54.00 -6.46 39.30 32.46 7.88 32.10 365 6 AVERAGE	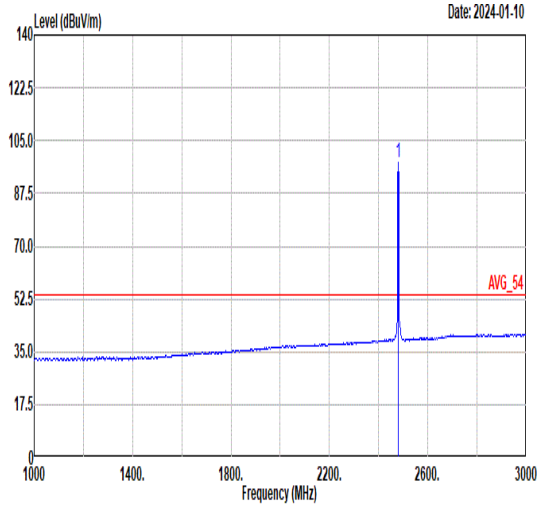 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 2480.00 97.96 ------ ------ 89.73 32.46 7.87 32.10 365 6 AVERAGE