

Antenna Specification

Specifications Summary

ITEM	SPEC.	
	2.4GHz	
Center Frequency	2402 MHz	2.19 dBi
	2442 MHz	2.54 dBi
	2484 MHz	3.05 dBi
MAX. GAIN	3.05 dBi	
Impedance	50Ω	

ITEM	SPEC.	
	5 GHz	
Center Frequency	5150 MHz	0.88 dBi
	5300 MHz	1.60 dBi
	5500 MHz	1.80 dBi
	5800 MHz	2.37 dBi
MAX. GAIN	2.37 dBi	
Impedance	50Ω	

Antenna Photo & Length

天线类型/
ANT Type:

PCB


天线型号/
ANT Model:

SmartVision 80
ANT0

制造商/
Manufactory:





YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China

天线尺寸/ANT Size

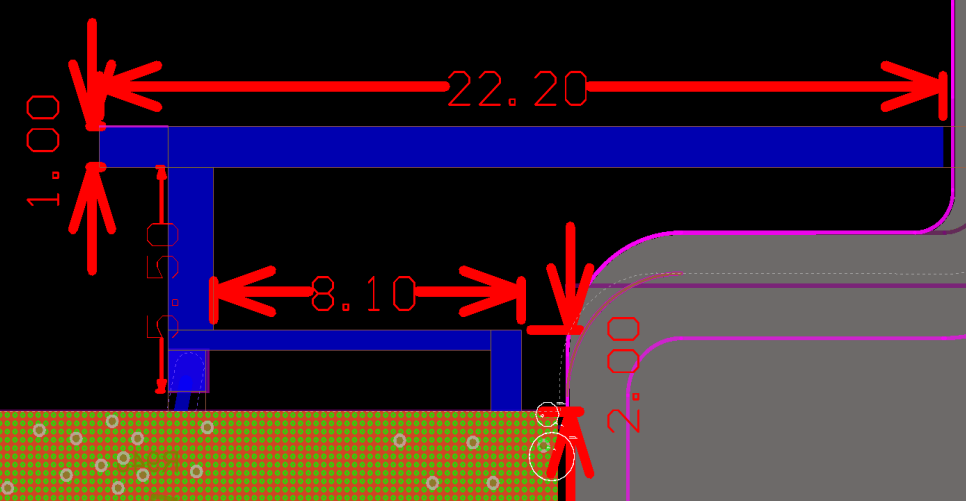





2402MHz

3D Antenna pattern

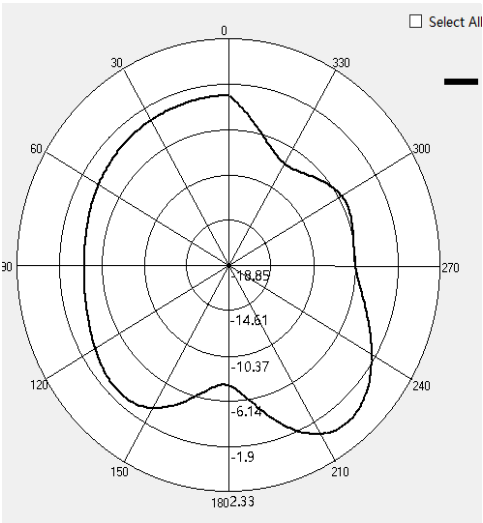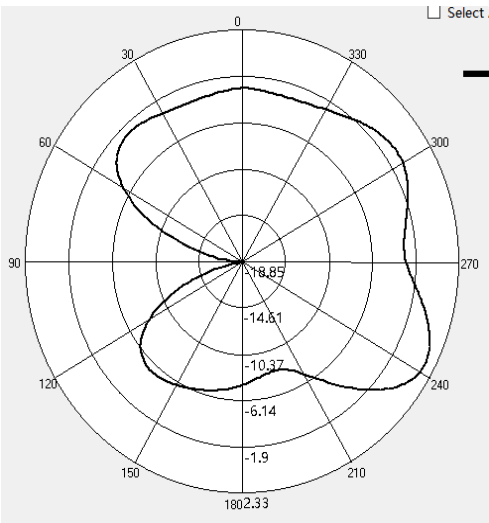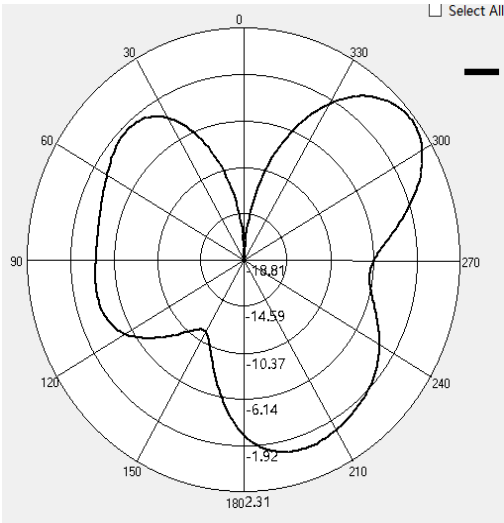





2442MHz

3D Antenna pattern

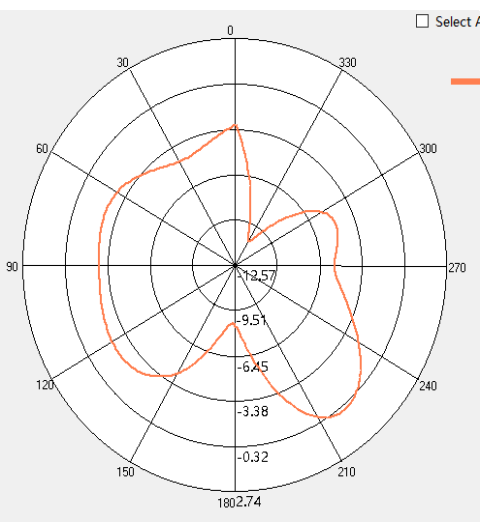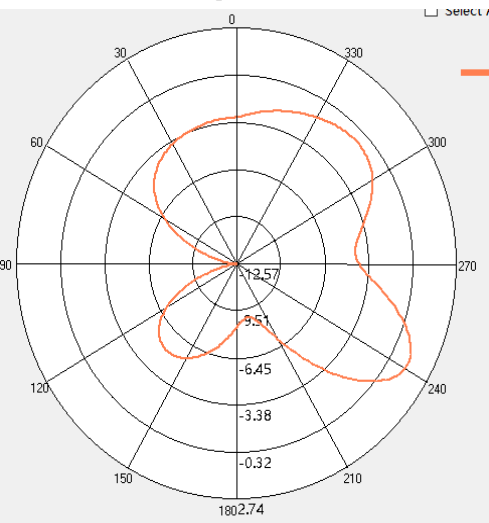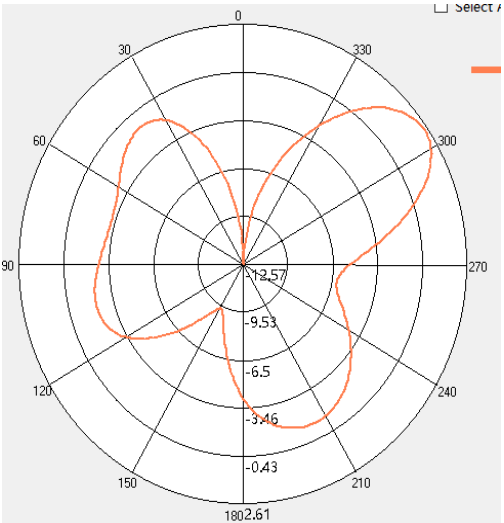

2484MHz





3D Antenna pattern

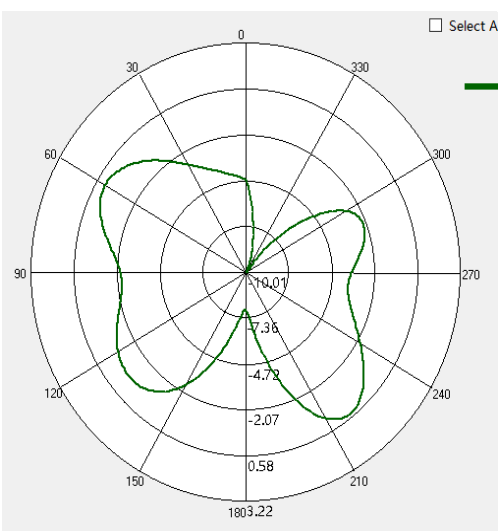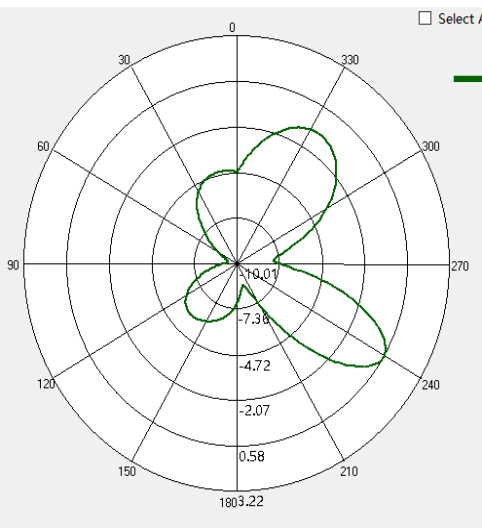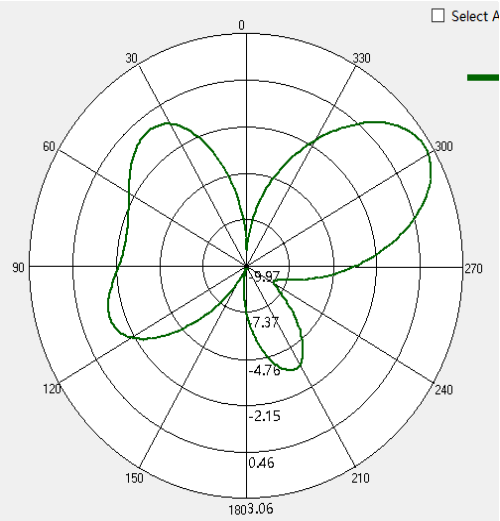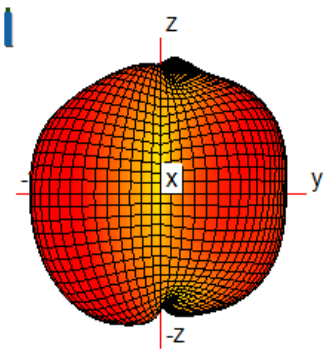

Point Values	Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)			
2402	-18.8122	2.18643	-2.52412
2442	-12.5705	2.54100	-2.40314
2484	-09.8721	3.05092	-2.24441



5150MHz

3D Antenna pattern

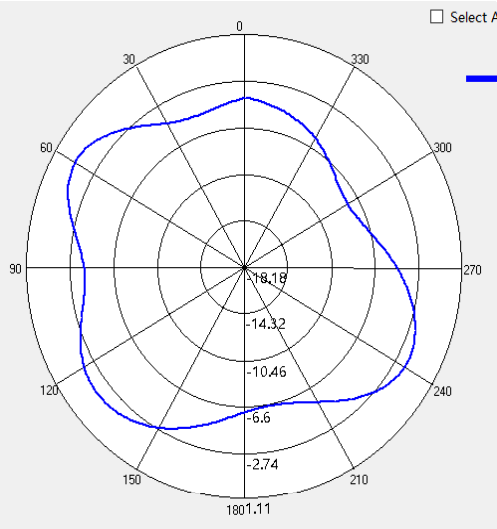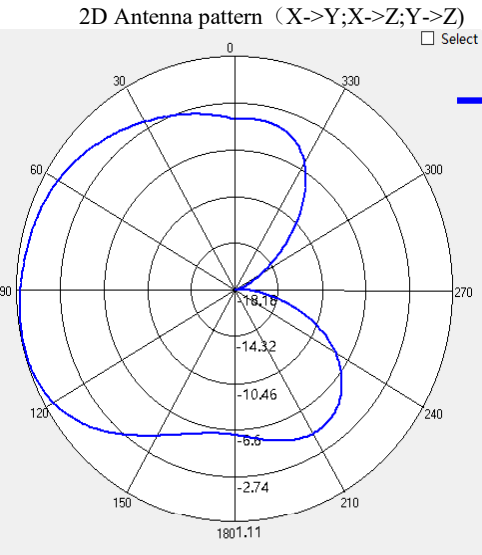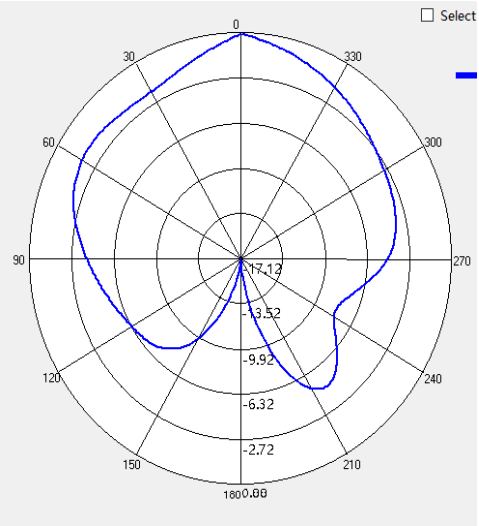
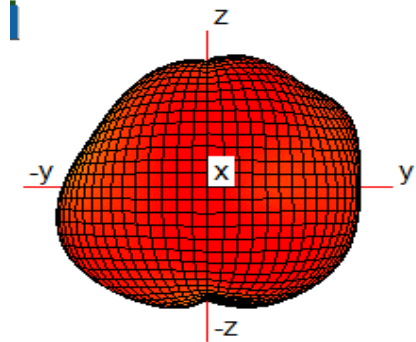


5300MHz

3D Antenna pattern

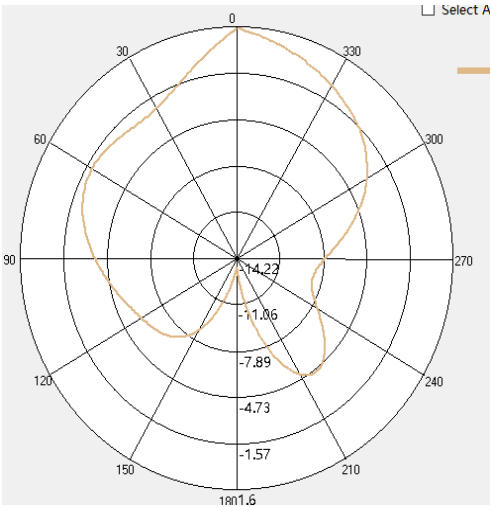
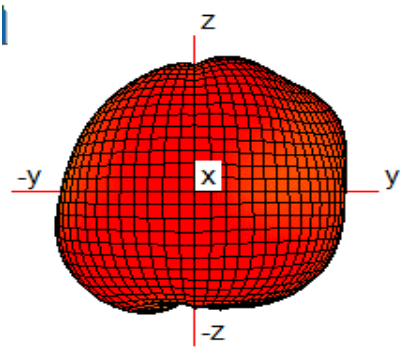


2D Antenna pattern (X->Y;X->Z;Y->Z)

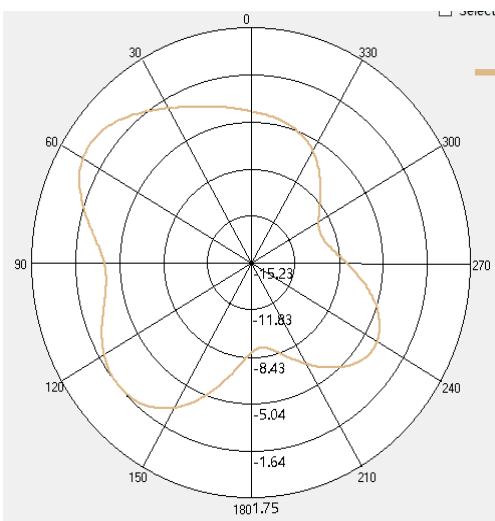
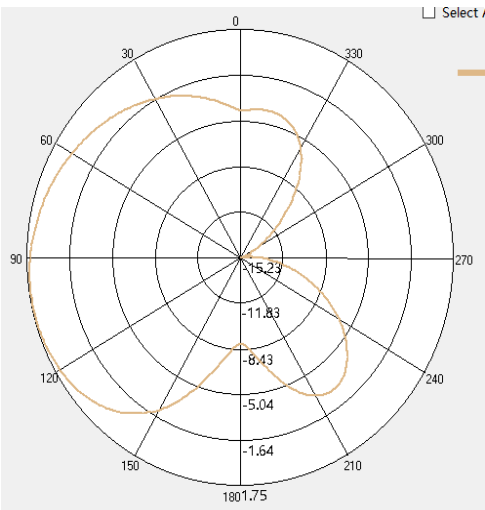


5500MHz

3D Antenna pattern

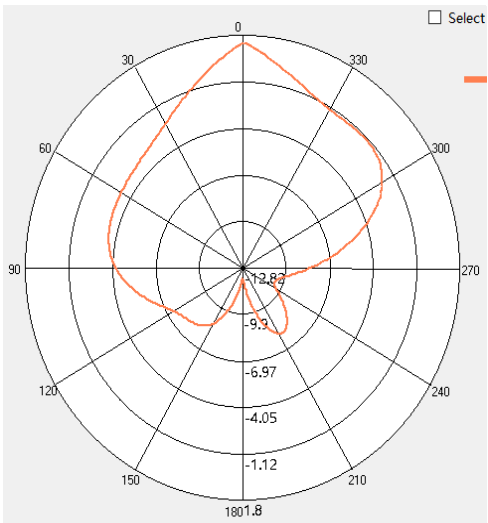
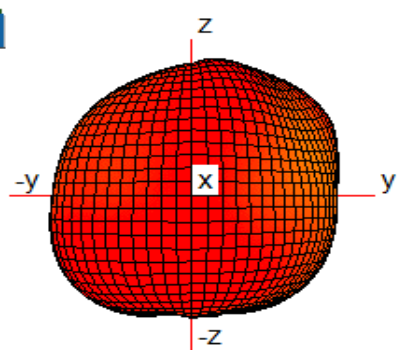


2D Antenna pattern (X->Y;X->Z;Y->Z)

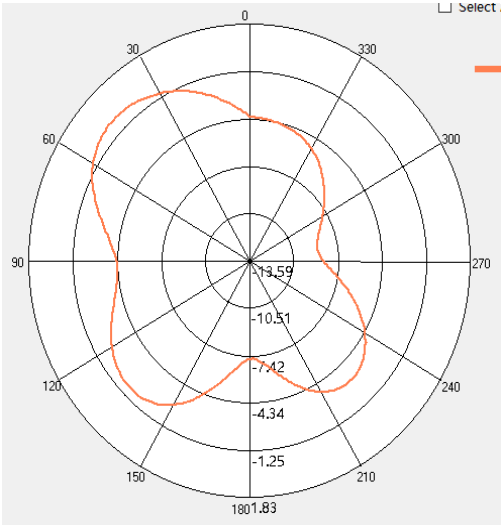
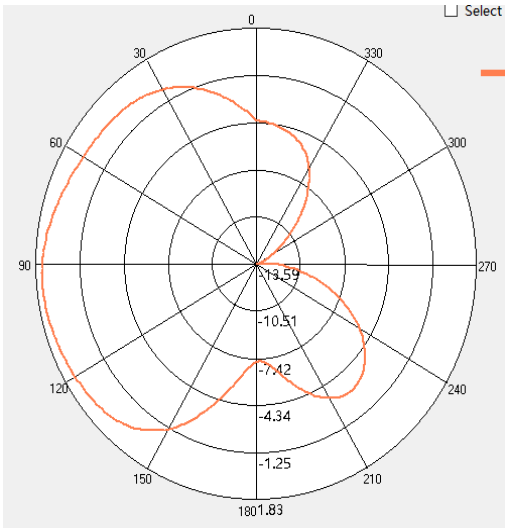


5800MHz

3D Antenna pattern

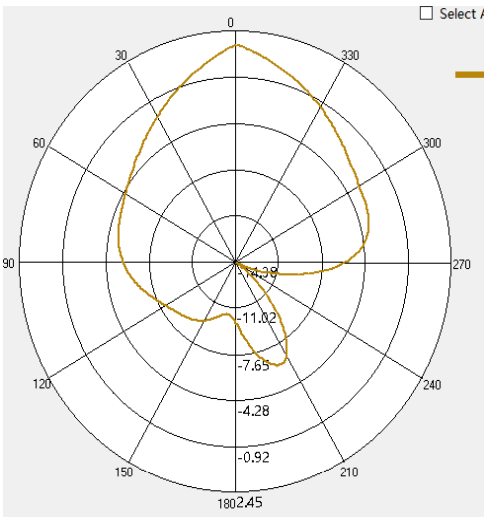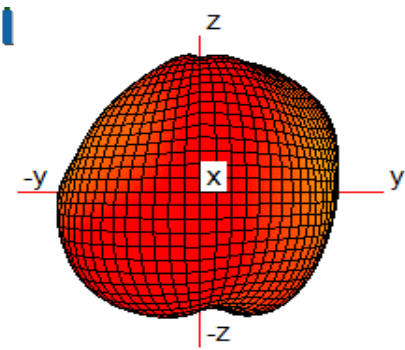

2D Antenna pattern (X->Y;X->Z;Y->Z)

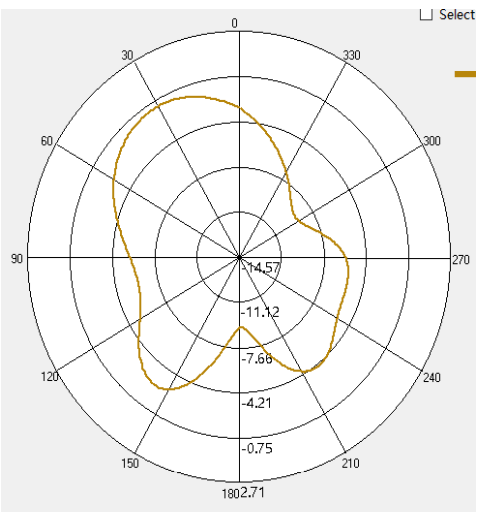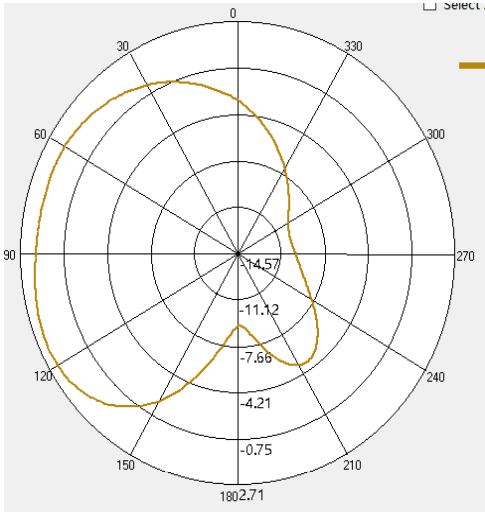

Point Values	Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)			
5150	-16.9147	0.87502	-3.01126
5300	-14.0686	1.59604	-2.83452
5500	-12.6751	1.79881	-2.90729
5800	-14.3797	2.37333	-3.18403