

TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China
Report Number: 2601P05987E-RFB
FCC ID: T2C-UVC86E2
IC: 10741A-UVC86E2

Test Standard (s)

FCC PART 15.407;
RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247 ISSUE 4, JULY 2025

Sample Description

Product Type: Video Conferencing Endpoint
Model No.: UVC86 E2
Multiple Model(s) No.: N/A
Trade Mark: **Yealink**
Date Received: 2026-01-19
Issue Date: 2026-06-23

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

GaLa Liu

GaLa Liu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked* is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST	14
REQUIREMENTS AND TEST PROCEDURES	16
AC LINE CONDUCTED EMISSIONS	16
UNDESIRABLE EMISSION & RESTRICTED BANDS	19
EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	25
TRANSMITTER OUTPUT POWER	27
POWER SPECTRAL DENSITY	30
ADDITIONAL REQUIREMENTS	33
DUTY CYCLE	35
FREQUENCY STABILITY	36
RF EXPOSURE EVALUATION	38
ANTENNA REQUIREMENT	41
TEST DATA AND RESULTS	43
AC LINE CONDUCTED EMISSIONS	43
UNDESIRABLE EMISSION	48
RF CONDUCTED DATA	406
26dB ATTENUATED BELOW THE CHANNEL POWER	406
EMISSION BANDWIDTH	416
99% OCCUPIED BANDWIDTH	438
MAXIMUM CONDUCTED OUTPUT POWER	460
POWER SPECTRAL DENSITY	465
DUTY CYCLE	487
FREQUENCY STABILITY	491
EUT PHOTOGRAPHS	504
TEST SETUP PHOTOGRAPHS	505

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601P05987E-RFB	Original Report	2026-06-23

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	UVC86E2
FVIN	UVC86E2
Frequency Range	For module YL43752: 5150-5250MHz; 5725-5850MHz For module YL43456: 5150-5250MHz; 5250-5350MHz; 5470-5600MHz&5650-5725MHz; 5725-5850MHz
Mode	For module YL43752: 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80 For module YL43456: 802.11a/n20/n40/ac20/ac40/ac80
Device Type	For Module YL43752: Indoor AP For Module YL43456: Client Device
Maximum Conducted Average Output Power	For Module YL43752: 5150-5250MHz: 12.73dBm; 5725-5850MHz: 12.37dBm For Module YL43456: 5150-5250MHz: 11.11dBm; 5250-5350MHz: 5.92dBm 5470-5725MHz: 11.29dBm; 5725-5850MHz: 13.09dBm
Modulation Technique	For module YL43752: OFDM, OFDMA For module YL43456: OFDM
Antenna Specification[#]	For Module YL43752: 5150-5250MHz: ANT0 (Chain 0)/ANT1 (Chain 1): 3.96dBi 5725-5850MHz: ANT0 (Chain 0)/ANT1 (Chain 1): 4.90dBi For Module YL43456 5150-5250MHz: 2.34dBi, 5250-5350MHz: 2.96dBi 5470-5725MHz: 3.73dBi, 5725-5850MHz: 2.94dBi (provided by the applicant)
Voltage Range	DC 48V from adapter or DC 54V from PoE
Sample serial number	3FTS-1 for AC Line Conducted Emissions and Radiated Emissions Test 3FTS-12 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Normal/Extreme Condition[#]	LV: 102V _{AC} , NV: 120V _{AC} , HV: 138V _{AC}
Adapter Information	Model: YLPS480700C Input: 100-240V~50/60Hz; 1.0A Output: 48V=0.7A, 33.6W
Note: The 5600-5650MHz was disabled by software.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 ISSUE 4, July 2025 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024▼, RSS-Gen and RSS-247.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		52.29kHz(k=1.96, 95% level of confidence)
RF Frequency		81.235Hz(k=1.96, 95% level of confidence)
RF output power, conducted		1.57dB(k=1.96, 95% level of confidence)
Power Spectral Density		2.09dB(k=1.96, 95% level of confidence)
Conducted Spurious Emission		2.48dB(k=1.96, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.46dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.66dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Horizontal)	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Vertical)	6.28dB(k=2, 95% level of confidence)
	1GHz - 6GHz	6.18dB(k=2, 95% level of confidence)
	6GHz - 18GHz	6.62dB(k=2, 95% level of confidence)
	18GHz - 40GHz	6.66dB(k=2, 95% level of confidence)
Temperature		±0.4℃
Humidity		±2%
Supply voltages		DC±0.4%;AC±1%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/ac20/ax20 mode: channel 36, 40, 48 were tested;

For 802.11ac40/ax40 mode: channel 38, 46 were tested;

For 802.11ac80/ax80 mode, channel 42 was tested.

For 5250-5350MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320
58	5290	/	/

For 802.11a/ac20 mode: channel 52, 56, 64 were tested;

For 802.11ac40 mode: channel 54, 62 were tested;

For 802.11ac80 mode, channel 58 was tested.

For 5470-5725MHz Band, 15 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	132	5660
102	5510	134	5670
104	5520	136	5680
106	5530	138	5690
108	5540	140	5700
110	5550	142	5710
112	5560	144	5720
116	5580	/	/

For 802.11a/ac20 mode: channel 100, 116, 140, 144 were tested;

For 802.11ac40 mode: channel 102, 110, 134, 142 were tested;

For 802.11ac80 mode, channel 106, 138 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/ac20/ax20 mode: channel 149, 157, 165 were tested;

For 802.11ac40/ax40 mode: channel 151, 159 were tested;

For 802.11ac80/ax80 mode, channel 155 was tested.

EUT Exercise Software

Exercise Software# Authentication Tool.exe					
For module YL43752					
5150-5250 MHz Band					
Mode	Data rate	Test Channels	Test Frequency (MHz)	Power Level#	
				ANT 0	ANT 1
802.11a	6Mbps	Low	5180	14	12
	6Mbps	Middle	5200	14	12
	6Mbps	High	5240	14	12
802.11ac-VHT20	MCS0	Low	5180	12	12
	MCS0	Middle	5200	12	12
	MCS0	High	5240	12	12
802.11ax-HE20	MCS0	Low	5180	12	12
	MCS0	Middle	5200	12	12
	MCS0	High	5240	12	12
802.11ac-VHT40	MCS0	Low	5190	12	12
	MCS0	High	5230	12	12
802.11ax-HE40	MCS0	Low	5190	12	12
	MCS0	High	5230	12	12
802.11ac-VHT80	MCS0	Middle	5210	12	12
802.11ax-HE80	MCS0	Middle	5210	12	12

5725-5850 MHz Band					
Mode	Data rate	Test Channels	Test Frequency (MHz)	Power Level [#]	
				ANT 0	ANT 1
802.11a	6Mbps	Low	5745	15	15
	6Mbps	Middle	5785	15	15
	6Mbps	High	5825	15	15
802.11ac-VHT20	MCS0	Low	5745	15	15
	MCS0	Middle	5785	15	15
	MCS0	High	5825	15	15
802.11ax-HE20	MCS0	Low	5745	15	15
	MCS0	Middle	5785	15	15
	MCS0	High	5825	15	15
802.11ac-VHT40	MCS0	Low	5755	15	15
	MCS0	High	5795	15	15
802.11ax-HE40	MCS0	Low	5755	15	15
	MCS0	High	5795	15	15
802.11ac-VHT80	MCS0	Middle	5775	15	15
802.11ax-HE80	MCS0	Middle	5775	15	15
For module YL43456					
5150-5250 MHz Band					
Mode	Data rate	Test Channels	Test Frequency (MHz)	Power Level [#]	
802.11a	6Mbps	Low	5180	7	
	6Mbps	Middle	5200	7	
	6Mbps	High	5240	7	
802.11ac-VHT20	MCS0	Low	5180	13	
	MCS0	Middle	5200	13	
	MCS0	High	5240	13	
802.11ac-VHT40	MCS0	Low	5190	8	
	MCS0	High	5230	8	
802.11ac-VHT80	MCS0	Middle	5210	8	
5250-5350 MHz Band					
Mode	Data rate	Test Channels	Test Frequency (MHz)	Power Level [#]	
802.11a	6Mbps	Low	5260	7	
	6Mbps	Middle	5280	7	
	6Mbps	High	5320	7	
802.11ac-VHT20	MCS0	Low	5260	7	
	MCS0	Middle	5280	7	
	MCS0	High	5320	7	
802.11ac-VHT40	MCS0	Low	5270	7	
	MCS0	High	5310	7	
802.11ac-VHT80	MCS0	Middle	5290	7	

5470-5725 MHz Band				
Mode	Data rate	Test Channels	Test Frequency (MHz)	Power Level[#]
802.11a	6Mbps	Low	5500	10
	6Mbps	Middle	5580	10
	6Mbps	High	5700	10
	6Mbps	Cross	5720	10
802.11ac-VHT20	MCS0	Low	5500	10
	MCS0	Middle	5580	10
	MCS0	High	5700	10
	MCS0	Cross	5720	10
802.11ac-VHT40	MCS0	Low	5510	12
	MCS0	Middle	5550	12
	MCS0	High	5670	12
	MCS0	Cross	5710	12
802.11ac-VHT80	MCS0	Low	5530	12
	MCS0	Cross	5690	12
5725-5850 MHz Band				
Mode	Data rate	Test Channels	Test Frequency (MHz)	Power Level[#]
802.11a	6Mbps	Low	5745	14
	6Mbps	Middle	5785	14
	6Mbps	High	5825	14
802.11ac-VHT20	MCS0	Low	5745	14
	MCS0	Middle	5785	14
	MCS0	High	5825	14
802.11ac-VHT40	MCS0	Low	5755	14
	MCS0	High	5795	14
802.11ac-VHT80	MCS0	Middle	5775	14
Note: 1. The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations. 2. For 802.11a/ n/ac/ax modes, the device supports SISO only. 3. The n20/n40 mode was reduced test as identical parameter with ac20/ac40 mode. 4. For 802.11 ax modes, the device not support partial RU mode.				

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Redmi	Monitor	A22FAB-RA	47366/206100029128
Redmi	Monitor Adapter	AD-0241200200CN-1	9RVYFH2
Grand stream	Router	GWN7665	C074AD251F0A
DELL	Notebook	DESKTOP-1630AQ3	9RVYFH2
DELL	Notebook Adapter	DA90PE1-00	WK890
Unknown	Earphone	Unknown	Unknown
Unknown	USB disk	Unknown	Unknown
Yealink	POE	YLPOE30	Unknown
Unknown	Receptacle	Unknown	Unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded un-detachable AC cable	1.0	Receptacle	AC Mains
Unshielded detachable AC cable	1.95	Adapter	Receptacle
Unshielded un-detachable DC cable	1.5	Adapter	EUT
Unshielded detachable RJ45 cable	8.0	EUT	Router
Unshielded detachable RJ45 cable	2.0	EUT	Notebook
Shielded detachable USB cable	1.5	EUT	Notebook
Shielded un-detachable DC cable	1.5	Notebook	Notebook Adapter
Unshielded detachable AC cable	1.5	LISN 2	Notebook Adapter
Shielded detachable HDMI cable	1.6	EUT	Monitor
Unshielded un-detachable AC cable	1.5	Monitor	Monitor Adapter
Un-shielded detachable Audio cable	1.2	EUT	Earphone
Unshielded detachable AC cable	1.5	POE	LISN/Receptacle
Unshielded detachable RJ45 cable	1.2	POE	EUT


Block Diagram of Test Setup

For AC Line Conducted Emissions:

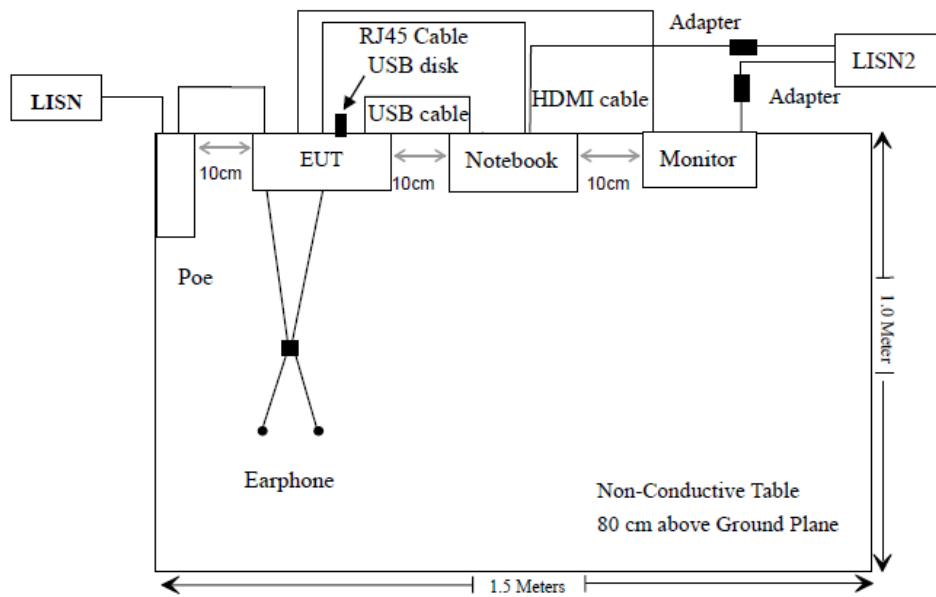


For Radiated Emissions below 1GHz:


For Adapter

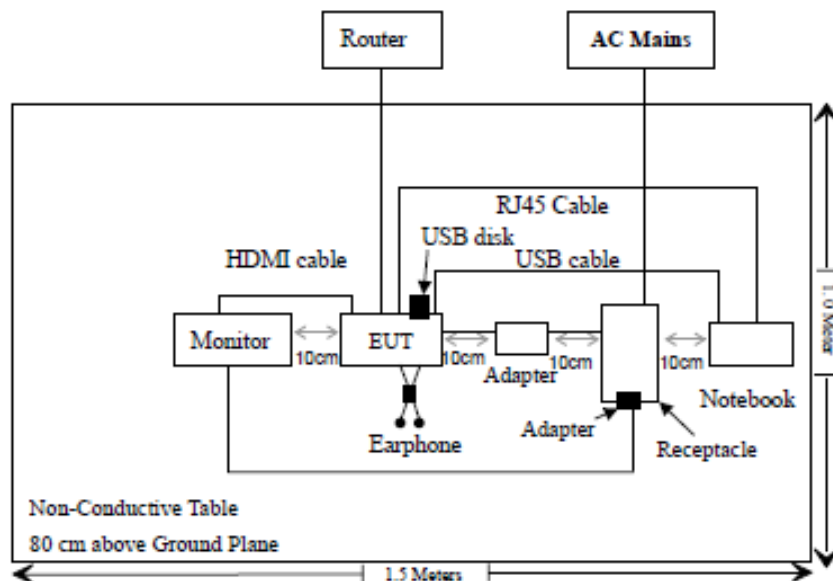

For POE

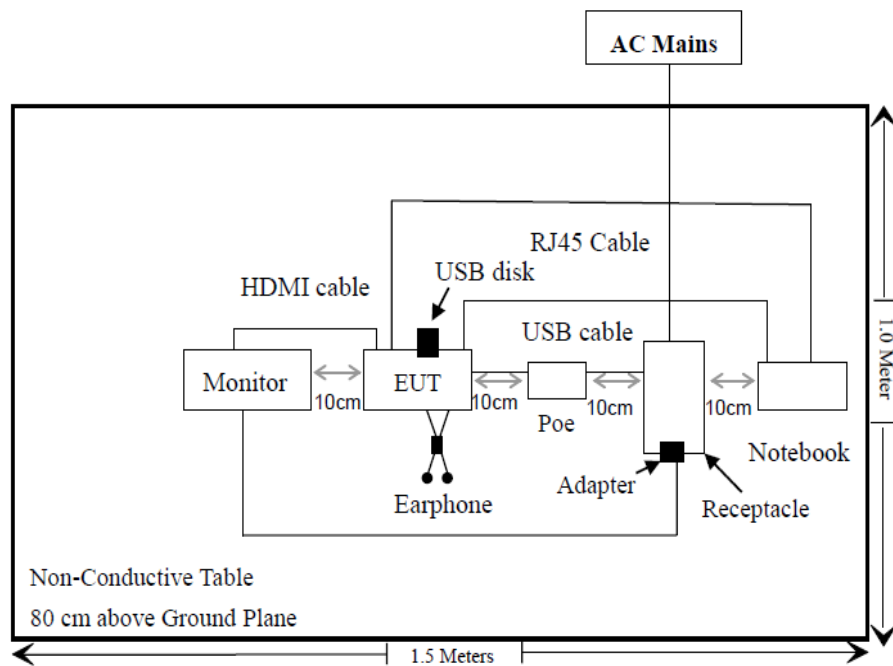

For Radiated Emissions above 1GHz:

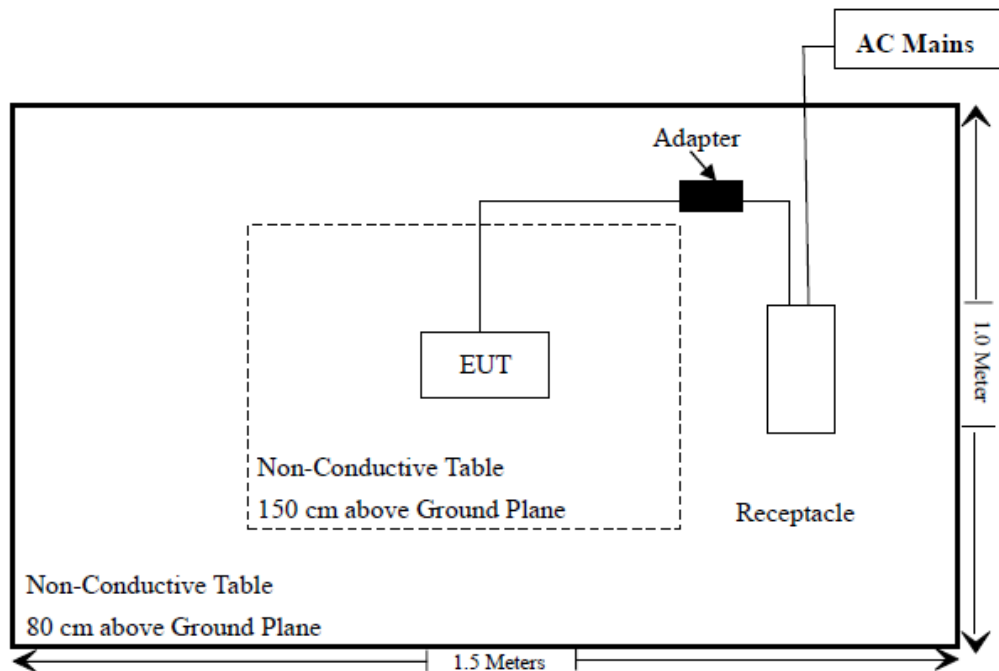

SUMMARY OF TEST RESULTS

Test Rules	Test Rules	Description of Test	Result
FCC §1.1307 & §2.1091	/	MPE-Based Exemption	Compliant
/	RSS-102 § 6.6	Field reference level exposure exemption limits	Compliant
FCC §15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207(a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §15.205& §15.209 & §15.407(b)	RSS-Gen §8.10& RSS-247§7.3	Undesirable Emission & Restricted Bands	Compliant
FCC §15.407(a) (e)	RSS- Gen§6.7, RSS-247 §7.3	Emission Bandwidth & 99% Occupied Bandwidth	Compliant
FCC §15.407(a)	RSS-247 §7.3	Conducted Transmitter Output Power	Compliant
FCC §15.407 (a)	RSS-247 §7.3	Power Spectral Density	Compliant
FCC §15.407 (h)	RSS-247 §7.3	Transmit Power Control (TPC)	Not Applicable
FCC §15.407 (h)	RSS-247 §7.3.6	Dynamic Frequency Selection (DFS)	Compliant*
/	RSS-247 §7.3.7	Additional requirement	Compliant
C63.10 §11.6	C63.10 §11.6	Duty Cycle	/
/	RSS-Gen §6.11	Frequency Stability	Compliant

Compliant*: Please refer to the DFS report 2601P05987E-RFC.

Not Applicable: For 5250-5350MHz/5470-5725MHz, the maximum EIRP is 15.02dBm<27dBm (500mW).

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Unknown	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16
Unknown	Chamber B Cable	Cable B5	Cable B5	2025/09/17	2026/09/16
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
ANRITSU	Microwave peak power sensor	MA24418A	12622	2025/09/01	2026/08/31
Unknown	10dB Attenuator	Unknown	F-03-EM224	2025/06/26	2026/06/25
JD	JD Auto Test software	NA	1.0.0.3769	NCR	NCR
BACL	High Low TEMP Test Chamber	BTH-150-40	30144	2025/09/11	2026/09/10
Fluke	Digital Multimeter	287	19000011	2025/04/29	2026/04/28
HELLVIAO	Contact voltage regulator	TDGC2-5KVA	Unknown	NCR	NCR

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC §15.207 & RSS-Gen §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

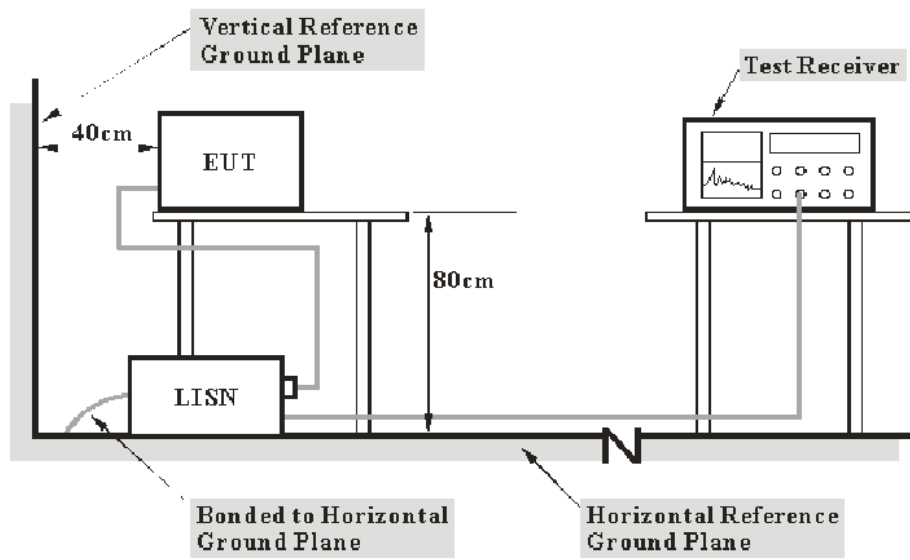

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN; the other related equipments were connected to the other LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission & Restricted Bands

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

According to RSS-247§7.3

Frequency band 5150-5250 MHz

7.3.1.3 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz:

- a. all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density;
- b. any unwanted emissions that falls between the upper edge of the 26 dB bandwidth and 5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth.
- c. if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing DFS (see section 7.3.6) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5250-5350 MHz

7.3.2.3 Unwanted emission limits

Devices shall comply with the following:

- a. all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz peak e.i.r.p spectral density.
- b. all emissions inside the band 5150-5250 MHz shall either:
 - i. not exceed -27 dBm/MHz peak e.i.r.p spectral density, or
 - ii. comply with the power spectral density for operation in section 7.3.1.2.

Frequency band 5470-5725 MHz

7.3.3.3 Unwanted emission limits

Equipment operating in the bands 5470-5725 MHz shall comply with the following unwanted emission limits:

- for devices with fundamental emissions fully contained within the 5470-5725 MHz band, all unwanted emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density.
- for devices with bandwidth overlapping the band edge of 5725 MHz, all unwanted emissions shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density at 5850 MHz instead of 5725 MHz.

Frequency band 5725-5850 MHz

7.3.4.4 Unwanted emission limits

Equipment operating in the band 5725-5850 MHz shall comply with the following peak e.i.r.p. spectral density limits:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

According to RSS-Gen §8.10



Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:


- The transmit frequency, including fundamental components of modulation, of license-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287.
- Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
- Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

Table 5 – General field strength limits at frequencies above 30 MHz	
Frequency (MHz)	Field strength (µV/m at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

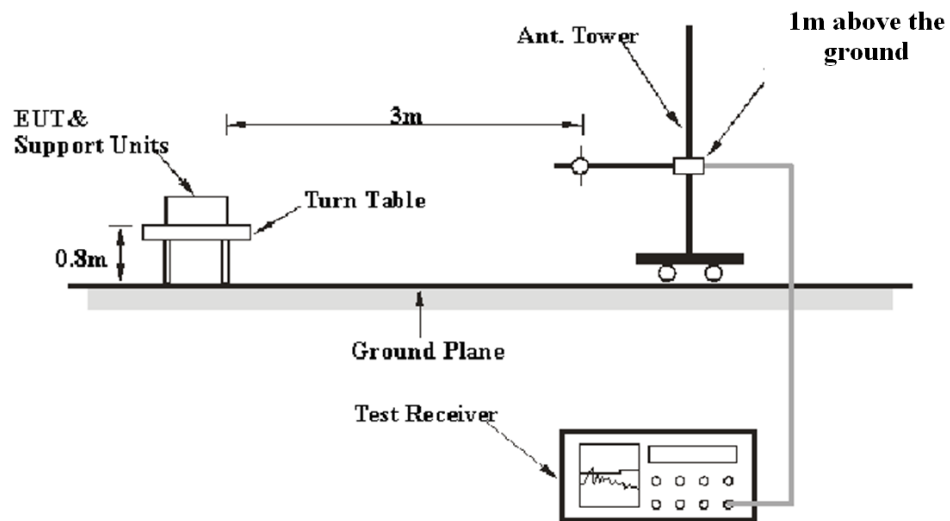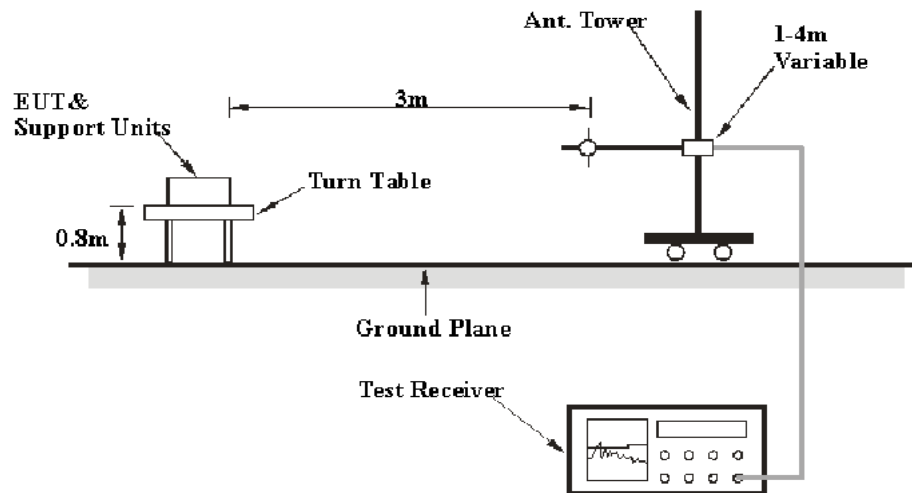EUT Setup**9 kHz-30MHz:****30MHz-1GHz:**

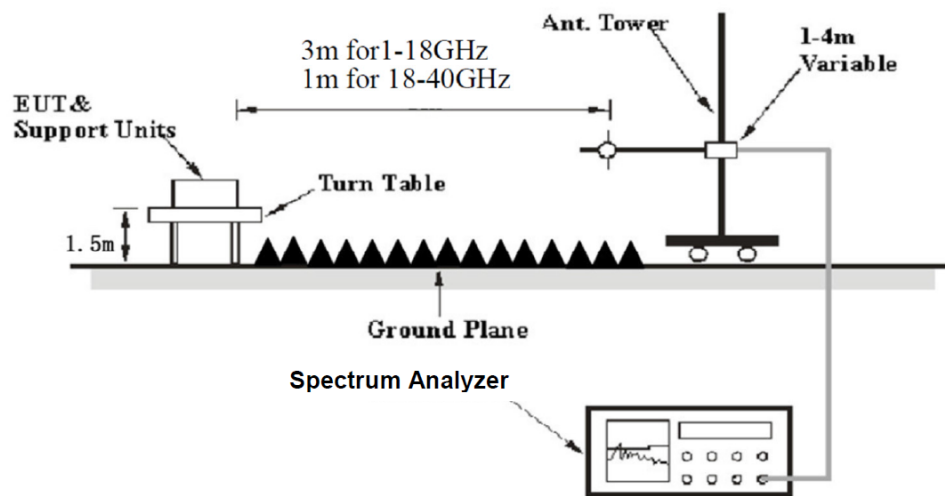Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC 15.209, FCC 15.407, RSS-247 and RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

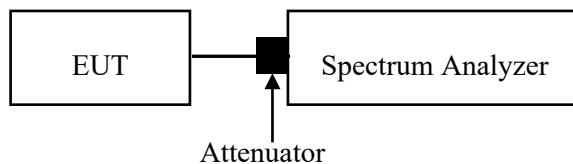26dB attenuated below the channel power:**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	>1/Ton, not less than 1kHz	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

26dB attenuated below the channel power:

RBW	Video B/W	Measurement
(1%-5%)* 99% Bandwidth	3*RBW	Peak

Note: The limit was calculated by attenuated below the channel power by at least 26 dB per RSS-247 §7.3.1.3

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance)

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Emission Bandwidth & 99% Occupied Bandwidth

Applicable Standard

According to FCC §15.407(a) (13), the maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

According to FCC §15.407(e), Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

According to RSS-GEN § 6.7 & RSS-247 §7.3.

7.3.4.2 For equipment operating in the band 5725-5850 MHz, the 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020 Section 12.5.1 & 12.5.2 & 12.5.3

12.5.1 Emission bandwidth for the band 5.725 GHz to 5.85 GHz

The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

12.5.2 Emission bandwidth for all other bands

The procedure for this method is as follows:


- a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW $>$ RBW.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

12.5.3 Occupied bandwidth

See 6.9.3 for the measurement procedure for OBW.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

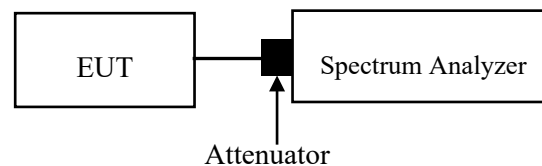

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Transmitter Output Power

Applicable Standard

According to FCC §15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 §7.3:

Frequency band 5150-5250 MHz

7.3.1.2 For all other devices the maximum e.i.r.p. spectral density shall not exceed 10 dBm/MHz. The maximum e.i.r.p. shall not exceed the lesser of:

- a. 200 mW; or
- b. $10 + 10 \log_{10} B$, dBm.

Frequency band 5250-5350 MHz

7.3.2.2 All other devices shall comply with the following:

- a. the maximum power spectral density shall not exceed 11 dBm/MHz and the maximum conducted output power shall not exceed the lesser of:
 - i. 250 mW; or
 - ii. $11 + 10 \log_{10} B$, dBm.
- b. the maximum e.i.r.p. shall not exceed the lesser of:
 - i. 1.0 W; or
 - ii. $17 + 10 \log_{10} B$, dBm.
- c. Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W

Frequency band 5470-5725MHz

7.3.3.2 Equipment operating in the band 5470-5725 MHz shall comply with the following power limits:

- a. the maximum conducted output power shall not exceed the lesser of:
 - i. 250 mW; or
 - ii. $11 + 10 \log_{10} B$, dBm.
- b. the maximum power spectral density shall not exceed 11 dBm/MHz.
- c. the maximum e.i.r.p. shall not exceed the lesser of:
 - i. 1.0 W; or
 - ii. $17 + 10 \log_{10} B$, dBm.
- d. equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

7.3.4.3 Equipment operating in the band 5725-5850 MHz shall comply with the following power limits:

- a. the maximum conducted output power shall not exceed 1 W; and
- b. the maximum output power spectral density shall not exceed 30 dBm/500 kHz.


When using transmitting antennas with a directional gain exceeding 6 dBi, the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

However, FFTP devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter maximum conducted output power and the power spectral density. FFTP operations exclude the use of PTMP systems, omnidirectional applications and multiple collocated transmitters transmitting the same information. However, remote stations of PTMP systems shall be permitted to operate at e.i.r.p. greater than 4 W under the same conditions as for FFTP systems.

Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2 Method PM-G

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

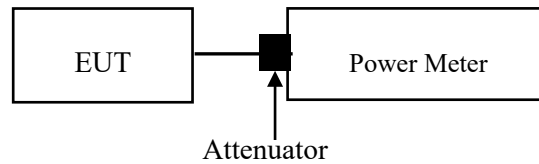

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Power Spectral Density

According to FCC §15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 §7.3:

Frequency band 5150-5250 MHz

7.3.1.2 For all other devices the maximum e.i.r.p. spectral density shall not exceed 10 dBm/MHz. The maximum e.i.r.p. shall not exceed the lesser of:

- a. 200 mW; or
- b. $10 + 10 \log_{10} B$, dBm.

Frequency band 5250-5350 MHz

7.3.2.2 All other devices shall comply with the following:

- a. the maximum power spectral density shall not exceed 11 dBm/MHz and the maximum conducted output power shall not exceed the lesser of:
 - i. 250 mW; or
 - ii. $11 + 10 \log_{10} B$, dBm.
- b. the maximum e.i.r.p. shall not exceed the lesser of:
 - i. 1.0 W; or
 - ii. $17 + 10 \log_{10} B$, dBm.
- c. Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W

Frequency band 5470-5725MHz

7.3.3.2 Equipment operating in the band 5470-5725 MHz shall comply with the following power limits:

- a. the maximum conducted output power shall not exceed the lesser of:
 - i. 250 mW; or
 - ii. $11 + 10 \log_{10} B$, dBm.
- b. the maximum power spectral density shall not exceed 11 dBm/MHz.
- c. the maximum e.i.r.p. shall not exceed the lesser of:
 - i. 1.0 W; or
 - ii. $17 + 10 \log_{10} B$, dBm.
- d. equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

7.3.4.3 Equipment operating in the band 5725-5850 MHz shall comply with the following power limits:


- a. the maximum conducted output power shall not exceed 1 W; and
- b. the maximum output power spectral density shall not exceed 30 dBm/500 kHz.

When using transmitting antennas with a directional gain exceeding 6 dBi, the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

However, FFTP devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter maximum conducted output power and the power spectral density. FFTP operations exclude the use of PTMP systems, omnidirectional applications and multiple collocated transmitters transmitting the same information. However, remote stations of PTMP systems shall be permitted to operate at e.i.r.p. greater than 4 W under the same conditions as for FFTP systems.

Test Procedure

According to ANSI C63.10-2020 Clause 12.6 Method SA-2 should be applied

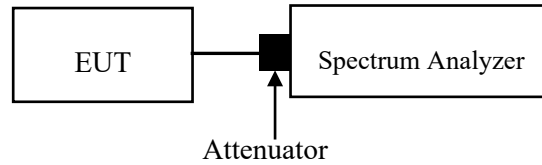

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Additional Requirements

Applicable Standard

According to RSS-247 Clause 7.3.7 Additional requirement

The following requirements shall apply:

- a. the device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b. all LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c. the user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
 - i. any devices capable of operating in the band 5150–5250 MHz shall only be used indoors to reduce the potential for harmful interference to co-channel mobile satellite systems (this requirement does not apply to OEM devices installed in vehicles by vehicle manufacturers);
 - ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
 - iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
 - iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 7.3.2.4 or 7.3.5.3 shall be clearly indicated.

Result**Pass**

RSS-247 Clause 7.3.7 a):

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operation failure. Please refer to declaration.

RSS-247 Clause 7.3.7 b):

The device must contain security features to protect against modification of software by unauthorized parties. Please refer to declaration.

RSS-247 Clause 7.3.7 c):

1. Compliant, please refer to the User Manual.
2. Not Applicable, the device has no detachable antenna.
3. Not Applicable, the device has no detachable antenna.
4. Compliant, please refer to the antenna information and output power section.


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 12.2

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

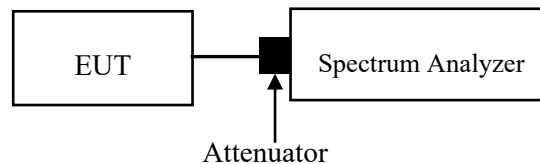

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Frequency Stability

Applicable Standard

According to RSS-GEN Clause 6.11

Frequency stability is a measure of frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at an appropriate reference temperature and the rated supply voltage.

When the measurement method of transmitter frequency stability is not stated in the applicable RSS or reference standards, the following conditions apply:

- a. The reference temperature for radio transmitters is +20°C (+68°F).
- b. A hand-held device that is only capable of operating using internal batteries shall be tested at the battery's nominal voltage, and again at the battery's operating end-point voltage, which shall be specified by the equipment manufacturer. For this test, either a battery or an external power supply can be used.
- c. The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency-determining circuit element shall be made subsequent to this initial set-up.

With the transmitter installed in an environmental test chamber, the unmodulated carrier frequency and frequency stability shall be measured under the conditions specified below for licensed and licence-exempt devices, unless specified otherwise in the applicable RSS. A sufficient stabilization period at each temperature shall be used prior to each frequency measurement.

For licensed devices, the following measurement conditions apply:

- a. at the temperatures of -30°C (-22°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage
- b. at the temperature of +20°C (+68°F) and at ±15% of the manufacturer's rated supply voltage

For licence-exempt devices, the following conditions apply:


- a. at the temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage
- b. at the temperature of +20°C (+68°F) and at ±15% of the manufacturer's rated supply voltage

If the frequency stability limits are only met within a temperature range that is smaller than the range specified in (a) for licensed or licence-exempt devices, the frequency stability requirement will be deemed to be met if the transmitter is automatically prevented from operating outside this smaller temperature range and if the published operating characteristics for the equipment are revised to reflect this restricted temperature range.

If the device contains both licence and licence-exempt transmitter modules, the device's frequency stability shall be measured under the most stringent condition specified in the applicable RSS of the transmitter module.

In addition, if an unmodulated carrier is not available, the method used to measure frequency stability shall be described in the test report.

Test Procedure

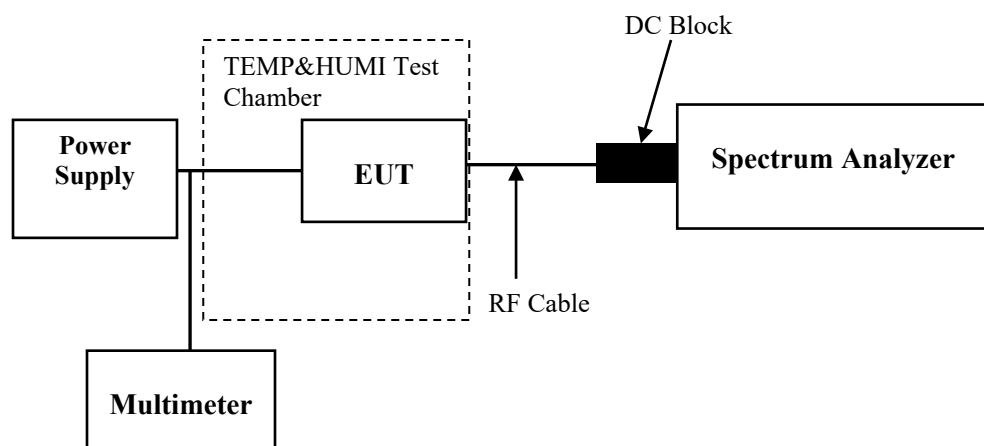

RF EXPOSURE EVALUATION

MPE-Based Exemption

Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 v01 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Mode	Frequency (MHz)	Tune up conducted power [#] (dBm)	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
			(dBi)	(dBd)	(dBm)	(mW)		
For module YL43752								
2.4G Wi-Fi	2412-2472	15.0	2.53	0.38	15.38	34.51	0.2	768
5.2G Wi-Fi	5180-5240	13.0	3.96	1.81	14.81	30.27	0.2	768
5.8G Wi-Fi	5745-5825	13.0	4.90	2.75	15.75	37.58	0.2	768
For module YL43456								
2.4G Wi-Fi	2412-2472	13.0	1.65	-0.50	12.50	17.78	0.2	768
5.2G Wi-Fi	5180-5240	12.0	2.34	0.19	12.19	16.56	0.2	768
5.3G Wi-Fi	5260-5320	6.0	2.96	0.81	6.81	4.80	0.2	768
5.6G Wi-Fi	5500-5720	12.0	3.73	1.58	13.58	22.80	0.2	768
5.8G Wi-Fi	5745-5825	14.0	2.94	0.79	14.79	30.13	0.2	768

- Note: 1. The tune up conducted power and antenna gain was declared by the applicant.
 2. 0dBd=2.15dBi
 3. The 2.4G and 5G Wi-Fi cannot transmit at same time.
 4. The two Wi-Fi modules can transmit as same time.

Simultaneous transmitting consideration (worst case):

$$\text{The ratio} = \text{ERP}_{\text{Module YL43752}} / \text{limit} + \text{ERP}_{\text{Module YL43456}} / \text{limit} = 37.58/768 + 30.13/768 = 0.088 < 1.0$$

So simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

Field reference level exposure exemption limits

Applicable Standard

According to RSS-102 Issue 6§6.6:

Field reference level (FRL) exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm (i.e. mobile devices), except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 1 W (adjusted for tune-up tolerance)
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance)
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz
- at or above 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 5 W (adjusted for tune-up tolerance) In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the EIRP was derived.

Calculated Data:

Mode	Frequency (MHz)	Maximum tune-up conducted power [#] (dBm)	Antenna Gain [#]	Maximum tune-up EIRP		Evaluation Distance (m)	Limit (mW)
			(dBi)	(dBm)	(mW)		
For module YL43752							
2.4G Wi-Fi	2412-2472	15.0	2.53	17.53	56.62	0.2	2684
5.2G Wi-Fi	5180-5240	13.0	3.96	16.96	49.66	0.2	4525
5.8G Wi-Fi	5745-5825	13.0	4.90	17.90	61.66	0.2	4857
For module YL43456							
2.4G Wi-Fi	2412-2472	13.0	1.65	14.65	29.17	0.2	2684
5.2G Wi-Fi	5180-5240	12.0	2.34	14.34	27.16	0.2	4525
5.3G Wi-Fi	5260-5320	6.0	2.96	8.96	7.87	0.2	4573
5.6G Wi-Fi	5500-5720	12.0	3.73	15.73	37.41	0.2	4714
5.8G Wi-Fi	5745-5825	14.0	2.94	16.94	49.43	0.2	4857

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.
2. The 2.4G and 5G Wi-Fi cannot transmit at same time, the two Wi-Fi modules can transmit at same time.

Simultaneous transmitting consideration (worst case):

The ratio = $\text{EIRP}_{\text{Module YL43752}} / \text{limit} + \text{EIRP}_{\text{Module YL43456}} / \text{limit} = 56.62/2684 + 49.43/4857 = 0.031 < 1.0$

So simultaneous exposure is compliant.

Result: Compliant

Note: To maintain compliance with the RF exposure guidelines, place the equipment at least 20cm from nearby persons.

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

According to RSS-Gen §6.8,

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISSED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has three internal antennas which were permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

ANT	Type	Antenna Gain [#]	Impedance	Frequency Range
For module YL43752				
ANT0	PCB	3.96dBi	50Ω	5150-5250MHz
ANT1	PCB	3.96dBi	50Ω	5150-5250MHz
ANT0	PCB	4.90dBi	50Ω	5725-5850MHz
ANT1	PCB	4.90dBi	50Ω	5725-5850MHz
For module YL43456				
/	PCB	2.34dBi	50Ω	5150-5250MHz
/	PCB	2.96dBi	50Ω	5250-5350MHz
/	PCB	3.73dBi	50Ω	5470-5725MHz
/	PCB	2.94dBi	50Ω	5725-5850MHz

Result: Compliant


TEST DATA AND RESULTS

AC Line Conducted Emissions

Temperature (°C)	25.2	Relative Humidity (%)	61
ATM Pressure (kPa)	100.9	Test engineer	Macy Shi
Test date	2026.03.20		
EUT operation mode	Transmitting		
Note:	The EUT powered by adapter or POE, the worst case POE power supply was selected to test according to 2.4G Wi-Fi report test result.		

For module **YL43752** (Maximum output power mode, ANT0 802.11a 5200MHz)

AC 120V 60 Hz, Line

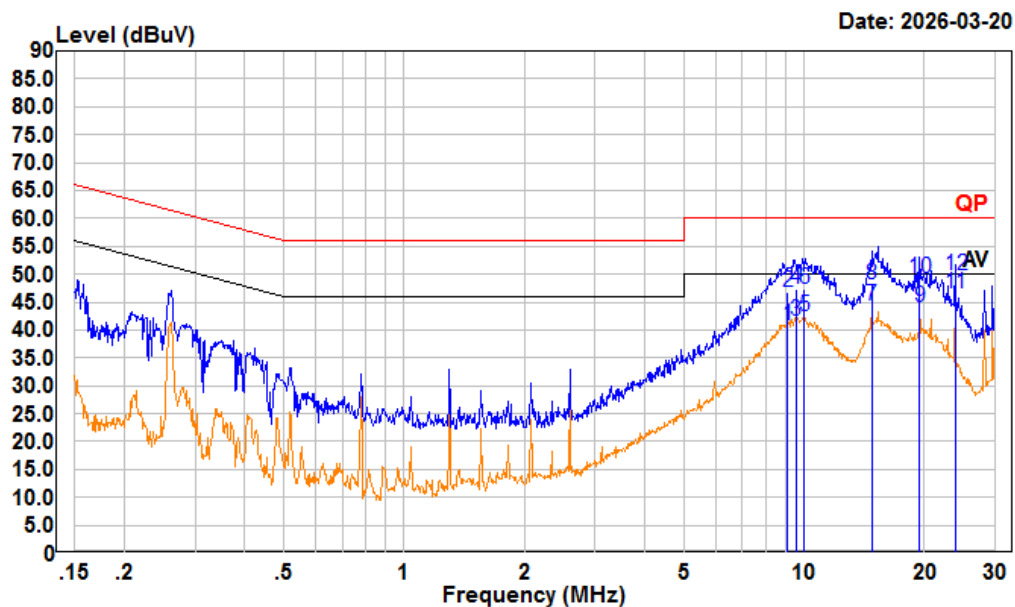

Condition: Line


Project : 2601P05987E-RF

tester : Macy.shi Note: 5G WIFI Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	9.077	20.63	40.84	9.90	10.31	50.00	-9.16	Average
2	9.077	26.55	46.76	9.90	10.31	60.00	-13.24	QP
3	9.553	21.36	41.58	9.90	10.32	50.00	-8.42	Average
4	9.553	27.20	47.42	9.90	10.32	60.00	-12.58	QP
5	10.035	22.23	42.46	9.90	10.33	50.00	-7.54	Average
6	10.035	27.05	47.28	9.90	10.33	60.00	-12.72	QP
7	14.782	24.14	44.42	9.90	10.38	50.00	-5.58	Average
8	14.782	27.94	48.22	9.90	10.38	60.00	-11.78	QP
9	19.444	23.75	44.07	9.90	10.42	50.00	-5.93	Average
10	19.444	28.93	49.25	9.90	10.42	60.00	-10.75	QP
11	23.853	26.21	46.58	9.90	10.47	50.00	-3.42	Average
12	23.853	29.51	49.88	9.90	10.47	60.00	-10.12	QP

AC 120V 60 Hz, Neutral

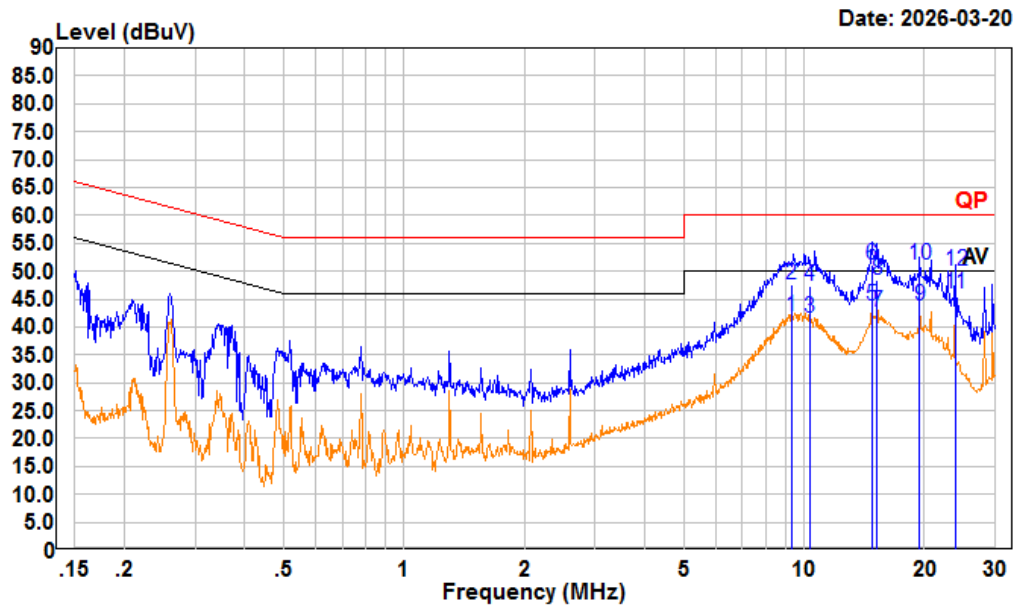

Condition: neutral

Project : 2601P05987E-RF


tester : Macy.shi Note:5G WIFI Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	9.310	21.77	41.79	9.70	10.32	50.00	-8.21	Average
2	9.310	27.60	47.62	9.70	10.32	60.00	-12.38	QP
3	10.304	21.61	41.64	9.70	10.33	50.00	-8.36	Average
4	10.304	27.31	47.34	9.70	10.33	60.00	-12.66	QP
5	14.782	23.64	43.72	9.70	10.38	50.00	-6.28	Average
6	14.782	31.05	51.13	9.70	10.38	60.00	-8.87	QP
7	15.231	22.59	42.67	9.70	10.38	50.00	-7.33	Average
8	15.231	28.28	48.36	9.70	10.38	60.00	-11.64	QP
9	19.444	23.56	43.68	9.70	10.42	50.00	-6.32	Average
10	19.444	30.99	51.11	9.70	10.42	60.00	-8.89	QP
11	23.853	25.68	45.85	9.70	10.47	50.00	-4.15	Average
12	23.853	29.85	50.02	9.70	10.47	60.00	-9.98	QP

For module YL43456 (Maximum output power mode, 802.11a 5745MHz)


AC 120V 60 Hz, Line

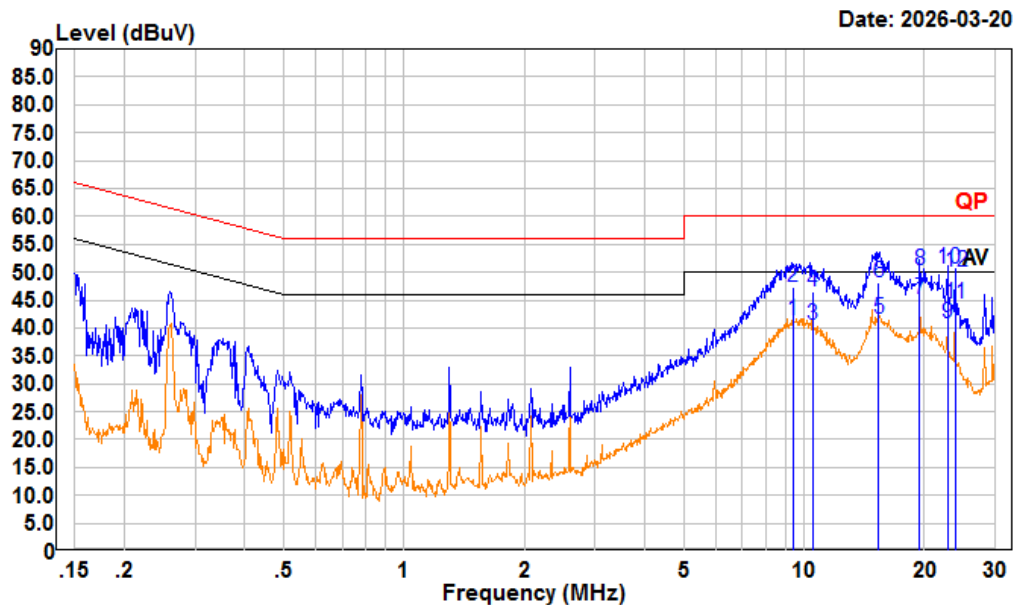

Condition: Line
 Project : 2601P05987E-RF
 tester : Macy.shi Note:5G WIFI Transmitting
 Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	9.381	21.20	41.42	9.90	10.32	50.00	-8.58	Average
2	9.381	27.02	47.24	9.90	10.32	60.00	-12.76	QP
3	10.490	20.20	40.43	9.90	10.33	50.00	-9.57	Average
4	10.490	26.19	46.42	9.90	10.33	60.00	-13.58	QP
5	15.326	21.46	41.74	9.90	10.38	50.00	-8.26	Average
6	15.326	27.96	48.24	9.90	10.38	60.00	-11.76	QP
7	19.444	24.96	45.28	9.90	10.42	50.00	-4.72	Average
8	19.444	30.02	50.34	9.90	10.42	60.00	-9.66	QP
9	22.807	20.36	40.72	9.90	10.46	50.00	-9.28	Average
10	22.807	30.16	50.52	9.90	10.46	60.00	-9.48	QP
11	23.853	24.03	44.40	9.90	10.47	50.00	-5.60	Average
12	23.853	29.62	49.99	9.90	10.47	60.00	-10.01	QP

AC 120V 60 Hz, Neutral

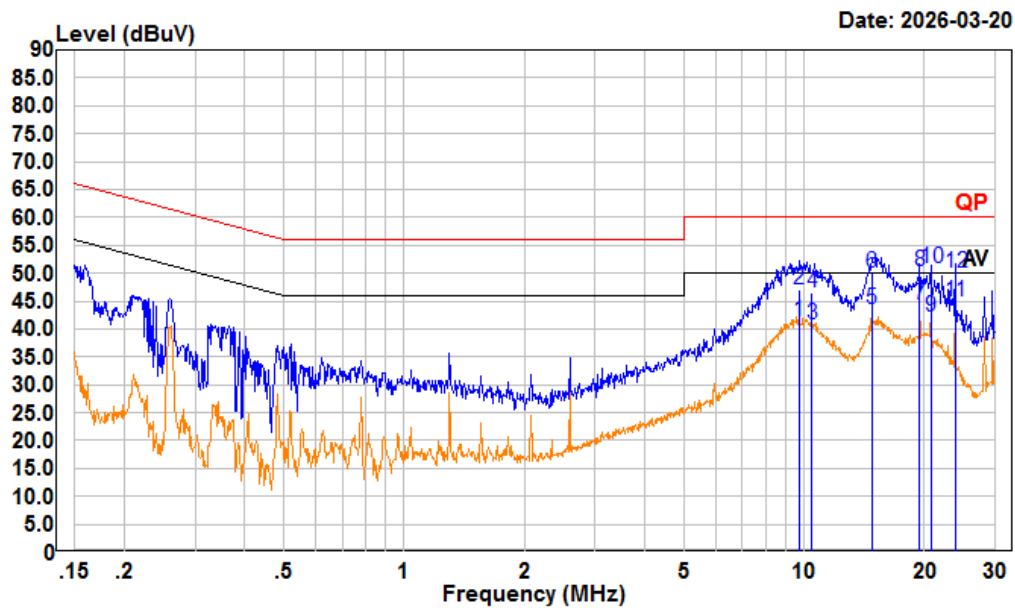

Condition: neutral

Project : 2601P05987E-RF

tester : Macy.shi Note: 5G WIFI Transmitting

Setting : RBW: 9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	9.727	21.42	41.45	9.70	10.33	50.00	-8.55	Average
2	9.727	27.14	47.17	9.70	10.33	60.00	-12.83	QP
3	10.463	20.74	40.77	9.70	10.33	50.00	-9.23	Average
4	10.463	26.58	46.61	9.70	10.33	60.00	-13.39	QP
5	14.782	23.53	43.61	9.70	10.38	50.00	-6.39	Average
6	14.782	29.87	49.95	9.70	10.38	60.00	-10.05	QP
7	19.444	24.28	44.40	9.70	10.42	50.00	-5.60	Average
8	19.444	30.30	50.42	9.70	10.42	60.00	-9.58	QP
9	20.746	22.04	42.18	9.70	10.44	50.00	-7.82	Average
10	20.746	30.85	50.99	9.70	10.44	60.00	-9.01	QP
11	23.853	24.80	44.97	9.70	10.47	50.00	-5.03	Average
12	23.853	29.75	49.92	9.70	10.47	60.00	-10.08	QP

Undesirable Emission

Temperature (°C)	25-29	Relative Humidity (%)	47-54
ATM Pressure (kPa):	101.1-101.2	Test engineer:	Nico Wu & Zenos Qiao
Test date:	2026.04.13~2026.06.22		
EUT operation mode:	Below 1GHz: Transmitting Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. The spurious emission from 9 kHz-30MHz of IC RSS-GEN standard, the unit of final result on the test plots are dBμV/m, so the limit should be added by 51,5 dB from dBμA/m to dBμV/m.		


Below 1GHz:

For module YL43752

For POE

ANT0 (Maximum output power mode, 802.11a 5200MHz)


9kHz-150kHz

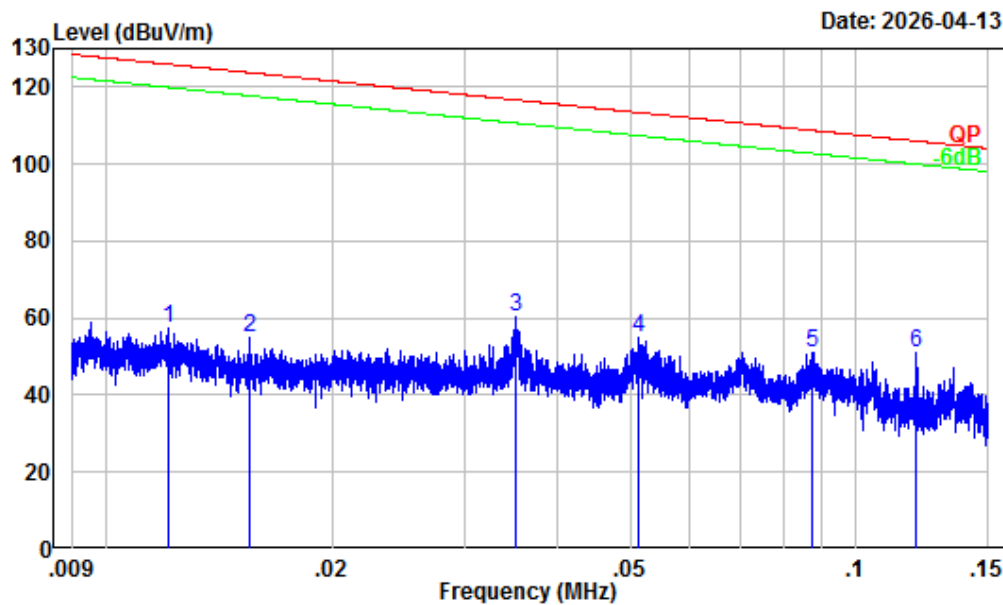

Site : Chamber A
 Condition : 3m
 Project Number : 2601P05987E-RF
 Test Mode : 5G WIFI Transmitting
 Detector: Peak RBW/VBW: 0.3/1kHz
 Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBUV	dBUV/m	dBUV/m	dB	
1	0.012	31.90	25.26	57.16	125.94	-68.78	Peak
2	0.016	31.25	23.61	54.86	123.79	-68.93	Peak
3	0.035	27.95	32.21	60.16	116.67	-56.51	Peak
4	0.051	26.28	28.77	55.05	113.42	-58.37	Peak
5	0.087	22.88	28.18	51.06	108.78	-57.72	Peak
6	0.120	20.80	30.05	50.85	106.00	-55.15	Peak


150kHz-30MHz

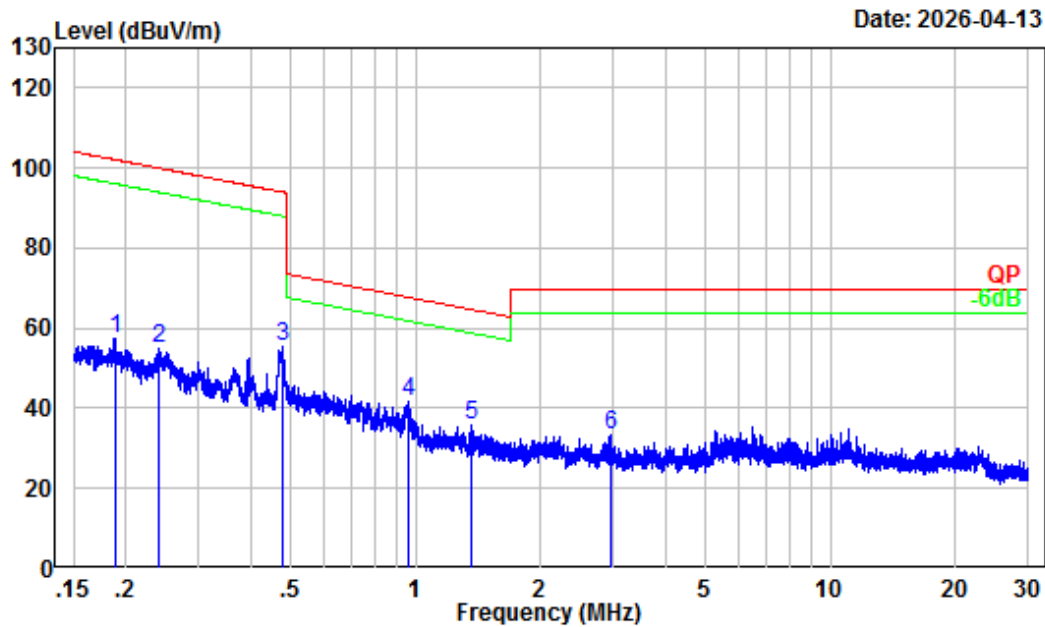

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.189	16.76	40.70	57.46	102.09	-44.63	Peak
2	0.241	13.66	41.16	54.82	99.95	-45.13	Peak
3	0.476	6.85	48.46	55.31	94.04	-38.73	Peak
4	0.963	1.48	40.39	41.87	67.80	-25.93	Peak
5	1.358	0.20	35.78	35.98	64.76	-28.78	Peak
6	2.966	-2.13	35.25	33.12	69.54	-36.42	Peak


30MHz-1GHz_Horizontal

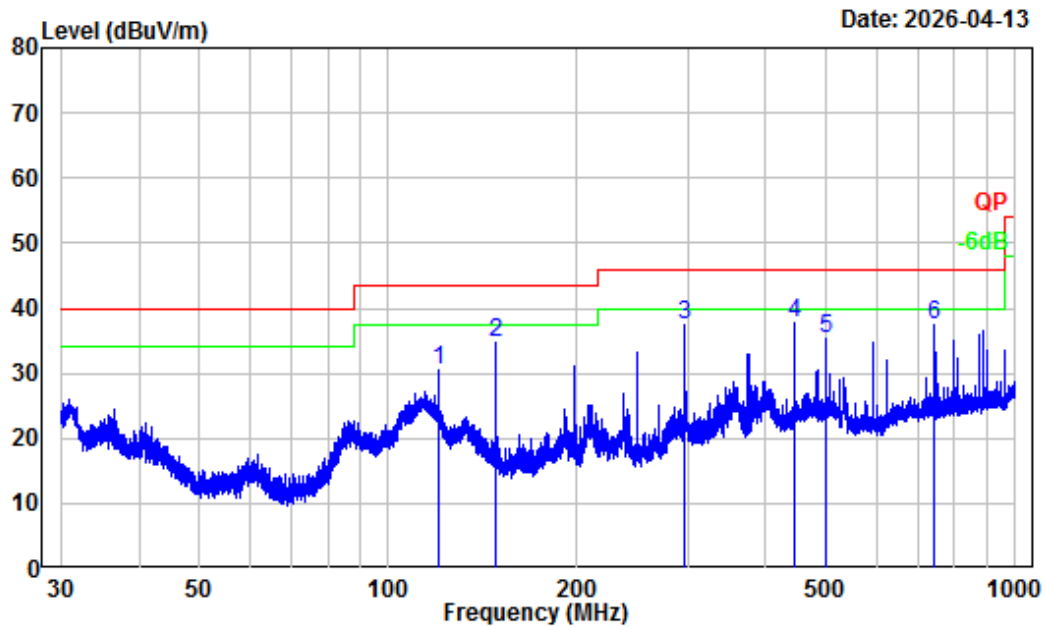

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	120.01	-11.84	42.27	30.43	43.50	-13.07	Peak
2	148.44	-12.70	47.42	34.72	43.50	-8.78	Peak
3	296.96	-11.61	49.05	37.44	46.00	-8.56	Peak
4	445.63	-8.05	45.71	37.66	46.00	-8.34	Peak
5	500.08	-6.32	41.66	35.34	46.00	-10.66	Peak
6	742.58	-3.35	40.70	37.35	46.00	-8.65	Peak

30MHz-1GHz_Vertical

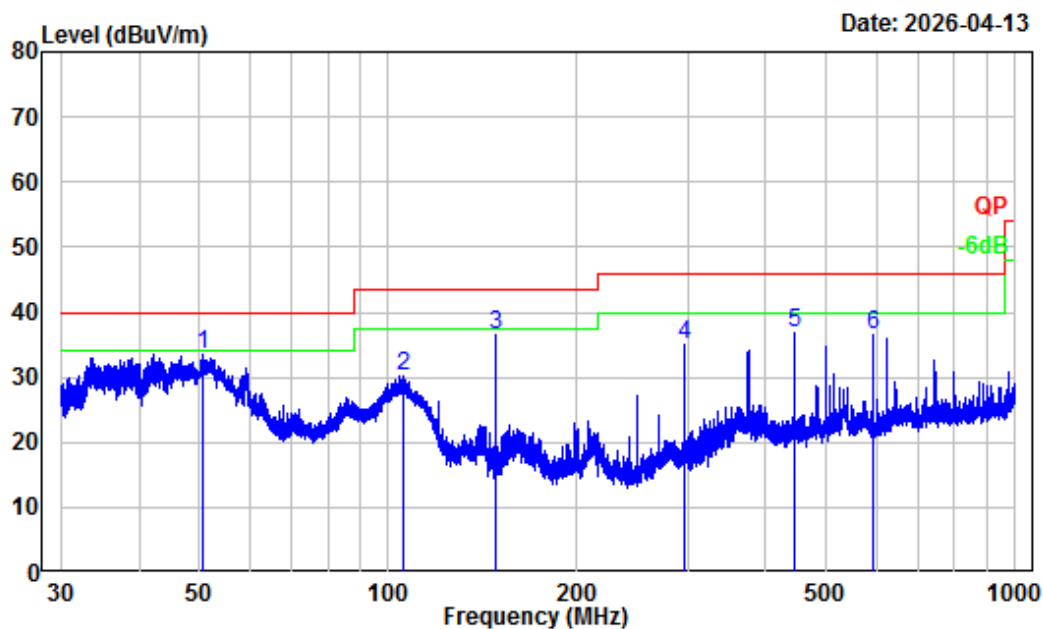


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	50.45	-18.06	51.68	33.62	40.00	-6.38	Peak
2	105.97	-14.40	44.59	30.19	43.50	-13.31	Peak
3	148.51	-12.70	49.31	36.61	43.50	-6.89	Peak
4	297.09	-11.61	46.64	35.03	46.00	-10.97	Peak
5	445.63	-8.05	44.99	36.94	46.00	-9.06	Peak
6	594.09	-5.80	42.26	36.46	46.00	-9.54	Peak

ANT1 (Maximum output power mode, 802.11ax40 5755MHz)


9kHz-150kHz

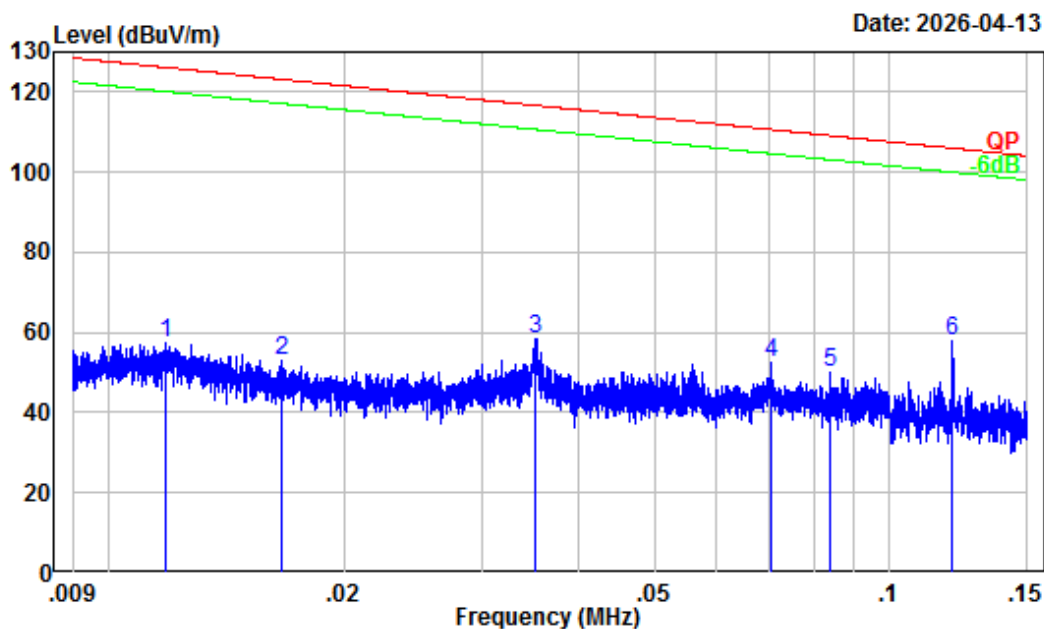

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	31.95	25.39	57.34	126.14	-68.80	Peak
2	0.017	31.03	21.97	53.00	123.15	-70.15	Peak
3	0.035	27.95	30.24	58.19	116.66	-58.47	Peak
4	0.071	24.35	27.95	52.30	110.64	-58.34	Peak
5	0.084	23.12	27.09	50.21	109.12	-58.91	Peak
6	0.120	20.80	37.09	57.89	105.99	-48.10	Peak


150kHz-30MHz

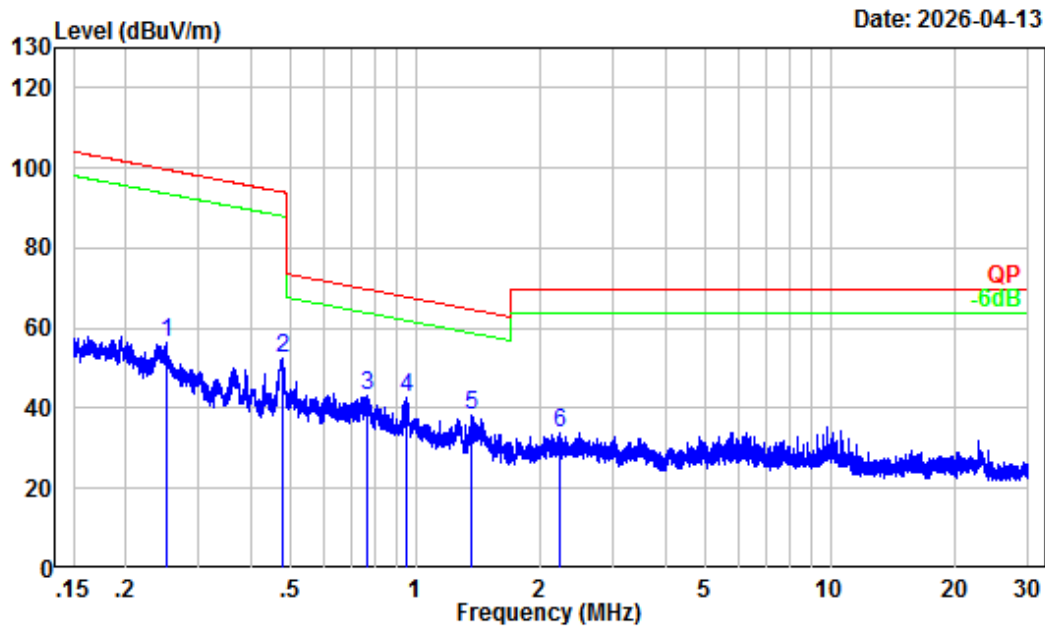

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.252	13.05	43.27	56.32	99.58	-43.26	Peak
2	0.477	6.84	45.52	52.36	94.04	-41.68	Peak
3	0.763	3.16	39.97	43.13	69.87	-26.74	Peak
4	0.956	1.53	41.08	42.61	67.87	-25.26	Peak
5	1.359	0.19	38.03	38.22	64.75	-26.53	Peak
6	2.221	-1.72	35.39	33.67	69.54	-35.87	Peak


30MHz-1GHz_Horizontal

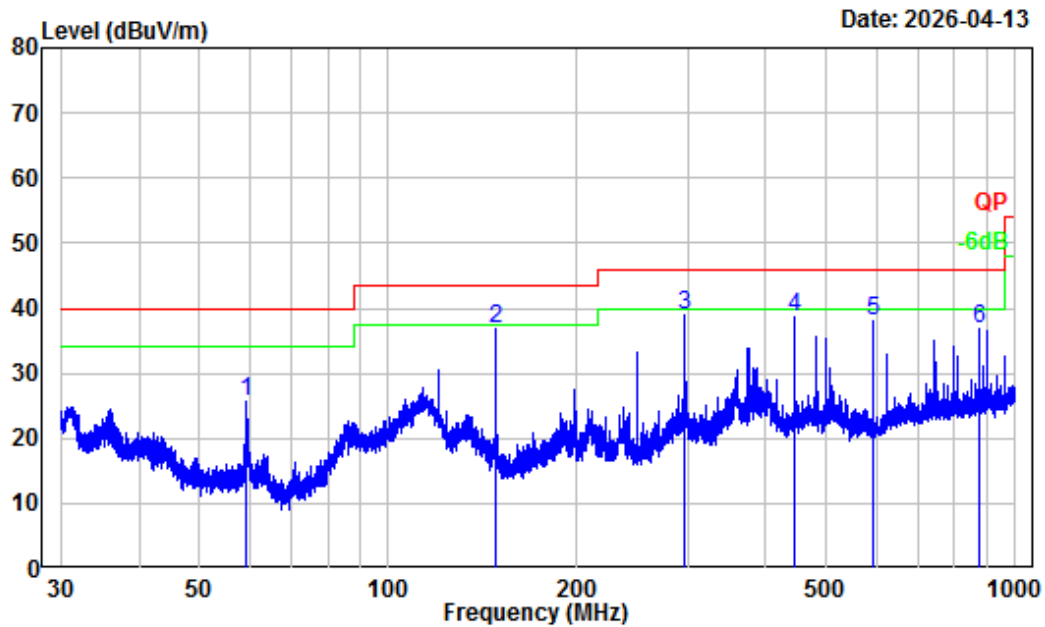

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	59.34	-18.28	43.83	25.55	40.00	-14.45	Peak
2	148.44	-12.70	49.39	36.69	43.50	-6.81	Peak
3	296.96	-11.61	50.61	39.00	46.00	-7.00	Peak
4	445.63	-8.05	46.71	38.66	46.00	-7.34	Peak
5	594.09	-5.80	43.75	37.95	46.00	-8.05	Peak
6	875.25	-2.00	38.82	36.82	46.00	-9.18	Peak

30MHz-1GHz_Vertical

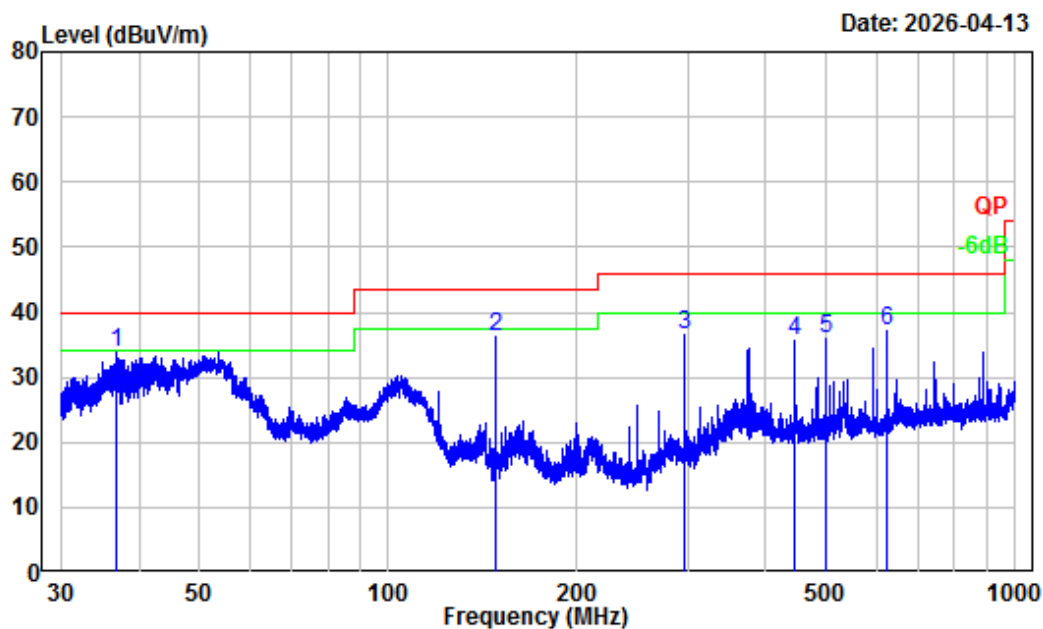


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	36.83	-10.10	43.94	33.84	40.00	-6.16	Peak
2	148.44	-12.70	48.96	36.26	43.50	-7.24	Peak
3	296.96	-11.61	48.06	36.45	46.00	-9.55	Peak
4	445.63	-8.05	43.55	35.50	46.00	-10.50	Peak
5	500.08	-6.32	42.11	35.79	46.00	-10.21	Peak
6	625.08	-4.65	41.82	37.17	46.00	-8.83	Peak

For Adapter

ANT0 (Maximum output power mode, 802.11a 5200MHz)


9kHz-150kHz

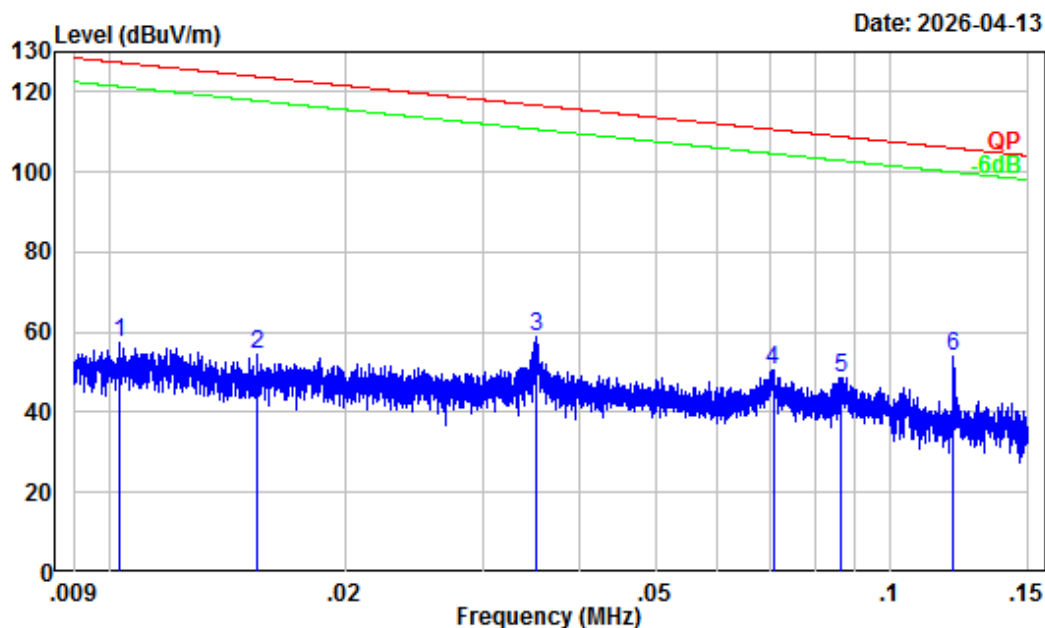

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.25	25.06	57.31	127.37	-70.06	Peak
2	0.015	31.26	23.18	54.44	123.82	-69.38	Peak
3	0.035	27.96	30.90	58.86	116.70	-57.84	Peak
4	0.071	24.33	26.33	50.66	110.61	-59.95	Peak
5	0.086	22.96	25.79	48.75	108.88	-60.13	Peak
6	0.120	20.80	33.13	53.93	106.00	-52.07	Peak


150kHz-30MHz

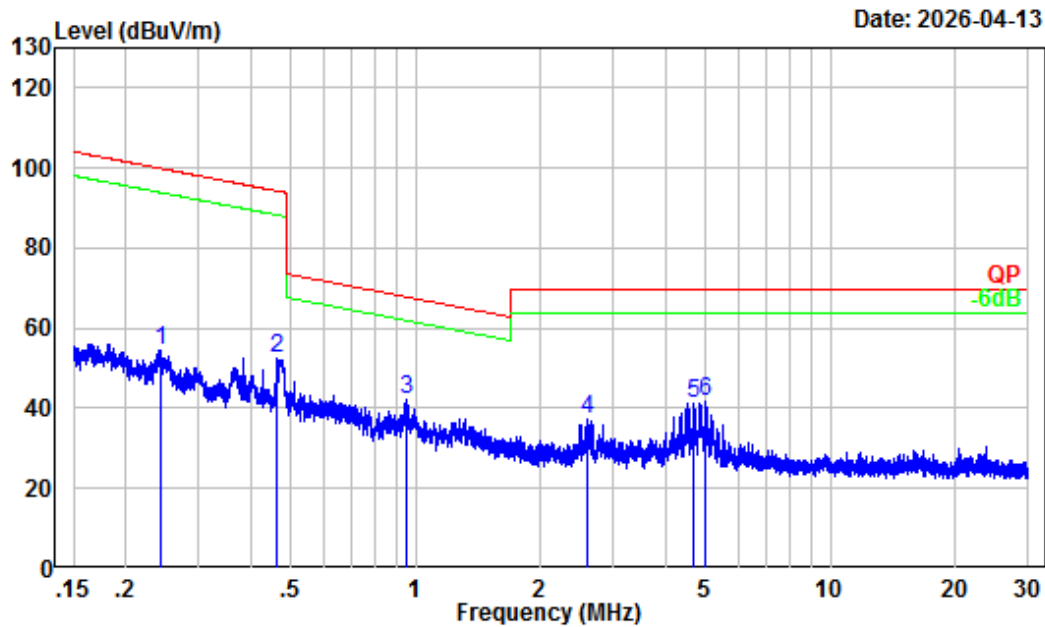

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.243	13.59	40.73	54.32	99.91	-45.59	Peak
2	0.465	7.06	45.51	52.57	94.25	-41.68	Peak
3	0.949	1.58	40.69	42.27	67.93	-25.66	Peak
4	2.586	-1.92	39.04	37.12	69.54	-32.42	Peak
5	4.703	-2.77	43.99	41.22	69.54	-28.32	Peak
6	5.015	-2.80	44.71	41.91	69.54	-27.63	Peak


30MHz-1GHz_Horizontal

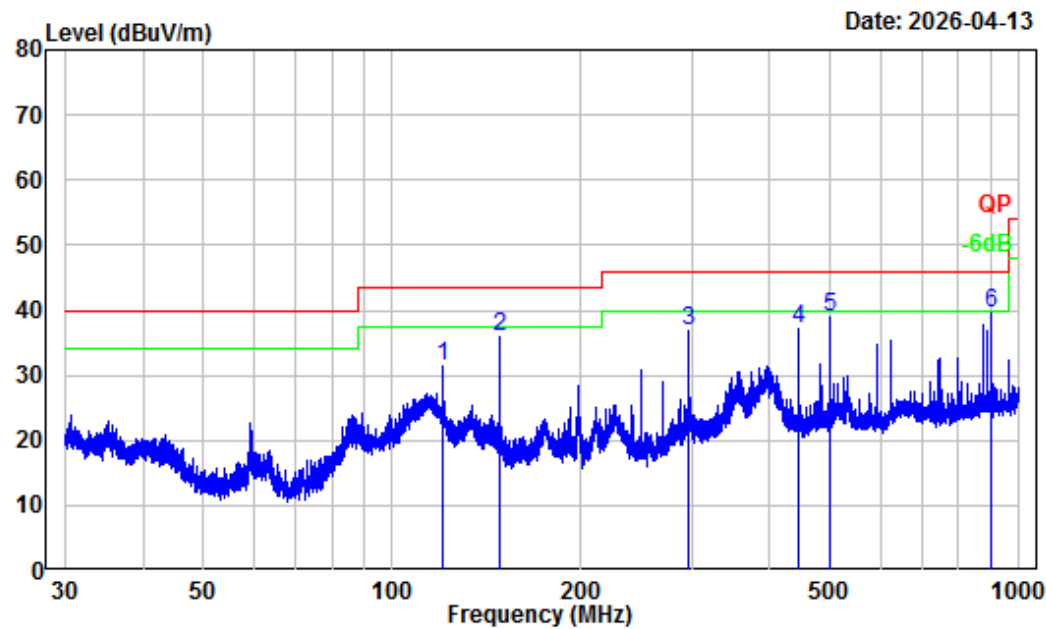

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	120.01	-11.84	43.10	31.26	43.50	-12.24	Peak
2	148.51	-12.70	48.47	35.77	43.50	-7.73	Peak
3	297.09	-11.61	48.46	36.85	46.00	-9.15	Peak
4	445.44	-8.04	45.25	37.21	46.00	-8.79	Peak
5	500.08	-6.32	45.28	38.96	46.00	-7.04	Peak
6	900.15	-1.77	41.39	39.62	46.00	-6.38	Peak

30MHz-1GHz_Vertical

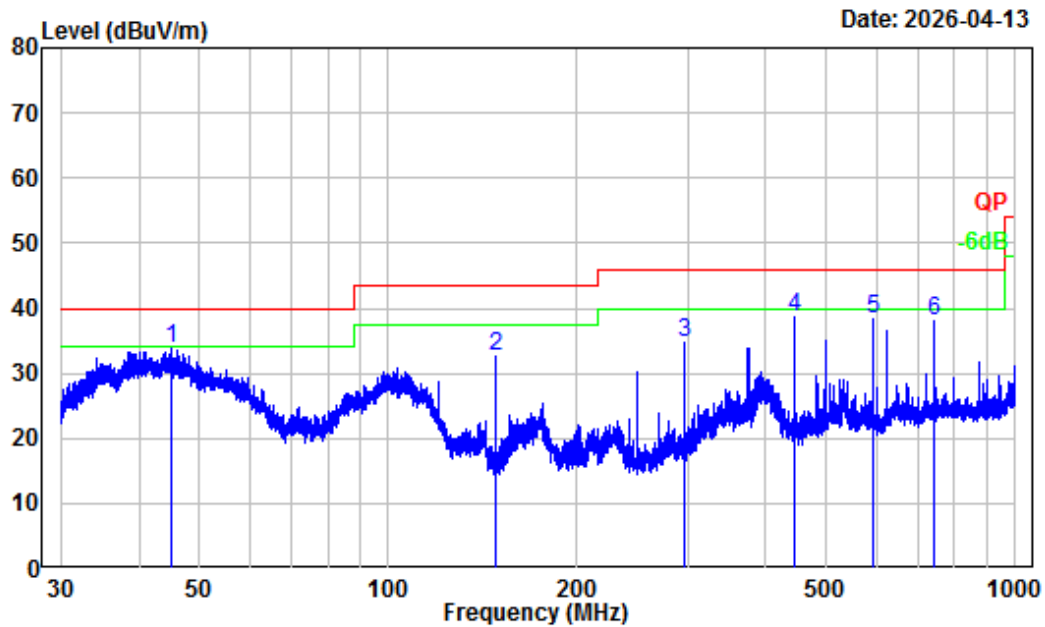


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	45.18	-16.01	49.80	33.79	40.00	-6.21	Peak
2	148.51	-12.70	45.32	32.62	43.50	-10.88	Peak
3	296.96	-11.61	46.24	34.63	46.00	-11.37	Peak
4	445.44	-8.04	46.71	38.67	46.00	-7.33	Peak
5	594.09	-5.80	44.02	38.22	46.00	-7.78	Peak
6	742.58	-3.35	41.31	37.96	46.00	-8.04	Peak

ANT1 (Maximum output power mode, 802.11ax40 5755MHz)


9kHz-150kHz

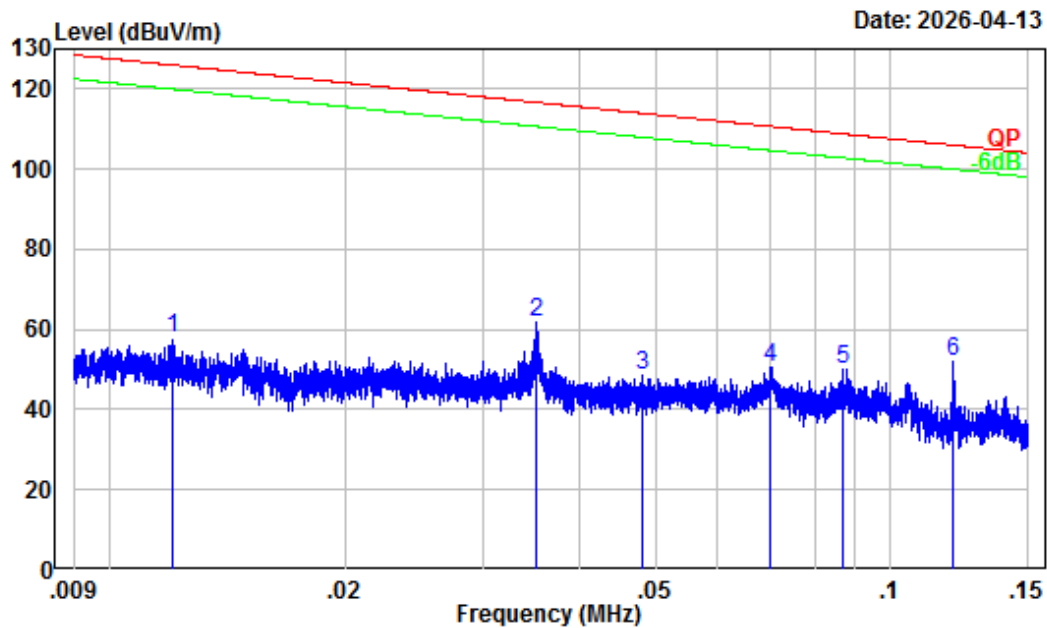

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	31.91	25.79	57.70	125.98	-68.28	Peak
2	0.035	27.95	33.65	61.60	116.66	-55.06	Peak
3	0.048	26.60	22.20	48.80	113.97	-65.17	Peak
4	0.070	24.37	26.02	50.39	110.67	-60.28	Peak
5	0.087	22.90	27.21	50.11	108.80	-58.69	Peak
6	0.120	20.80	31.06	51.86	105.99	-54.13	Peak


150kHz-30MHz

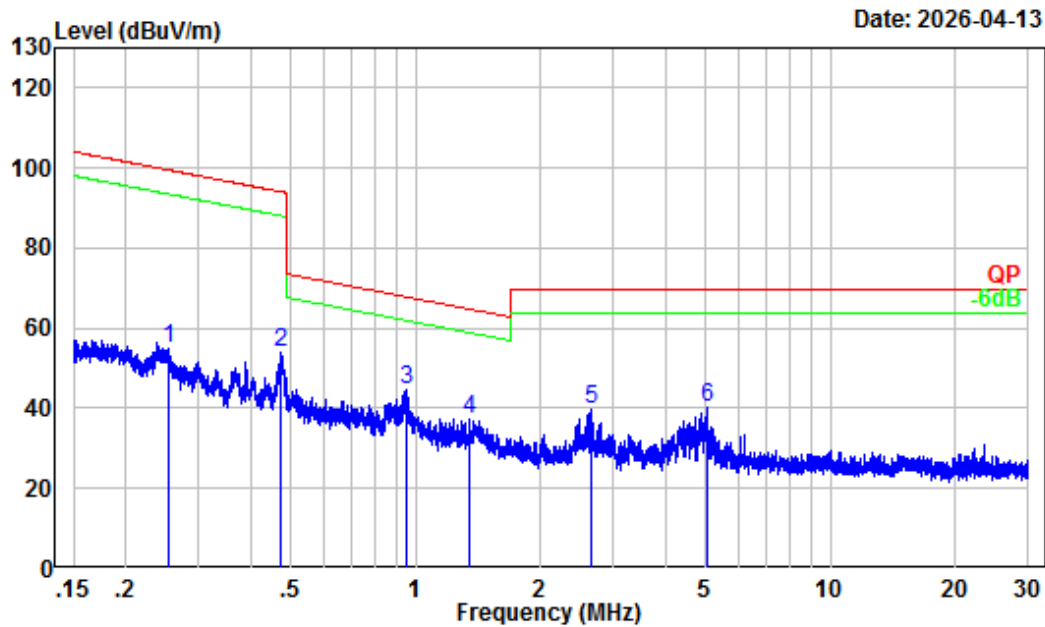

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.254	12.90	42.08	54.98	99.50	-44.52	Peak
2	0.473	6.91	47.23	54.14	94.11	-39.97	Peak
3	0.950	1.58	43.27	44.85	67.93	-23.08	Peak
4	1.352	0.21	37.23	37.44	64.80	-27.36	Peak
5	2.641	-1.95	41.50	39.55	69.54	-29.99	Peak
6	5.068	-2.81	43.06	40.25	69.54	-29.29	Peak


30MHz-1GHz_Horizontal

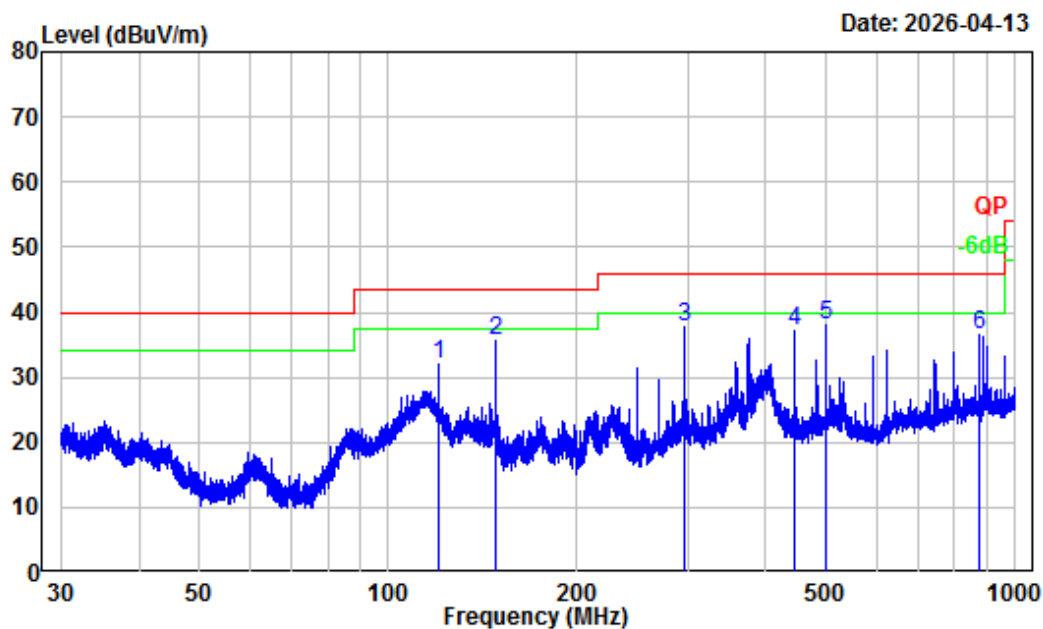

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	120.01	-11.84	43.93	32.09	43.50	-11.41	Peak
2	148.57	-12.70	48.18	35.48	43.50	-8.02	Peak
3	297.09	-11.61	49.20	37.59	46.00	-8.41	Peak
4	445.63	-8.05	45.21	37.16	46.00	-8.84	Peak
5	500.08	-6.32	44.38	38.06	46.00	-7.94	Peak
6	875.25	-2.00	38.65	36.65	46.00	-9.35	Peak

30MHz-1GHz_Vertical

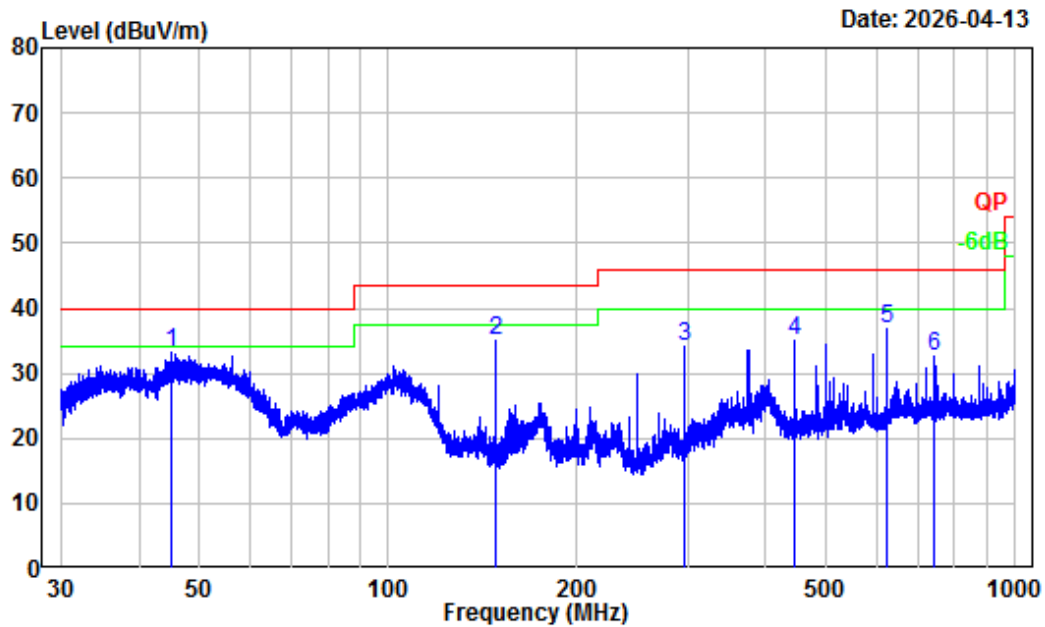


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	45.18	-16.01	49.12	33.11	40.00	-6.89	Peak
2	148.51	-12.70	47.77	35.07	43.50	-8.43	Peak
3	296.96	-11.61	45.67	34.06	46.00	-11.94	Peak
4	445.63	-8.05	42.93	34.88	46.00	-11.12	Peak
5	625.08	-4.65	41.55	36.90	46.00	-9.10	Peak
6	742.58	-3.35	35.83	32.48	46.00	-13.52	Peak

For module YL43456 (Maximum output power mode, 802.11a 5745MHz)

For POE


9kHz-150kHz

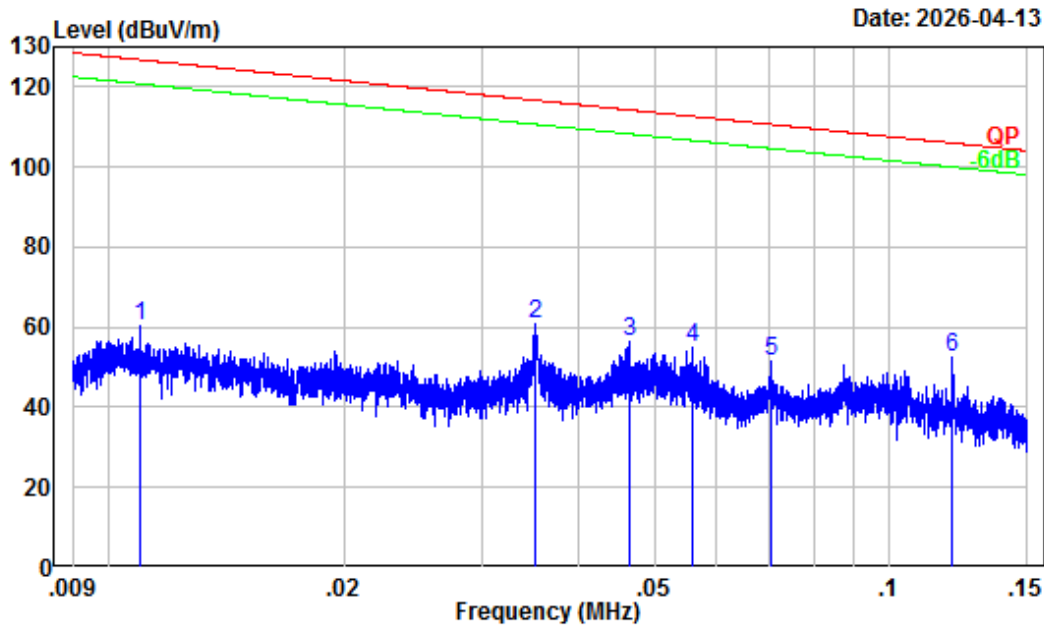

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	32.12	28.05	60.17	126.81	-66.64	Peak
2	0.035	27.95	32.94	60.89	116.67	-55.78	Peak
3	0.046	26.77	29.50	56.27	114.26	-57.99	Peak
4	0.056	25.80	29.18	54.98	112.64	-57.66	Peak
5	0.070	24.35	26.92	51.27	110.64	-59.37	Peak
6	0.120	20.80	31.91	52.71	105.99	-53.28	Peak


150kHz-30MHz

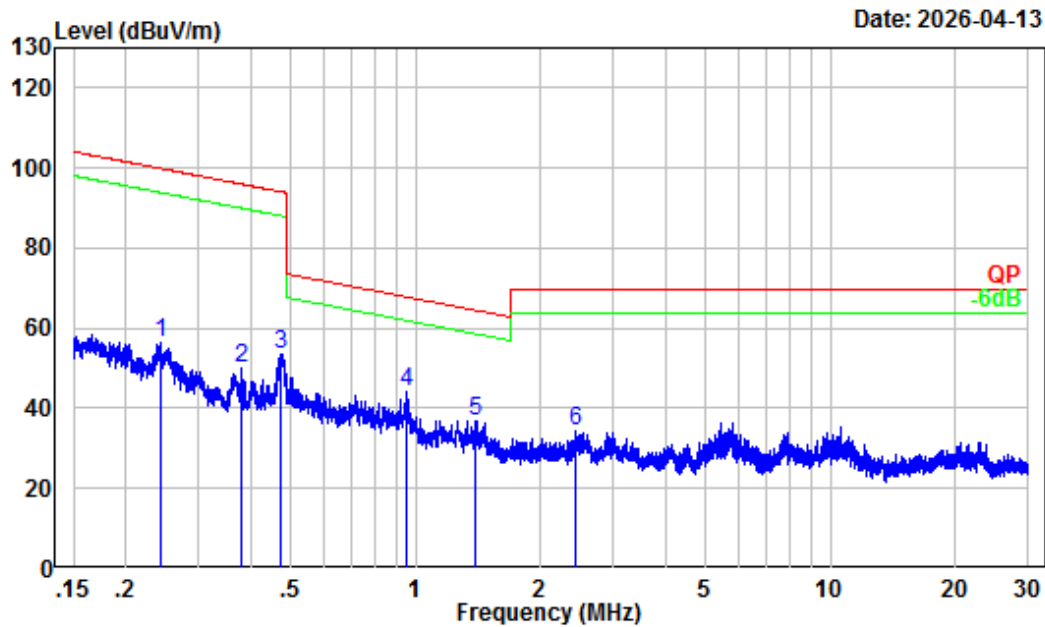

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.244	13.50	42.83	56.33	99.85	-43.52	Peak
2	0.381	8.65	41.63	50.28	95.98	-45.70	Peak
3	0.474	6.90	46.50	53.40	94.10	-40.70	Peak
4	0.956	1.53	42.51	44.04	67.87	-23.83	Peak
5	1.400	0.08	36.80	36.88	64.49	-27.61	Peak
6	2.430	-1.84	36.04	34.20	69.54	-35.34	Peak


30MHz-1GHz_Horizontal

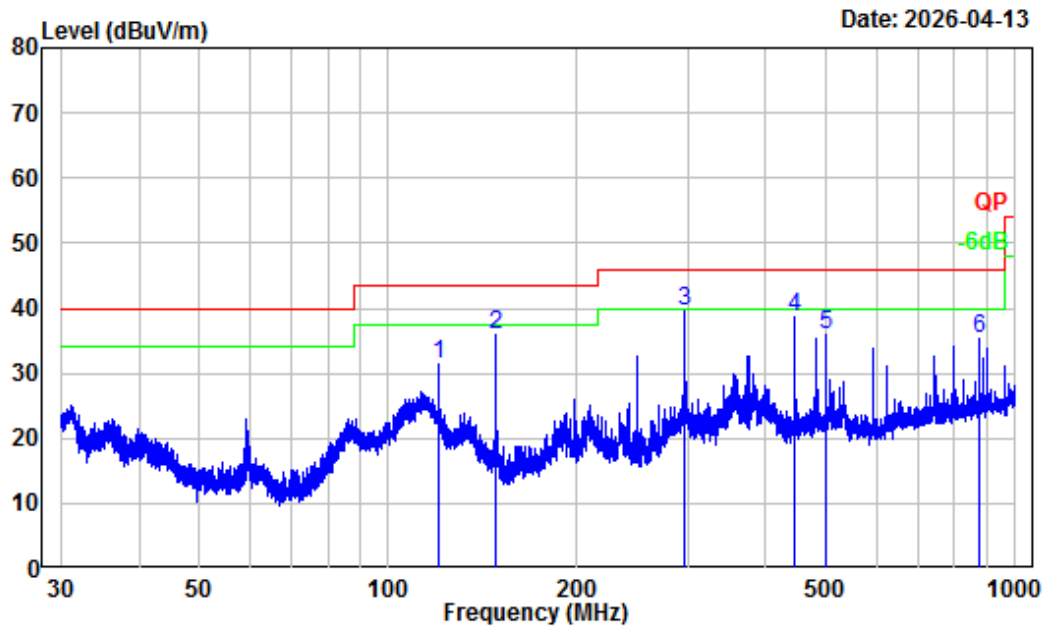

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	120.01	-11.84	43.34	31.50	43.50	-12.00	Peak
2	148.51	-12.70	48.72	36.02	43.50	-7.48	Peak
3	297.09	-11.61	51.12	39.51	46.00	-6.49	Peak
4	445.63	-8.05	46.79	38.74	46.00	-7.26	Peak
5	500.08	-6.32	42.34	36.02	46.00	-9.98	Peak
6	875.25	-2.00	37.19	35.19	46.00	-10.81	Peak

30MHz-1GHz_Vertical

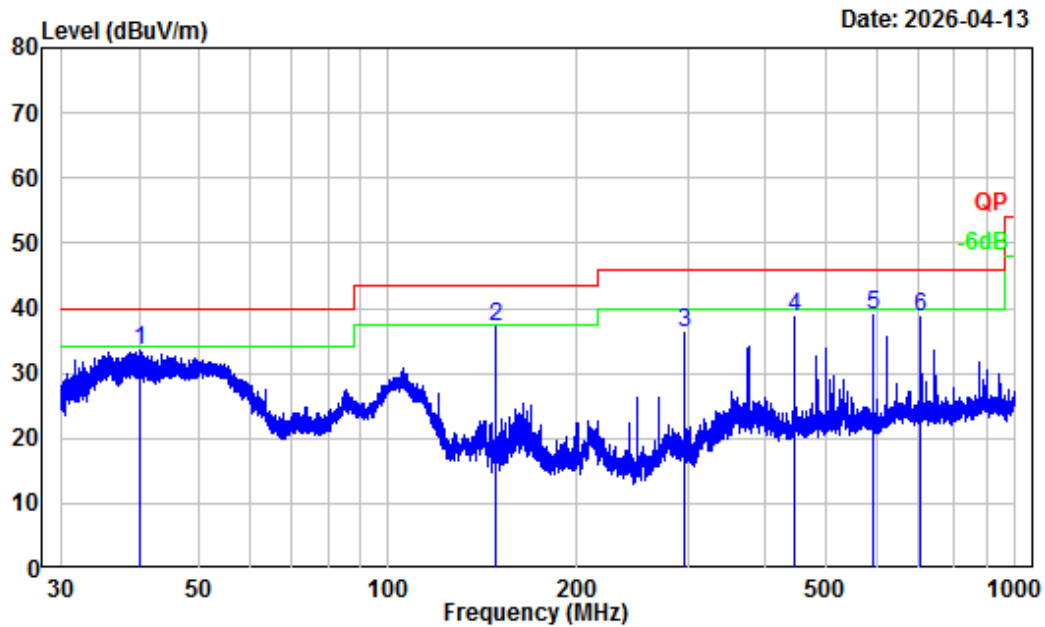


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.17	-12.48	45.89	33.41	40.00	-6.59	Peak
2	148.44	-12.70	49.89	37.19	43.50	-6.31	Peak
3	296.96	-11.61	47.81	36.20	46.00	-9.80	Peak
4	445.63	-8.05	46.67	38.62	46.00	-7.38	Peak
5	594.09	-5.80	44.77	38.97	46.00	-7.03	Peak
6	704.53	-3.85	42.58	38.73	46.00	-7.27	Peak

For Adapter


9kHz-150kHz

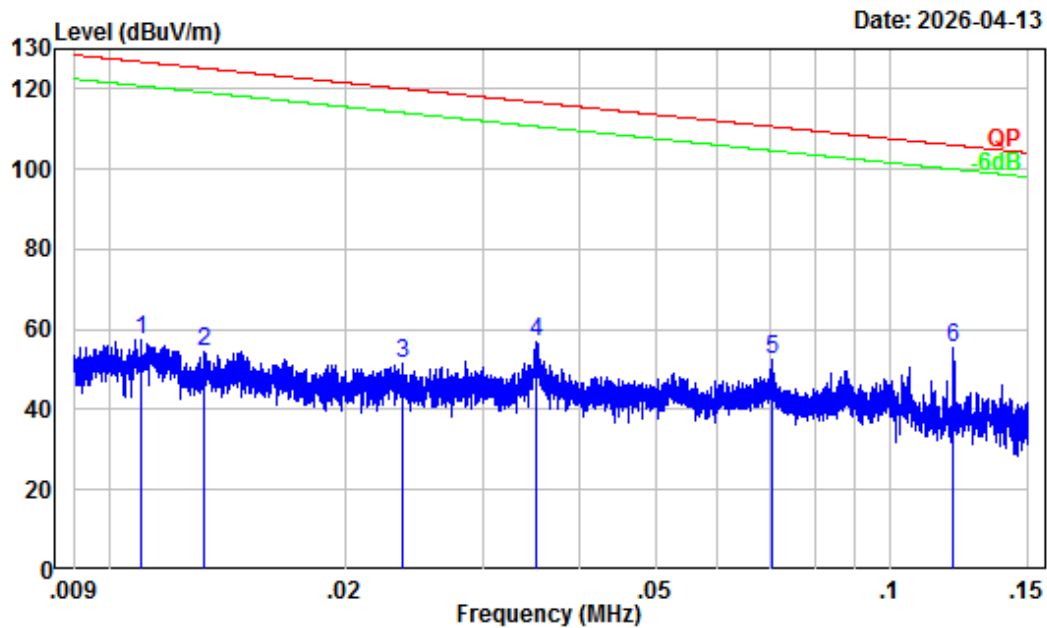

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	32.11	25.30	57.41	126.78	-69.37	Peak
2	0.013	31.68	22.93	54.61	125.17	-70.56	Peak
3	0.024	29.70	21.61	51.31	120.11	-68.80	Peak
4	0.035	27.96	29.00	56.96	116.70	-59.74	Peak
5	0.071	24.34	28.32	52.66	110.63	-57.97	Peak
6	0.120	20.80	34.41	55.21	105.99	-50.78	Peak


150kHz-30MHz

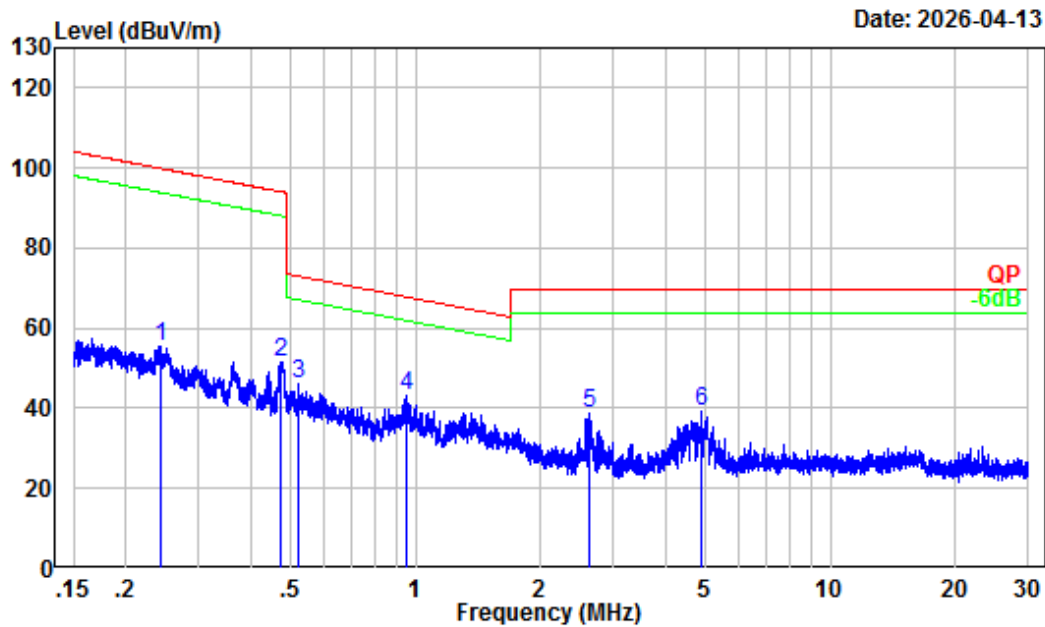

Site : Chamber A
Condition : 3m
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.242	13.60	41.82	55.42	99.92	-44.50	Peak
2	0.475	6.87	44.52	51.39	94.06	-42.67	Peak
3	0.522	6.13	40.14	46.27	73.24	-26.97	Peak
4	0.956	1.53	41.76	43.29	67.87	-24.58	Peak
5	2.624	-1.94	40.87	38.93	69.54	-30.61	Peak
6	4.906	-2.79	41.97	39.18	69.54	-30.36	Peak


30MHz-1GHz_Horizontal

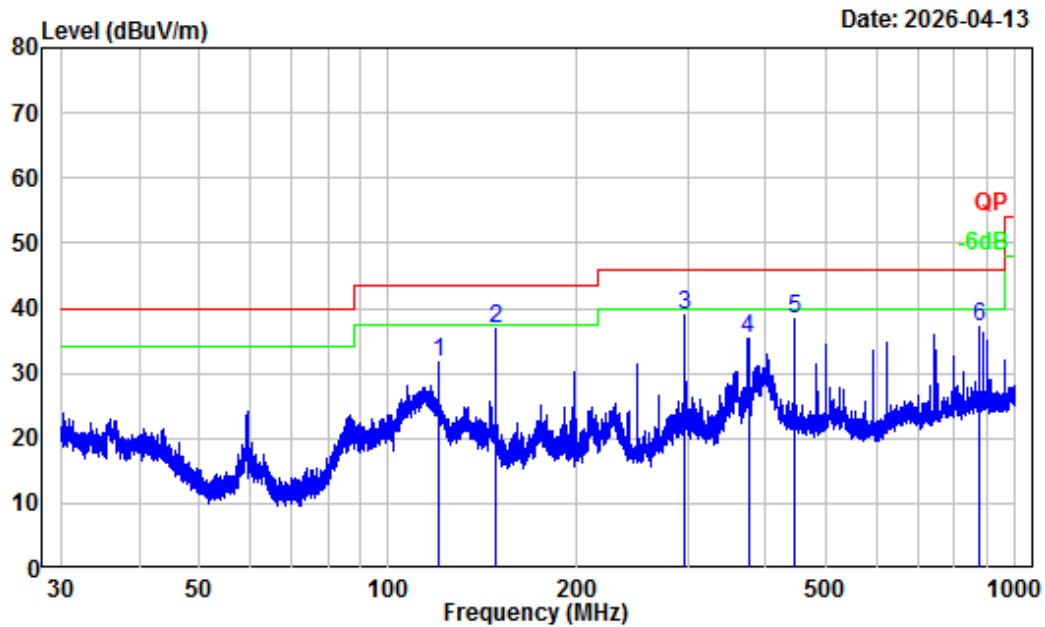

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	120.01	-11.84	43.68	31.84	43.50	-11.66	Peak
2	148.44	-12.70	49.47	36.77	43.50	-6.73	Peak
3	296.96	-11.61	50.48	38.87	46.00	-7.13	Peak
4	375.12	-9.75	45.16	35.41	46.00	-10.59	Peak
5	445.63	-8.05	46.46	38.41	46.00	-7.59	Peak
6	875.25	-2.00	39.11	37.11	46.00	-8.89	Peak

30MHz-1GHz_Vertical

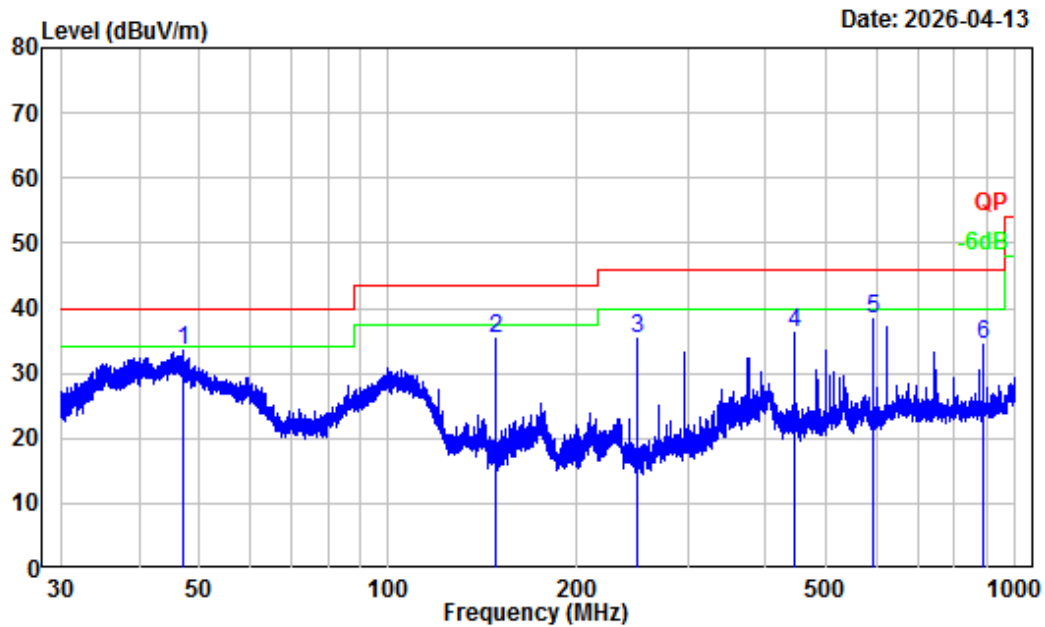

Site : Chamber A
Condition : 3m Vertical
Project Number : 2601P05987E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Nico Wu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	46.93	-16.95	50.31	33.36	40.00	-6.64	Peak
2	148.57	-12.70	48.08	35.38	43.50	-8.12	Peak
3	250.08	-13.53	48.77	35.24	46.00	-10.76	Peak
4	445.63	-8.05	44.26	36.21	46.00	-9.79	Peak
5	594.09	-5.80	44.05	38.25	46.00	-7.75	Peak
6	891.12	-1.86	36.15	34.29	46.00	-11.71	Peak

Above 1GHz:**For module YL43752****5150-5250 MHz**

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
ANT0							
802.11a							
Low Channel							
10360	46.34	PK	H	2.48	48.82	68.2	-19.38
10360	46.93	PK	V	2.48	49.41	68.2	-18.79
Middle Channel							
10400	46.28	PK	H	2.47	48.75	68.2	-19.45
10400	45.38	PK	V	2.47	47.85	68.2	-20.35
High Channel							
10480	47.25	PK	H	2.19	49.44	68.2	-18.76
10480	46.83	PK	V	2.19	49.02	68.2	-19.18
802.11ac20							
Low Channel							
10360	46.43	PK	H	2.48	48.91	68.2	-19.29
10360	47.49	PK	V	2.48	49.97	68.2	-18.23
Middle Channel							
10400	45.92	PK	H	2.47	48.39	68.2	-19.81
10400	45.21	PK	V	2.47	47.68	68.2	-20.52
High Channel							
10480	48.09	PK	H	2.19	50.28	68.2	-17.92
10480	47.41	PK	V	2.19	49.6	68.2	-18.6
802.11ac40							
Low Channel							
10380	46.82	PK	H	2.48	49.3	68.2	-18.9
10380	45.78	PK	V	2.48	48.26	68.2	-19.94
High Channel							
10460	46.74	PK	H	2.26	49	68.2	-19.2
10460	47.19	PK	V	2.26	49.45	68.2	-18.75
802.11ac80							
Middle Channel							
10420	46.63	PK	H	2.4	49.03	68.2	-19.17
10420	44.92	PK	V	2.4	47.32	68.2	-20.88

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax20							
Low Channel							
10360	46.43	PK	H	2.48	48.91	68.2	-19.29
10360	46.63	PK	V	2.48	49.11	68.2	-19.09
Middle Channel							
10400	46.16	PK	H	2.47	48.63	68.2	-19.57
10400	45.59	PK	V	2.47	48.06	68.2	-20.14
High Channel							
10480	47.8	PK	H	2.19	49.99	68.2	-18.21
10480	47.42	PK	V	2.19	49.61	68.2	-18.59
802.11ax40							
Low Channel							
10380	47.03	PK	H	2.48	49.51	68.2	-18.69
10380	45.78	PK	V	2.48	48.26	68.2	-19.94
High Channel							
10460	47.1	PK	H	2.26	49.36	68.2	-18.84
10460	47.19	PK	V	2.26	49.45	68.2	-18.75
802.11ax80							
Middle Channel							
10420	46.77	PK	H	2.4	49.17	68.2	-19.03
10420	46.21	PK	V	2.4	48.61	68.2	-19.59
ANT1							
802.11a							
Low Channel							
10360	46.99	PK	H	2.48	49.47	68.2	-18.73
10360	46.7	PK	V	2.48	49.18	68.2	-19.02
Middle Channel							
10400	47.37	PK	H	2.47	49.84	68.2	-18.36
10400	45.97	PK	V	2.47	48.44	68.2	-19.76
High Channel							
10480	48.04	PK	H	2.19	50.23	68.2	-17.97
10480	47.17	PK	V	2.19	49.36	68.2	-18.84

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac20							
Low Channel							
10360	46.16	PK	H	2.48	48.64	68.2	-19.56
10360	45.6	PK	V	2.48	48.08	68.2	-20.12
Middle Channel							
10400	47.46	PK	H	2.47	49.93	68.2	-18.27
10400	45.94	PK	V	2.47	48.41	68.2	-19.79
High Channel							
10480	47.71	PK	H	2.19	49.9	68.2	-18.3
10480	47.62	PK	V	2.19	49.81	68.2	-18.39
802.11ac40							
Low Channel							
10380	46.9	PK	H	2.48	49.38	68.2	-18.82
10380	45.89	PK	V	2.48	48.37	68.2	-19.83
High Channel							
10460	46.9	PK	H	2.26	49.16	68.2	-19.04
10460	48.31	PK	V	2.26	50.57	68.2	-17.63
802.11ac80							
Low Channel							
10420	45.52	PK	H	2.4	47.92	68.2	-20.28
10420	44.86	PK	V	2.4	47.26	68.2	-20.94
802.11ax20							
Low Channel							
10360	45.44	PK	H	2.48	47.92	68.2	-20.28
10360	46.01	PK	V	2.48	48.49	68.2	-19.71
Middle Channel							
10400	45.47	PK	H	2.47	47.94	68.2	-20.26
10400	45.62	PK	V	2.47	48.09	68.2	-20.11
High Channel							
10480	46.59	PK	H	2.19	48.78	68.2	-19.42
10480	47.86	PK	V	2.19	50.05	68.2	-18.15
802.11ax40							
Low Channel							
10380	45.94	PK	H	2.48	48.42	68.2	-19.78
10380	46.01	PK	V	2.48	48.49	68.2	-19.71
High Channel							
10460	48.32	PK	H	2.26	50.58	68.2	-17.62
10460	47.88	PK	V	2.26	50.14	68.2	-18.06

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ax80							
Low Channel							
10420	46.12	PK	H	2.4	48.52	68.2	-19.68
10420	45.97	PK	V	2.4	48.37	68.2	-19.83

5725-5850MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
ANT0							
802.11a							
Low Channel							
11490	49.88	PK	H	3.64	53.52	74	-20.48
11490	49.44	PK	V	3.64	53.08	74	-20.92
Middle Channel							
11570	48.92	PK	H	3.34	52.26	74	-21.74
11570	48.15	PK	V	3.34	51.49	74	-22.51
High Channel							
11650	48.22	PK	H	3.46	51.68	74	-22.32
11650	48.54	PK	V	3.46	52	74	-22
802.11ac20							
Low Channel							
11490	48.65	PK	H	3.64	52.29	74	-21.71
11490	49.1	PK	V	3.64	52.74	74	-21.26
Middle Channel							
11570	48.75	PK	H	3.34	52.09	74	-21.91
11570	47.39	PK	V	3.34	50.73	74	-23.27
High Channel							
11650	48.16	PK	H	3.46	51.62	74	-22.38
11650	47.88	PK	V	3.46	51.34	74	-22.66
802.11ac40							
Low Channel							
11510	46.8	PK	H	3.63	50.43	74	-23.57
11510	47.96	PK	V	3.63	51.59	74	-22.41
High Channel							
11590	48.65	PK	H	3.24	51.89	74	-22.11
11590	48.6	PK	V	3.24	51.84	74	-22.16
802.11ac80							
Middle Channel							
11550	47.91	PK	H	3.44	51.35	74	-22.65
11550	47.27	PK	V	3.44	50.71	74	-23.29

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax20							
Low Channel							
11490	48.02	PK	H	3.64	51.66	74	-22.34
11490	48.24	PK	V	3.64	51.88	74	-22.12
Middle Channel							
11570	48.39	PK	H	3.34	51.73	74	-22.27
11570	47.77	PK	V	3.34	51.11	74	-22.89
High Channel							
11650	48.08	PK	H	3.46	51.54	74	-22.46
11650	47.47	PK	V	3.46	50.93	74	-23.07
802.11ax40							
Low Channel							
11510	48.19	PK	H	3.63	51.82	74	-22.18
11510	48.69	PK	V	3.63	52.32	74	-21.68
High Channel							
11590	46.89	PK	H	3.24	50.13	74	-23.87
11590	47.33	PK	V	3.24	50.57	74	-23.43
802.11ax80							
Middle Channel							
11550	48.38	PK	H	3.44	51.82	74	-22.18
11550	47.75	PK	V	3.44	51.19	74	-22.81
ANT1							
802.11a							
Low Channel							
11490	49.57	PK	H	3.64	53.21	74	-20.79
11490	48.11	PK	V	3.64	51.75	74	-22.25
Middle Channel							
11570	48.81	PK	H	3.34	52.15	74	-21.85
11570	47.23	PK	V	3.34	50.57	74	-23.43
High Channel							
11650	48.6	PK	H	3.46	52.06	74	-21.94
11650	49.41	PK	V	3.46	52.87	74	-21.13

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac20							
Low Channel							
11490	48.41	PK	H	3.64	52.05	74	-21.95
11490	48.99	PK	V	3.64	52.63	74	-21.37
Middle Channel							
11570	48.58	PK	H	3.34	51.92	74	-22.08
11570	47.77	PK	V	3.34	51.11	74	-22.89
High Channel							
11650	49.32	PK	H	3.46	52.78	74	-21.22
11650	48.24	PK	V	3.46	51.7	74	-22.3
802.11ac40							
Low Channel							
11510	47.49	PK	H	3.63	51.12	74	-22.88
11510	47.76	PK	V	3.63	51.39	74	-22.61
High Channel							
11590	47.61	PK	H	3.24	50.85	74	-23.15
11590	48.1	PK	V	3.24	51.34	74	-22.66
802.11ac80							
Middle Channel							
11550	48.04	PK	H	3.44	51.48	74	-22.52
11550	47.44	PK	V	3.44	50.88	74	-23.12
802.11ax20							
Low Channel							
11490	48.58	PK	H	3.64	52.22	74	-21.78
11490	49.07	PK	V	3.64	52.71	74	-21.29
Middle Channel							
11570	47.14	PK	H	3.34	50.48	74	-23.52
11570	47.08	PK	V	3.34	50.42	74	-23.58
High Channel							
11650	47.66	PK	H	3.46	51.12	74	-22.88
11650	47.58	PK	V	3.46	51.04	74	-22.96

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax40							
Low Channel							
11510	47.27	PK	H	3.63	50.9	74	-23.1
11510	47.77	PK	V	3.63	51.4	74	-22.6
High Channel							
11590	47.48	PK	V	3.24	50.72	74	-23.28
11590	46.33	PK	V	3.24	49.57	74	-24.43
802.11ax80							
Middle Channel							
11550	47.95	PK	H	3.44	51.39	74	-22.61
11550	47.95	PK	V	3.44	51.39	74	-22.61

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.

For module YL43456**5150-5250 MHz**

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10360	46.87	PK	H	2.48	49.35	68.2	-18.85
10360	45.57	PK	V	2.48	48.05	68.2	-20.15
Middle Channel							
10400	45.63	PK	H	2.47	48.1	68.2	-20.1
10400	47.46	PK	V	2.47	49.93	68.2	-18.27
High Channel							
10480	46.53	PK	H	2.19	48.72	68.2	-19.48
10480	46.73	PK	V	2.19	48.92	68.2	-19.28
802.11ac20							
Low Channel							
10360	46.02	PK	H	2.48	48.5	68.2	-19.7
10360	46.58	PK	V	2.48	49.06	68.2	-19.14
Middle Channel							
10400	45.79	PK	H	2.47	48.26	68.2	-19.94
10400	45.68	PK	V	2.47	48.15	68.2	-20.05
High Channel							
10480	46.87	PK	H	2.19	49.06	68.2	-19.14
10480	46.78	PK	V	2.19	48.97	68.2	-19.23
802.11ac40							
Low Channel							
10380	46.07	PK	H	2.48	48.55	68.2	-19.65
10380	46.69	PK	V	2.48	49.17	68.2	-19.03
High Channel							
10460	46.54	PK	H	2.26	48.8	68.2	-19.4
10460	47.42	PK	V	2.26	49.68	68.2	-18.52
802.11ac80							
Middle Channel							
10420	45.7	PK	H	2.4	48.1	68.2	-20.1
10420	46.44	PK	V	2.4	48.84	68.2	-19.36

5250-5350MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10520	49.62	PK	H	2.13	51.75	68.2	-16.45
10520	46.49	PK	V	2.13	48.62	68.2	-19.58
Middle Channel							
10560	48.45	PK	H	2.17	50.62	68.2	-17.58
10560	47.91	PK	V	2.17	50.08	68.2	-18.12
High Channel							
10640	48.88	PK	H	2.57	51.45	74	-22.55
10640	48.52	PK	V	2.57	51.09	74	-22.91
802.11ac20							
Low Channel							
10520	47.2	PK	H	2.13	49.33	68.2	-18.87
10520	47.41	PK	V	2.13	49.54	68.2	-18.66
Middle Channel							
10560	47.35	PK	H	2.17	49.52	68.2	-18.68
10560	47.72	PK	V	2.17	49.89	68.2	-18.31
High Channel							
10640	48.58	PK	H	2.57	51.15	74	-22.85
10640	48.19	PK	V	2.57	50.76	74	-23.24
802.11ac40							
Low Channel							
10540	47.25	PK	H	2.15	49.4	68.2	-18.8
10540	48.42	PK	V	2.15	50.57	68.2	-17.63
High Channel							
10620	47.75	PK	H	2.39	50.14	74	-23.86
10620	49.37	PK	V	2.39	51.76	74	-22.24
802.11ac80							
Middle Channel							
10580	48.57	PK	H	2.18	50.75	68.2	-17.45
10580	48.37	PK	V	2.18	50.55	68.2	-17.65

5470-5725MHz

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11a							
Low Channel							
11000	45.05	PK	H	4.26	49.31	74	-24.69
11000	45.15	PK	V	4.26	49.41	74	-24.59
Middle Channel							
11160	46.46	PK	H	3.51	49.97	74	-24.03
11160	49.25	PK	V	3.51	52.76	74	-21.24
High Channel							
11400	50.69	PK	H	3.31	54	74	-20
11400	47.32	PK	V	3.31	50.63	74	-23.37
Cross Channel							
11440	46.08	PK	H	3.46	49.54	74	-24.46
11440	47.72	PK	V	3.46	51.18	74	-22.82
802.11ac20							
Low Channel							
11000	44.23	PK	H	4.26	48.49	74	-25.51
11000	44.62	PK	V	4.26	48.88	74	-25.12
Middle Channel							
11160	46.18	PK	H	3.51	49.69	74	-24.31
11160	47.82	PK	V	3.51	51.33	74	-22.67
High Channel							
11400	47.25	PK	H	3.31	50.56	74	-23.44
11400	46.96	PK	V	3.31	50.27	74	-23.73
Cross Channel							
11440	45.52	PK	H	3.46	48.98	74	-25.02
11440	46.95	PK	V	3.46	50.41	74	-23.59

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac40							
Low Channel							
11020	44.56	PK	H	4.08	48.64	74	-25.36
11020	46.4	PK	V	4.08	50.48	74	-23.52
Middle Channel							
11100	47.32	PK	H	3.36	50.68	74	-23.32
11100	48.62	PK	V	3.36	51.98	74	-22.02
High Channel							
11340	48.05	PK	H	3.47	51.52	74	-22.48
11340	47.83	PK	V	3.47	51.3	74	-22.7
Cross Channel							
11420	46.22	PK	H	3.39	49.61	74	-24.39
11420	47.08	PK	V	3.39	50.47	74	-23.53
802.11ac80							
Low Channel							
11060	45.41	PK	H	3.72	49.13	74	-24.87
11060	45.12	PK	V	3.72	48.84	74	-25.16
Cross Channel							
11380	46.31	PK	H	3.36	49.67	74	-24.33
11380	46.88	PK	V	3.36	50.24	74	-23.76

5725-5850MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
11490	47.89	PK	H	3.64	51.53	74	-22.47
11490	48.92	PK	V	3.64	52.56	74	-21.44
Middle Channel							
11570	49.21	PK	H	3.34	52.55	74	-21.45
11570	47.57	PK	V	3.34	50.91	74	-23.09
High Channel							
11650	48.37	PK	H	3.46	51.83	74	-22.17
11650	47.4	PK	V	3.46	50.86	74	-23.14
802.11ac20							
Low Channel							
11490	48.01	PK	H	3.64	51.65	74	-22.35
11490	49.2	PK	V	3.64	52.84	74	-21.16
Middle Channel							
11570	48.03	PK	H	3.34	51.37	74	-22.63
11570	48.85	PK	V	3.34	52.19	74	-21.81
High Channel							
11650	47.7	PK	H	3.46	51.16	74	-22.84
11650	47.97	PK	V	3.46	51.43	74	-22.57
802.11ac40							
Low Channel							
11510	47.46	PK	H	3.63	51.09	74	-22.91
11510	49.96	PK	V	3.63	53.59	74	-20.41
High Channel							
11590	47.51	PK	H	3.24	50.75	74	-23.25
11590	48.53	PK	V	3.24	51.77	74	-22.23
802.11ac80							
Middle Channel							
11550	47.97	PK	H	3.44	51.41	74	-22.59
11550	46.69	PK	V	3.44	50.13	74	-23.87

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.

Test plots:
For module YL43752
Band Edge
5150-5250MHz:


Left Band edge_Horizontal_Peak_802.11a_5180MHz_ant0

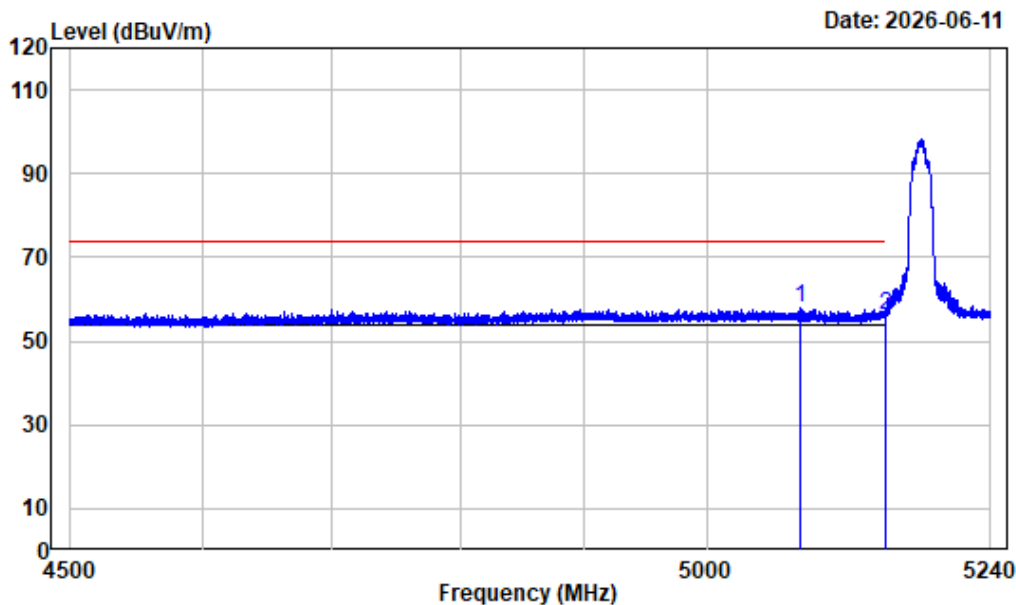

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5077.663	-7.39	65.40	58.01	74.00	-15.99 Peak
2	5150.000	-7.45	63.78	56.33	74.00	-17.67 Peak


Left Band edge_Horizontal_Average_802.11a_5180MHz_ant0

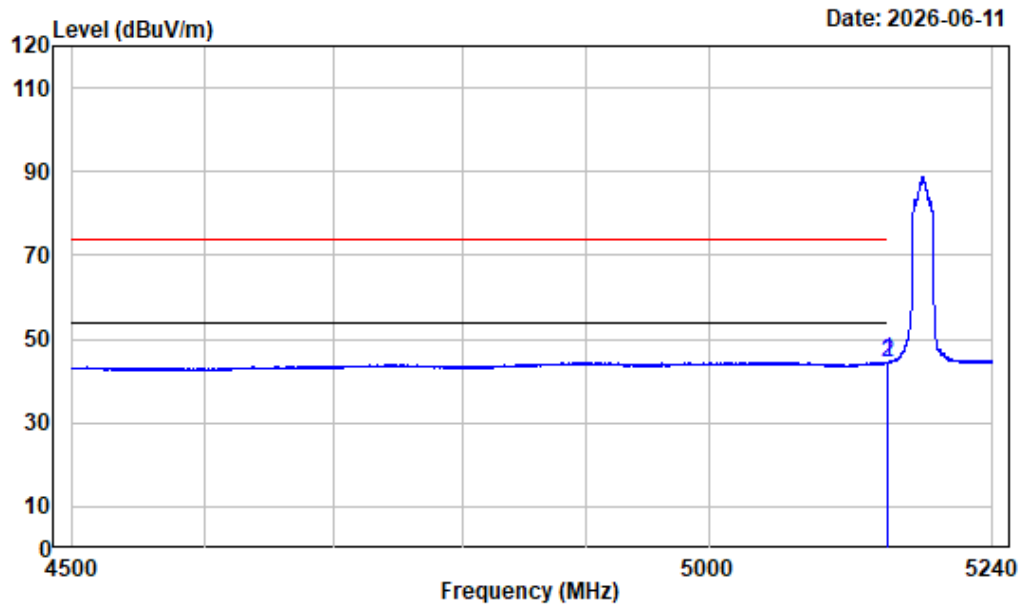

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.998	-7.45	52.10	44.65	54.00	-9.35	Average
2 5150.000	-7.45	52.05	44.60	54.00	-9.40	Average


Left Band edge_Vertical_Peak_802.11a_5180MHz_ant0

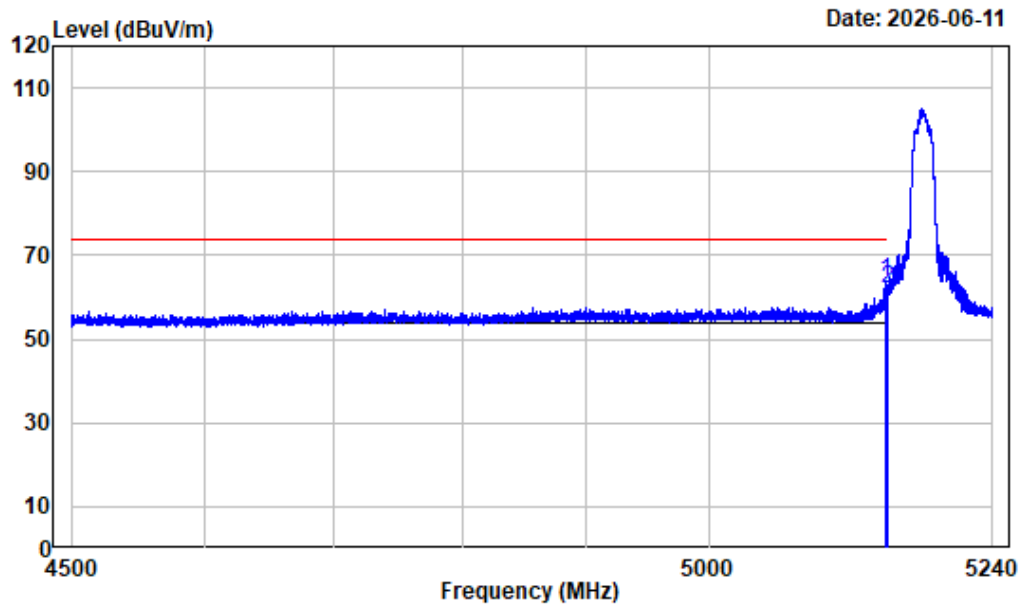

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.425	-7.45	71.14	63.69	74.00	-10.31 Peak
2	5150.000	-7.45	69.37	61.92	74.00	-12.08 Peak


Left Band edge_Vertical_Average_802.11a_5180MHz_ant0

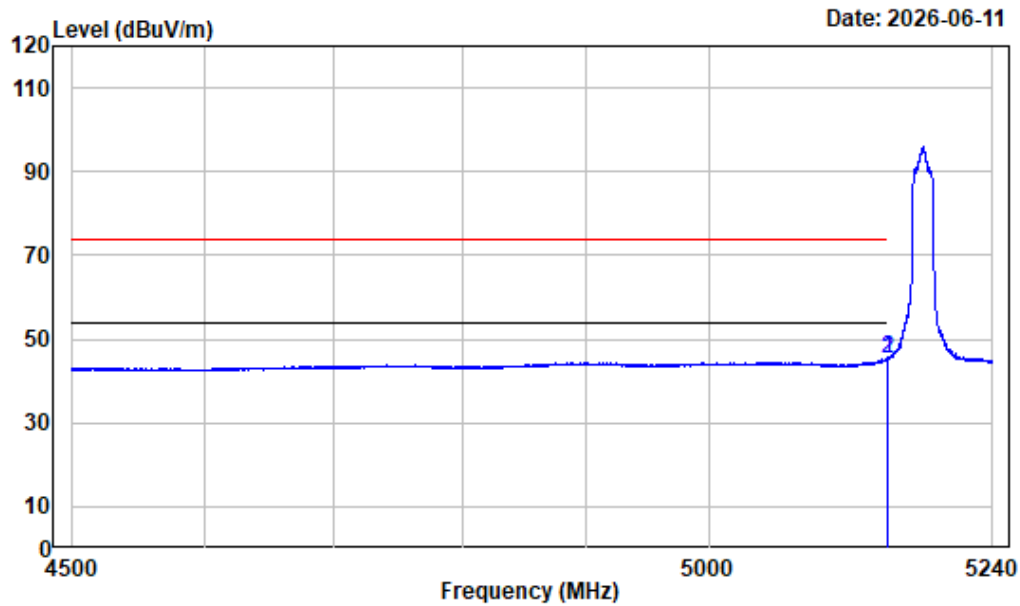

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5180

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.813	-7.45	52.93	45.48	54.00	-8.52 Average
2	5150.000	-7.45	52.77	45.32	54.00	-8.68 Average


Right Band edge_Horizontal_Peak_802.11a_5240MHz_ant0

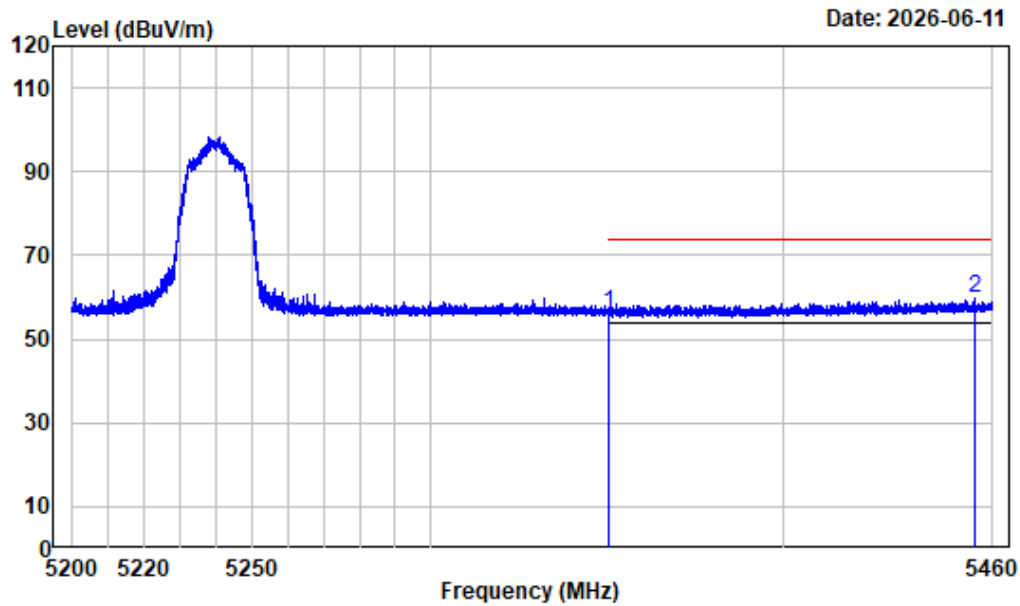

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	62.97	56.21	74.00	-17.79	Peak
2 5455.092	-6.29	65.86	59.57	74.00	-14.43	Peak


Right Band edge_Horizontal_Average_802.11a_5240MHz_ant0

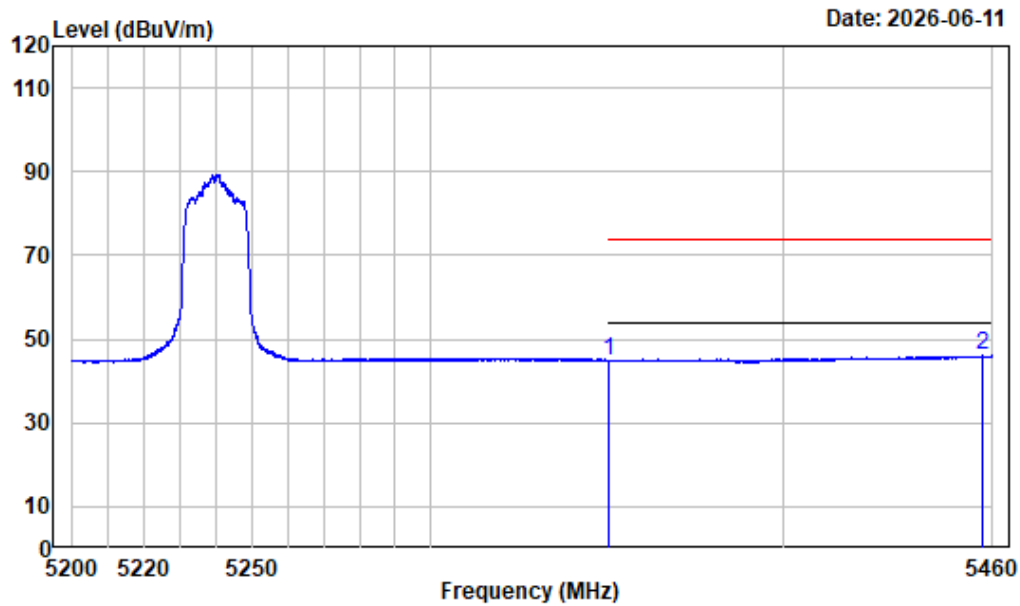

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.58	44.82	54.00	-9.18 Average
2	5457.140	-6.28	52.34	46.06	54.00	-7.94 Average


Right Band edge_Vertical_Peak_802.11a_5240MHz_ant0

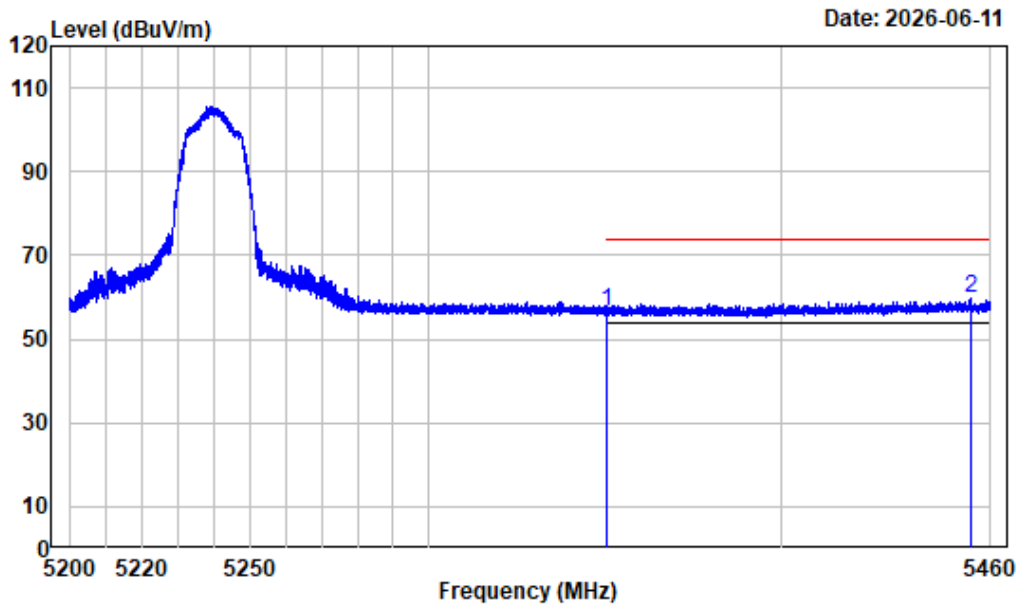

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.38	56.62	74.00	-17.38 Peak
2	5454.605	-6.29	66.03	59.74	74.00	-14.26 Peak


Right Band edge_Vertical_Average_802.11a_5240MHz_ant0

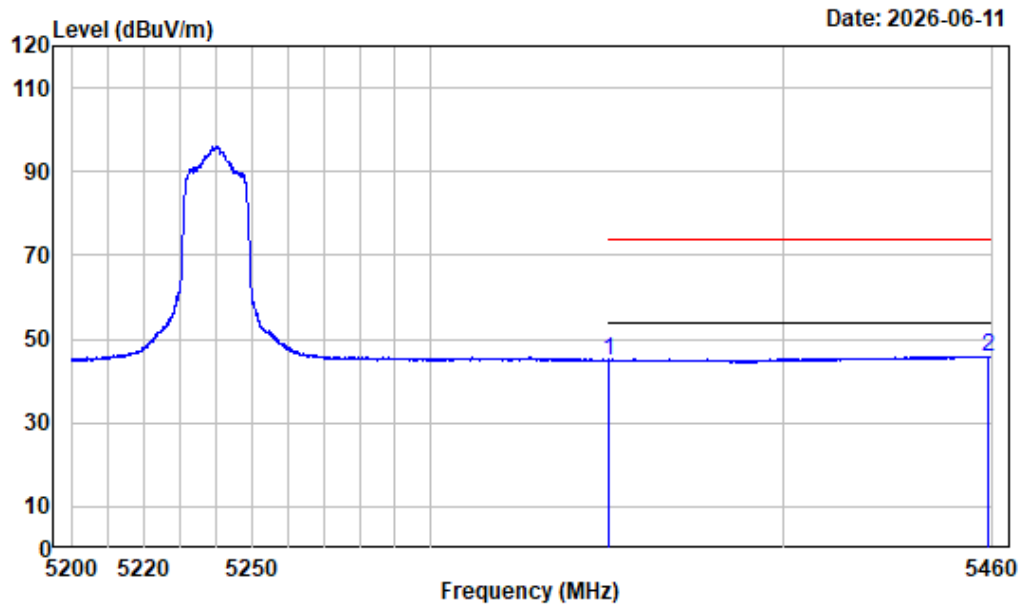

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	5350.000	-6.76	51.75	44.99	54.00	-9.01 Average
2	5458.538	-6.28	52.21	45.93	54.00	-8.07 Average


Left Band edge_Horizontal_Peak_802.11ac-VHT20_5180MHz_ant0

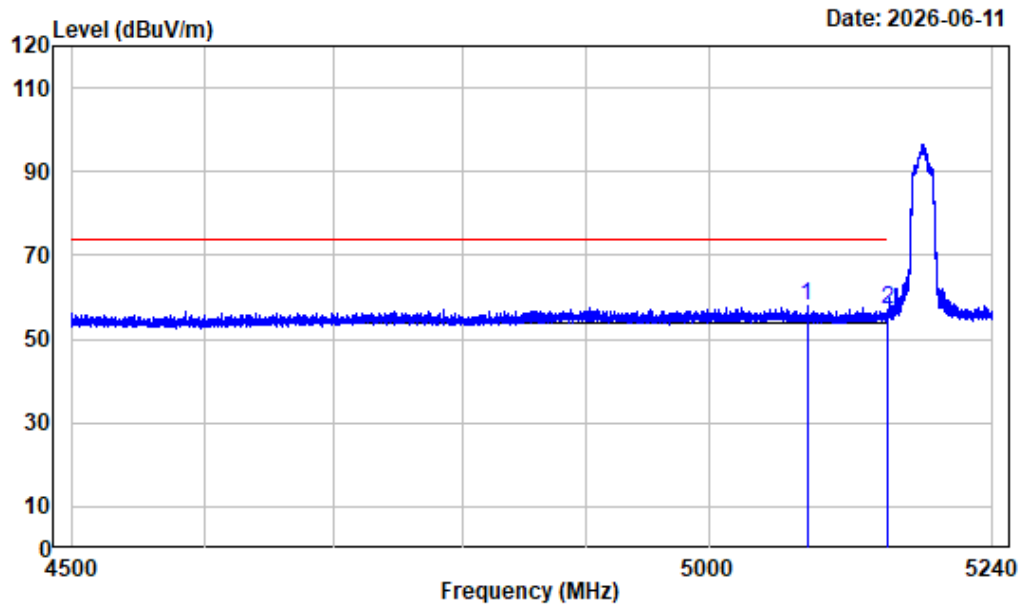

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT0-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5081.825	-7.41	65.16	57.75	74.00	-16.25 Peak
2	5150.000	-7.45	64.54	57.09	74.00	-16.91 Peak


Left Band edge_Horizontal_Average_802.11ac-VHT20_5180MHz_ant0

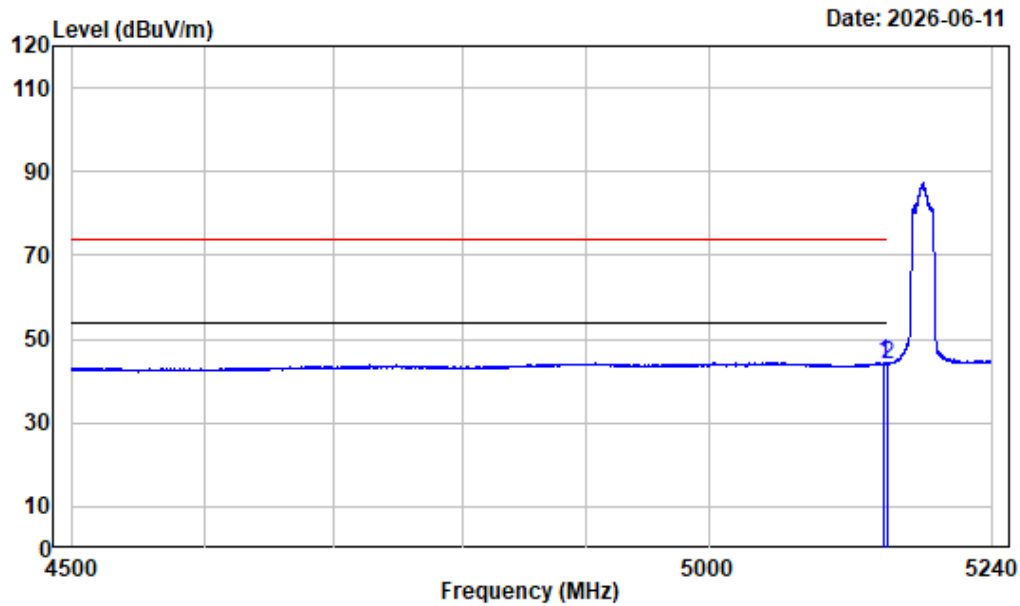

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT0-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	5146.667	-7.45	51.86	44.41	54.00	-9.59 Average
2	5150.000	-7.45	51.59	44.14	54.00	-9.86 Average


Left Band edge_Vertical_Peak_802.11ac-VHT20_5180MHz_ant0

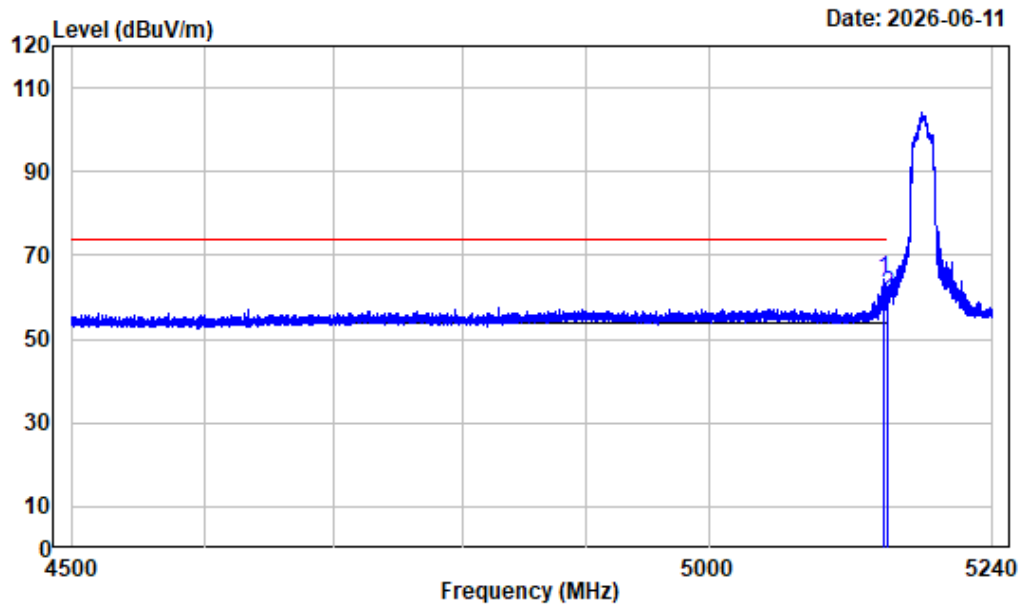

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT0-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5146.205	-7.45	71.85	64.40	74.00	-9.60	Peak
2 5150.000	-7.45	68.25	60.80	74.00	-13.20	Peak


Left Band edge_Vertical_Average_802.11ac-VHT20_5180MHz_ant0

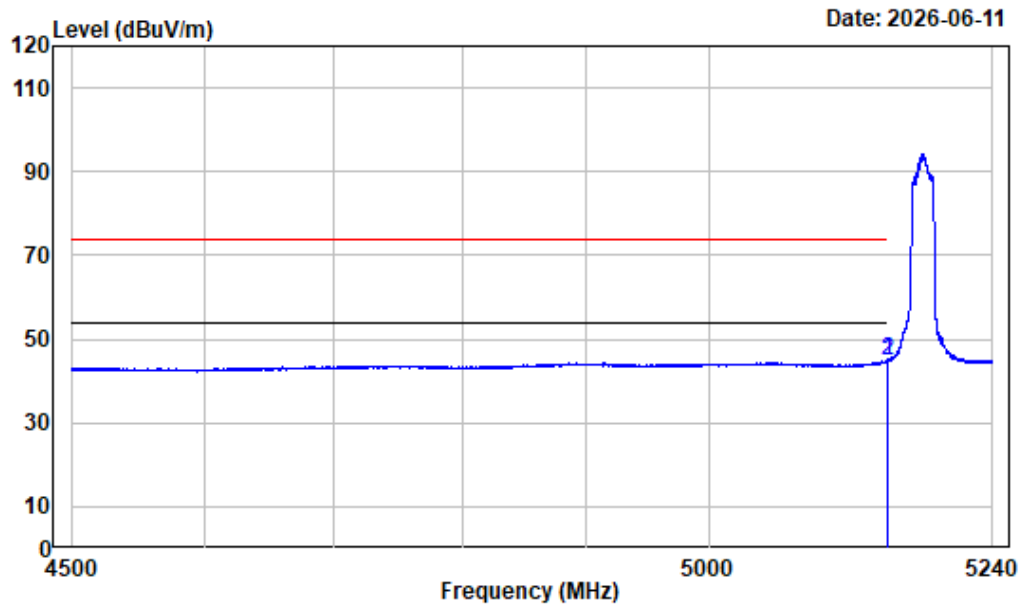

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT0-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	5149.535	-7.45	52.37	44.92	54.00	-9.08 Average
2	5150.000	-7.45	52.17	44.72	54.00	-9.28 Average


Right Band edge_Horizontal_Peak_802.11ac-VHT20_5240MHz_ant0

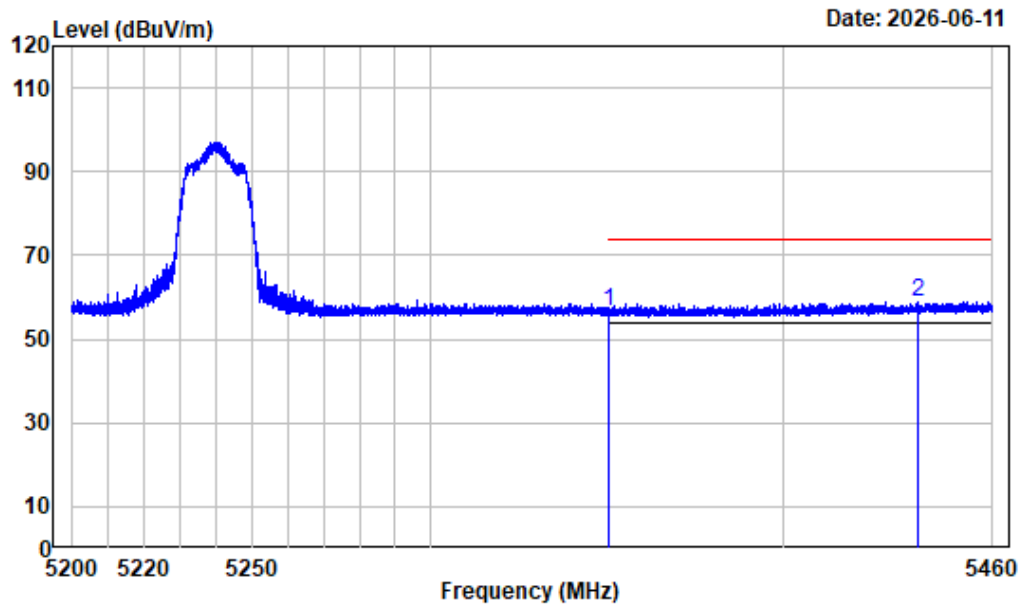

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.29	56.53	74.00	-17.47 Peak
2	5438.583	-6.37	65.46	59.09	74.00	-14.91 Peak


Right Band edge_Horizontal_Average_802.11ac-VHT20_5240MHz_ant0

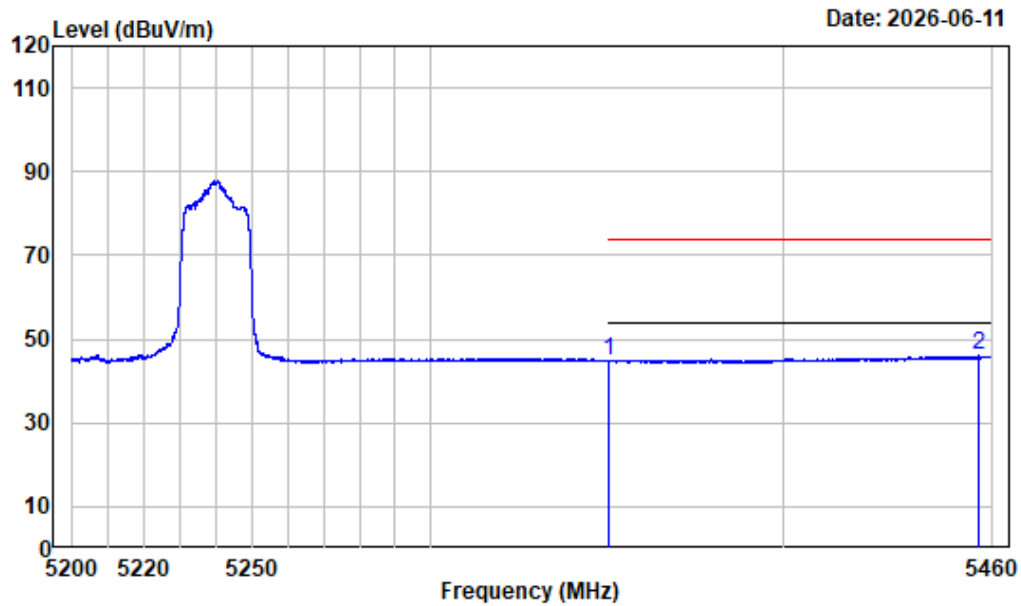

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.67	44.91	54.00	-9.09 Average
2	5456.067	-6.28	52.26	45.98	54.00	-8.02 Average


Right Band edge_Vertical_Peak_802.11ac-VHT20_5240MHz_ant0

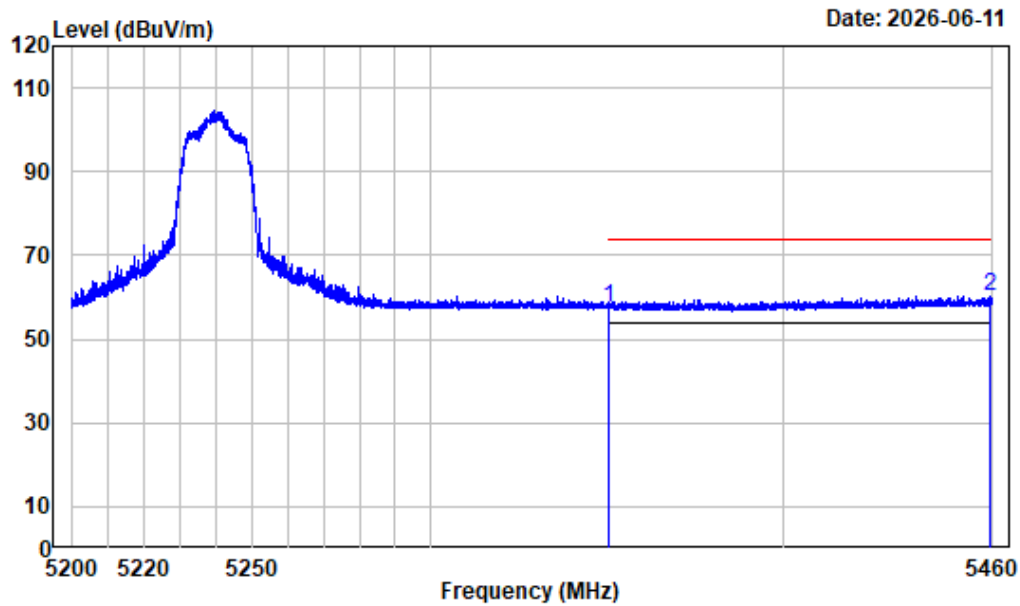

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	64.37	57.61	74.00	-16.39 Peak
2	5459.188	-6.26	66.47	60.21	74.00	-13.79 Peak


Right Band edge_Vertical_Average_802.11ac-VHT20_5240MHz_ant0

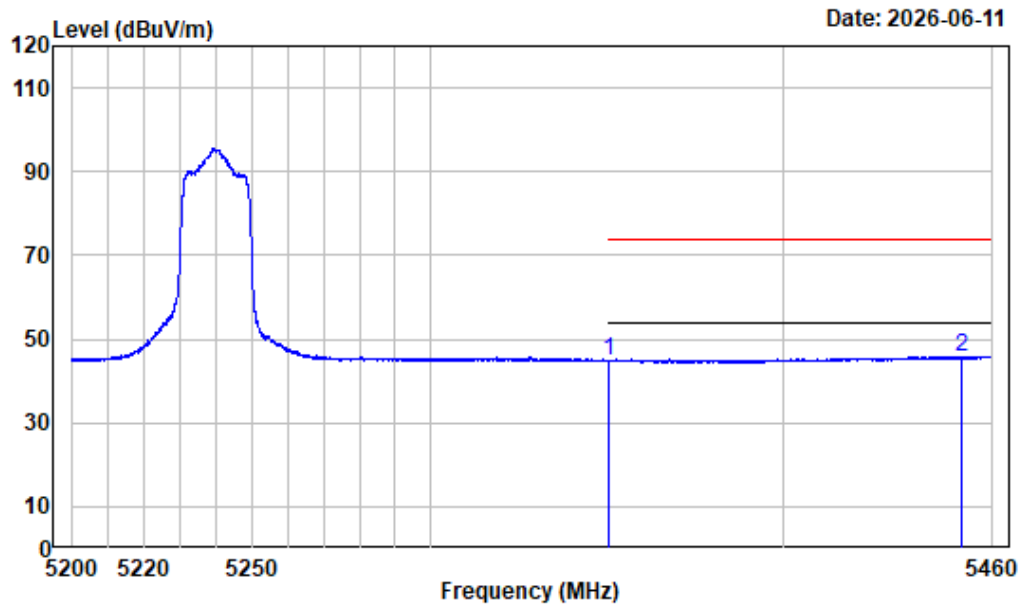

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.62	44.86	54.00	-9.14 Average
2	5451.192	-6.31	52.21	45.90	54.00	-8.10 Average


Left Band edge_Horizontal_Peak_802.11ac-VHT40_5190MHz_ant0

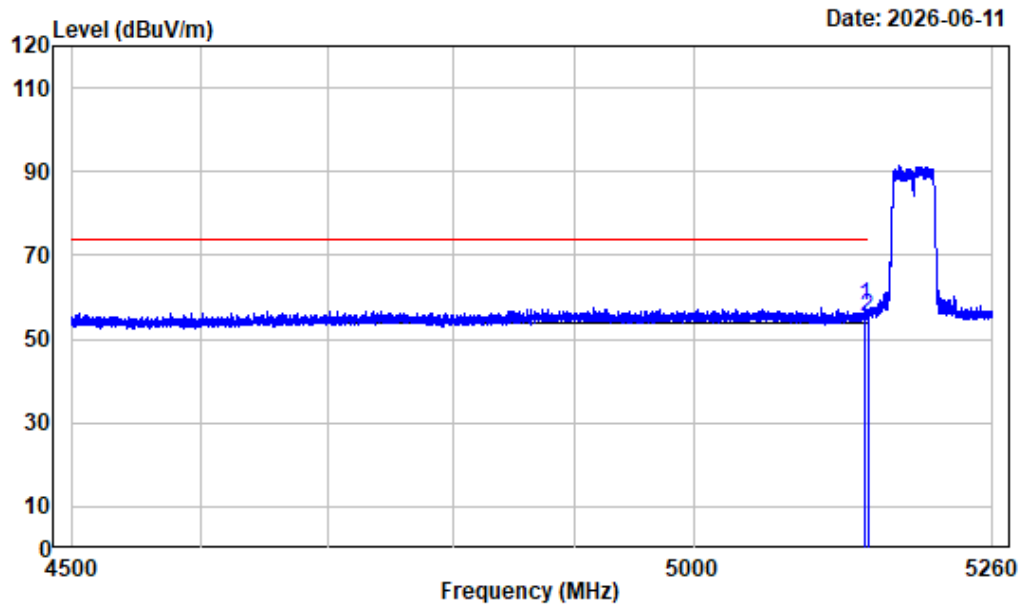

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT0-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5147.045	-7.45	65.42	57.97	74.00	-16.03	Peak
2 5150.000	-7.45	62.52	55.07	74.00	-18.93	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT40_5190MHz_ant0

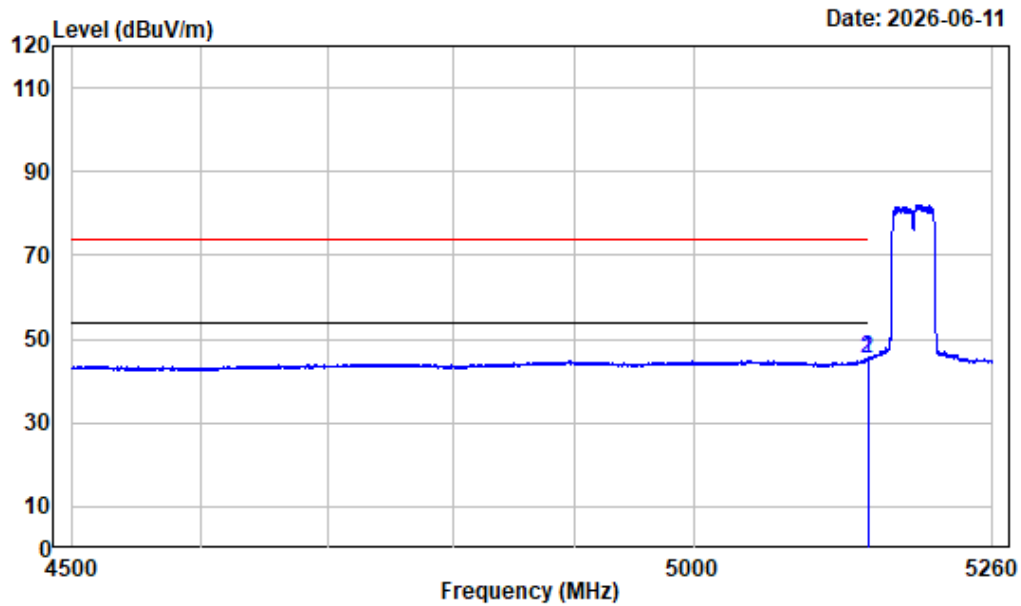

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT0-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.990	-7.45	52.90	45.45	54.00	-8.55 Average
2	5150.000	-7.45	52.84	45.39	54.00	-8.61 Average


Left Band edge_Vertical_Peak_802.11ac-VHT40_5190MHz_ant0

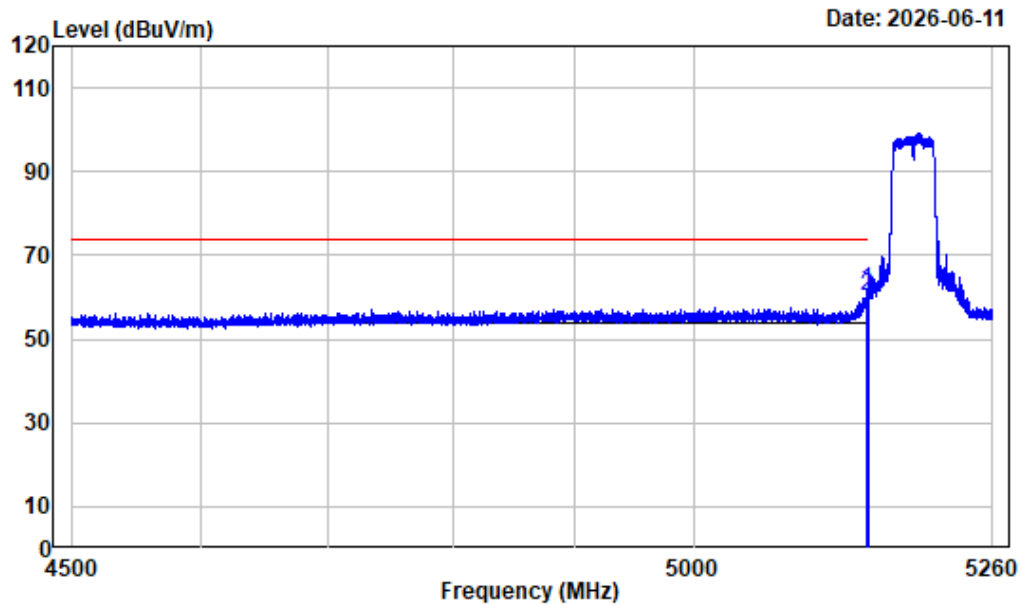

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT0-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.135	-7.45	69.10	61.65	74.00	-12.35	Peak
2 5150.000	-7.45	67.49	60.04	74.00	-13.96	Peak


Left Band edge_Vertical_Average_802.11ac-VHT40_5190MHz_ant0

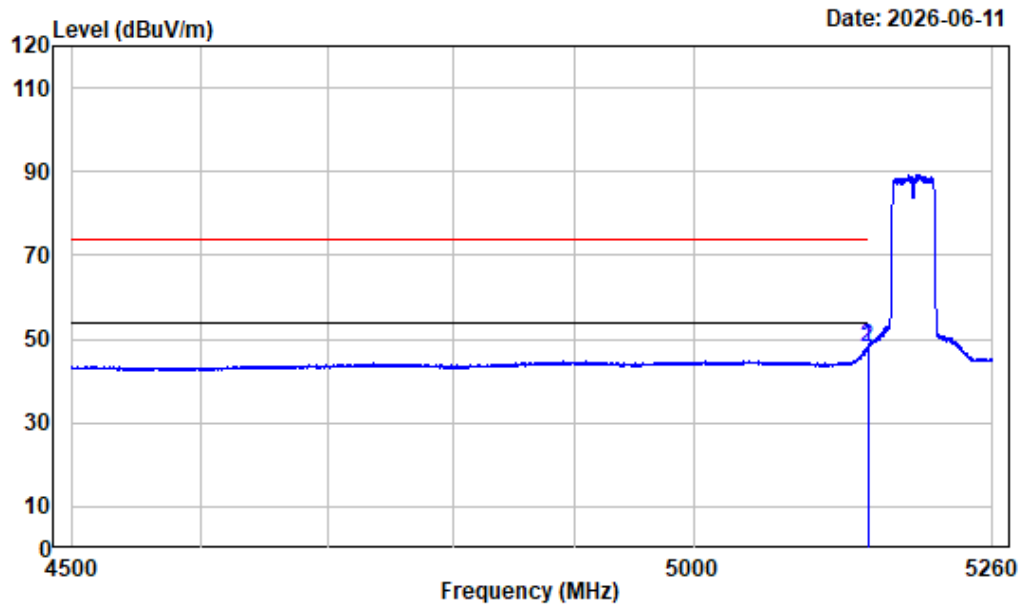

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT0-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.990	-7.45	55.52	48.07	54.00	-5.93	Average
2 5150.000	-7.45	55.47	48.02	54.00	-5.98	Average


Right Band edge_Horizontal_Peak_802.11ac-VHT40_5230MHz_ant0

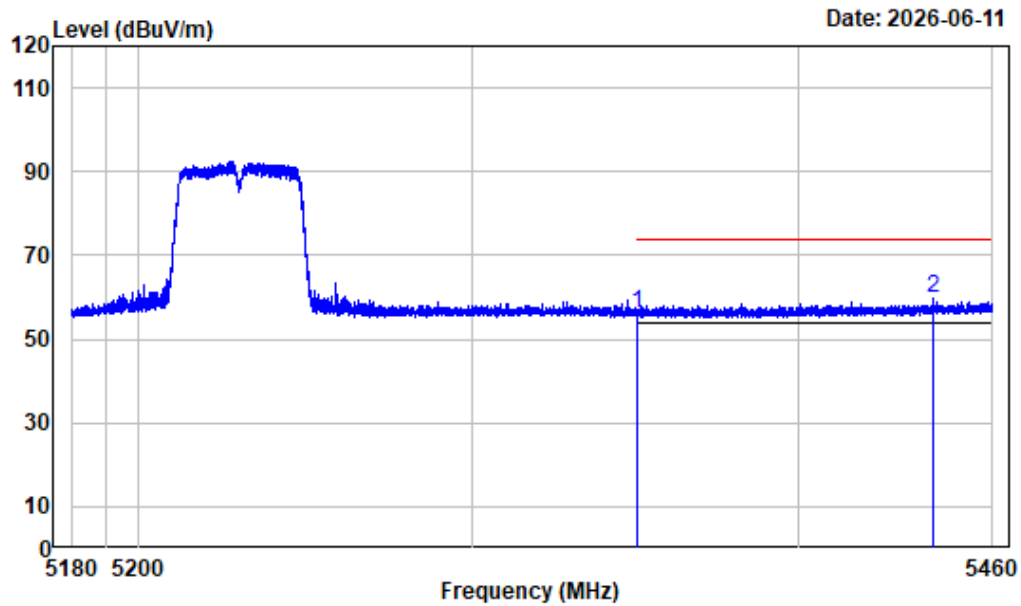

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT0-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.04	56.28	74.00	-17.72 Peak
2	5441.625	-6.36	66.05	59.69	74.00	-14.31 Peak


Right Band edge_Horizontal_Average_802.11ac-VHT40_5230MHz_ant0

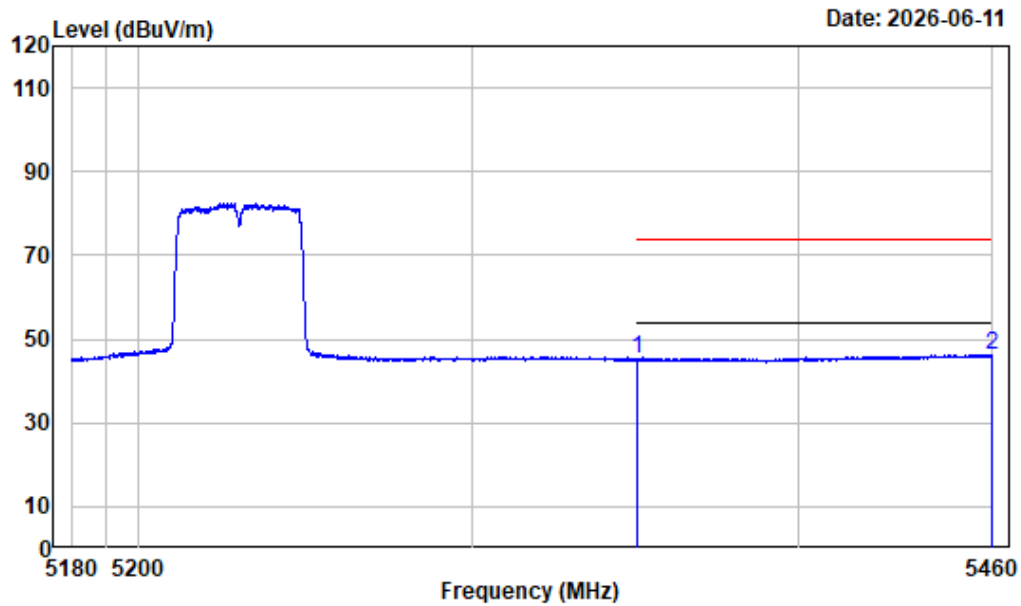

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT0-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	51.92	45.16	54.00	-8.84	Average
2 5459.755	-6.26	52.54	46.28	54.00	-7.72	Average


Right Band edge_Vertical_Peak_802.11ac-VHT40_5230MHz_ant0

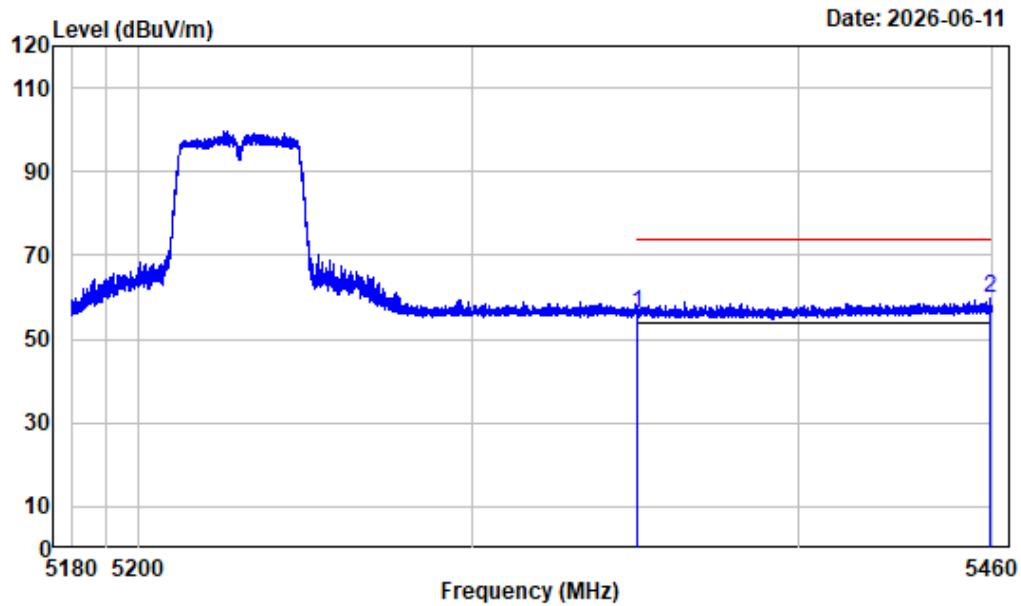

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT0-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	62.74	55.98	74.00	-18.02 Peak
2	5459.475	-6.26	65.85	59.59	74.00	-14.41 Peak


Right Band edge_Vertical_Average_802.11ac-VHT40_5230MHz_ant0

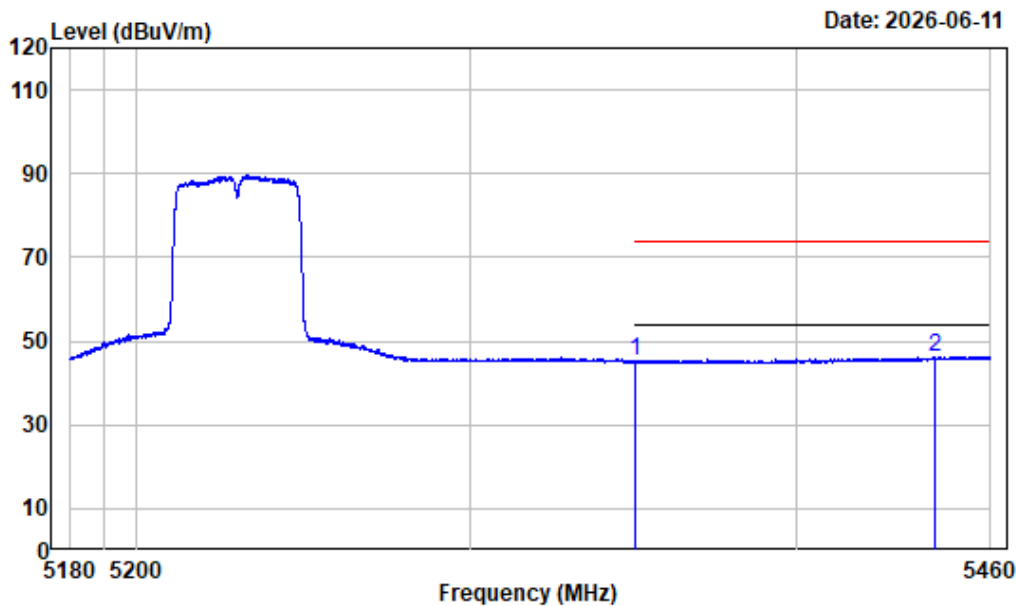

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT0-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.08	45.32	54.00	-8.68 Average
2	5442.465	-6.36	52.65	46.29	54.00	-7.71 Average


Left Band edge_Horizontal_Peak_802.11ac-VHT80_5210MHz_ant0

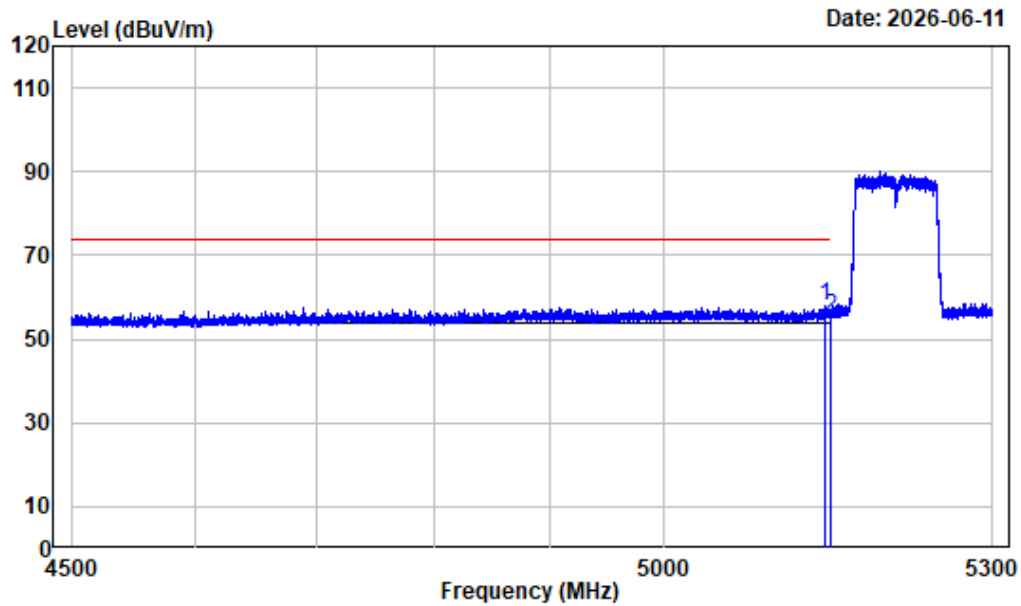

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT0-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5144.200	-7.46	65.42	57.96	74.00	-16.04	Peak
2 5150.000	-7.45	62.90	55.45	74.00	-18.55	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT80_5210MHz_ant0

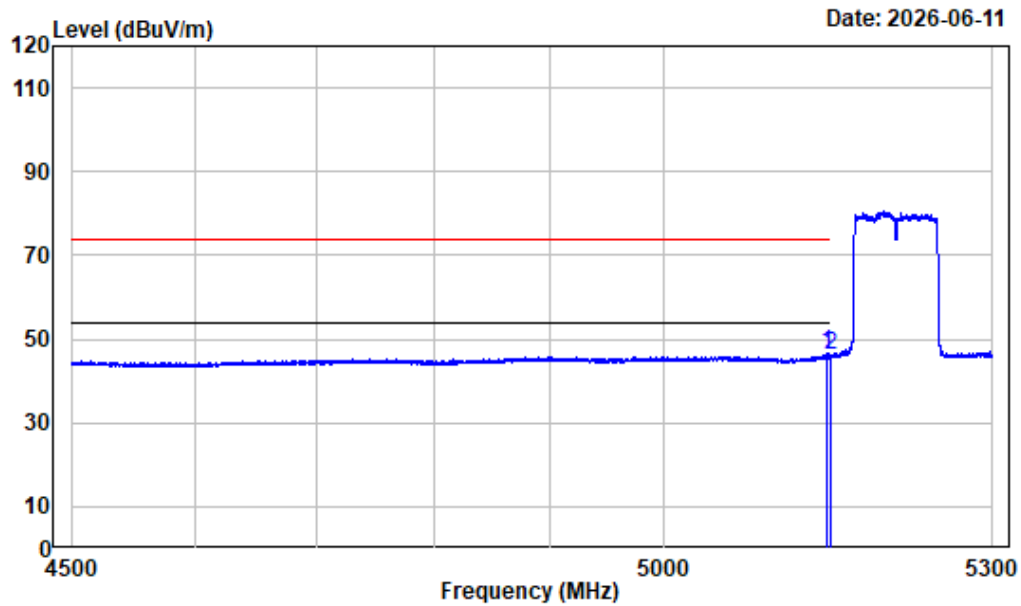

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT0-5210

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.800	-7.45	54.00	46.55	54.00	-7.45 Average
2	5150.000	-7.45	53.86	46.41	54.00	-7.59 Average


Left Band edge_Vertical_Peak_802.11ac-VHT80_5210MHz_ant0

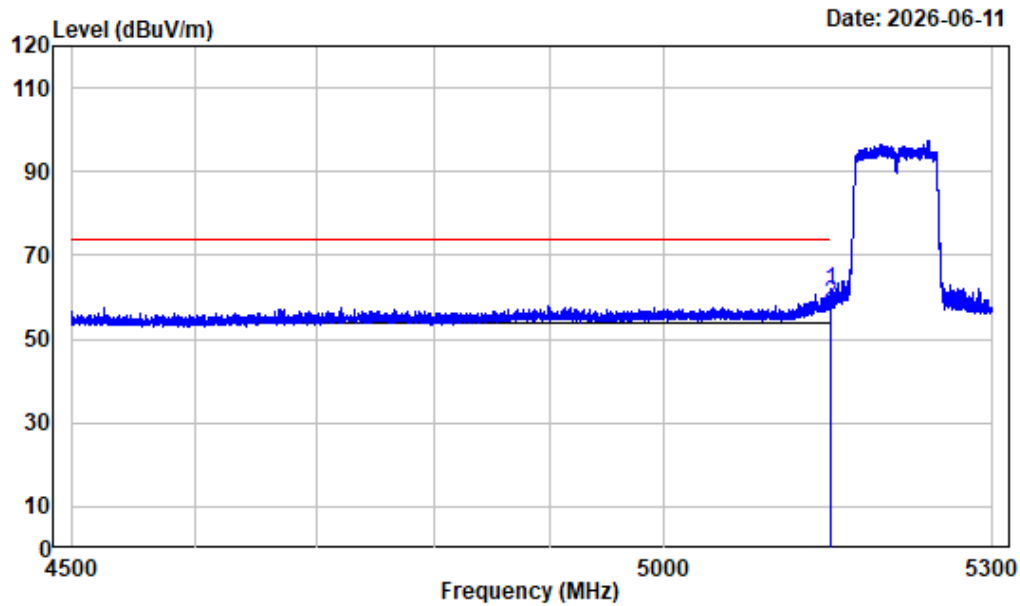

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT0-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.500	-7.45	69.06	61.61	74.00	-12.39	Peak
2 5150.000	-7.45	65.90	58.45	74.00	-15.55	Peak


Left Band edge_Vertical_Average_802.11ac_vht80 5210MHz_ant0

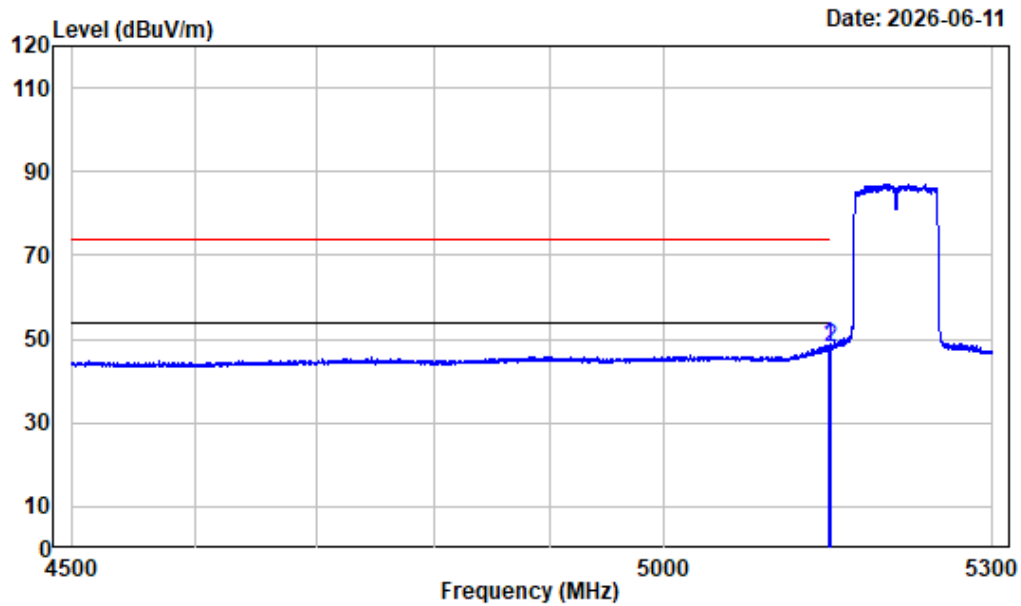

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT0-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5148.800	-7.45	56.08	48.63	54.00	-5.37 Average
2	5150.000	-7.45	55.39	47.94	54.00	-6.06 Average


Right Band edge_Horizontal_Peak_802.11ac-VHT80_5210MHz_ant0

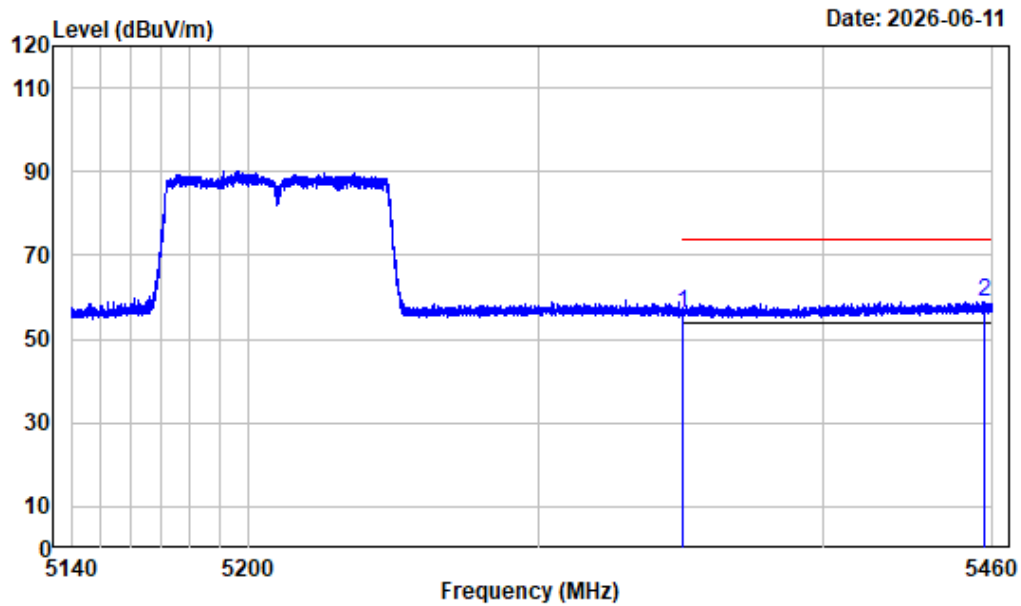

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT0-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.96	56.20	74.00	-17.80	Peak
2	5456.840	-6.28	65.27	58.99	74.00	-15.01	Peak


Right Band edge_Horizontal_Average_802.11ac-VHT80_5210MHz_ant0

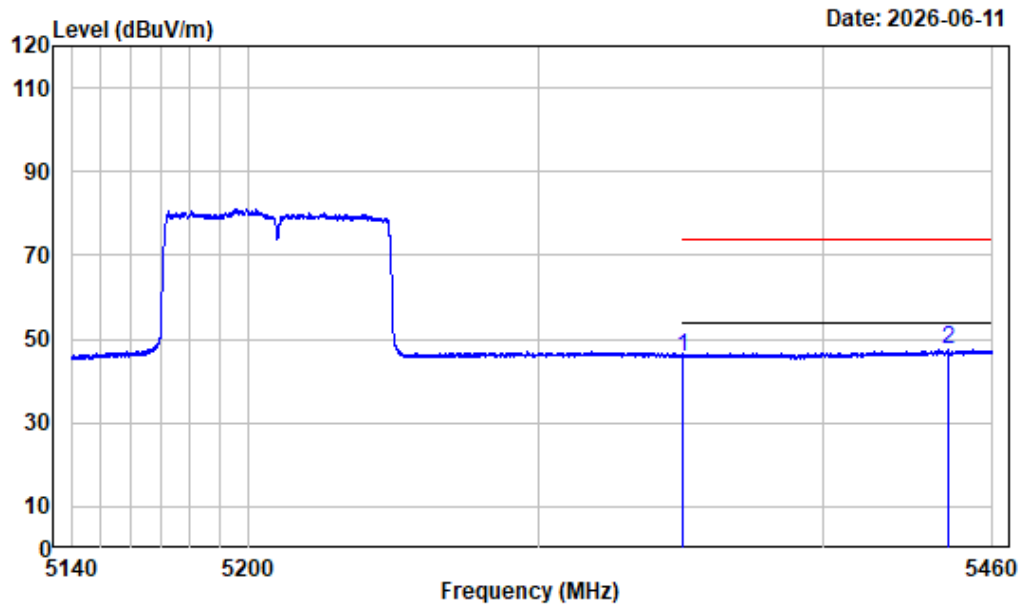

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT0-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.68	45.92	54.00	-8.08 Average
2	5444.200	-6.34	53.83	47.49	54.00	-6.51 Average


Right Band edge_Vertical_Peak_802.11ac-VHT80_5210MHz_ant0

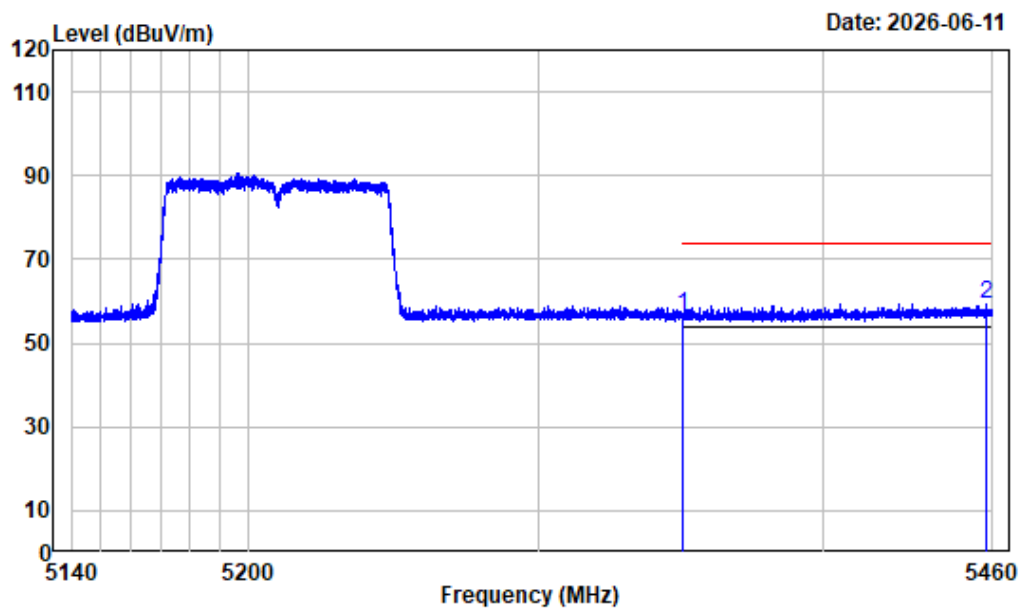

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT0-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5350.000	-6.76	63.31	56.55	74.00	-17.45 Peak
2 5457.560	-6.28	65.79	59.51	74.00	-14.49 Peak


Right Band edge_Vertical_Average_802.11ac-VHT80_5210MHz_ant0

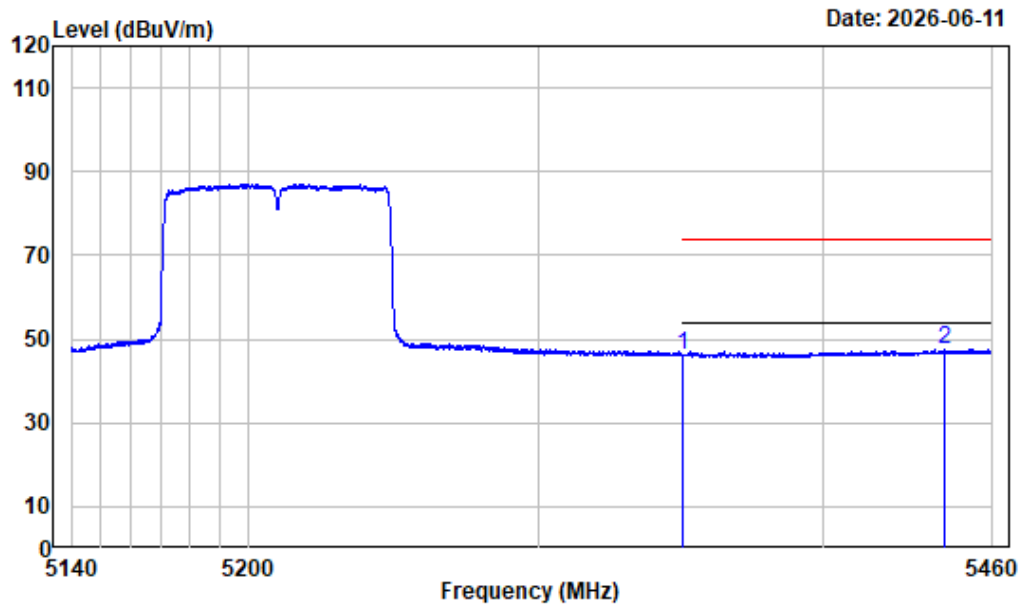

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT0-5210

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	52.96	46.20	54.00	-7.80	Average
2 5442.840	-6.35	53.84	47.49	54.00	-6.51	Average


Left Band edge_Horizontal_Peak_802.11ax20_5180MHz_ant0

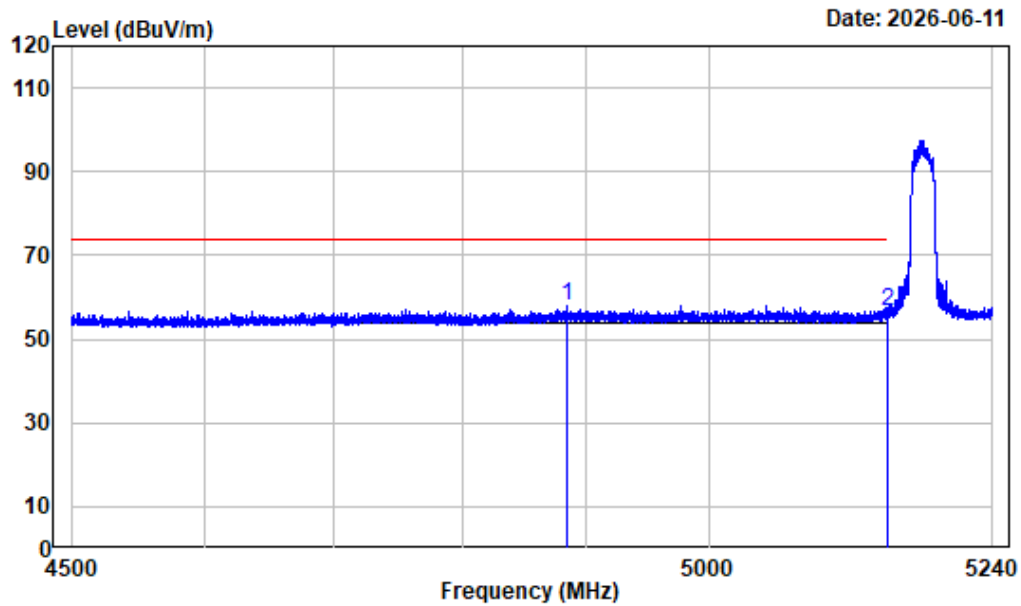

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT0-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4883.505	-7.65	65.57	57.92	74.00	-16.08	Peak
2 5150.000	-7.45	64.17	56.72	74.00	-17.28	Peak


Left Band edge_Horizontal_Average_802.11ax20_5180MHz_ant0

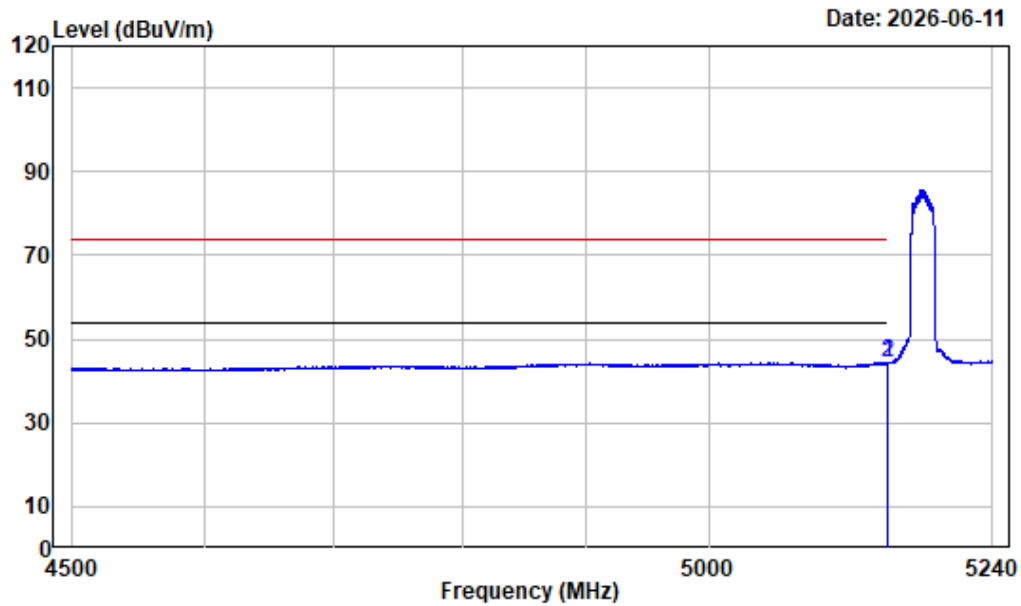

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT0-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.905	-7.45	51.95	44.50	54.00	-9.50 Average
2	5150.000	-7.45	51.86	44.41	54.00	-9.59 Average


Left Band edge_Vertical_Peak_802.11ax20_5180MHz_ant0

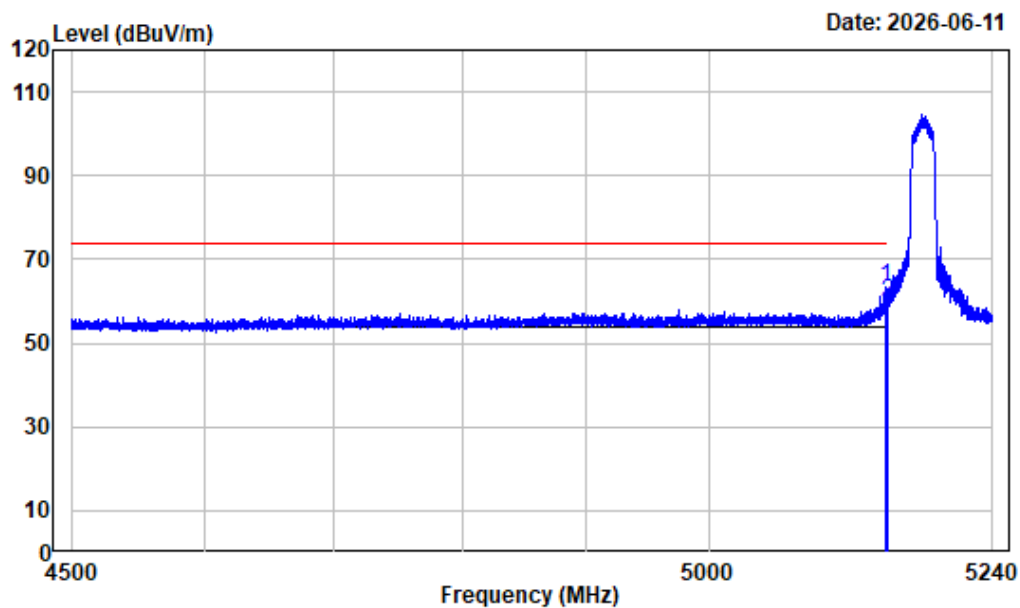

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT0-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.333	-7.45	70.84	63.39	74.00	-10.61 Peak
2	5150.000	-7.45	67.29	59.84	74.00	-14.16 Peak


Left Band edge_Vertical_Average_802.11ax20_5180MHz_ant0

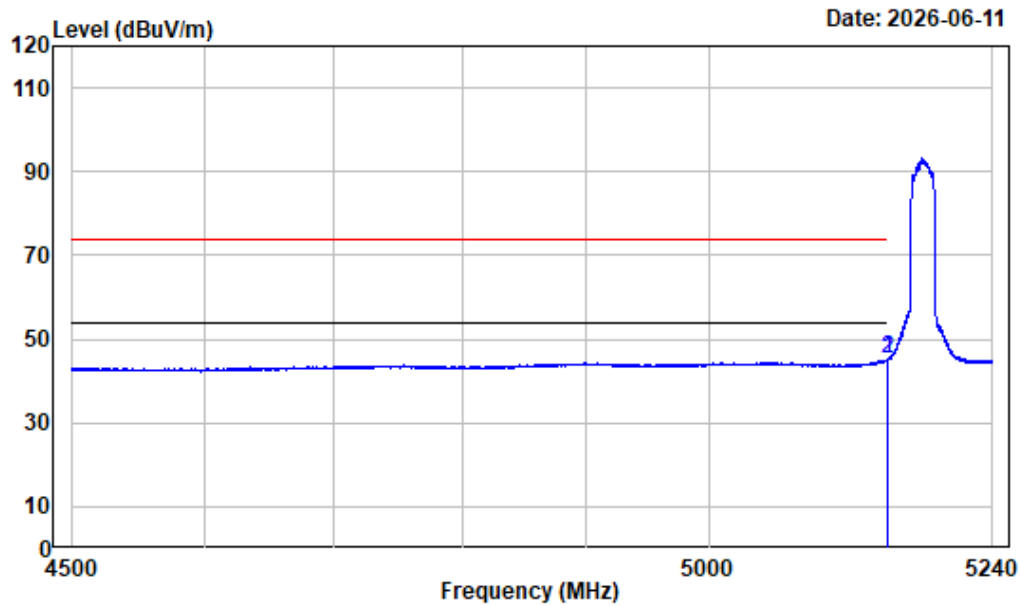

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT0-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.998	-7.45	52.81	45.36	54.00	-8.64	Average
2 5150.000	-7.45	52.76	45.31	54.00	-8.69	Average


Right Band edge_Horizontal_Peak_802.11ax20_5240MHz_ant0

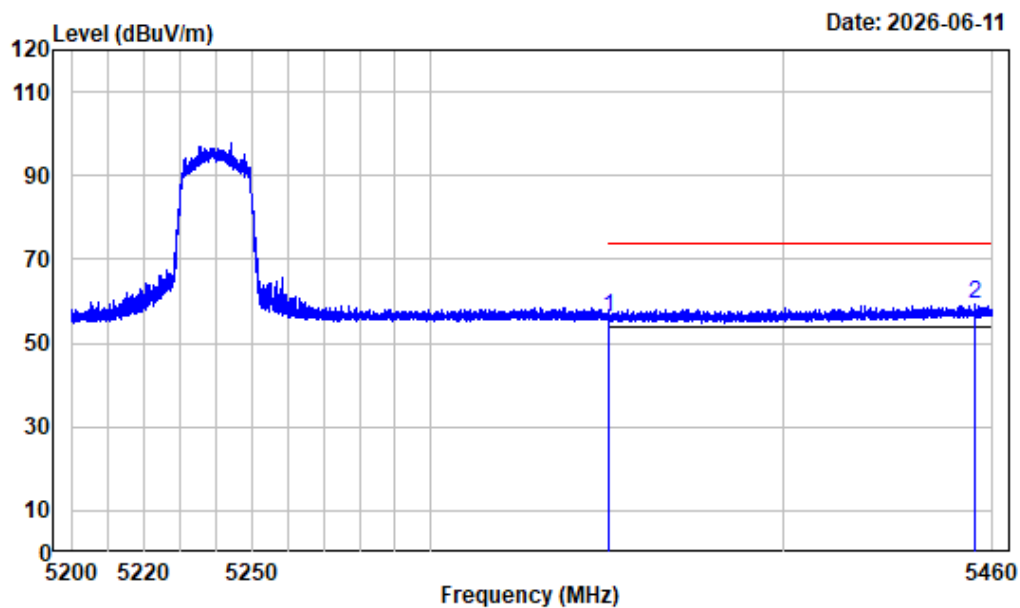

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	62.81	56.05	74.00	-17.95 Peak
2	5455.125	-6.29	65.76	59.47	74.00	-14.53 Peak


Right Band edge_Horizontal_Average_802.11ax20_5240MHz_ant0

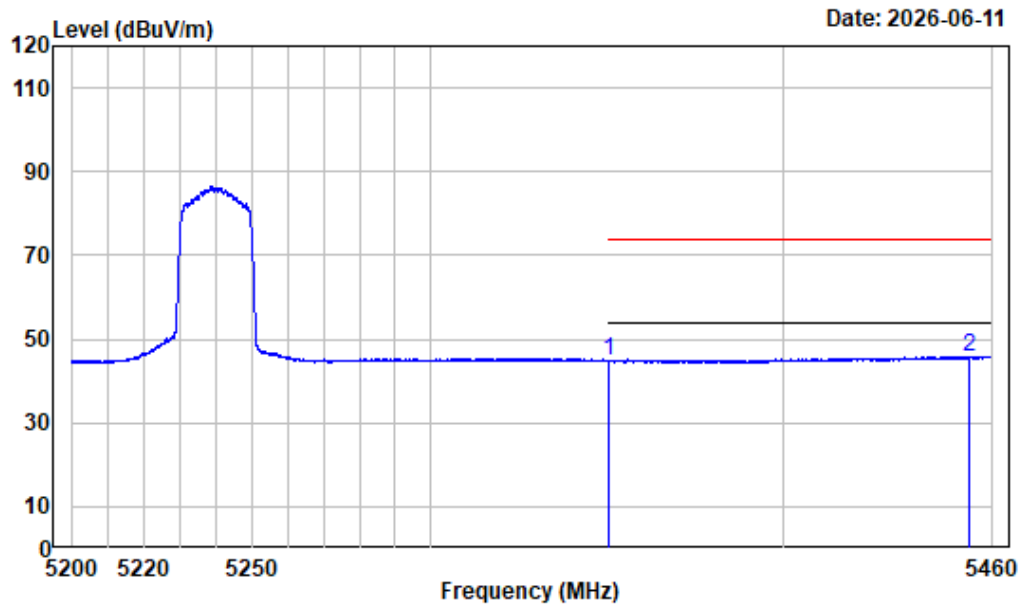

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT0-5240

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	51.52	44.76	54.00	-9.24	Average
2 5453.370	-6.29	52.14	45.85	54.00	-8.15	Average


Right Band edge_Vertical_Peak_802.11ax20_5240MHz_ant0

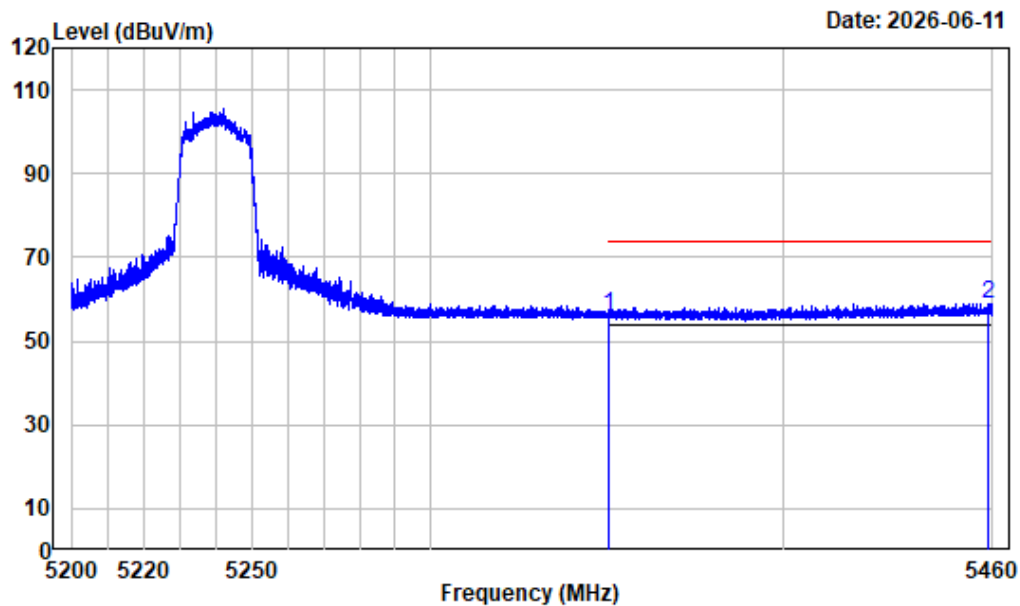

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	62.72	55.96	74.00	-18.04 Peak
2	5458.960	-6.26	65.33	59.07	74.00	-14.93 Peak


Right Band edge_Vertical_Average_802.11ax20_5240MHz_ant0

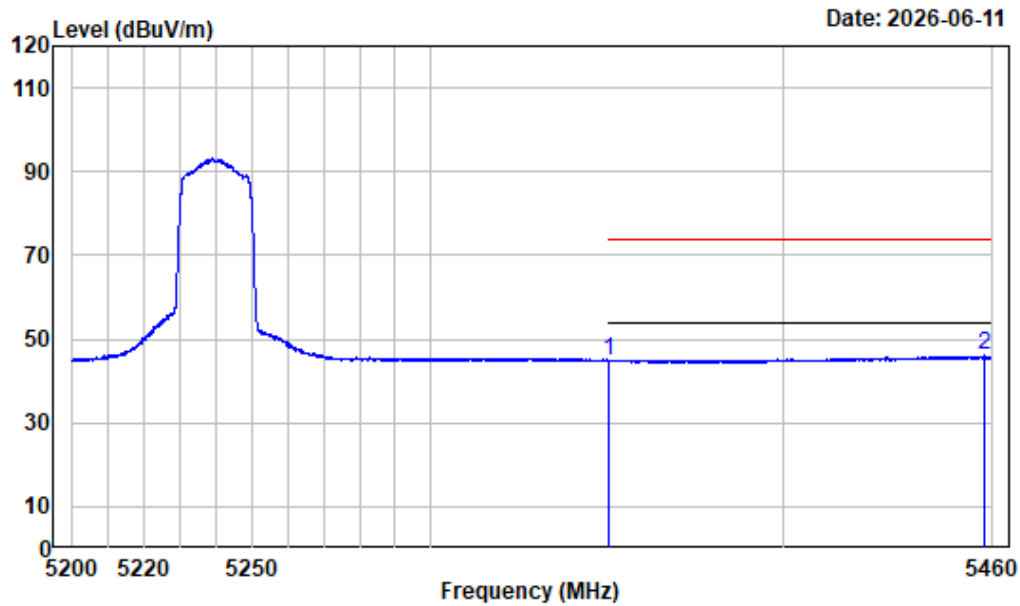

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT0-5240

Freq Factor		Read Level		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.69	44.93	54.00	-9.07 Average
2	5457.757	-6.28	52.27	45.99	54.00	-8.01 Average


Left Band edge_Horizontal_Peak_802.11ax40_5190MHz_ant0

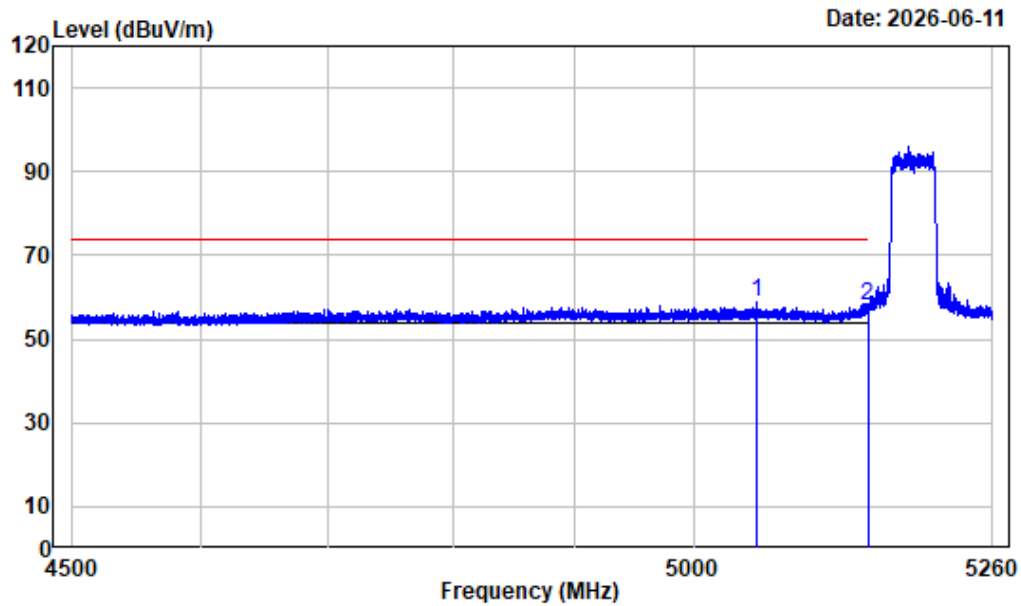

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT0-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5054.230	-7.31	66.11	58.80	74.00	-15.20	Peak
2 5150.000	-7.45	65.22	57.77	74.00	-16.23	Peak


Left Band edge_Horizontal_Average_802.11ax40_5190MHz_ant0

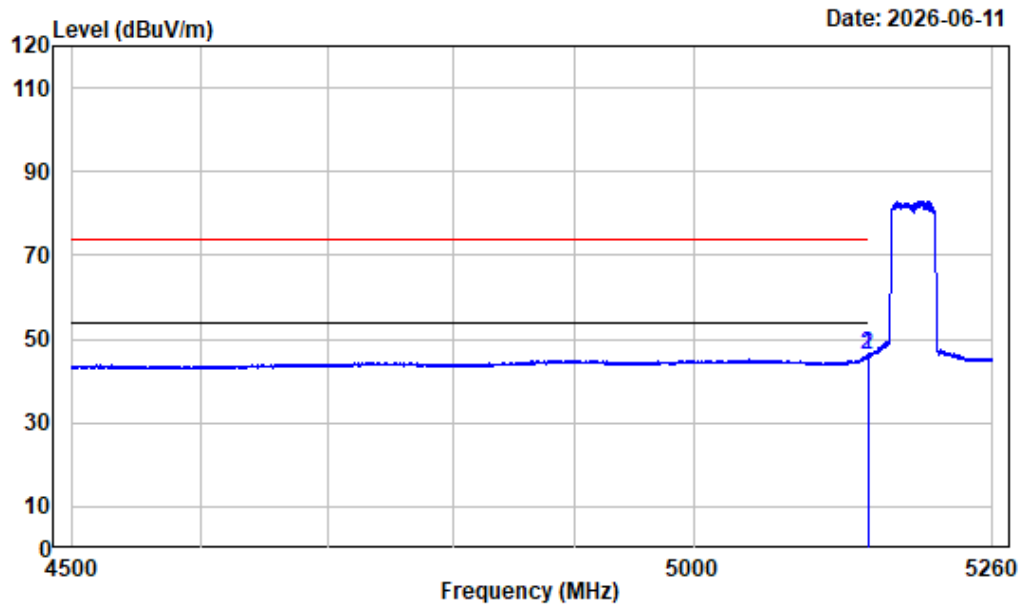

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT0-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.990	-7.45	53.60	46.15	54.00	-7.85	Average
2 5150.000	-7.45	53.55	46.10	54.00	-7.90	Average


Left Band edge_Vertical_Peak_802.11ax40_5190MHz_ant0

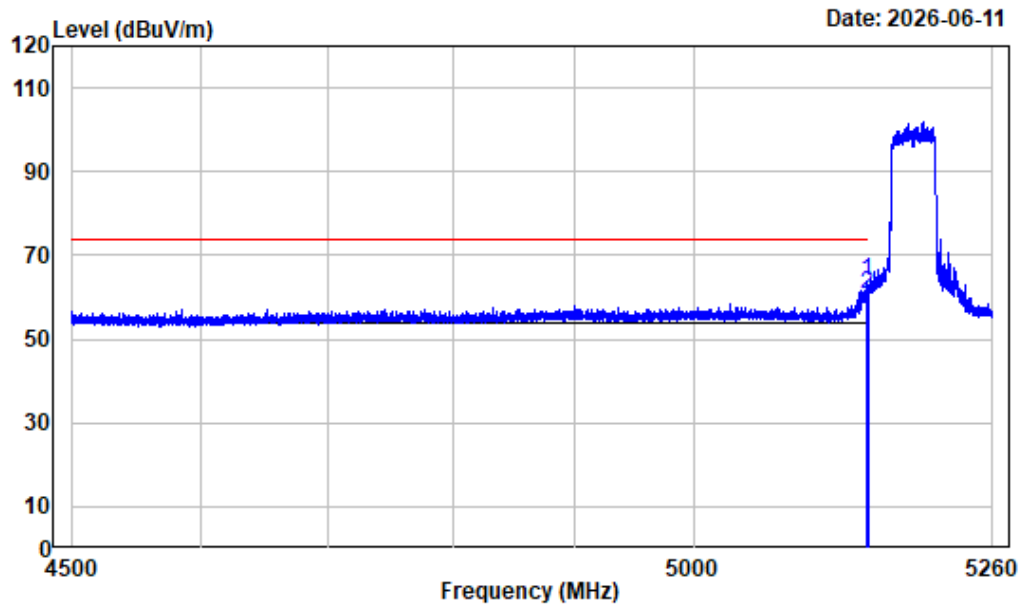

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT0-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5148.850	-7.45	71.25	63.80	74.00	-10.20	Peak
2 5150.000	-7.45	68.21	60.76	74.00	-13.24	Peak


Left Band edge_Vertical_Average_802.11ax40_5190MHz_ant0

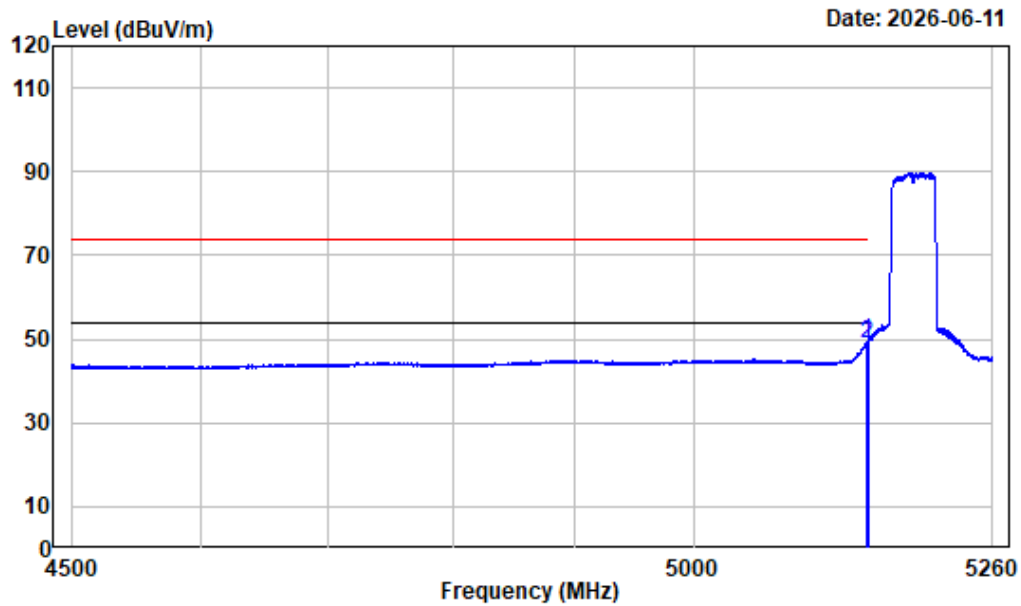

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT0-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.230	-7.45	56.99	49.54	54.00	-4.46	Average
2 5150.000	-7.45	56.28	48.83	54.00	-5.17	Average


Right Band edge_Horizontal_Peak_802.11ax40_5230MHz_ant0

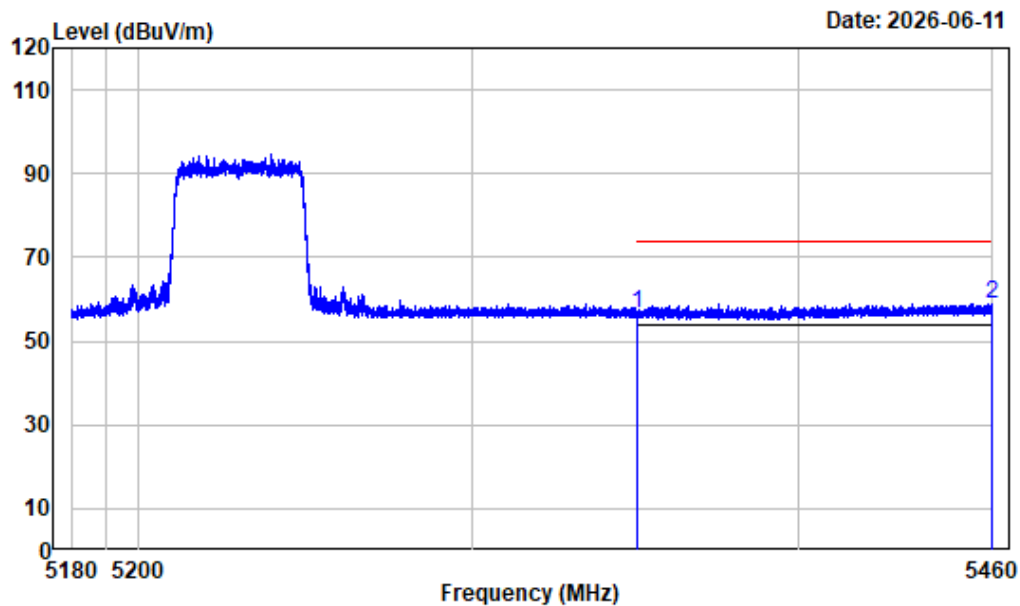

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT0-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.25	56.49	74.00	-17.51	Peak
2 5459.930	-6.26	65.29	59.03	74.00	-14.97	Peak


Right Band edge_Horizontal_Average_802.11ax40_5230MHz_ant0

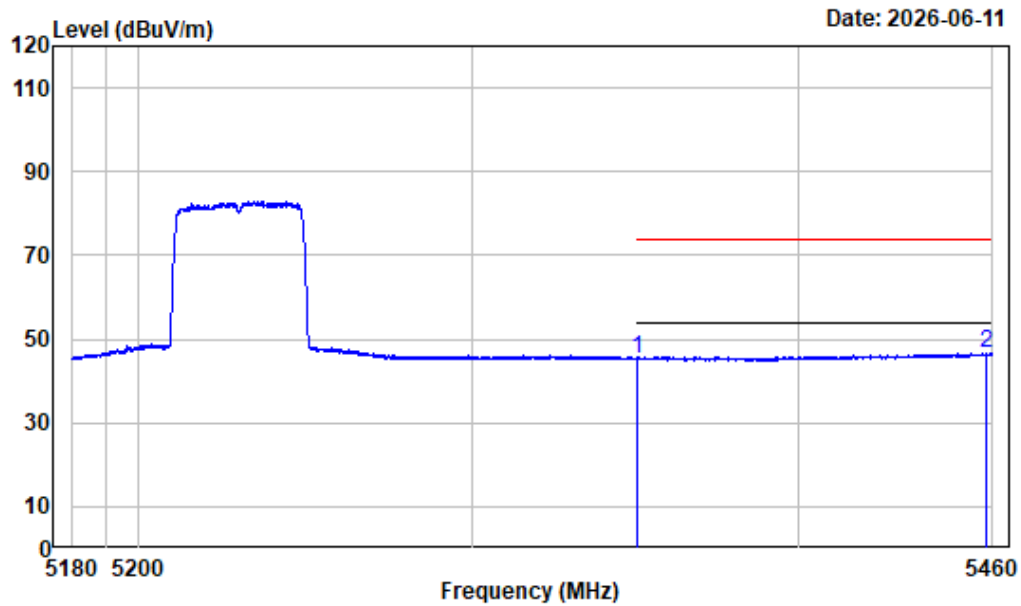

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT0-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.23	45.47	54.00	-8.53 Average
2	5457.830	-6.28	52.92	46.64	54.00	-7.36 Average


Right Band edge_Vertical_Peak_802.11ax40_5230MHz_ant0

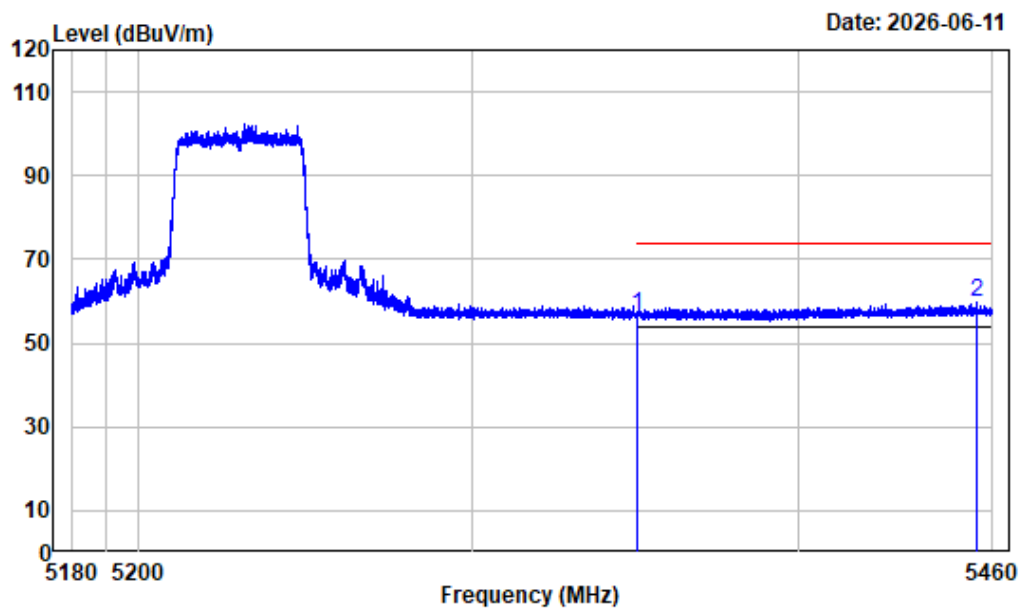

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT0-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.57	56.81	74.00	-17.19 Peak
2	5454.995	-6.29	65.91	59.62	74.00	-14.38 Peak


Right Band edge_Vertical_Average_802.11ax40_5230MHz_ant0

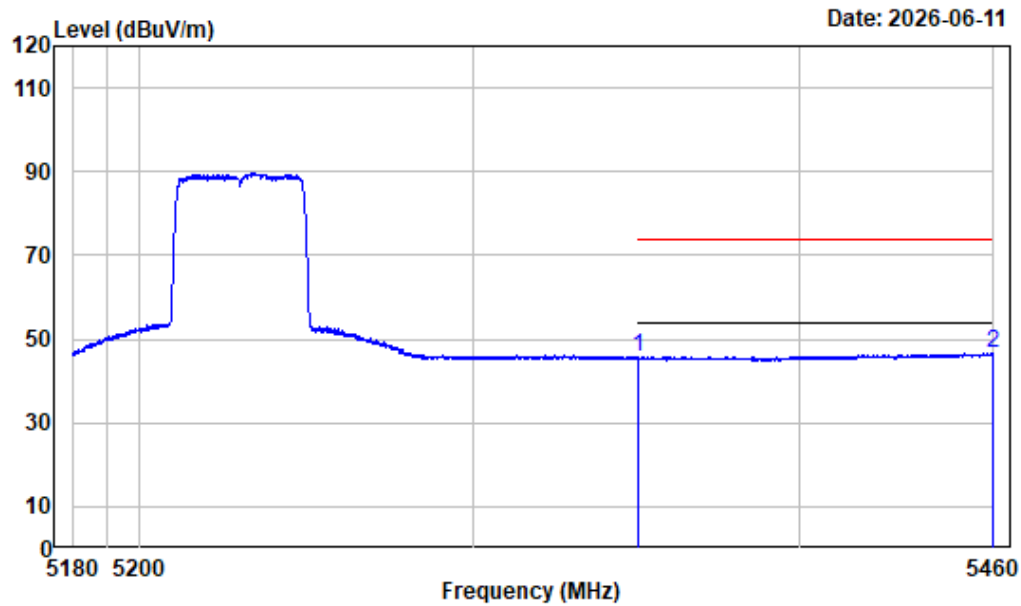

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT0-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.30	45.54	54.00	-8.46 Average
2	5459.825	-6.26	52.90	46.64	54.00	-7.36 Average


Left Band edge_Horizontal_Peak_802.11ax80_5210MHz_ant0

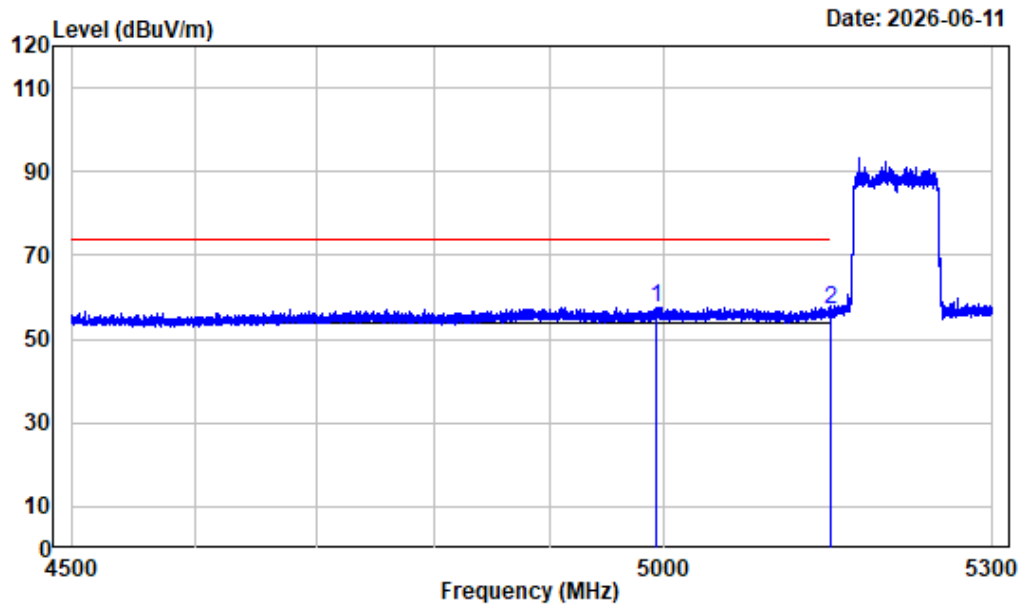

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT0-5210

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	4993.300	-7.33	65.03	57.70	74.00	-16.30 Peak
2	5150.000	-7.45	64.66	57.21	74.00	-16.79 Peak


Left Band edge_Horizontal_Average_802.11ax80_5210MHz_ant0

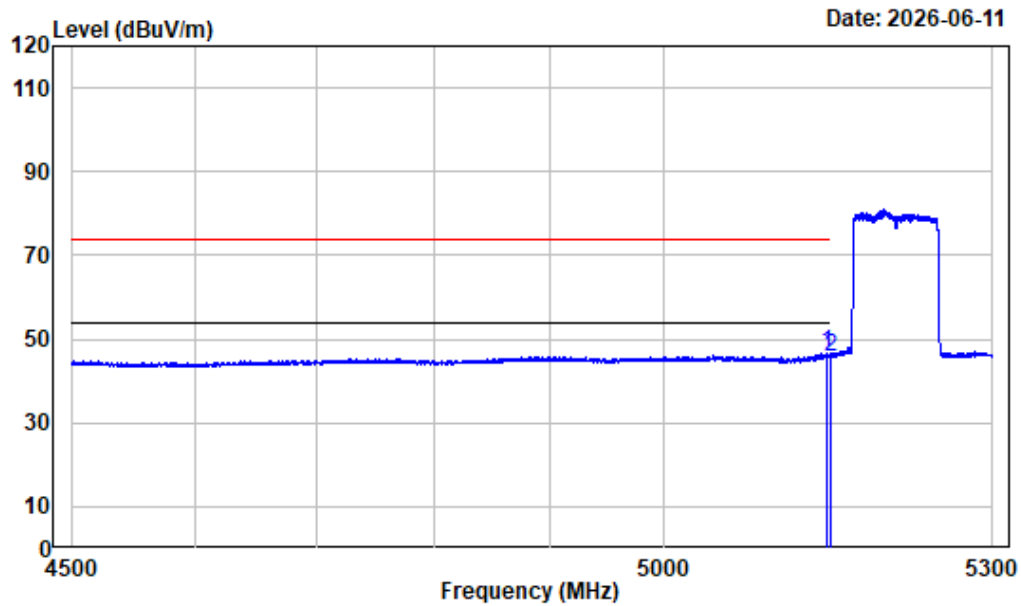

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT0-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5146.400	-7.45	54.30	46.85	54.00	-7.15 Average
2	5150.000	-7.45	53.35	45.90	54.00	-8.10 Average


Left Band edge_Vertical_Peak_802.11ax80_5210MHz_ant0

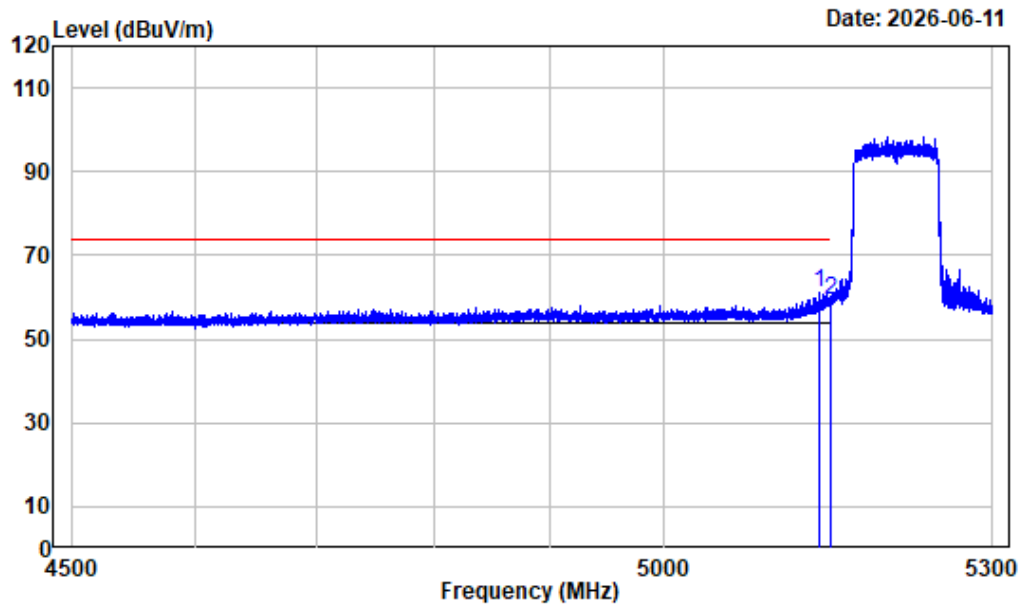

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT0-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5138.900	-7.46	68.37	60.91	74.00	-13.09	Peak
2 5150.000	-7.45	66.61	59.16	74.00	-14.84	Peak


Left Band edge_Vertical_Average_802.11ax80_5210MHz_ant0

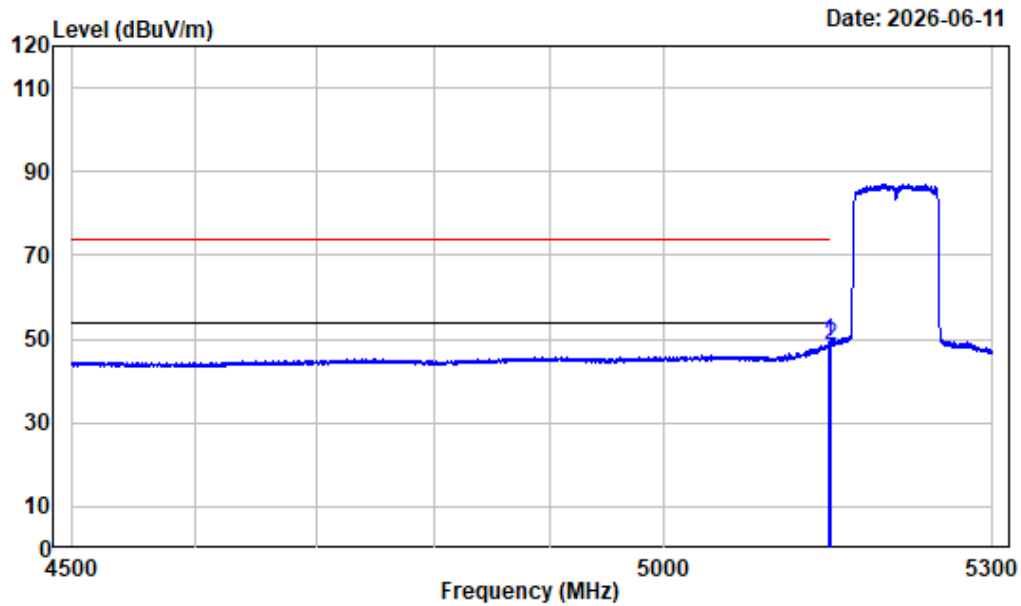

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT0-5210

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.000	-7.45	56.75	49.30	54.00	-4.70 Average
2	5150.000	-7.45	55.89	48.44	54.00	-5.56 Average


Right Band edge_Horizontal_Peak_802.11ax80_5210MHz_ant0

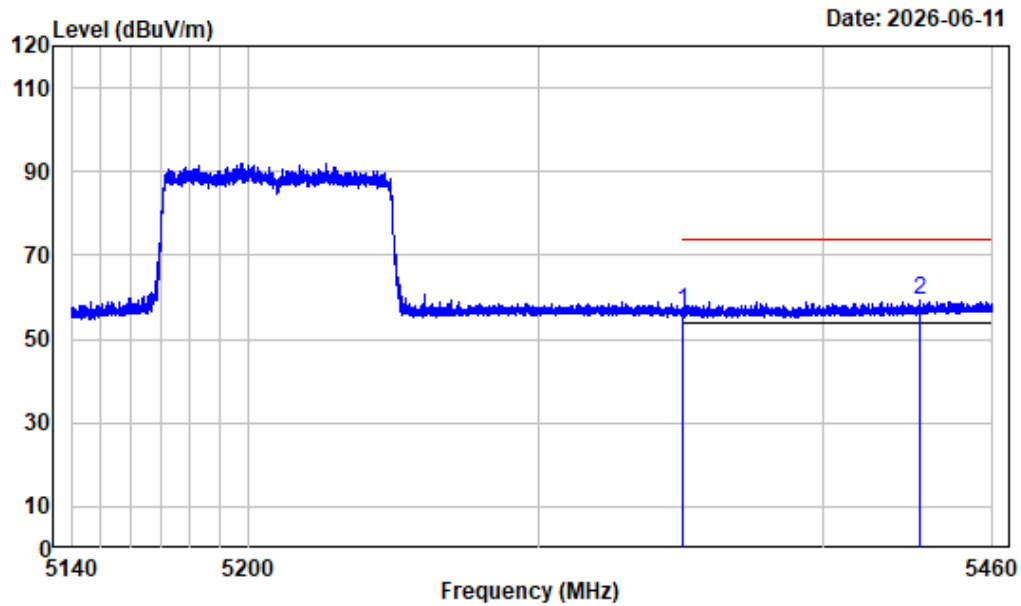

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT0-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5350.000	-6.76	63.46	56.70	74.00	-17.30 Peak
2 5434.040	-6.40	65.51	59.11	74.00	-14.89 Peak


Right Band edge_Horizontal_Average_802.11ax80_5210MHz_ant0

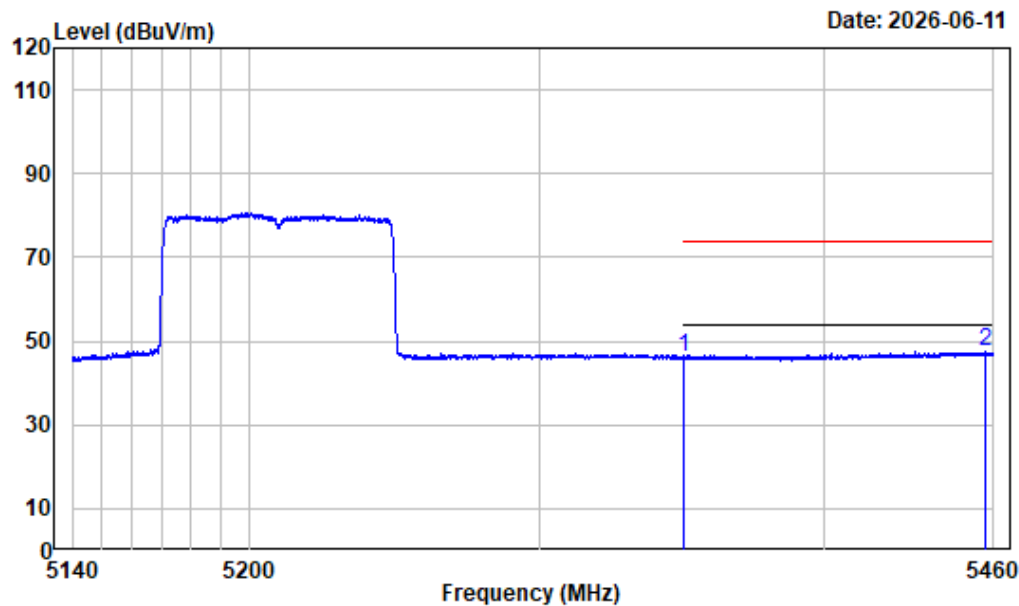

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT0-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.82	46.06	54.00	-7.94 Average
2	5457.240	-6.28	53.63	47.35	54.00	-6.65 Average


Right Band edge_Vertical_Peak_802.11ax80_5210MHz_ant0

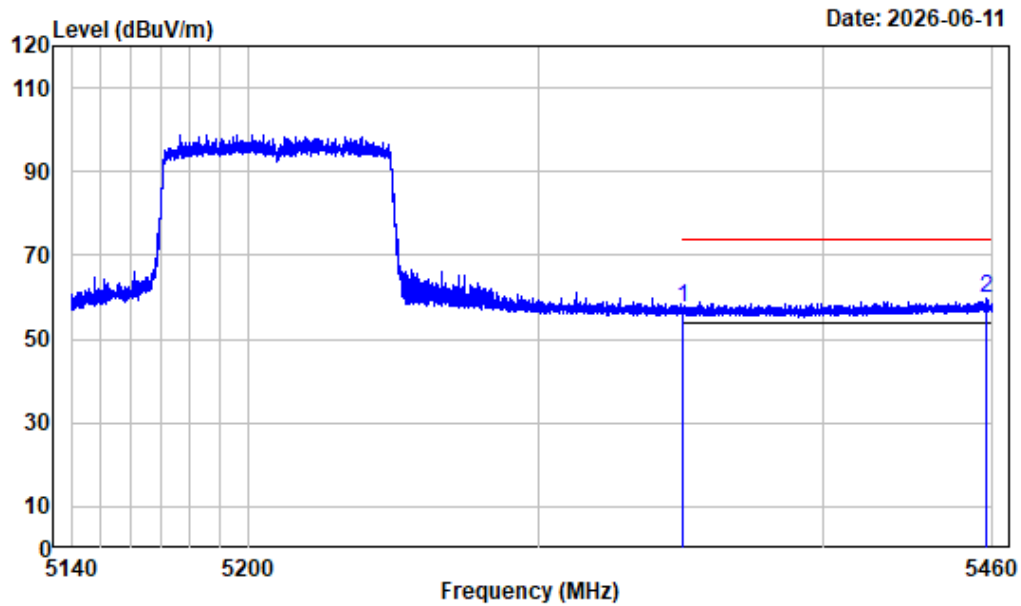

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT0-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	64.38	57.62	74.00	-16.38 Peak
2	5457.520	-6.28	65.94	59.66	74.00	-14.34 Peak


Right Band edge_Vertical_Average_802.11ax80_5210MHz_ant0

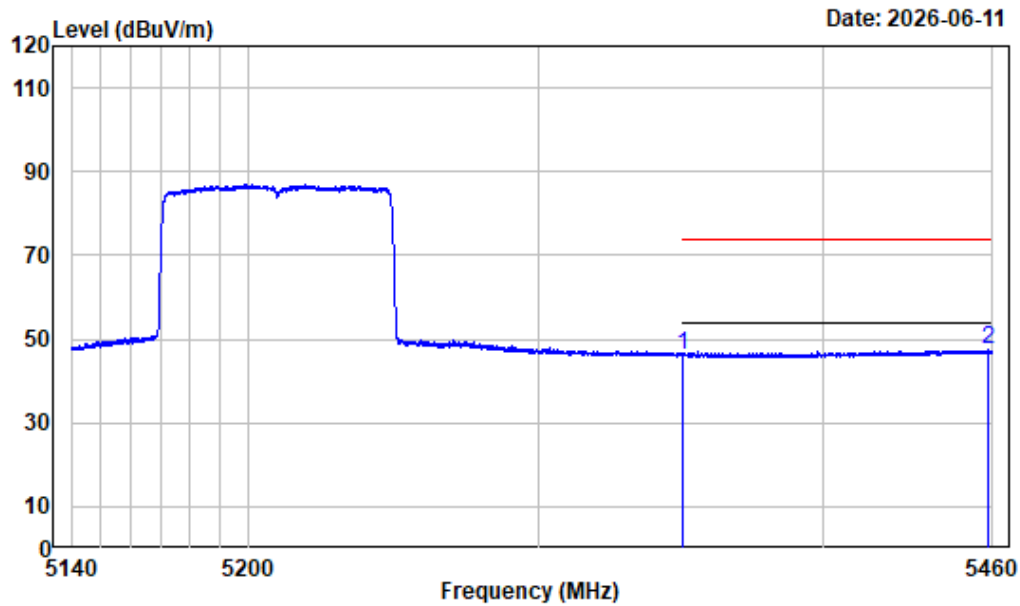

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT0-5210

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	53.01	46.25	54.00	-7.75	Average
2 5458.240	-6.28	53.78	47.50	54.00	-6.50	Average


Left Band edge_Horizontal_Peak_802.11a_5180MHz_ant1

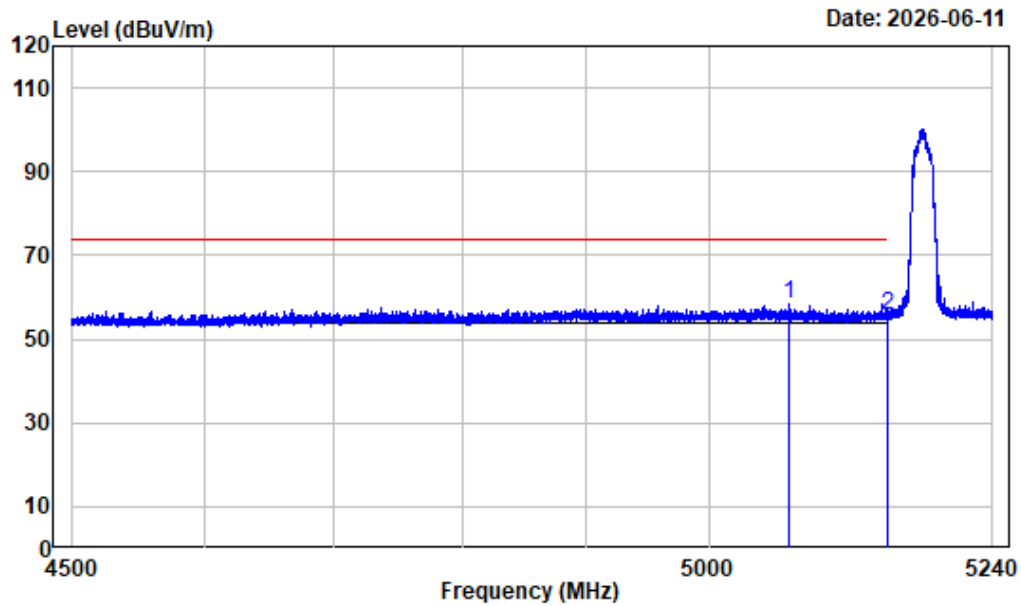

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5066.470	-7.35	65.82	58.47	74.00	-15.53 Peak
2	5150.000	-7.45	63.13	55.68	74.00	-18.32 Peak


Left Band edge_Horizontal_Average_802.11a_5180MHz_ant1

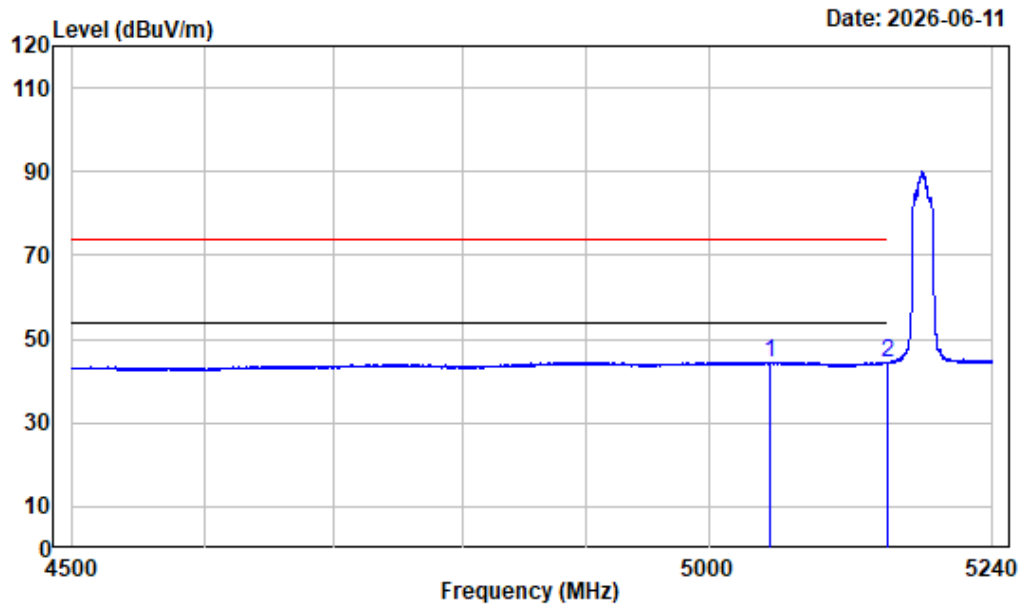

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5051.300	-7.29	51.85	44.56	54.00	-9.44	Average
2 5150.000	-7.45	51.78	44.33	54.00	-9.67	Average


Left Band edge_Vertical_Peak_802.11a_5180MHz_ant1

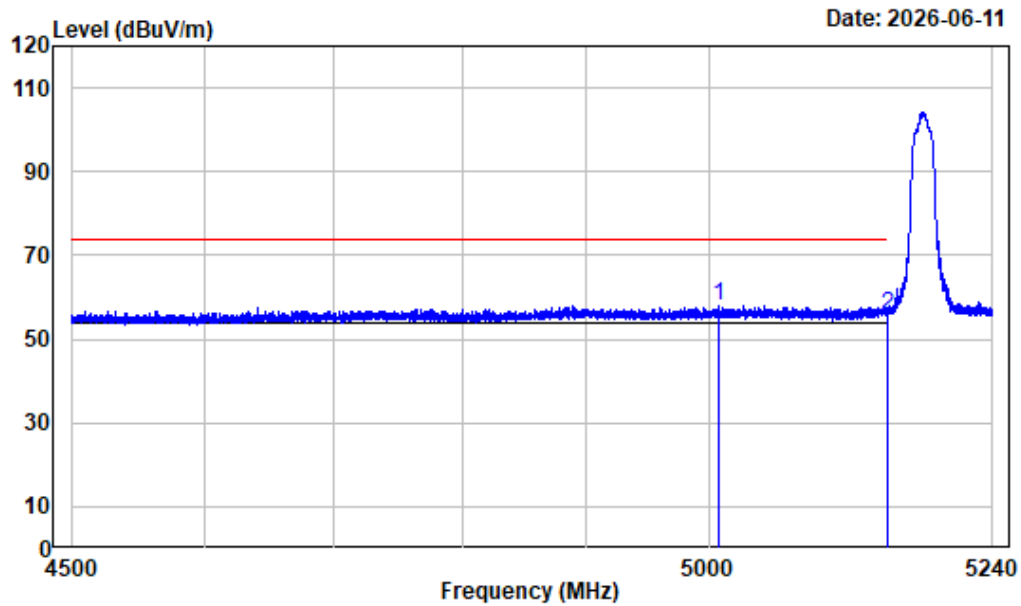

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5008.565	-7.29	65.44	58.15	74.00	-15.85	Peak
2 5150.000	-7.45	63.31	55.86	74.00	-18.14	Peak


Left Band edge_Vertical_Average_802.11a_5180MHz_ant1

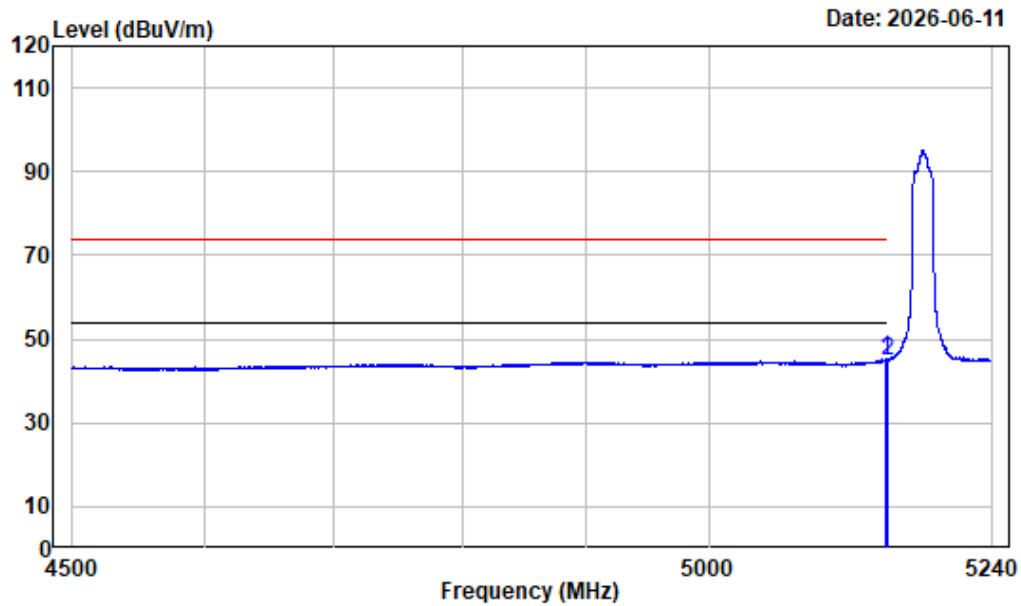

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5148.888	-7.45	52.53	45.08	54.00	-8.92 Average
2	5150.000	-7.45	52.29	44.84	54.00	-9.16 Average


Right Band edge_Horizontal_Peak_802.11a_5240MHz_ant1

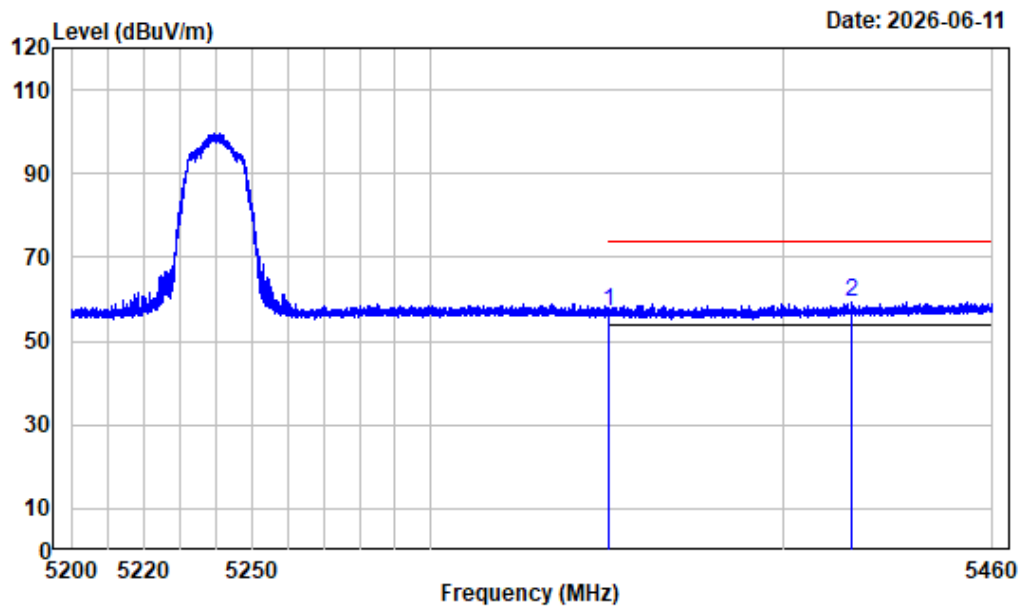

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.87	57.11	74.00	-16.89	Peak
2 5419.408	-6.50	65.84	59.34	74.00	-14.66	Peak


Right Band edge_Horizontal_Average_802.11a_5240MHz_ant1

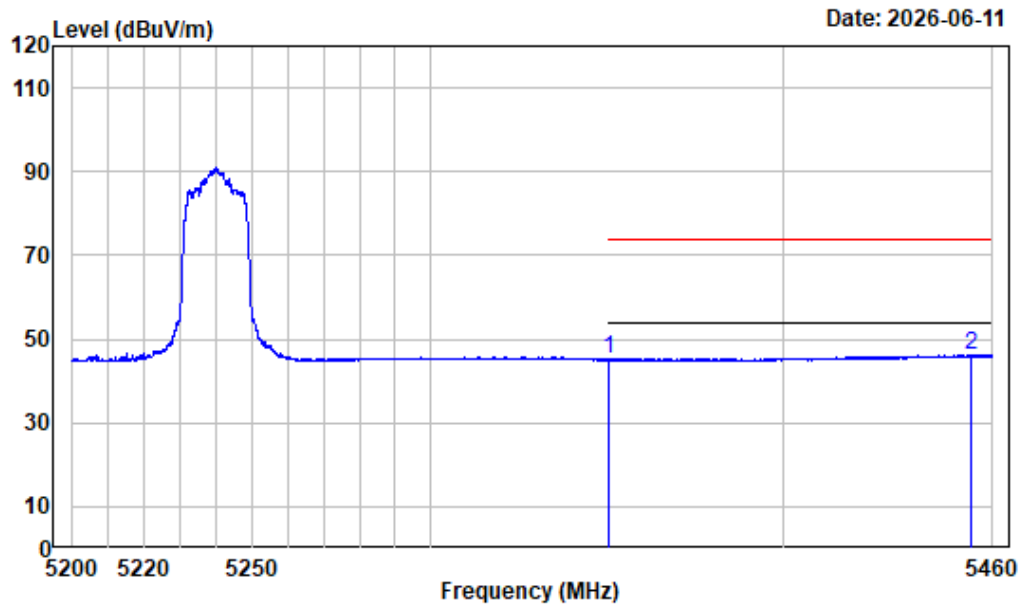

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.86	45.10	54.00	-8.90 Average
2	5453.857	-6.29	52.66	46.37	54.00	-7.63 Average


Right Band edge_Vertical_Peak_802.11a_5240MHz_ant1

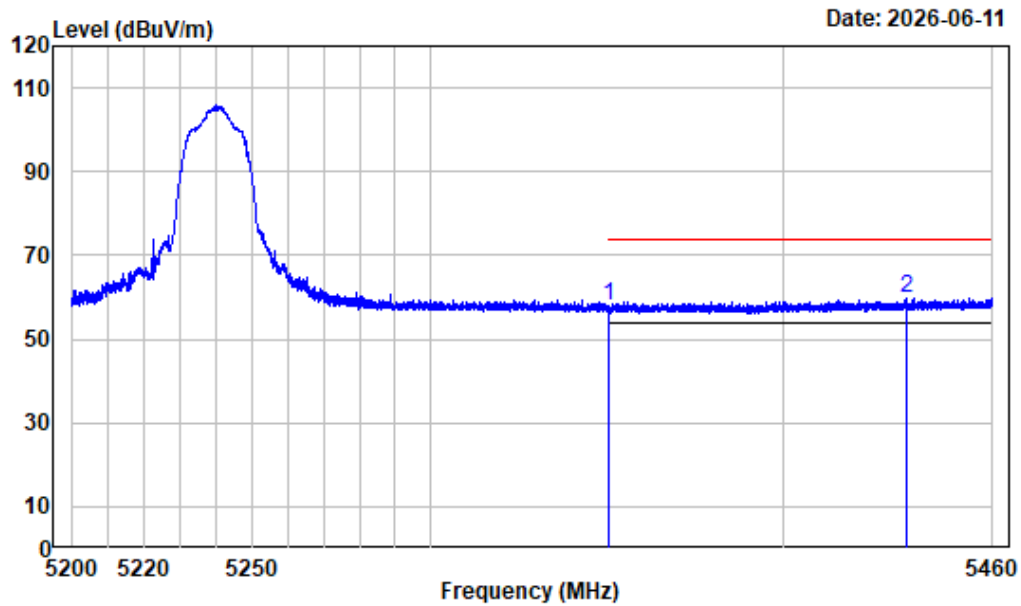

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	64.60	57.84	74.00	-16.16 Peak
2	5435.365	-6.40	66.24	59.84	74.00	-14.16 Peak


Right Band edge_Vertical_Average_802.11a_5240MHz_ant1

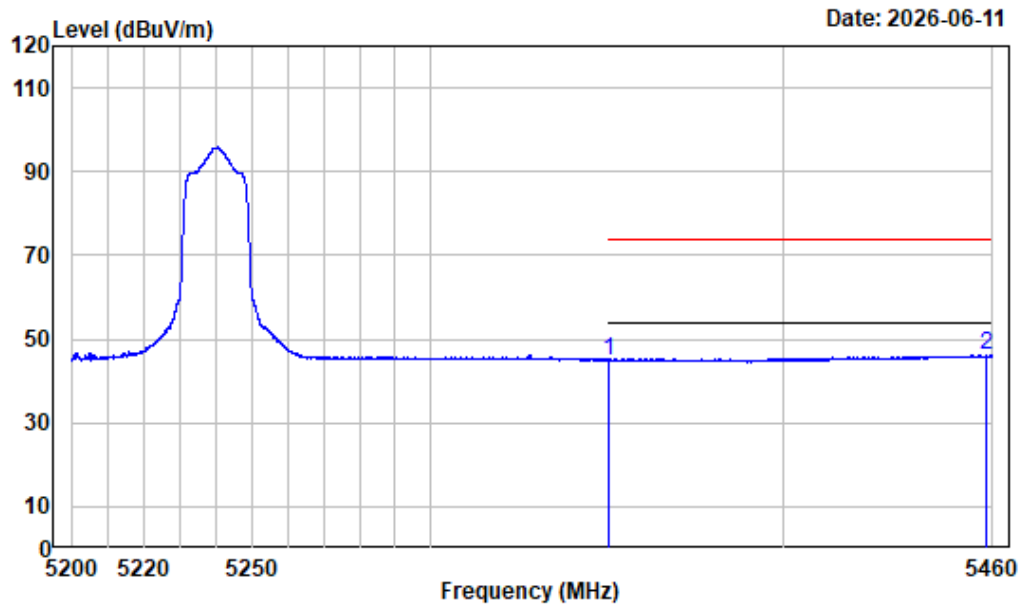

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.69	44.93	54.00	-9.07 Average
2	5458.310	-6.28	52.48	46.20	54.00	-7.80 Average


Left Band edge_Horizontal_Peak_802.11ac-VHT20_5180MHz_ant1

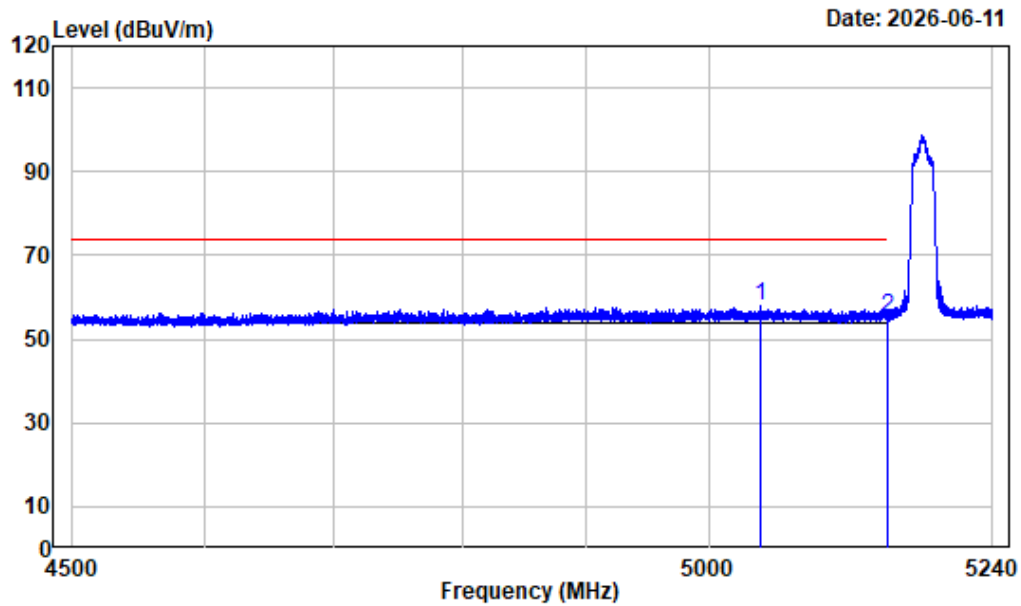

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5042.605	-7.28	65.14	57.86	74.00	-16.14	Peak
2 5150.000	-7.45	62.73	55.28	74.00	-18.72	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT20_5180MHz_ant1

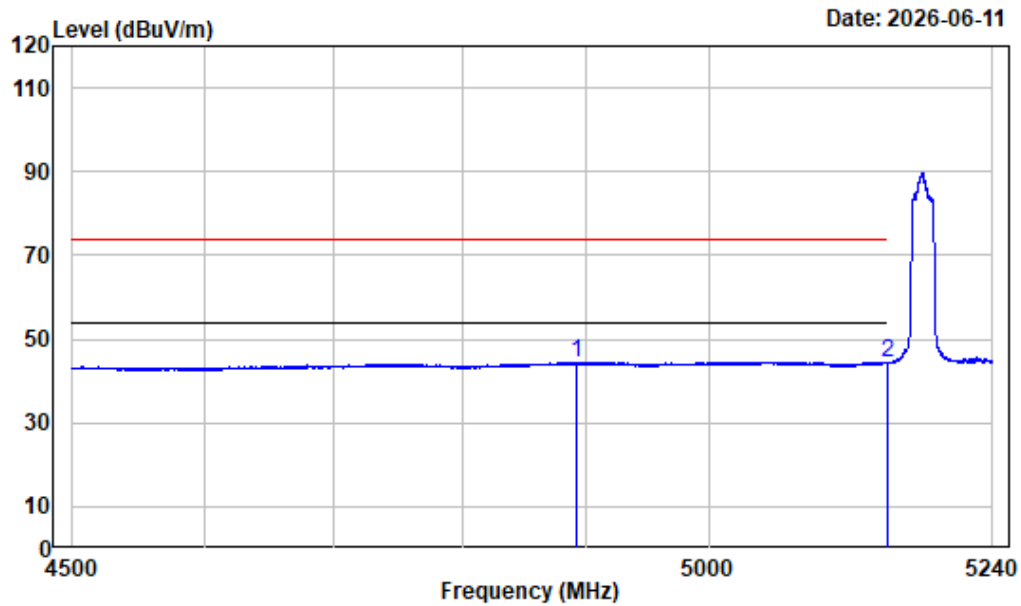

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	4892.570	-7.62	52.21	44.59	54.00	-9.41 Average
2	5150.000	-7.45	51.99	44.54	54.00	-9.46 Average


Left Band edge_Vertical_Peak_802.11ac-VHT20_5180MHz_ant1

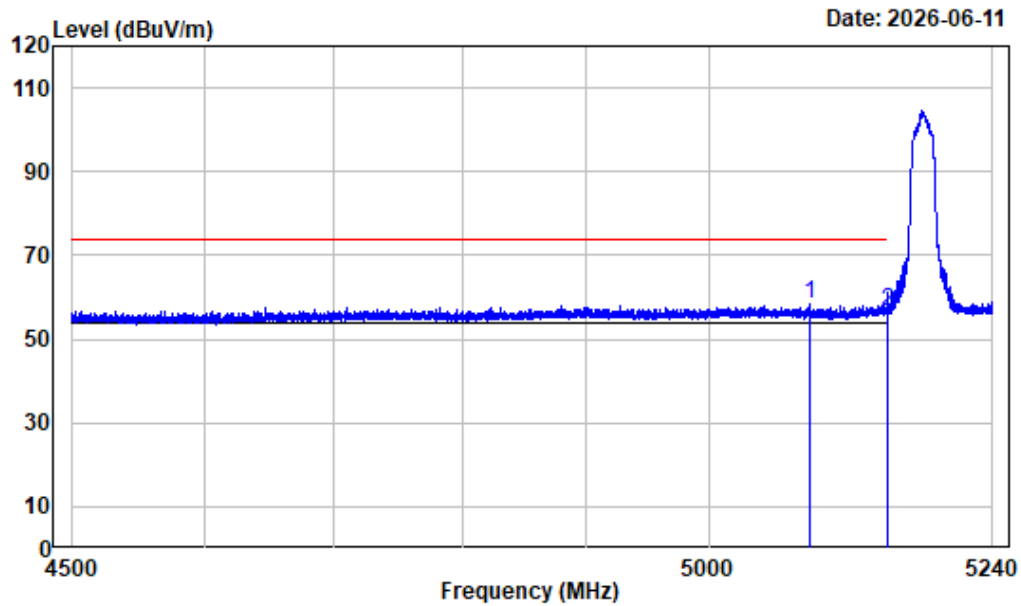

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5084.785	-7.42	65.63	58.21	74.00	-15.79	Peak
2 5150.000	-7.45	64.21	56.76	74.00	-17.24	Peak


Left Band edge_Vertical_Average_802.11ac-VHT20_5180MHz_ant1

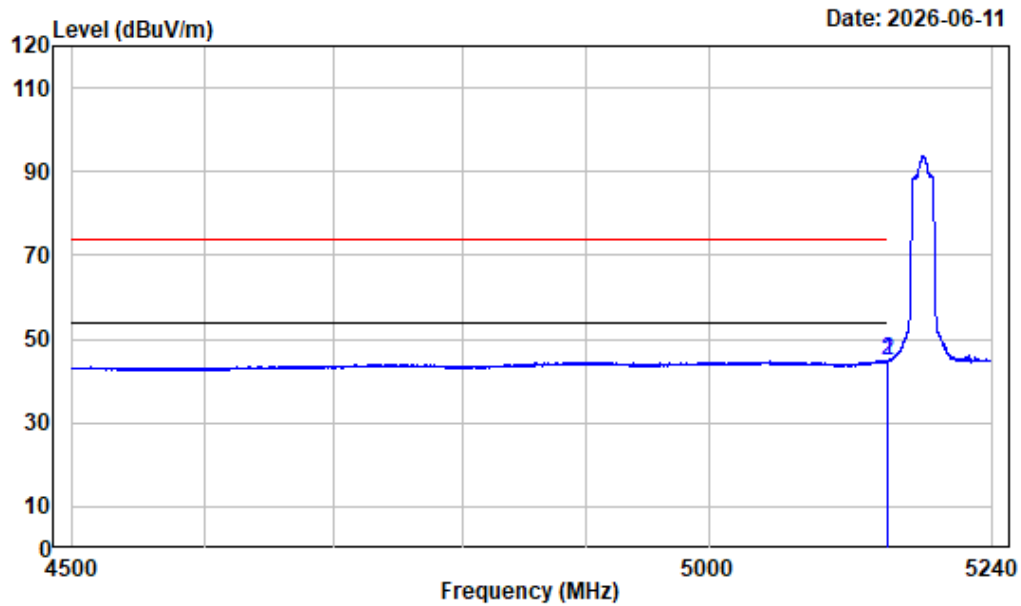

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	5149.905	-7.45	52.50	45.05	54.00	-8.95 Average
2	5150.000	-7.45	52.23	44.78	54.00	-9.22 Average


Right Band edge_Horizontal_Peak_802.11ac-VHT20_5240MHz_ant1

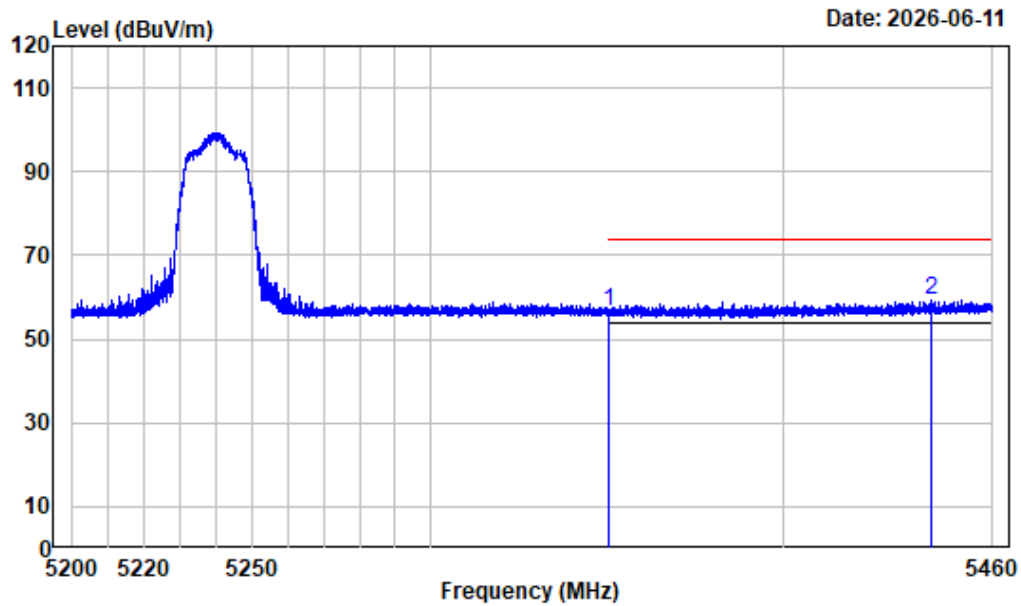

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.15	56.39	74.00	-17.61 Peak
2	5442.515	-6.35	65.48	59.13	74.00	-14.87 Peak


Right Band edge_Horizontal_Average_802.11ac-VHT20_5240MHz_ant1

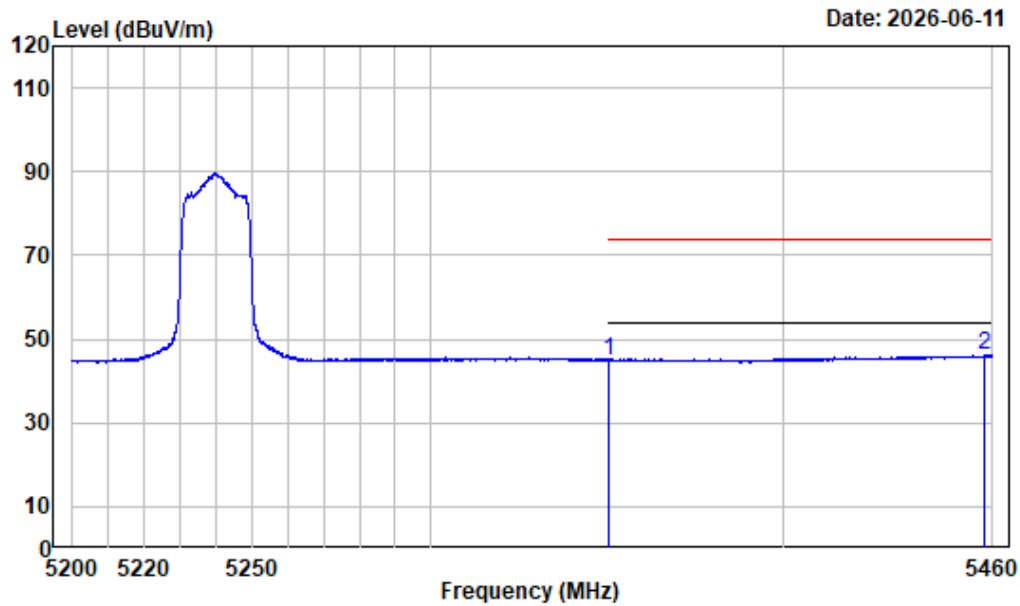

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.70	44.94	54.00	-9.06 Average
2	5457.855	-6.28	52.45	46.17	54.00	-7.83 Average


Right Band edge_Vertical_Peak_802.11ac-VHT20_5240MHz_ant1

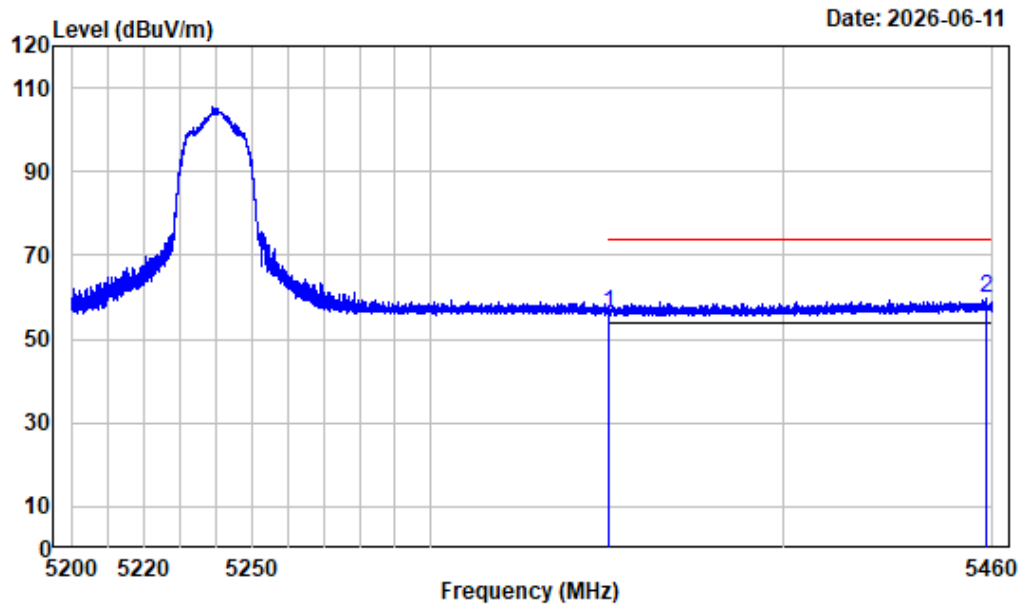

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.03	56.27	74.00	-17.73 Peak
2	5458.115	-6.28	65.97	59.69	74.00	-14.31 Peak


Right Band edge_Vertical_Average_802.11ac-VHT20_5240MHz_ant1

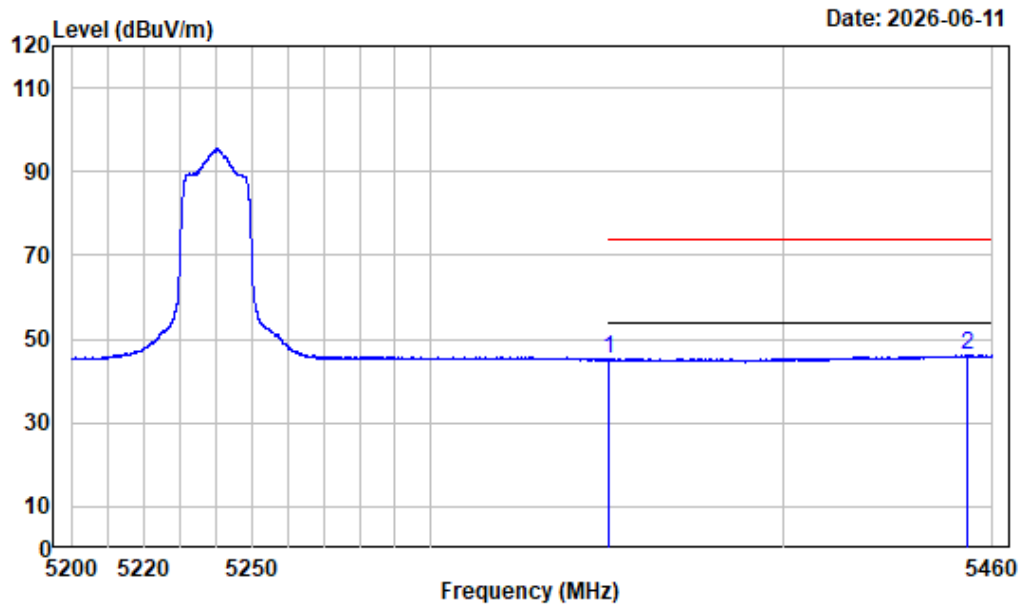

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.88	45.12	54.00	-8.88 Average
2	5452.590	-6.29	52.36	46.07	54.00	-7.93 Average


Left Band edge_Horizontal_Peak_802.11ac-VHT40_5190MHz_ant1

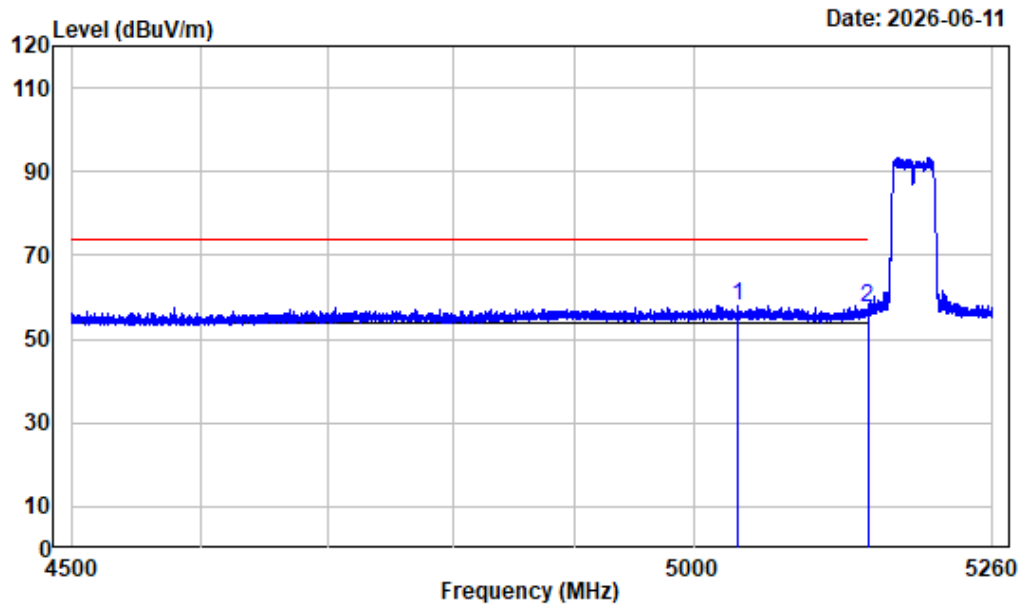

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT1-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5037.320	-7.28	65.39	58.11	74.00	-15.89	Peak
2	5150.000	-7.45	64.79	57.34	74.00	-16.66	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT40_5190MHz_ant1

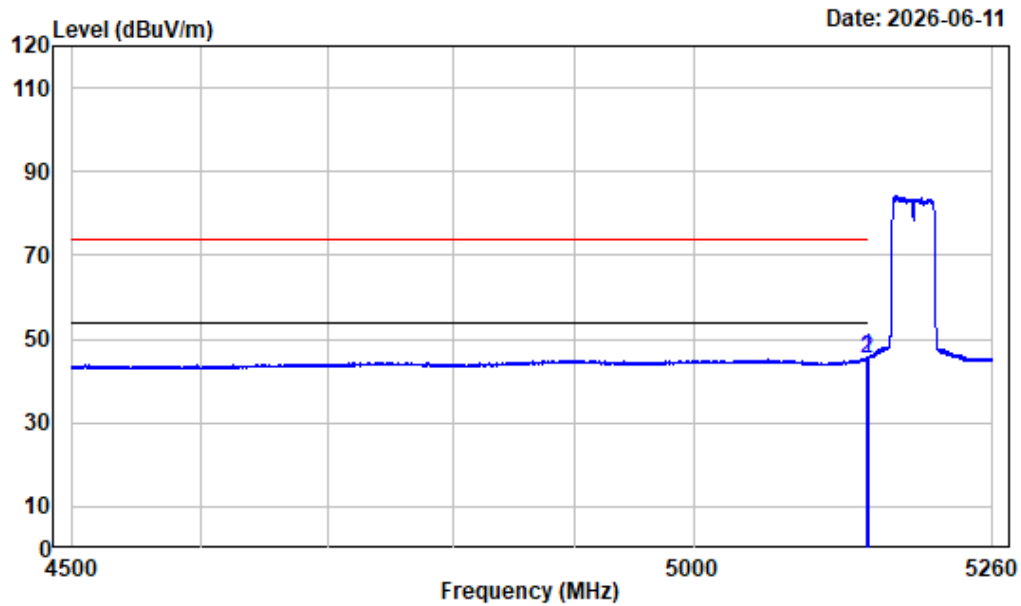

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT1-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.945	-7.45	53.14	45.69	54.00	-8.31 Average
2	5150.000	-7.45	52.79	45.34	54.00	-8.66 Average


Left Band edge_Vertical_Peak_802.11ac-VHT40_5190MHz_ant1

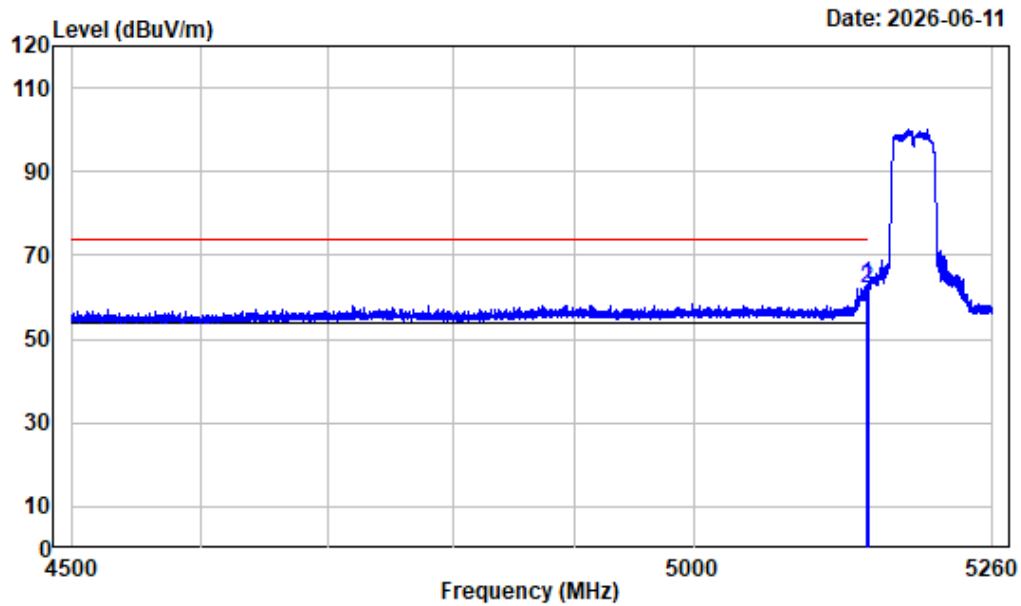

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT1-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.515	-7.45	70.31	62.86	74.00	-11.14 Peak
2	5150.000	-7.45	69.69	62.24	74.00	-11.76 Peak


Left Band edge_Vertical_Average_802.11ac-VHT40_5190MHz_ant1

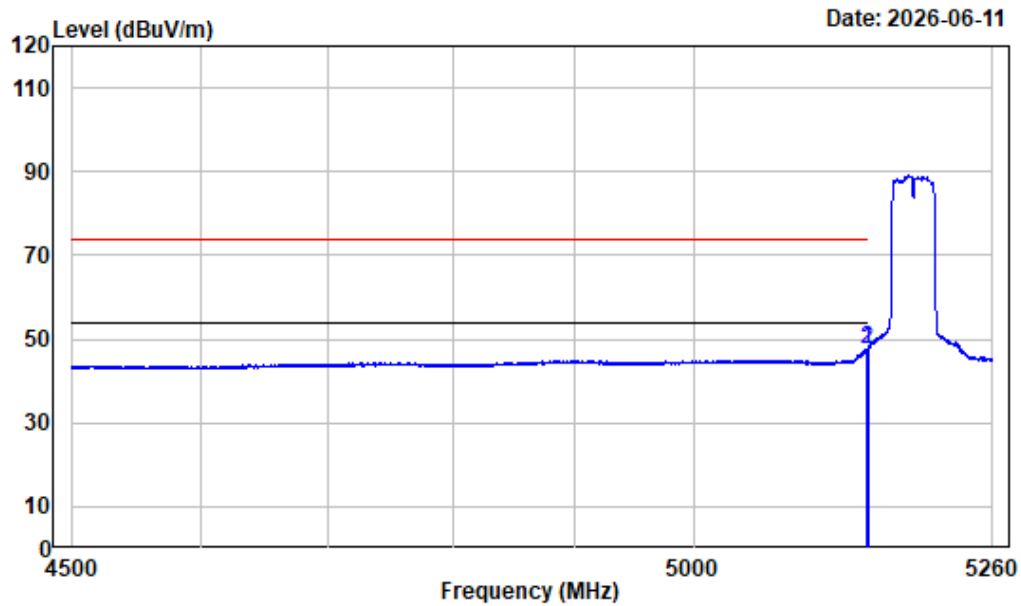

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT1-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.850	-7.45	55.18	47.73	54.00	-6.27	Average
2	5150.000	-7.45	55.01	47.56	54.00	-6.44	Average


Right Band edge_Horizontal_Peak_802.11ac-VHT40_5230MHz_ant1

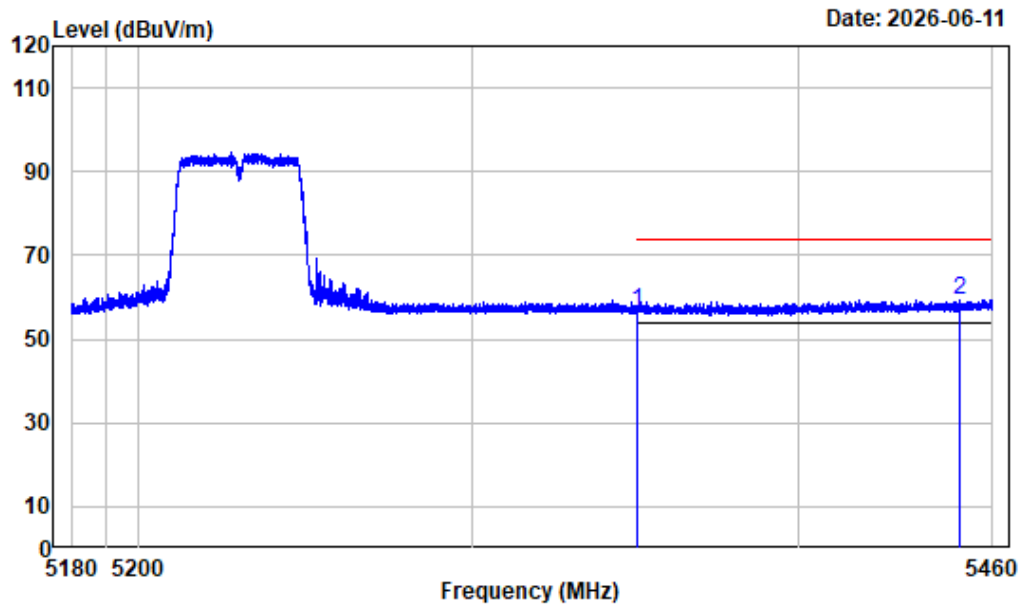

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT1-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.27	56.51	74.00	-17.49	Peak
2 5449.535	-6.31	65.64	59.33	74.00	-14.67	Peak


Right Band edge_Horizontal_Average_802.11ac-VHT40_5230MHz_ant1

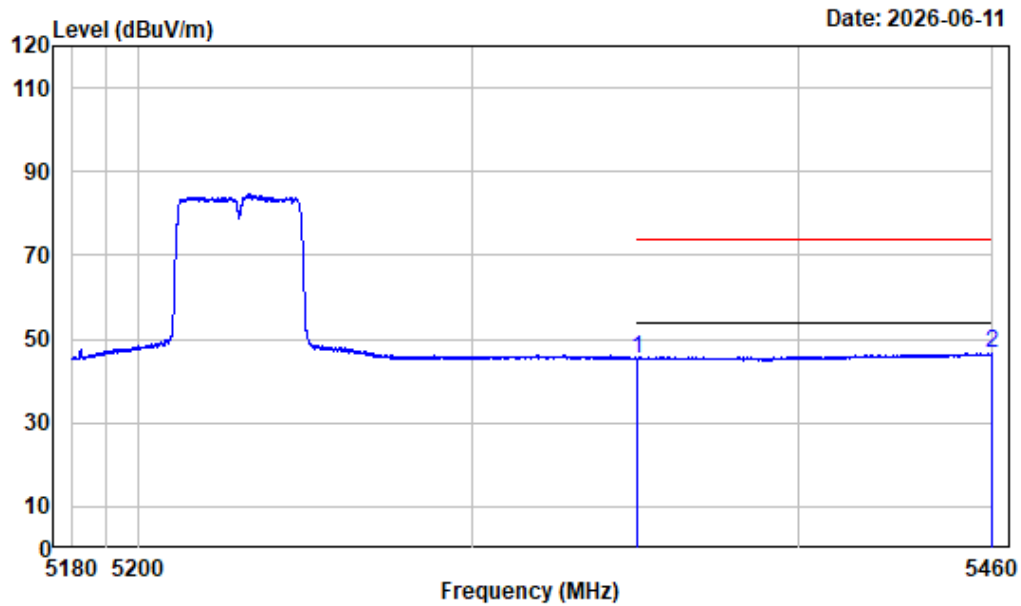

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT1-5230

Freq Factor		Read Level		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	52.08	45.32	54.00	-8.68	Average
2 5459.965	-6.26	52.79	46.53	54.00	-7.47	Average


Right Band edge_Vertical_Peak_802.11ac-VHT40_5230MHz_ant1

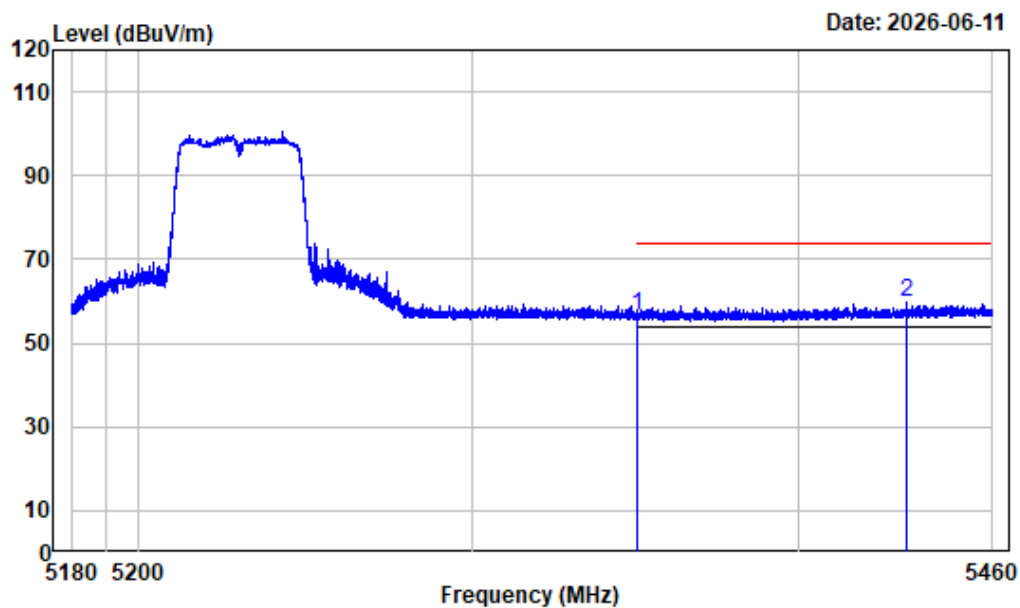

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT1-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.21	56.45	74.00	-17.55 Peak
2	5433.190	-6.41	66.05	59.64	74.00	-14.36 Peak


Right Band edge_Vertical_Average_802.11ac-VHT40_5230MHz_ant1

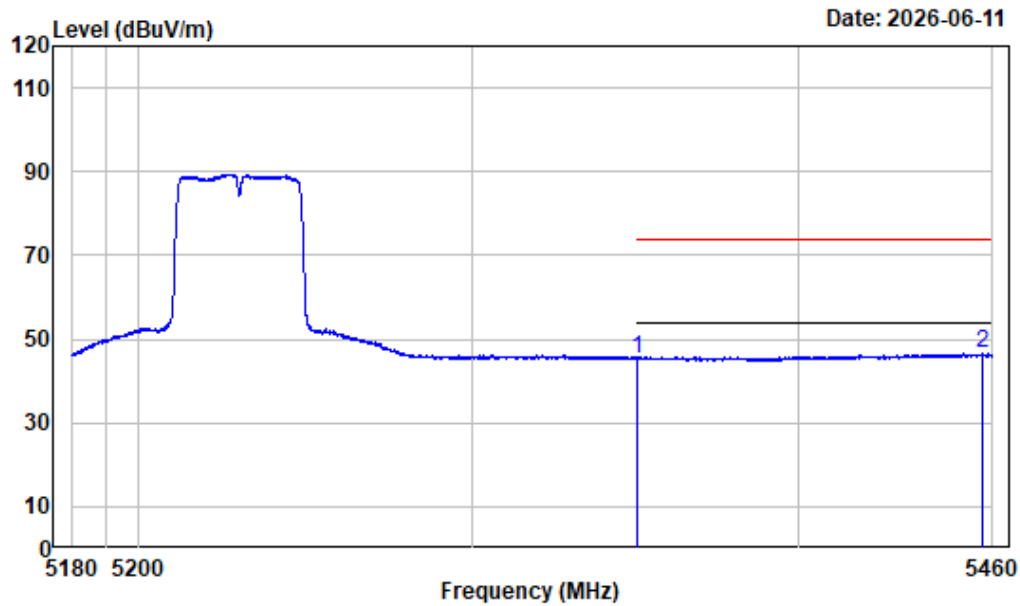

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40_ANT1-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.15	45.39	54.00	-8.61 Average
2	5457.130	-6.28	52.75	46.47	54.00	-7.53 Average


Left Band edge_Horizontal_Peak_802.11ac-VHT80_5210MHz_ant1

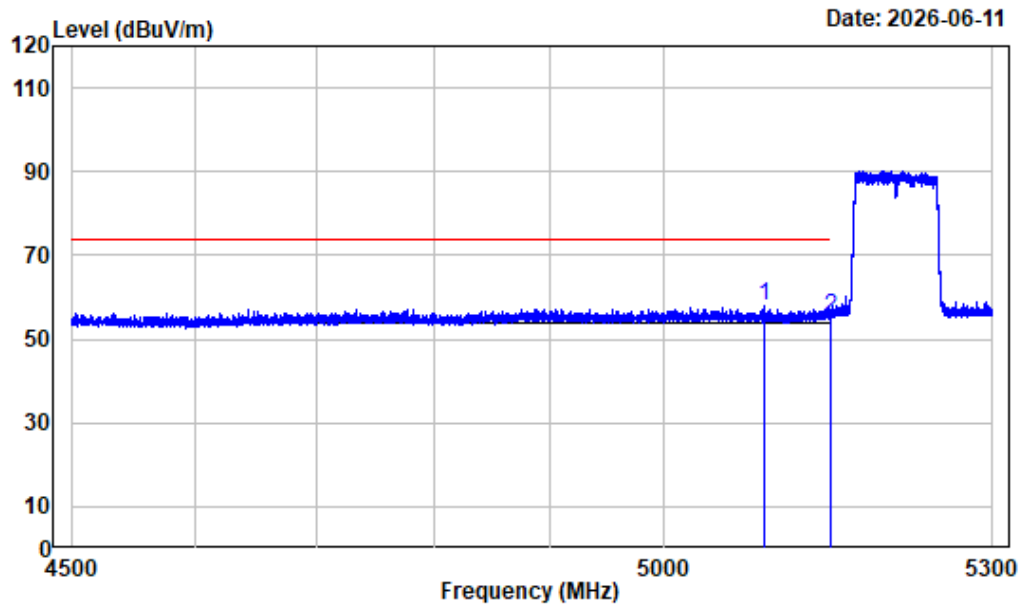

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT1-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5088.700	-7.43	65.32	57.89	74.00	-16.11	Peak
2 5150.000	-7.45	62.75	55.30	74.00	-18.70	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT80_5210MHz_ant1

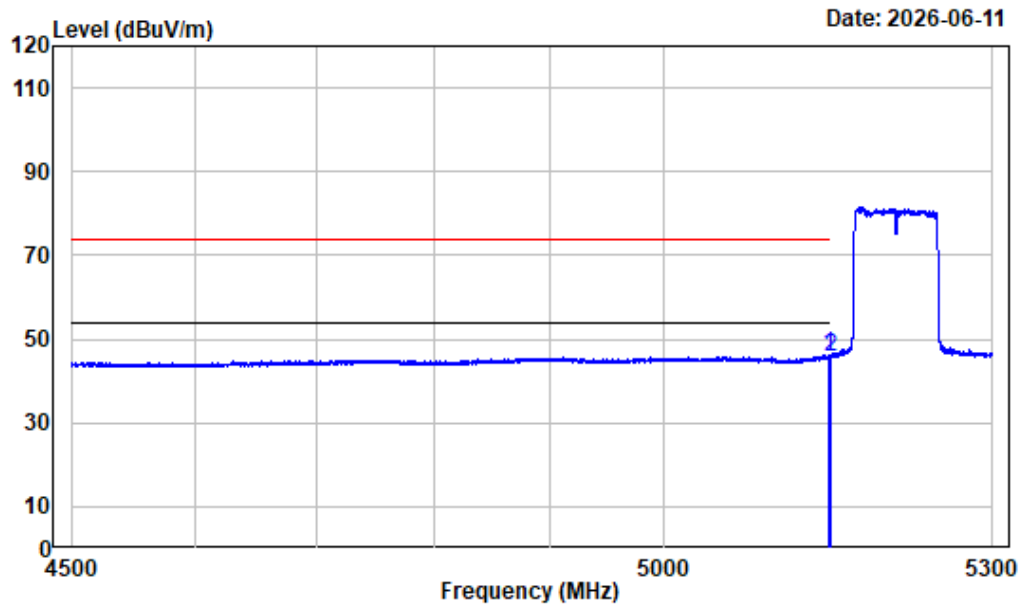

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT1-5210

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5148.600	-7.45	53.75	46.30	54.00	-7.70	Average
2 5150.000	-7.45	53.33	45.88	54.00	-8.12	Average


Left Band edge_Vertical_Peak_802.11ac-VHT80_5210MHz_ant1

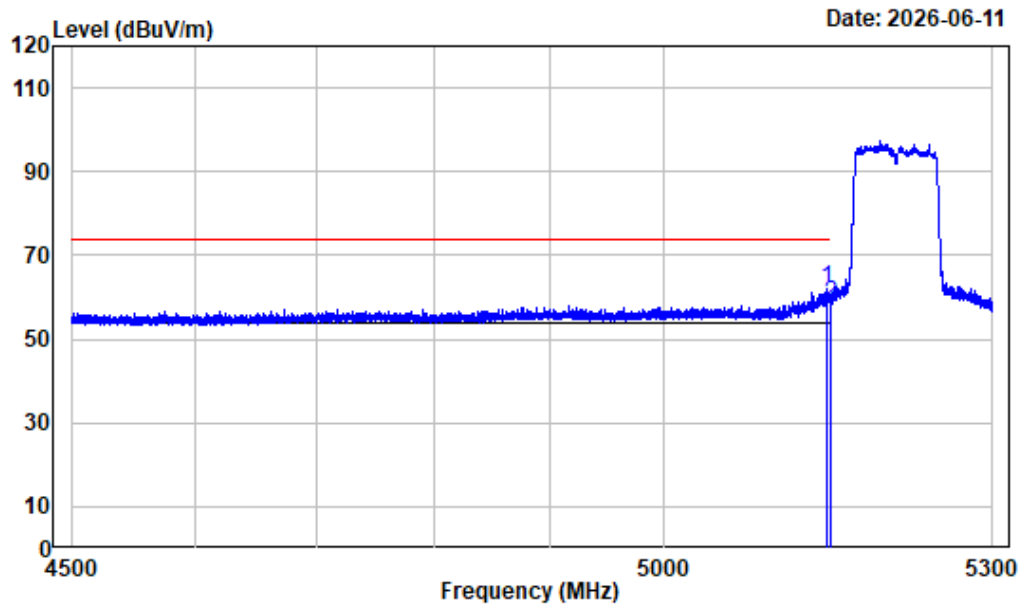

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT1-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5145.800	-7.45	69.50	62.05	74.00	-11.95	Peak
2 5150.000	-7.45	65.91	58.46	74.00	-15.54	Peak


Left Band edge_Vertical_Average_802.11ac_vht80 5210MHz_ant1

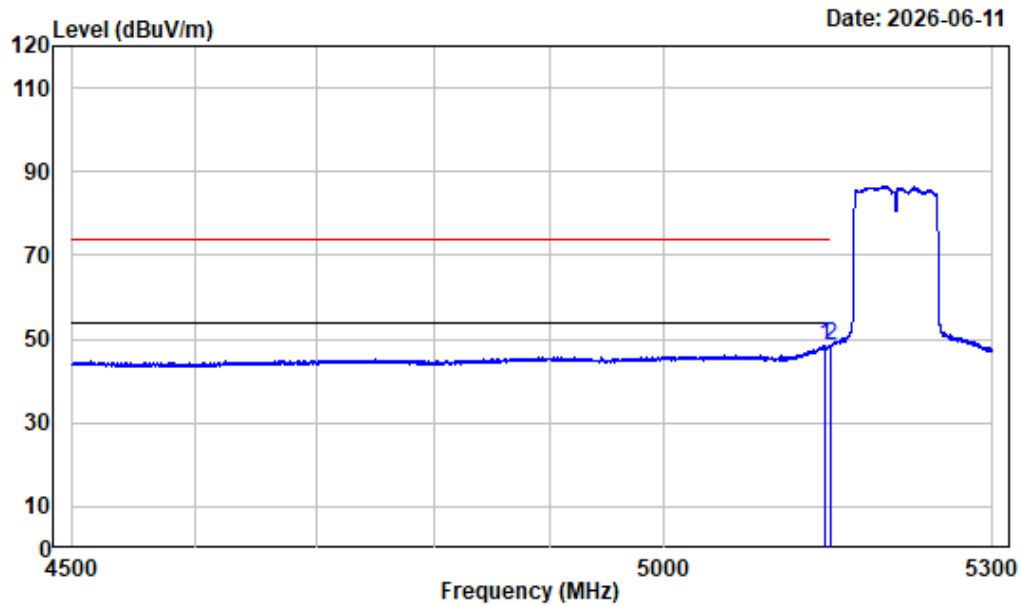

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT1-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5144.600	-7.46	55.98	48.52	54.00	-5.48 Average
2	5150.000	-7.45	55.76	48.31	54.00	-5.69 Average


Right Band edge_Horizontal_Peak_802.11ac-VHT80_5210MHz_ant1

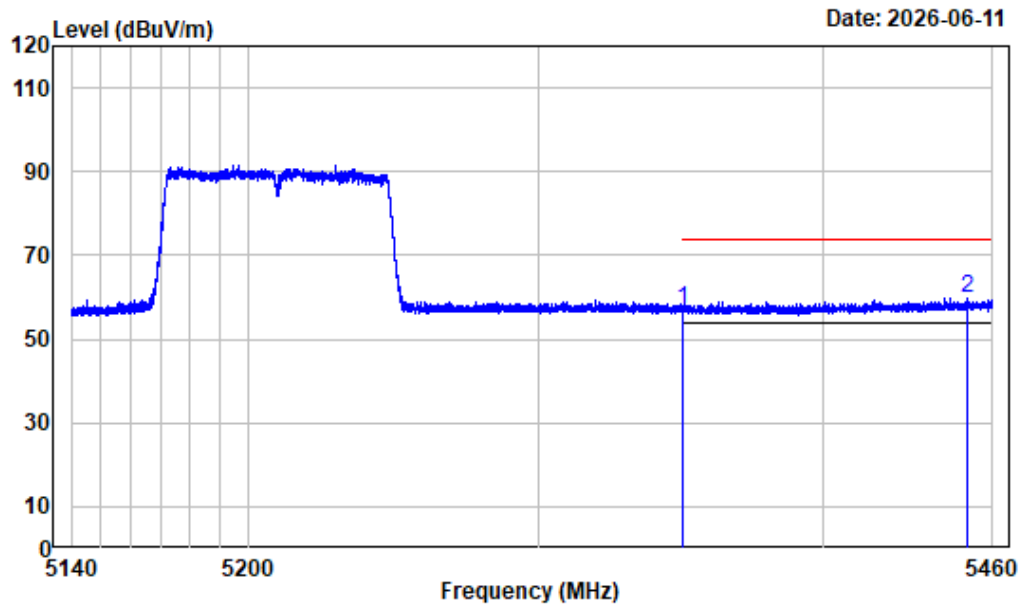

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT1-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5350.000	-6.76	63.60	56.84	74.00	-17.16 Peak
2 5451.320	-6.31	66.18	59.87	74.00	-14.13 Peak


Right Band edge_Horizontal_Average_802.11ac-VHT80_5210MHz_ant1

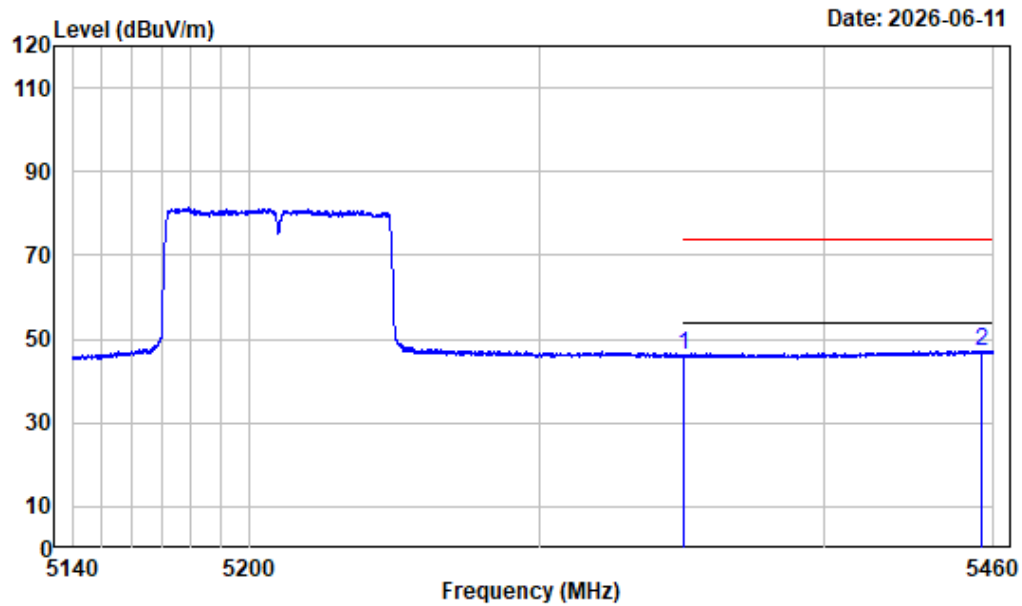

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT1-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.73	45.97	54.00	-8.03 Average
2	5455.600	-6.28	53.54	47.26	54.00	-6.74 Average


Right Band edge_Vertical_Peak_802.11ac-VHT80_5210MHz_ant1

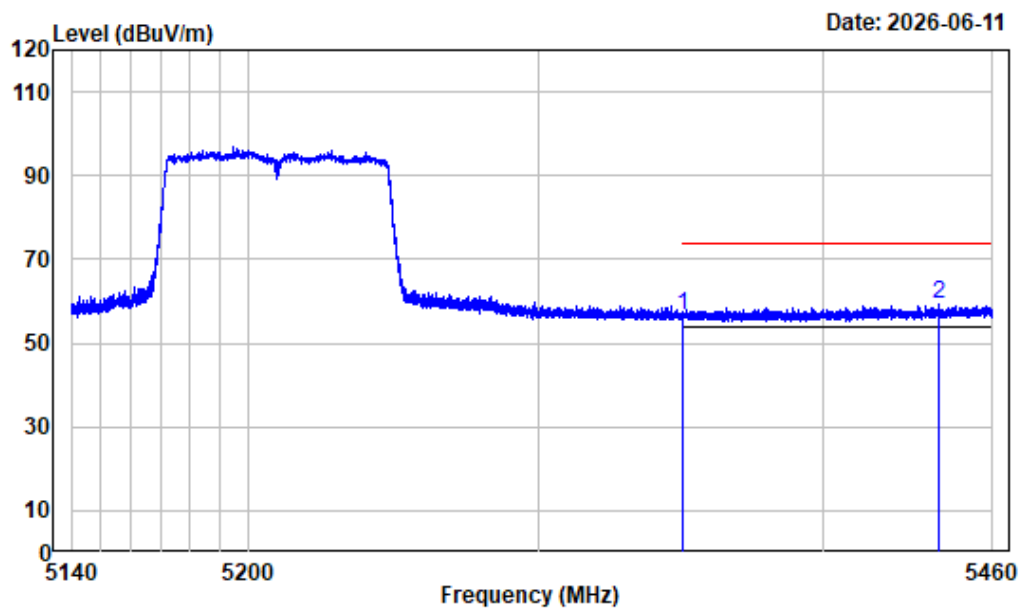

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT1-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5350.000	-6.76	63.52	56.76	74.00	-17.24 Peak
2 5440.960	-6.37	65.72	59.35	74.00	-14.65 Peak


Right Band edge_Vertical_Average_802.11ac-VHT80_5210MHz_ant

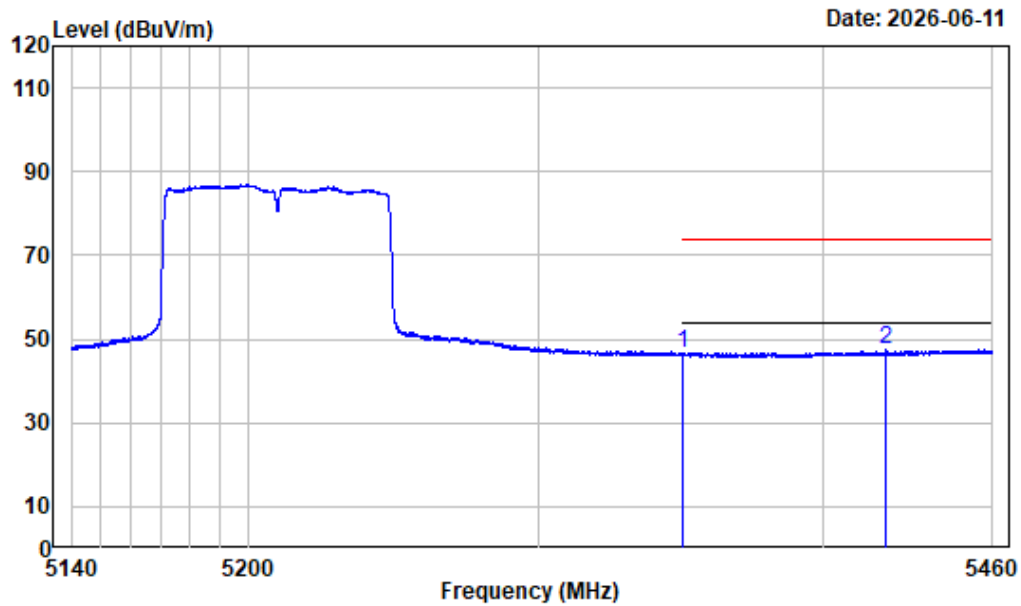

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80_ANT1-5210

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	53.41	46.65	54.00	-7.35	Average
2 5421.760	-6.48	53.91	47.43	54.00	-6.57	Average


Left Band edge_Horizontal_Peak_802.11ax20_5180MHz_ant1

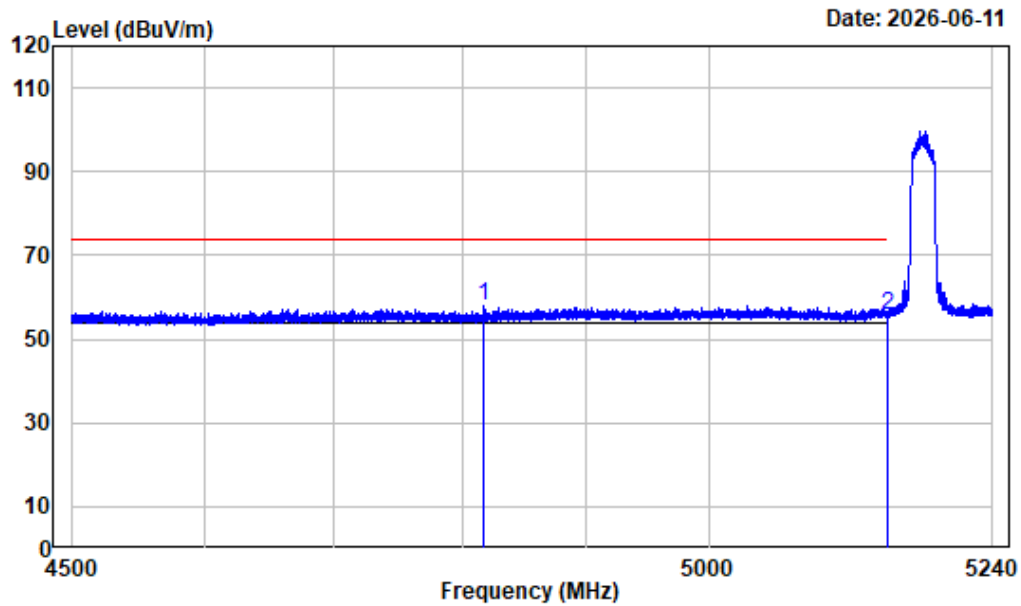

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4817.368	-7.81	65.62	57.81	74.00	-16.19 Peak
2	5150.000	-7.45	63.31	55.86	74.00	-18.14 Peak


Left Band edge_Horizontal_Average_802.11ax20_5180MHz_ant1

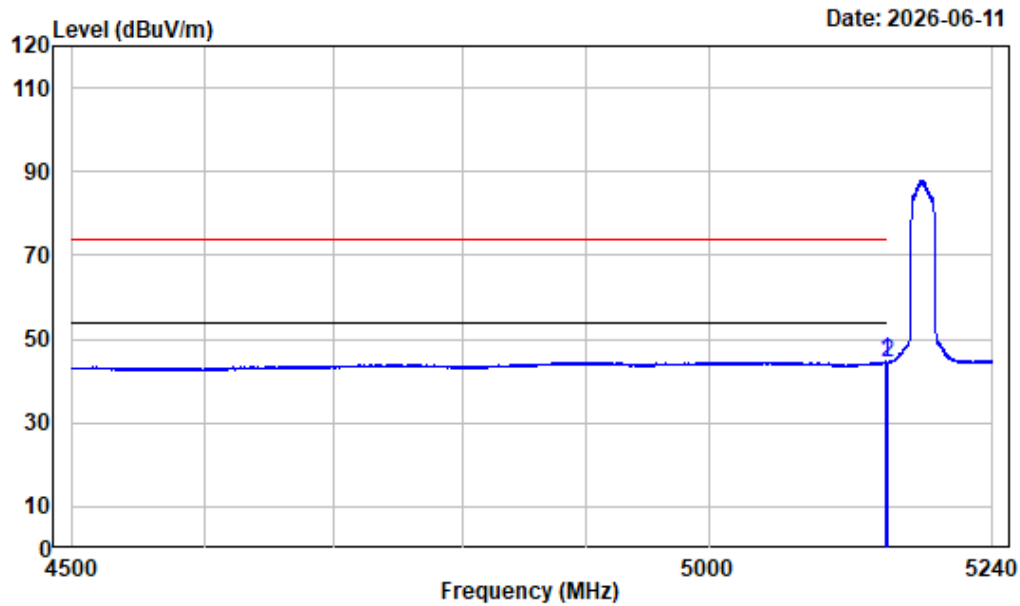

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT1-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.888	-7.45	52.08	44.63	54.00	-9.37 Average
2	5150.000	-7.45	51.85	44.40	54.00	-9.60 Average


Left Band edge_Vertical_Peak_802.11ax20_5180MHz_ant1

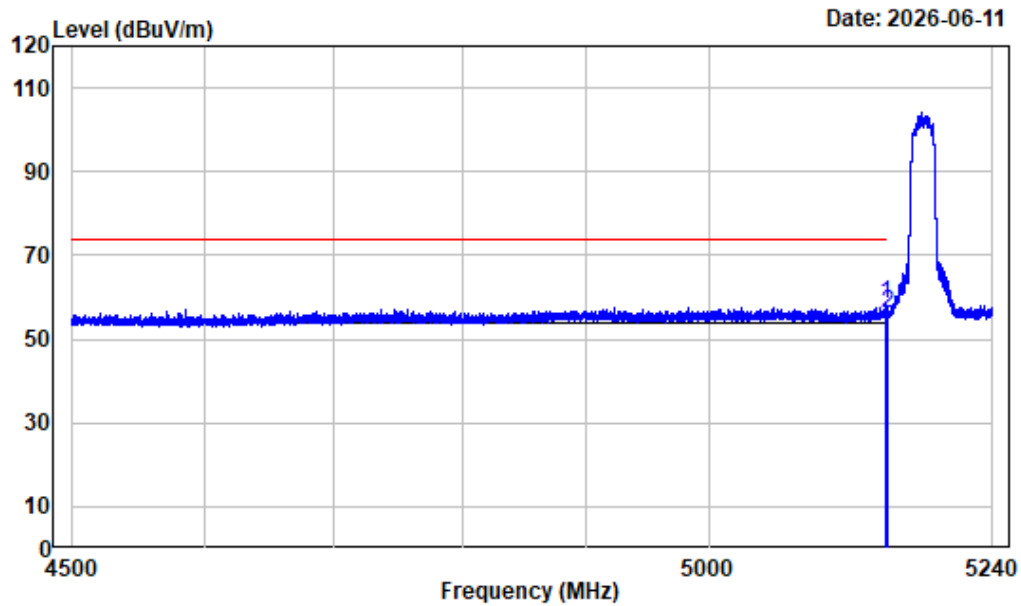

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT1-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5147.685	-7.45	65.68	58.23	74.00	-15.77	Peak
2 5150.000	-7.45	63.69	56.24	74.00	-17.76	Peak


Left Band edge_Vertical_Average_802.11ax20_5180MHz_ant1

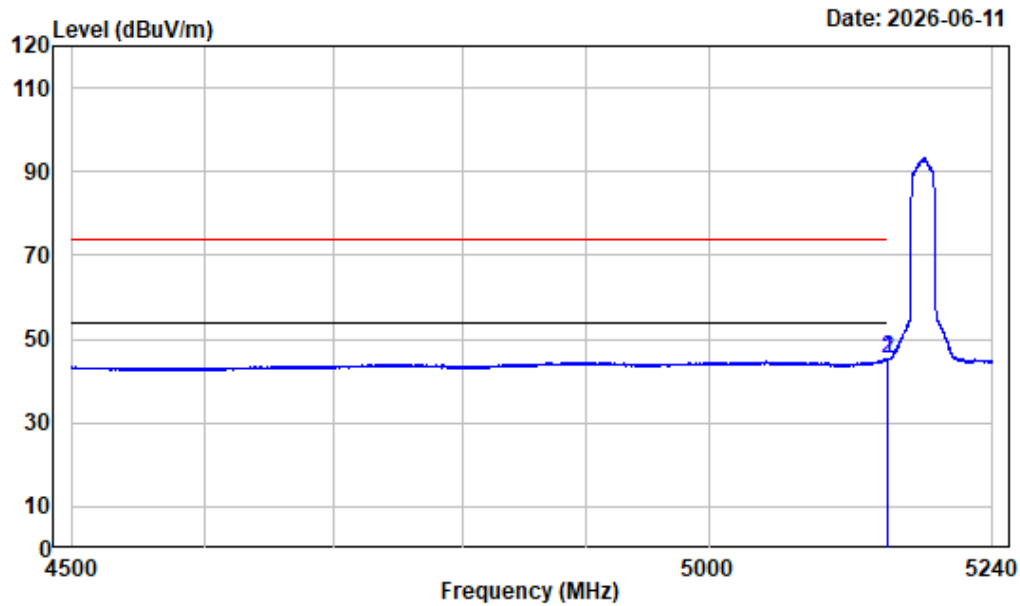

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT1-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.998	-7.45	52.74	45.29	54.00	-8.71 Average
2	5150.000	-7.45	52.68	45.23	54.00	-8.77 Average


Right Band edge_Horizontal_Peak_802.11ax20_5240MHz_ant1

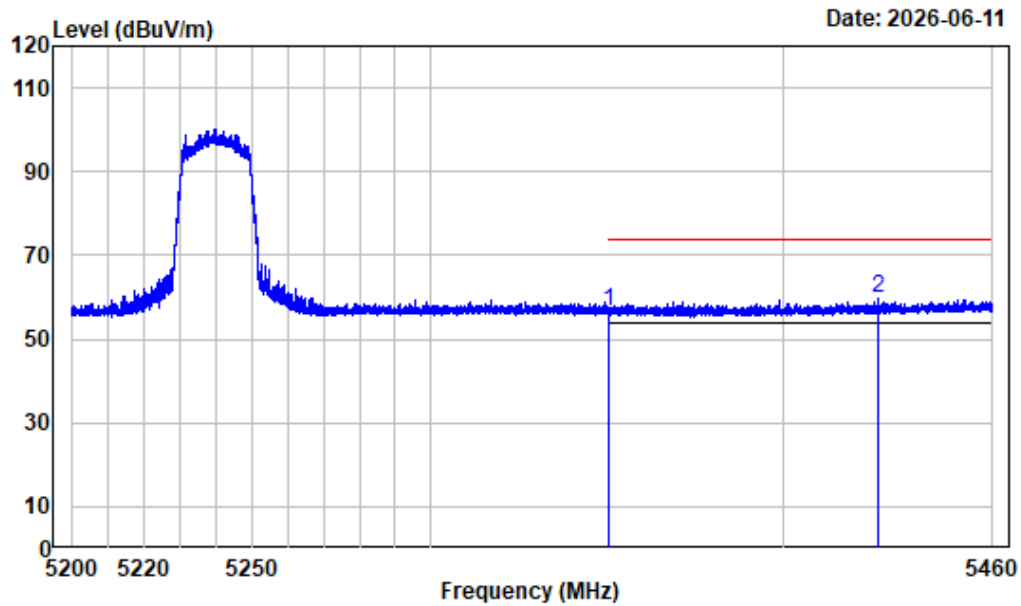

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT1-5240

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.45	56.69	74.00	-17.31	Peak
2 5427.045	-6.45	66.07	59.62	74.00	-14.38	Peak


Right Band edge_Horizontal_Average_802.11ax20_5240MHz_ant1

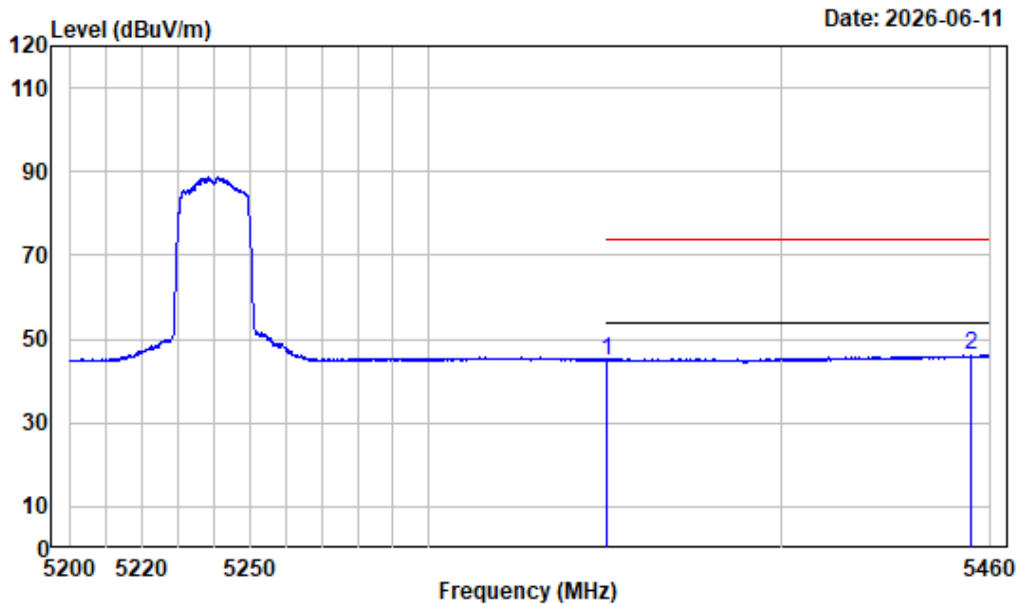

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.71	44.95	54.00	-9.05 Average
2	5454.377	-6.29	52.42	46.13	54.00	-7.87 Average


Right Band edge_Vertical_Peak_802.11ax20_5240MHz_ant1

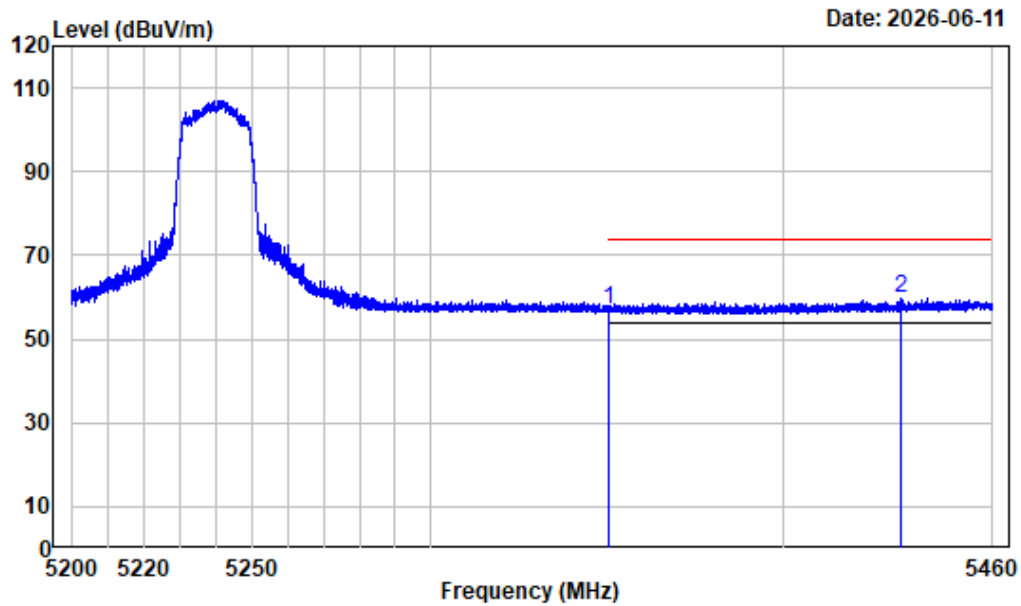

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT1-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.84	57.08	74.00	-16.92 Peak
2	5433.545	-6.41	66.20	59.79	74.00	-14.21 Peak


Right Band edge_Vertical_Average_802.11ax20_5240MHz_ant1

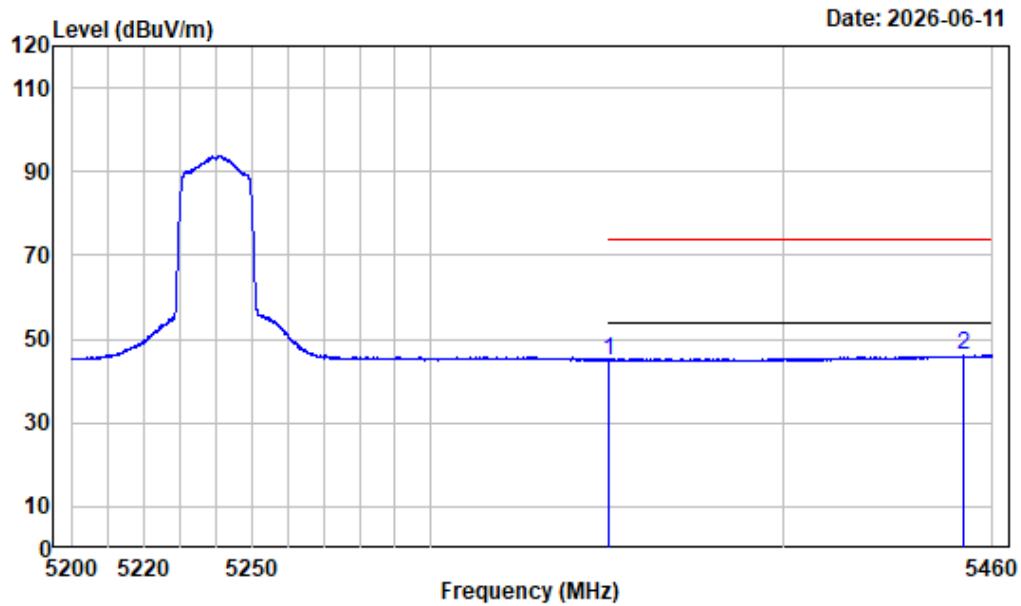

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AX20_ANT1-5240

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	
MHz	dB/m				dB
1 5350.000	-6.76	51.73	44.97	54.00	-9.03 Average
2 5451.388	-6.31	52.37	46.06	54.00	-7.94 Average


Left Band edge_Horizontal_Peak_802.11ax40_5190MHz_ant1

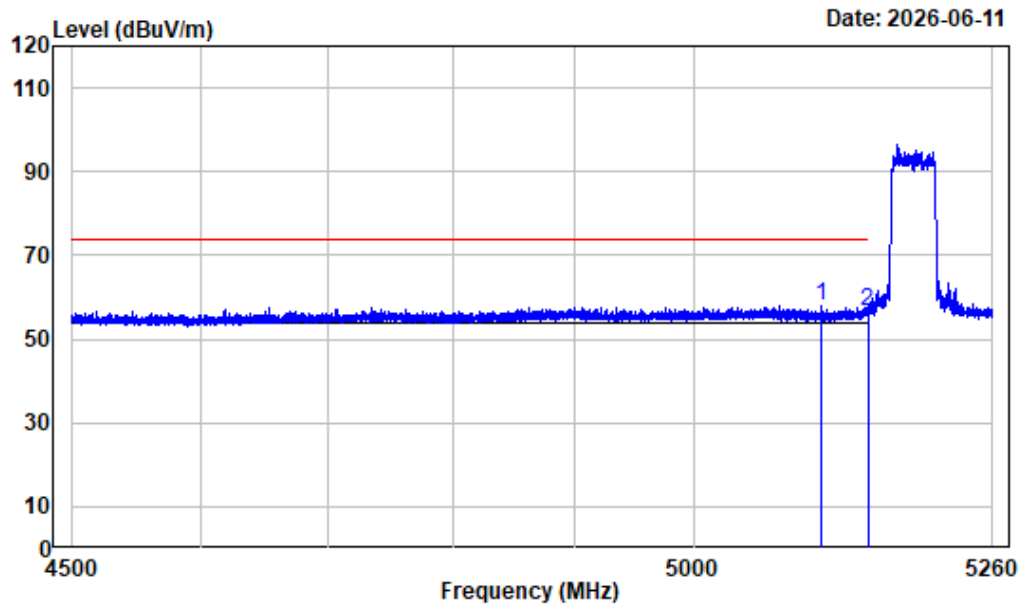

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT1-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5109.995	-7.47	65.35	57.88	74.00	-16.12	Peak
2 5150.000	-7.45	64.01	56.56	74.00	-17.44	Peak


Left Band edge_Horizontal_Average_802.11ax40_5190MHz_ant1

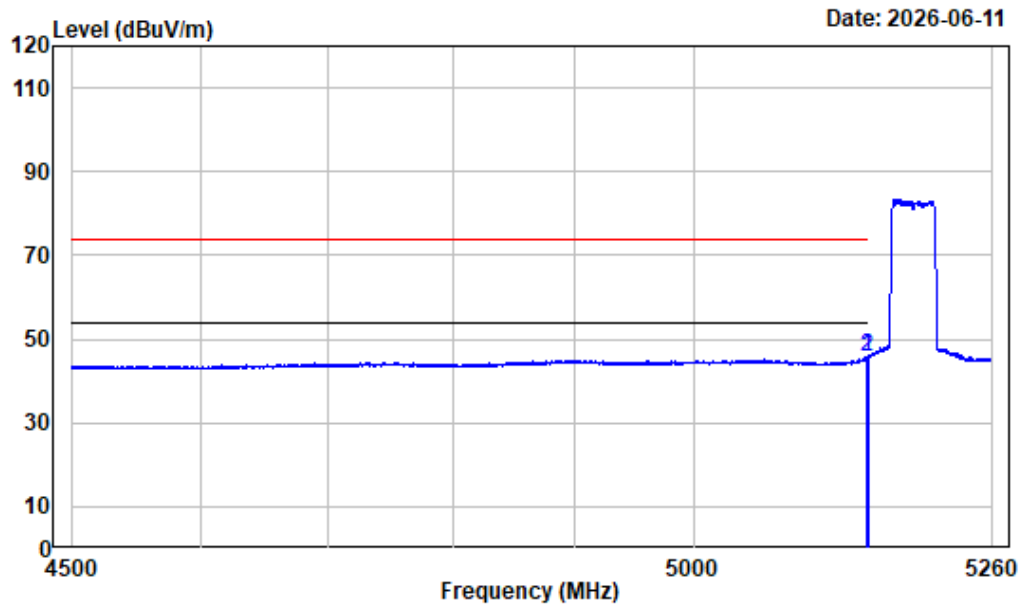

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT1-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.610	-7.45	53.13	45.68	54.00	-8.32	Average
2 5150.000	-7.45	53.08	45.63	54.00	-8.37	Average


Left Band edge_Vertical_Peak_802.11ax40_5190MHz_ant1

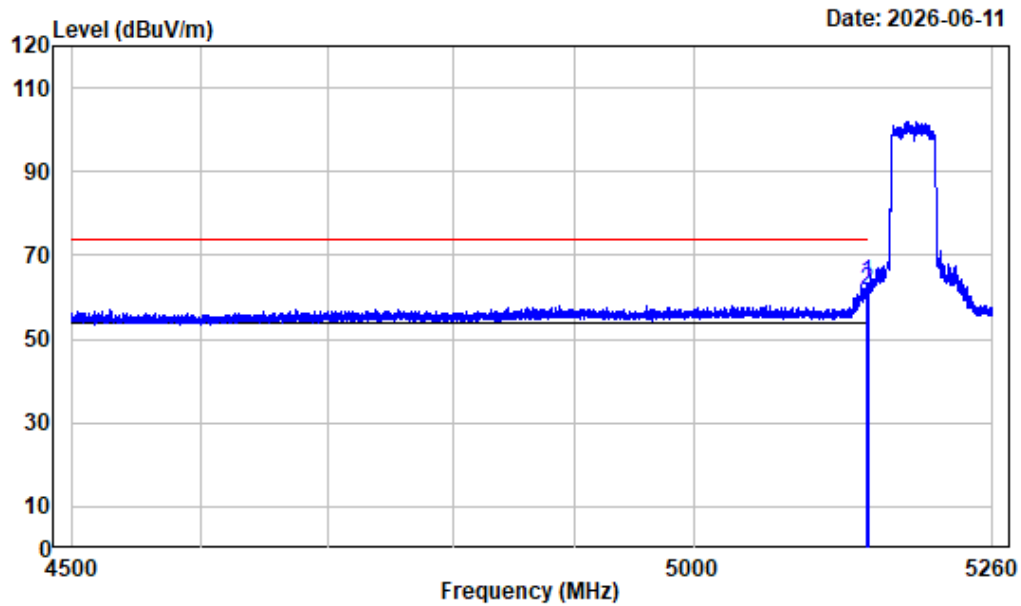

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT1-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5148.565	-7.45	70.84	63.39	74.00	-10.61	Peak
2 5150.000	-7.45	69.09	61.64	74.00	-12.36	Peak


Left Band edge_Vertical_Average_802.11ax40_5190MHz_ant1

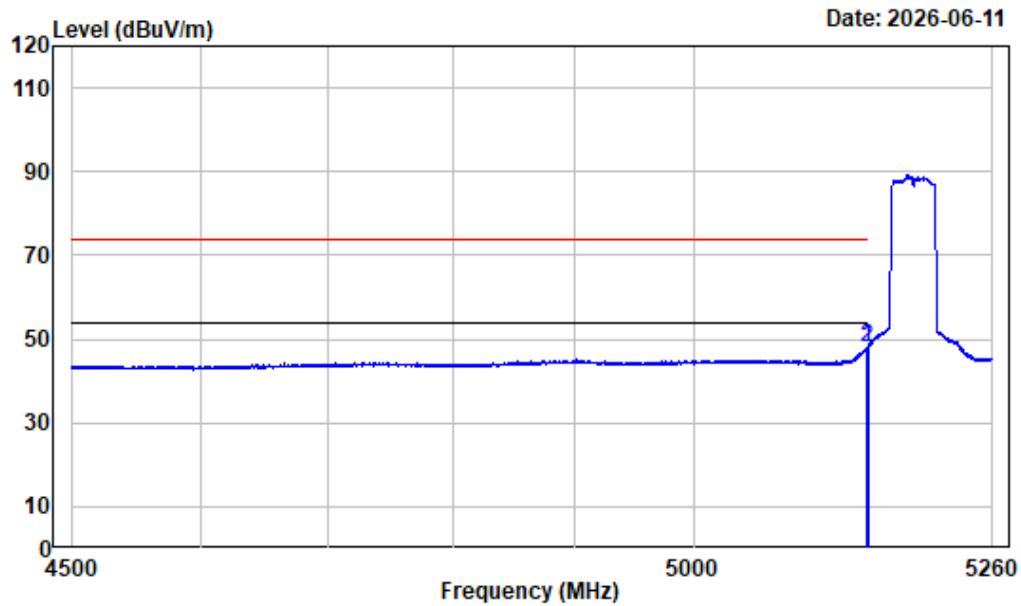

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT1-5190

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5149.705	-7.45	55.44	47.99	54.00	-6.01 Average
2	5150.000	-7.45	55.27	47.82	54.00	-6.18 Average


Right Band edge_Horizontal_Peak_802.11ax40_5230MHz_ant1

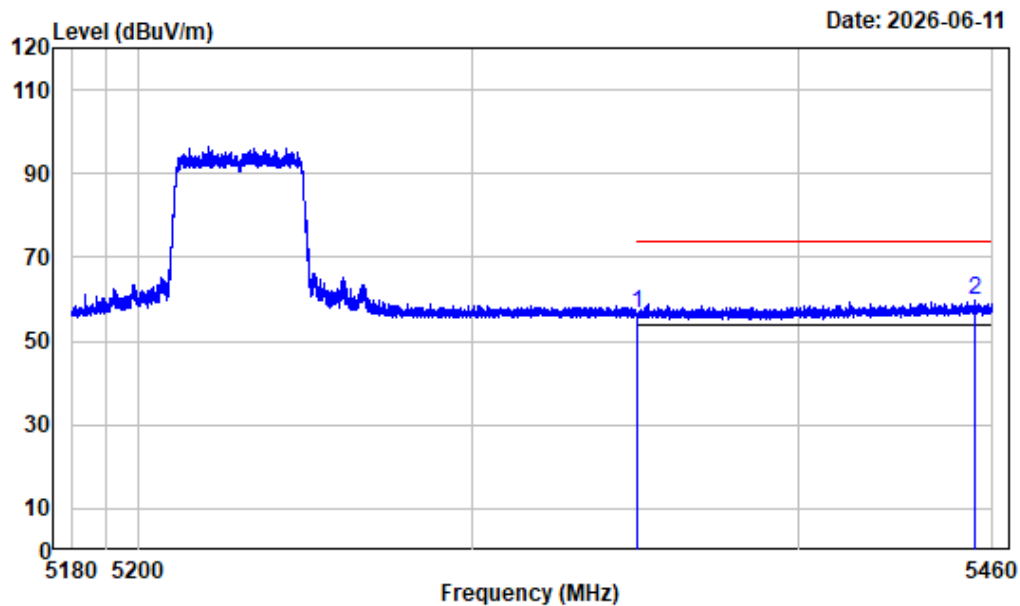

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT1-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.34	56.58	74.00	-17.42	Peak
2 5454.680	-6.29	65.96	59.67	74.00	-14.33	Peak


Right Band edge_Horizontal_Average_802.11ax40_5230MHz_ant1

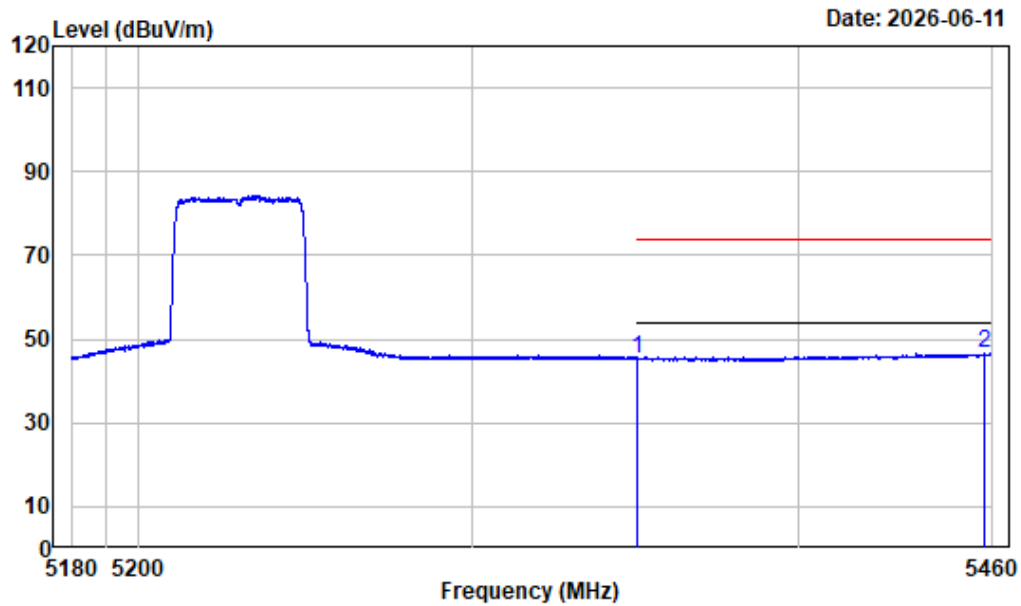

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT1-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.86	45.10	54.00	-8.90	Average
2	5457.515	-6.28	52.93	46.65	54.00	-7.35	Average


Right Band edge_Vertical_Peak_802.11ax40_5230MHz_ant1

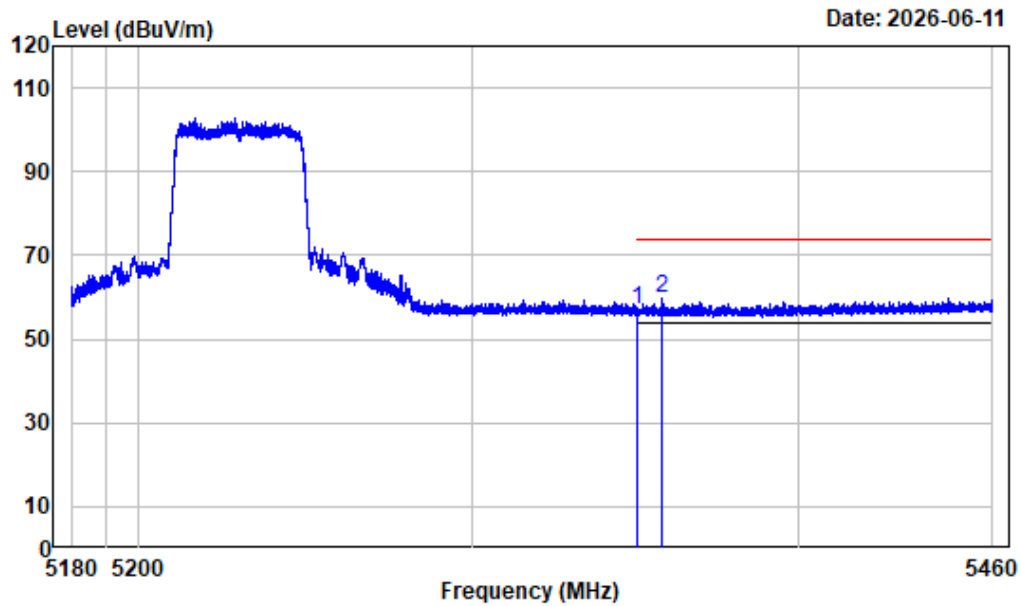

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT1-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.76	57.00	74.00	-17.00	Peak
2 5357.695	-6.73	66.46	59.73	74.00	-14.27	Peak


Right Band edge_Vertical_Average_802.11ax40_5230MHz_ant1

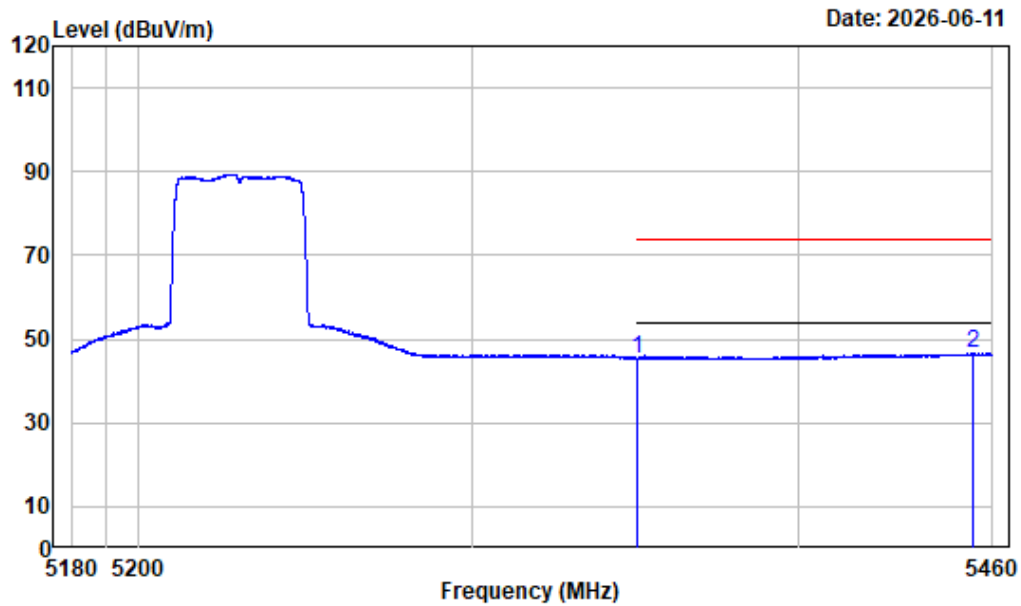

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AX40_ANT1-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.23	45.47	54.00	-8.53 Average
2	5454.190	-6.29	52.98	46.69	54.00	-7.31 Average


Left Band edge_Horizontal_Peak_802.11ax80_5210MHz_ant1

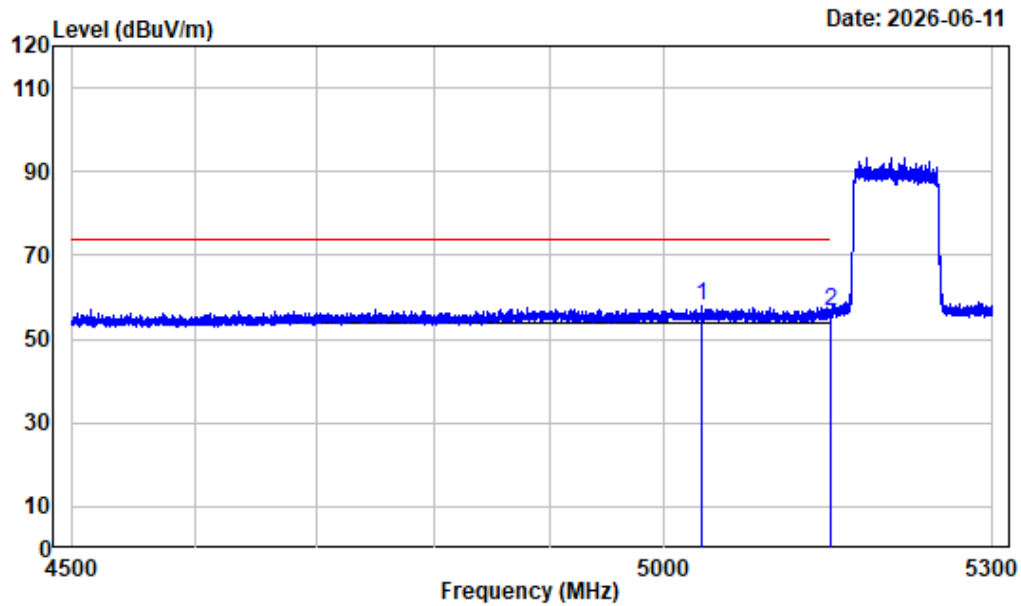

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT1-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5033.700	-7.28	65.11	57.83	74.00	-16.17 Peak
2	5150.000	-7.45	64.02	56.57	74.00	-17.43 Peak


Left Band edge_Horizontal_Average_802.11ax80_5210MHz_ant1

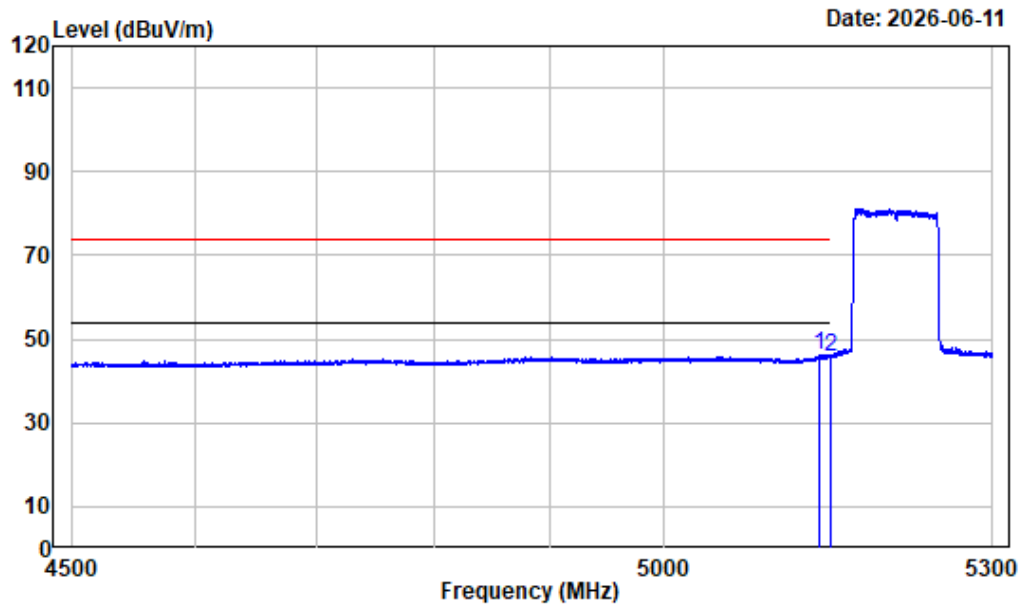

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT1-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5140.000	-7.46	53.74	46.28	54.00	-7.72 Average
2	5150.000	-7.45	53.37	45.92	54.00	-8.08 Average


Left Band edge_Vertical_Peak_802.11ax80_5210MHz_ant1

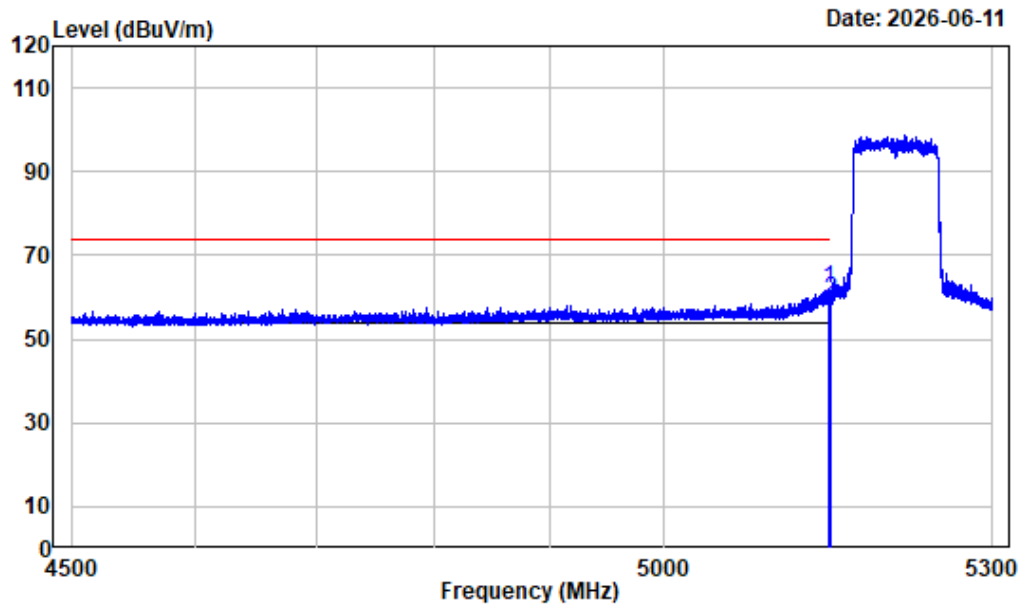

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT1-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5148.900	-7.45	69.28	61.83	74.00	-12.17	Peak
2 5150.000	-7.45	66.90	59.45	74.00	-14.55	Peak


Left Band edge_Vertical_Average_802.11ax80_5210MHz_ant0

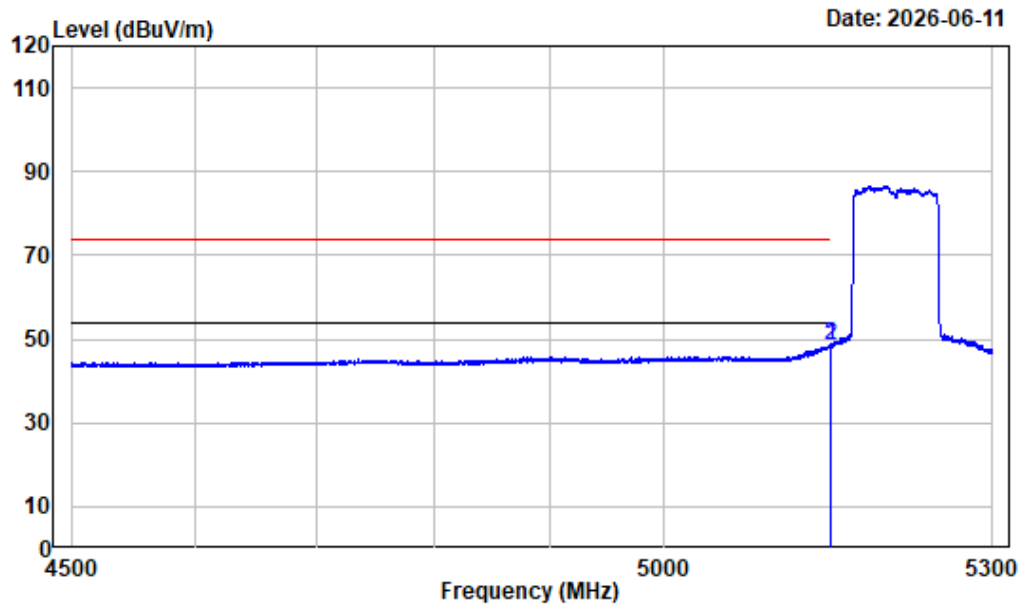

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT1-5210

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.300	-7.45	56.03	48.58	54.00	-5.42 Average
2	5150.000	-7.45	55.72	48.27	54.00	-5.73 Average


Right Band edge_Horizontal_Peak_802.11ax80_5210MHz_ant1

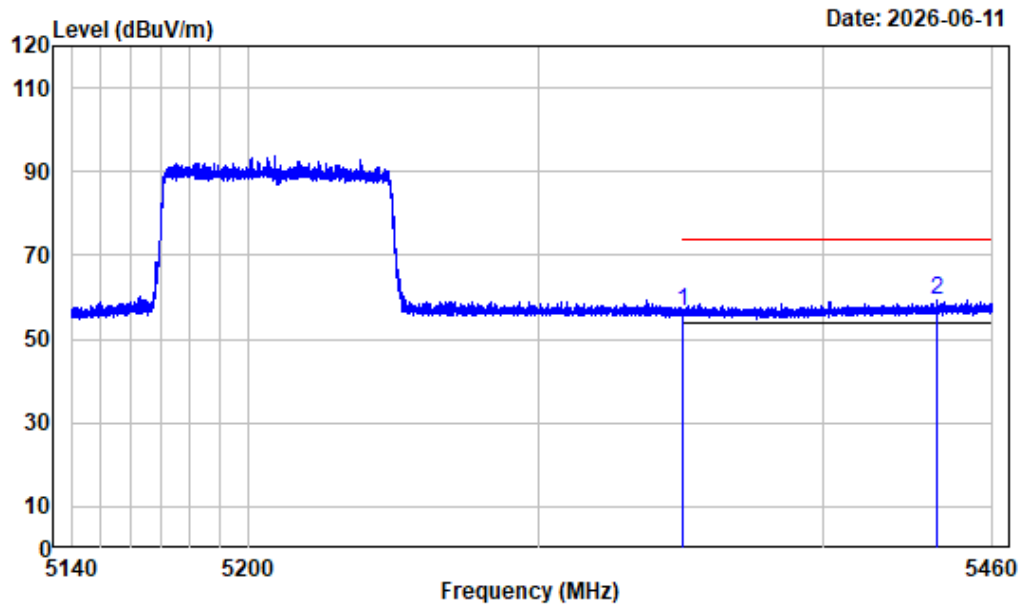

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT1-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.38	56.62	74.00	-17.38	Peak
2	5440.240	-6.37	65.64	59.27	74.00	-14.73	Peak


Right Band edge_Horizontal_Average_802.11ax80_5210MHz_ant1

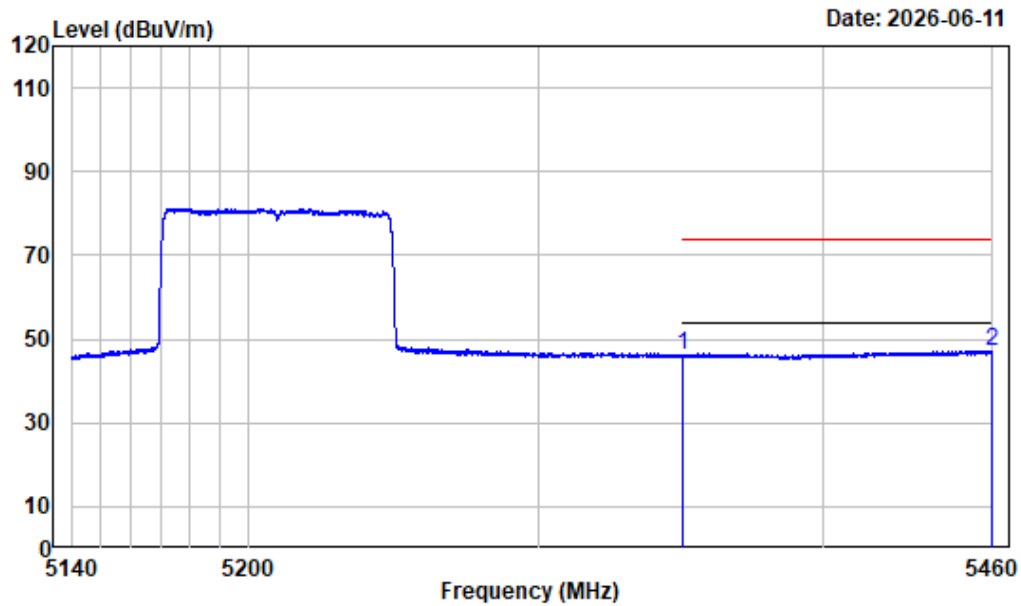

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT1-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.80	46.04	54.00	-7.96 Average
2	5459.880	-6.26	53.51	47.25	54.00	-6.75 Average


Right Band edge_Vertical_Peak_802.11ax80_5210MHz_ant1

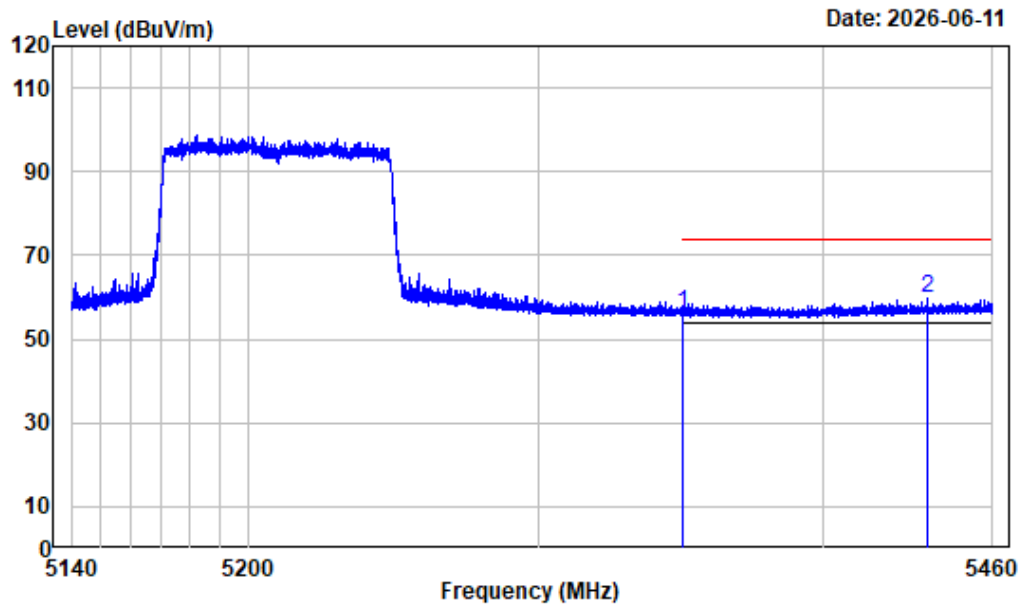

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT1-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.02	56.26	74.00	-17.74 Peak
2	5436.840	-6.39	66.07	59.68	74.00	-14.32 Peak

Right Band edge_Vertical_Average_802.11ax80_5210MHz_ant1

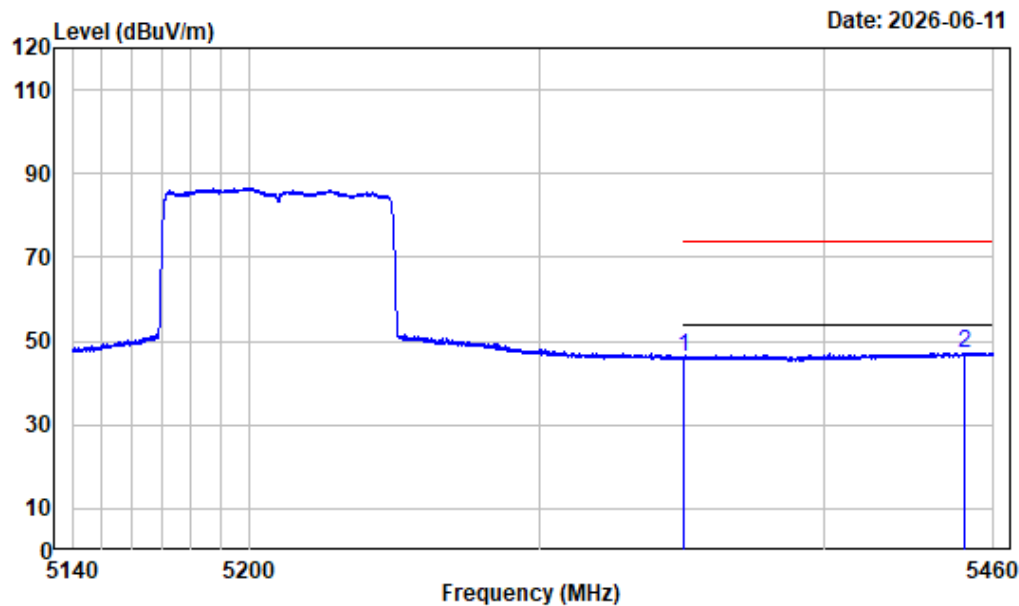


Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AX80_ANT1-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.73	45.97	54.00	-8.03 Average
2	5449.960	-6.31	53.58	47.27	54.00	-6.73 Average

5725-5850MHz:


Left Band edge_Horizontal_Peak_802.11a_5745MHz_ant0

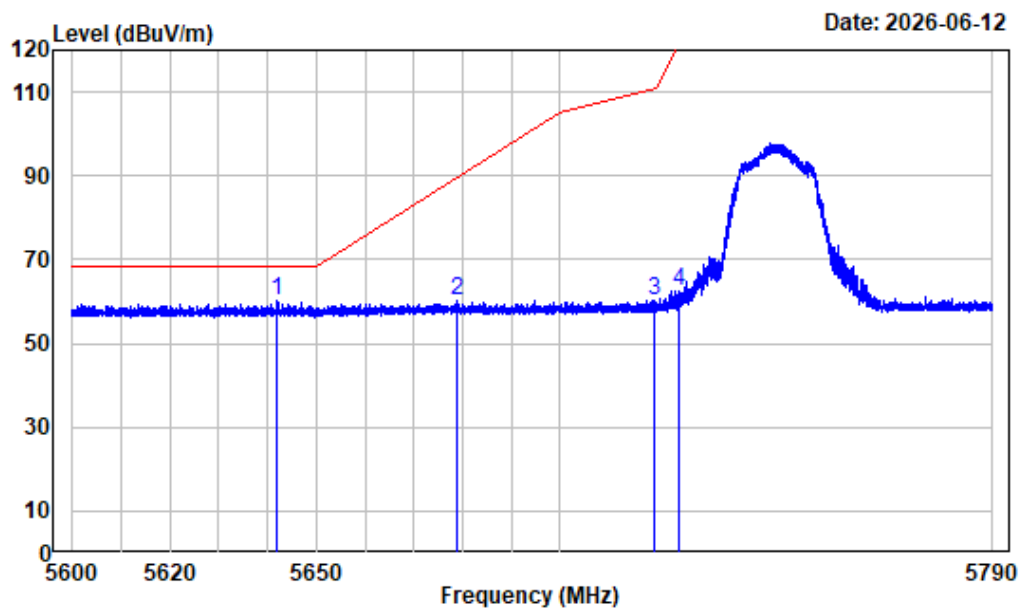

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5745

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5642.014	-5.94	66.14	60.20	68.20	-8.00	Peak
2 5678.803	-5.82	65.97	60.15	89.55	-29.40	Peak
3 5719.629	-5.58	65.71	60.13	110.70	-50.57	Peak
4 5724.545	-5.54	68.03	62.49	121.16	-58.67	Peak


Left Band edge_Vertical_Peak_802.11a_5745MHz_ant0

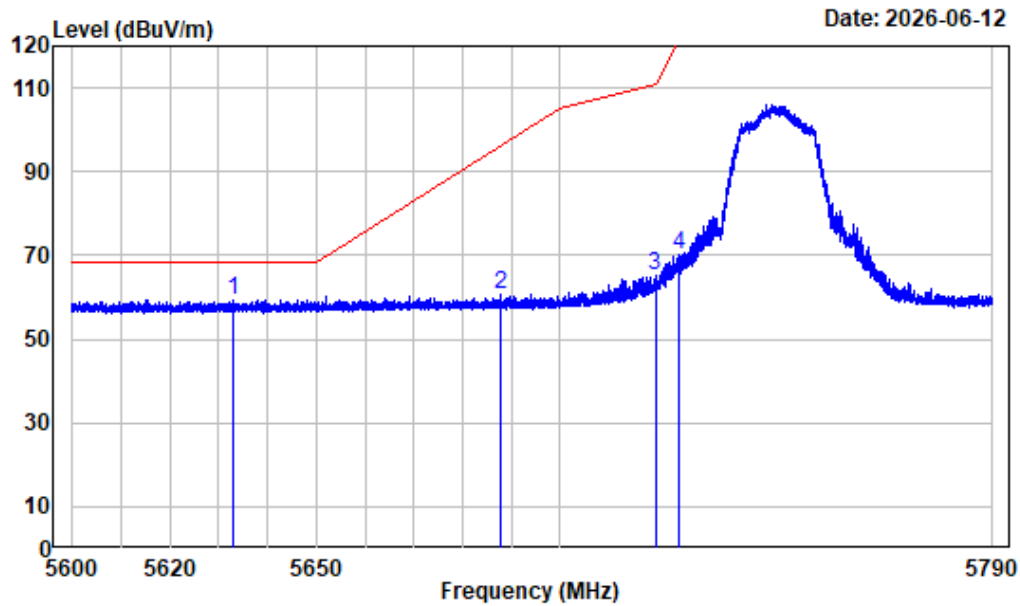

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5632.894	-6.00	65.53	59.53	68.20	-8.67	Peak
2	5687.946	-5.80	66.31	60.51	96.31	-35.80	Peak
3	5719.700	-5.58	70.83	65.25	110.72	-45.47	Peak
4	5724.498	-5.54	75.63	70.09	121.05	-50.96	Peak


Right Band edge_Horizontal_Peak_802.11a_5825MHz_ant0

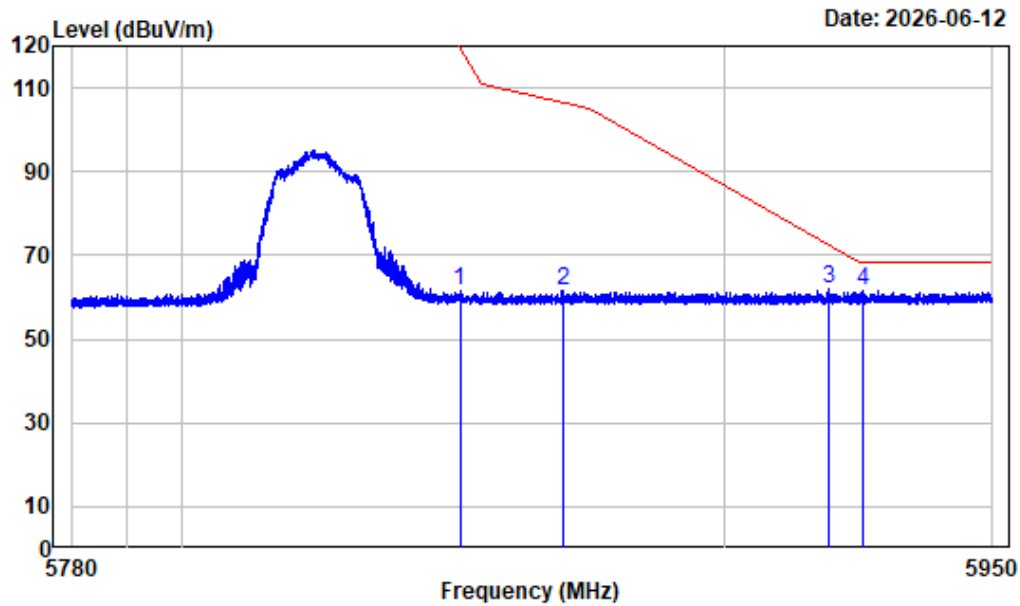

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5851.103	-4.70	66.26	61.56	119.68	-58.12 Peak
2 5870.313	-4.62	66.27	61.65	106.51	-44.86 Peak
3 5919.336	-4.50	66.39	61.89	72.38	-10.49 Peak
4 5925.754	-4.49	66.04	61.55	68.20	-6.65 Peak


Right Band edge_Vertical_Peak_802.11a_5825MHz_ant0

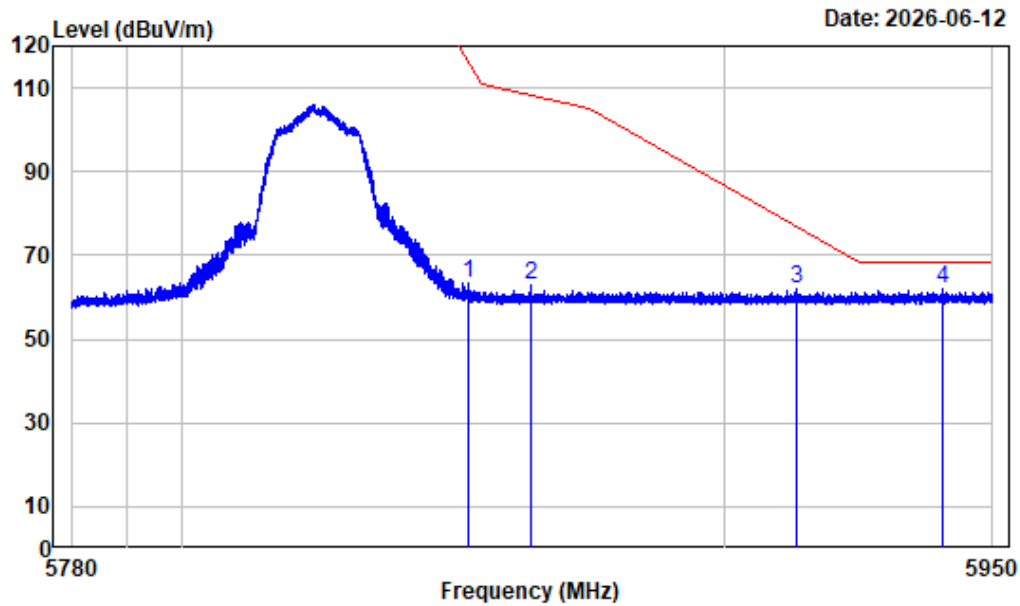

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5852.569	-4.69	68.13	63.44	116.34	-52.90 Peak
2 5864.256	-4.64	67.64	63.00	108.21	-45.21 Peak
3 5913.450	-4.50	66.53	62.03	76.72	-14.69 Peak
4 5940.799	-4.48	66.33	61.85	68.20	-6.35 Peak


Left Band edge_Horizontal_Peak_802.11ac-VHT20_5745MHz_ant0

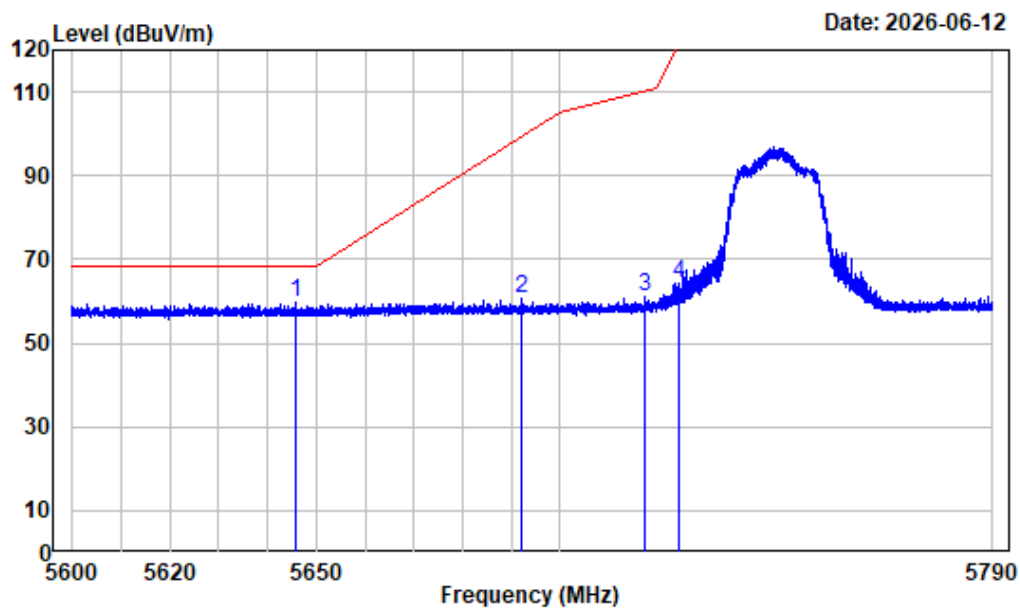

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20_ANT0-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5645.671	-5.92	65.63	59.71	68.20	-8.49	Peak
2	5691.936	-5.80	66.32	60.52	99.25	-38.73	Peak
3	5717.681	-5.60	66.64	61.04	110.15	-49.11	Peak
4	5724.664	-5.54	69.75	64.21	121.43	-57.22	Peak


Left Band edge_Vertical_Peak_802.11ac-VHT20_5745MHz_ant0

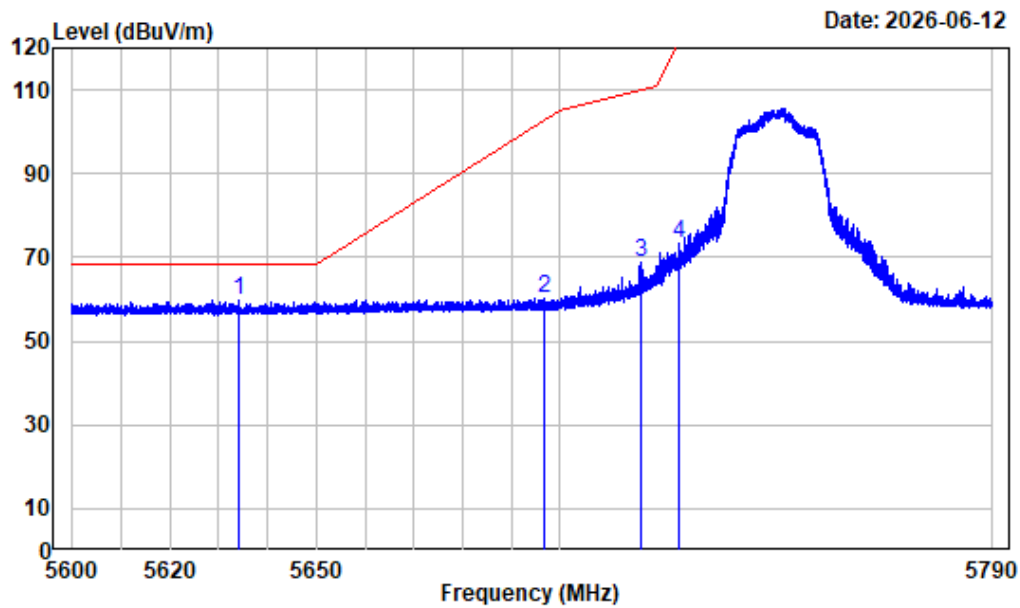

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20_ANT0-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5633.915	-5.99	65.76	59.77	68.20	-8.43	Peak
2	5696.757	-5.78	66.06	60.28	102.81	-42.53	Peak
3	5716.684	-5.62	74.33	68.71	109.87	-41.16	Peak
4	5724.711	-5.54	78.67	73.13	121.54	-48.41	Peak


Right Band edge_Horizontal_Peak_802.11ac-VHT20_5825MHz_ant0

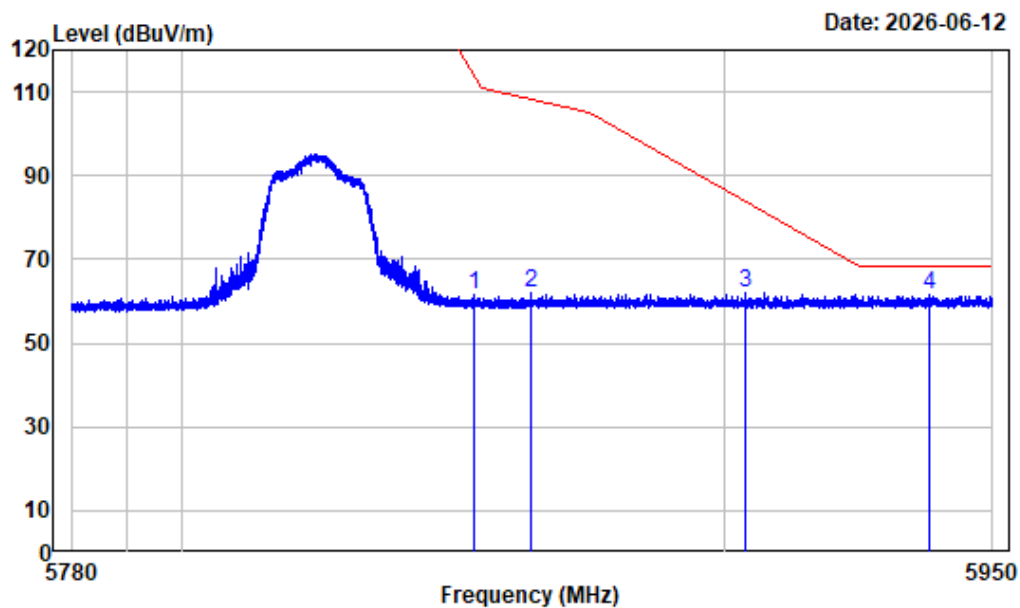

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20_ANT0-5825

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.631	-4.69	66.08	61.39	113.92	-52.53 Peak
2	5864.299	-4.64	66.55	61.91	108.19	-46.28 Peak
3	5903.994	-4.51	66.67	62.16	83.71	-21.55 Peak
4	5938.334	-4.49	65.92	61.43	68.20	-6.77 Peak


Right Band edge_Vertical_Peak_802.11ac-VHT20_5825MHz_ant0

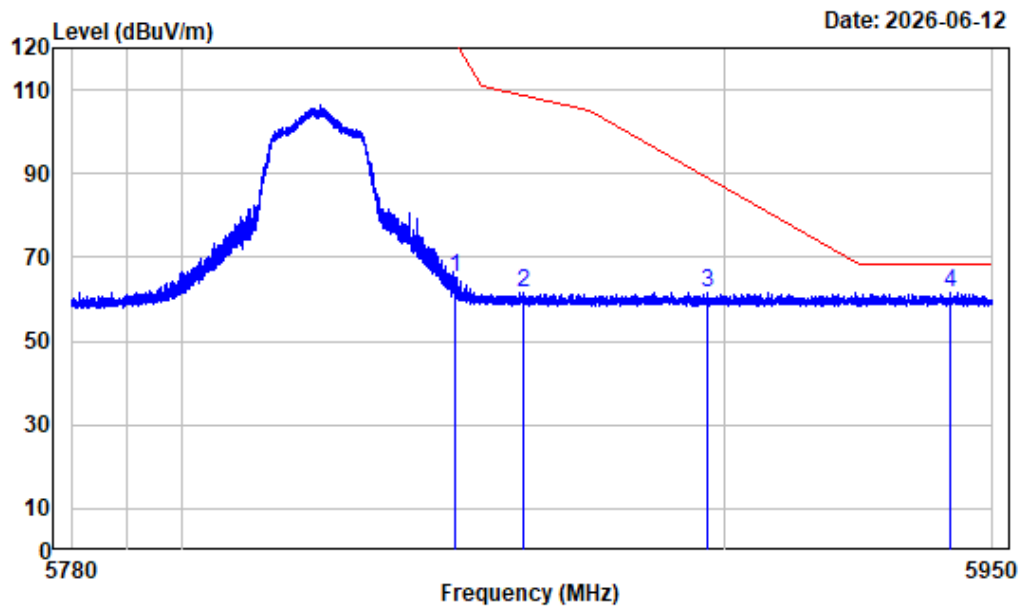

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20_ANT0-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.380	-4.70	70.09	65.39	121.33	-55.94	Peak
2	5862.939	-4.65	66.26	61.61	108.57	-46.96	Peak
3	5896.811	-4.52	66.31	61.79	89.02	-27.23	Peak
4	5942.201	-4.48	66.15	61.67	68.20	-6.53	Peak


Left Band edge_Horizontal_Peak_802.11ac-VHT40_5755MHz_ant0

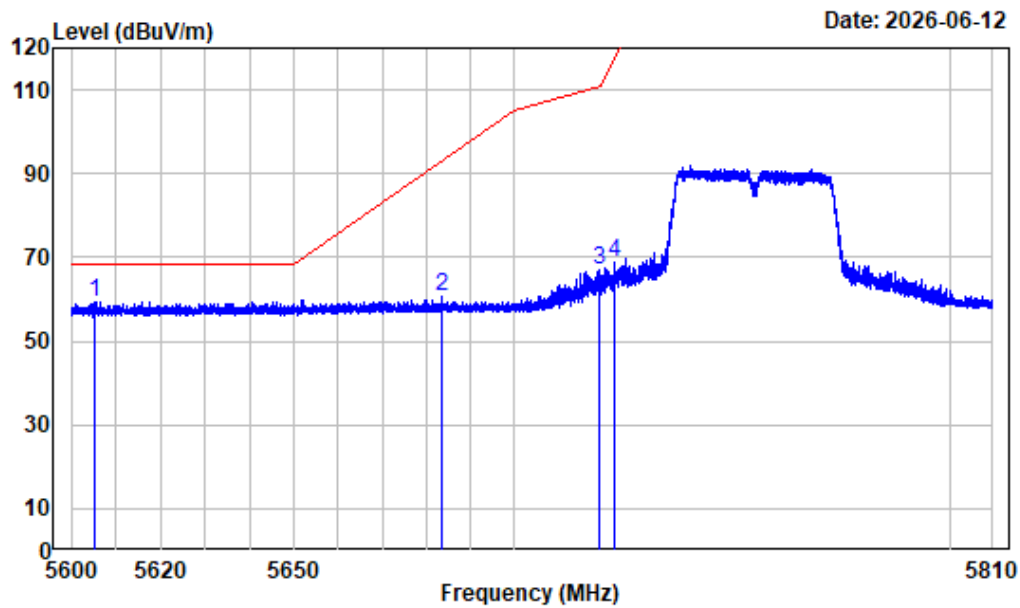

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40_ANT0-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5605.171	-6.18	65.69	59.51	68.20	-8.69	Peak
2	5683.632	-5.82	66.39	60.57	93.12	-32.55	Peak
3	5719.359	-5.58	72.61	67.03	110.62	-43.59	Peak
4	5722.981	-5.55	74.32	68.77	117.60	-48.83	Peak


Left Band edge_Vertical_Peak_802.11ac-VHT40_5755MHz_ant0

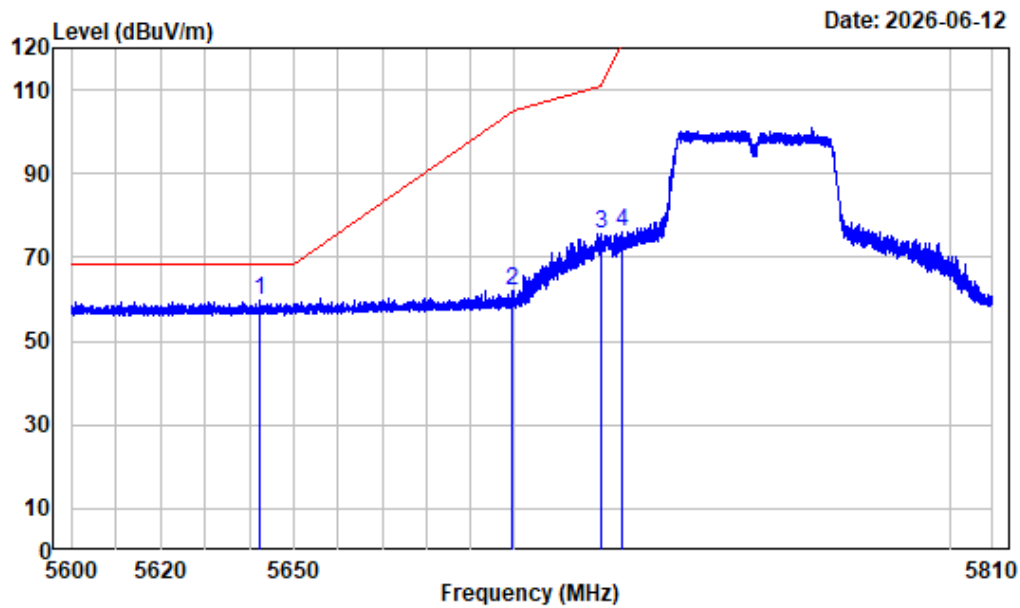

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40_ANT0-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5642.236	-5.94	65.57	59.63	68.20	-8.57	Peak
2	5699.382	-5.78	67.91	62.13	104.74	-42.61	Peak
3	5719.752	-5.58	81.32	75.74	110.73	-34.99	Peak
4	5724.425	-5.54	81.70	76.16	120.89	-44.73	Peak


Right Band edge_Horizontal_Peak_802.11ac-VHT40_5795MHz_ant0

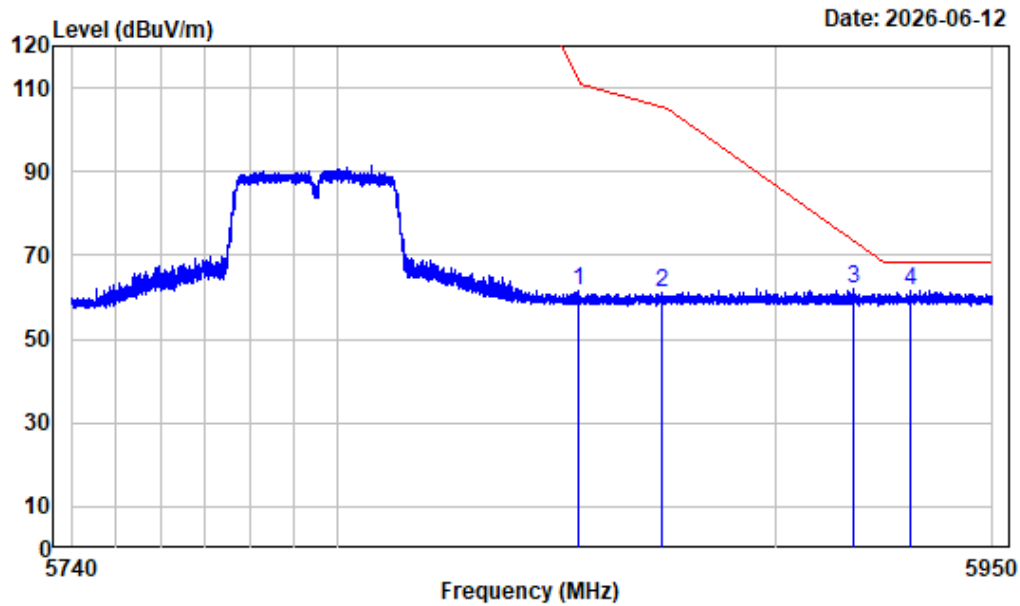

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40_ANT0-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5854.817	-4.68	66.28	61.60	111.22	-49.62	Peak
2	5873.928	-4.60	65.84	61.24	105.50	-44.26	Peak
3	5917.922	-4.50	66.48	61.98	73.42	-11.44	Peak
4	5930.864	-4.49	66.25	61.76	68.20	-6.44	Peak


Right Band edge_Vertical_Peak_802.11ac-VHT40_5795MHz_ant0

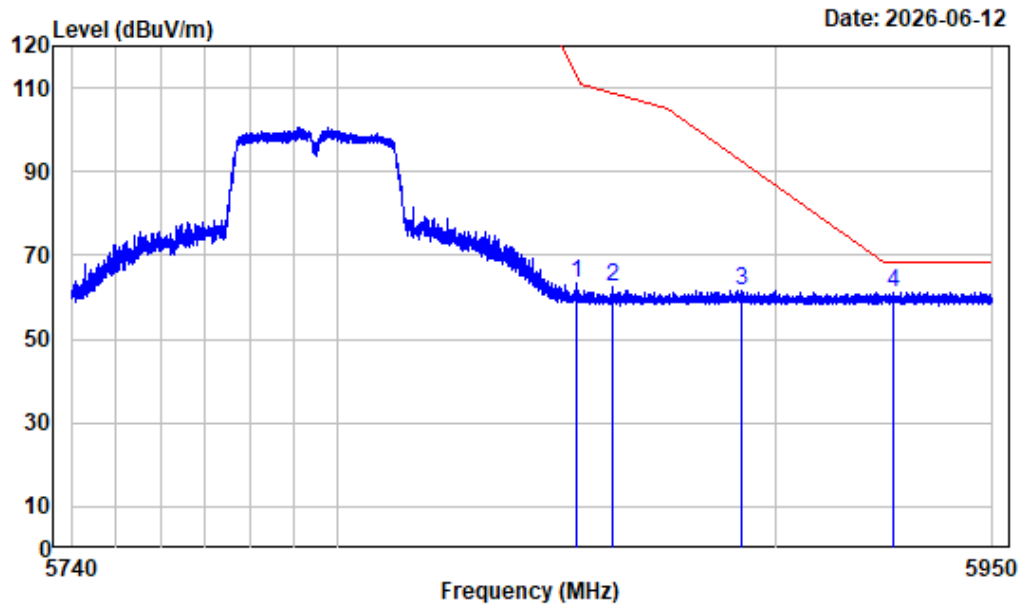

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40_ANT0-5795

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5854.397	-4.68	68.27	63.59	112.17	-48.58 Peak
2	5862.272	-4.65	67.01	62.36	108.76	-46.40 Peak
3	5892.014	-4.54	66.18	61.64	92.57	-30.93 Peak
4	5927.084	-4.49	65.67	61.18	68.20	-7.02 Peak


Left Band edge_Horizontal_Peak_802.11ac-VHT80_5775MHz_ant0

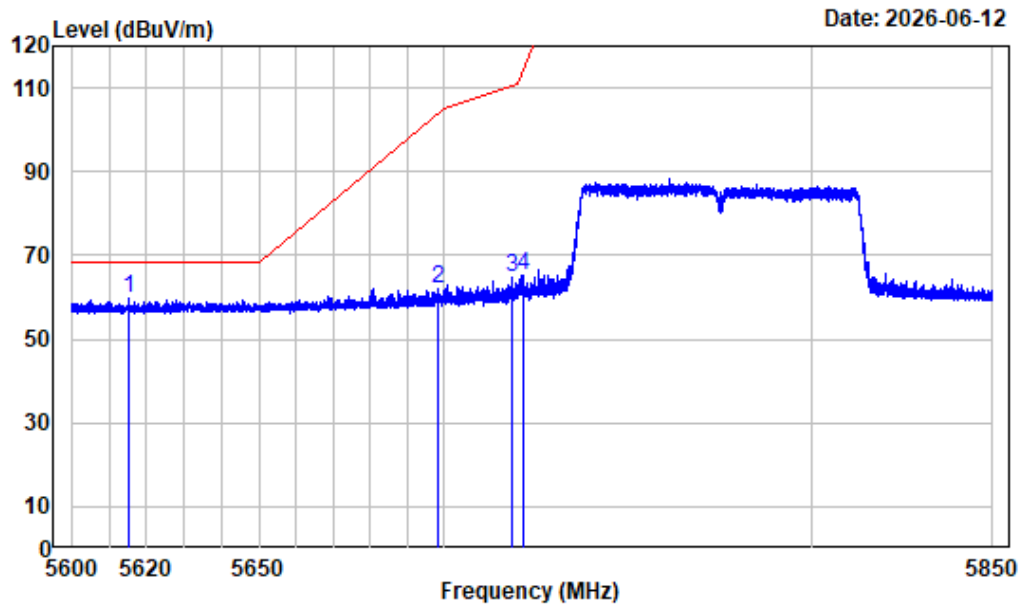

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80_ANT0-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5615.219	-6.11	65.72	59.61	68.20	-8.59	Peak
2	5698.094	-5.78	67.91	62.13	103.80	-41.67	Peak
3	5718.313	-5.59	70.28	64.69	110.33	-45.64	Peak
4	5721.219	-5.57	70.75	65.18	113.58	-48.40	Peak


Left Band edge_Vertical_Peak_802.11ac-VHT80_5775MHz_ant0

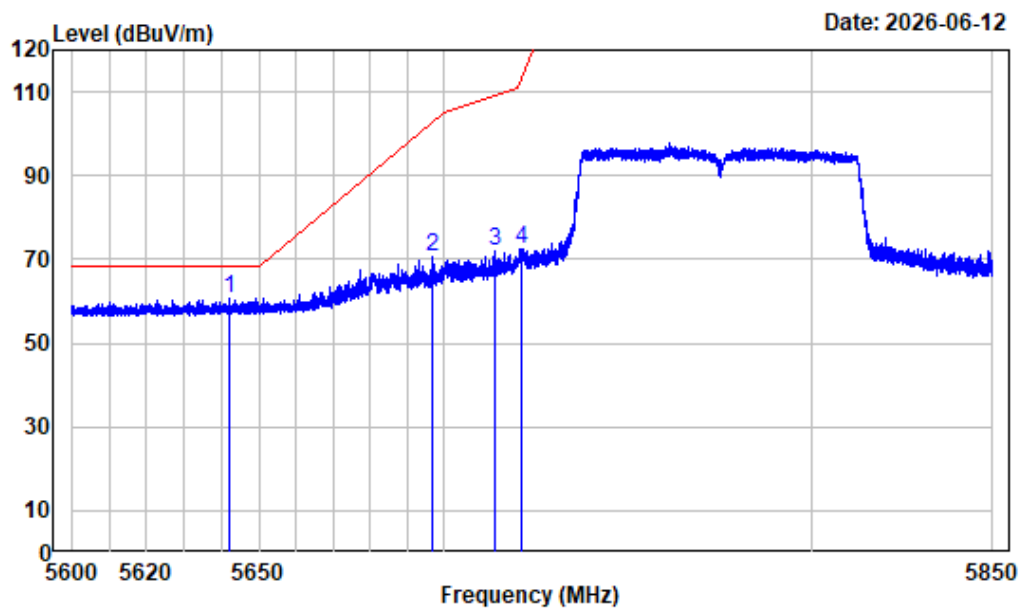

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80_ANT0-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5641.906	-5.94	66.83	60.89	68.20	-7.31	Peak
2	5696.438	-5.78	76.30	70.52	102.57	-32.05	Peak
3	5713.438	-5.64	77.58	71.94	108.96	-37.02	Peak
4	5720.688	-5.57	78.04	72.47	112.37	-39.90	Peak


Right Band edge_Horizontal_Peak_802.11ac-VHT80_5775MHz_ant0

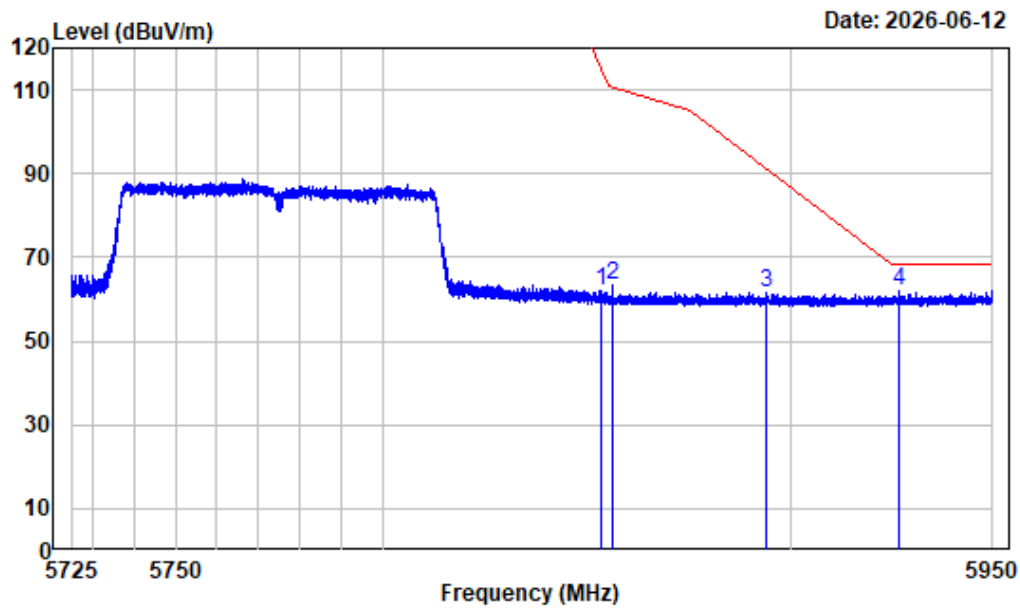

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80_ANT0-5775

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5853.250	-4.68	66.80	62.12	114.79	-52.67 Peak
2 5856.259	-4.67	68.18	63.51	110.45	-46.94 Peak
3 5894.031	-4.52	66.19	61.67	91.08	-29.41 Peak
4 5926.685	-4.49	66.57	62.08	68.20	-6.12 Peak


Right Band edge_Vertical_Peak_802.11ac-VHT80_5775MHz_ant0

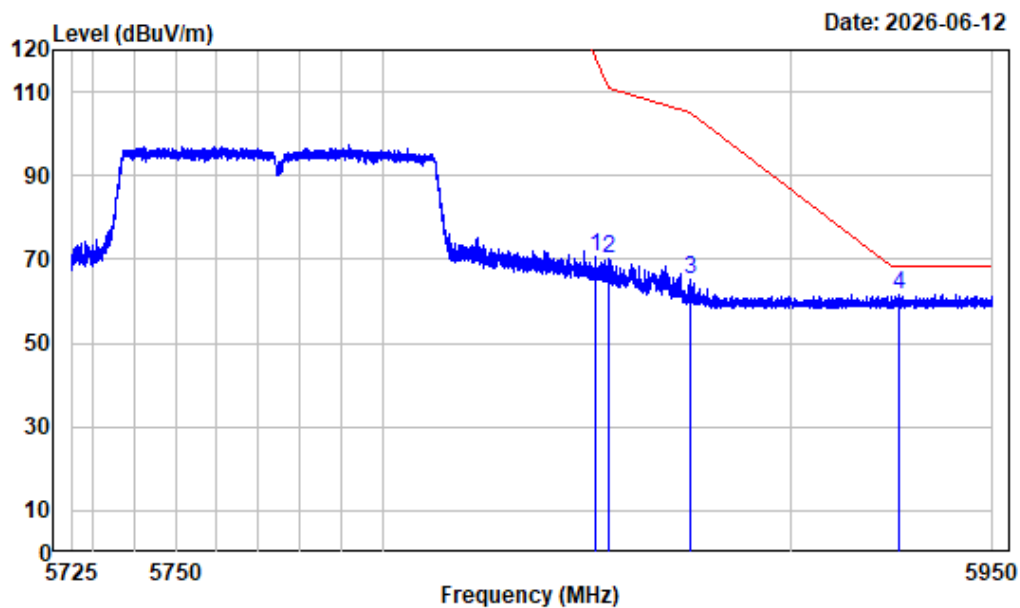

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80_ANT0-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.069	-4.69	75.26	70.57	117.48	-46.91	Peak
2	5855.416	-4.68	74.90	70.22	110.68	-40.46	Peak
3	5875.075	-4.61	69.80	65.19	105.14	-39.95	Peak
4	5926.656	-4.49	66.23	61.74	68.20	-6.46	Peak


Left Band edge_Horizontal_Peak_802.11ax20_5745MHz_ant0

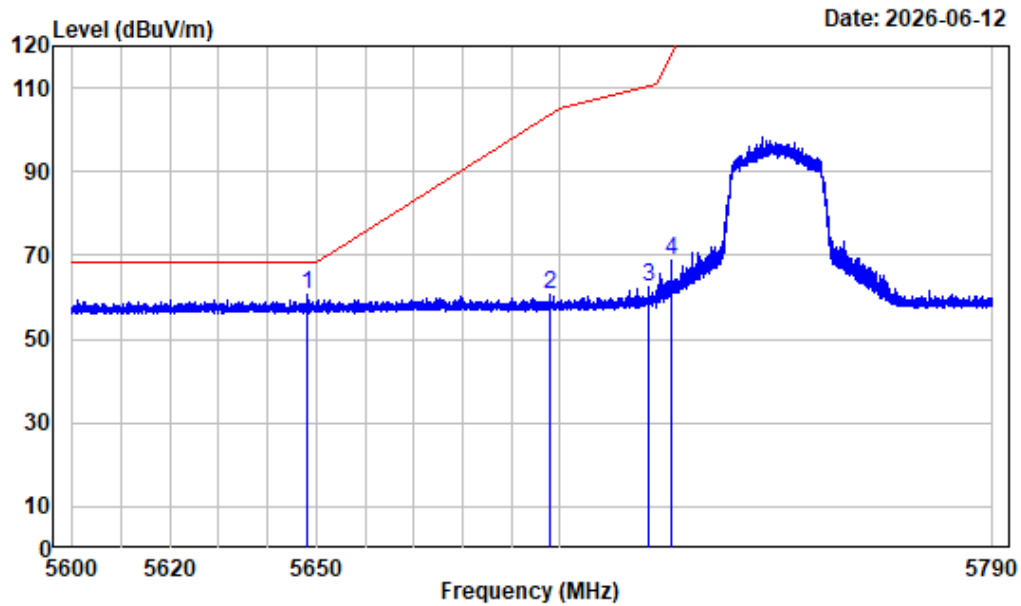

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20_ANT0-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5648.212	-5.89	66.35	60.46	68.20	-7.74	Peak
2	5698.087	-5.78	66.66	60.88	103.79	-42.91	Peak
3	5718.180	-5.60	68.20	62.60	110.29	-47.69	Peak
4	5723.120	-5.55	74.33	68.78	117.92	-49.14	Peak


Left Band edge_Vertical_Peak_802.11ax20_5745MHz_ant0

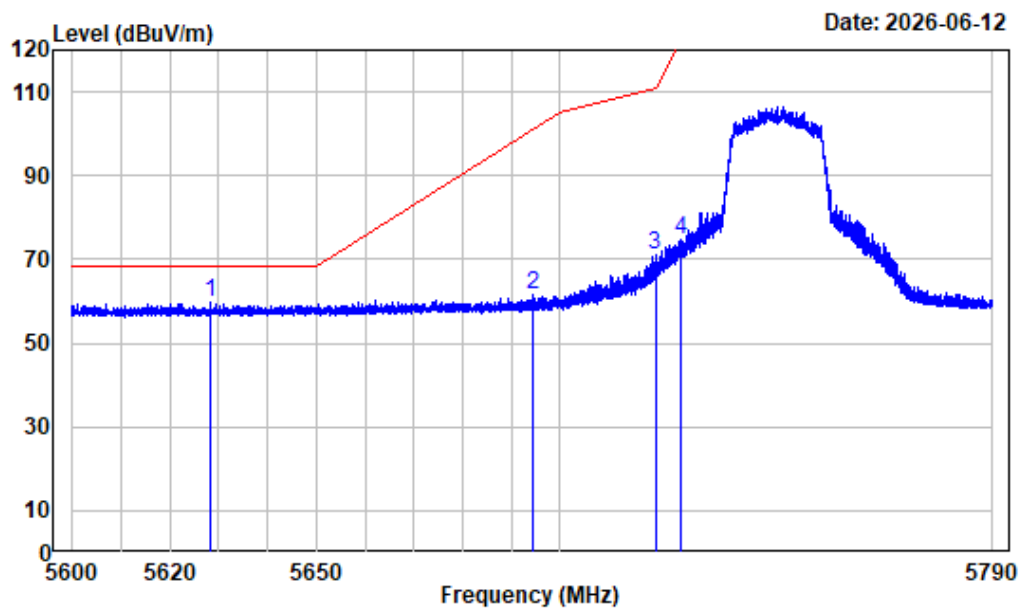

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20_ANT0-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5628.381	-6.03	65.59	59.56	68.20	-8.64	Peak
2	5694.240	-5.79	67.50	61.71	100.95	-39.24	Peak
3	5719.700	-5.58	76.68	71.10	110.72	-39.62	Peak
4	5724.830	-5.54	80.22	74.68	121.81	-47.13	Peak


Right Band edge_Horizontal_Peak_802.11ax20_5825MHz_ant0

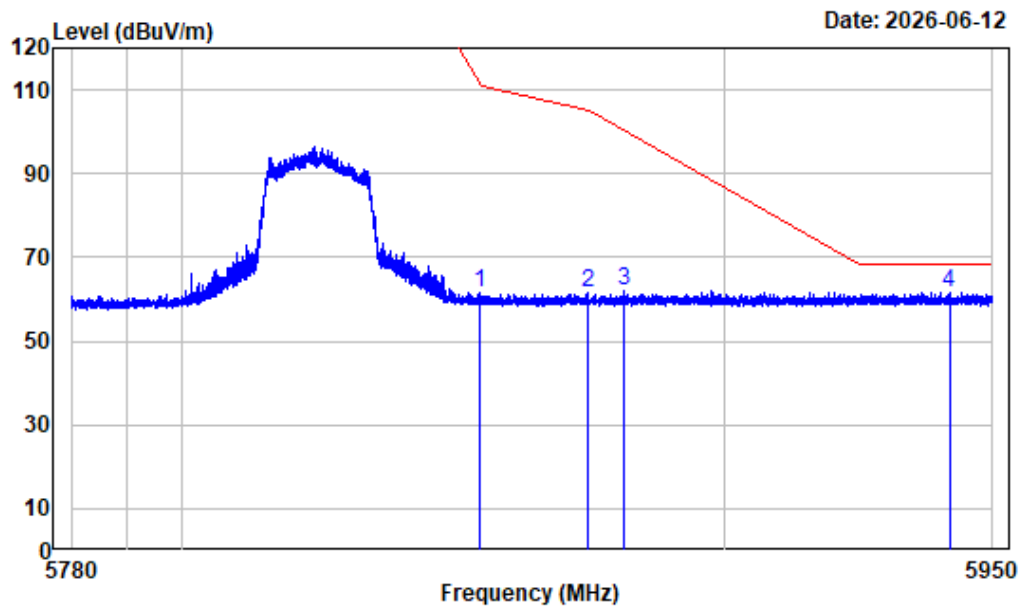

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20_ANT0-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5854.885	-4.68	66.39	61.71	111.06	-49.35	Peak
2	5874.584	-4.60	66.08	61.48	105.32	-43.84	Peak
3	5881.299	-4.57	66.64	62.07	100.52	-38.45	Peak
4	5941.925	-4.48	66.24	61.76	68.20	-6.44	Peak


Right Band edge_Vertical_Peak_802.11ax20_5825MHz_ant0

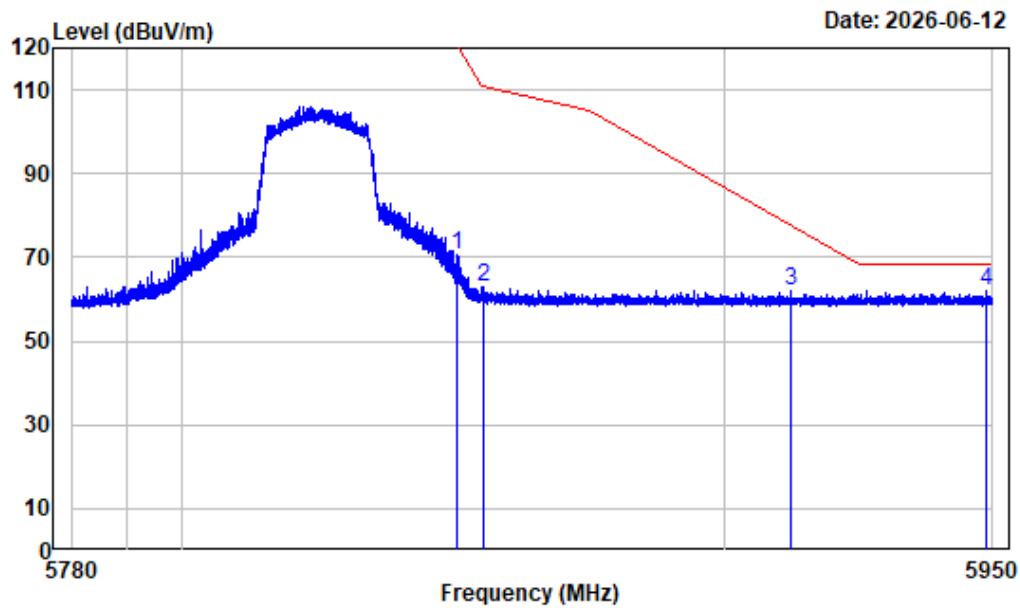

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20_ANT0-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.507	-4.70	75.48	70.78	121.04	-50.26	Peak
2	5855.565	-4.68	67.59	62.91	110.64	-47.73	Peak
3	5912.281	-4.50	66.56	62.06	77.58	-15.52	Peak
4	5948.938	-4.48	66.48	62.00	68.20	-6.20	Peak


Left Band edge_Horizontal_Peak_802.11ax40_5755MHz_ant0

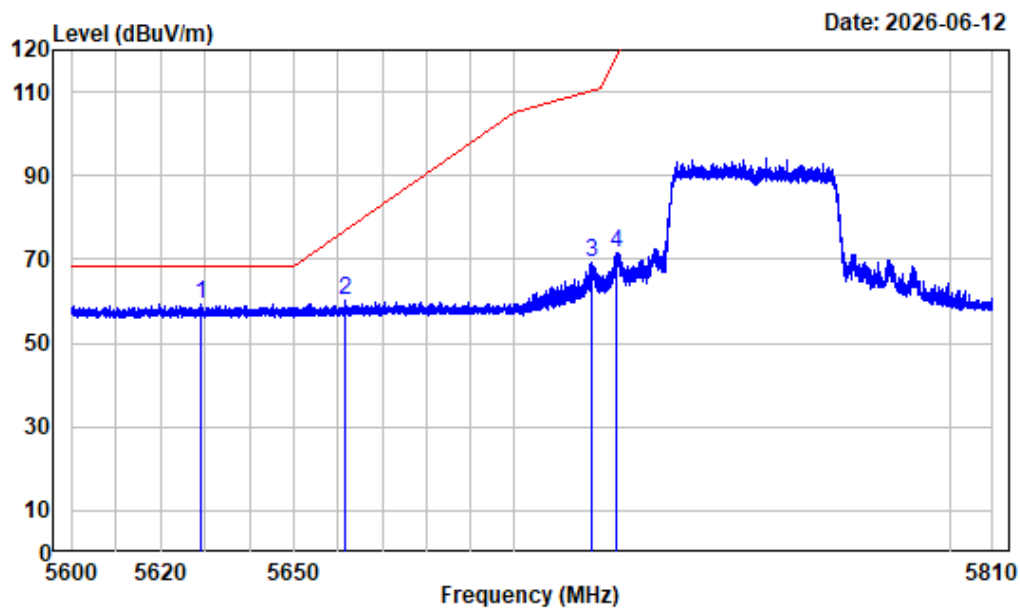

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5629.059	-6.03	65.52	59.49	68.20	-8.71	Peak
2	5661.556	-5.86	65.90	60.04	76.78	-16.74	Peak
3	5717.626	-5.60	74.77	69.17	110.14	-40.97	Peak
4	5723.375	-5.55	77.12	71.57	118.50	-46.93	Peak


Left Band edge_Vertical_Peak_802.11ax40_5755MHz_ant0

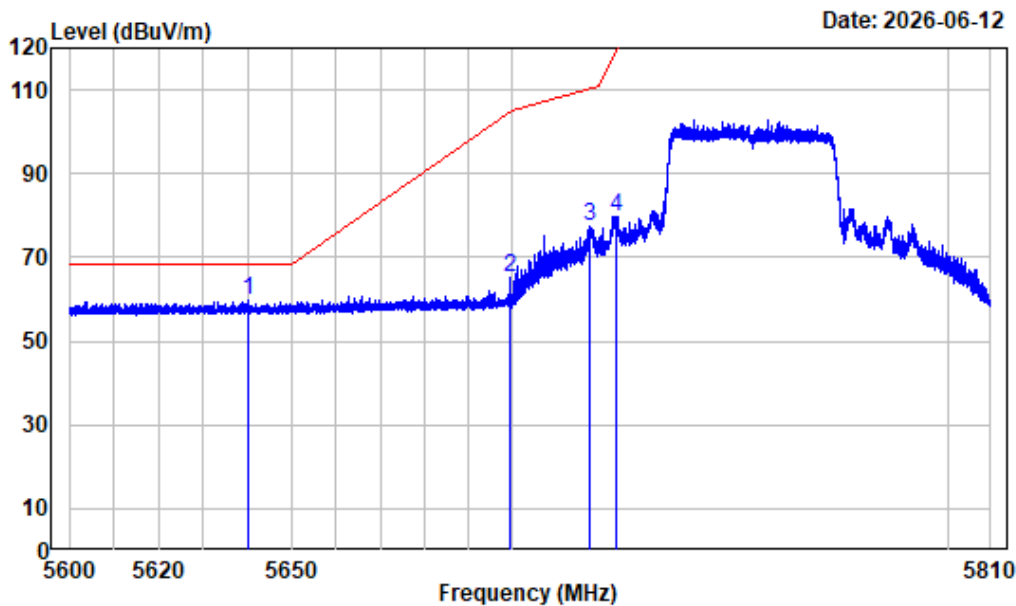

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5640.346	-5.95	65.66	59.71	68.20	-8.49	Peak
2	5699.514	-5.78	71.16	65.38	104.84	-39.46	Peak
3	5717.731	-5.60	83.17	77.57	110.17	-32.60	Peak
4	5723.690	-5.54	85.41	79.87	119.21	-39.34	Peak


Right Band edge_Horizontal_Peak_802.11ax40_5795MHz_ant0

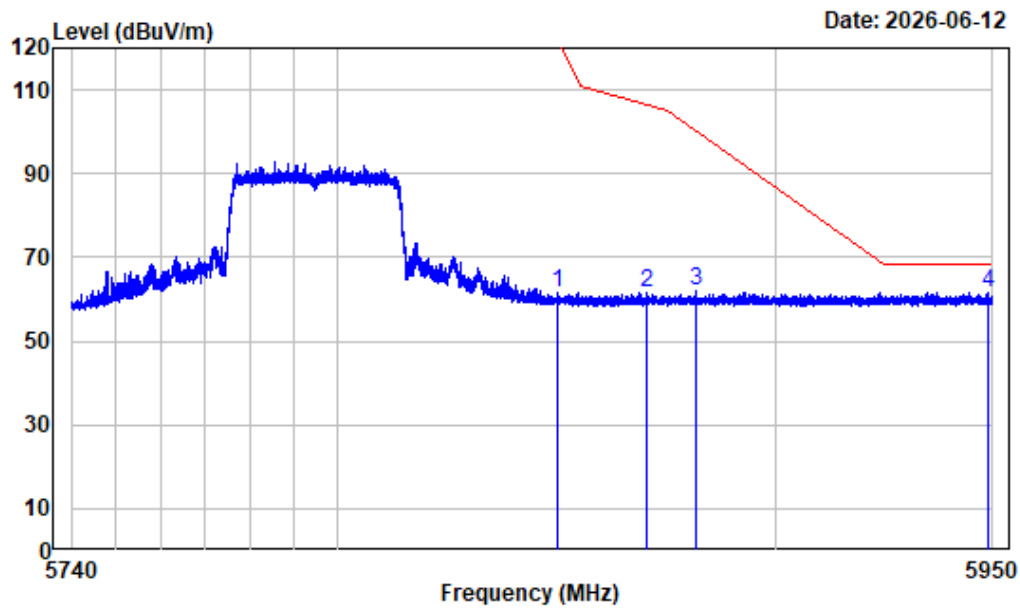

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5795

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5850.066	-4.70	66.30	61.60	122.05	-60.45 Peak
2 5870.410	-4.62	66.37	61.75	106.48	-44.73 Peak
3 5881.487	-4.57	66.39	61.82	100.38	-38.56 Peak
4 5948.845	-4.48	66.16	61.68	68.20	-6.52 Peak


Right Band edge_Vertical_Peak_802.11ax40_5795MHz_ant0

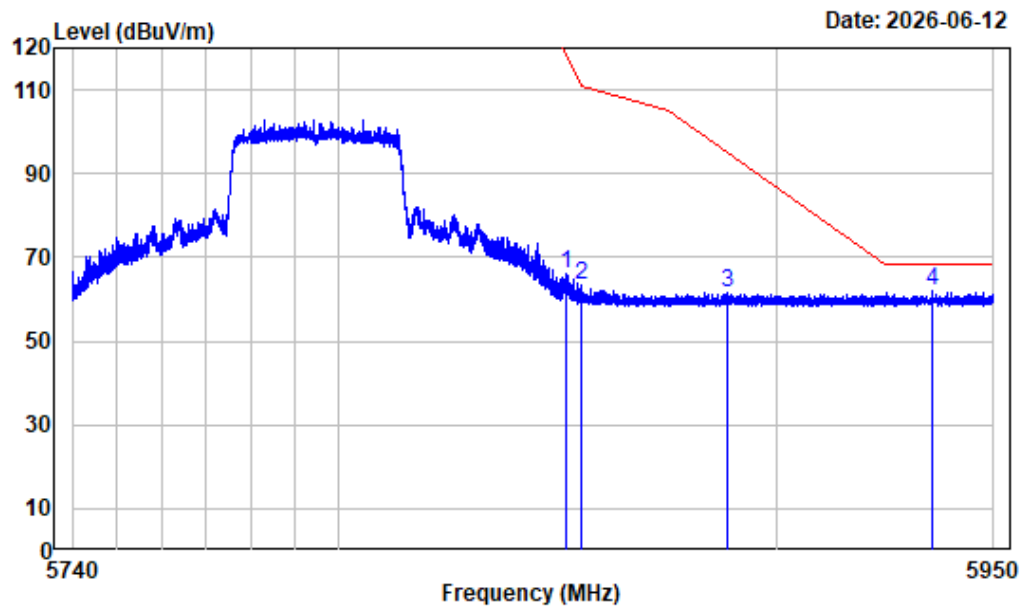

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5795

			Read		Limit	Over	
	Freq	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.746	-4.69	70.60	65.91	118.22	-52.31	Peak
2	5855.159	-4.68	68.27	63.59	110.76	-47.17	Peak
3	5888.496	-4.55	66.07	61.52	95.18	-33.66	Peak
4	5935.746	-4.49	66.43	61.94	68.20	-6.26	Peak

Left Band edge_Horizontal_Peak_802.11ax80_5775MHz_ant0

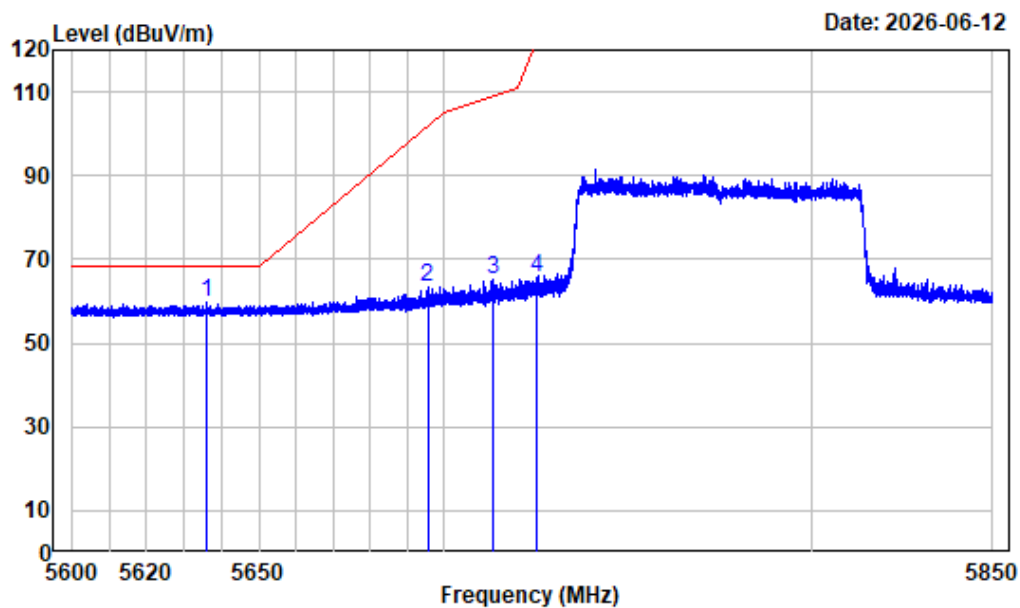

Condition : Horizontal

Project No. : 2601P05987E-RF


Tester : Zenos Qiao

Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak

Note : 5GWiFi-Band4-AX80_ANT0-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5636.000	-5.98	65.83	59.85	68.20	-8.35	Peak
2	5695.406	-5.79	69.24	63.45	101.81	-38.36	Peak
3	5712.875	-5.65	70.66	65.01	108.81	-43.80	Peak
4	5724.875	-5.54	70.98	65.44	121.92	-56.48	Peak


Left Band edge_Vertical_Peak_802.11ax80_5775MHz_ant0

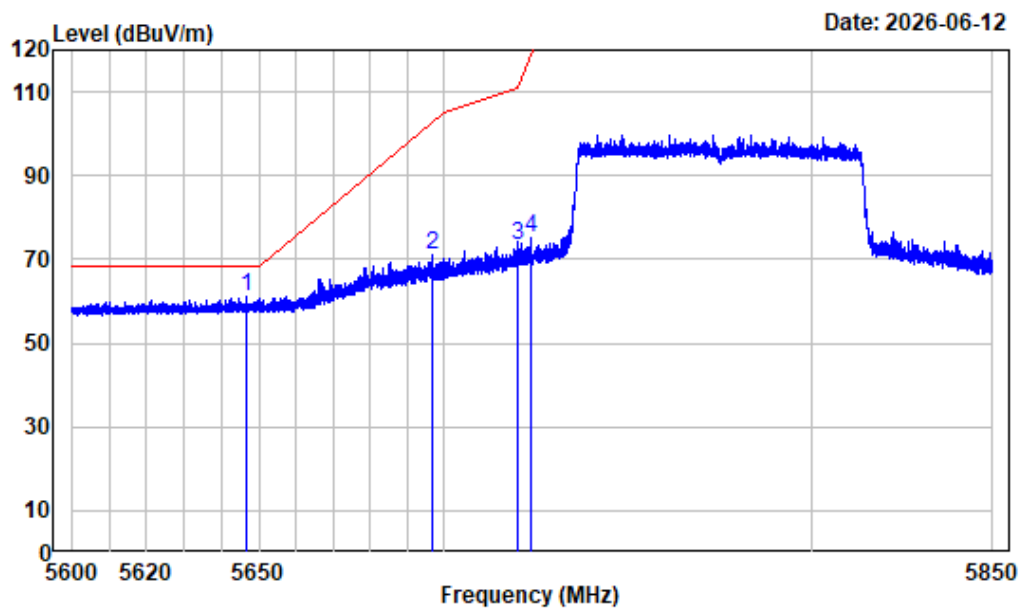

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80_ANT0-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5646.469	-5.92	66.93	61.01	68.20	-7.19	Peak
2	5696.531	-5.78	76.82	71.04	102.64	-31.60	Peak
3	5720.000	-5.58	78.83	73.25	110.80	-37.55	Peak
4	5723.406	-5.55	80.73	75.18	118.57	-43.39	Peak


Right Band edge_Vertical_Peak_802.11ax80_5775MHz_ant0

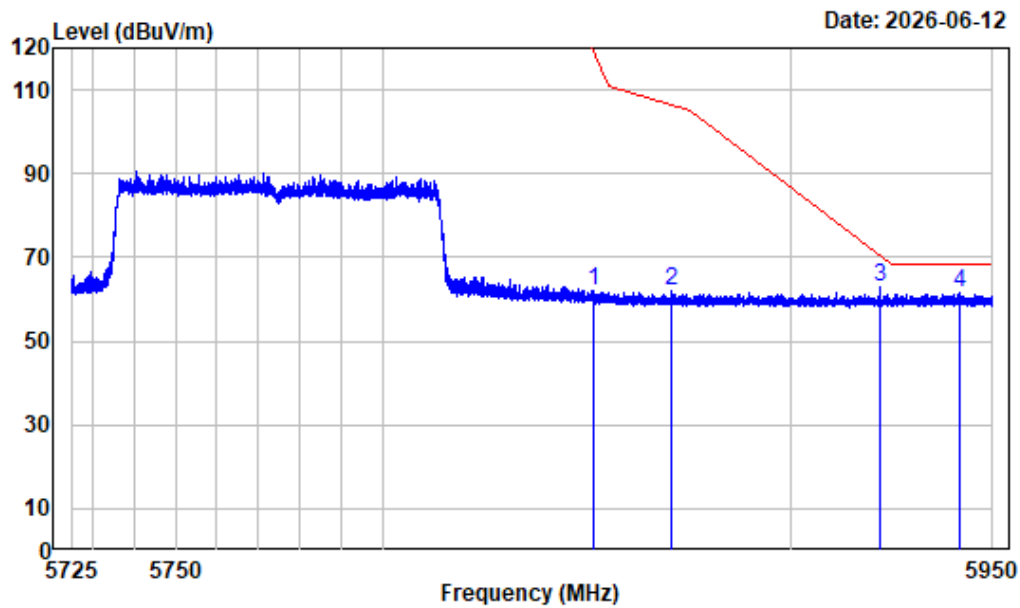

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80_ANT0-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.478	-4.69	66.61	61.92	118.83	-56.91	Peak
2	5870.491	-4.62	66.84	62.22	106.46	-44.24	Peak
3	5921.903	-4.49	67.36	62.87	70.48	-7.61	Peak
4	5941.900	-4.48	65.90	61.42	68.20	-6.78	Peak


Right Band edge_Horizontal_Peak_802.11ax80_5775MHz_ant0

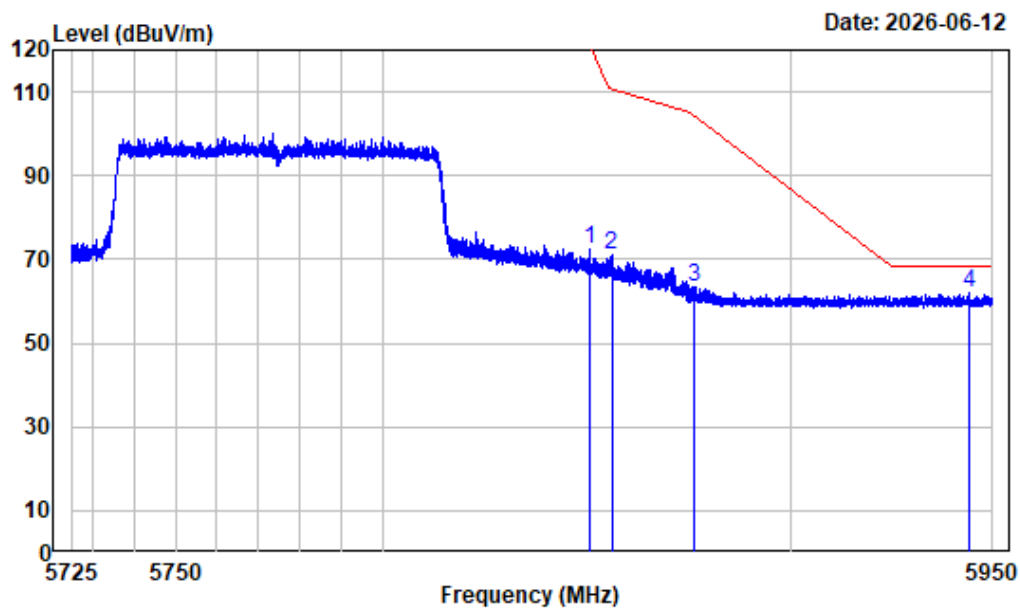

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80_ANT0-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.466	-4.70	77.32	72.62	121.14	-48.52	Peak
2	5855.922	-4.68	75.75	71.07	110.54	-39.47	Peak
3	5876.172	-4.61	67.92	63.31	104.33	-41.02	Peak
4	5944.206	-4.49	66.63	62.14	68.20	-6.06	Peak


Left Band edge_Horizontal_Peak_802.11a_5745MHz_ant1

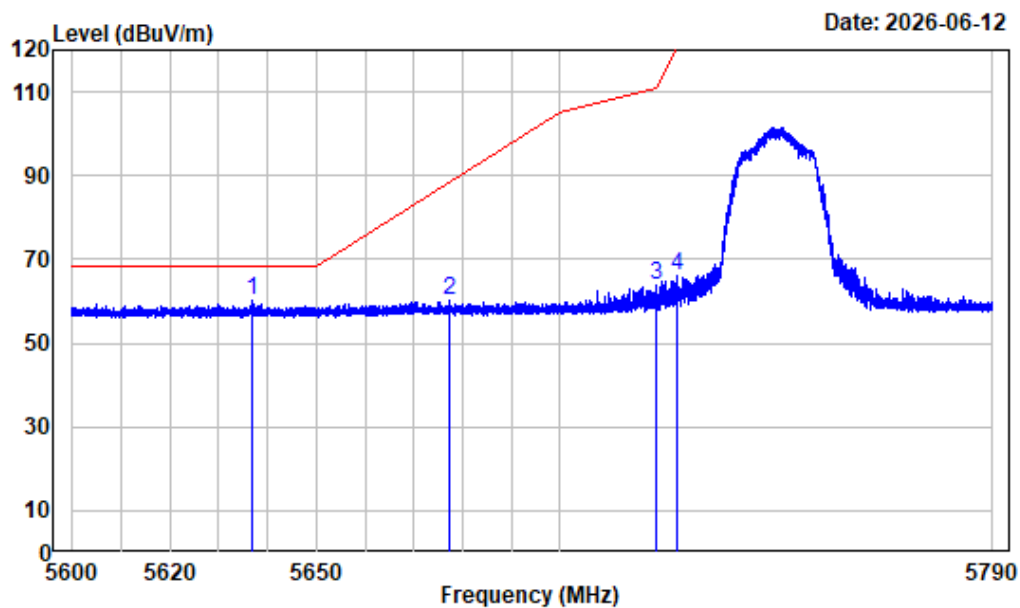

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5636.694	-5.98	66.17	60.19	68.20	-8.01	Peak
2	5677.401	-5.83	65.98	60.15	88.52	-28.37	Peak
3	5719.748	-5.58	69.51	63.93	110.73	-46.80	Peak
4	5724.118	-5.54	71.46	65.92	120.19	-54.27	Peak


Left Band edge_Vertical_Peak_802.11a_5745MHz_ant1

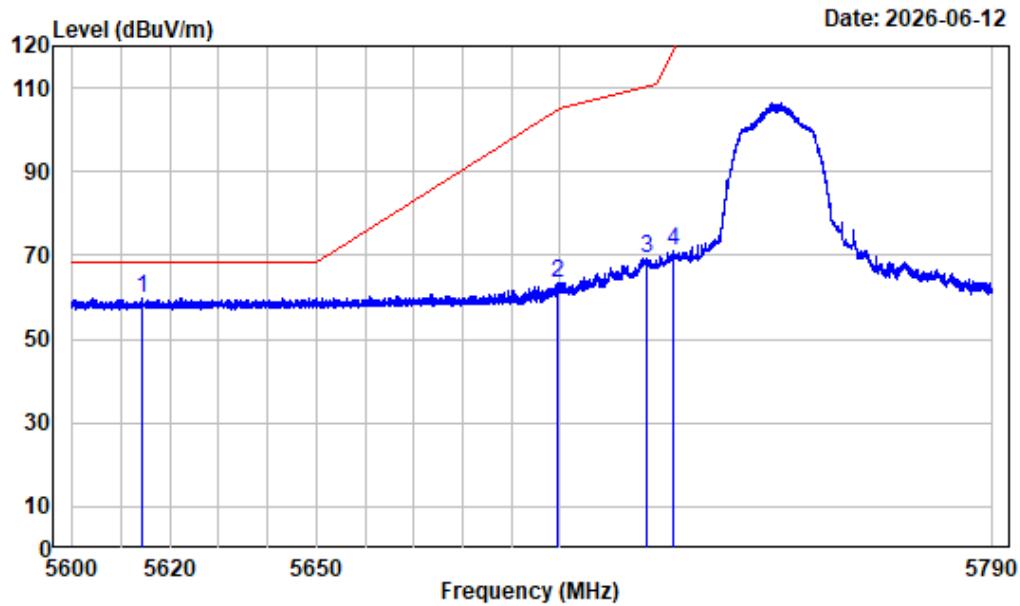

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5614.250	-6.12	66.08	59.96	68.20	-8.24	Peak
2	5699.560	-5.78	69.23	63.45	104.88	-41.43	Peak
3	5717.752	-5.60	74.90	69.30	110.17	-40.87	Peak
4	5723.476	-5.55	76.55	71.00	118.73	-47.73	Peak


Right Band edge_Horizontal_Peak_802.11a_5825MHz_ant1

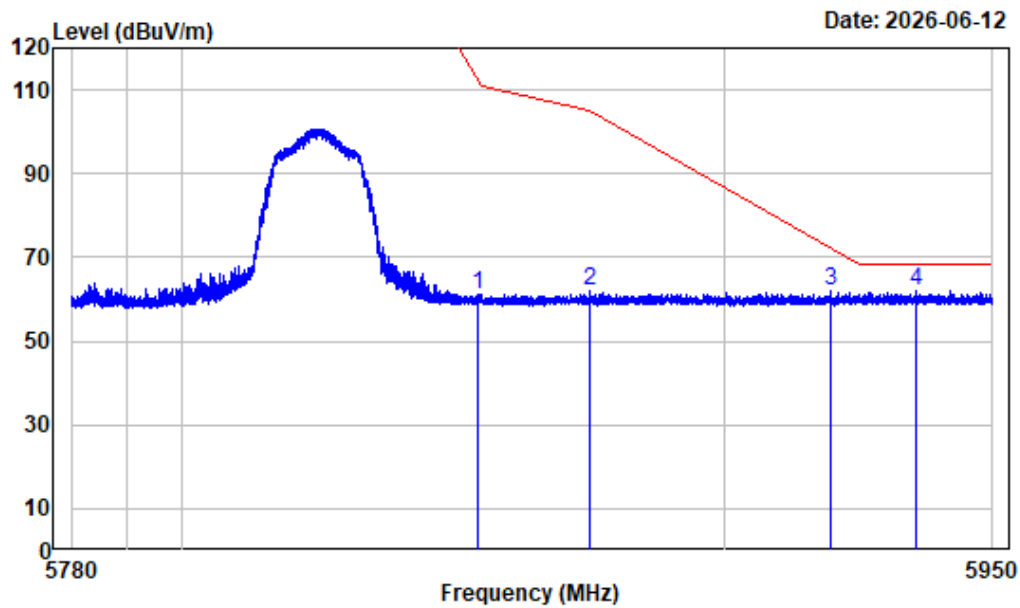

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5854.545	-4.68	65.65	60.97	111.84	-50.87	Peak
2	5874.924	-4.60	66.46	61.86	105.22	-43.36	Peak
3	5919.825	-4.50	66.47	61.97	72.01	-10.04	Peak
4	5935.614	-4.49	66.32	61.83	68.20	-6.37	Peak


Right Band edge_Vertical_Peak_802.11a_5825MHz_ant1

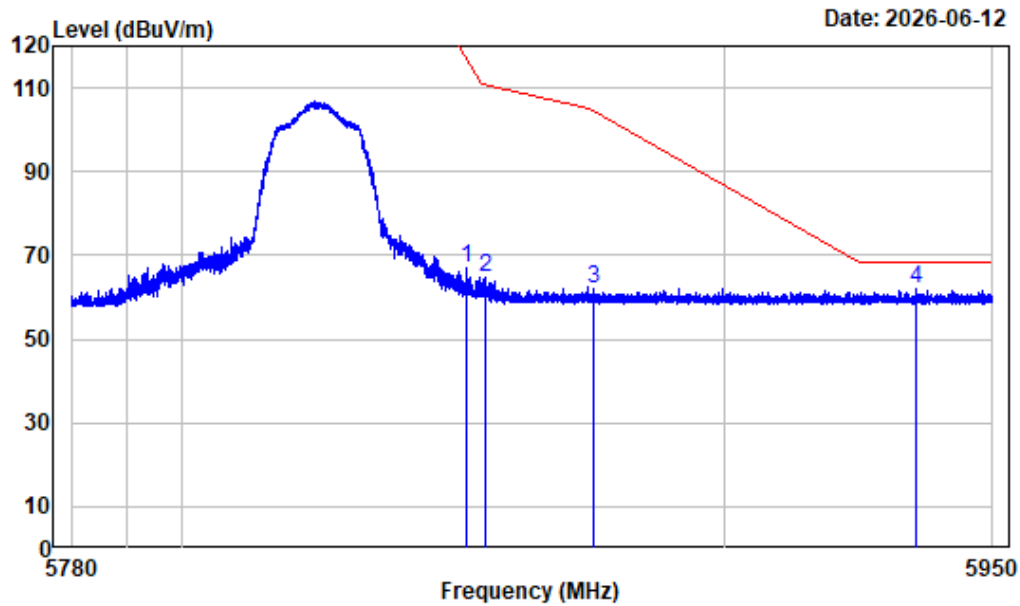

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.420	-4.69	71.80	67.11	116.68	-49.57	Peak
2	5855.862	-4.68	69.43	64.75	110.56	-45.81	Peak
3	5875.944	-4.61	66.80	62.19	104.50	-42.31	Peak
4	5935.699	-4.49	66.41	61.92	68.20	-6.28	Peak


Left Band edge_Horizontal_Peak_802.11ac-VHT20_5745MHz_ant1

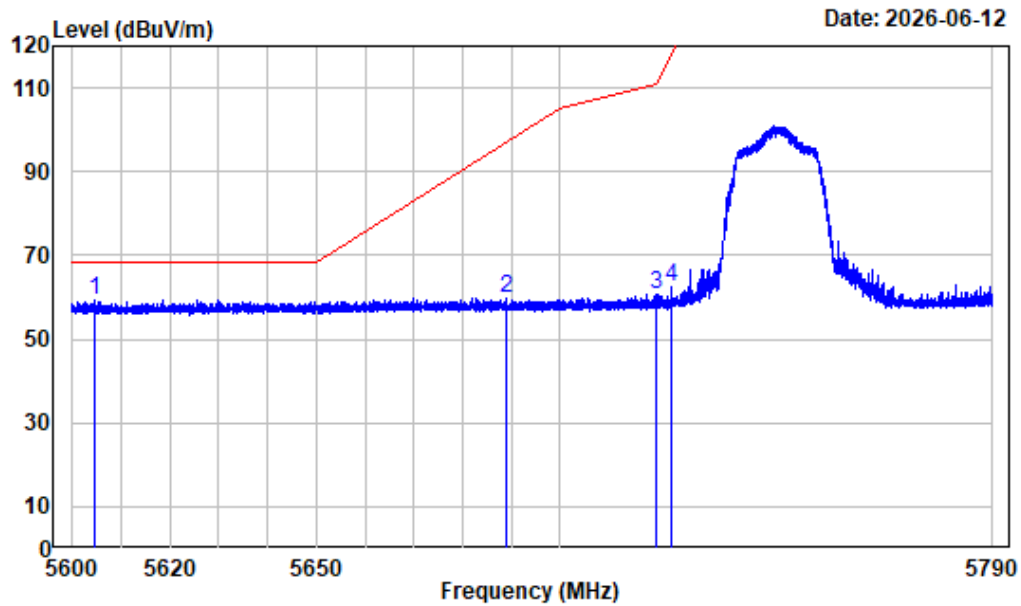

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20_ANT1-5745

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5604.869	-6.17	65.42	59.25	68.20	-8.95 Peak
2 5688.825	-5.80	65.61	59.81	96.96	-37.15 Peak
3 5719.866	-5.58	66.07	60.49	110.76	-50.27 Peak
4 5723.120	-5.55	67.99	62.44	117.92	-55.48 Peak


Left Band edge_Vertical_Peak_802.11ac-VHT20_5745MHz_ant1

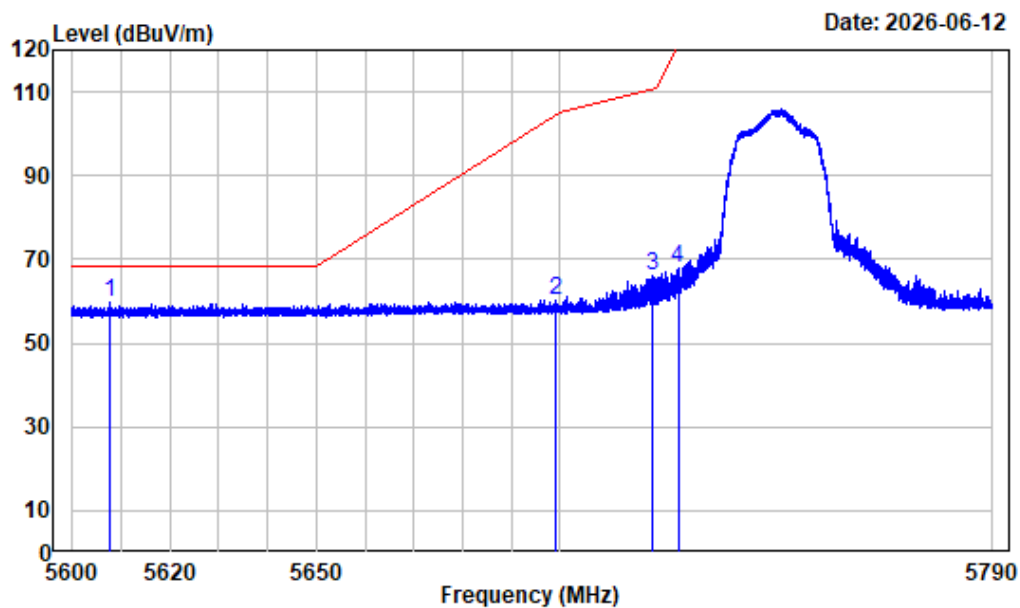

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20_ANT1-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5607.909	-6.15	65.99	59.84	68.20	-8.36	Peak
2	5699.156	-5.78	66.05	60.27	104.58	-44.31	Peak
3	5719.083	-5.58	71.76	66.18	110.54	-44.36	Peak
4	5724.426	-5.54	73.56	68.02	120.89	-52.87	Peak


Right Band edge_Horizontal_Peak_802.11ac-VHT20_5825MHz_ant1

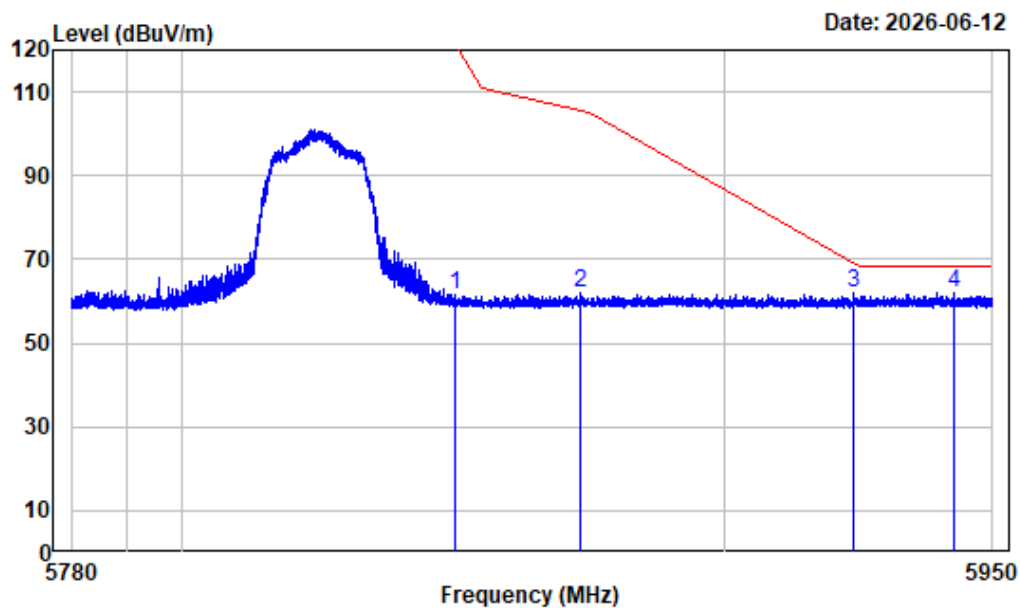

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20_ANT1-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5850.189	-4.70	66.33	61.63	121.77	-60.14 Peak
2 5873.203	-4.61	66.83	62.22	105.70	-43.48 Peak
3 5923.969	-4.50	66.32	61.82	68.96	-7.14 Peak
4 5942.966	-4.49	66.42	61.93	68.20	-6.27 Peak


Right Band edge_Vertical_Peak_802.11ac-VHT20_5825MHz_ant1

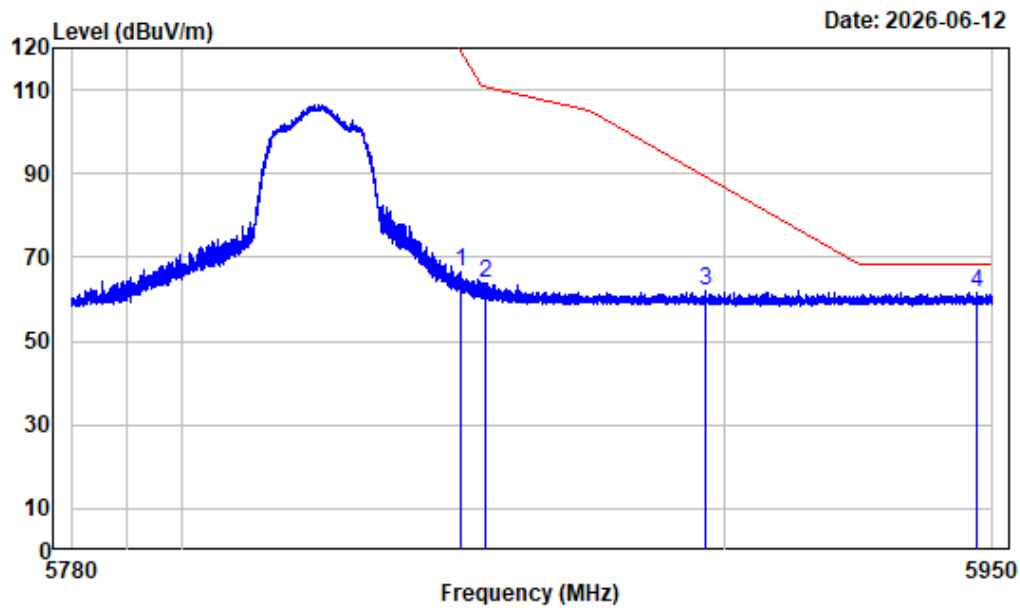

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20_ANT1-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.336	-4.69	71.10	66.41	119.15	-52.74	Peak
2	5855.926	-4.68	68.57	63.89	110.54	-46.65	Peak
3	5896.429	-4.52	66.41	61.89	89.30	-27.41	Peak
4	5947.004	-4.48	66.06	61.58	68.20	-6.62	Peak


Left Band edge_Horizontal_Peak_802.11ac-VHT40_5755MHz_ant1

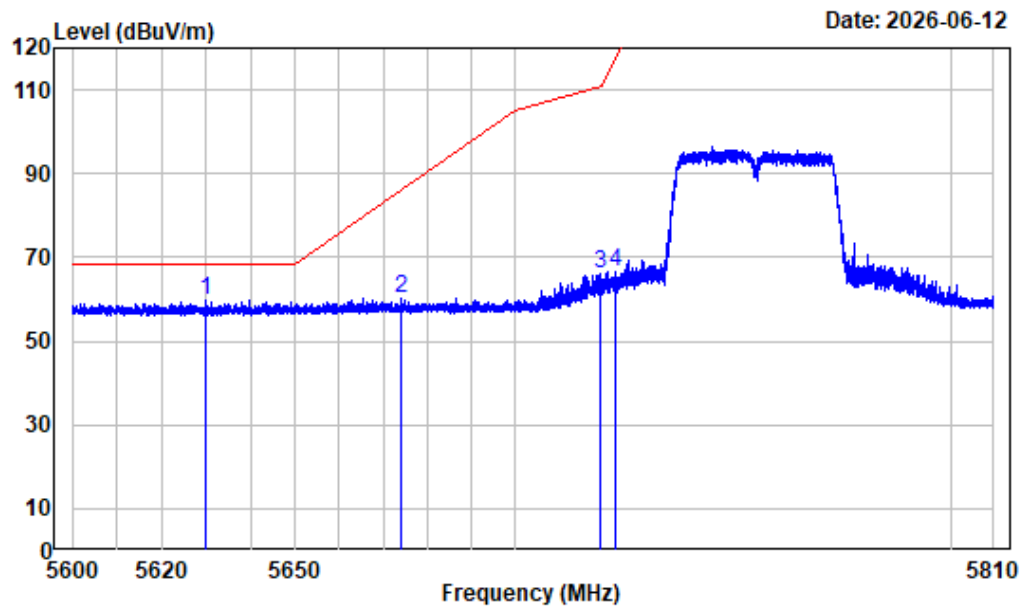

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40_ANT1-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5629.820	-6.02	65.88	59.86	68.20	-8.34	Peak
2	5673.973	-5.83	66.18	60.35	85.98	-25.63	Peak
3	5719.595	-5.58	71.84	66.26	110.69	-44.43	Peak
4	5722.797	-5.55	72.32	66.77	117.18	-50.41	Peak


Left Band edge_Vertical_Peak_802.11ac-VHT40_5755MHz_ant1

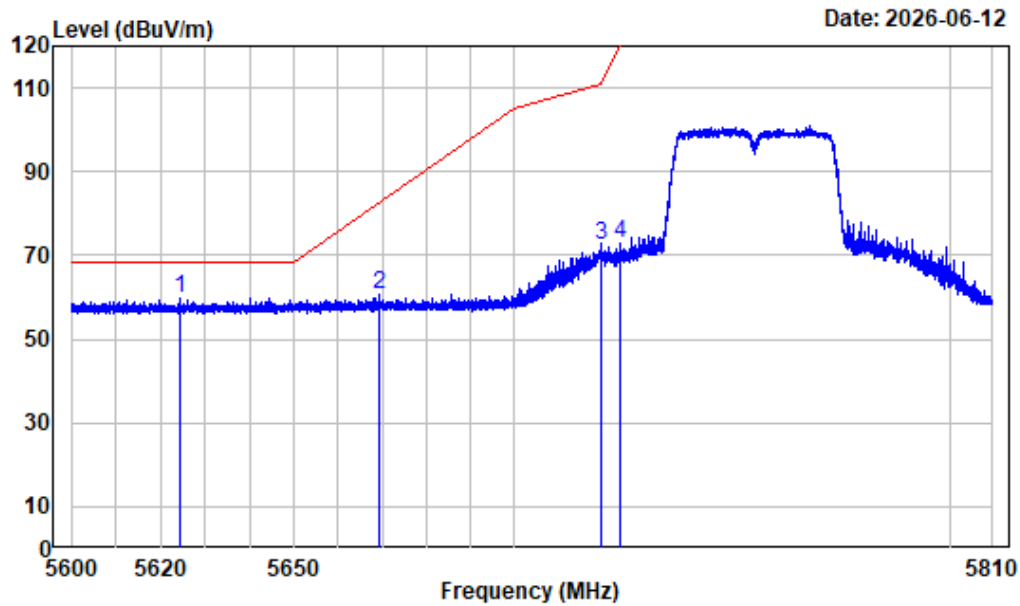

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40_ANT1-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5624.386	-6.04	65.70	59.66	68.20	-8.54	Peak
2	5669.169	-5.85	66.69	60.84	82.42	-21.58	Peak
3	5719.936	-5.58	77.84	72.26	110.78	-38.52	Peak
4	5724.084	-5.54	78.58	73.04	120.11	-47.07	Peak


Right Band edge_Horizontal_Peak_802.11ac-VHT40_5795MHz_ant1

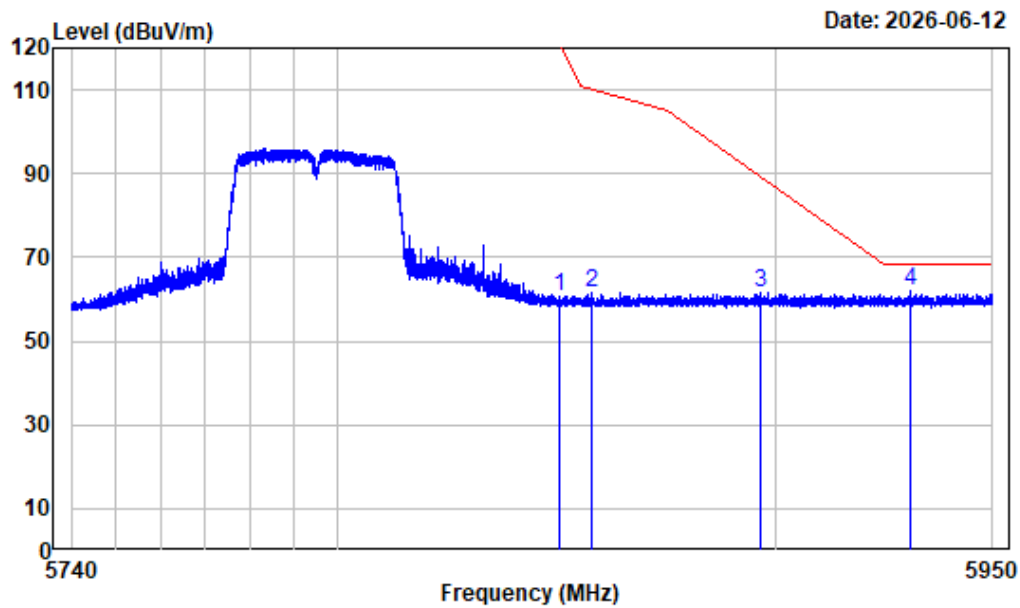

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40_ANT1-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.250	-4.70	65.49	60.79	121.63	-60.84	Peak
2	5857.626	-4.67	66.42	61.75	110.06	-48.31	Peak
3	5896.424	-4.51	66.19	61.68	89.31	-27.63	Peak
4	5930.995	-4.49	66.43	61.94	68.20	-6.26	Peak


Right Band edge_Vertical_Peak_802.11ac-VHT40_5795MHz_ant1

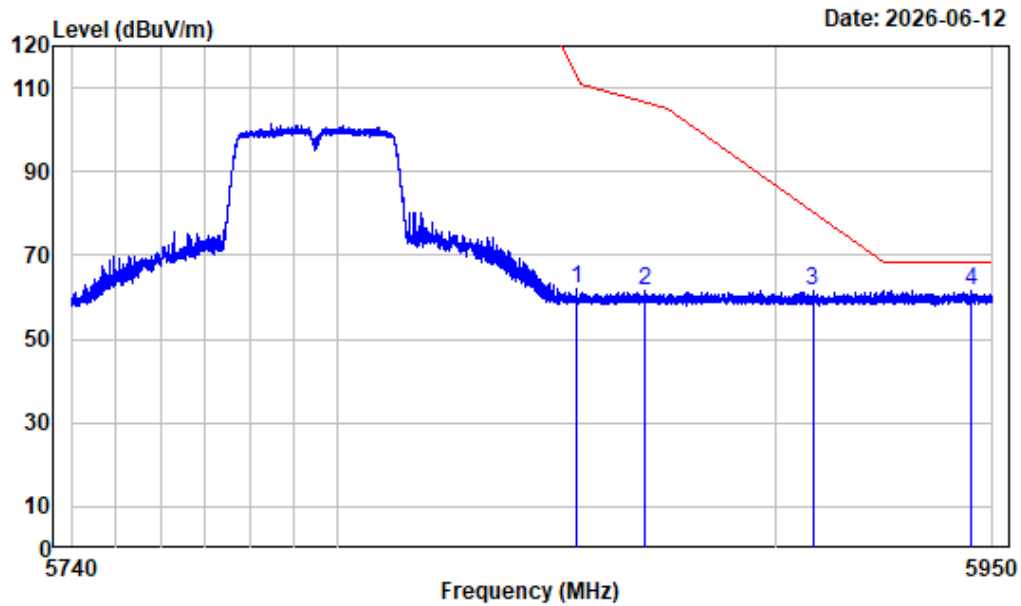

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40_ANT1-5795

			Read		Limit	Over	
	Freq	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5854.056	-4.68	66.90	62.22	112.95	-50.73	Peak
2	5869.885	-4.62	66.00	61.38	106.63	-45.25	Peak
3	5908.420	-4.51	65.96	61.45	80.43	-18.98	Peak
4	5945.118	-4.49	66.01	61.52	68.20	-6.68	Peak


Left Band edge_Horizontal_Peak_802.11ac-VHT80_5775MHz_ant1

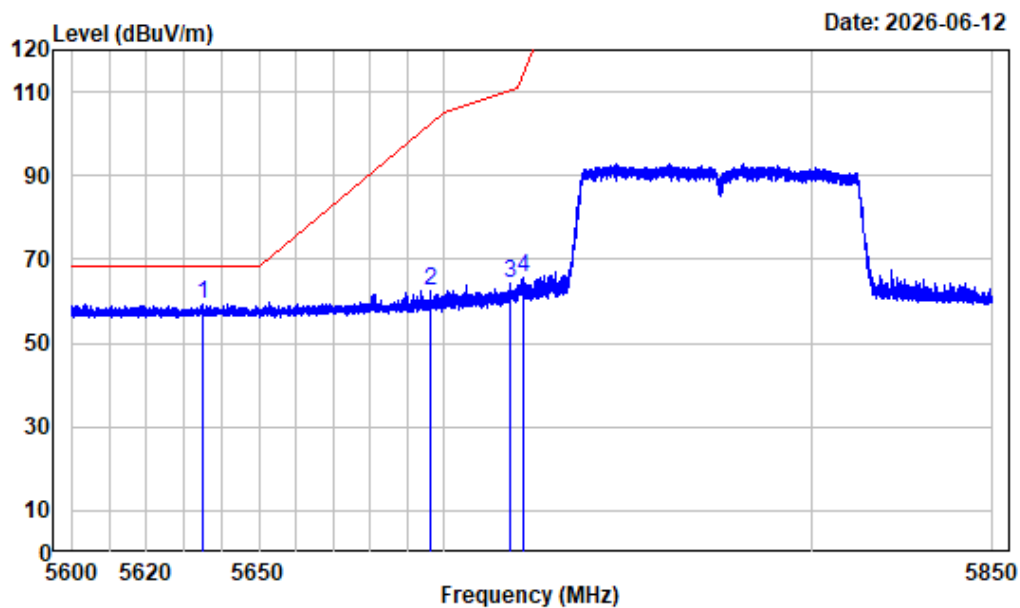

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80_ANT1-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5634.844	-5.98	65.33	59.35	68.20	-8.85	Peak
2	5696.000	-5.79	68.43	62.64	102.25	-39.61	Peak
3	5717.656	-5.60	69.90	64.30	110.14	-45.84	Peak
4	5721.313	-5.57	71.14	65.57	113.79	-48.22	Peak


Left Band edge_Vertical_Peak_802.11ac-VHT80_5775MHz_ant1

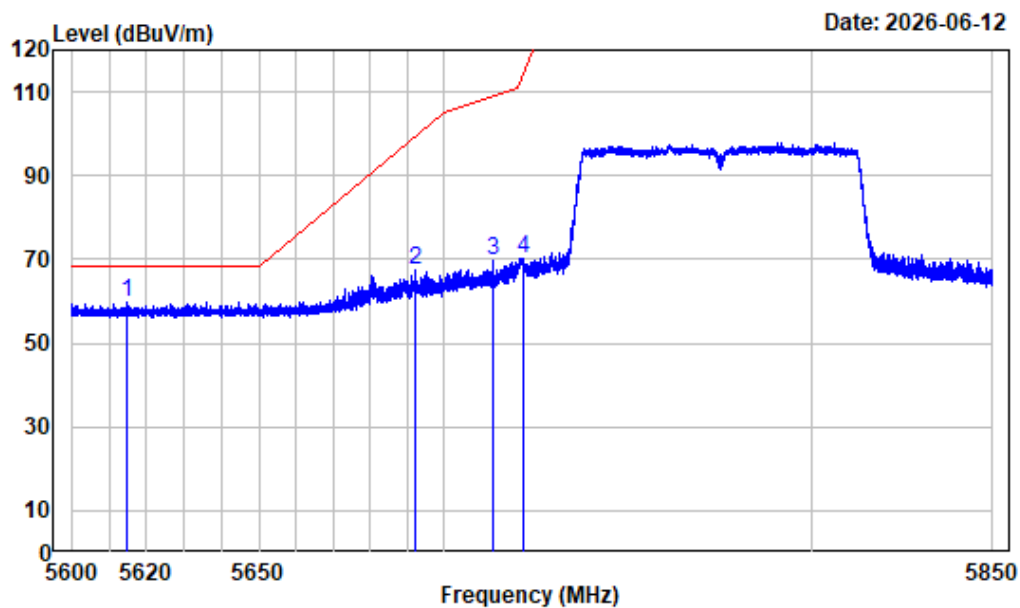

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80_ANT1-5775

Freq Factor		Read Level	Limit Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5614.688	-6.11	66.09	59.98	68.20	-8.22	Peak
2 5691.844	-5.80	73.13	67.33	99.19	-31.86	Peak
3 5713.313	-5.64	75.30	69.66	108.93	-39.27	Peak
4 5721.469	-5.57	75.94	70.37	114.15	-43.78	Peak


Right Band edge_Horizontal_Peak_802.11ac-VHT80_5775MHz_ant1

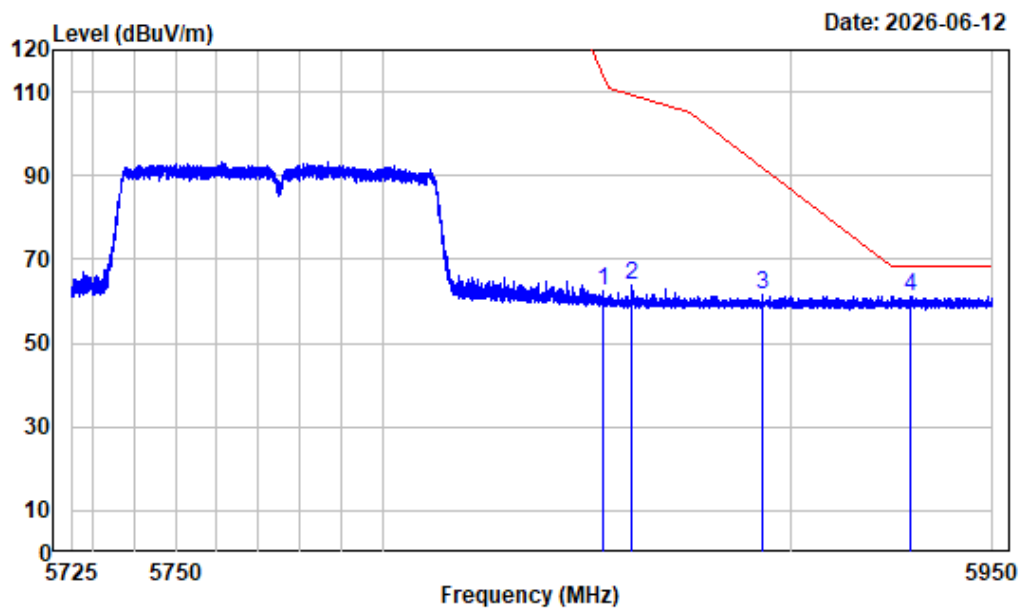

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80_ANT1-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.813	-4.68	67.36	62.68	113.51	-50.83	Peak
2	5860.984	-4.67	68.31	63.64	109.12	-45.48	Peak
3	5893.159	-4.53	66.06	61.53	91.73	-30.20	Peak
4	5929.750	-4.49	65.73	61.24	68.20	-6.96	Peak


Right Band edge_Vertical_Peak_802.11ac-VHT80_5775MHz_ant1

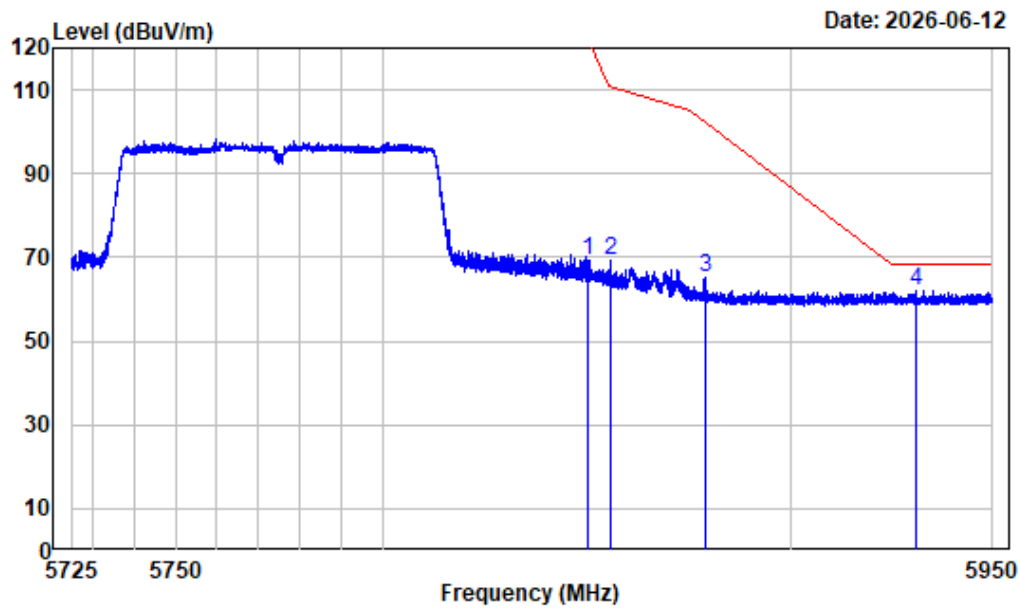

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80_ANT1-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.072	-4.70	73.98	69.28	122.04	-52.76	Peak
2	5855.697	-4.68	73.83	69.15	110.60	-41.45	Peak
3	5878.900	-4.58	69.90	65.32	102.30	-36.98	Peak
4	5930.791	-4.49	66.65	62.16	68.20	-6.04	Peak


Left Band edge_Horizontal_Peak_802.11ax20_5745MHz_ant1

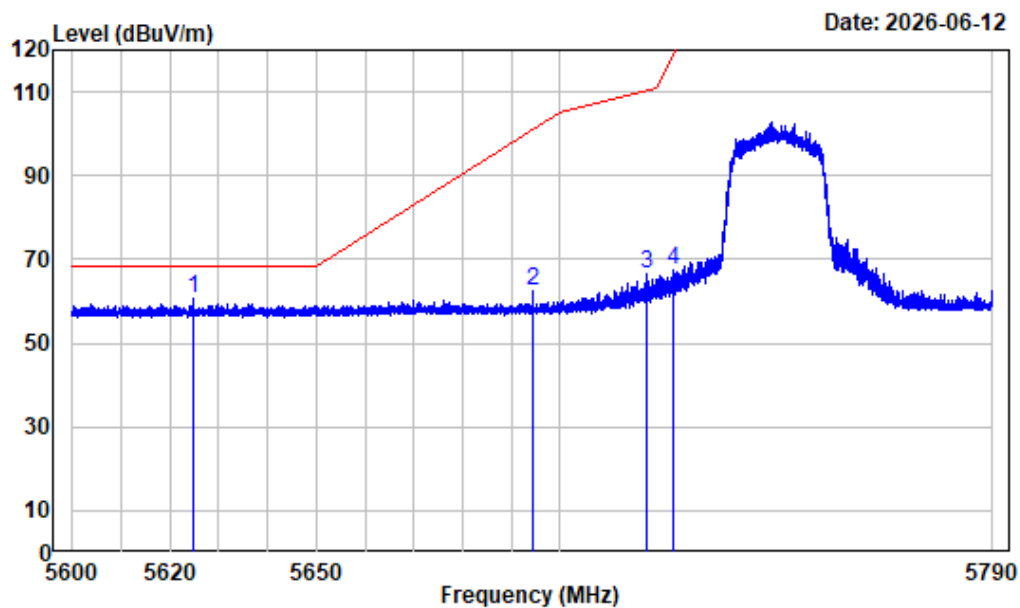

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20_ANT1-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5624.961	-6.04	66.88	60.84	68.20	-7.36	Peak
2	5694.382	-5.79	68.45	62.66	101.06	-38.40	Peak
3	5717.966	-5.60	72.06	66.46	110.23	-43.77	Peak
4	5723.500	-5.54	72.87	67.33	118.78	-51.45	Peak


Left Band edge_Vertical_Peak_802.11ax20_5745MHz_ant1

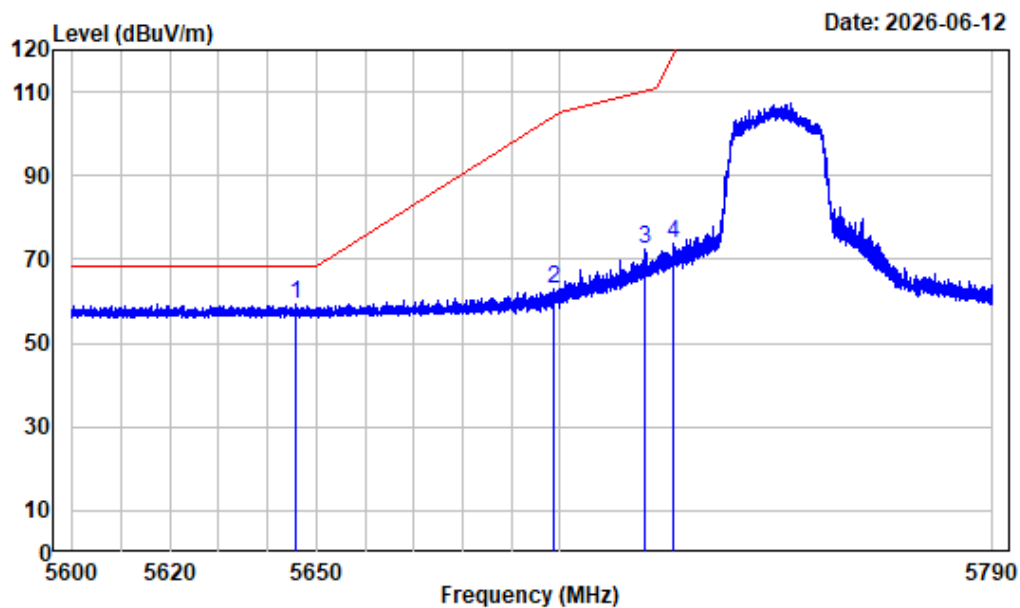

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20_ANT1-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5645.553	-5.93	65.38	59.45	68.20	-8.75	Peak
2	5698.895	-5.78	68.76	62.98	104.39	-41.41	Peak
3	5717.563	-5.60	78.28	72.68	110.12	-37.44	Peak
4	5723.500	-5.54	79.25	73.71	118.78	-45.07	Peak


Right Band edge_Horizontal_Peak_802.11ax20_5825MHz_ant1

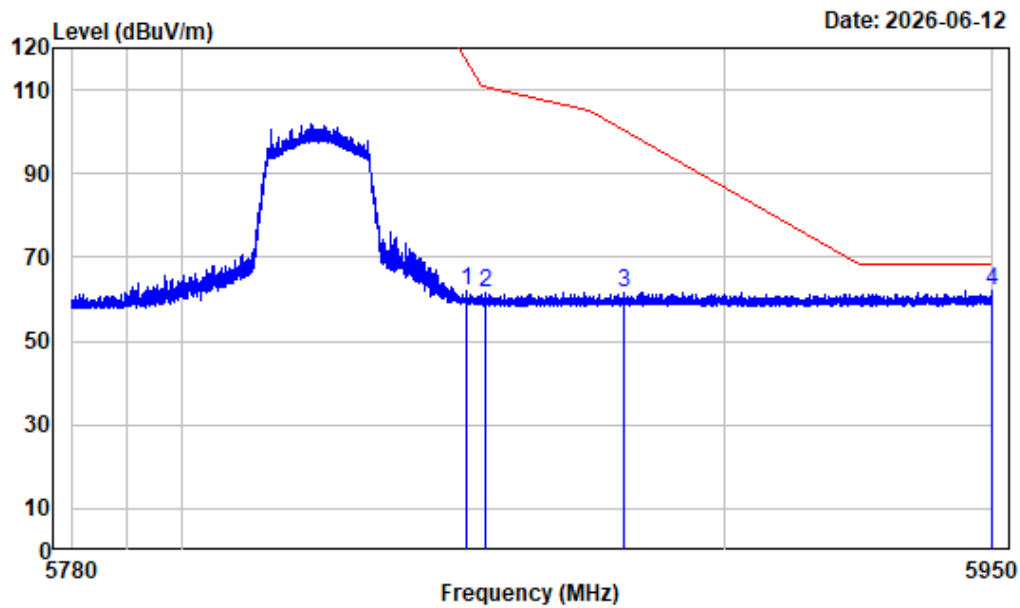

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20_ANT1-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5852.441	-4.69	66.59	61.90	116.63	-54.73 Peak
2 5855.692	-4.68	66.21	61.53	110.61	-49.08 Peak
3 5881.469	-4.57	66.28	61.71	100.40	-38.69 Peak
4 5949.873	-4.48	66.44	61.96	68.20	-6.24 Peak


Right Band edge_Vertical_Peak_802.11ax20_5825MHz_ant1

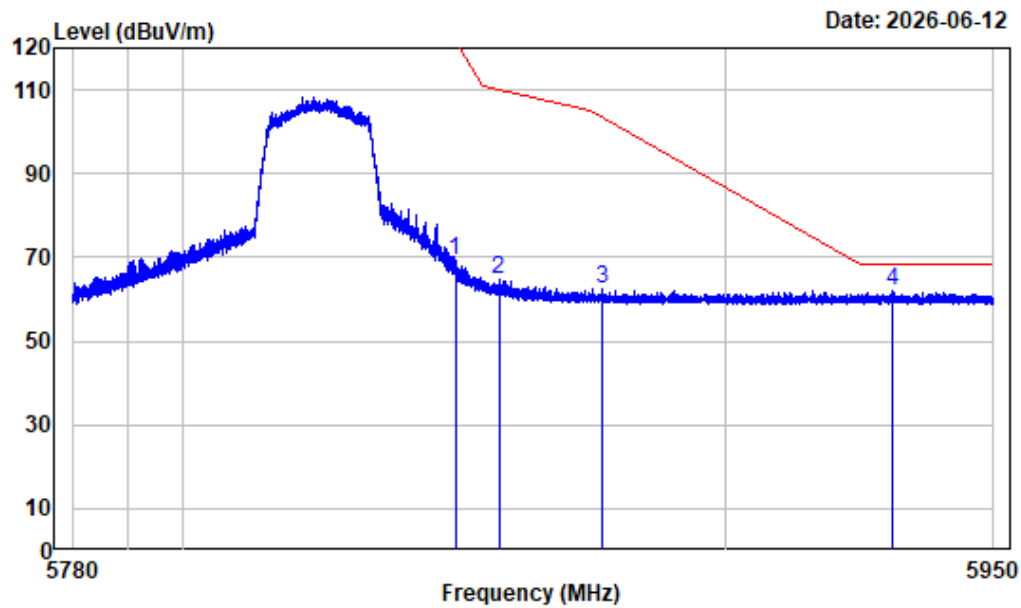

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20_ANT1-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5850.061	-4.70	73.97	69.27	122.06	-52.79 Peak
2 5858.094	-4.67	69.28	64.61	109.93	-45.32 Peak
3 5877.070	-4.59	66.98	62.39	103.66	-41.27 Peak
4 5931.151	-4.49	66.59	62.10	68.20	-6.10 Peak


Left Band edge_Horizontal_Peak_802.11ax40_5755MHz_ant1

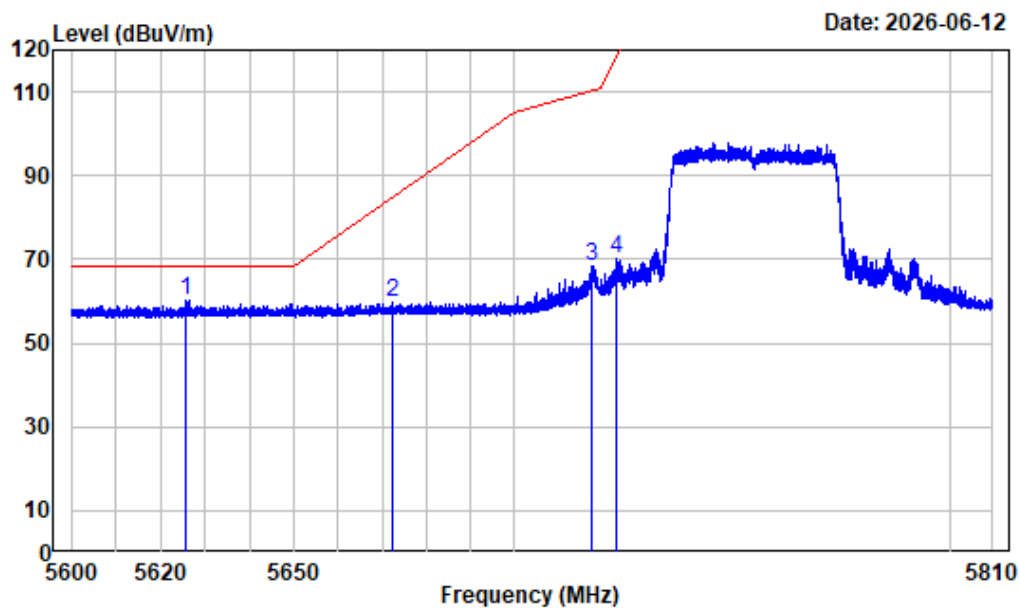

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT1-5755

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5625.646	-6.04	66.41	60.37	68.20	-7.83 Peak
2	5672.424	-5.84	65.77	59.93	84.83	-24.90 Peak
3	5717.810	-5.60	73.99	68.39	110.19	-41.80 Peak
4	5723.375	-5.55	75.82	70.27	118.50	-48.23 Peak


Left Band edge_Vertical_Peak_802.11ax40_5755MHz_ant1

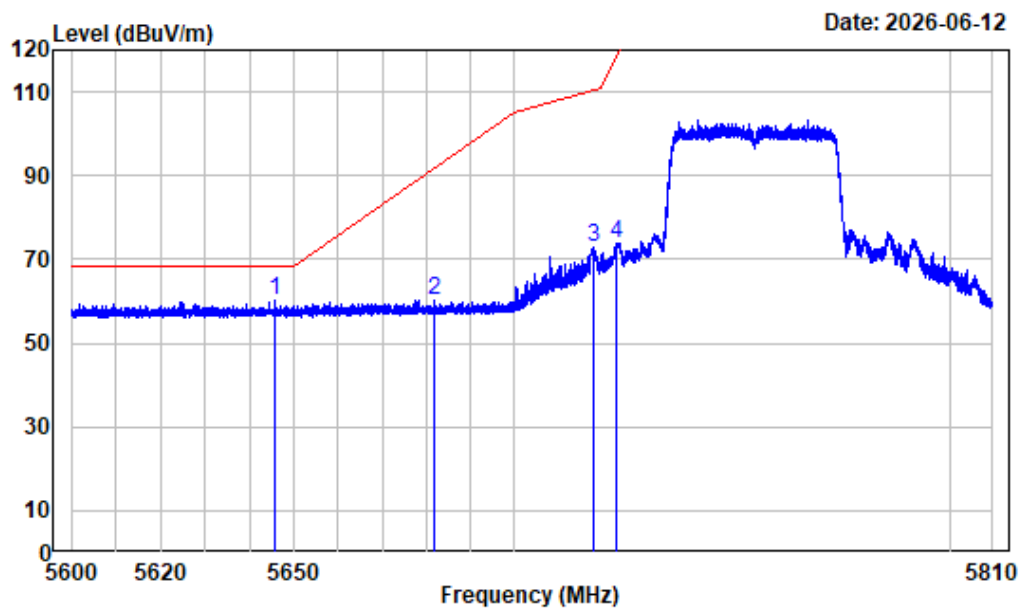

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT1-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5645.570	-5.93	66.10	60.17	68.20	-8.03	Peak
2	5681.664	-5.81	66.05	60.24	91.67	-31.43	Peak
3	5717.994	-5.60	78.71	73.11	110.24	-37.13	Peak
4	5723.506	-5.54	79.50	73.96	118.80	-44.84	Peak


Right Band edge_Horizontal_Peak_802.11ax40_5795MHz_ant1

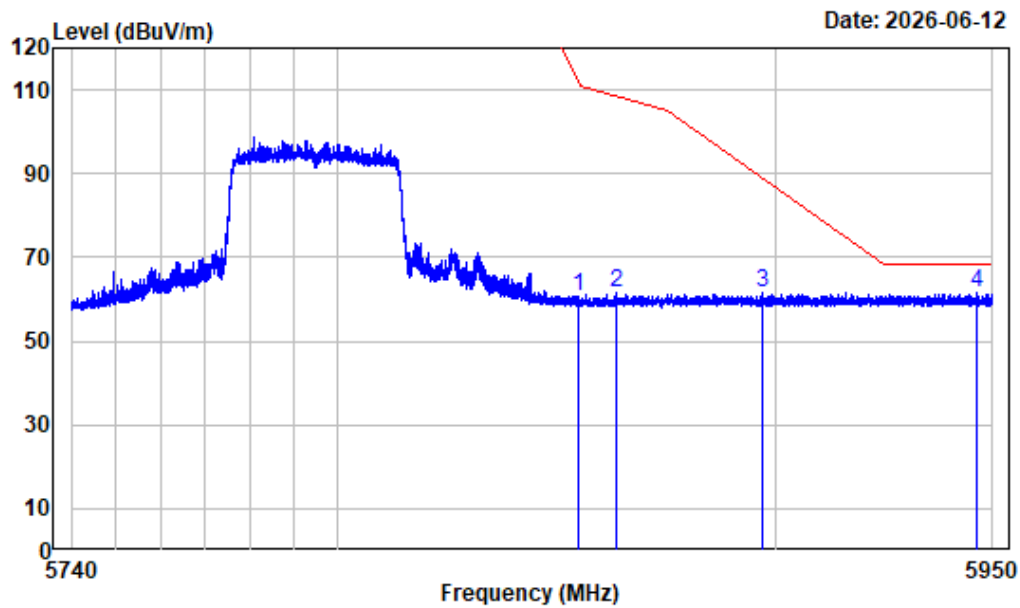

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT1-5795

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5854.712	-4.68	65.56	60.88	111.46	-50.58 Peak
2	5863.165	-4.65	66.35	61.70	108.51	-46.81 Peak
3	5896.765	-4.52	66.19	61.67	89.06	-27.39 Peak
4	5946.272	-4.48	65.86	61.38	68.20	-6.82 Peak


Right Band edge_Vertical_Peak_802.11ax40_5795MHz_ant1

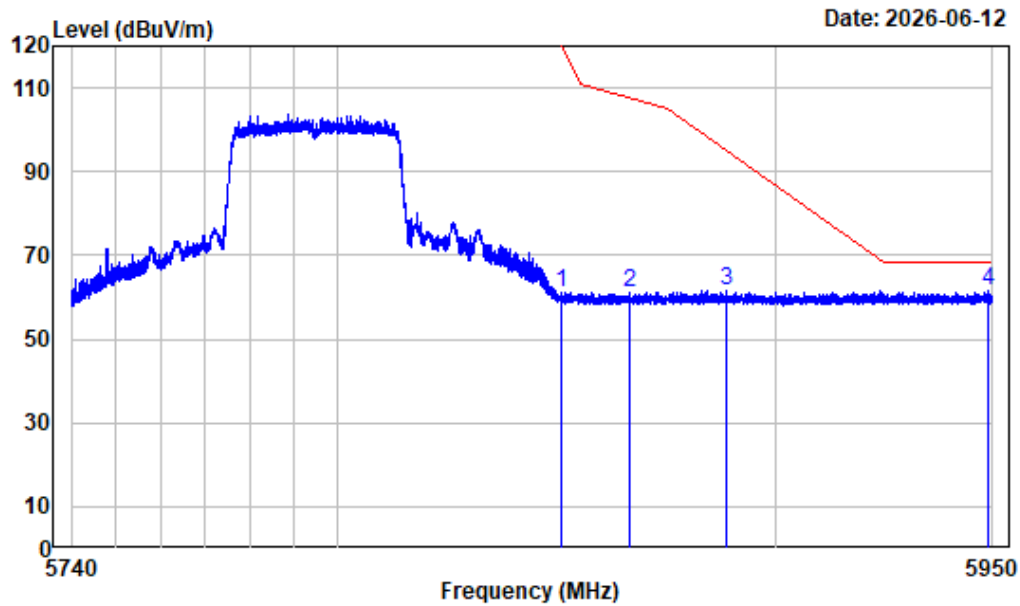

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT1-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.696	-4.70	66.04	61.34	120.61	-59.27	Peak
2	5866.368	-4.63	65.95	61.32	107.61	-46.29	Peak
3	5888.549	-4.55	66.09	61.54	95.14	-33.60	Peak
4	5949.134	-4.48	66.09	61.61	68.20	-6.59	Peak


Left Band edge_Horizontal_Peak_802.11ax80_5775MHz_ant1

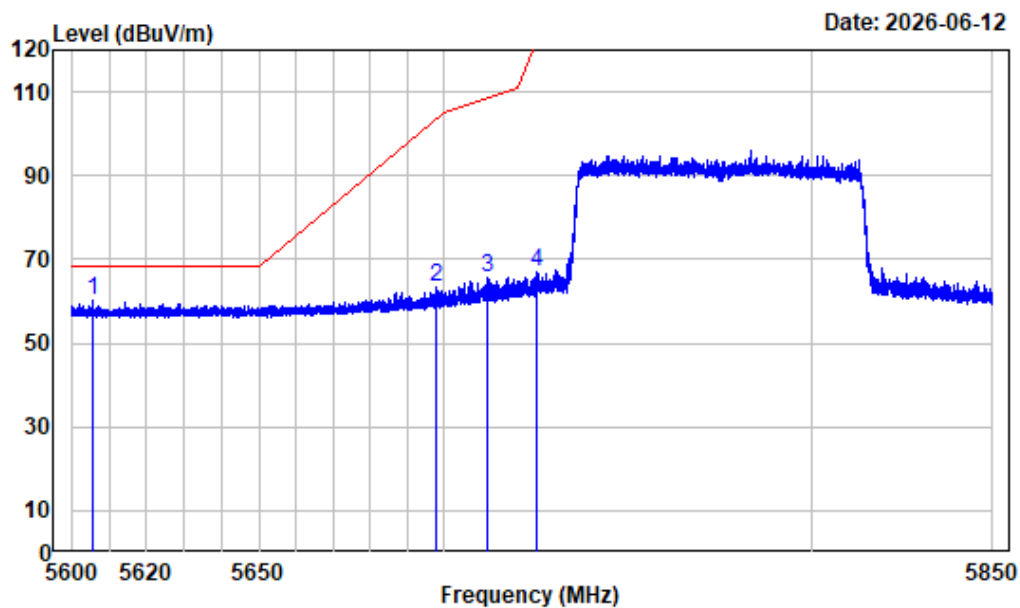

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80_ANT1-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5605.906	-6.17	66.30	60.13	68.20	-8.07	Peak
2	5697.844	-5.78	69.20	63.42	103.61	-40.19	Peak
3	5711.406	-5.66	71.33	65.67	108.40	-42.73	Peak
4	5724.750	-5.54	72.45	66.91	121.63	-54.72	Peak


Left Band edge_Vertical_Peak_802.11ax80_5775MHz_ant1

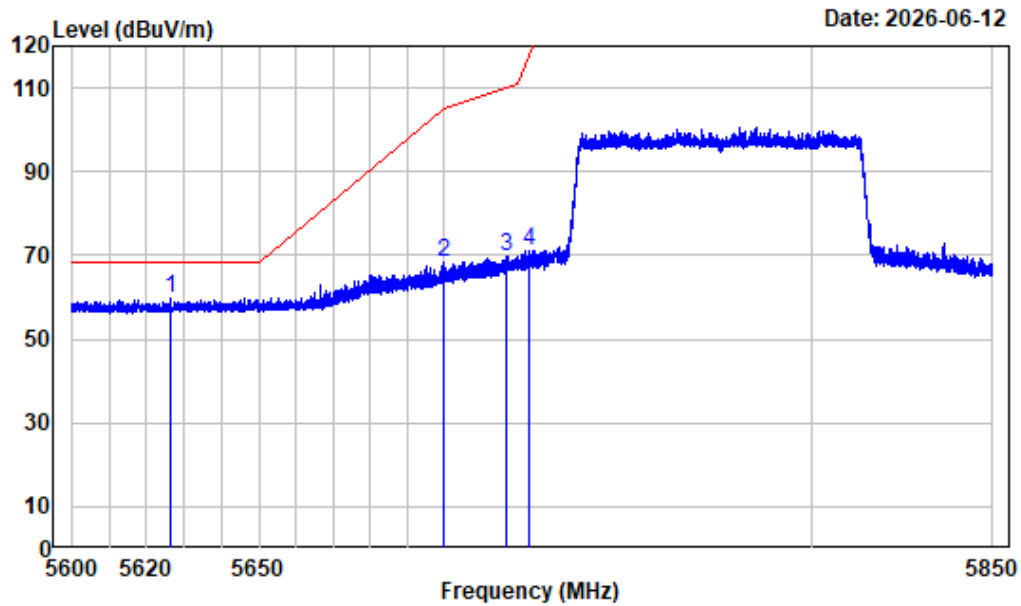

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80_ANT1-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5626.469	-6.04	65.82	59.78	68.20	-8.42	Peak
2	5699.625	-5.78	74.02	68.24	104.92	-36.68	Peak
3	5716.750	-5.62	75.55	69.93	109.89	-39.96	Peak
4	5722.969	-5.55	76.71	71.16	117.57	-46.41	Peak


Right Band edge_Vertical_Peak_802.11ax80_5775MHz_ant1

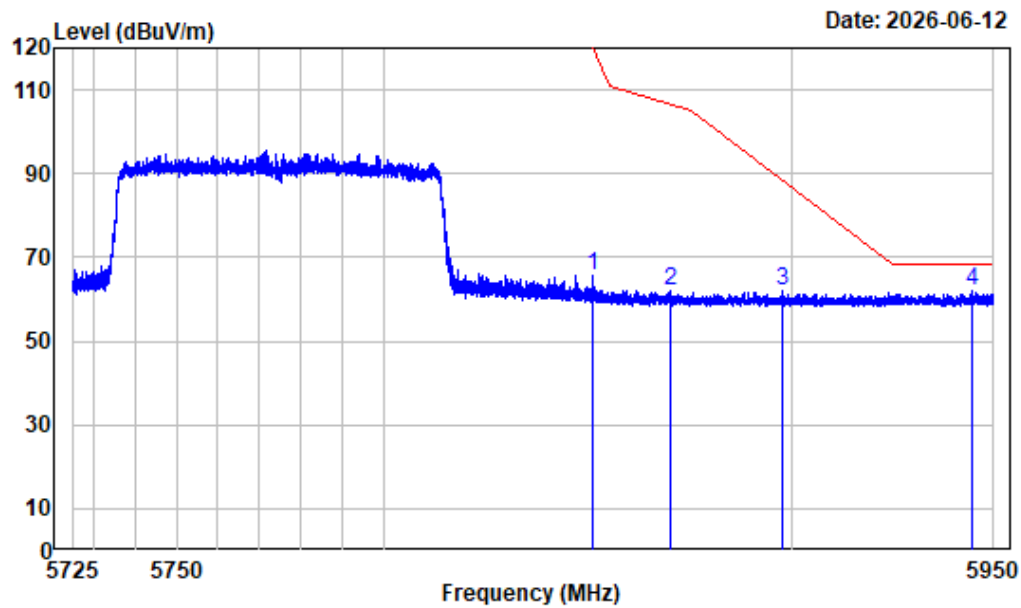

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80_ANT1-5775

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5851.084	-4.70	70.26	65.56	119.73	-54.17 Peak
2 5870.013	-4.62	66.84	62.22	106.59	-44.37 Peak
3 5897.744	-4.52	66.58	62.06	88.33	-26.27 Peak
4 5944.459	-4.49	66.36	61.87	68.20	-6.33 Peak

Right Band edge_Horizontal_Peak_802.11ax80_5775MHz_ant1

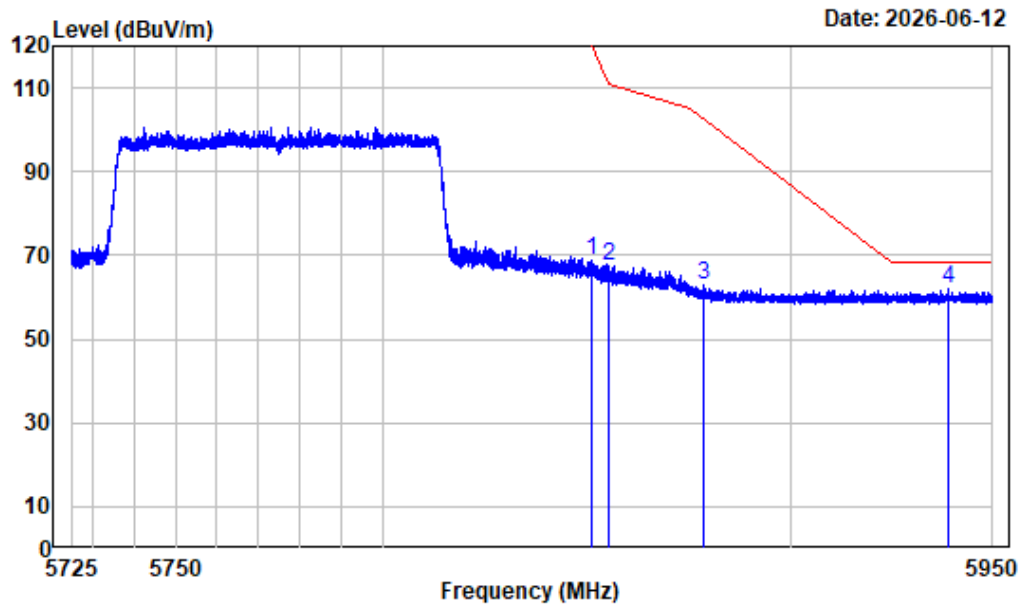


Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80_ANT1-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.028	-4.70	73.67	68.97	119.85	-50.88	Peak
2	5855.163	-4.68	72.26	67.58	110.75	-43.17	Peak
3	5878.337	-4.59	67.39	62.80	102.72	-39.92	Peak
4	5938.891	-4.49	66.34	61.85	68.20	-6.35	Peak

1-40GHz:

5150-5250MHz: (Maximum output power mode, ANT0 802.11a 5200MHz)


1-7GHz_Horizontal_802.11a_5200MHz_ant0

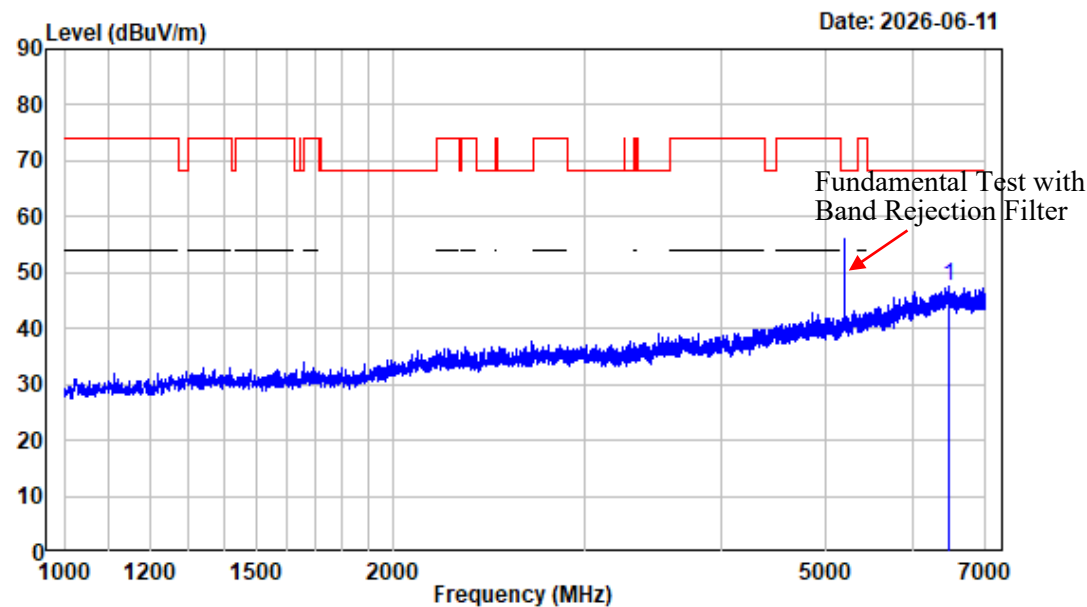

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6469.750	-1.18	48.66	47.48	68.20	-20.72 Peak


1-7GHz_Vertical_802.11a_5200MHz_ant0

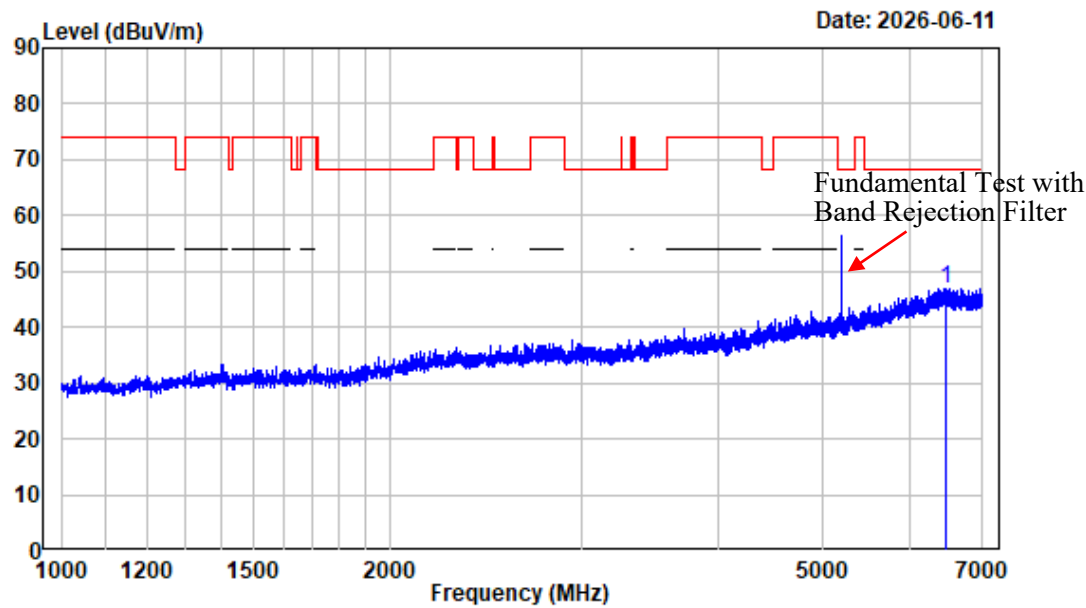

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6491.500	-1.20	48.15	46.95	68.20	-21.25 Peak


7-18GHz_Horizontal_Peak_802.11a_5200MHz_ant0

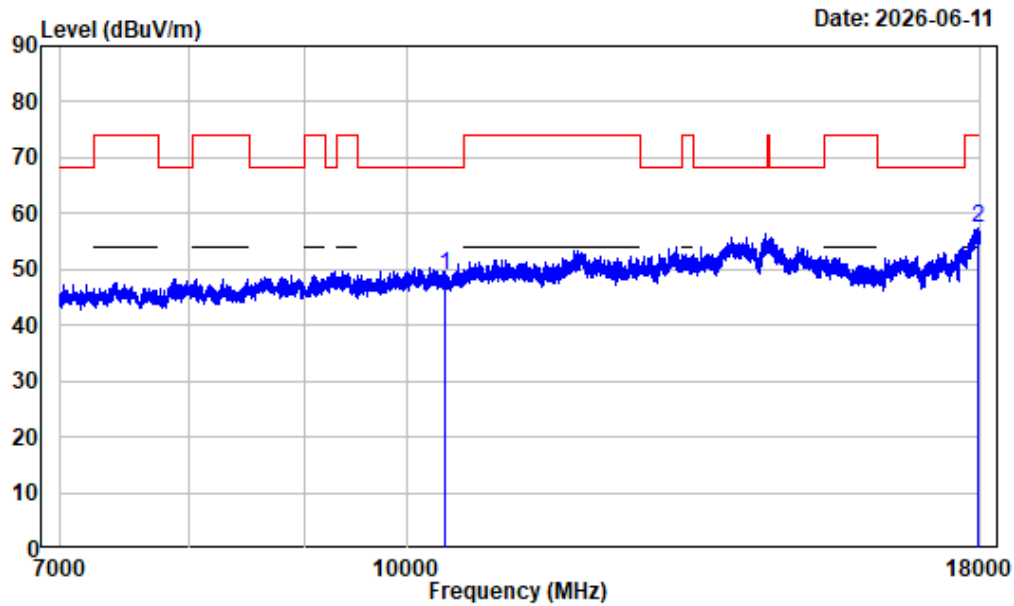

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10400.000	2.47	46.28	48.75	68.20	-19.45 Peak
2 17969.750	9.42	48.12	57.54	74.00	-16.46 Peak


7-18GHz_Horizontal_Average_802.11a_5200MHz_ant0

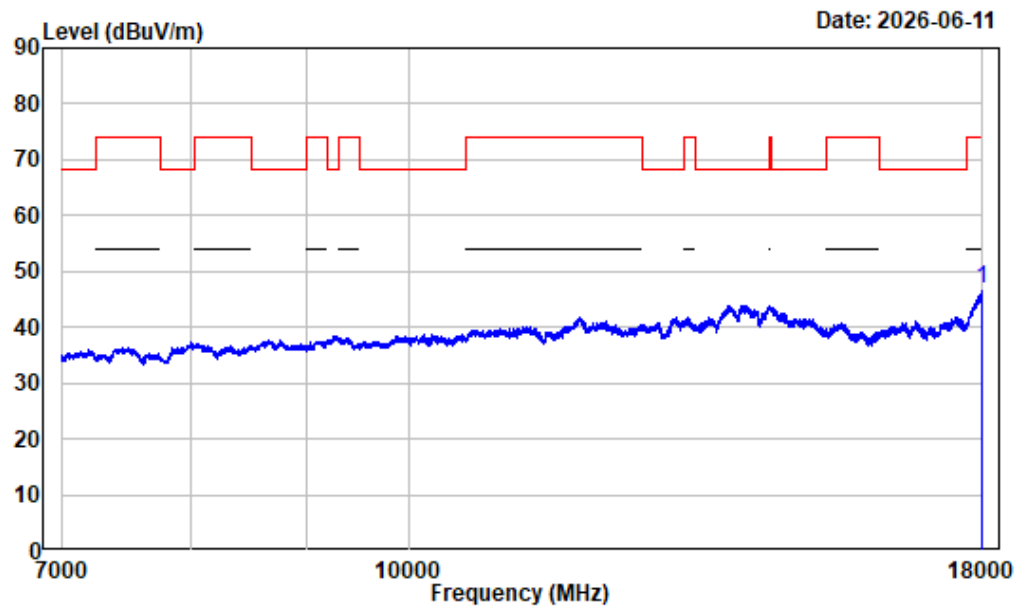

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17975.250	9.45	37.28	46.73	54.00	-7.27	Average


7-18GHz_Vertical_Peak_802.11a_5200MHz_ant0

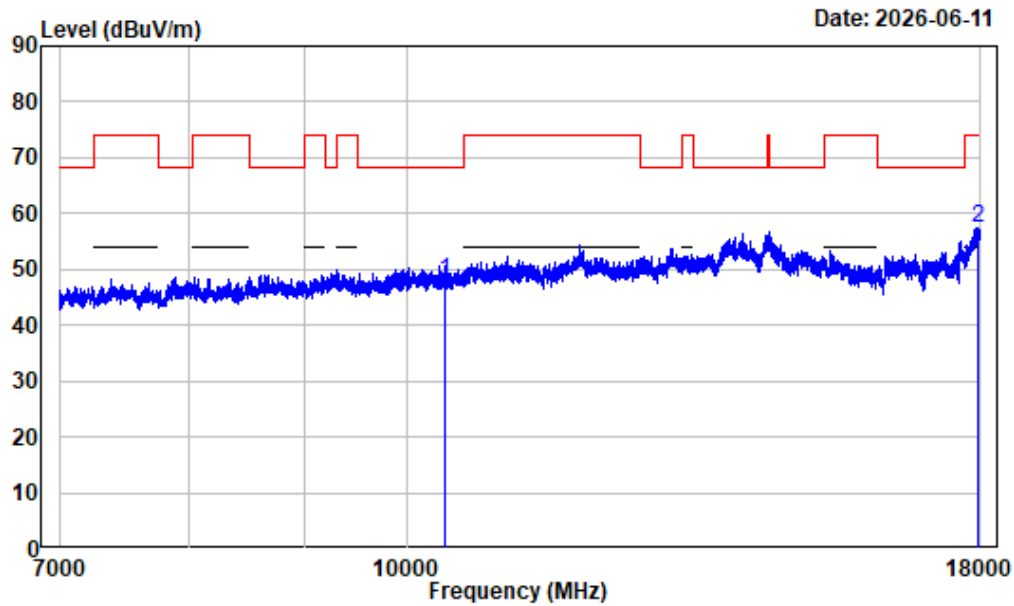

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 10400.000	2.47	45.38	47.85	68.20	-20.35 Peak
2 17946.380	9.31	48.12	57.43	74.00	-16.57 Peak


7-18GHz_Vertical_Average_802.11a_5200MHz_ant0

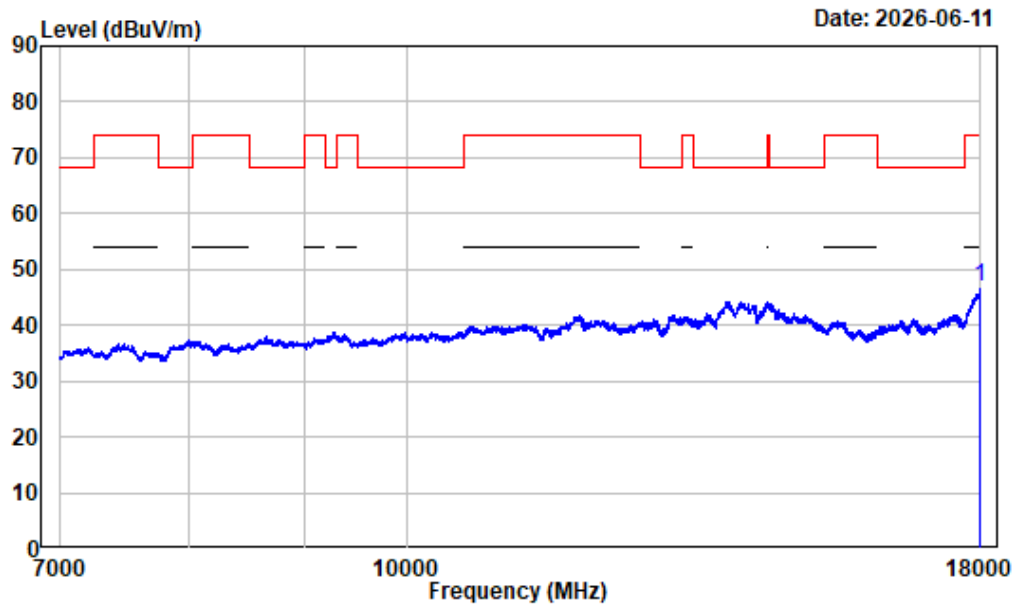

Condition : Vertical
 Project No. : 2601P05987E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : 5GWiFi-Band1-A_ANT0-5200

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.630	9.55	37.19	46.74	54.00	-7.26	Average


18-40GHz_Horizontal_802.11a_5200MHz_ant0

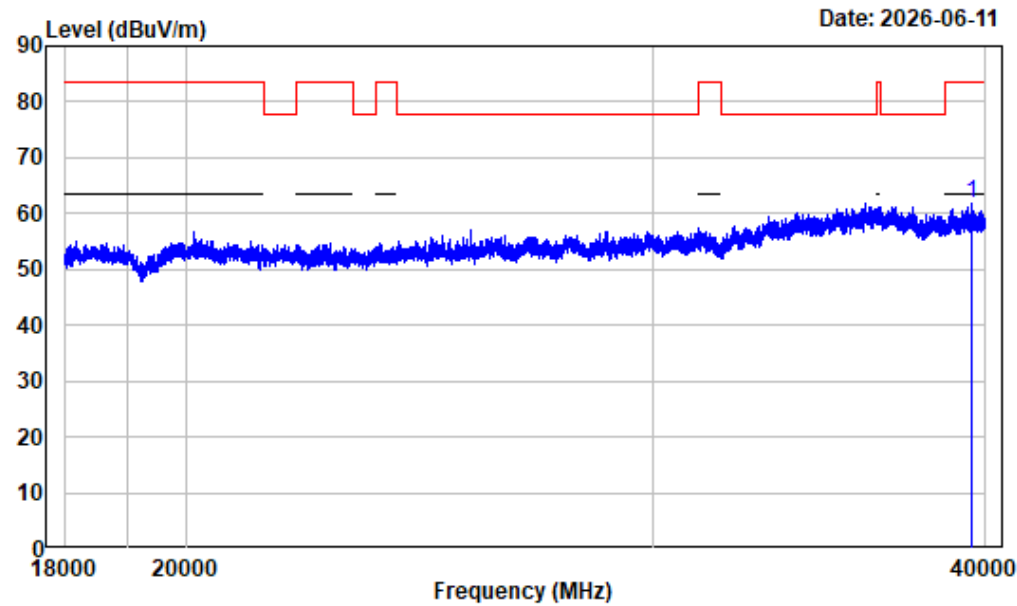

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39543.500	23.82	38.01	61.83	83.50	-21.67	Peak

18-40GHz_Vertical_802.11a_5200MHz_ant0

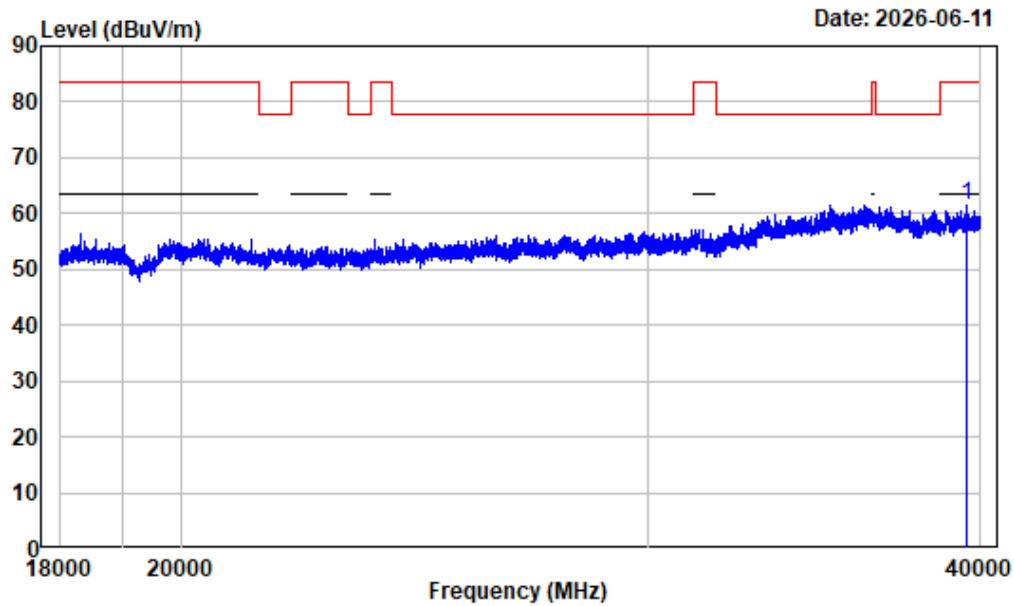


Condition : Vertical
 Project No. : 2601P05987E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-A_ANT0-5200

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39513.250	23.83	37.76	61.59	83.50	-21.91	Peak

5725-5850MHz: (Maximum output power mode, ANT0 802.11x40 5755MHz)


1-7GHz_Horizontal_802.11ax40_5755MHz

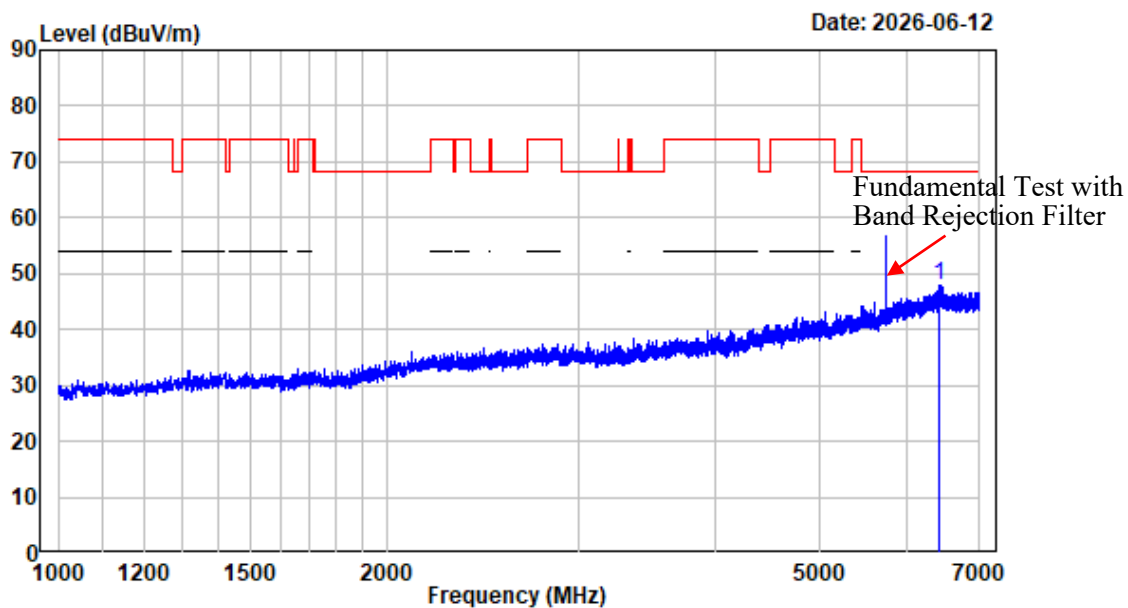

Condition : Horizontal
 Project No. : 2601P05987E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band4-AX40_ANT0-5755

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6433.750	-1.18	49.02	47.84	68.20	-20.36	Peak


1-7GHz_Vertical_802.11ax40_5755MHz

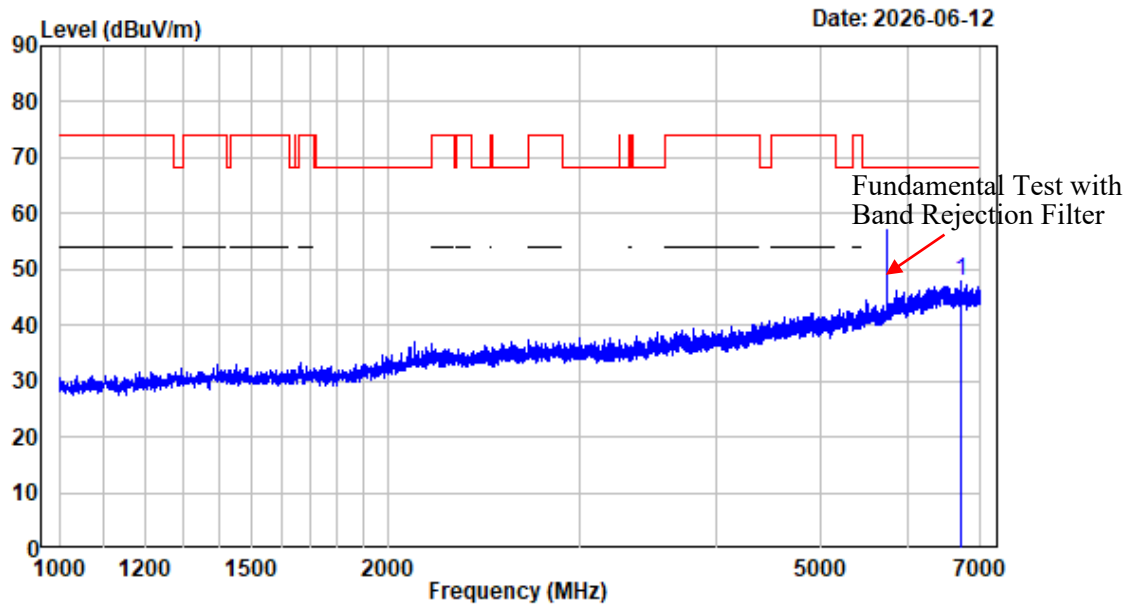

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6718.000	-1.49	49.50	48.01	68.20	-20.19	Peak


7-18GHz_Horizontal_Peak_802.11ax40_5755MHz

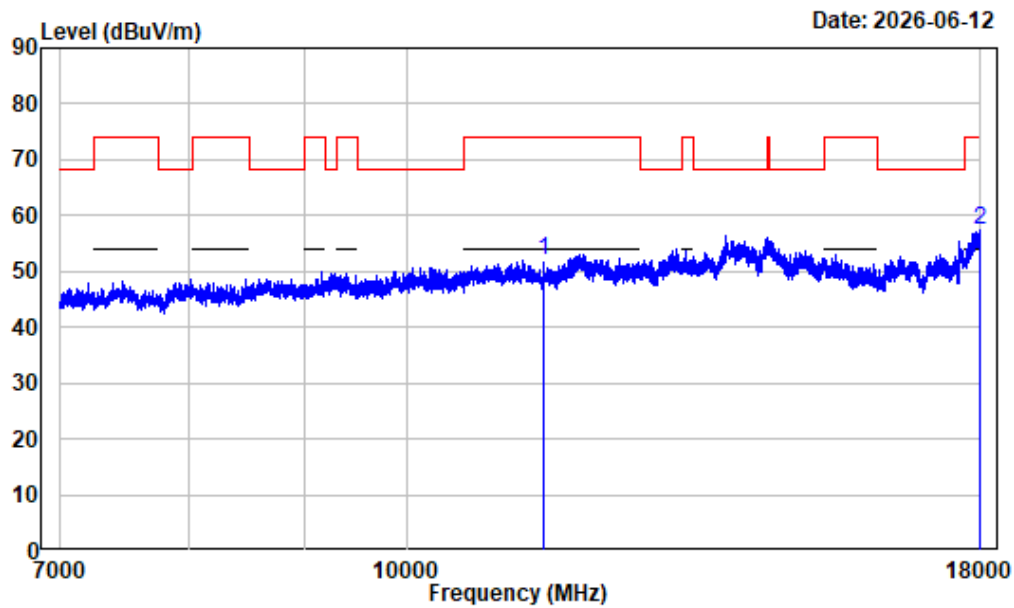

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5755

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 11510.000	3.63	48.19	51.82	74.00	-22.18 Peak
2 17984.880	9.49	47.99	57.48	74.00	-16.52 Peak


7-18GHz_Horizontal_Average_802.11ax40_5755MHz

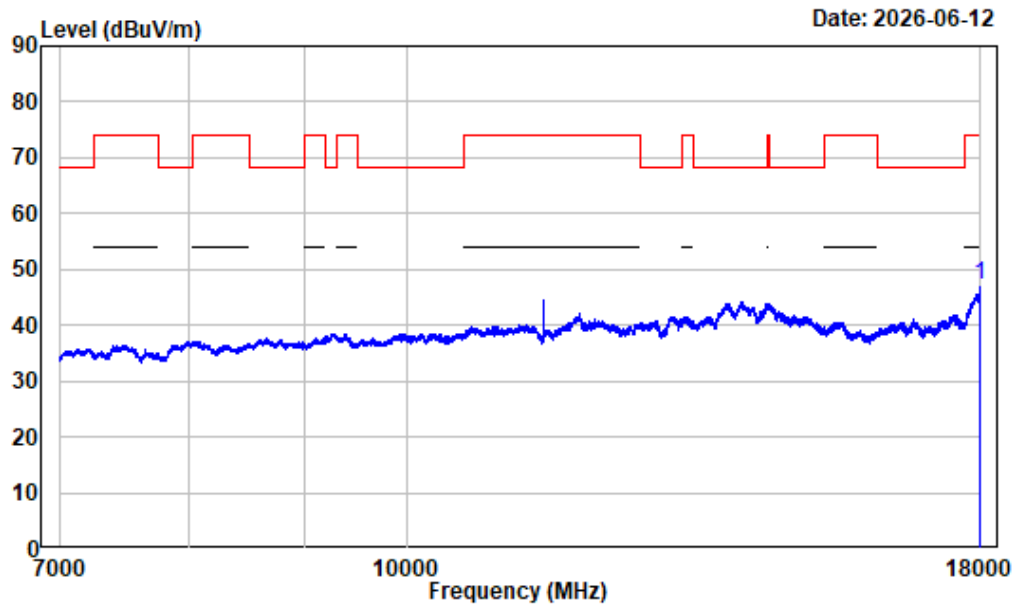

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5755

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17994.500	9.53	37.51	47.04	54.00	-6.96	Average


7-18GHz_Vertical_Peak_802.11ax40_5755MHz

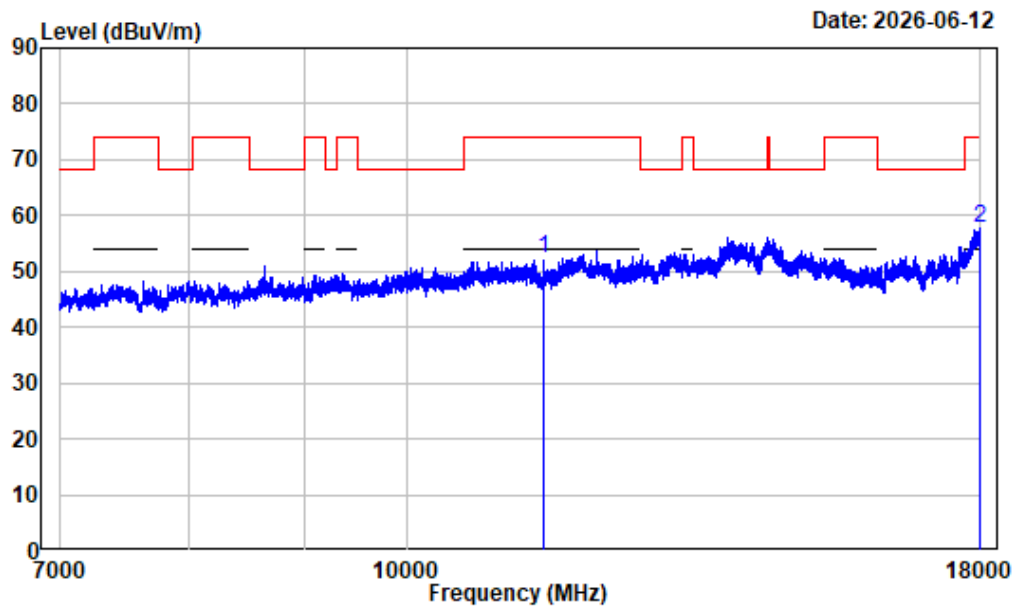

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5755

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 11510.000	3.63	48.69	52.32	74.00	-21.68	Peak
2 17990.380	9.51	48.28	57.79	74.00	-16.21	Peak


7-18GHz_Vertical_Average_802.11ax40_5755MHz

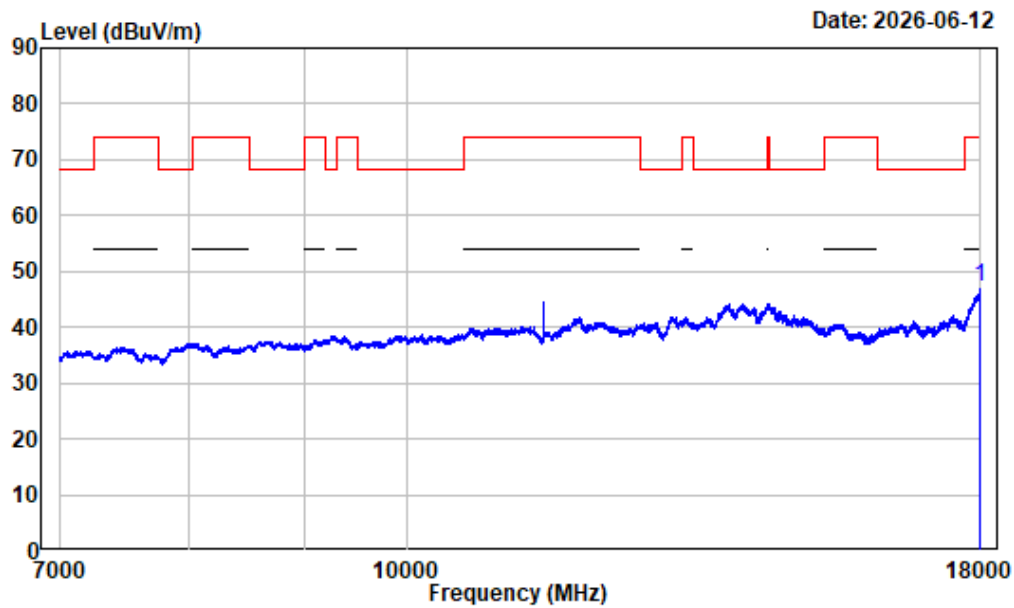

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5755

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17989.000	9.51	37.59	47.10	54.00	-6.90	Average


18-40GHz_Horizontal_Peak_802.11ax40_5775MHz

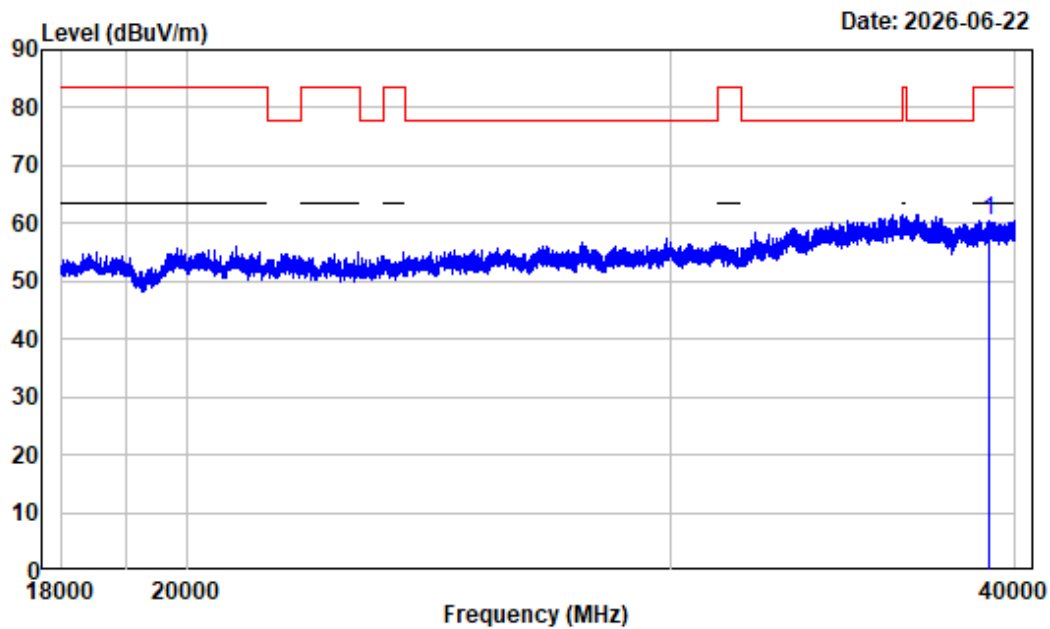

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5755

Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39155.750	23.97	36.50	60.47	83.50	-23.03	Peak

18-40GHz_Veritical_Peak_802.11ax40_5775MHz

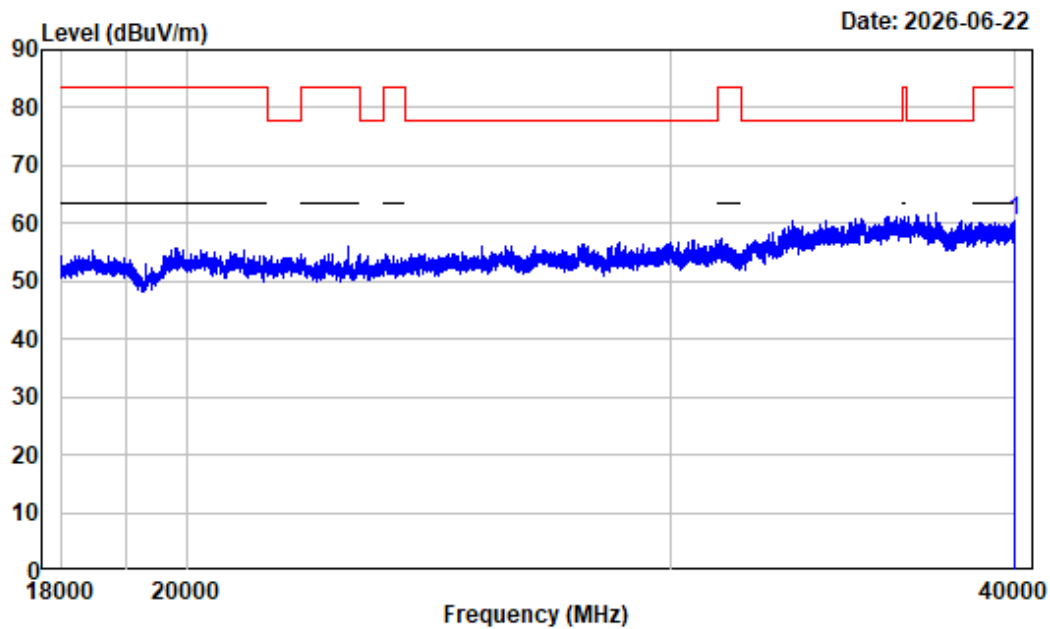

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40_ANT0-5755


Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39969.750	23.81	36.48	60.29	83.50	-23.21	Peak

For module YL43456

Band Edge

5150-5250MHz:


Left Band edge_Horizontal_Peak_802.11a_5180MHz

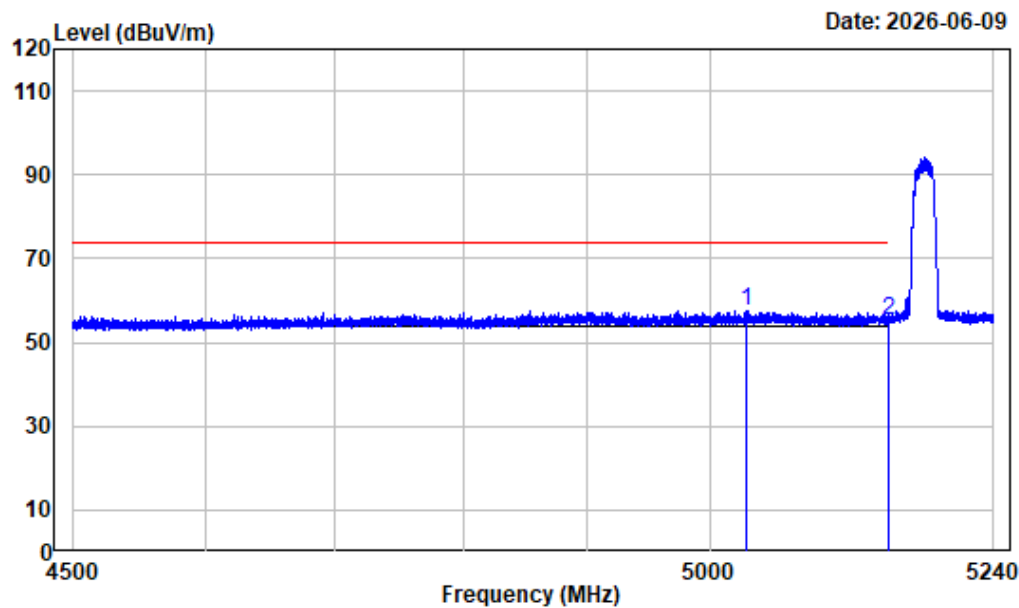

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq		Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5029.563	-7.29	64.81	57.52	74.00	-16.48	Peak
2	5150.000	-7.45	62.50	55.05	74.00	-18.95	Peak


Left Band edge_Horizontal_Average_802.11a_5180MHz

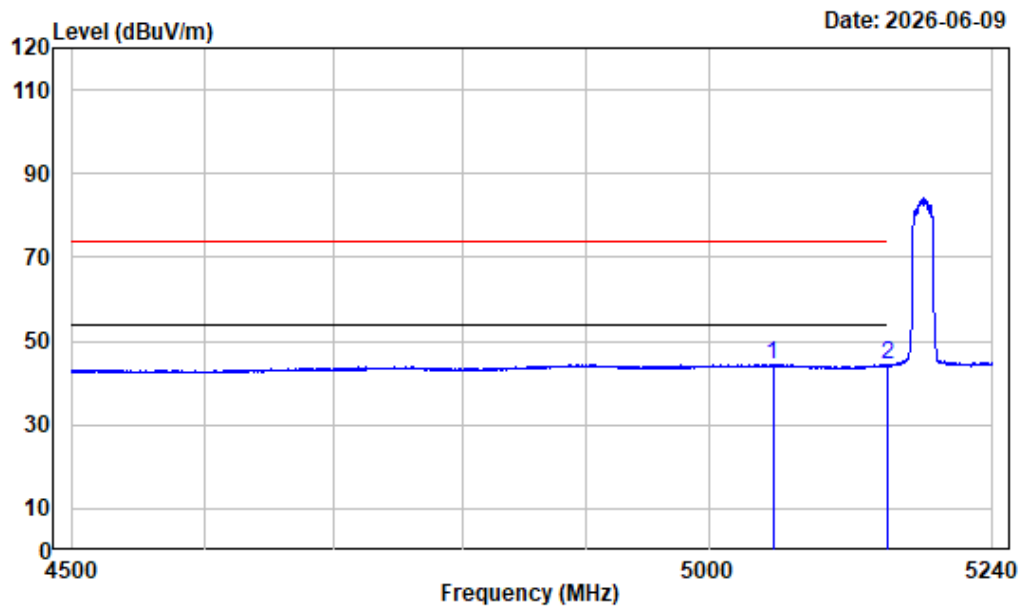

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5053.243	-7.29	51.70	44.41	54.00	-9.59 Average
2	5150.000	-7.45	51.70	44.25	54.00	-9.75 Average


Left Band edge_Vertical_Peak_802.11a_5180MHz

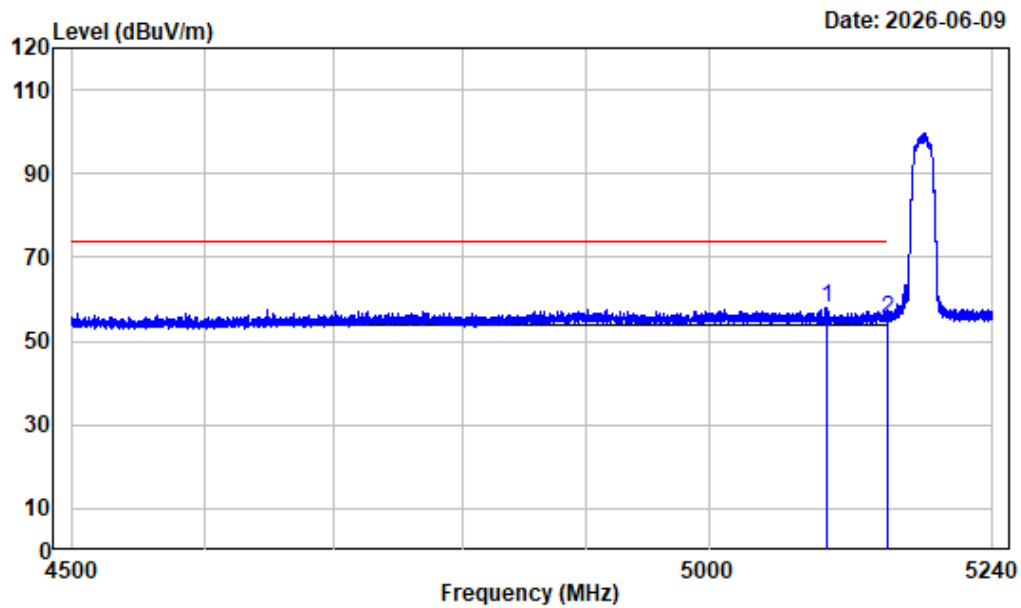

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5097.828	-7.47	65.44	57.97	74.00	-16.03 Peak
2	5150.000	-7.45	62.57	55.12	74.00	-18.88 Peak


Left Band edge_Vertical_Average_802.11a_5180MHz

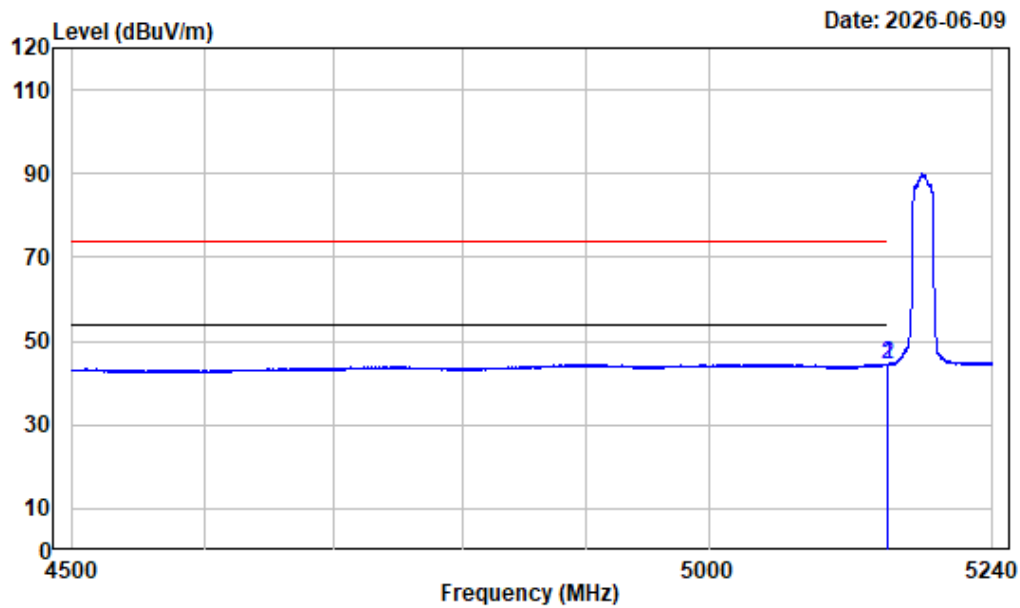

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5149.627	-7.45	52.01	44.56	54.00	-9.44 Average
2	5150.000	-7.45	51.84	44.39	54.00	-9.61 Average


Right Band edge_Horizontal_Peak_802.11a_5240MHz

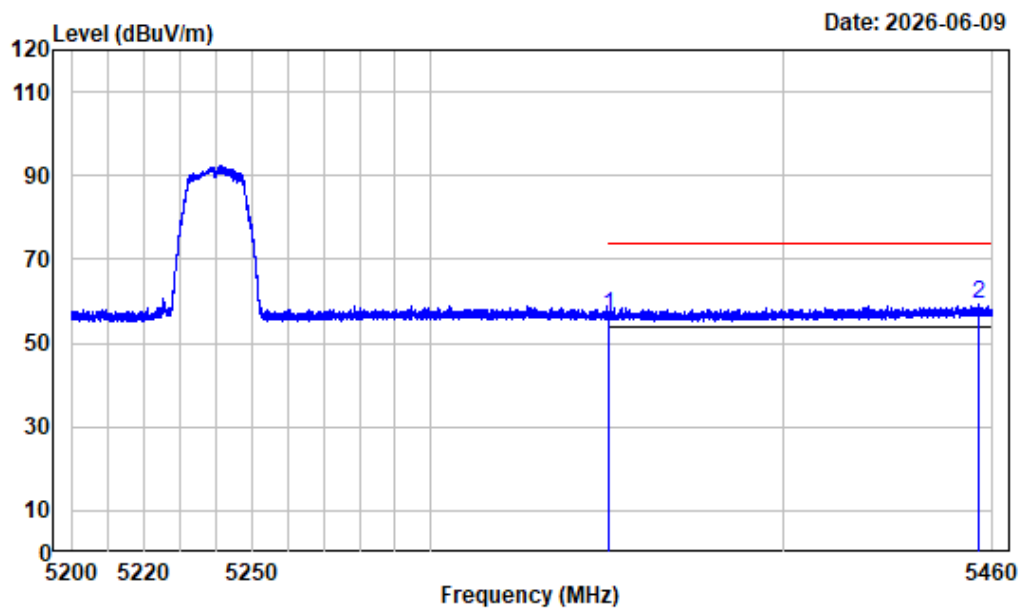

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.29	56.53	74.00	-17.47 Peak
2	5456.263	-6.28	65.46	59.18	74.00	-14.82 Peak


Right Band edge_Horizontal_Average_802.11a_5240MHz

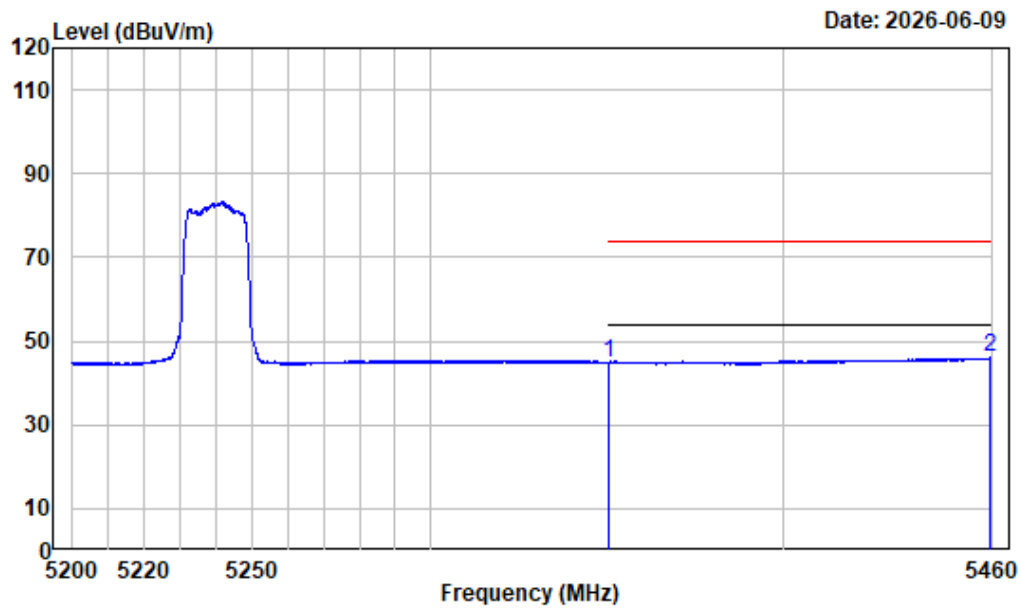

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	51.71	44.95	54.00	-9.05	Average
2 5459.252	-6.26	52.30	46.04	54.00	-7.96	Average


Right Band edge_Vertical_Peak_802.11a_5240MHz

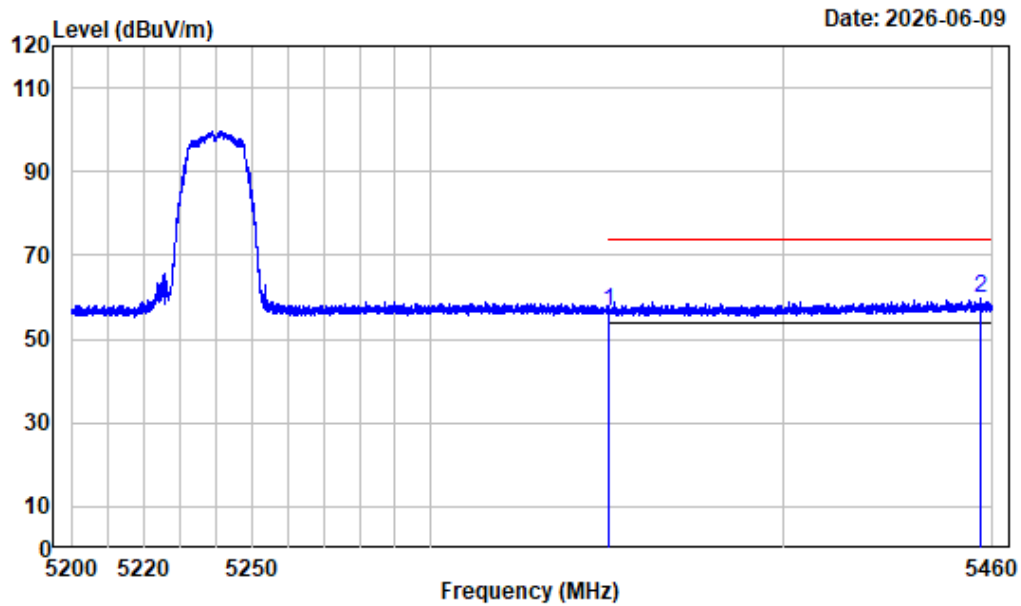

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.21	56.45	74.00	-17.55 Peak
2	5456.425	-6.28	66.00	59.72	74.00	-14.28 Peak


Right Band edge_Vertical_Average_802.11a_5240MHz

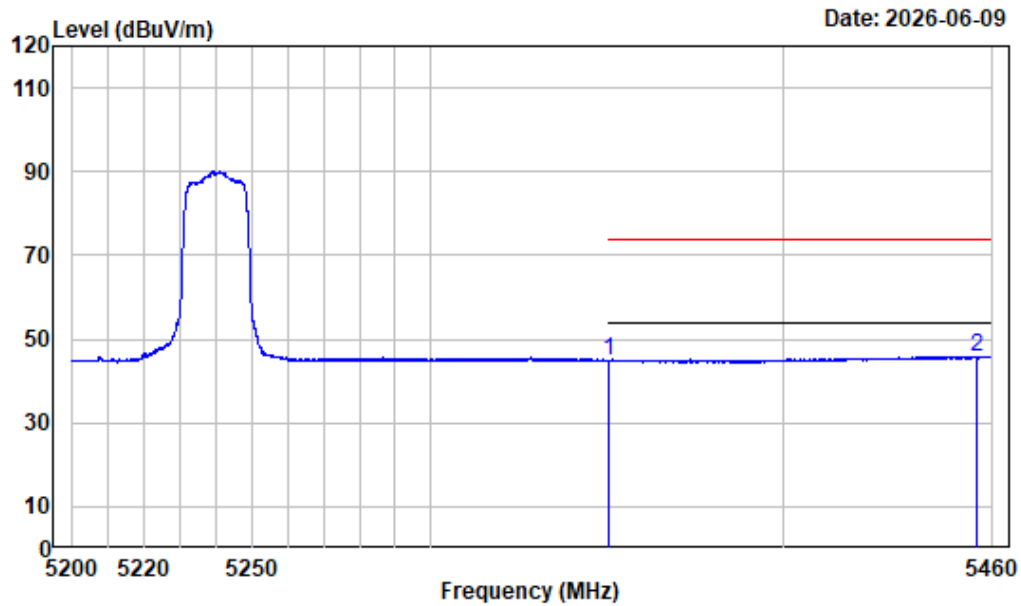

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.61	44.85	54.00	-9.15 Average
2	5455.223	-6.29	52.23	45.94	54.00	-8.06 Average


Left Band edge_Horizontal_Peak_802.11ac-VHT20_5180MHz

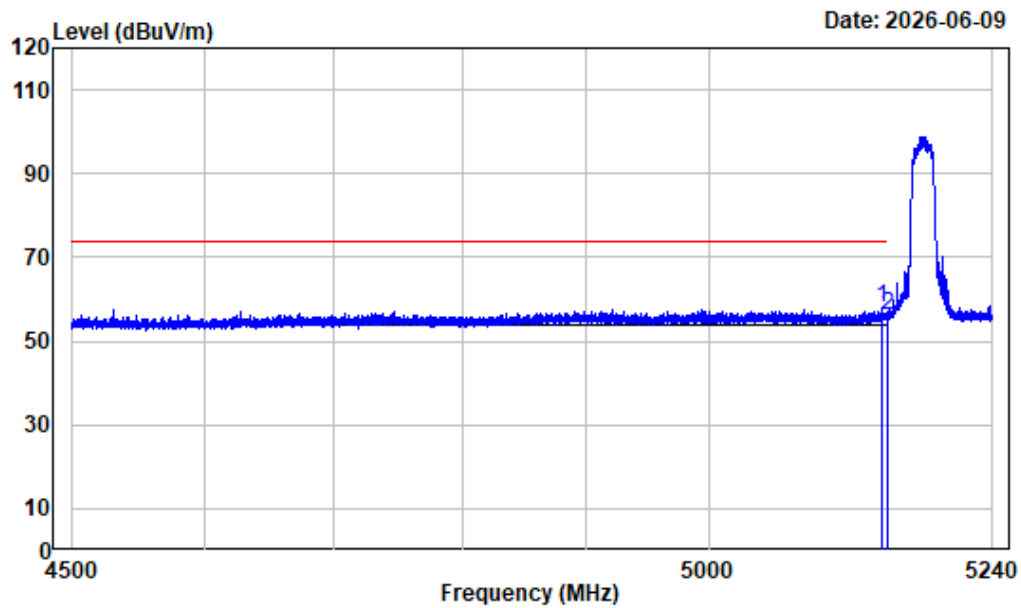

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5145.373	-7.46	65.33	57.87	74.00	-16.13	Peak
2 5150.000	-7.45	63.40	55.95	74.00	-18.05	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT20_5180MHz

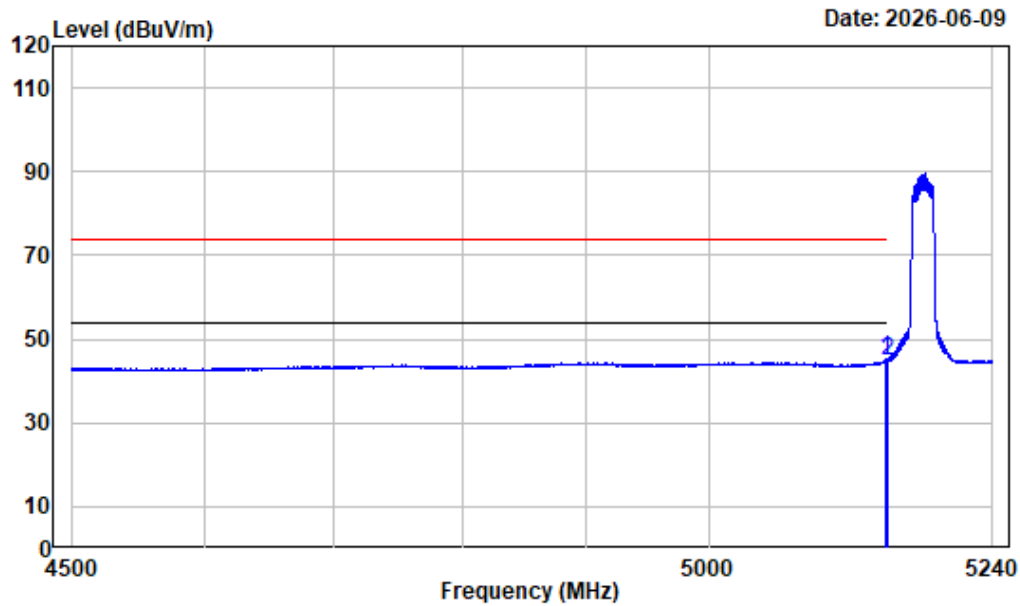

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5148.795	-7.45	52.60	45.15	54.00	-8.85 Average
2	5150.000	-7.45	52.45	45.00	54.00	-9.00 Average


Left Band edge_Vertical_Peak_802.11ac-VHT20_5180MHz

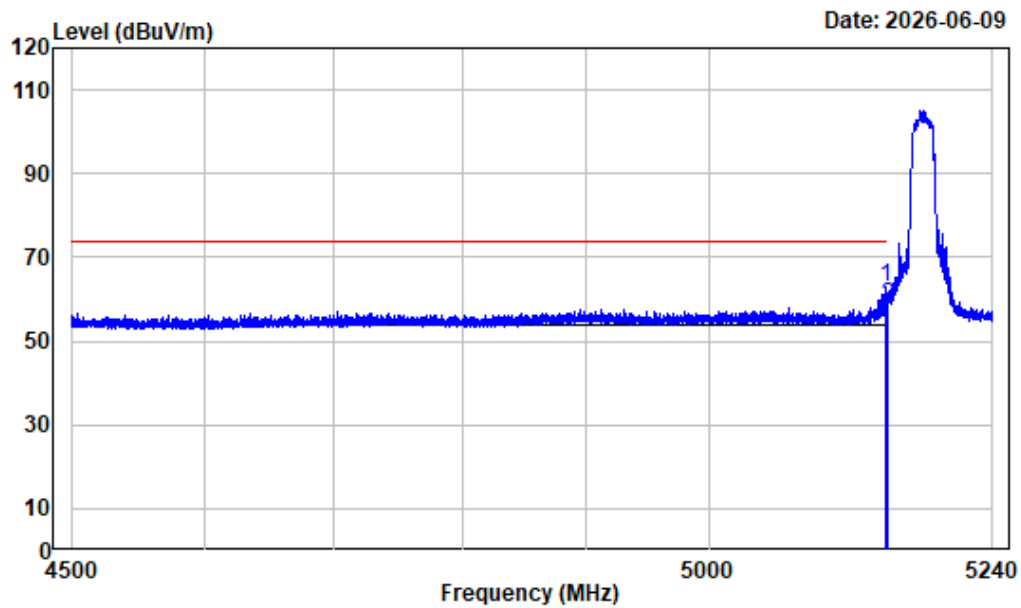

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5148.980	-7.45	70.56	63.11	74.00	-10.89	Peak
2 5150.000	-7.45	66.06	58.61	74.00	-15.39	Peak


Left Band edge_Vertical_Average_802.11ac-VHT20_5180MHz

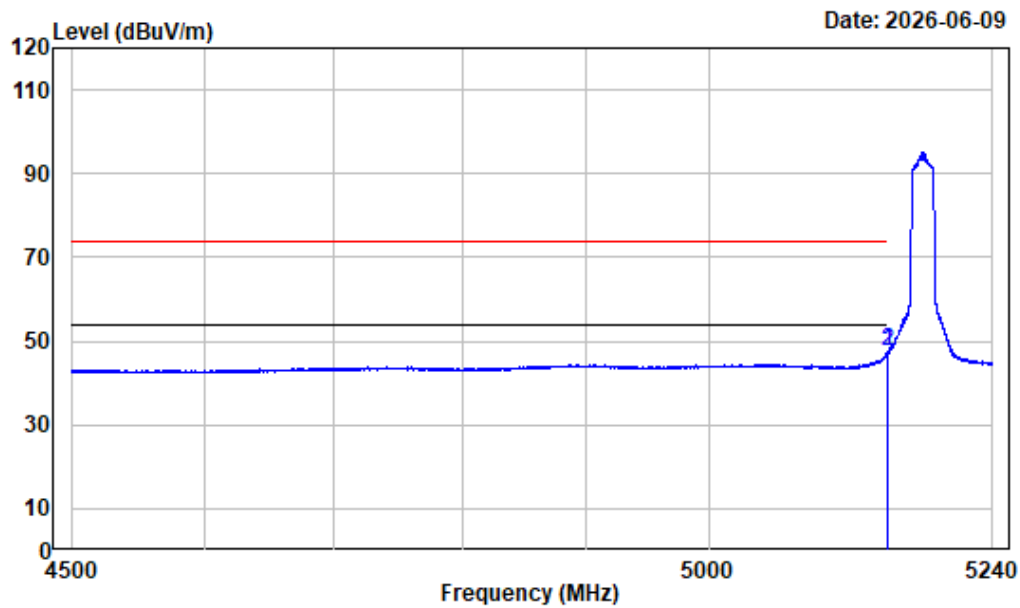

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5149.998	-7.45	54.90	47.45	54.00	-6.55 Average
2	5150.000	-7.45	54.85	47.40	54.00	-6.60 Average


Right Band edge_Horizontal_Peak_802.11ac-VHT20_5240MHz

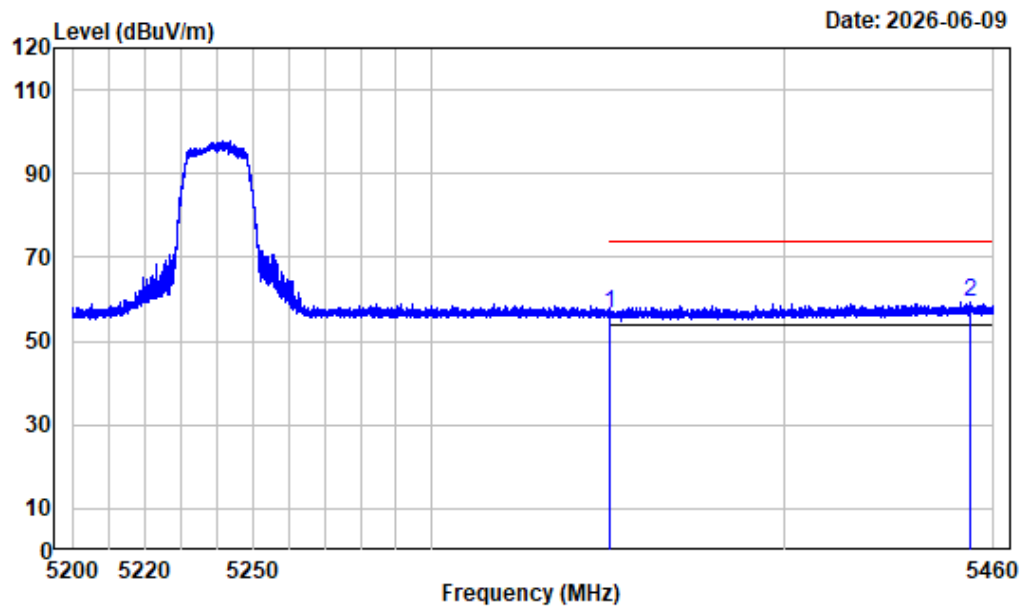

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	63.24	56.48	74.00	-17.52 Peak
2	5453.467	-6.29	65.75	59.46	74.00	-14.54 Peak


Right Band edge_Horizontal_Average_802.11ac-VHT20_5240MHz

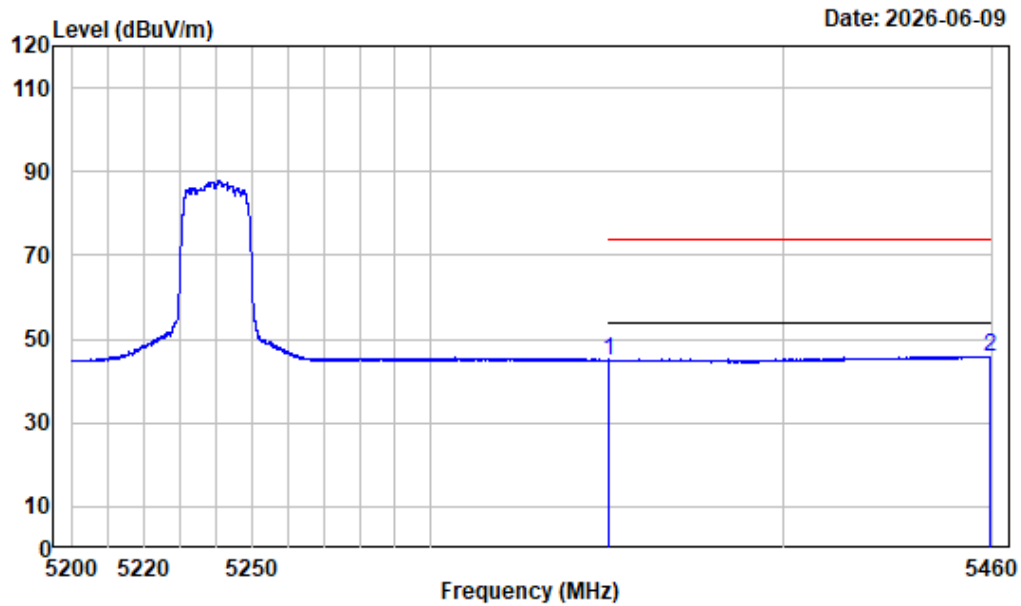

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.77	45.01	54.00	-8.99 Average
2	5459.480	-6.26	52.20	45.94	54.00	-8.06 Average


Right Band edge_Vertical_Peak_802.11ac-VHT20_5240MHz

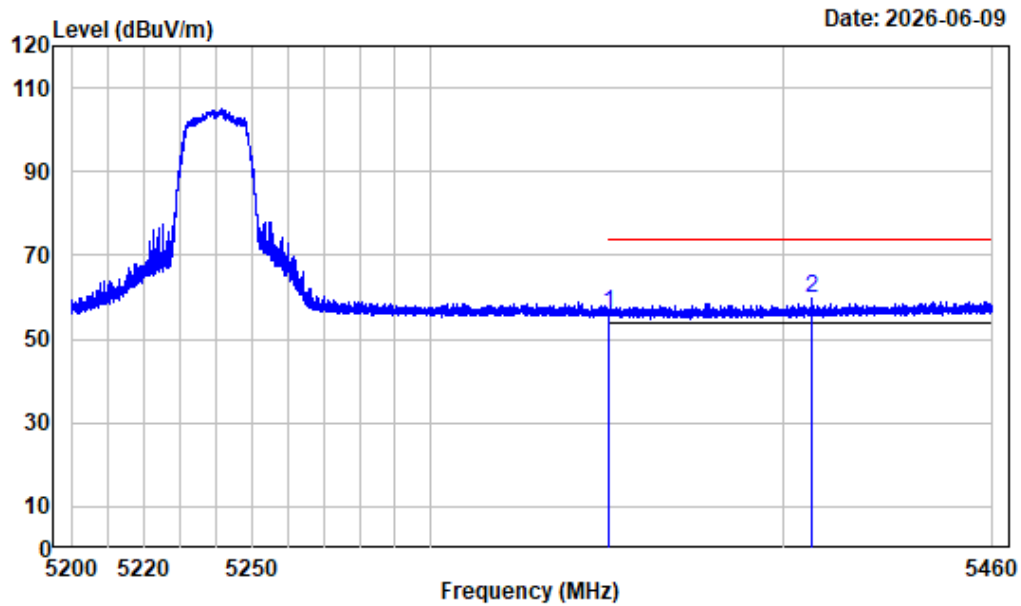

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	62.78	56.02	74.00	-17.98	Peak
2 5408.163	-6.56	66.17	59.61	74.00	-14.39	Peak


Right Band edge_Vertical_Average_802.11ac-VHT20_5240MHz

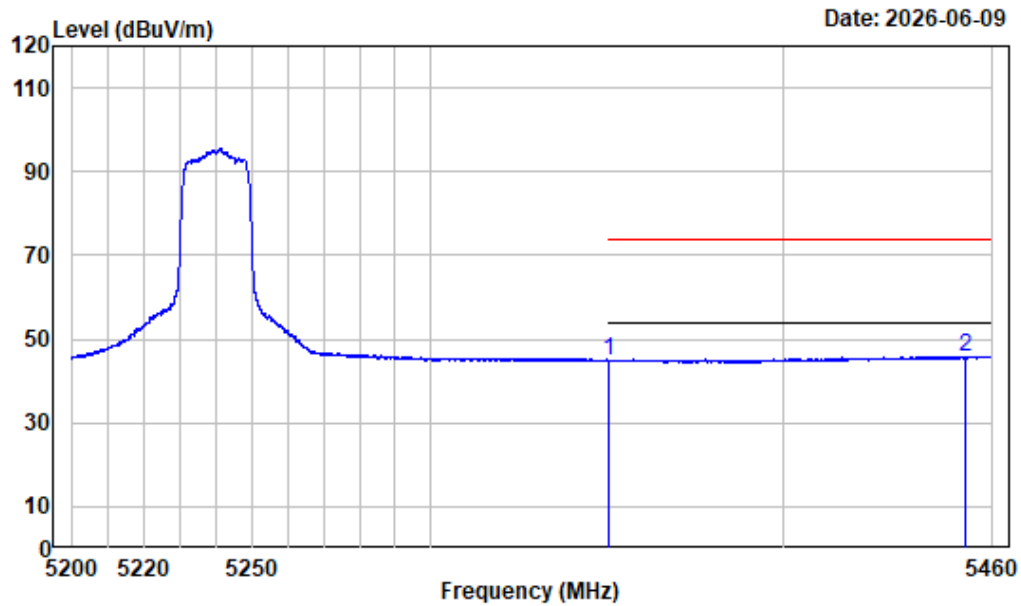

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.53	44.77	54.00	-9.23	Average
2	5452.200	-6.29	52.20	45.91	54.00	-8.09	Average


Left Band edge_Horizontal_Peak_802.11ac-VHT40_5190MHz

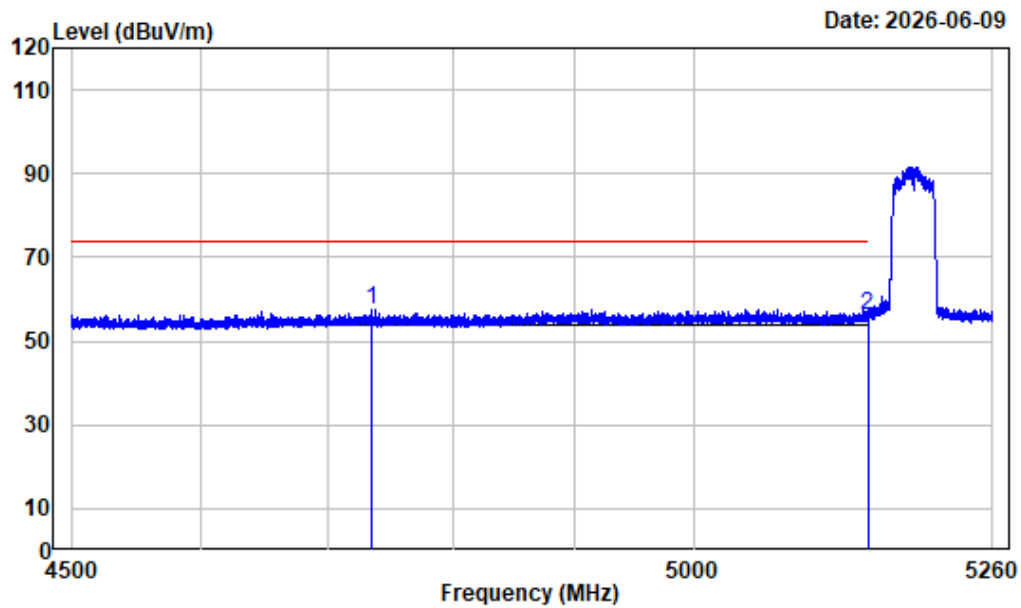

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4734.270	-7.73	65.41	57.68	74.00	-16.32	Peak
2 5150.000	-7.45	63.48	56.03	74.00	-17.97	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT40_5190MHz

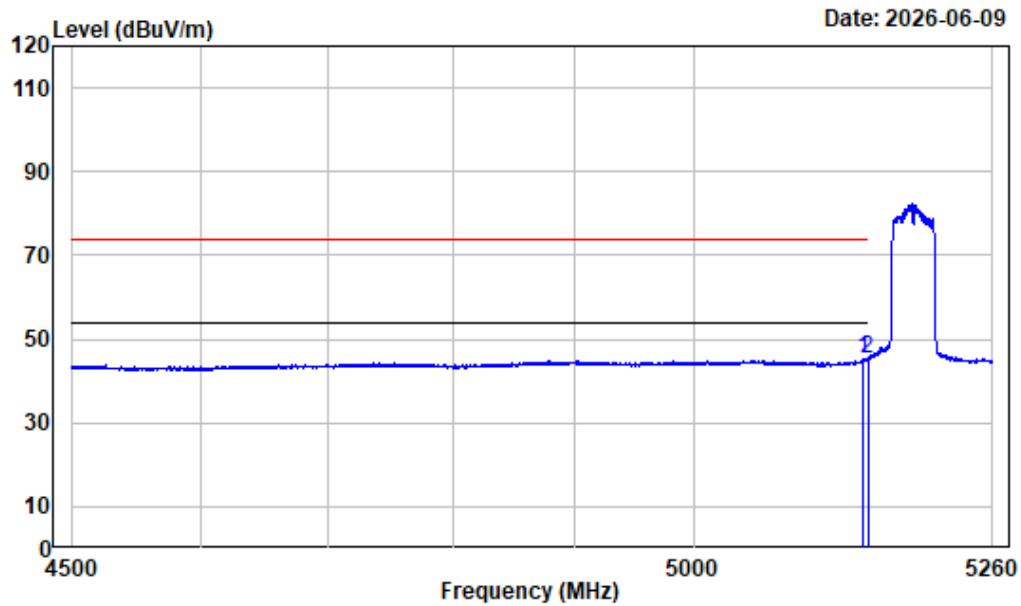

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5145.620	-7.45	52.76	45.31	54.00	-8.69	Average
2 5150.000	-7.45	52.63	45.18	54.00	-8.82	Average


Left Band edge_Vertical_Peak_802.11ac-VHT40_5190MHz

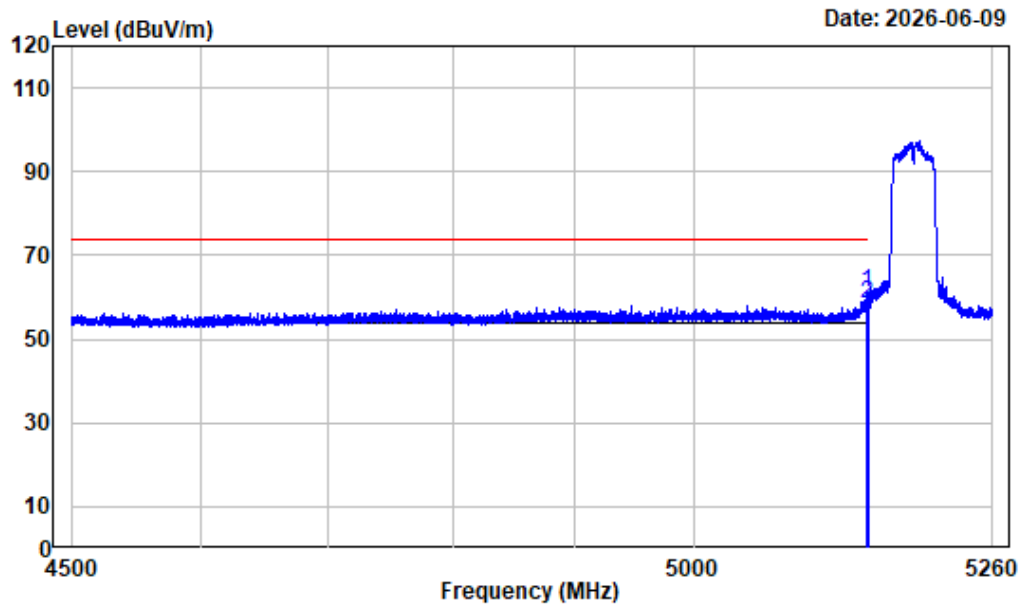

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5149.800	-7.45	68.36	60.91	74.00	-13.09 Peak
2 5150.000	-7.45	65.77	58.32	74.00	-15.68 Peak


Left Band edge_Vertical_Average_802.11ac-VHT40_5190MHz

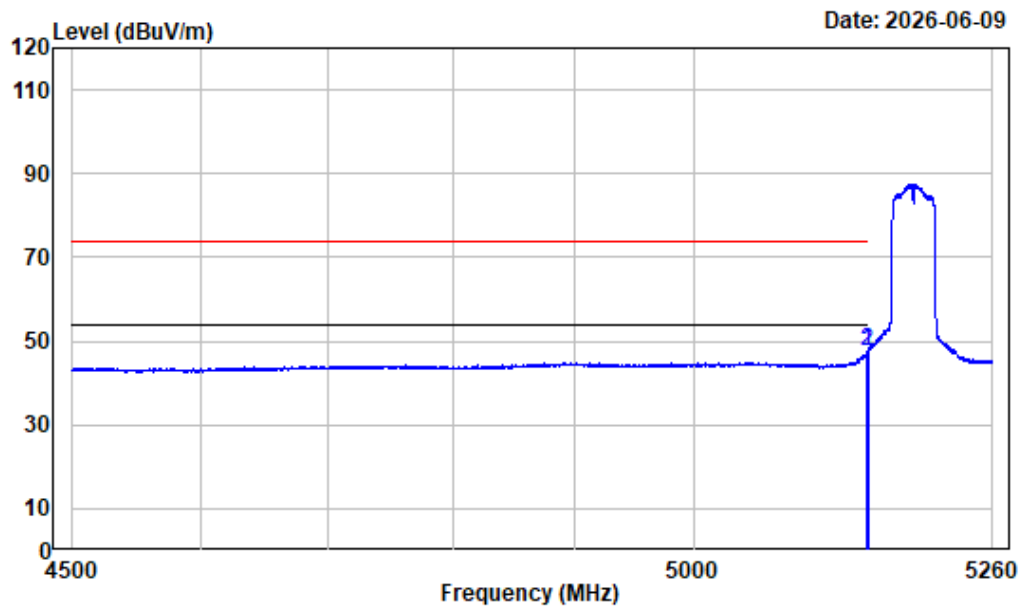

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.895	-7.45	55.12	47.67	54.00	-6.33	Average
2 5150.000	-7.45	55.10	47.65	54.00	-6.35	Average


Right Band edge_Horizontal_Peak_802.11ac-VHT40_5230MHz

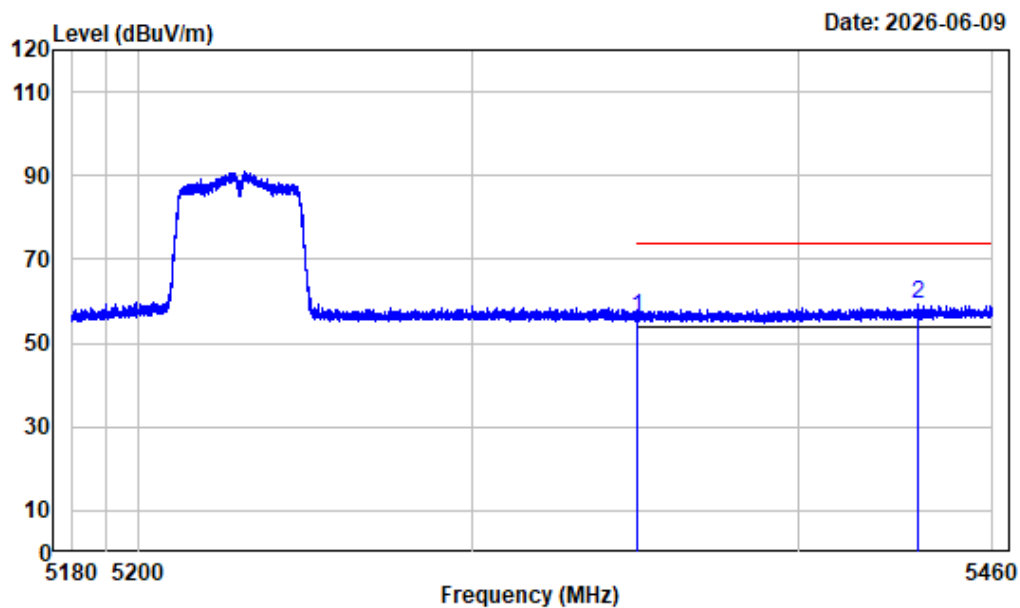

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.07	56.31	74.00	-17.69	Peak
2 5436.585	-6.39	65.83	59.44	74.00	-14.56	Peak


Right Band edge_Horizontal_Average_802.11ac-VHT40_5230MHz

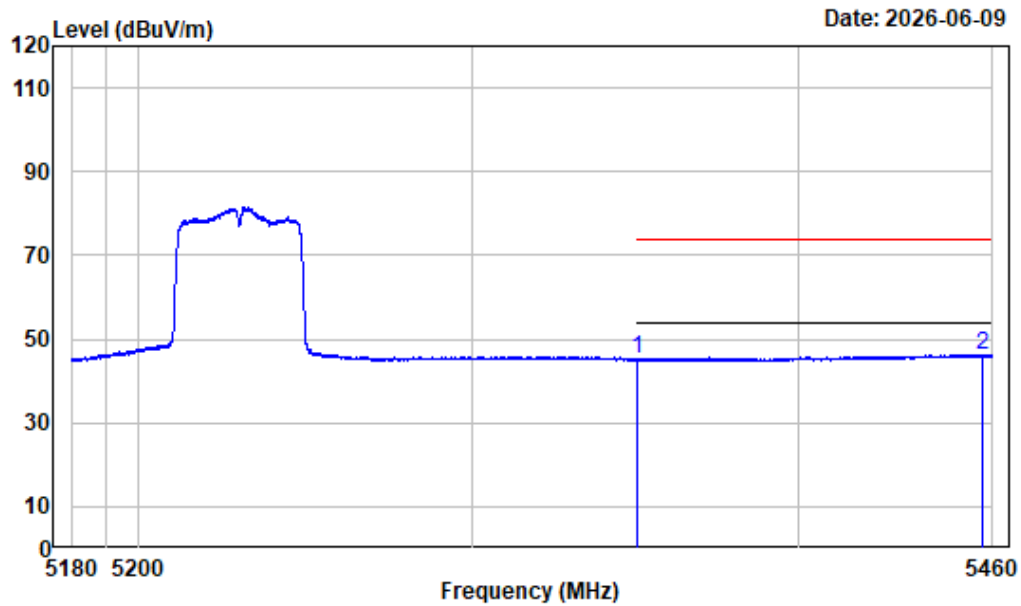

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.85	45.09	54.00	-8.91 Average
2	5456.815	-6.28	52.55	46.27	54.00	-7.73 Average


Right Band edge_Vertical_Peak_802.11ac-VHT40_5230MHz

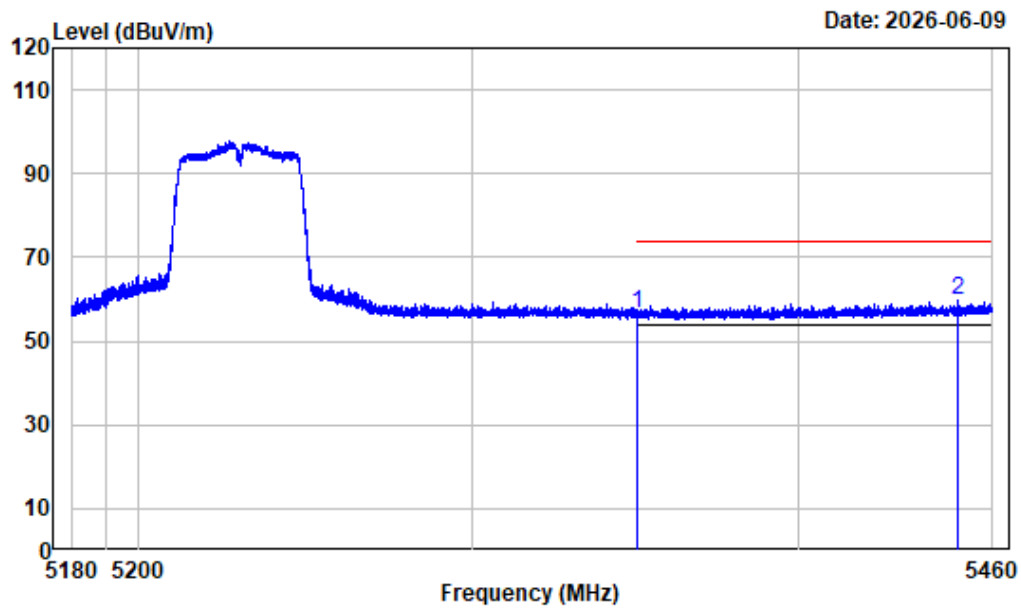

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.46	56.70	74.00	-17.30	Peak
2 5449.325	-6.31	66.17	59.86	74.00	-14.14	Peak


Right Band edge_Vertical_Average_802.11ac-VHT40_5230MHz

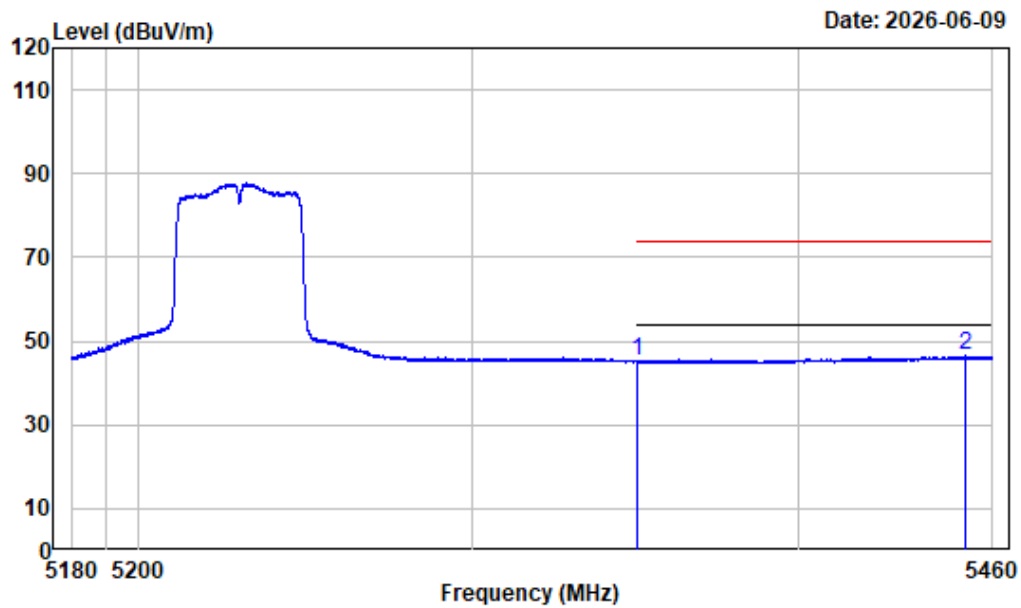

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.92	45.16	54.00	-8.84 Average
2	5451.740	-6.30	52.76	46.46	54.00	-7.54 Average


Left Band edge_Horizontal_Peak_802.11ac-VHT80_5210MHz

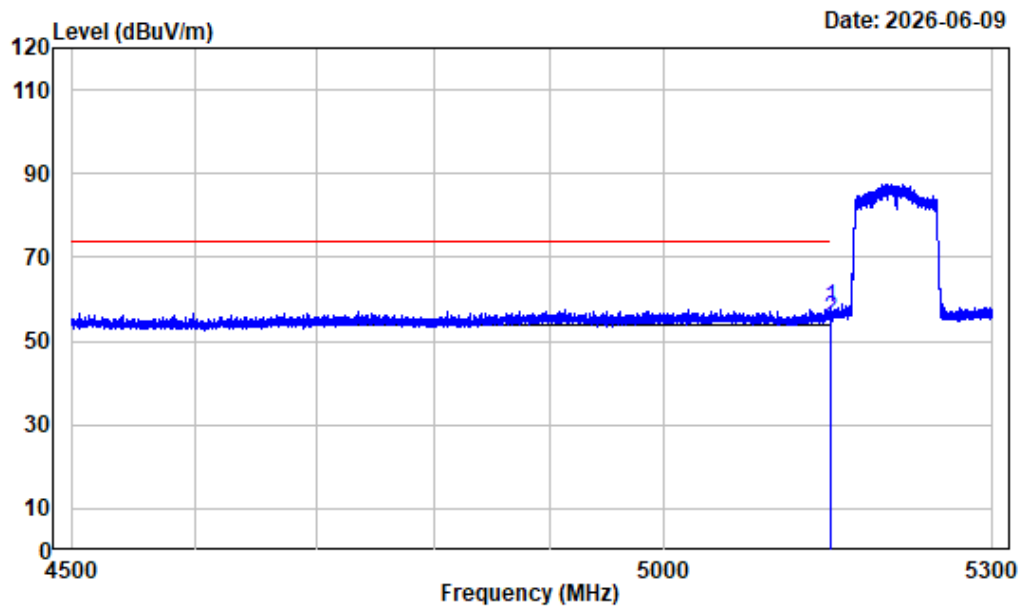

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.100	-7.45	65.56	58.11	74.00	-15.89	Peak
2 5150.000	-7.45	62.74	55.29	74.00	-18.71	Peak


Left Band edge_Horizontal_Average_802.11ac-VHT80_5210MHz

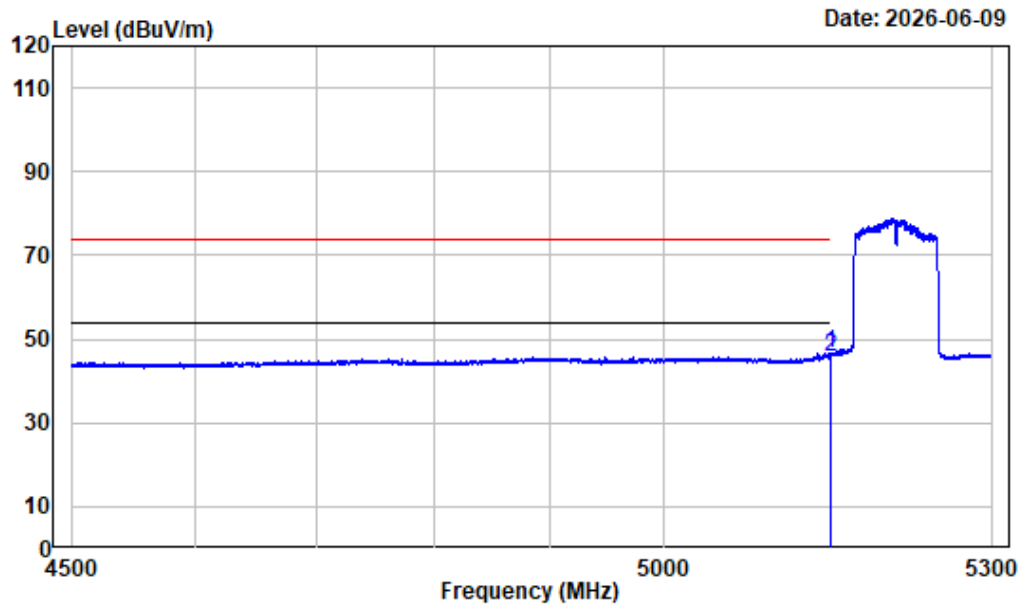

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.700	-7.45	54.28	46.83	54.00	-7.17 Average
2	5150.000	-7.45	53.39	45.94	54.00	-8.06 Average


Left Band edge_Vertical_Peak_802.11ac-VHT80_5210MHz

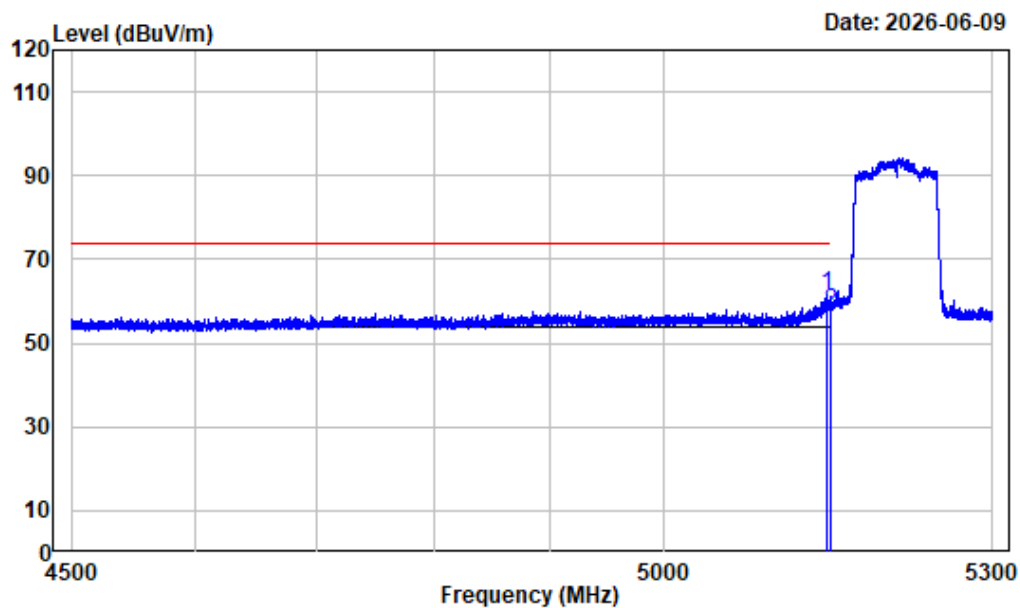

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.100	-7.45	68.86	61.41	74.00	-12.59 Peak
2	5150.000	-7.45	65.13	57.68	74.00	-16.32 Peak


Left Band edge_Vertical_Average_802.11ac_vht80 5210MHz

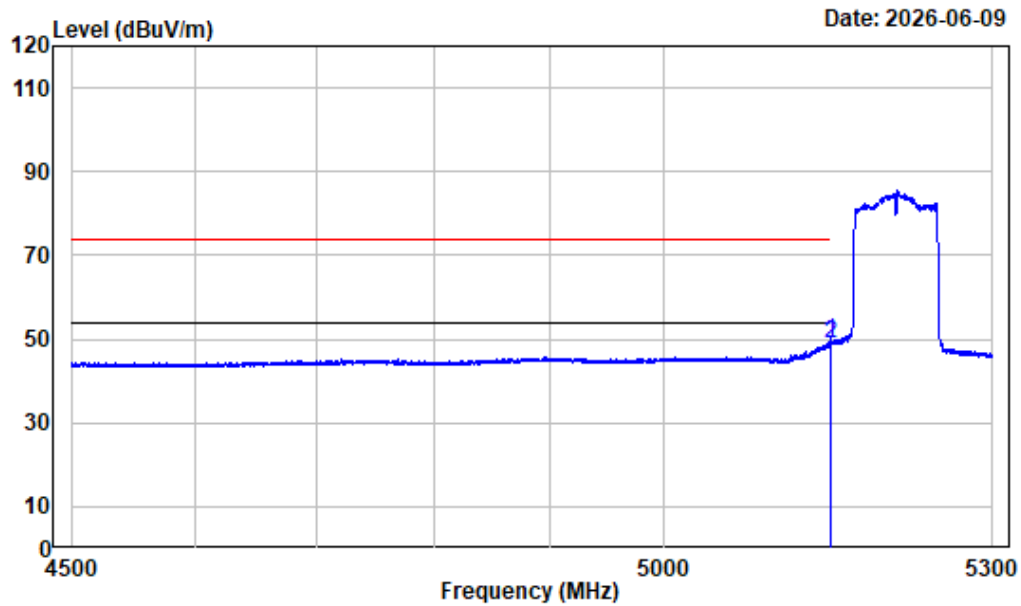

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5149.400	-7.45	56.77	49.32	54.00	-4.68 Average
2	5150.000	-7.45	56.37	48.92	54.00	-5.08 Average


Right Band edge_Horizontal_Peak_802.11ac-VHT80_5210MHz

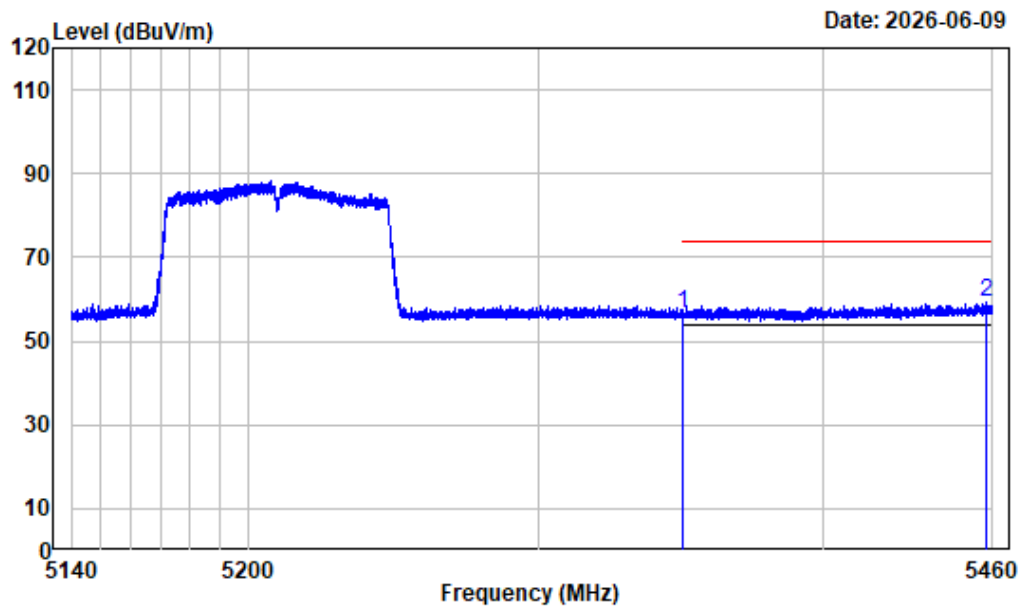

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.27	56.51	74.00	-17.49	Peak
2	5457.920	-6.28	65.40	59.12	74.00	-14.88	Peak


Right Band edge_Horizontal_Average_802.11ac-VHT80_5210MHz

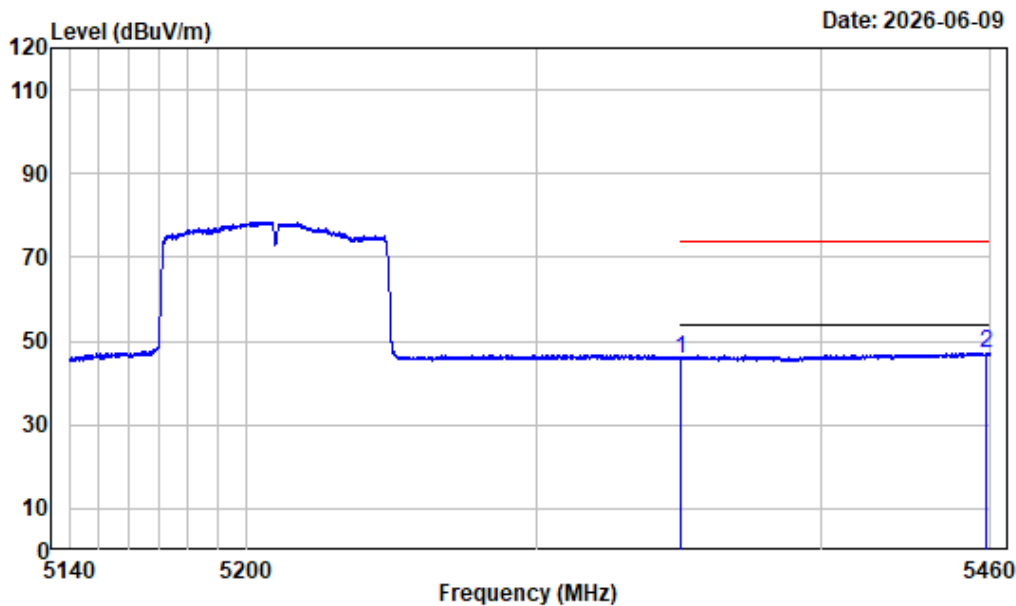

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.61	45.85	54.00	-8.15 Average
2	5458.520	-6.28	53.47	47.19	54.00	-6.81 Average


Right Band edge_Vertical_Peak_802.11ac-VHT80_5210MHz

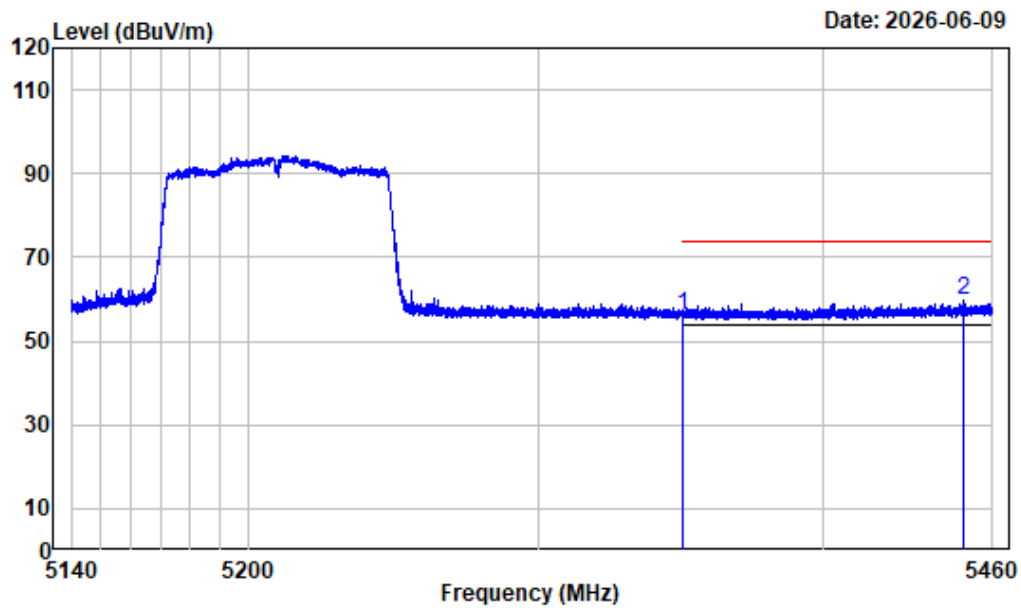

Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.98	56.22	74.00	-17.78 Peak
2	5449.400	-6.31	66.25	59.94	74.00	-14.06 Peak

Right Band edge_Vertical_Average_802.11ac-VHT80_5210MHz

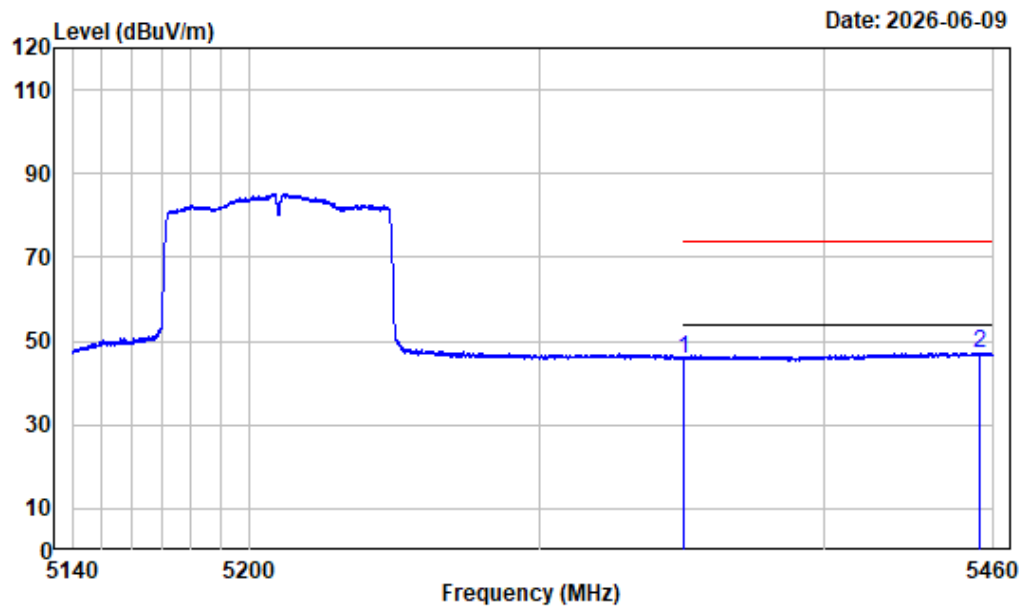


Condition : Vertical
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:5kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.72	45.96	54.00	-8.04 Average
2	5455.200	-6.29	53.57	47.28	54.00	-6.72 Average

5250-5350MHz:


Left Band edge_Horizontal_Peak_802.11a_5260MHz

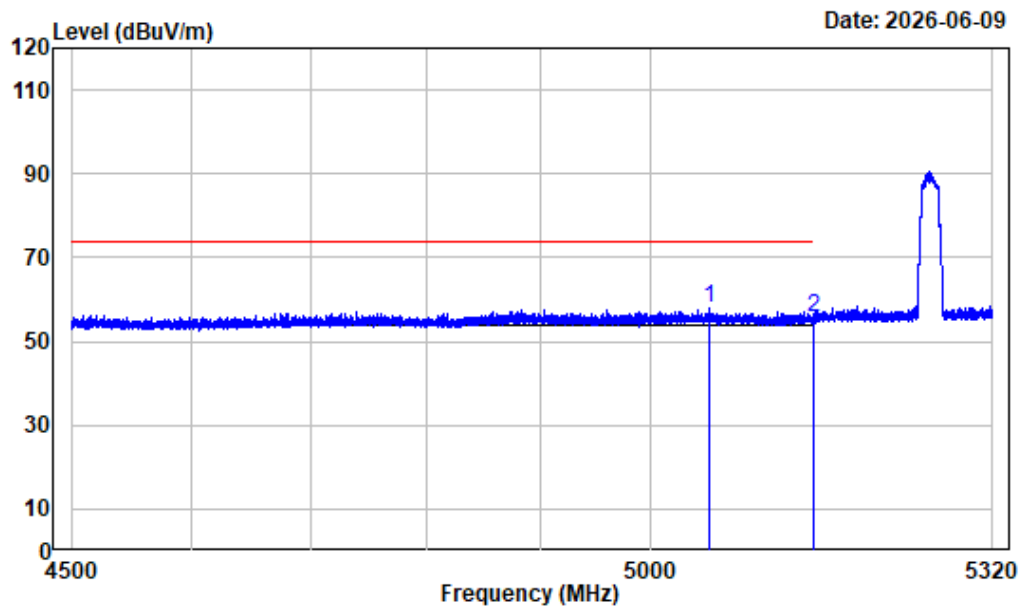

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq		Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5053.500	-7.29	65.04	57.75	74.00	-16.25	Peak
2	5150.000	-7.45	63.07	55.62	74.00	-18.38	Peak

Left Band edge_Horizontal_Average_802.11a_5260MHz

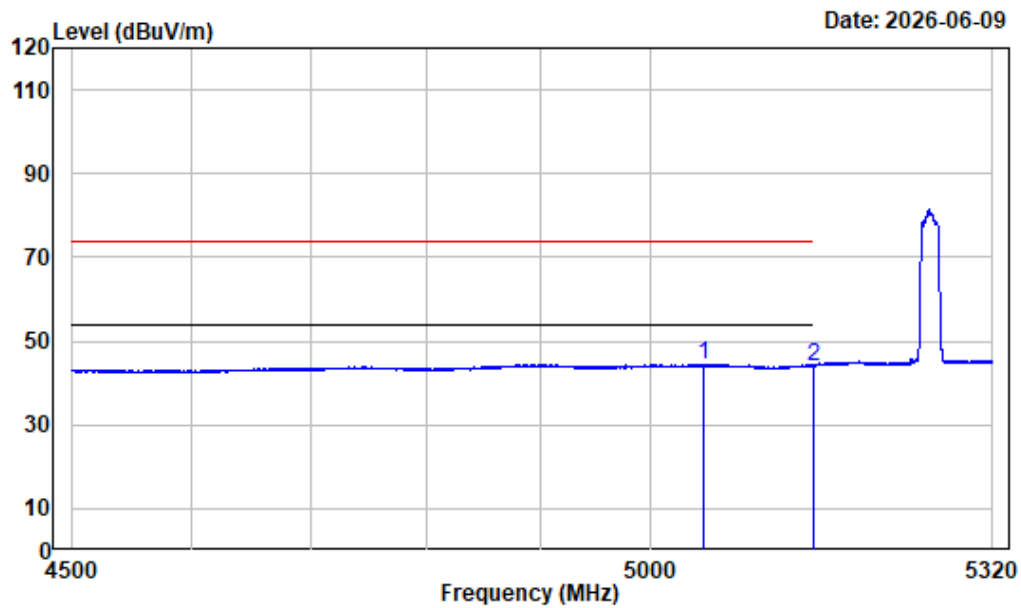

Condition : Horizontal
Project No. : 2601P05987E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5048.067	-7.29	51.68	44.39	54.00	-9.61	Average
2 5150.000	-7.45	51.57	44.12	54.00	-9.88	Average