

# TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.  
Address: No.666 Hu'an Rd. Huli District Xiamen City, Fujian, China  
Report Number: 2501V00086E-RF-00A  
FCC ID: T2C-W92LTE

## Test Standard (s)

FCC PART 27; FCC PART 24E

## Sample Description

Product Type: LTE DECT Base Station  
Model No.: W92LTE  
Multiple Model(s) No.: N/A  
Trade Mark: **Yealink**  
Date Received: 2025/07/15  
Issue Date: 2025/10/23

|              |       |
|--------------|-------|
| Test Result: | Pass▲ |
|--------------|-------|

▲ In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

*Bruce Lin*

Bruce Lin  
RF Engineer

## Approved By:

*Nancy Wang*

Nancy Wang  
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.  
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.  
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.  
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

## Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China  
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

## **TABLE OF CONTENTS**

|                                                          |            |
|----------------------------------------------------------|------------|
| <b>DOCUMENT REVISION HISTORY .....</b>                   | <b>3</b>   |
| <b>GENERAL INFORMATION.....</b>                          | <b>4</b>   |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 4          |
| OBJECTIVE .....                                          | 5          |
| TEST METHODOLOGY .....                                   | 5          |
| MEASUREMENT UNCERTAINTY.....                             | 6          |
| TEST FACILITY .....                                      | 6          |
| <b>SYSTEM TEST CONFIGURATION.....</b>                    | <b>7</b>   |
| BLOCK DIAGRAM OF TEST SETUP .....                        | 8          |
| <b>SUMMARY OF TEST RESULTS .....</b>                     | <b>9</b>   |
| <b>TEST EQUIPMENT LIST .....</b>                         | <b>10</b>  |
| <b>REQUIREMENTS AND TEST PROCEDURES .....</b>            | <b>12</b>  |
| APPLICABLE STANDARD FOR PART 24 SUBPART E .....          | 12         |
| APPLICABLE STANDARD FOR PART 27 .....                    | 13         |
| TEST METHOD .....                                        | 15         |
| <b>TEST DATA AND RESULTS.....</b>                        | <b>21</b>  |
| SPURIOUS RADIATED EMISSIONS .....                        | 21         |
| OCCUPIED BANDWIDTH .....                                 | 25         |
| PEAK-TO-AVERAGE RATIO(PAR) .....                         | 40         |
| SPURIOUS EMISSIONS AT ANTENNA TERMINAL .....             | 44         |
| OUT OF BAND EMISSION, BAND EDGE .....                    | 65         |
| RF OUTPUT POWER.....                                     | 90         |
| FREQUENCY STABILITY .....                                | 114        |
| <b>RF EXPOSURE EVALUATION .....</b>                      | <b>119</b> |
| <b>EUT PHOTOGRAPHS.....</b>                              | <b>121</b> |
| <b>TEST SETUP PHOTOGRAPHS .....</b>                      | <b>122</b> |

DOCUMENT REVISION HISTORY

| Revision Number | Report Number      | Description of Revision | Date of Revision |
|-----------------|--------------------|-------------------------|------------------|
| 0               | 2501V00086E-RF-00A | Original Report         | 2025/10/23       |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                                             |                                                                                                                                                                                                                                                                                                 |                 |                                      |                     |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------------------|---------------------|
| <b>Frequency Range</b>                      | LTE Band 2: 1850-1910MHz(TX); 1930-1990MHz(RX)<br>LTE Band 4: 1710-1755MHz(TX); 2110-2155MHz(RX)<br>LTE Band 12: 699-716MHz(TX); 729-746MHz(RX)<br>LTE Band 13: 777 - 787MHz(TX); 746-756MHz(RX)                                                                                                |                 |                                      |                     |
| <b>Modulation Technique</b>                 | 4G: QPSK, 16QAM                                                                                                                                                                                                                                                                                 |                 |                                      |                     |
| <b>Antenna Specification<sup>#</sup></b>    | Antenna                                                                                                                                                                                                                                                                                         | Operation Bands | Antenna Gain (G <sub>T</sub> ) (dBi) | L <sub>C</sub> (dB) |
|                                             | ANT0                                                                                                                                                                                                                                                                                            | LTE B2          | 3.47                                 | 0                   |
|                                             |                                                                                                                                                                                                                                                                                                 | LTE B4          | 3.44                                 | 0                   |
|                                             |                                                                                                                                                                                                                                                                                                 | LTE B12         | 5.23                                 | 0                   |
|                                             |                                                                                                                                                                                                                                                                                                 | LTE B13         | 4.36                                 | 0                   |
|                                             | Note: L <sub>c</sub> = Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.                                                                                                                                                                                   |                 |                                      |                     |
| <b>Voltage Range</b>                        | DC 5V from adapter or DC 48V from POE                                                                                                                                                                                                                                                           |                 |                                      |                     |
| <b>Sample serial number</b>                 | 38PR-3 for Radiated Emissions Test<br>38PR-1 for RF Conducted Test (Assigned by BACL, Shenzhen)                                                                                                                                                                                                 |                 |                                      |                     |
| <b>Sample/EUT Status</b>                    | Good condition                                                                                                                                                                                                                                                                                  |                 |                                      |                     |
| <b>Normal/Extreme Condition<sup>#</sup></b> | LV: Low Voltage 102V <sub>AC</sub><br>NV: Normal Voltage 120V <sub>AC</sub><br>HV: High Voltage 138V <sub>AC</sub><br>(provided by the applicant)                                                                                                                                               |                 |                                      |                     |
| <b>Adapter Information</b>                  | Adapter 1<br>Model: YLPS052000B1-US<br>Input: AC 100-240V~50/60Hz 0.5A<br>Output: DC 5V, 2.0A<br>Adapter 2<br>Model: YLPS052000C1-US<br>Input: AC 100-240V~50/60Hz 0.5A<br>Output: DC 5V, 2.0A<br>Adapter 3<br>Model: YLPS052000E1-US<br>Input: AC 100-240V~50/60Hz 0.5A<br>Output: DC 5V, 2.0A |                 |                                      |                     |

## Objective

This test report is in accordance with Part 2-Subpart J, Part24-Subpart E, Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

## Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 24 Subpart E - Personal Communication Services

Part 27 - Miscellaneous Wireless Communications Services

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in  
Licensed Radio Services

KDB 971168 D01: Power Meas License Digital Systems v03r01

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

| Parameter                    |                             | Uncertainty                            |
|------------------------------|-----------------------------|----------------------------------------|
| Occupied Channel Bandwidth   |                             | 109.2kHz(k=2, 95% level of confidence) |
| RF output power, conducted   |                             | 0.86dB(k=2, 95% level of confidence)   |
| Unwanted Emission, conducted |                             | 1.60dB(k=2, 95% level of confidence)   |
| RF Frequency                 |                             | 56.6Hz(k=2, 95% level of confidence)   |
| Radiated Emissions           | 30MHz~200MHz (Horizontal)   | 5.32dB(k=2, 95% level of confidence)   |
|                              | 30MHz~200MHz (Vertical)     | 5.43dB(k=2, 95% level of confidence)   |
|                              | 200MHz~1000MHz (Horizontal) | 5.77dB(k=2, 95% level of confidence)   |
|                              | 200MHz~1000MHz (Vertical)   | 5.73dB(k=2, 95% level of confidence)   |
|                              | 1GHz - 6GHz                 | 5.34dB(k=2, 95% level of confidence)   |
|                              | 6GHz - 18GHz                | 5.40dB(k=2, 95% level of confidence)   |
|                              | 18GHz - 40GHz               | 5.64dB(k=2, 95% level of confidence)   |
| Temperature                  |                             | ±1°C                                   |
| Humidity                     |                             | ±1%                                    |
| Supply voltages              |                             | ±0.4%                                  |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The final qualification test was performed with the EUT operating at normal mode.

| Frequency band | Bandwidth | Test Frequency (MHz) |        |        |
|----------------|-----------|----------------------|--------|--------|
|                | (MHz)     | Low                  | Middle | High   |
| LTE B2         | 1.4       | 1850.7               | 1880   | 1909.3 |
|                | 3         | 1851.5               | 1880   | 1908.5 |
|                | 5         | 1852.5               | 1880   | 1907.5 |
|                | 10        | 1855                 | 1880   | 1905   |
|                | 15        | 1857.5               | 1880   | 1902.5 |
|                | 20        | 1860                 | 1880   | 1900   |
| LTE B4         | 1.4       | 1710.7               | 1732.5 | 1754.3 |
|                | 3         | 1711.5               | 1732.5 | 1753.5 |
|                | 5         | 1712.5               | 1732.5 | 1752.5 |
|                | 10        | 1715                 | 1732.5 | 1750   |
|                | 15        | 1717.5               | 1732.5 | 1747.5 |
|                | 20        | 1720                 | 1732.5 | 1745   |
| LTE B12        | 1.4       | 699.7                | 707.5  | 715.3  |
|                | 3         | 700.5                | 707.5  | 714.5  |
|                | 5         | 701.5                | 707.5  | 713.5  |
|                | 10        | 704                  | 707.5  | 711    |
| LTE B13        | 5         | 779.5                | /      | 784.5  |
|                | 10        | /                    | 782    | /      |

### Equipment Modifications

No modification was made to the EUT tested.


### Support Equipment List and Details

| Manufacturer    | Description                          | Model       | Serial Number |
|-----------------|--------------------------------------|-------------|---------------|
| Rohde & Schwarz | Universal Radio Communication Tester | CMW500      | 146520        |
| TP-Link         | POE                                  | TL-POE4824G | 225109        |

### External I/O Cable

| Cable Description                | Length (m) | From Port | To              |
|----------------------------------|------------|-----------|-----------------|
| Unshielded Detachable AC Cable   | 1.2        | CMW500    | AC Power Source |
| Unshielded Detachable AC cable   | 1.5        | POE       | AC Mains        |
| Unshielded Detachable RJ45 cable | 2.0        | POE       | EUT             |

### Block Diagram of Test Setup

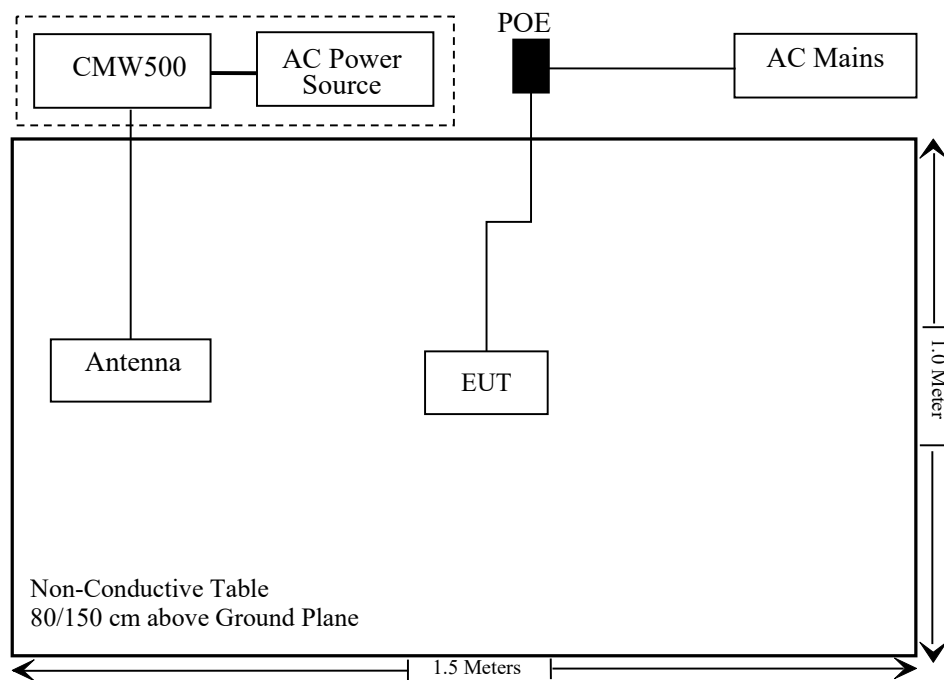

**SUMMARY OF TEST RESULTS**

| FCC Rules                                     | Description of Test                    | Result         |
|-----------------------------------------------|----------------------------------------|----------------|
| §1.1307 (b) & §2.1091                         | MPE-Based Exemption                    | Compliant      |
| §2.1046; § 24.232 (c) (d); §27.50 (b) (c) (d) | RF Output Power                        | Compliant      |
| § 2.1047                                      | Modulation Characteristics             | Not Applicable |
| § 2.1049; §24.238; §27.53                     | Occupied Bandwidth                     | Compliant      |
| § 2.1051; § 24.238 (a); §27.53;               | Spurious Emissions at Antenna Terminal | Compliant      |
| § 2.1053; § 24.238 (a); §27.53                | Field Strength of Spurious Radiation   | Compliant      |
| § 24.238 (a); §27.53 (c) (g) (h)              | Band Edge                              | Compliant      |
| § 2.1055; § 24.235; §27.54;                   | Frequency stability                    | Compliant      |

**TEST EQUIPMENT LIST**

| Manufacturer                  | Description                               | Model               | Serial Number | Calibration Date | Calibration Due Date |
|-------------------------------|-------------------------------------------|---------------------|---------------|------------------|----------------------|
| <b>Radiated Emission Test</b> |                                           |                     |               |                  |                      |
| Rohde & Schwarz               | EMI Test Receiver                         | ESR3                | 102455        | 2024/12/04       | 2025/12/03           |
| Sonoma instrument             | Pre-amplifier                             | 310N                | 186238        | 2025/04/29       | 2026/04/28           |
| Sunol Sciences                | Broadband Antenna                         | JB1                 | A040904-1     | 2023/07/20       | 2026/07/19           |
| COM-POWER                     | Dipole Antenna                            | 3121C               | 9209-860      | NCR              | NCR                  |
| Unknown                       | Cable                                     | Chamber Cable<br>1  | F-03-EM236    | 2025/04/29       | 2026/04/28           |
| Unknown                       | Cable                                     | XH500C              | J-10M-A       | 2025/04/29       | 2026/04/28           |
| Rohde&Schwarz                 | Spectrum Analyzer                         | FSV40               | 101605        | 2025/03/26       | 2026/03/25           |
| A.H.System                    | Preamplifier                              | PAM-0118P           | 489           | 2024/11/15       | 2025/11/14           |
| Schwarzbeck                   | Horn Antenna                              | BBHA9120D(<br>1201) | 1143          | 2023/07/26       | 2026/07/25           |
| The Electro-Mechanics Co.     | Horn Antenna                              | 3115                | 9107-3694     | 2024/06/06       | 2027/06/05           |
| Unknown                       | RF Cable                                  | KMSE                | 0735          | 2024/12/06       | 2025/12/05           |
| Unknown                       | RF Cable                                  | UFA147              | 219661        | 2024/12/06       | 2025/12/05           |
| Unknown                       | RF Cable                                  | XH750A-N            | J-10M         | 2024/12/06       | 2025/12/05           |
| JD                            | Filter Switch Unit                        | DT7220FSU           | DS79906       | 2025/08/12       | 2026/08/11           |
| JD                            | Multiplex Switch<br>Test Control Set      | DT7220SCU           | DS79903       | 2025/08/12       | 2026/08/11           |
| A.H.System                    | Pre-amplifier                             | PAM-1840VH          | 190           | 2025/04/29       | 2026/04/28           |
| Electro-Mechanics<br>Co       | Horn Antenna                              | 3116                | 9510-2270     | 2023/09/18       | 2026/09/17           |
| Electro-Mechanics<br>Co       | Horn Antenna                              | 3116                | 2026          | 2023/09/18       | 2026/09/17           |
| UTIFLEX                       | RF Cable                                  | NO. 13              | 232308-001    | 2024/12/18       | 2025/12/17           |
| Rohde & Schwarz               | Wideband Radio<br>Communication<br>Tester | CMW500              | 146520        | 2025/04/29       | 2026/04/28           |
| Agilent                       | Signal Generator                          | N5183A              | MY50140588    | 2025/08/12       | 2026/08/11           |

| Manufacturer      | Description                         | Model      | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|-------------------------------------|------------|---------------|------------------|----------------------|
| RF Conducted Test |                                     |            |               |                  |                      |
| R&S               | Spectrum Analyzer                   | FSV40      | 101942        | 2025/09/01       | 2026/08/31           |
| Rohde & Schwarz   | Wideband Radio Communication Tester | CMW500     | 146520        | 2025/04/29       | 2026/04/28           |
| BACL              | Temperature & Humidity Chamber      | BTH-150-40 | 30145         | 2024/12/06       | 2025/12/05           |
| HELLVIAO          | Contact voltage regulator           | TDGC2-5KVA | Unknown       | NCR              | NCR                  |
| Fluke             | Digital Multimeter                  | 287        | 19000011      | 2025/04/29       | 2026/04/28           |
| WEINSCHEL         | 3dB Attenuator                      | Unknown    | F-03-EM220    | 2025/06/26       | 2026/06/25           |
| HP                | Power Splitter                      | 11667A     | 1610A         | 2025/06/26       | 2026/06/25           |
| Unknown           | RF Cable                            | 65475      | 01670515      | 2025/06/26       | 2026/06/25           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

## REQUIREMENTS AND TEST PROCEDURES

---

### Applicable Standard for Part 24 Subpart E

#### RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

#### Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

## Applicable Standard for Part 27

### RF Output Power

FCC §27.50

(b)(9) Control stations and mobile stations transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands and fixed stations transmitting in the 787-788 MHz and 805-806 MHz bands are limited to 30 watts ERP.

(c)(9) Control and mobile stations in the 698-746 MHz band are limited to 30 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

### Spurious Emissions

FCC §27.53

(c)For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

### Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

## Test Method

### Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively  
(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);


$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Note: The ERP is for below 1GHz, EIRP is for above 1GHz.

### Test Setup Block:



## Occupied Bandwidth


According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of  $1.5 \times \text{OBW}$  is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.  
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

### Test Setup Block:

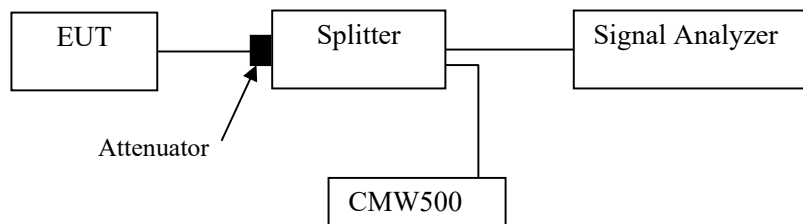

**Transmitter unwanted emissions-at antenna terminals**

According to ANSI C63.26-2015 Section 5.7.4

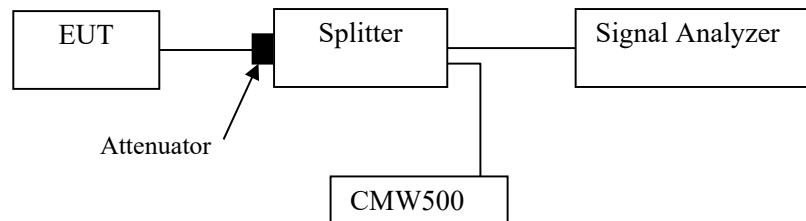
**Test Setup Block:**

Note: the worst path loss (cable loss and splitter inset loss) among the test frequency range was added into plots.

**Transmitter unwanted emissions-Out of band emission**

According to ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the 26dB EBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of 26dB EBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

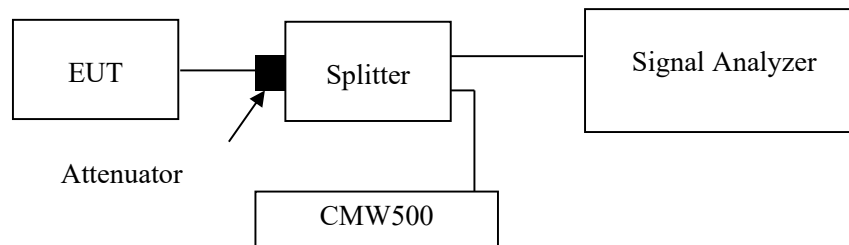**Test Setup Block:**

**Frequency stability**

According to ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:


Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

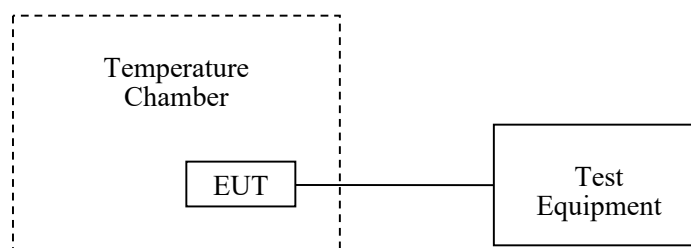**Test Setup Block:**

**Transmitter unwanted emissions- Radiated Spurious emissions**

According to ANSI C63.26-2015 Section 5.5.3:

**Test Procedure:**

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
  - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
$$P_e = \text{equivalent emission power in dBm}$$
$$P_s = \text{source (signal generator) power in dBm}$$

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:  $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$ . If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

## TEST DATA AND RESULTS

### Spurious Radiated Emissions

#### Environmental Conditions

|                            |                                                                                                                                                                                                      |                              |                   |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------|
| <b>Temperature (°C)</b>    | 25-27                                                                                                                                                                                                | <b>Relative Humidity (%)</b> | 50-55             |
| <b>ATM Pressure (kPa):</b> | 100-101                                                                                                                                                                                              | <b>Test engineer:</b>        | Nico Wu&Wing K Ji |
| <b>Test date:</b>          | 2025.09.17-2025.09.30                                                                                                                                                                                |                              |                   |
| <b>EUT operation mode:</b> | Transmitting                                                                                                                                                                                         |                              |                   |
| <b>Note:</b>               | 1. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.<br>2. For LTE bands, only the worst case was recorded, please refer to the data tables. |                              |                   |

| Frequency<br>(MHz)                          | Receiver<br>Reading<br>(dBμV) | Polar<br>(H / V) | Substituted                   |                       |                              | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------------------|-------------------------------|------------------|-------------------------------|-----------------------|------------------------------|----------------------------|----------------|----------------|
|                                             |                               |                  | Substituted<br>Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dBi/dBd) |                            |                |                |
| LTE Band 2 (30MHz-20GHz)                    |                               |                  |                               |                       |                              |                            |                |                |
| QPSK 1.4MHz Bandwidth_RB1#0, Low Channel    |                               |                  |                               |                       |                              |                            |                |                |
| 133.1                                       | 30.5                          | H                | -77                           | 0.84                  | 0                            | -77.84                     | -13            | 64.84          |
| 42.7                                        | 34.4                          | V                | -74                           | 0.75                  | 0                            | -74.75                     | -13            | 61.75          |
| 3701.4                                      | 63.83                         | H                | -48.9                         | 2.1                   | 9.7                          | -41.3                      | -13            | 28.3           |
| 3701.4                                      | 63.58                         | V                | -49                           | 2.1                   | 9.7                          | -41.4                      | -13            | 28.4           |
| QPSK 1.4MHz Bandwidth_RB1#0, Middle Channel |                               |                  |                               |                       |                              |                            |                |                |
| 133.3                                       | 30.64                         | H                | -76.9                         | 0.84                  | 0                            | -77.74                     | -13            | 64.74          |
| 42.5                                        | 34.53                         | V                | -73.9                         | 0.75                  | 0                            | -74.65                     | -13            | 61.65          |
| 3760                                        | 69.41                         | H                | -44                           | 2                     | 9.6                          | -36.4                      | -13            | 23.4           |
| 3760                                        | 67.39                         | V                | -45.9                         | 2                     | 9.6                          | -38.3                      | -13            | 25.3           |
| QPSK 1.4MHz Bandwidth_RB1#0, High Channel   |                               |                  |                               |                       |                              |                            |                |                |
| 133.5                                       | 30.72                         | H                | -76.8                         | 0.84                  | 0                            | -77.64                     | -13            | 64.64          |
| 42.4                                        | 34.65                         | V                | -73.8                         | 0.75                  | 0                            | -74.55                     | -13            | 61.55          |
| 3818.6                                      | 53.28                         | H                | -60.1                         | 2                     | 9.6                          | -52.5                      | -13            | 39.5           |
| 3818.6                                      | 52.6                          | V                | -60.7                         | 2                     | 9.6                          | -53.1                      | -13            | 40.1           |

| Frequency<br>(MHz)                          | Receiver<br>Reading<br>(dBμV) | Polar<br>(H / V) | Substituted                   |                       |                              | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------------------|-------------------------------|------------------|-------------------------------|-----------------------|------------------------------|----------------------------|----------------|----------------|
|                                             |                               |                  | Substituted<br>Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dBi/dBd) |                            |                |                |
| LTE Band 4 (30MHz-10GHz)                    |                               |                  |                               |                       |                              |                            |                |                |
| QPSK 1.4MHz Bandwidth_RB1#0, Low channel    |                               |                  |                               |                       |                              |                            |                |                |
| 133.3                                       | 30.47                         | H                | -77.1                         | 0.84                  | 0                            | -77.94                     | -13            | 64.94          |
| 42.3                                        | 34.31                         | V                | -74.1                         | 0.75                  | 0                            | -74.85                     | -13            | 61.85          |
| 3421.4                                      | 62.81                         | H                | -51                           | 1.7                   | 9.6                          | -43.1                      | -13            | 30.1           |
| 3421.4                                      | 58.53                         | V                | -54.9                         | 1.7                   | 9.6                          | -47                        | -13            | 34             |
| 5132.1                                      | 55.25                         | H                | -57.3                         | 2.6                   | 10.6                         | -49.3                      | -13            | 36.3           |
| 5132.1                                      | 58.7                          | V                | -53.3                         | 2.6                   | 10.6                         | -45.3                      | -13            | 32.3           |
| QPSK 1.4MHz Bandwidth_RB1#0, Middle channel |                               |                  |                               |                       |                              |                            |                |                |
| 133.6                                       | 30.58                         | H                | -77                           | 0.84                  | 0                            | -77.84                     | -13            | 64.84          |
| 42.5                                        | 34.49                         | V                | -73.9                         | 0.75                  | 0                            | -74.65                     | -13            | 61.65          |
| 3465                                        | 51.68                         | H                | -61.8                         | 1.8                   | 9.7                          | -53.9                      | -13            | 40.9           |
| 3465                                        | 51.5                          | V                | -61.7                         | 1.8                   | 9.7                          | -53.8                      | -13            | 40.8           |
| 5197.5                                      | 69.12                         | H                | -43.3                         | 2.4                   | 10.6                         | -35.1                      | -13            | 22.1           |
| 5197.5                                      | 67.01                         | V                | -45.1                         | 2.4                   | 10.6                         | -36.9                      | -13            | 23.9           |
| QPSK 1.4MHz Bandwidth_RB1#0, High channel   |                               |                  |                               |                       |                              |                            |                |                |
| 133.7                                       | 30.63                         | H                | -76.9                         | 0.84                  | 0                            | -77.74                     | -13            | 64.74          |
| 42.2                                        | 34.59                         | V                | -73.8                         | 0.75                  | 0                            | -74.55                     | -13            | 61.55          |
| 3508.6                                      | 60.7                          | H                | -52.8                         | 1.8                   | 9.7                          | -44.9                      | -13            | 31.9           |
| 3508.6                                      | 57.68                         | V                | -55.5                         | 1.8                   | 9.7                          | -47.6                      | -13            | 34.6           |
| 5262.9                                      | 58.43                         | H                | -53.5                         | 2.2                   | 10.6                         | -45.1                      | -13            | 32.1           |
| 5262.9                                      | 58.42                         | V                | -53.3                         | 2.2                   | 10.6                         | -44.9                      | -13            | 31.9           |

| Frequency<br>(MHz)                          | Receiver<br>Reading<br>(dBμV) | Polar<br>(H / V) | Substituted                   |                       |                              | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------------------|-------------------------------|------------------|-------------------------------|-----------------------|------------------------------|----------------------------|----------------|----------------|
|                                             |                               |                  | Substituted<br>Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dBi/dBd) |                            |                |                |
| LTE Band 12 (30MHz-10GHz)                   |                               |                  |                               |                       |                              |                            |                |                |
| QPSK 1.4MHz Bandwidth_RB1#0, Low channel    |                               |                  |                               |                       |                              |                            |                |                |
| 132.8                                       | 30.42                         | H                | -77.1                         | 0.84                  | 0                            | -77.94                     | -13            | 64.94          |
| 42.9                                        | 34.25                         | V                | -74.2                         | 0.75                  | 0                            | -74.95                     | -13            | 61.95          |
| 1399.4                                      | 75.02                         | H                | -39.3                         | 0.9                   | 7.8                          | -32.4                      | -13            | 19.4           |
| 1399.4                                      | 66.57                         | V                | -48.4                         | 0.9                   | 7.8                          | -41.5                      | -13            | 28.5           |
| 2099.1                                      | 72.05                         | H                | -42.2                         | 1.4                   | 9.6                          | -34                        | -13            | 21             |
| 2099.1                                      | 59.99                         | V                | -54.8                         | 1.4                   | 9.6                          | -46.6                      | -13            | 33.6           |
| QPSK 1.4MHz Bandwidth_RB1#0, Middle channel |                               |                  |                               |                       |                              |                            |                |                |
| 132.7                                       | 30.57                         | H                | -77                           | 0.84                  | 0                            | -77.84                     | -13            | 64.84          |
| 42.4                                        | 34.36                         | V                | -74                           | 0.75                  | 0                            | -74.75                     | -13            | 61.75          |
| 1415                                        | 63.06                         | H                | -51.3                         | 0.9                   | 7.8                          | -44.4                      | -13            | 31.4           |
| 1415                                        | 60.38                         | V                | -54.6                         | 0.9                   | 7.8                          | -47.7                      | -13            | 34.7           |
| 2122.5                                      | 66.25                         | H                | -48                           | 1.4                   | 9.6                          | -39.8                      | -13            | 26.8           |
| 2122.5                                      | 60.58                         | V                | -54.2                         | 1.4                   | 9.6                          | -46                        | -13            | 33             |
| QPSK 1.4MHz Bandwidth_RB1#0, High channel   |                               |                  |                               |                       |                              |                            |                |                |
| 132.8                                       | 30.68                         | H                | -76.9                         | 0.84                  | 0                            | -77.74                     | -13            | 64.74          |
| 42.7                                        | 34.46                         | V                | -73.9                         | 0.75                  | 0                            | -74.65                     | -13            | 61.65          |
| 1430.6                                      | 63.01                         | H                | -51.3                         | 0.9                   | 7.8                          | -44.4                      | -13            | 31.4           |
| 1430.6                                      | 60.03                         | V                | -55                           | 0.9                   | 7.8                          | -48.1                      | -13            | 35.1           |
| 2145.9                                      | 62.34                         | H                | -51.9                         | 1.4                   | 9.6                          | -43.7                      | -13            | 30.7           |
| 2145.9                                      | 57.83                         | V                | -56.9                         | 1.4                   | 9.6                          | -48.7                      | -13            | 35.7           |

| Frequency<br>(MHz)                       | Receiver<br>Reading<br>(dBμV) | Polar<br>(H / V) | Substituted                   |                       |                              | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------------------------------------|-------------------------------|------------------|-------------------------------|-----------------------|------------------------------|----------------------------|----------------|----------------|
|                                          |                               |                  | Substituted<br>Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dBi/dBd) |                            |                |                |
| LTE Band 13 (30MHz-10GHz)                |                               |                  |                               |                       |                              |                            |                |                |
| QPSK 5MHz Bandwidth_ RB1#0, Low channel  |                               |                  |                               |                       |                              |                            |                |                |
| 132.6                                    | 30.31                         | H                | -77.2                         | 0.84                  | 0                            | -78.04                     | -13            | 65.04          |
| 42.5                                     | 34.17                         | V                | -74.2                         | 0.75                  | 0                            | -74.95                     | -13            | 61.95          |
| 1559                                     | 57.8                          | H                | -56.5                         | 1.5                   | 8.6                          | -49.4                      | -40            | 9.4            |
| 1559                                     | 54.88                         | V                | -60                           | 1.5                   | 8.6                          | -52.9                      | -40            | 12.9           |
| 2338.5                                   | 59.68                         | H                | -54.6                         | 1.5                   | 9.6                          | -46.5                      | -13            | 33.5           |
| 2338.5                                   | 57.29                         | V                | -57.1                         | 1.5                   | 9.6                          | -49                        | -13            | 36             |
| QPSK 5MHz Bandwidth_ RB1#0, High channel |                               |                  |                               |                       |                              |                            |                |                |
| 133.3                                    | 30.57                         | H                | -77                           | 0.84                  | 0                            | -77.84                     | -13            | 64.84          |
| 43.2                                     | 34.37                         | V                | -74                           | 0.75                  | 0                            | -74.75                     | -13            | 61.75          |
| 1569                                     | 55.9                          | H                | -58.4                         | 1.5                   | 8.6                          | -51.3                      | -40            | 11.3           |
| 1569                                     | 58.49                         | V                | -56.4                         | 1.5                   | 8.6                          | -49.3                      | -40            | 9.3            |
| 2353.5                                   | 60.38                         | H                | -54.3                         | 1.5                   | 9.4                          | -46.4                      | -13            | 33.4           |
| 2353.5                                   | 55.45                         | V                | -59.1                         | 1.5                   | 9.4                          | -51.2                      | -13            | 38.2           |

Note:

Absolute Level = Reading Level + Substituted Factor

Substituted Factor contains: Substituted Level - Cable loss+ Antenna Gain

Margin = Limit-Absolute Level

**Occupied Bandwidth****Test Information:**

|                    |          |                     |              |
|--------------------|----------|---------------------|--------------|
| <b>Sample No.:</b> | 38PR-1   | <b>Test Date:</b>   | 2025/09/25   |
| <b>Test Site:</b>  | RF       | <b>Test Mode:</b>   | Transmitting |
| <b>Tester:</b>     | Usain Ou | <b>Test Result:</b> | Pass         |

**Environmental Conditions:**

|                             |      |                                  |    |                               |       |
|-----------------------------|------|----------------------------------|----|-------------------------------|-------|
| <b>Temperature:</b><br>(°C) | 25.6 | <b>Relative Humidity:</b><br>(%) | 43 | <b>ATM Pressure:</b><br>(kPa) | 100.6 |
|-----------------------------|------|----------------------------------|----|-------------------------------|-------|


**FCC Part 24E****LTE Band 2, Normal**

| <b>Mode</b>              | <b>99% OBW<br/>(MHz)</b> | <b>26dB BW<br/>(MHz)</b> |
|--------------------------|--------------------------|--------------------------|
| 1.4MHz_Middle_QPSK_6@0   | 1.089                    | 1.275                    |
| 1.4MHz_Middle_16QAM_6@0  | 1.084                    | 1.270                    |
| 3MHz_Middle_QPSK_15@0    | 2.688                    | 2.931                    |
| 3MHz_Middle_16QAM_15@0   | 2.688                    | 2.931                    |
| 5MHz_Middle_QPSK_25@0    | 4.470                    | 4.925                    |
| 5MHz_Middle_16QAM_25@0   | 4.480                    | 4.905                    |
| 10MHz_Middle_QPSK_50@0   | 8.940                    | 9.790                    |
| 10MHz_Middle_16QAM_50@0  | 8.960                    | 9.730                    |
| 15MHz_Middle_QPSK_75@0   | 13.380                   | 14.505                   |
| 15MHz_Middle_16QAM_75@0  | 13.410                   | 14.655                   |
| 20MHz_Middle_QPSK_100@0  | 17.840                   | 19.019                   |
| 20MHz_Middle_16QAM_100@0 | 17.840                   | 18.979                   |

## LTE Band 2, Normal


## 1.4MHz\_Middle\_QPSK\_6@0

## Occupied Bandwidth

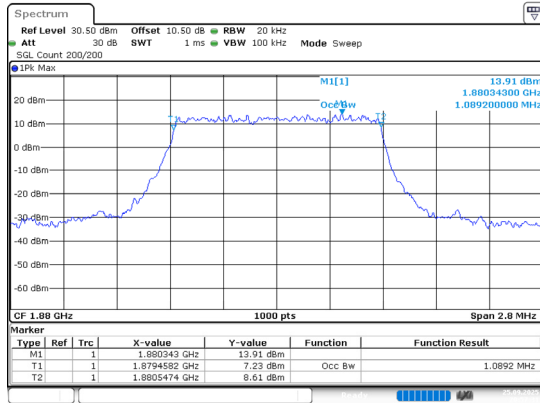

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 20:57:31


## 26dB Bandwidth

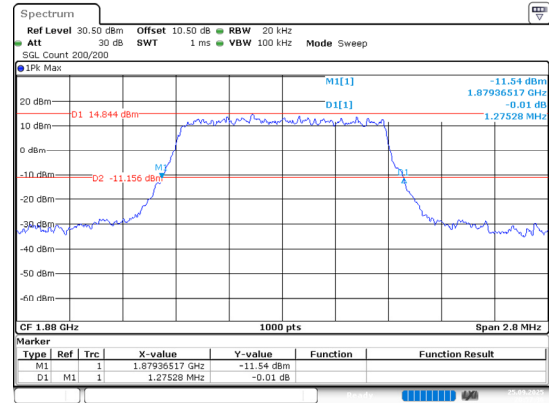

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 20:57:36


## 1.4MHz\_Middle\_16QAM\_6@0

## Occupied Bandwidth

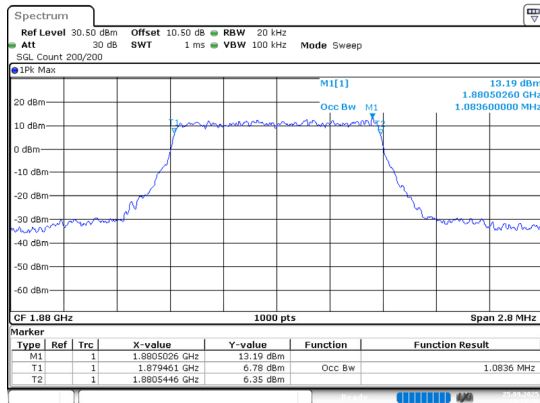

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 20:57:50


## 26dB Bandwidth

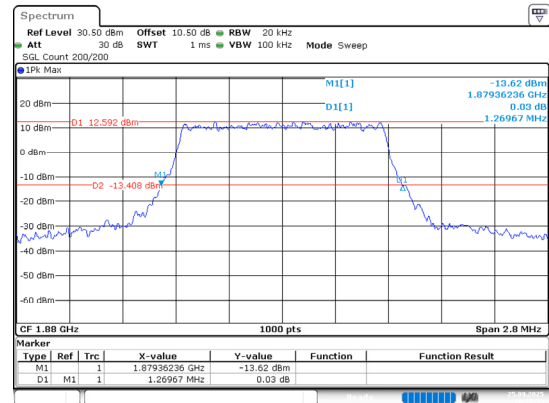

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 20:57:55


## 3MHz\_Middle\_QPSK\_15@0

## Occupied Bandwidth

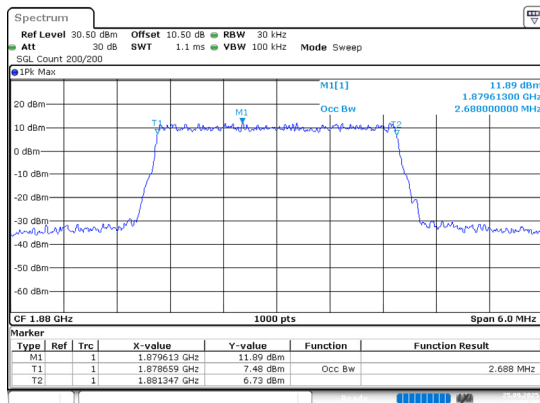

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 20:58:09


## 26dB Bandwidth

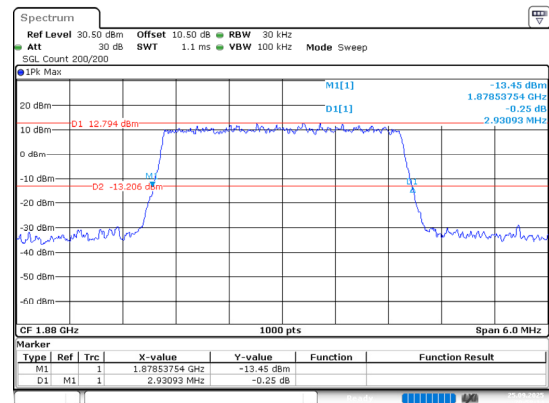

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 20:58:14


## 3MHz\_Middle\_16QAM\_15@0

Occupied Bandwidth

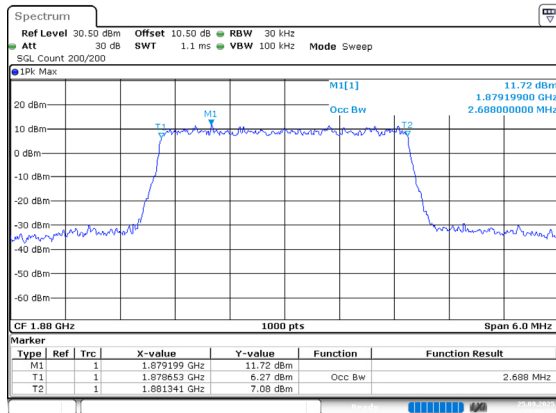

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:58:27


26dB Bandwidth

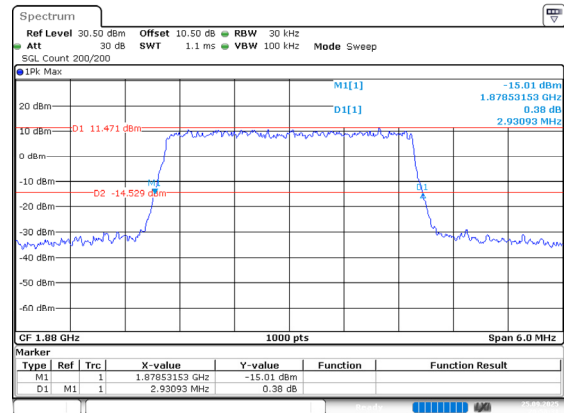

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:58:31


## 5MHz\_Middle\_QPSK\_25@0

Occupied Bandwidth

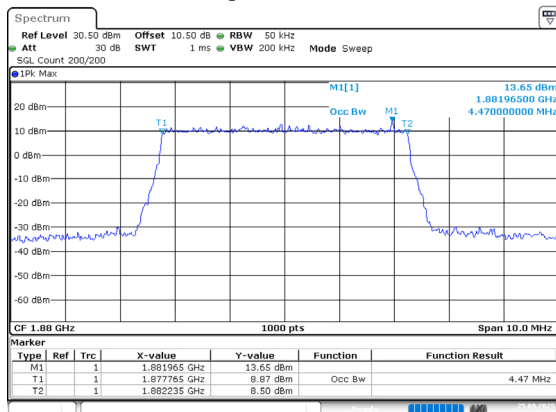

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:58:47


26dB Bandwidth

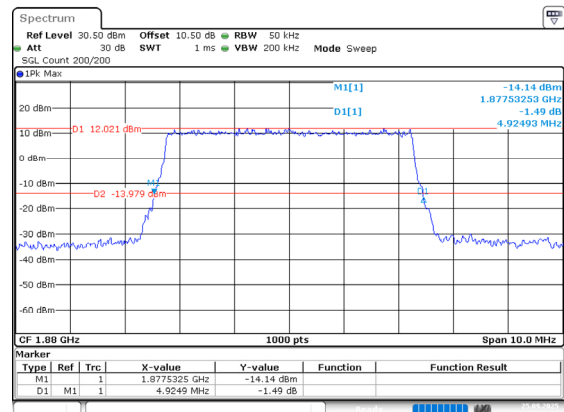

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:58:52


## 5MHz\_Middle\_16QAM\_25@0

Occupied Bandwidth

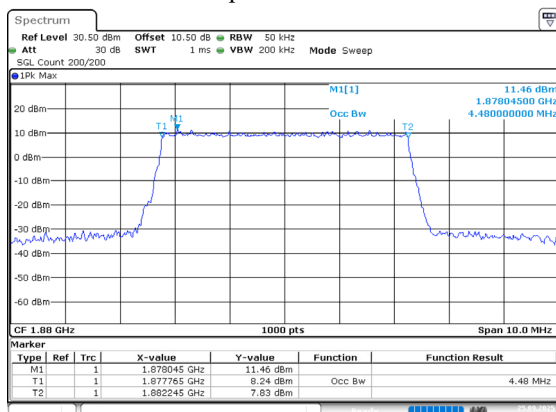

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:59:06


26dB Bandwidth

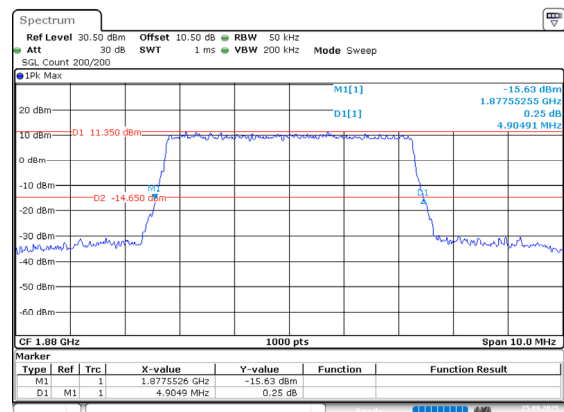

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:59:10


## 10MHz\_Middle\_QPSK\_50@0

## Occupied Bandwidth

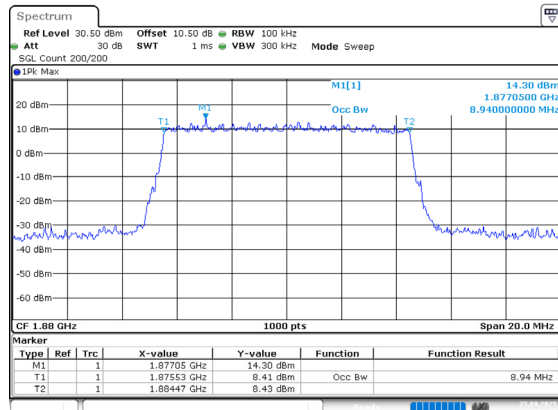

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:59:28


## 26dB Bandwidth

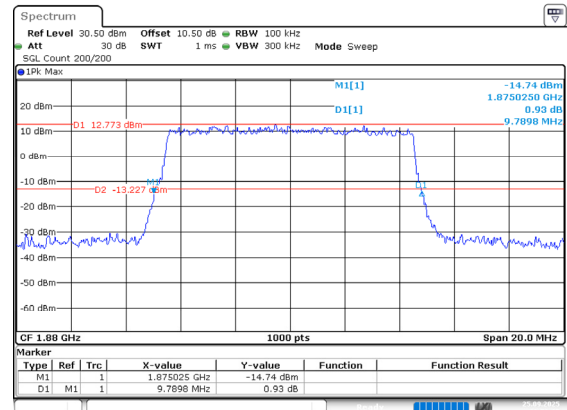

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:59:35


## 10MHz\_Middle\_16QAM\_50@0

## Occupied Bandwidth

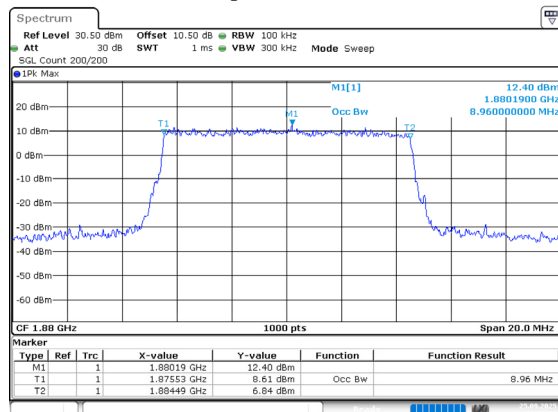

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:59:50


## 26dB Bandwidth

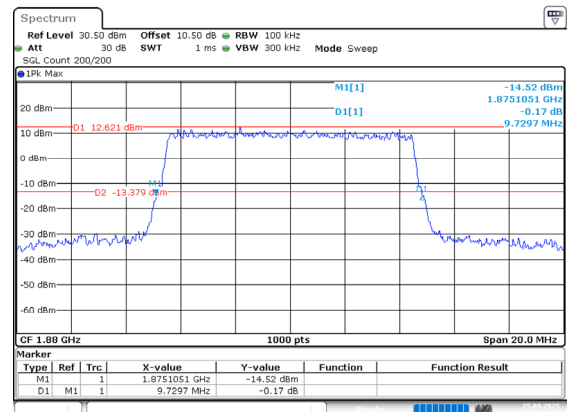

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 20:59:56


## 15MHz\_Middle\_QPSK\_75@0

## Occupied Bandwidth

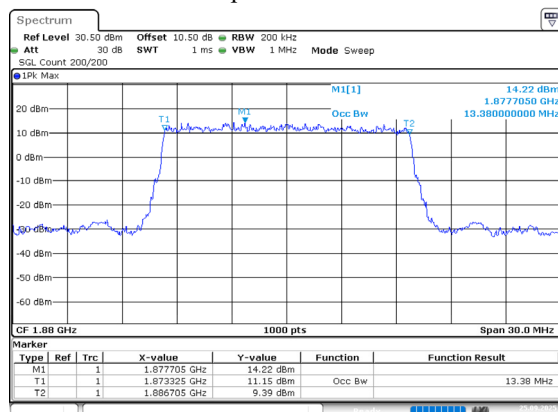

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 21:00:18


## 26dB Bandwidth

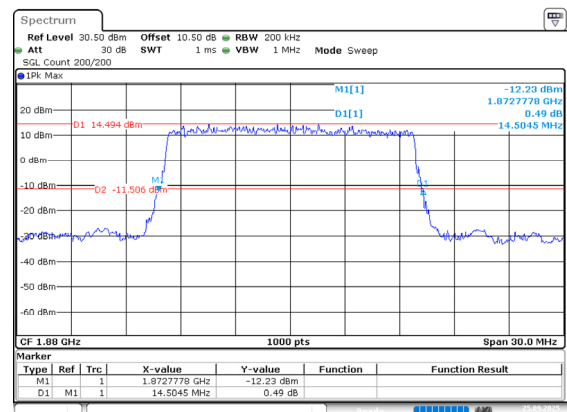

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 21:00:26


## 15MHz\_Middle\_16QAM\_75@0

## Occupied Bandwidth

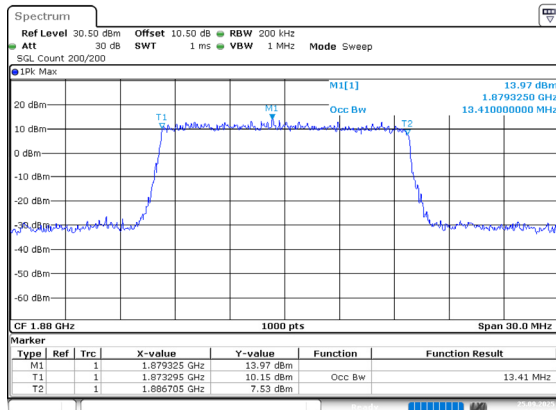

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 21:00:45


## 26dB Bandwidth

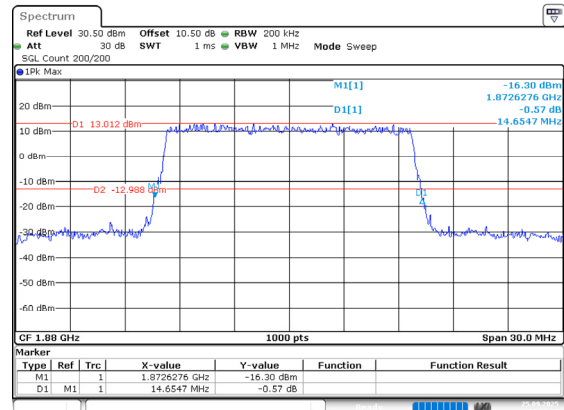

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 21:00:52


## 20MHz\_Middle\_QPSK\_100@0

## Occupied Bandwidth

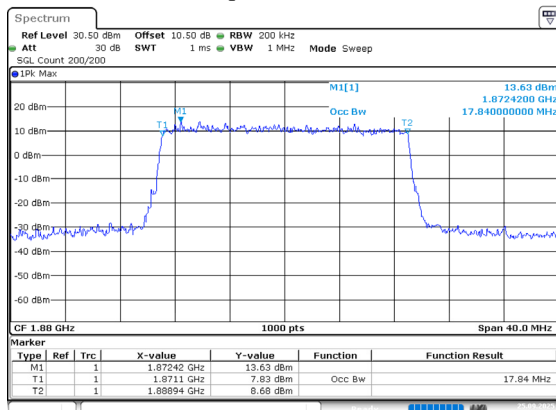

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 21:01:16


## 26dB Bandwidth

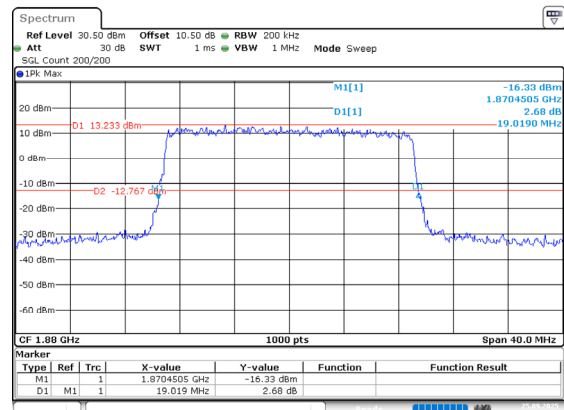

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 21:01:23


## 20MHz\_Middle\_16QAM\_100@0

## Occupied Bandwidth

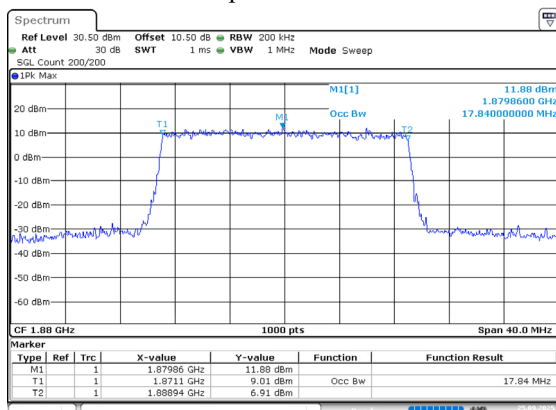

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 21:01:43

## 26dB Bandwidth

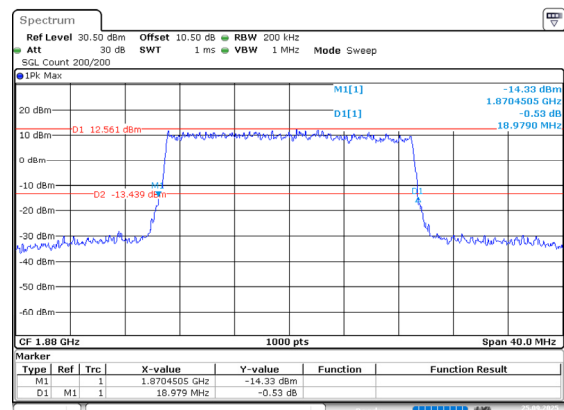

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 23.SEP.2023 21:01:51

**FCC Part 27****LTE Band 4, Normal**

| Mode                     | 99% OBW<br>(MHz) | 26dB BW<br>(MHz) |
|--------------------------|------------------|------------------|
| 1.4MHz_Middle_QPSK_6@0   | 1.081            | 1.242            |
| 1.4MHz_Middle_16QAM_6@0  | 1.098            | 1.281            |
| 3MHz_Middle_QPSK_15@0    | 2.676            | 2.955            |
| 3MHz_Middle_16QAM_15@0   | 2.682            | 2.937            |
| 5MHz_Middle_QPSK_25@0    | 4.480            | 4.935            |
| 5MHz_Middle_16QAM_25@0   | 4.480            | 4.895            |
| 10MHz_Middle_QPSK_50@0   | 8.920            | 9.550            |
| 10MHz_Middle_16QAM_50@0  | 8.920            | 9.630            |
| 15MHz_Middle_QPSK_75@0   | 13.410           | 14.535           |
| 15MHz_Middle_16QAM_75@0  | 13.380           | 14.444           |
| 20MHz_Middle_QPSK_100@0  | 17.840           | 19.139           |
| 20MHz_Middle_16QAM_100@0 | 17.800           | 18.939           |

**LTE Band 12, Normal**

| Mode                    | 99% OBW<br>(MHz) | 26dB BW<br>(MHz) |
|-------------------------|------------------|------------------|
| 1.4MHz_Middle_QPSK_6@0  | 1.078            | 1.230            |
| 1.4MHz_Middle_16QAM_6@0 | 1.095            | 1.270            |
| 3MHz_Middle_QPSK_15@0   | 2.682            | 2.919            |
| 3MHz_Middle_16QAM_15@0  | 2.682            | 2.931            |
| 5MHz_Middle_QPSK_25@0   | 4.480            | 4.925            |
| 5MHz_Middle_16QAM_25@0  | 4.480            | 4.905            |
| 10MHz_Middle_QPSK_50@0  | 8.940            | 9.650            |
| 10MHz_Middle_16QAM_50@0 | 8.940            | 9.670            |


**LTE Band 13, Normal**

| Mode                    | 99% OBW<br>(MHz) | 26dB BW<br>(MHz) |
|-------------------------|------------------|------------------|
| 5MHz_Low_QPSK_25@0      | 4.480            | 4.895            |
| 5MHz_Low_16QAM_25@0     | 4.480            | 4.875            |
| 5MHz_High_QPSK_25@0     | 4.480            | 4.905            |
| 5MHz_High_16QAM_25@0    | 4.460            | 4.875            |
| 10MHz_Middle_QPSK_50@0  | 8.900            | 9.730            |
| 10MHz_Middle_16QAM_50@0 | 8.940            | 9.610            |


## LTE Band 4, Normal

## 1.4MHz\_Middle\_QPSK\_6@0

## Occupied Bandwidth

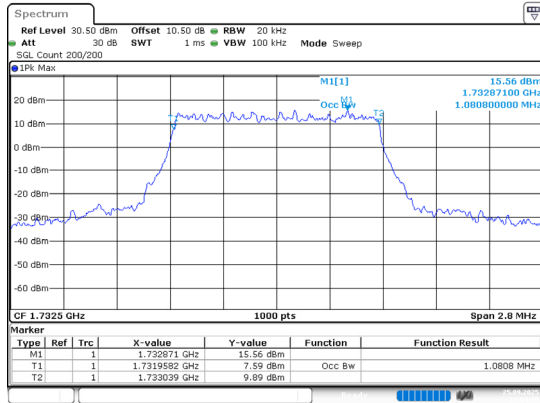


## 26dB Bandwidth

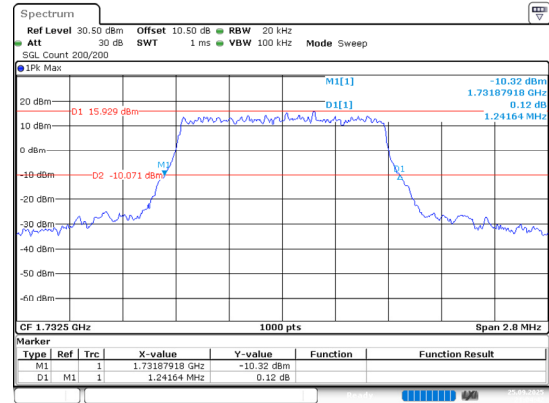


## 1.4MHz\_Middle\_16QAM\_6@0

## Occupied Bandwidth

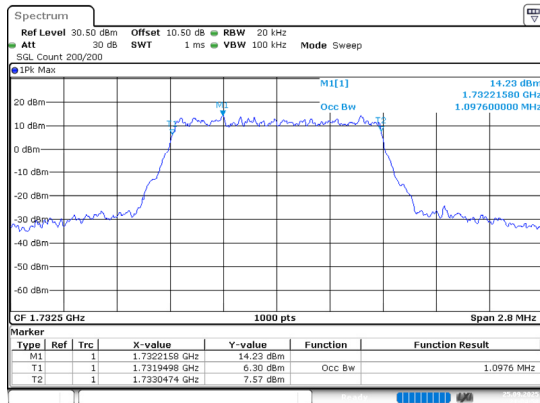


## 26dB Bandwidth

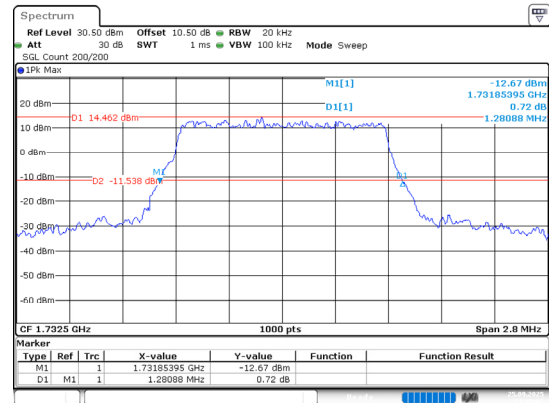


## 3MHz\_Middle\_QPSK\_15@0

## Occupied Bandwidth

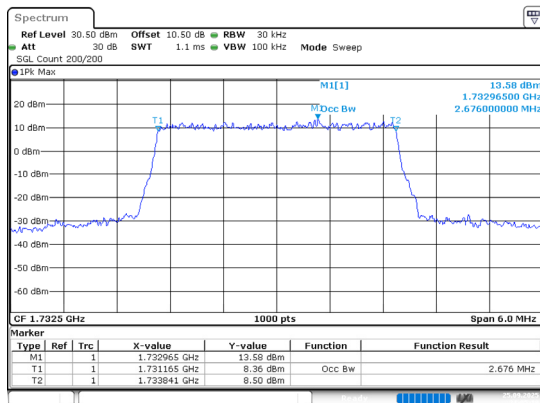


## 26dB Bandwidth

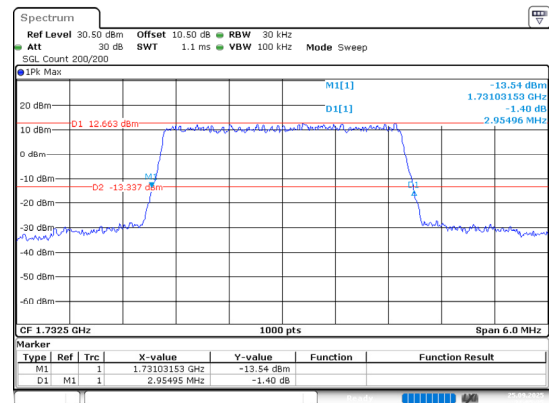


### 3MHz\_Middle\_16QAM\_15@0

#### Occupied Bandwidth

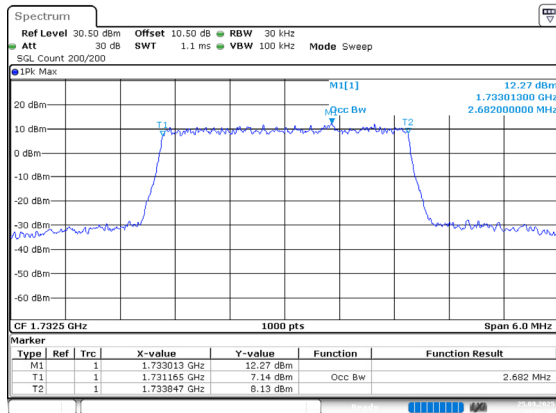

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:05:40


#### 26dB Bandwidth

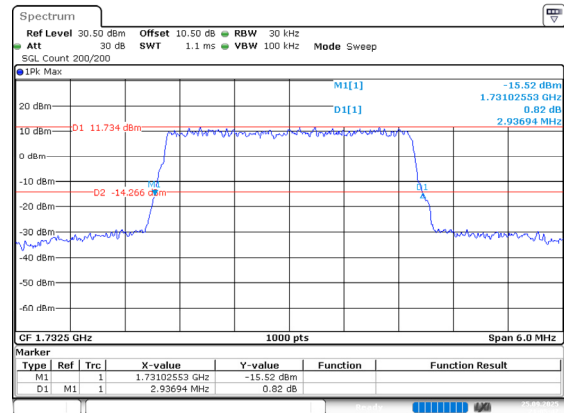

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:05:47


### 5MHz\_Middle\_QPSK\_25@0

#### Occupied Bandwidth

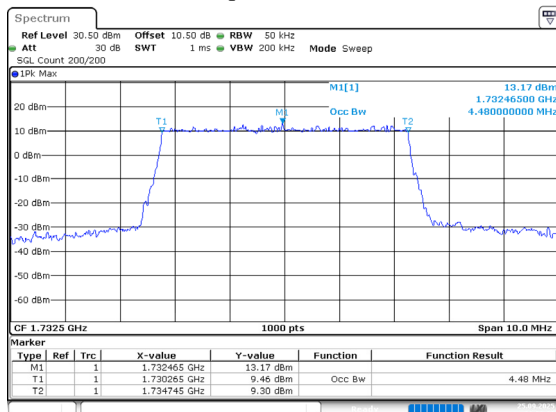

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:06:06


#### 26dB Bandwidth

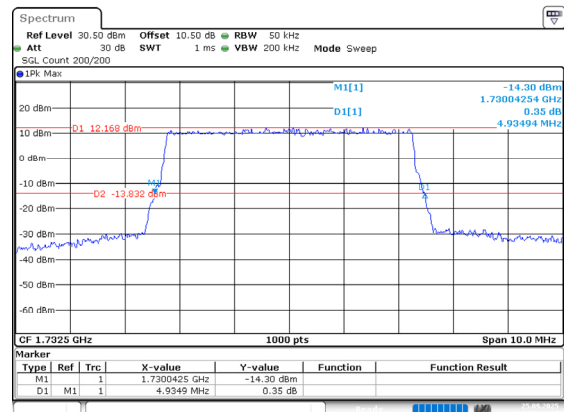

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:06:12


### 5MHz\_Middle\_16QAM\_25@0

#### Occupied Bandwidth

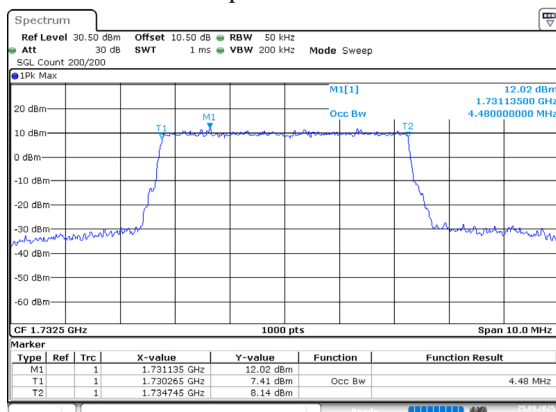

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:06:28


#### 26dB Bandwidth

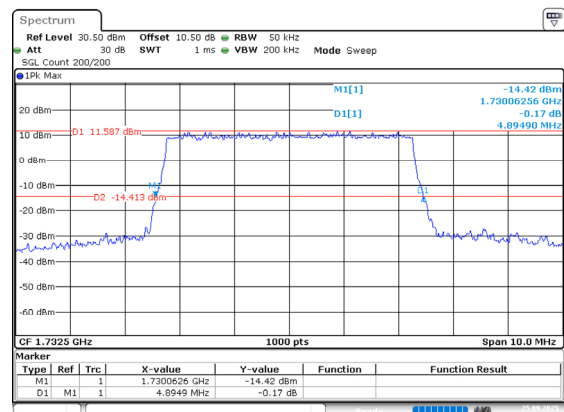

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:06:34


### 10MHz\_Middle\_QPSK\_50@0

#### Occupied Bandwidth

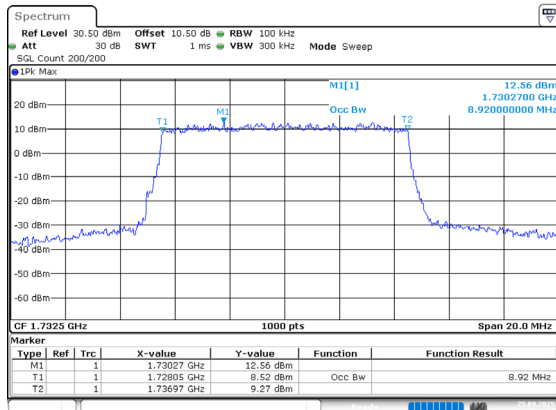

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:06:14


#### 26dB Bandwidth

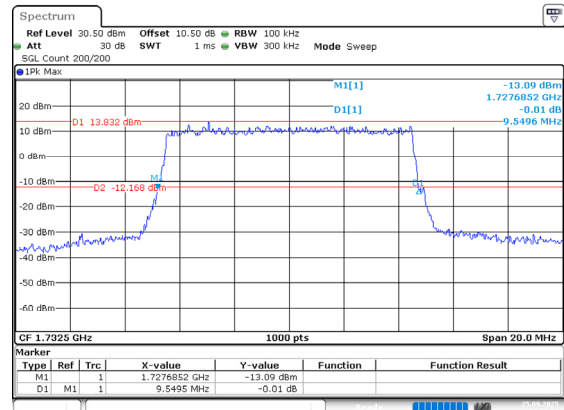

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:07:02


### 10MHz\_Middle\_16QAM\_50@0

#### Occupied Bandwidth

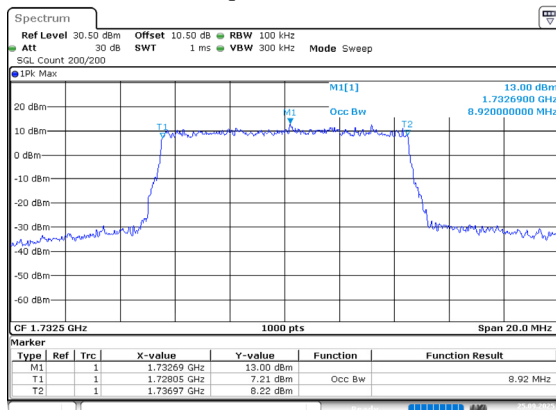

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:07:20


#### 26dB Bandwidth

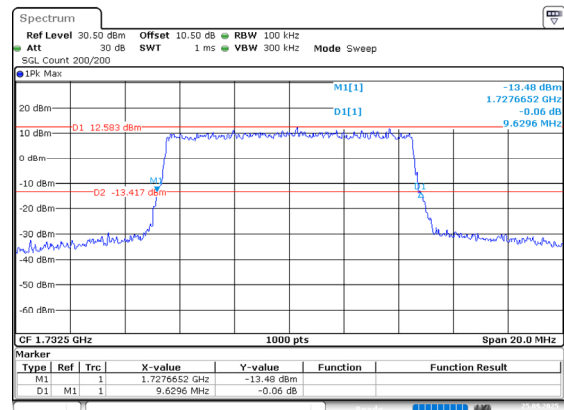

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:07:28


### 15MHz\_Middle\_QPSK\_75@0

#### Occupied Bandwidth

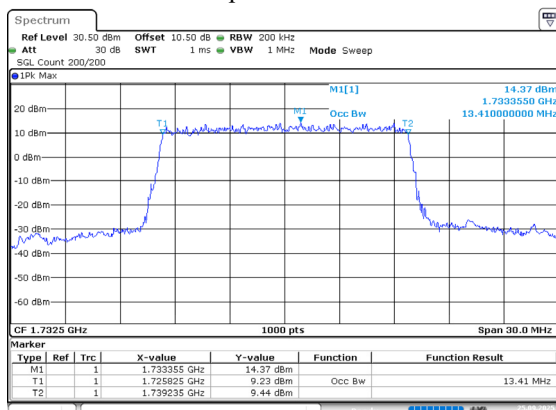

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:07:50

#### 26dB Bandwidth

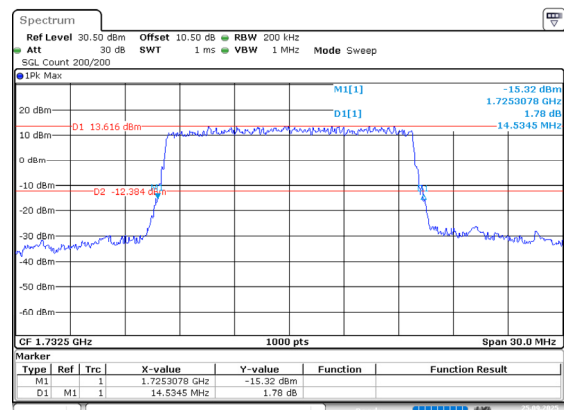

ProjectNo.:2501V00086E-RF Tester:Usain Ou  
Date: 25.SEP.2025 21:07:58