




1 |

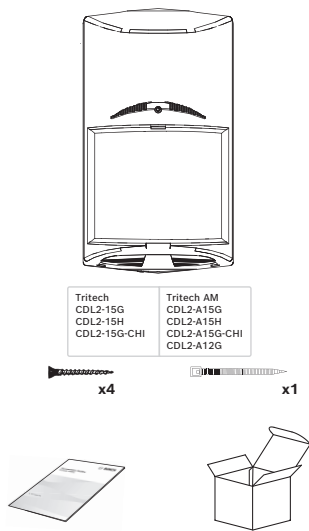


2 |

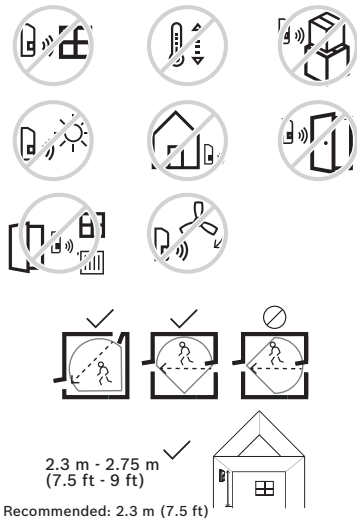


3 |

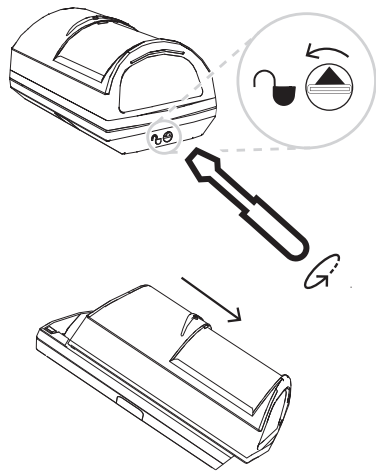


4 |

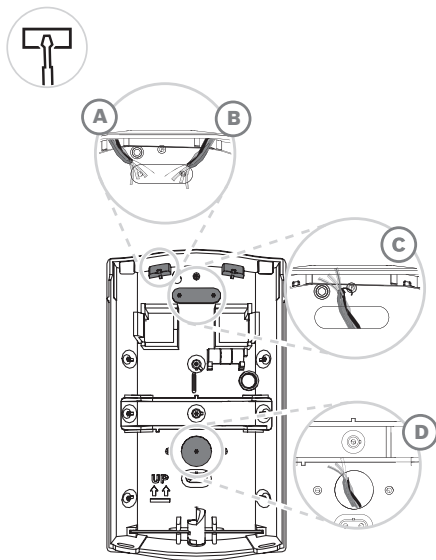


5 |

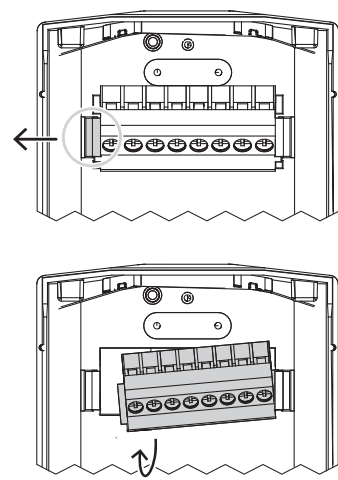


6 |

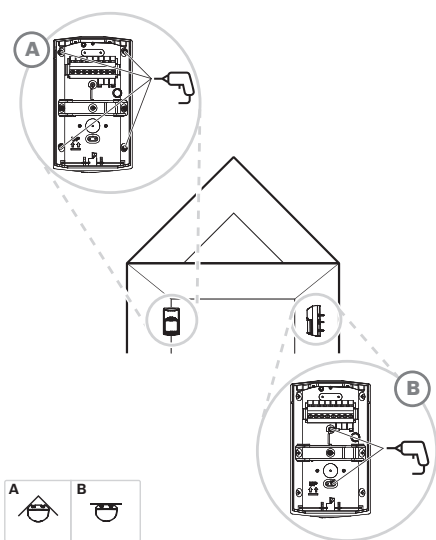


7 |

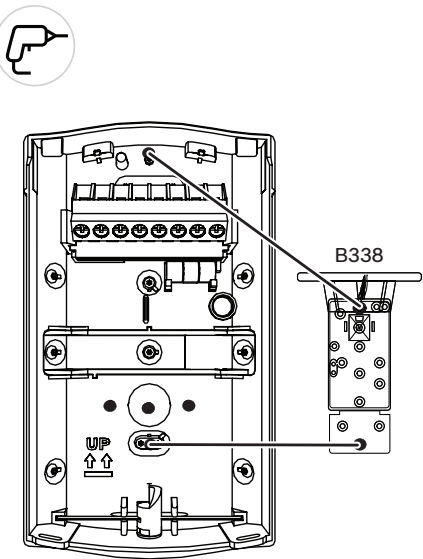


8 |

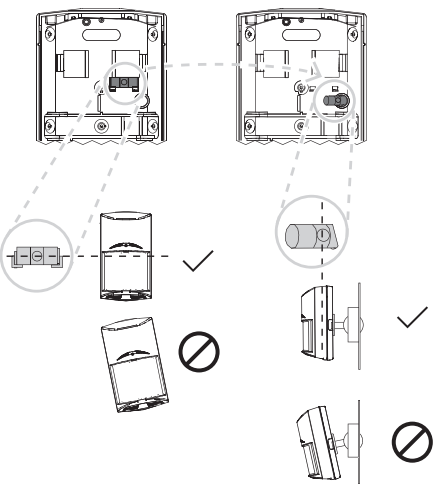


9 |

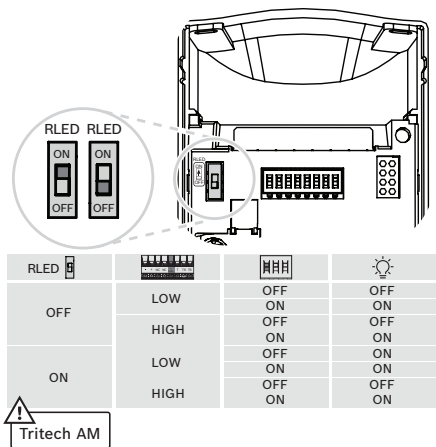


10 |

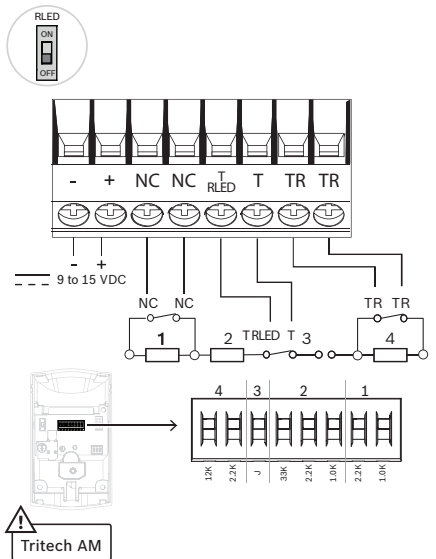


11 |

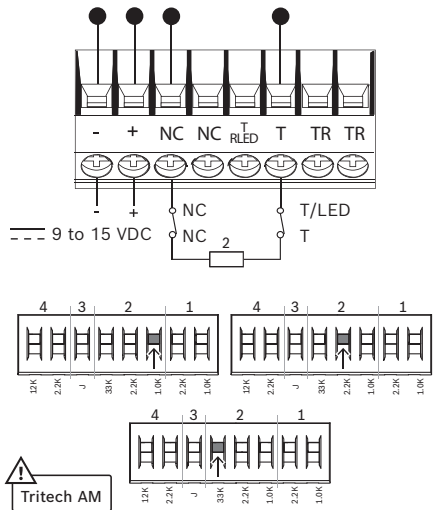


12 |

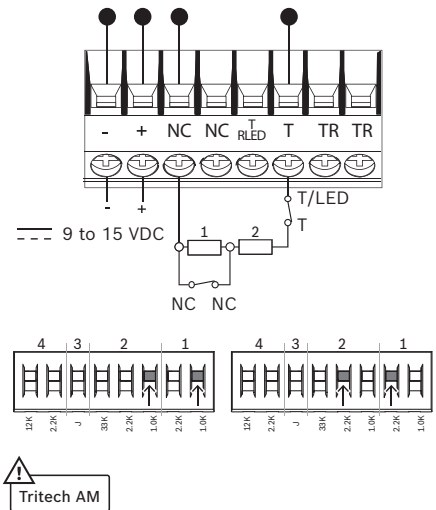


13 |

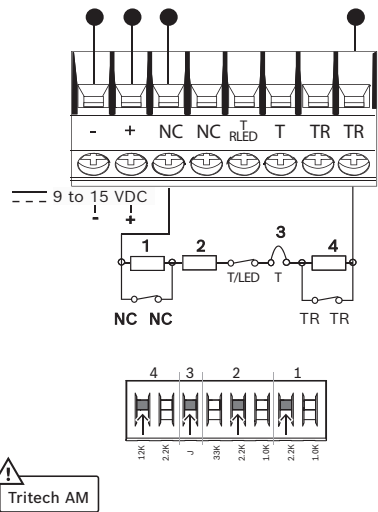


14 |

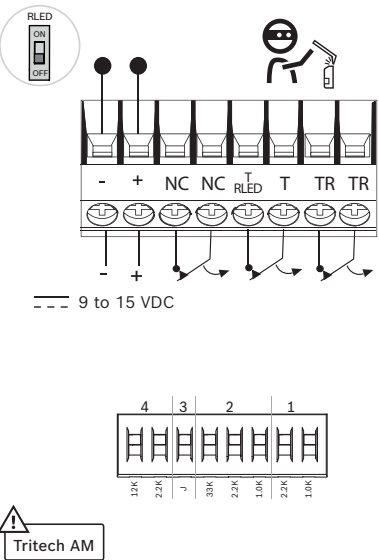


15 |

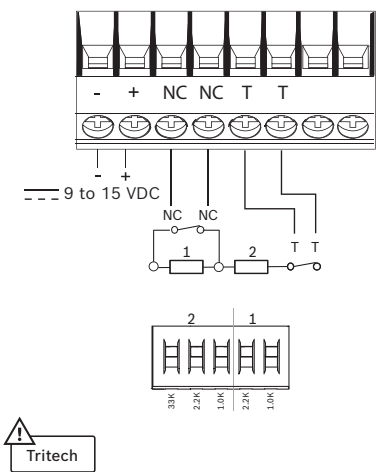


16 |


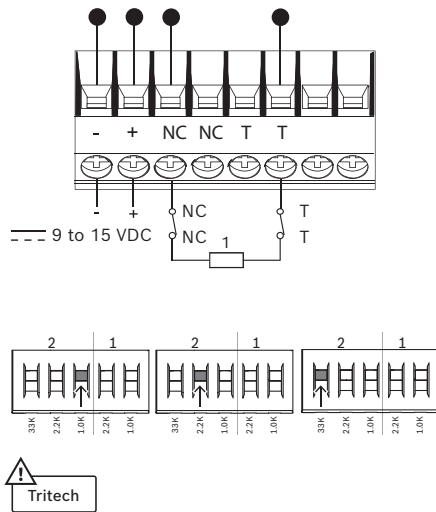


17 |


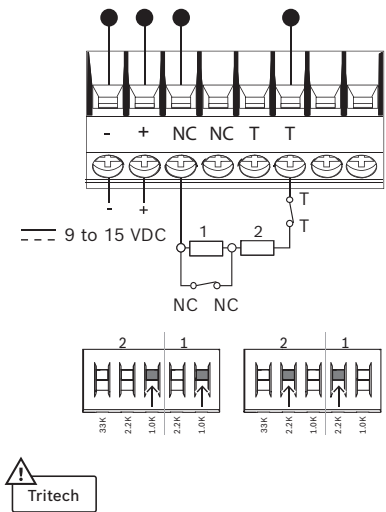


18 |

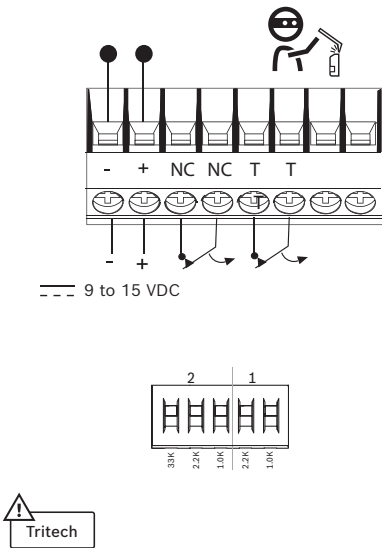

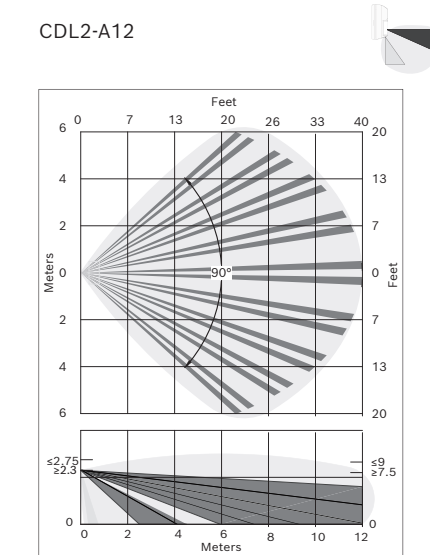
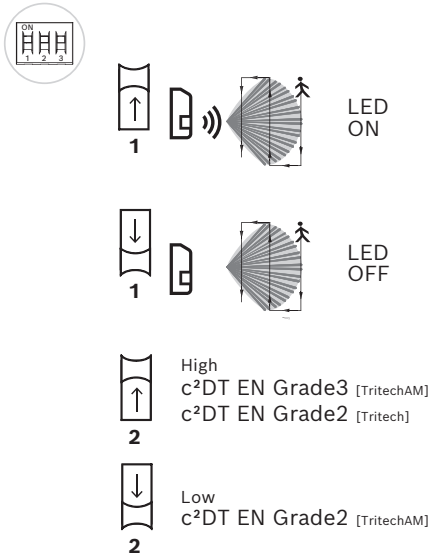


Voltage (operating)	9 to 15 VDC, 9-15 Vcc de 16 mA @ 12 Vcc en veille/en alarme, source limitée en puissance, ondulation résiduelle 1 V.
Current (max)	16 mA
Alarm relay/Tamper/Trouble	<35 mA, 25 V
Wiring loops	Ø 1.29 mm to 0.40 mm (16 AWG to 26 AWG) (UL: 22 AWG to 16 AWG)
	G model = -20 °C - +55 °C (-4 °F to +131 °F) H model = -20 °C - +55 °C (UK = 0 °C - +50 °C) UL/ C-UL: 0 °C to +49 °C (+32 °F to +120 °F)

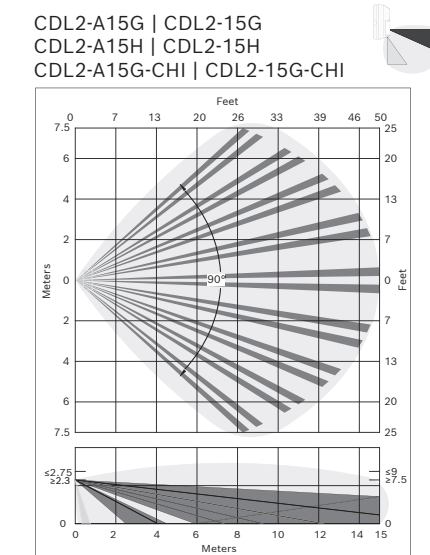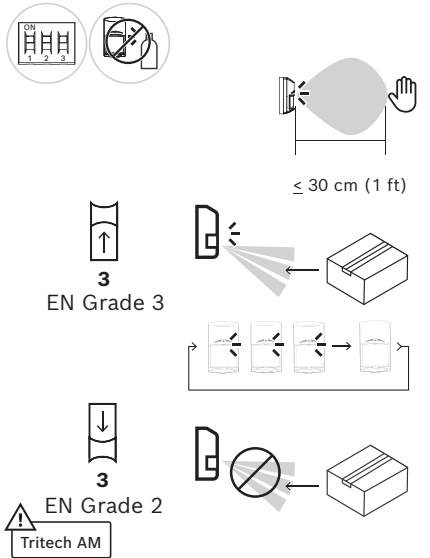


	0- 95% Relative humidity non-condensing UL / C-UL: 0 - 93%	
Region	Agency	Certification
USA and CA	UL, C-UL	UL639, C-UL S306-03 LISTING Intrusion Detection Unit, Type: S (CDL2-A15G, CDL2-A12G, CDL2-15G)
	FCC	Part 15 Subpart B & C, Class B, FCCID: T3X-CDL2 (CDL2-A15G, CDL2-A12G, CDL2-15G)
	IC	RSS210 1249A-CDL2 (CDL2-A15G, CDL2-A12G, CDL2-15G)

USA and CA	UL, C-UL	UL639, C-UL S306-03 LISTING Intrusion Detection Unit, Type: S (CDL2-A15G, CDL2-A12G, CDL2-15G)
	FCC	Part 15 Subpart B & C, Class B, FCCID: T3X-CDL2 (CDL2-A15G, CDL2-A12G, CDL2-15G)
	IC	RSS210 1249A-CDL2 (CDL2-A15G, CDL2-A12G, CDL2-15G)

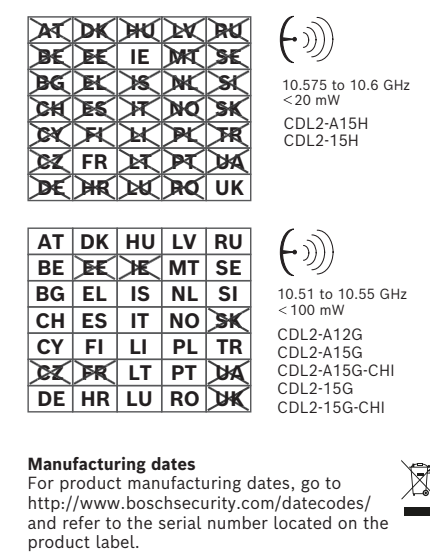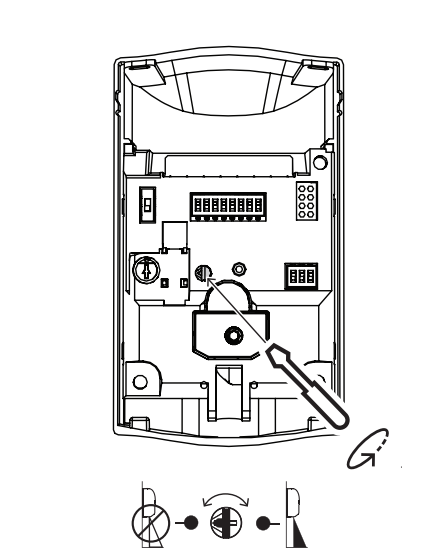


EU	CE	CE - 2014/53/EU (RED), 2011/65/EU and 2015/863 (RoHS) (CDL2-A15G, CDL2-A15H, CDL2-A12G, CDL2-15G, CDL2-15H)
	EN	NF & A2P EN 50131-2-4 Grade 3 (CDL2-A15G, CDL2-A15H, CDL2-A12G) NF & A2P EN 50131-2-4 Grade 2 (CDL2-15G, CDL2-15H) EN 50130-5, Environmental Class II (CDL2-A15G, CDL2-A15H, CDL2-A12G, CDL2-15G, CDL2-15H)) EN60529, EN62262: IP41 / IK04
CN	CCC	2015031901000145 (CDL2-A15G-CHI, CDL2-15G-CHI)

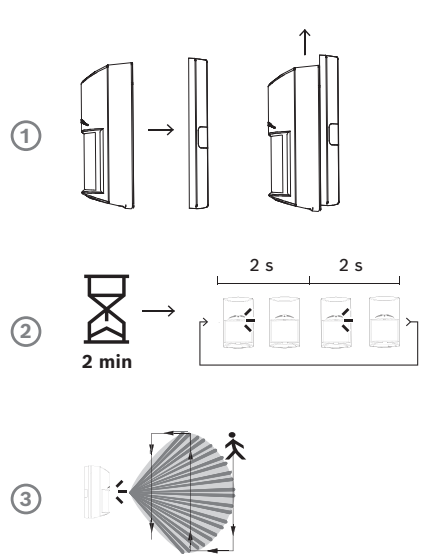

	Changes or modifications not expressly approved by Bosch Security Systems, Inc. can void the user's authority to operate the equipment.
cU-Lus	Perform Walk Test at least once a year. Use only a Listed Class 2 Power Limited power source.Standby power: The Listed control unit or a listed burglary power supply must provide 4 hours of standby power. Install the unit in accordance with National Electrical Code NFPA 70 and Part 1 of the Canadian Electrical code CSA C22.1.


FR	AFNOR & CNPP 	EN50131-2-4 Grade 3, NF324-H58 + RTC 50131-2-4 CDL2-A15H - Certificate # 2830200012 NF (AFNOR): www.marque-nf.com , A2P (CNPP): www.cnpp.com Autosurveillance à l'ouverture Immunité champ magnétique. Test sans masque de vision vertical et sans immunité aux animaux
----	------------------	---

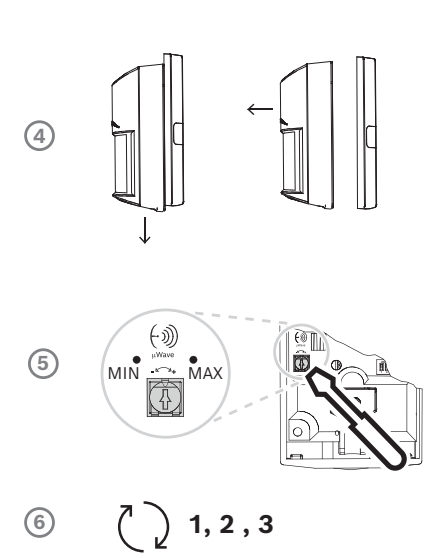

FCC/IC	This device complies with part 15 of the FCC Rules and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device
	Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : 1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

FR	AFNOR & CNPP 	EN50131-2-4 Grade 2, NF324-H58 + RTC 50131-2-4 CDL2-15H Certificate # 2830200012 NF (AFNOR): www.marque-nf.com , A2P (CNPP): www.cnpp.com Auto-surveillance à l'ouverture Im-munité champ magnétique. Test sans masque de vision vertical et sans immunité aux animaux
AU	ACMA	RCM (CDL2-A15G, CDL2-15G)
BR	ANA-TEL	Resolution No. 242 (CDL2-A15G, CDL2-A12G, CDL2-15G)

Commercial Series Gen 2
CDL2-15G | CDL2-15H | CDL2-15G-CHI |
CDL2-A15G | CDL2-A15H | CDL2-A12G |
CDL2-A15G-CHI

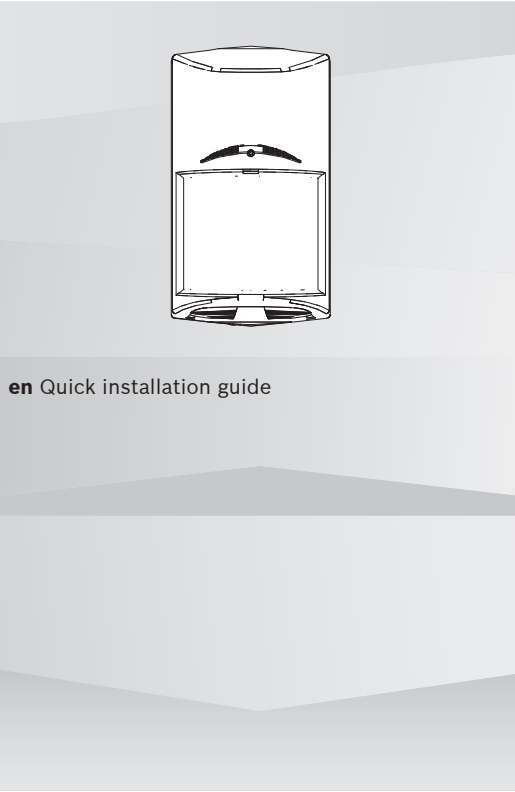

en Quick installation guide

Bosch Security Systems B.V.
Torenallee 49
5617 BA Eindhoven
Netherlands
www.boschsecurity.com
© Bosch Security Systems B.V., 2021