

TEST REPORT



Deutsche
Akkreditierungsstelle
D-PL-12047-01-00

BNetzA-CAB-02/21-102

Test report no.: 1-1587-25-01-03_TR1-R02

Testing laboratory

cetecom advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://cetecomadvanced.com>

e-mail: mail@cetecomadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number:

D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

Applicant

LID Technologies

12 rue Hermès - Bâtiment C

31520 Ramonville Saint Agne / FRANCE

Phone: -/-

Contact: Tatiana Janez

e-mail: tjanez@lid.tech

Manufacturer

LID Technologies

12 rue Hermès - Bâtiment C

31520 Ramonville Saint Agne / FRANCE

Test standard/s

FCC - Title 47 CFR Part 15 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 210 Issue 11 Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment

RSS - Gen Issue 5 incl. Amendment 1 & 2 Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Smart Diag Box 434MHz

Model name: 21125

FCC ID: T4521125

ISED certification number: 6450A-21125

Frequency: 125 kHz

Technology tested: proprietary

Antenna: Integrated antenna

Power supply: 4.5 V to 5.5 V DC, through USB

Temperature range: 0°C to +45°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

Christoph Schneider
Lab Manager
Radio Labs

cn=Christoph Schneider, o=cetecom
advanced GmbH, ou=SND-230601,
email=christoph.schneider@cetecomad
vanced.com, c=DE
2026.02.03 11:28:35 +01'00'

Test performed:

Hans-Joachim Wolsdorfer
Lab Manager
Radio Labs

cn=Joachim Wolsdorfer, o=cetecom
advanced GmbH, ou=WLD-230605,
email=joachim.wolsdorfer@cetecomadvan
ced.com, c=DE
2026.02.03 11:17:46 +01'00'

1 Table of contents

1	Table of contents.....	2
2	General information.....	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted.....	3
3	Test standard/s, references and accreditations	4
4	Reporting statements of conformity – decision rule	5
5	Test environment	6
6	Test item	6
6.1	General description.....	6
6.2	Additional information	6
7	Description of the test setup.....	7
7.1	Shielded fully anechoic chamber	8
7.2	AC conducted	9
7.3	Conducted measurements	10
8	Sequence of testing.....	11
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	11
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	12
9	Measurement uncertainty.....	13
10	Summary of measurement results	14
11	Additional comments	14
12	Measurement results	15
12.1	Occupied bandwidth	15
12.2	Field strength of the fundamental	17
12.3	Field strength of the harmonics and spurious	18
12.4	Conducted limits.....	20
13	Glossary.....	25
14	Document history.....	26

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-1587-25-01-03_TR1-R01 and dated 2026-01-21.

2.2 Application details

Date of receipt of order:	2025-10-28
Date of receipt of test item:	2026-01-12
Start of test:*	2026-01-13
End of test:*	2026-01-15
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 11	25.06.2024	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS - Gen Issue 5 incl. Amendment 1 & 2	February 2021	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus


Guidance	Version	Description
ANSI C63.4a: 2017	-/-	American National Standard for Methods of Measurement of RadioNoise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz Amendment 1: Test Site Validation American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Including
ANSI C63.10-2020	2020	- ANSI/USEMCSC C63.10-2020/Cor 1-2023 - ANSI/USEMCSC C63.10a-2024 - ANSI/USEMCSC C63.10a-2024 Amendment 1 / 2024-08-08 - ANSI/USEMCSC C63.10a-2024 Amendment 1 Errata / 2024-11-18

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

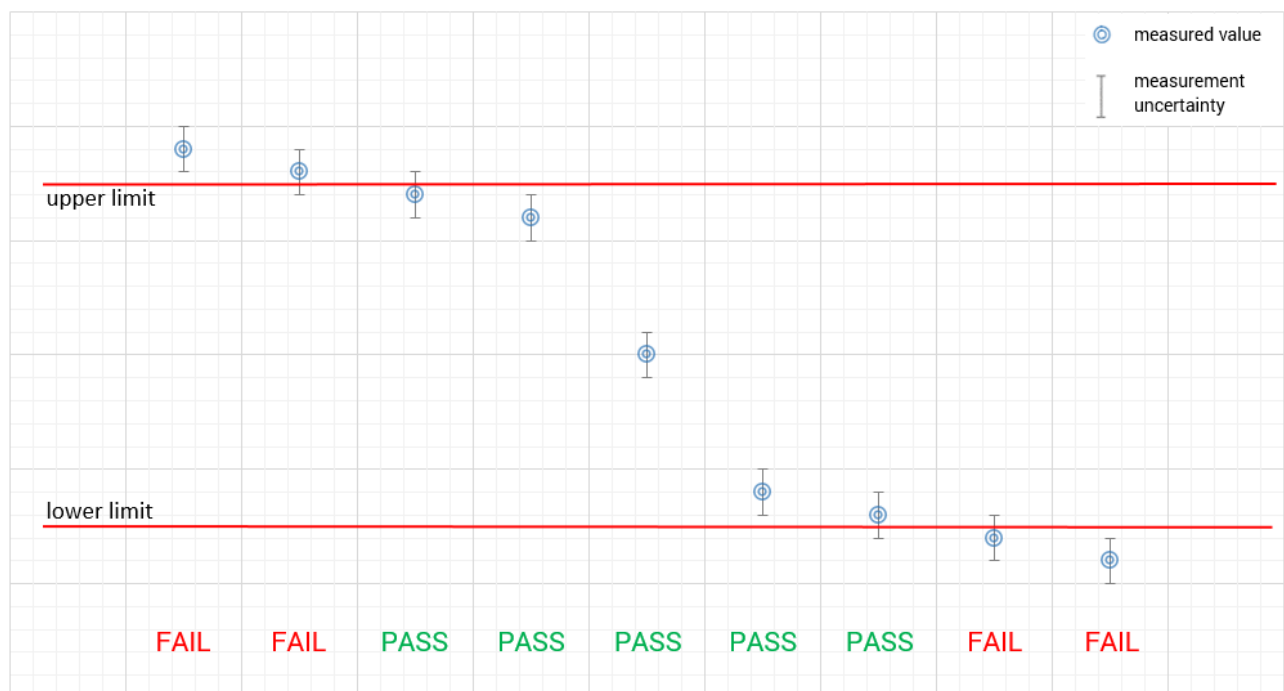

5 Test environment

Temperature	:	T_{nom} T_{max} T_{min}	+22 °C during room temperature tests +45 °C during high temperature tests 0 °C during low temperature tests
Relative humidity content	:		55 %
Barometric pressure	:		1021 hpa
Power supply	:	V_{nom} V_{max} V_{min}	5.0 V DC, through USB 5.5 V 4.5 V

6 Test item

6.1 General description

Kind of test item	:	Smart Diag Box 434MHz
Model name	:	21125
HMN	:	-/-
PMN	:	21125
HVIN	:	21125
FVIN	:	N/A
S/N serial number	:	Rad. Cd1C9Fd6
Hardware status	:	16-051-C
Software status	:	416051130117
Firmware status	:	N/A
Frequency band	:	125 kHz
Type of radio transmission	:	modulated carrier
Use of frequency spectrum	:	
Type of modulation	:	ASK
Number of channels	:	1
Antenna	:	Integrated antenna
Power supply	:	4.5 V to 5.5 V DC, through USB
Temperature range	:	0°C to +45°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-1587-25-01-01_TR1-A101-R01
1-1587-25-01-01_TR1-A102-R01
1-1587-25-01-01_TR1-A103-R01

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded fully anechoic chamber

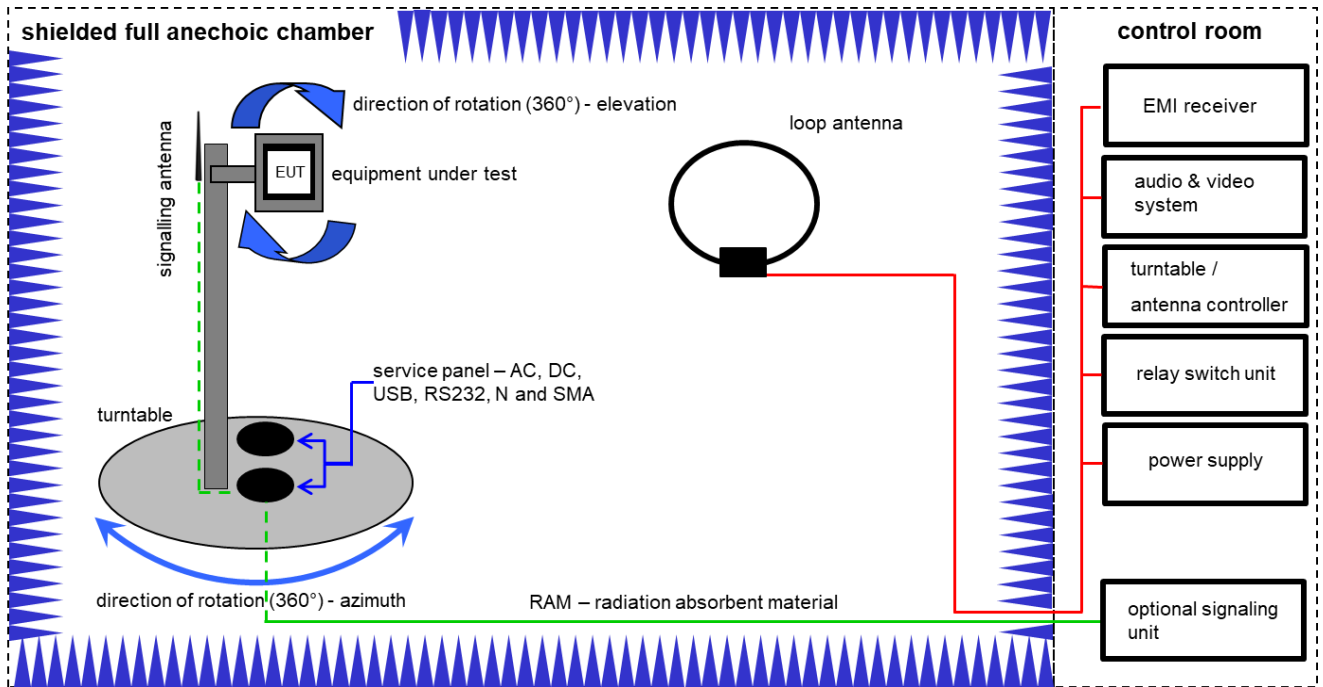

Measurement distance: loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Anechoic chamber	Anechoic chamber FAC 3/5m	MEC Import: MWB / TDK	87400/02	300000996-0000	cpu	-/-	-/-
2	A	Switch / Control Unit	Switch / Control Unit 3488A	Hewlett Packard	*	300000199-0000	cnn	-/-	-/-
3	A	4U RF Switch Platform	4U RF Switch Platform L4491A	Agilent Technologies Deutschland GmbH / Böblingen	MY50000037	300004509-0000	cnn	-/-	-/-
4	A	NEXIO EMV-Software	NEXIO EMV-Software BAT EMC V2022.0.32.0	MEC Import: Nexio		300004682-0000	cnn	-/-	-/-
5	A	Active Loop Antenna	Active Loop Antenna 6502	EMCO Elektronik GmbH / Gilching	8905-2342	300000256-0000	cal	16.07.2025	16.07.2027
6	A	EMI Test Receiver	EMI Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100037	300003555-0000	cal	11.12.2025	31.12.2026

7.2 AC conducted

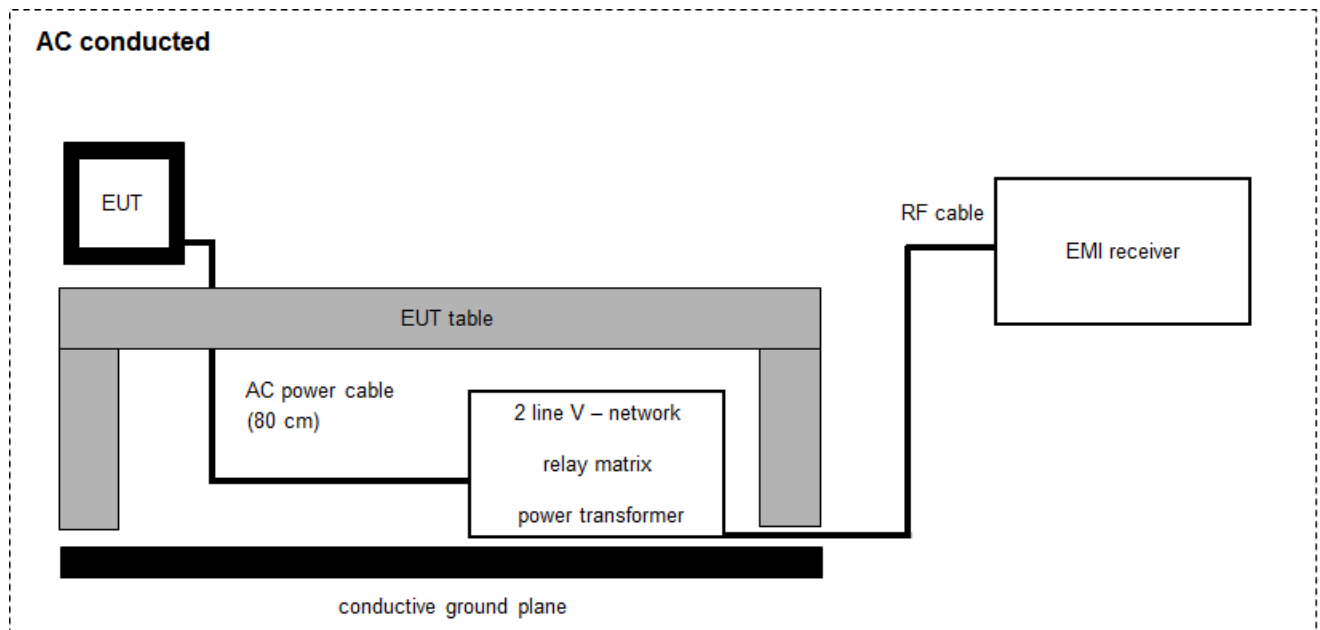

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:


$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] \quad (244.06 \mu V/m)$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	EMI Test Receiver	EMI Test Receiver ESR3 9kHz-3.6GHz	Rohde & Schwarz Messgerätebau GmbH / Memmingen	102981	300006318	cal	05.12.2025	31.12.2026
2	A	Analyzer-Impedance-System	Analyzer-Impedence-System AIS16/1	MEC Import: Spitzenberger + Spies GmbH & Co. KG	UO2076 07/0 1023	400001751 -0000	cal	19.10.2023	31.10.2025
3	A	Two-Line V-Network (LISN)	Two-Line V-Network (LISN) ESH3-Z5	Rohde & Schwarz Messgerätebau GmbH / Memmingen	892475/017	300002209	cal	09.12.2025	31.12.2027
4	A	Hochpass 150 kHz	Hochpass 150 kHz EZ-25	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100010	300003798 -0000	cpu	-/-	-/-

7.3 Conducted measurements

Conducted measurements normal conditions

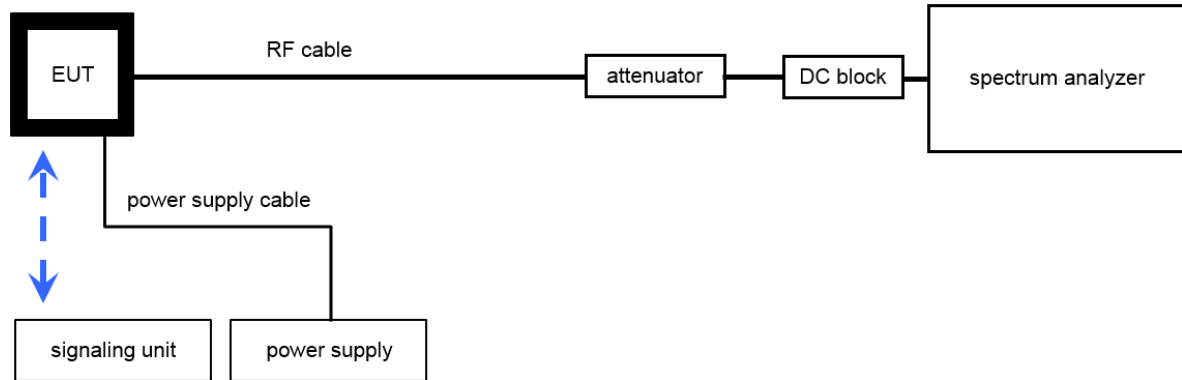

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal analyzer	Signal analyzer FSV30	Rohde & Schwarz Messgerätebau GmbH / Memmingen	104365	300005923-0000	cal	04.12.2025	31.12.2026
2	A	Loop Antenna	Loop Antenna	MEC Import: ZEG TS Steinfurt		400001208-0000	cpu	-/-	-/-

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

9 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Occupied bandwidth	$\pm$ used RBW
Field strength of the fundamental	± 3 dB
Field strength of the harmonics and spurious	± 3 dB
Receiver spurious emissions and cabinet radiations	± 3 dB
Conducted limits	± 2.6 dB

10 Summary of measurement results

☒	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☐	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210 Issue 11 RSS Gen Issue 5	See table!	2026-02-03	-/-

Test specification clause	Test case	Temperature conditions	Power source conditions	C	NC	NA	NP	Remark
RSS Gen Issue 5 (6.6)	Occupied bandwidth	Nominal	Nominal	☒	☐	☐	☐	-/-
§ 15.209	Field strength of the fundamental	Nominal	Nominal	☒	☐	☐	☐	-/-
§ 15.209 RSS Gen Issue 5 (6.13)	Field strength of the harmonics and spurious	Nominal	Nominal	☒	☐	☐	☐	-/-
§15.107 §15.207	Conducted limits	Nominal	Nominal	☒	☐	☐	☐	-/-

Note: NA = Not applicable; NP = Not performed; C = Compliant; NC = Not compliant

11 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: 321-125-Z051_Quick_Guide

12 Measurement results

12.1 Occupied bandwidth

Measurement:

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

Measurement parameters	
Detector:	Peak
Resolution bandwidth:	1 % – 5 % of the occupied bandwidth
Video bandwidth:	≥ 3x RBW
Trace mode:	Max hold
Analyser function:	99 % power function
Used test setup:	See sub clause 7.3 A
Measurement uncertainty:	See sub clause 9


Limit:

ISED
for RSP-100 test report coversheet only

Result:

99% emission bandwidth
4.71 kHz

Plot: 99 % emission bandwidth

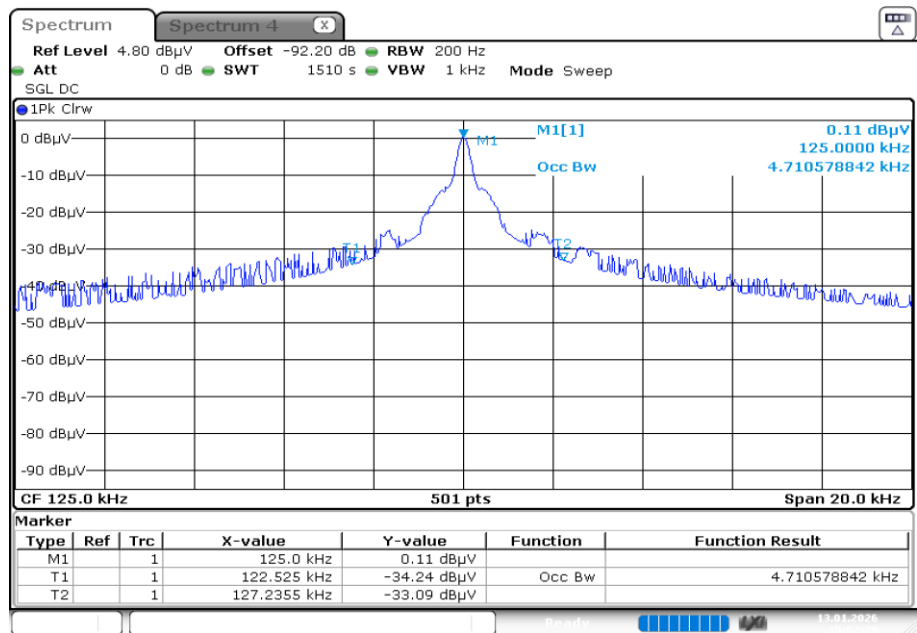

Date: 13.JAN.2026 15:52:30

12.2 Field strength of the fundamental

Measurement:

The maximum detected field strength for the carrier signal.

Measurement parameters	
Detector:	average
Resolution bandwidth:	9 kHz > OBW
Video bandwidth:	≥ 3x RBW
Trace mode:	Max hold
Used test setup	See sub clause 7.1 A
Measurement uncertainty:	See sub clause 9

Limit:

FCC		
Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 – 0.490	2400 / f (kHz) 25.66 dBμV/m @125 kHz	300

ISED		
Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 – 0.490	6.37 / f (kHz) 0.05 μA/m @125 kHz -25.85 dBμA/m	300

Recalculation:

According to ANSI C63.10		
Frequency	Formula	Correction value
125 kHz	$FS_{limit} = FS_{max} - 40 \log \left(\frac{d_{nearfield}}{d_{measure}} \right) - 20 \log \left(\frac{d_{limit}}{d_{nearfield}} \right)$ FS_{limit} is the calculation of field strength at the limit distance, expressed in dBμV/m FS_{max} is the measured field strength, expressed in dBμV/m $d_{nearfield}$ is the $\lambda/2\pi$ distance $d_{measure}$ is the distance of the measurement point from EUT d_{limit} is the reference limit distance	-82.1 dB from 3 m to 300 m

Result:

Field strength of the fundamental		
Frequency	125 kHz	
Distance	@ 3 m	@ 300 m
Measured / calculated value FCC	82.81 dBμV/m	0.71 dBμV/m
Measured / calculated value ISED	31.03 dBμA/m	- 51.07 dBμA/m

12.3 Field strength of the harmonics and spurious

Measurement:

The maximum detected field strength for the harmonics and spurious.

Measurement parameters	
Detector:	Quasi peak / average or peak (worst case – pre-scan)
Resolution bandwidth:	F < 150 kHz: 200 Hz 150 kHz < F < 30 MHz: 9 kHz 30 MHz < F < 1 GHz: 120 kHz
Video bandwidth:	F < 150 kHz: 1 kHz 150 kHz < F < 30 MHz: 100 kHz 30 MHz < F < 1 GHz: 300 kHz
Trace mode:	Max hold
Used test setup:	9 kHz to 30 MHz: see sub clause 7.1A
Measurement uncertainty:	See sub clause 9

Limit:

FCC		
Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30 (29.5 dB μ V/m)	30
30 – 88	100 (40 dB μ V/m)	3
88 – 216	150 (43.5 dB μ V/m)	3
216 – 960	200 (46 dB μ V/m)	3


ISED		
Frequency (MHz)	Field strength (μ A/m)	Measurement distance (m)
0.009 – 0.490	6.37/F (F in kHz)	300
0.490 – 1.705	63.7/F (F in kHz)	30
1.705 – 30	0.08 (-22 dB μ A/m)	30

Result:


Detected emissions			
Frequency (MHz)	Detector	Resolution bandwidth (kHz)	Detected value
All detected peak emissions below 30 MHz are more than 20 dB below the average limit.			
For emissions above 30 MHz, please look at the table below the 1 GHz plot.			

Plots:

Plot 1: 9 kHz – 30 MHz, magnetic spurious emissions FCC

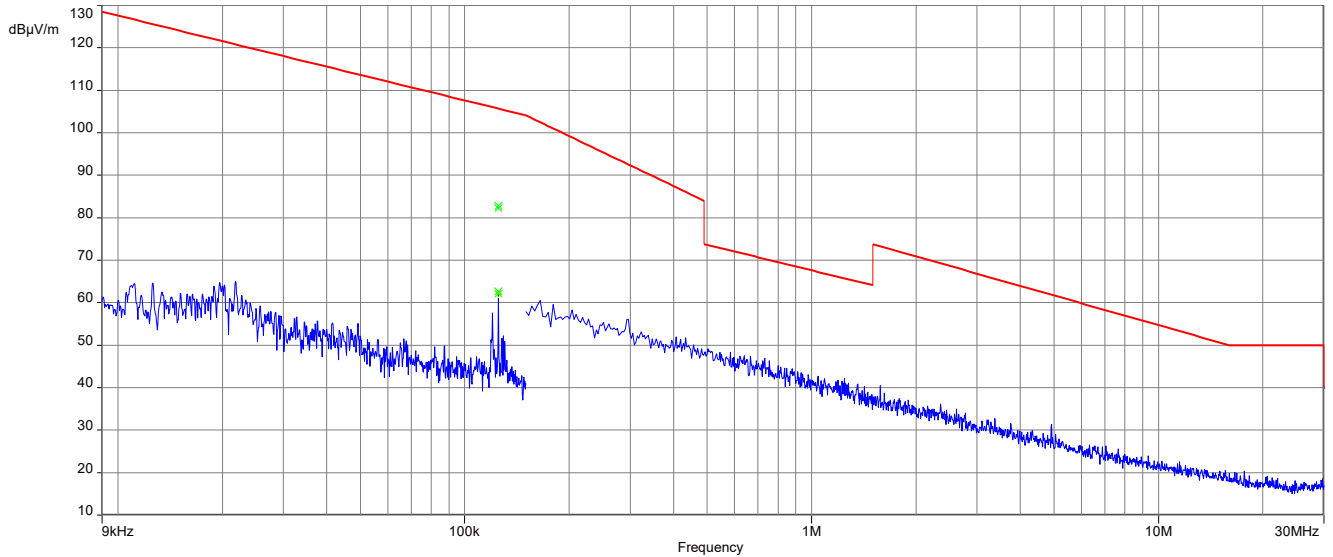

Plot 2: 9 kHz – 30 MHz, magnetic spurious emissions ISED

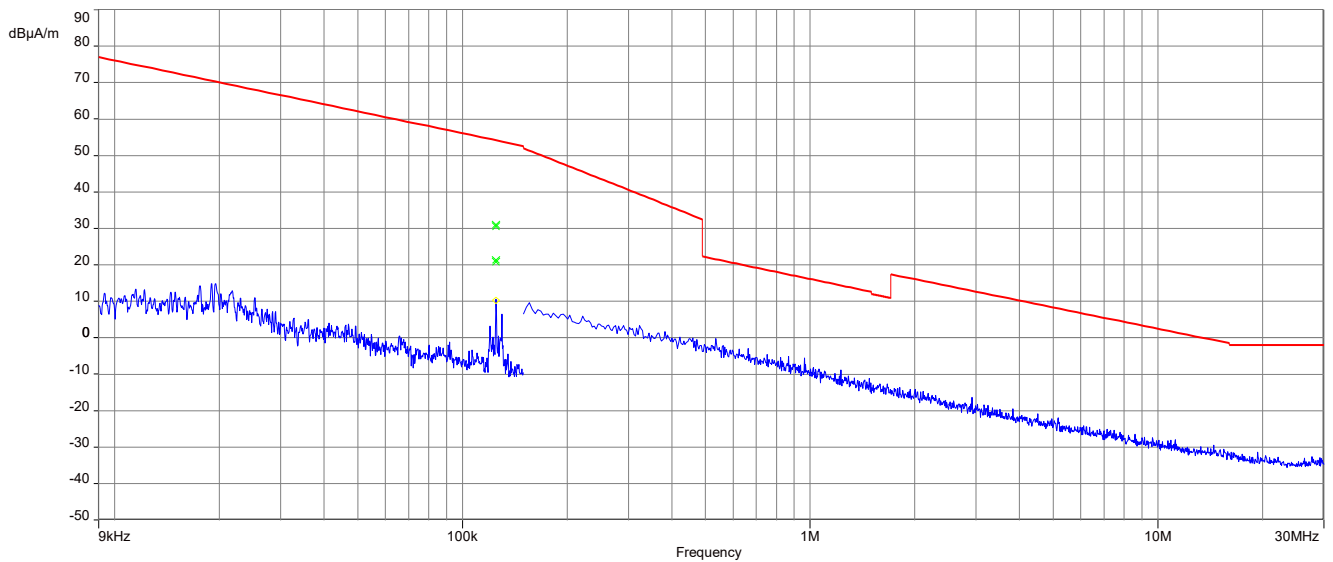

12.4 Conducted limits

Measurement:

Measurement of the conducted spurious emissions for an intentional radiator that is designed to be connected to the public utility (AC) power line. Measurement performed according to ANSI C63.10, chapter 6.2


Measurement parameters	
Detector:	Quasi peak / average or peak (worst case – pre-scan)
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Trace mode:	Max hold
Used equipment:	See chapter 7.2A
Measurement uncertainty:	See chapter 9

Limit:


FCC & ISED		
Frequency / MHz	Quasi-peak / (dB μ V/m)	Average / (dB μ V/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

Result:


see table below plots

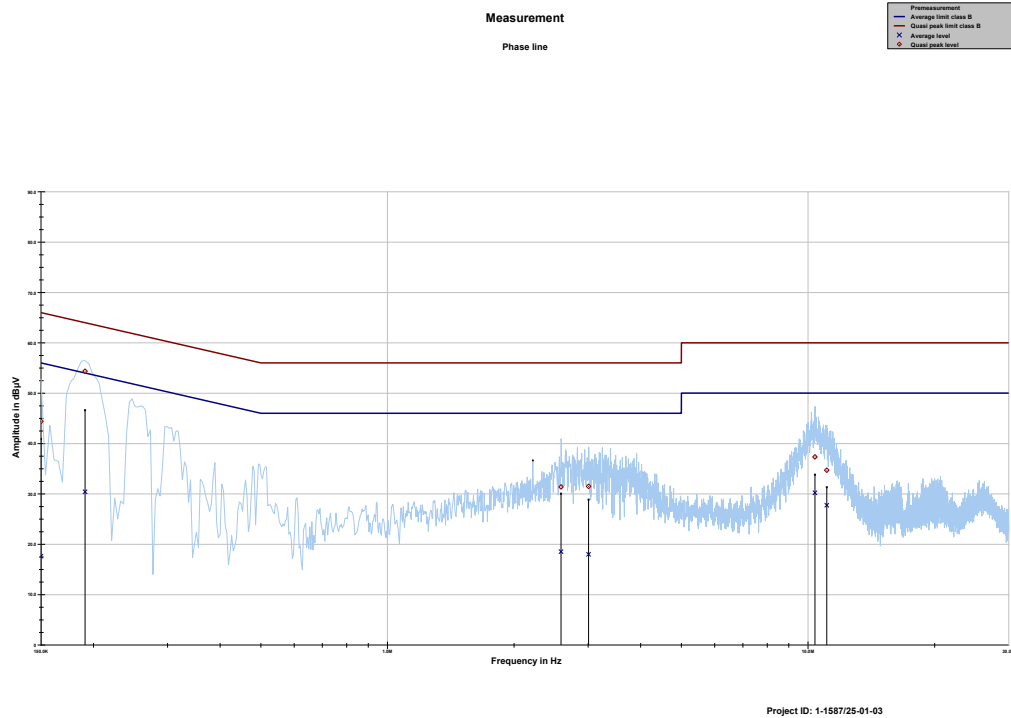Plots 120V AC:**Plot 1: 150 kHz to 30 MHz, phase line**


Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.150000	44.39	21.61	66.000	17.62	38.38	56.000
0.191044	54.35	9.64	63.991	30.42	24.40	54.827
2.586506	31.37	24.63	56.000	18.53	27.47	46.000
3.008138	31.49	24.51	56.000	17.98	28.02	46.000
10.388550	37.34	22.66	60.000	30.21	19.79	50.000
11.082562	34.69	25.31	60.000	27.74	22.26	50.000

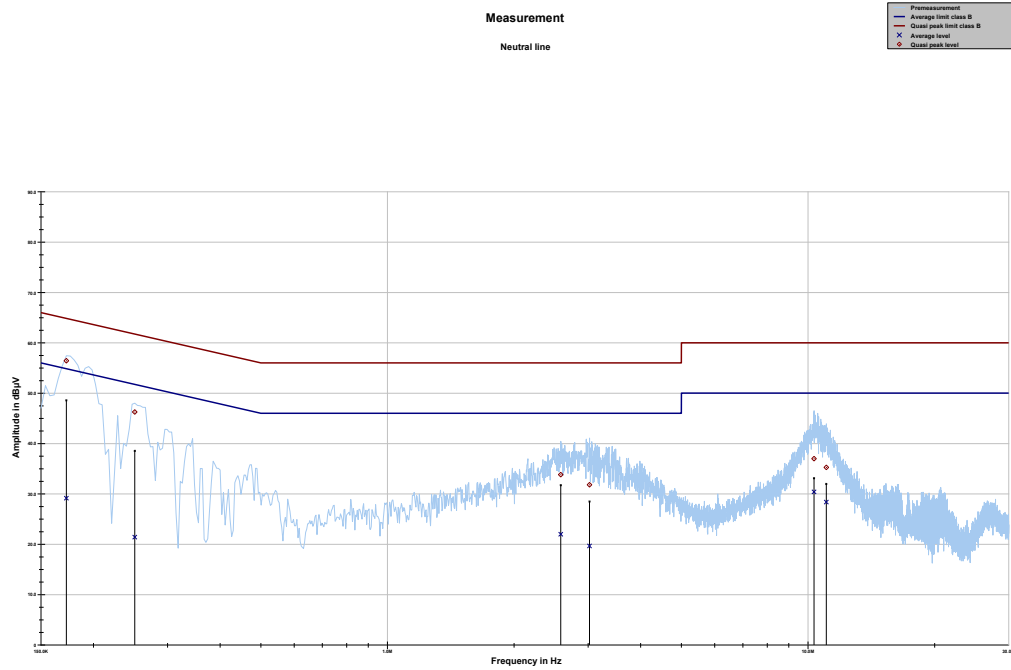Plot 2: 150 kHz to 30 MHz, neutral line

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.172387	56.43	8.41	64.845	29.15	26.21	55.360
0.250744	46.25	15.48	61.732	21.41	31.71	53.122
2.582775	33.81	22.19	56.000	21.99	24.01	46.000
3.023062	31.81	24.19	56.000	19.66	26.34	46.000
10.336313	36.99	23.01	60.000	30.40	19.60	50.000
11.052713	35.26	24.74	60.000	28.37	21.63	50.000

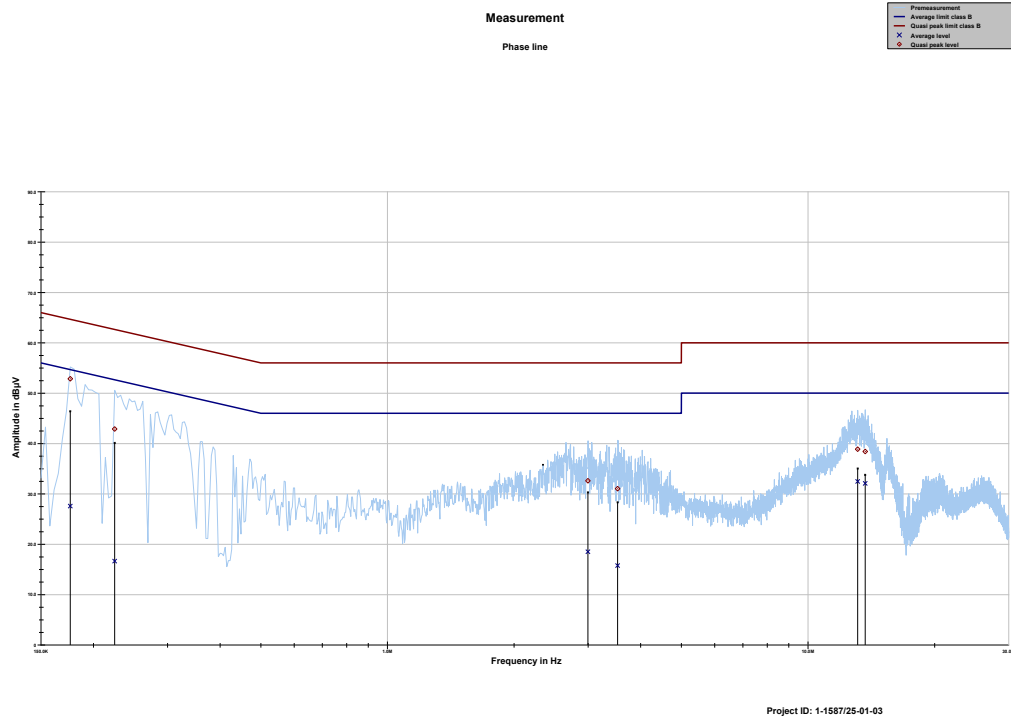Plots 240V AC:**Plot 1: 150 kHz to 30 MHz, phase line**

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.176119	52.85	11.82	64.667	27.57	27.69	55.254
0.224625	42.87	19.77	62.646	16.64	37.23	53.868
2.996944	32.59	23.41	56.000	18.51	27.49	46.000
3.526781	31.03	24.97	56.000	15.75	30.25	46.000
13.127287	38.87	21.13	60.000	32.46	17.54	50.000
13.675781	38.42	21.58	60.000	32.08	17.92	50.000

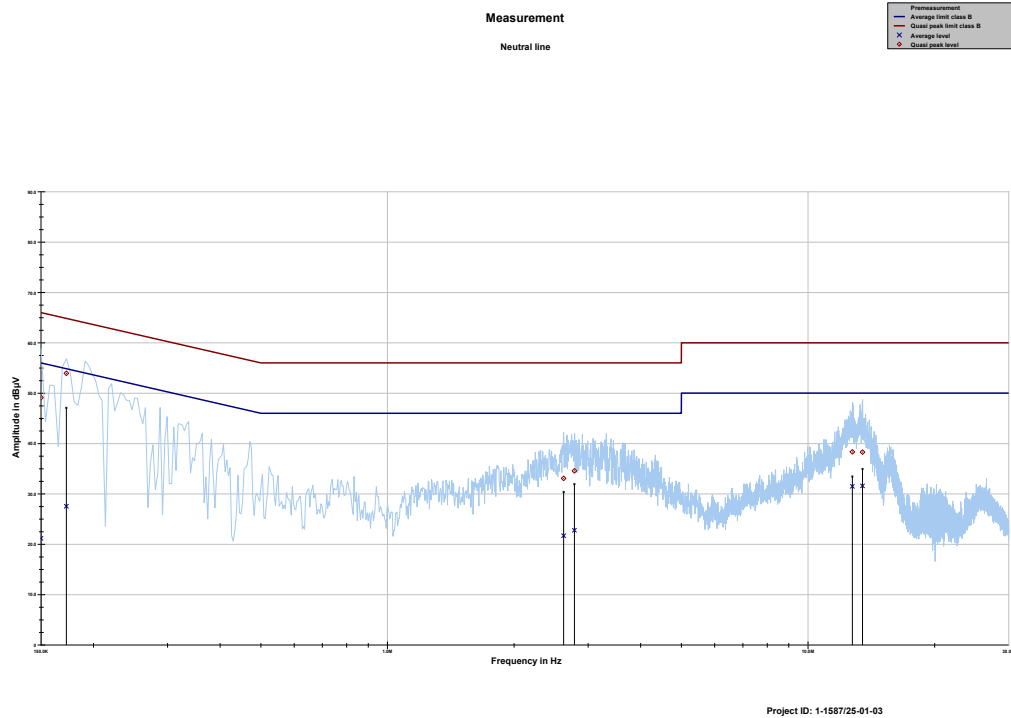Plot 2: 150 kHz to 30 MHz, neutral line

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.150000	49.11	16.89	66.000	21.17	34.83	56.000
0.172387	53.93	10.91	64.845	27.54	27.82	55.360
2.623819	33.08	22.92	56.000	21.68	24.32	46.000
2.784263	34.56	21.44	56.000	22.77	23.23	46.000
12.750431	38.33	21.67	60.000	31.49	18.51	50.000
13.481756	38.29	21.71	60.000	31.58	18.42	50.000

13 Glossary

AVG	Average
C	Compliant
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz
CAC	Channel availability check
CW	Clean wave
DC	Duty cycle
DFS	Dynamic frequency selection
DSSS	Dynamic sequence spread spectrum
DUT	Device under test
EN	European Standard
ETSI	European Telecommunications Standards Institute
EMC	Electromagnetic Compatibility
EUT	Equipment under test
FCC	Federal Communications Commission
FCC ID	Combination of Grantee Code and Equipment Product Code
FHSS	Frequency hopping spread spectrum
FVIN	Firmware version identification number
GNSS	Global Navigation Satellite System
GUE	GNSS User Equipment
HMN	Host marketing name
HVIN	Hardware version identification number
HW	Hardware
ISED	Innovation, Science and Economic Development Canada
Inv. No.	Inventory number
MC	Modulated carrier
NA	Not applicable
NC	Not compliant
NOP	Non occupancy period
NP	Not performed
OBW	Occupied bandwidth
OC	Operating channel
OCW	Operating channel bandwidth
OFDM	Orthogonal frequency division multiplexing
OOB	Out of band
OP	Occupancy period
PER	Packet error rate
PMN	Product marketing name
PP	Positive peak
QP	Quasi peak
RLAN	Radio local area network
S/N or SN	Serial number
SW	Software
UUT	Unit under test
WLAN	Wireless local area network

14 Document history

Version	Applied changes	Date of release
R01	Initial release	2026-01-21
R02	update chapter 6.1	2026-02-03

END OF TEST REPORT