

FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10:2013 TEST REPORT

For

AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD

Model: DL4480V

Trade Name: netis

Issued for

NETIS SYSTEMS CO., LTD

**4F & 5F, R&D Building, Oriental Cyberport, High-Tech Industrial Park,
Nanshan, Shenzhen, China**

Issued by

**Compliance Certification Services Inc.
Hsinchu Lab.
No.989-1, Wenshan Rd., Shangshan Village,
Qionglin Township, Hsinchu County 30741, Taiwan (R.O.C.)
TEL: +886-3-5921698
FAX: +886-3-5921108**

**<http://www.ccsrf.com>
E-Mail: service@ccsrf.com**

Issued Date: August 02, 2016



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	08/02/2016	Initial Issue	All Page 123	Dola Hsieh

TABLE OF CONTENTS

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	6
4. TEST METHODOLOGY	7
5. FACILITIES AND ACCREDITATION	7
5.1 FACILITIES	7
5.2 ACCREDITATIONS	7
5.3 MEASUREMENT UNCERTAINTY	8
6. SETUP OF EQUIPMENT UNDER TEST	9
7. FCC PART 15.247 REQUIREMENTS	10
7.1 DUTY CYCLE CORRECTION FACTOR	10
7.2 6dB BANDWIDTH	11
7.3 MAXIMUM PEAK OUTPUT POWER	29
7.4 AVERAGE POWER	33
7.5 POWER SPECTRAL DENSITY	36
7.6 CONDUCTED SPURIOUS EMISSION	56
7.7 RADIATED EMISSION	81
7.8 CONDUCTED EMISSION	115
8. APPENDIX II SETUP PHOTOS	120

1. TEST REPORT CERTIFICATION

Applicant : NETIS SYSTEMS CO., LTD
Address : 4F & 5F, R&D Building, Oriental Cyberport, High-Tech
Industrial Park, Nanshan, Shenzhen, China
Equipment Under Test : AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD
Model : DL4480V
Trade Name : netis
Tested Date : May 04 ~ July 06, 2016

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.10:2013	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:



Sb. Lu
Sr. Engineer

Reviewed by:



Gundam Lin
Sr. Engineer

2. EUT DESCRIPTION

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD
Model Number	DL4480V
Identify Number	T160504D02
Received Date	May 04, 2016
Frequency Range	IEEE 802.11b/g, 802.11gn HT20 Mode: 2412MHz ~ 2462MHz IEEE 802.11gn HT40 Mode: 2422MHz ~ 2452MHz
Transmit Power	IEEE 802.11b Mode: 23.62 dBm (0.2301 W) IEEE 802.11g Mode: 28.93 dBm (0.7816 W) IEEE 802.11gn HT20 MCS0 Mode: 28.71 dBm (0.7430 W) IEEE 802.11gn HT40 MCS0 Mode: 27.83 dBm (0.6067 W)
Channel Spacing	5MHz
Channel Number	IEEE 802.11b/g, 802.11gn HT20 Mode: 11 Channels IEEE 802.11gn HT40 Mode: 7 Channels
Transmit Data Rate	IEEE 802.11b Mode: up to 11 Mbps IEEE 802.11g Mode: up to 54 Mbps IEEE 802.11gn HT20 Mode (800ns GI): up to 130.00 Mbps IEEE 802.11gn HT20 Mode (400ns GI): up to 144.40 Mbps IEEE 802.11gn HT40 Mode (800ns GI): up to 270.00 Mbps IEEE 802.11gn HT40 Mode (400ns GI): up to 300.00 Mbps
Type of Modulation	IEEE 802.11b Mode: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g Mode: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11gn HT20/40 Mode: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type	Chip Antenna × 2 Ant. 1 (Chain A), Antenna Gain: 1.5 dBi Ant. 2 (Chain B), Antenna Gain: 1.5 dBi
Power Rating	12Vdc
Test Voltage	120Vac, 60Hz
DC Power Cable Type	Non-shielded cable, 1.5 m (Non-detachable)
I/O Port	USB Port × 2, RJ-11 Port × 3, RJ-45 Port × 5, Power Port × 1

Power Adapter:

No.	Manufacturer	Model No.	Power Input	Power Output
1	Ktec	KSASB0241200200HU	100-240Vac, 50/60Hz, 0.6A	12Vdc, 2.0A

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. This submittal(s) (test report) is intended for FCC ID: T58DL4480VR filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

3. DESCRIPTION OF TEST MODES

The EUT (AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD) is an 802.11b/g/n transceiver.

IEEE 802.11b/g, 802.11gn HT20/HT40 Mode (2TX / 2RX) :

Ant.1 (Chain A) and Ant.2 (Chain B) transmit/receive.

Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test mode
1	TX Mode

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test mode		
Emission	Radiated Emission	Mode 1
	Conducted Emission	Mode 1

Remark: Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

Conducted / Radiated Emission Test (Above 1 GHz)

IEEE 802.11b/g, 802.11gn HT20 Mode:

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b Mode: 1Mbps data rate (worst case) was chosen for full testing.

IEEE 802.11g Mode: 6Mbps data rate (worst case) was chosen for full testing.

IEEE 802.11gn HT20 MCS0 Mode: 6.5Mbps data rate (worst case) was chosen for full testing.

IEEE 802.11gn HT40 Mode:

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11gn HT40 MCS0 Mode: 13.5Mbps data rate (worst case) was chosen for full testing.

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10:2013 and FCC CFR 47, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
No.989-1, Wenshan Rd., Shangshan Village,
Qionglin Township, Hsinchu County 30741, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.10:2013 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4 and CISPR 16-1-5.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	INDUSTRY CANADA
Japan	VCCI
Taiwan	BSMI
USA	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

Remark: FCC Designation Number TW1027.

5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_C) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_C) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_C) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_C) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.
1	Notebook PC	HP	ProBook 4421s	CNF03242PJ

No.	Signal Cable Description
1	Non-shielded RJ-45 cable, 12m × 1

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

1. EUT & peripherals setup diagram is shown in appendix setup photos.

2. TX mode:

- ⇒ **Data Rate:** 1Mbps Bandwidth 20 (IEEE 802.11b Mode)
- 6Mbps Bandwidth 20 (IEEE 802.11g Mode)
- 6.5Mbps Bandwidth 20 (IEEE 802.11gn HT20 MCS0 Mode)
- 13.5Mbps Bandwidth 40 (IEEE 802.11gn HT40 MCS0 Mode)

⇒ **Power control**

Mode	Channel	Frequency (MHz)	Chain	Power Set
IEEE 802.11b	Low	2412	A/B	32/31
	Middle	2437	A/B	37/36
	High	2462	A/B	43/42
IEEE 802.11g	Low	2412	A/B	50/49
	Middle	2437	A/B	59/58
	High	2462	A/B	52/51
IEEE 802.11gn HT20 MCS0	Low	2412	A/B	48/46
	Middle	2437	A/B	58/57
	High	2462	A/B	50/48
IEEE 802.11gn HT40 MCS0	Low	2422	A/B	47/46
	Middle	2437	A/B	52/51
	High	2452	A/B	50/48

3. All of the functions are under run.

4. Start test.

7. FCC PART 15.247 REQUIREMENTS

7.1 DUTY CYCLE CORRECTION FACTOR

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Crystal Wu
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	TX Mode	Temp. & Humidity	27°C, 58%

Mode	TX on (ms)	TX on + off (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
IEEE 802.11b	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11g	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11gn HT20	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11gn HT40	1.000	1.000	100.00%	0.00	0.010

7.2 6dB BANDWIDTH

LIMITS

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/15/2017
Test S/W	N/A			

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The transmitter output was connected to a spectrum analyzer.
2. Set RBW = 100 kHz.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST RESULTS

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Crystal Wu
Test Model	DL4480V	Test Date	2016/06/23
Test Mode	TX Mode	Temp. & Humidity	27°C, 58%

IEEE 802.11b Mode (2TX)

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Result
		Chain A	Chain B		
Low	2412	10.03	10.01	500	PASS
Middle	2437	10.01	10.07	500	PASS
High	2462	10.06	10.06	500	PASS

IEEE 802.11g Mode (2TX)

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Result
		Chain A	Chain B		
Low	2412	16.56	16.53	500	PASS
Middle	2437	16.53	16.50	500	PASS
High	2462	16.55	16.54	500	PASS

IEEE 802.11gn HT20 MCS0 Mode (2TX)


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Result
		Chain A	Chain B		
Low	2412	17.80	17.82	500	PASS
Middle	2437	17.81	17.80	500	PASS
High	2462	17.81	17.84	500	PASS

IEEE 802.11gn HT40 MCS0 Mode (2TX)


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Result
		Chain A	Chain B		
Low	2422	36.41	36.42	500	PASS
Middle	2437	36.37	36.41	500	PASS
High	2452	36.38	36.40	500	PASS

6dB BANDWIDTH


CH Low (IEEE 802.11b Mode / Chain A)

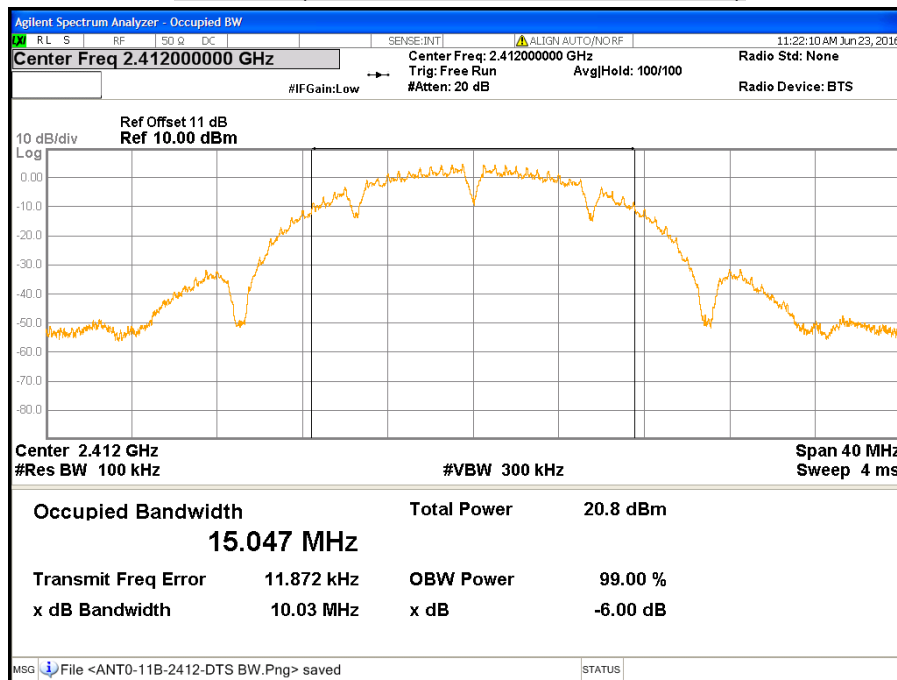


CH Middle (IEEE 802.11b Mode / Chain A)

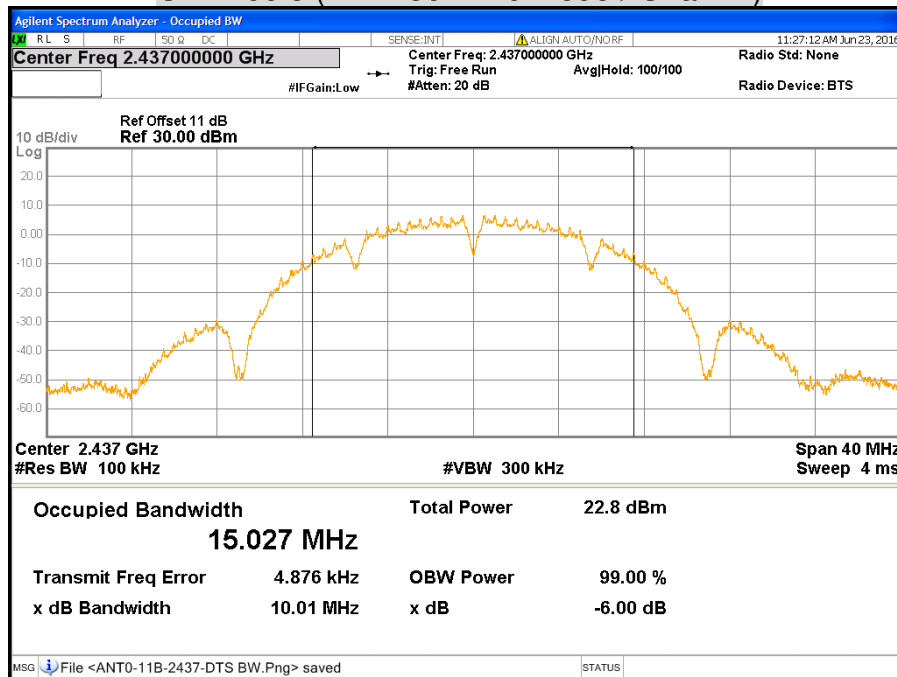


CH High (IEEE 802.11b Mode / Chain A)

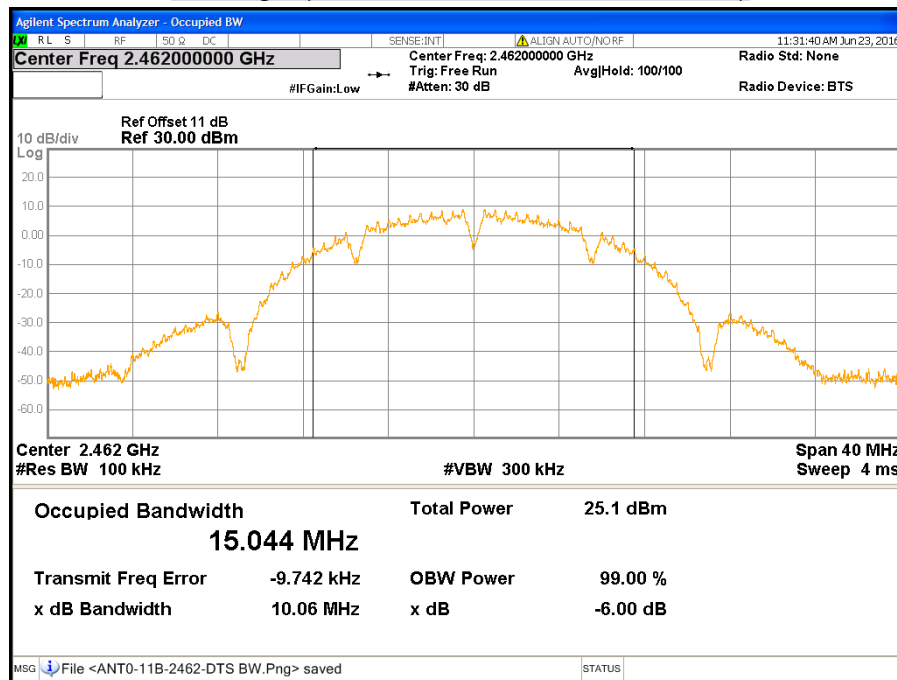


CH Low (IEEE 802.11b Mode / Chain B)

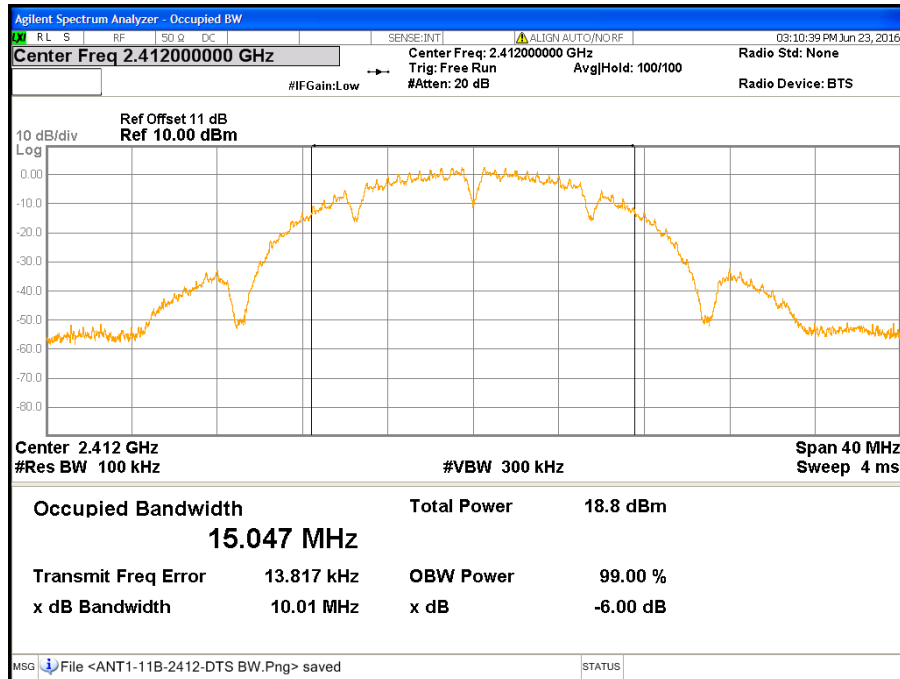


CH Middle (IEEE 802.11b Mode / Chain B)

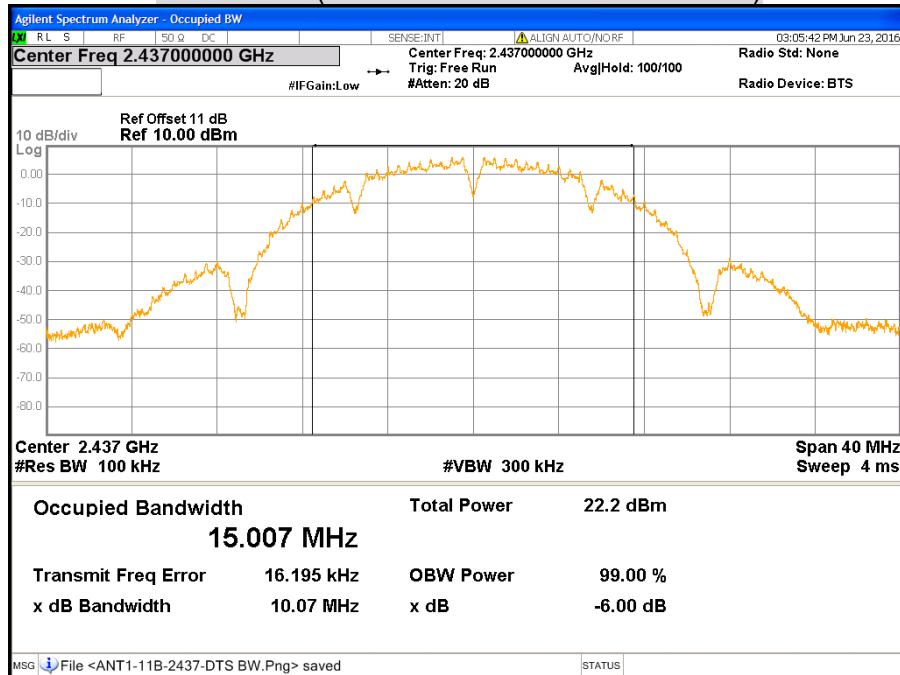


CH High (IEEE 802.11b Mode / Chain B)

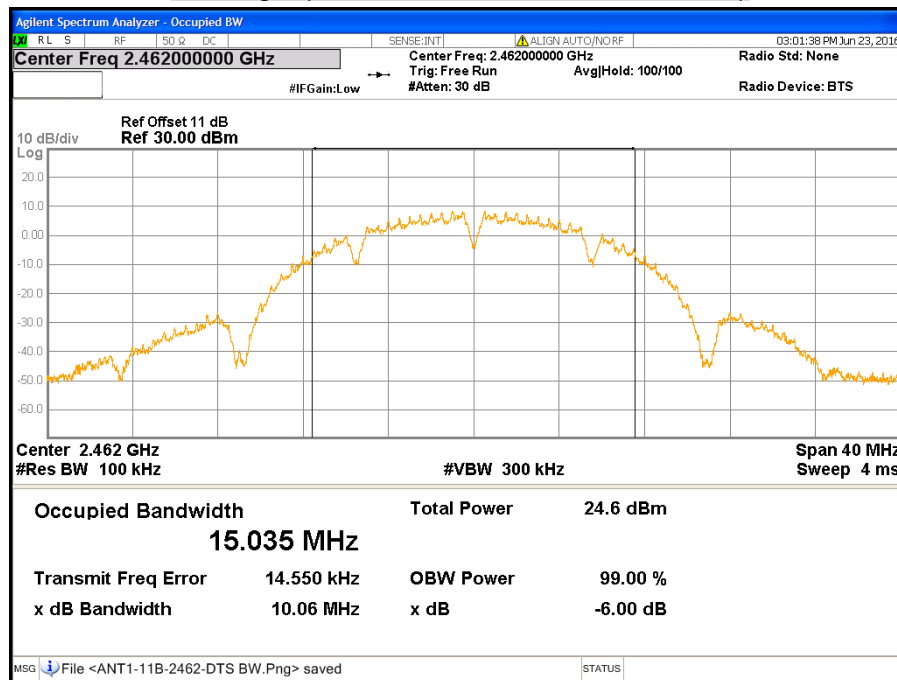


CH Low (IEEE 802.11g Mode / Chain A)

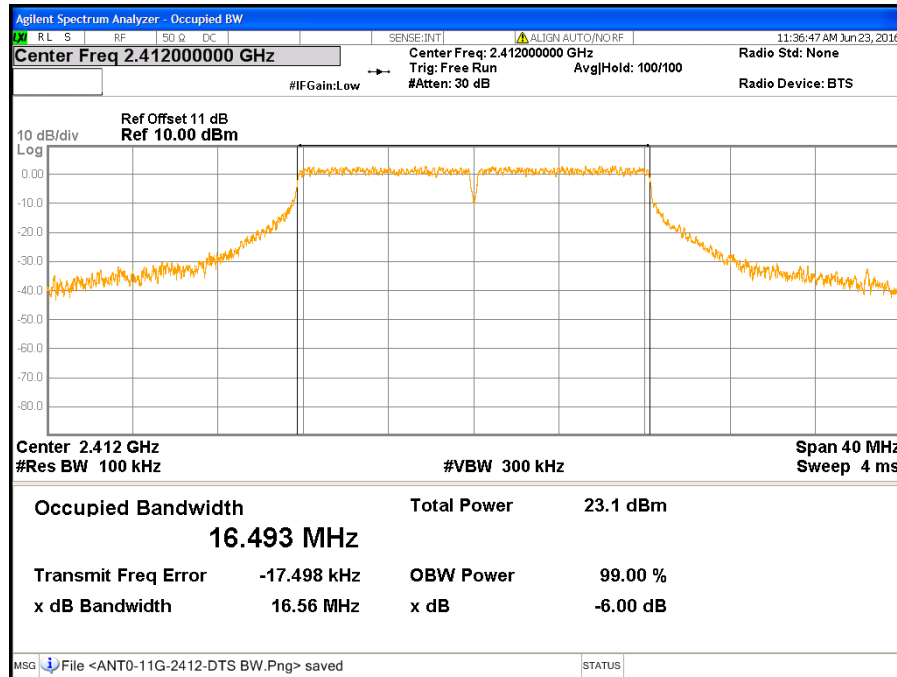


CH Middle (IEEE 802.11g Mode / Chain A)

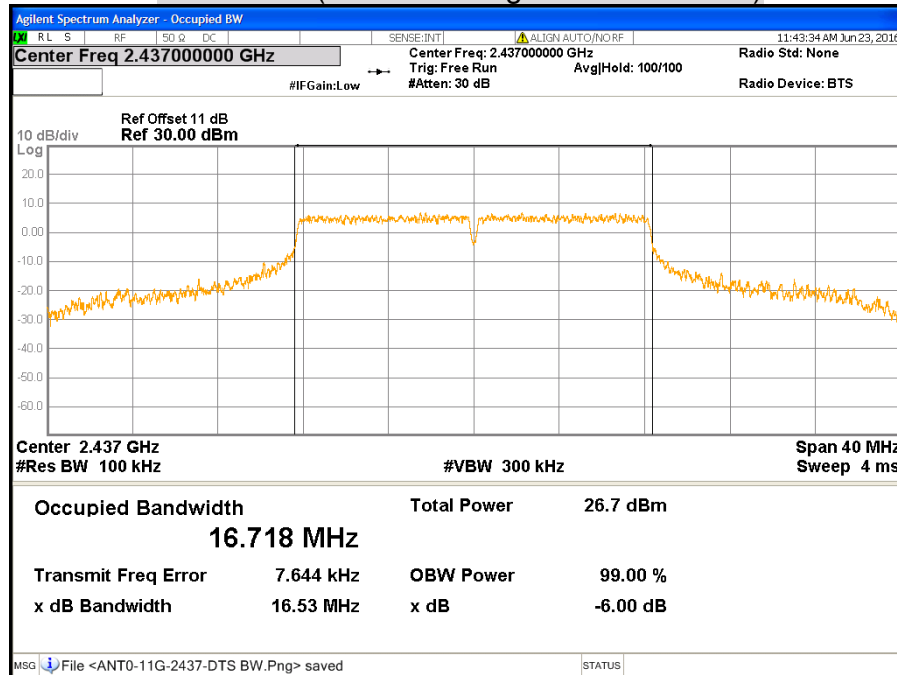


CH High (IEEE 802.11g Mode / Chain A)

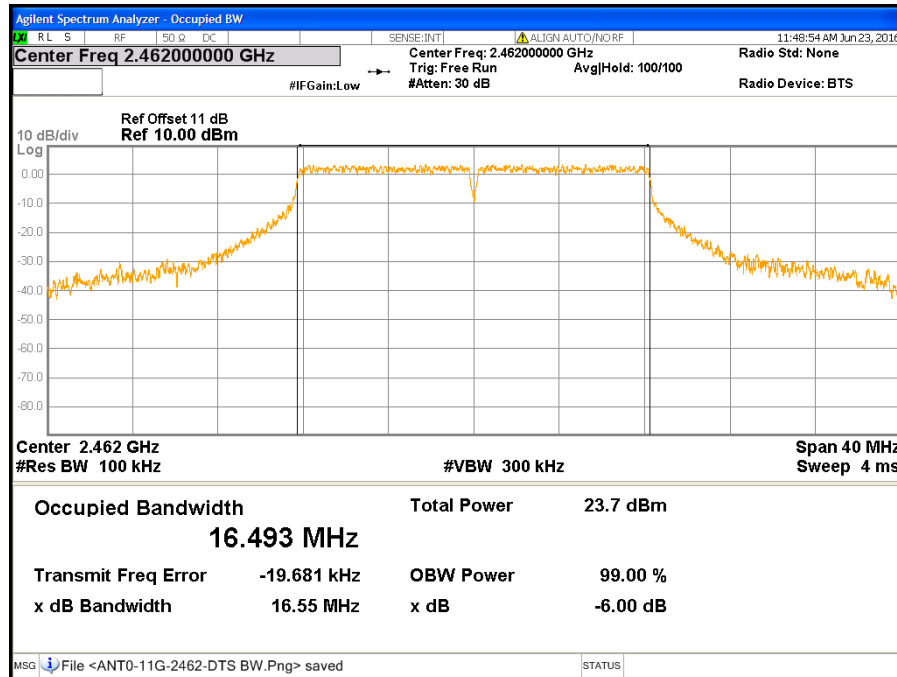


CH Low (IEEE 802.11g Mode / Chain B)

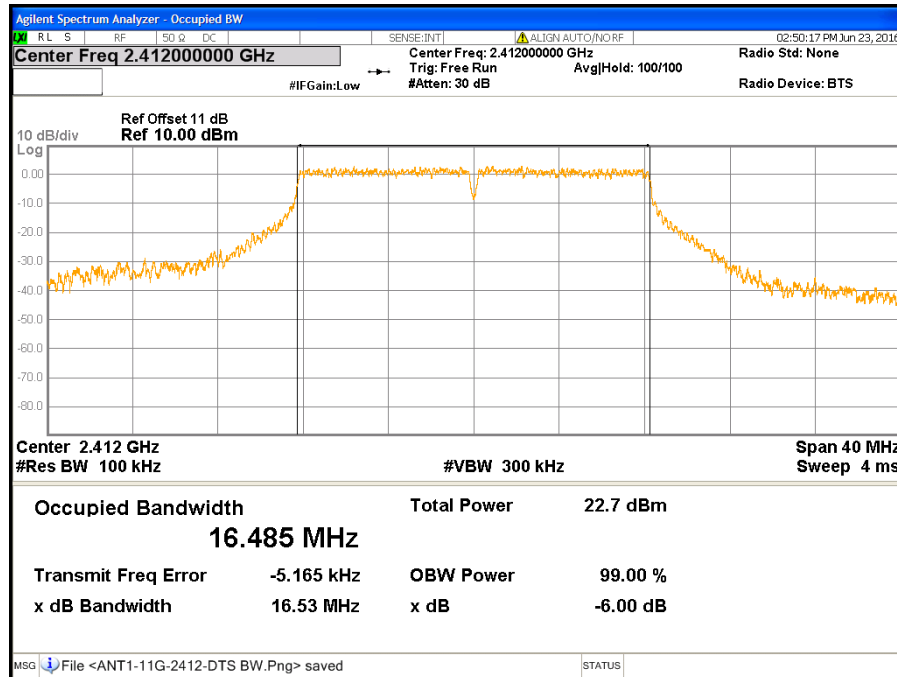


CH Middle (IEEE 802.11g Mode / Chain B)

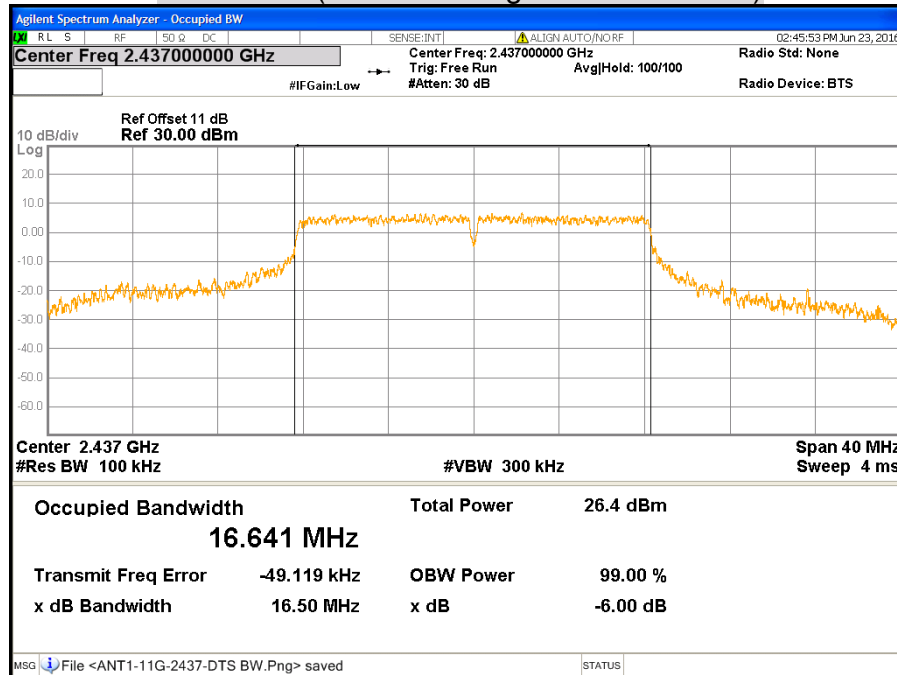


CH High (IEEE 802.11g Mode / Chain B)

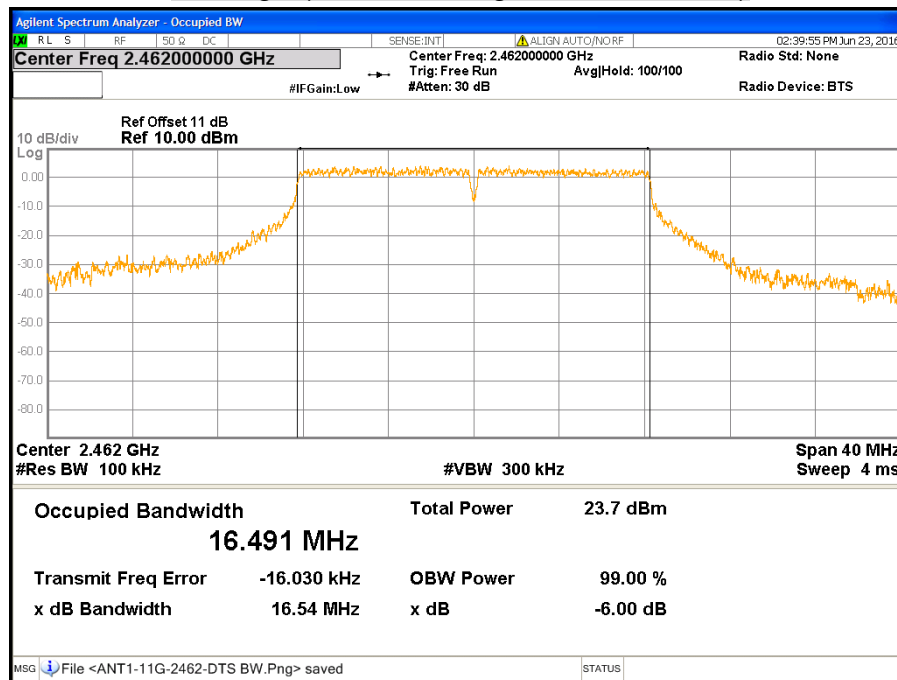


CH Low (IEEE 802.11gn HT20 MCS0 Mode / Chain A)

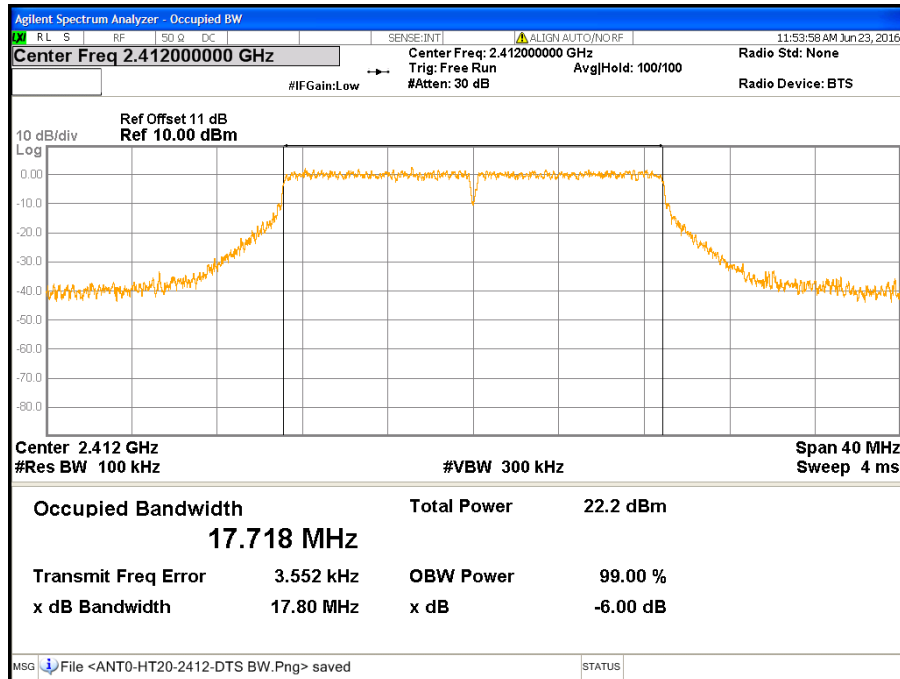


CH Middle (IEEE 802.11gn HT20 MCS0 Mode / Chain A)

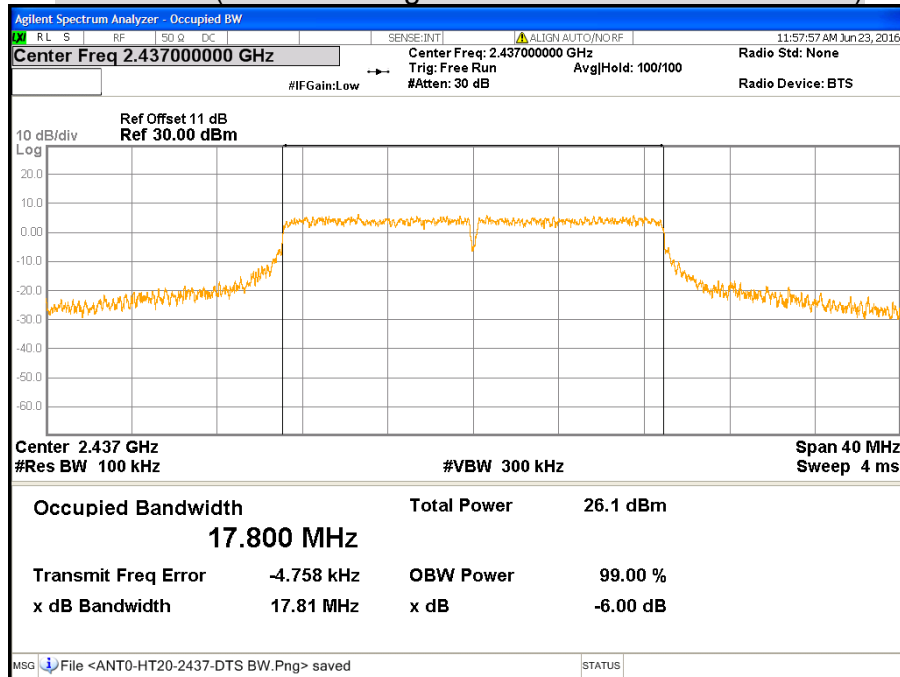


CH High (IEEE 802.11gn HT20 MCS0 Mode / Chain A)

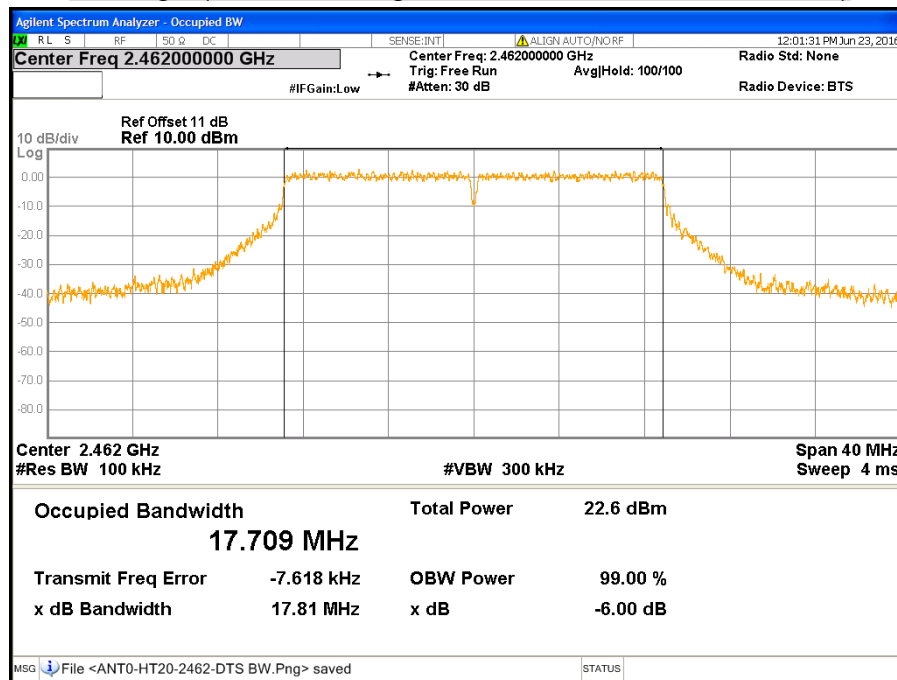


CH Low (IEEE 802.11gn HT20 MCS0 Mode / Chain B)

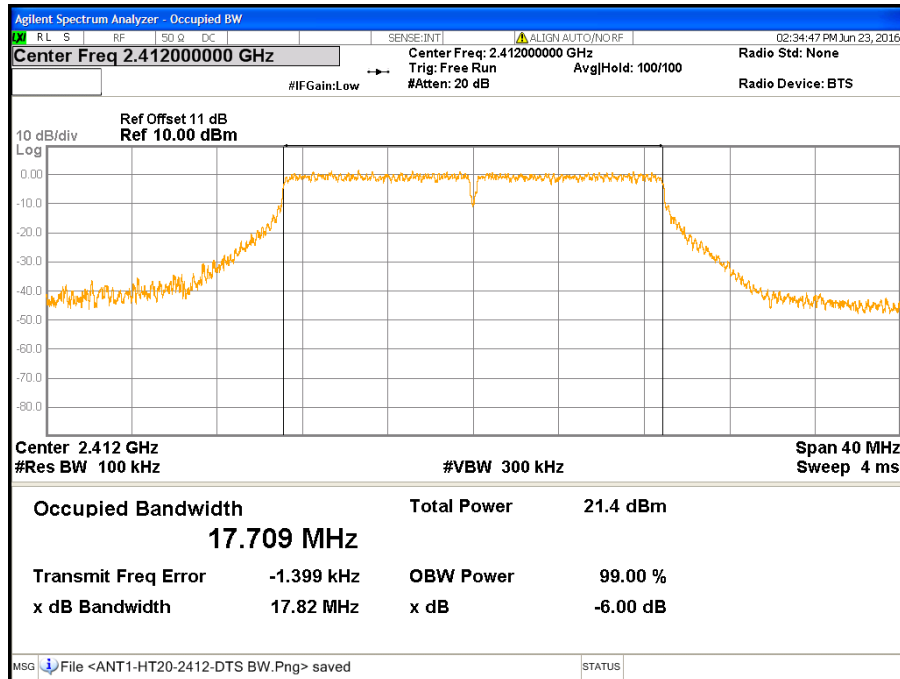


CH Middle (IEEE 802.11gn HT20 MCS0 Mode / Chain B)

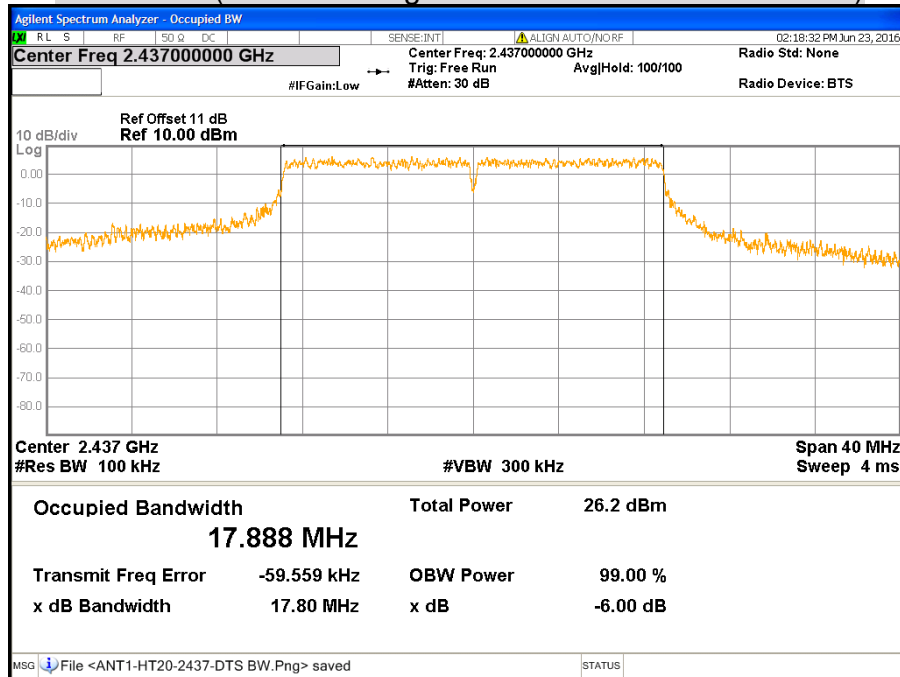


CH High (IEEE 802.11gn HT20 MCS0 Mode / Chain B)

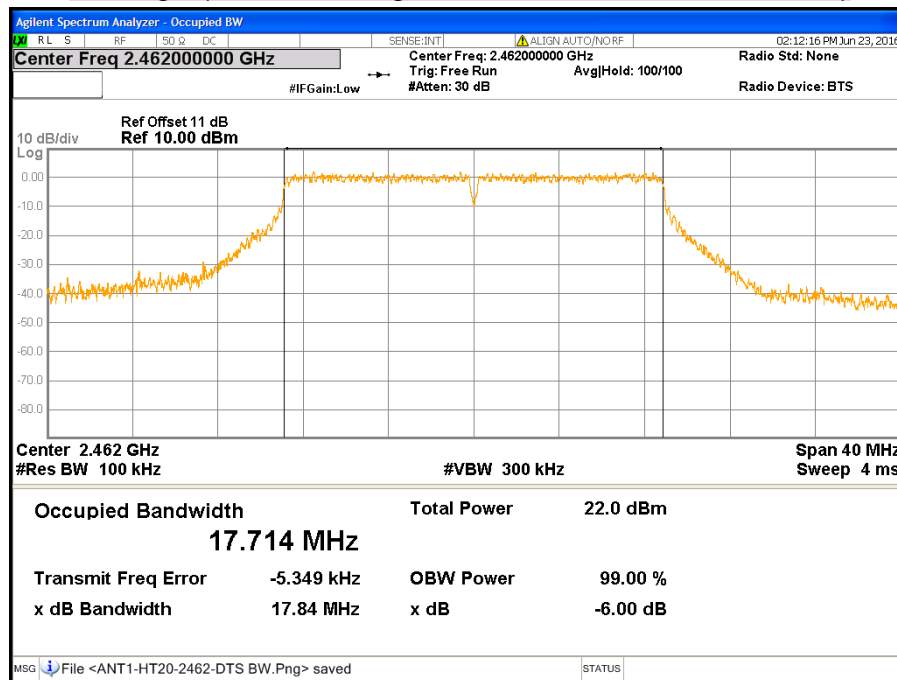


CH Low (IEEE 802.11gn HT40 MCS0 Mode / Chain A)

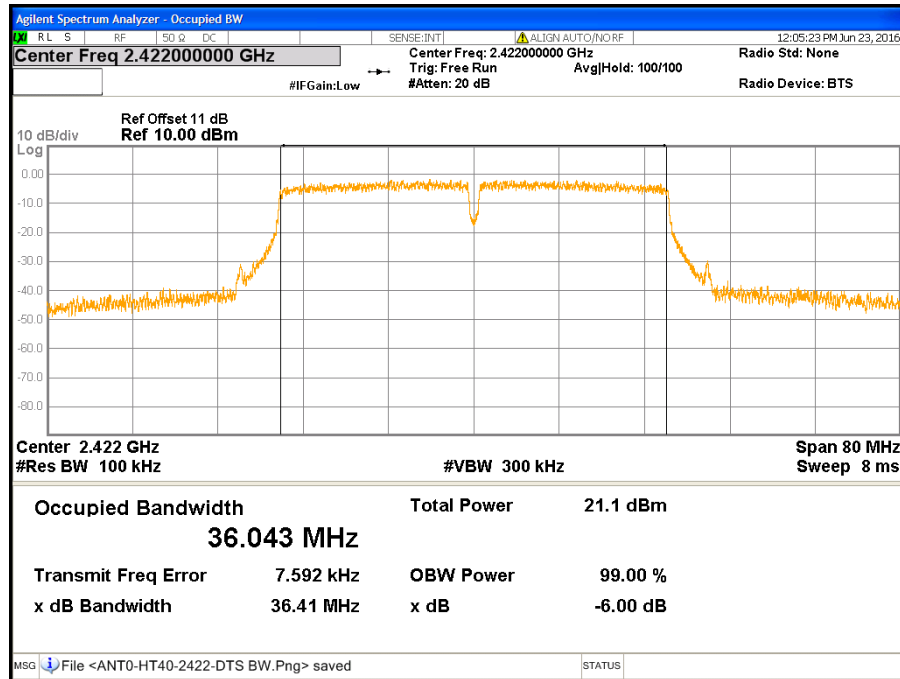


CH Middle (IEEE 802.11gn HT40 MCS0 Mode / Chain A)

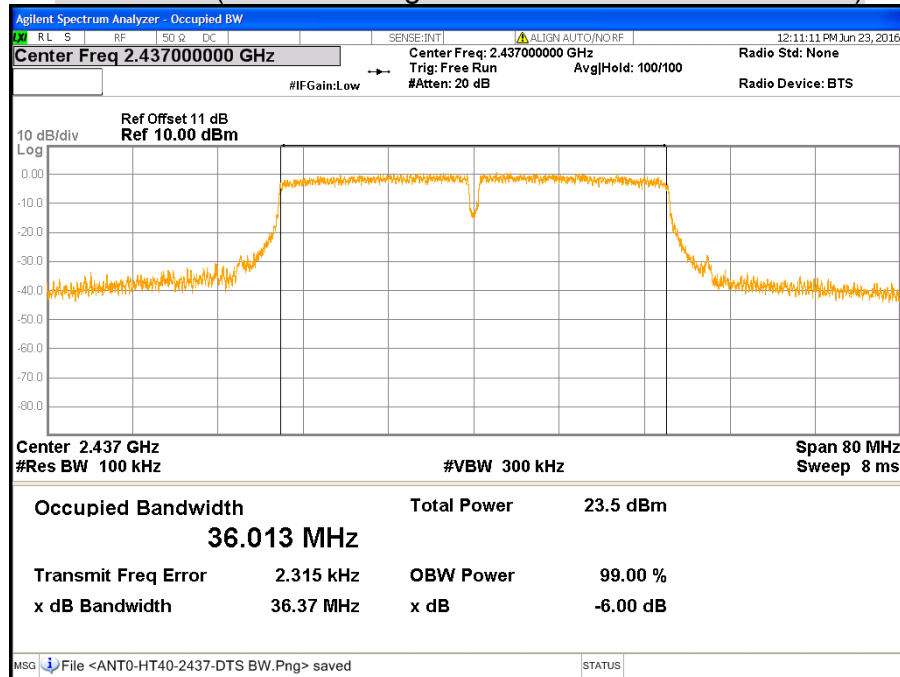


CH High (IEEE 802.11gn HT40 MCS0 Mode / Chain A)

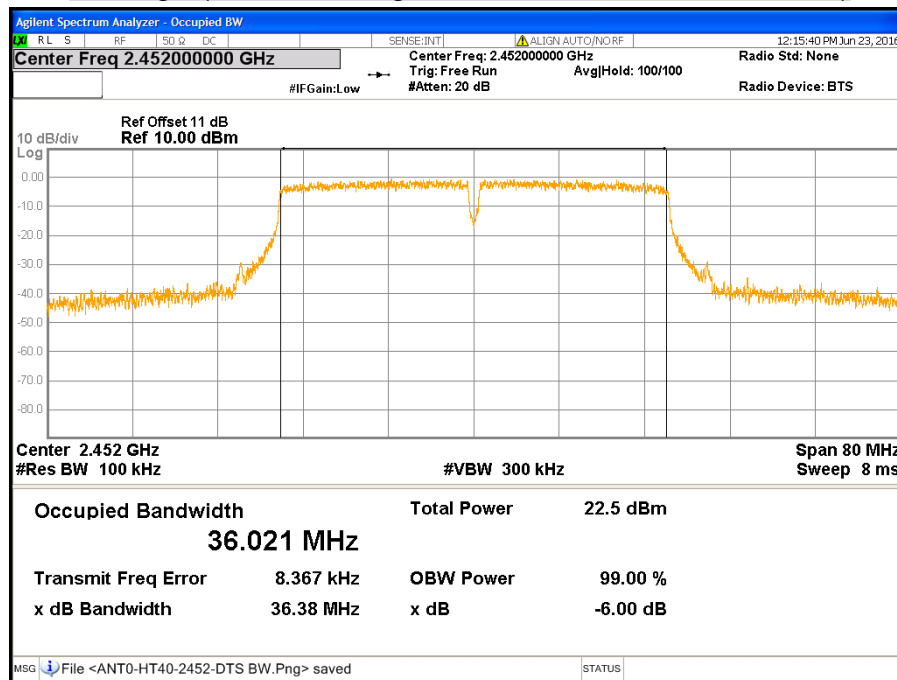


CH Low (IEEE 802.11gn HT40 MCS0 Mode / Chain B)

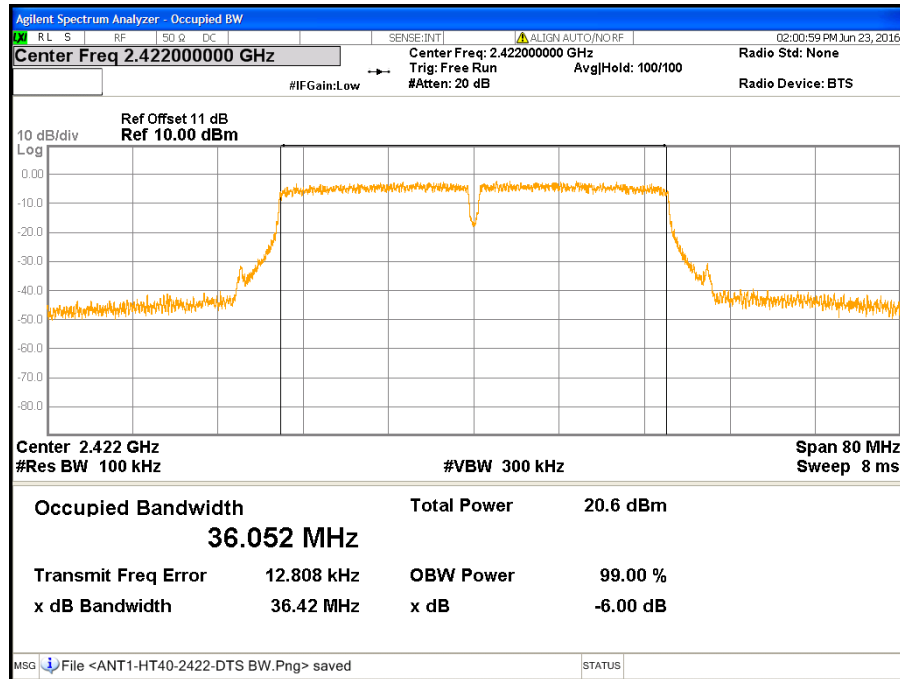

CH Middle (IEEE 802.11gn HT40 MCS0 Mode / Chain B)

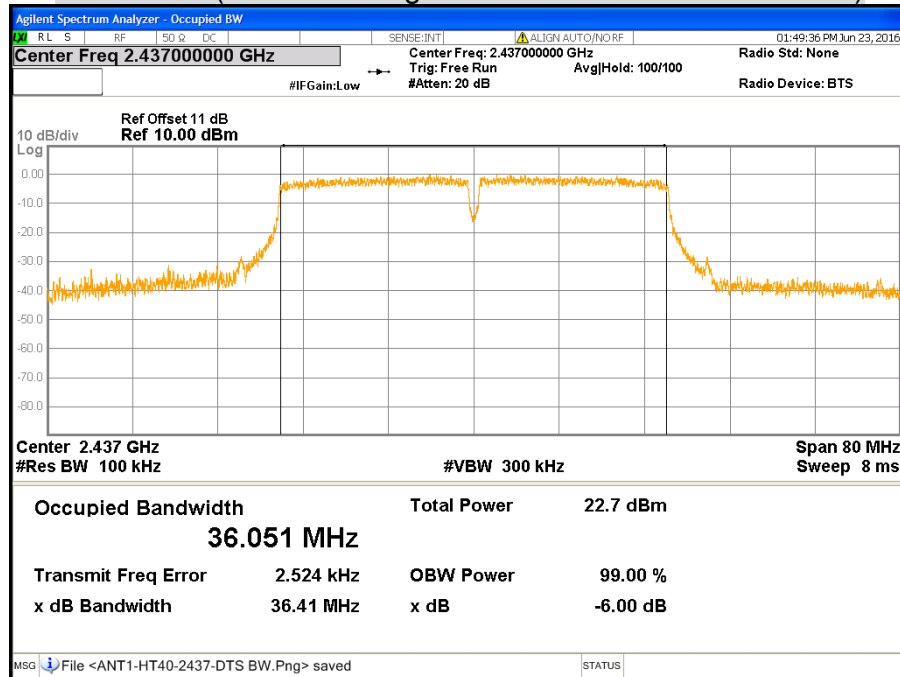

CH High (IEEE 802.11gn HT40 MCS0 Mode / Chain B)

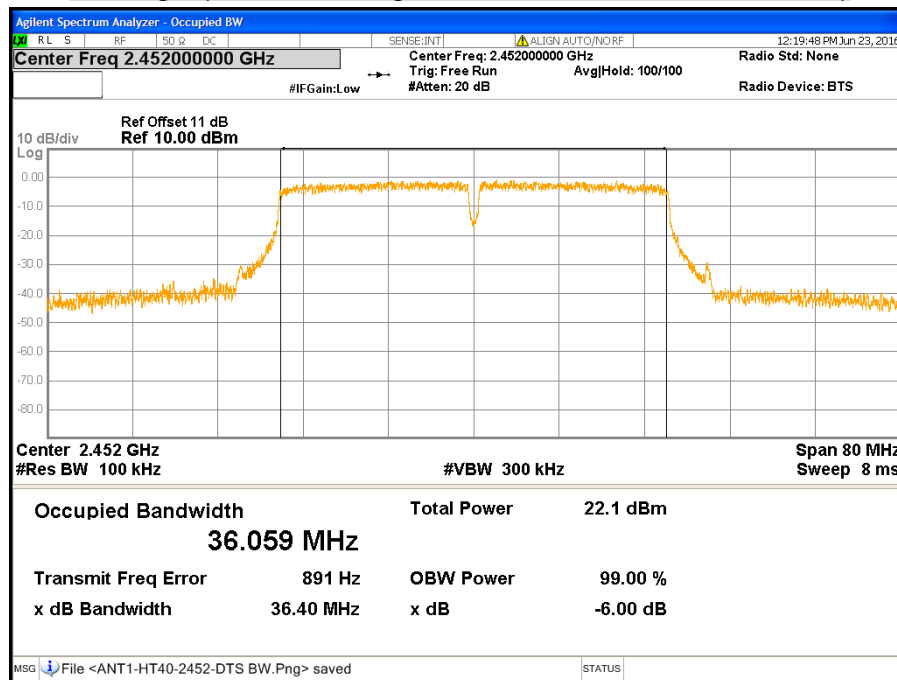

7.3 MAXIMUM PEAK OUTPUT POWER

LIMITS

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following:

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§ KDB 662911:

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream:

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain; or,


$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1149001	12/08/2016
Power Sensor	Anritsu	MA2411B	1126148	12/08/2016
Test S/W	N/A			

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

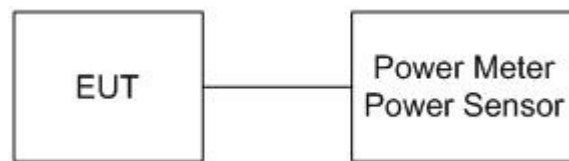

TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the peak power detection.

TEST RESULTS

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Crystal Wu
Test Model	DL4480V	Test Date	2016/06/23
Test Mode	TX Mode	Temp. & Humidity	27°C, 58%

IEEE 802.11b Mode (2TX)

Channel	Channel Frequency (MHz)	Maximum Peak Output Power						Result
		Chain A	Chain B	Total		Limit		
		(dBm)	(dBm)	(dBm)	(W)	(dBm)	(W)	
Low	2412	16.01	15.62	18.83	0.0764	30	1.000	PASS
Middle	2437	18.28	18.40	21.35	0.1365	30	1.000	PASS
High	2462	20.59	20.63	23.62	0.2301	30	1.000	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.
3. Total peak power = Chain A + Chain B.
4. The maximum antenna gain is 1.5 dBi which is less than 6dBi, the limit should be 30 dBm.

IEEE 802.11g Mode (2TX)

Channel	Channel Frequency (MHz)	Maximum Peak Output Power						Result
		Chain A	Chain B	Total		Limit		
		(dBm)	(dBm)	(dBm)	(W)	(dBm)	(W)	
Low	2412	25.50	25.51	28.52	0.7112	30	1.000	PASS
Middle	2437	26.02	25.81	28.93	0.7816	30	1.000	PASS
High	2462	24.94	25.19	28.08	0.6427	30	1.000	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.
3. Total peak power = Chain A + Chain B.
4. The maximum antenna gain is 1.5 dBi which is less than 6dBi, the limit should be 30 dBm.

IEEE 802.11gn HT20 MCS0 Mode (2TX)

Channel	Channel Frequency (MHz)	Maximum Peak Output Power						Result
		Chain A	Chain B	Total		Limit		
		(dBm)	(dBm)	(dBm)	(W)	(dBm)	(W)	
Low	2412	24.47	24.10	27.30	0.5370	30	1.000	PASS
Middle	2437	25.78	25.61	28.71	0.7430	30	1.000	PASS
High	2462	24.46	24.44	27.46	0.5572	30	1.000	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.
3. Total peak power = Chain A + Chain B.
4. The maximum antenna gain is 1.5 dBi which is less than 6dBi, the limit should be 30 dBm.

IEEE 802.11gn HT40 MCS0 Mode (2TX)

Channel	Channel Frequency (MHz)	Maximum Peak Output Power						Result
		Chain A	Chain B	Total		Limit		
		(dBm)	(dBm)	(dBm)	(W)	(dBm)	(W)	
Low	2422	23.61	23.11	26.38	0.4345	30	1.000	PASS
Middle	2437	24.59	25.04	27.83	0.6067	30	1.000	PASS
High	2452	24.25	23.96	27.12	0.5152	30	1.000	PASS

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.
3. Total peak power = Chain A + Chain B.
4. The maximum antenna gain is 1.5 dBi which is less than 6dBi, the limit should be 30 dBm.

7.4 AVERAGE POWER

LIMITS

None: For reporting purposes only.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1149001	12/08/2016
Power Sensor	Anritsu	MA2411B	1126148	12/08/2016
Test S/W	N/A			

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to the average power detection.

TEST RESULTS

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Crystal Wu
Test Model	DL4480V	Test Date	2016/06/23
Test Mode	TX Mode	Temp. & Humidity	27°C, 58%

IEEE 802.11b Mode (2TX)

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain A	Chain B
Low	2412	13.88	13.42
Middle	2437	16.21	16.33
High	2462	18.55	18.65

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g Mode (2TX)

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain A	Chain B
Low	2412	17.49	17.51
Middle	2437	20.73	20.62
High	2462	17.84	17.79

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11gn HT20 MCS0 Mode (2TX)

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain A	Chain B
Low	2412	16.71	16.53
Middle	2437	20.27	19.98
High	2462	16.99	16.66

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11gn HT40 MCS0 Mode (2TX)

Channel	Channel Frequency (MHz)	Average Power (dBm)	
		Chain A	Chain B
Low	2422	15.31	15.18
Middle	2437	17.53	17.71
High	2452	16.54	16.19

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

7.5 POWER SPECTRAL DENSITY

LIMITS

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

§ KDB 662911:

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream:

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain; or,


$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/15/2017
Test S/W	N/A			

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

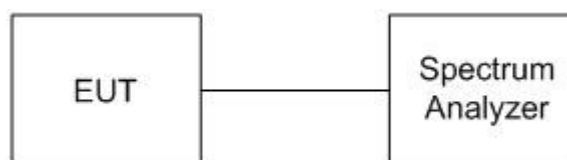

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set analyzer center frequency to DTS channel center frequency.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
5. Set the VBW $\geq 3 \times \text{RBW}$.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Crystal Wu
Test Model	DL4480V	Test Date	2016/06/23
Test Mode	TX Mode	Temp. & Humidity	27°C, 58%

IEEE 802.11b Mode (2TX)

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)				Result
		Chain A	Chain B	Total	Limit	
Low	2412	-5.85	-7.73	-3.68	8	PASS
Middle	2437	-3.73	-4.40	-1.04	8	PASS
High	2462	-1.45	-1.98	1.30	8	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. Total power spectral density = Chain A + Chain B.
4. The directional gain is 4.51 dBi which is less than 6dBi, the limit should be 8 dBm.

IEEE 802.11g Mode (2TX)

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)				Result
		Chain A	Chain B	Total	Limit	
Low	2412	-4.80	-4.90	-1.84	8	PASS
Middle	2437	-1.23	-1.56	1.62	8	PASS
High	2462	-4.25	-4.07	-1.15	8	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. Total power spectral density = Chain A + Chain B.
4. The directional gain is 4.51 dBi which is less than 6dBi, the limit should be 8 dBm.

IEEE 802.11gn HT20 MCS0 Mode (2TX)

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)				Result
		Chain A	Chain B	Total	Limit	
Low	2412	-4.72	-5.48	-2.07	8	PASS
Middle	2437	-0.81	-0.84	2.19	8	PASS
High	2462	-4.29	-4.89	-1.57	8	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. Total power spectral density = Chain A + Chain B.
4. The directional gain is 4.51 dBi which is less than 6dBi, the limit should be 8 dBm.

IEEE 802.11gn HT40 MCS0 Mode (2TX)


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)				Result
		Chain A	Chain B	Total	Limit	
Low	2422	-7.95	-10.05	-5.87	8	PASS
Middle	2437	-6.01	-7.44	-3.65	8	PASS
High	2452	-7.63	-7.67	-4.64	8	PASS

Remark:


1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. Total power spectral density = Chain A + Chain B.
4. The directional gain is 4.51 dBi which is less than 6dBi, the limit should be 8 dBm.

POWER SPECTRAL DENSITY


CH Low (IEEE 802.11b Mode / Chain A)

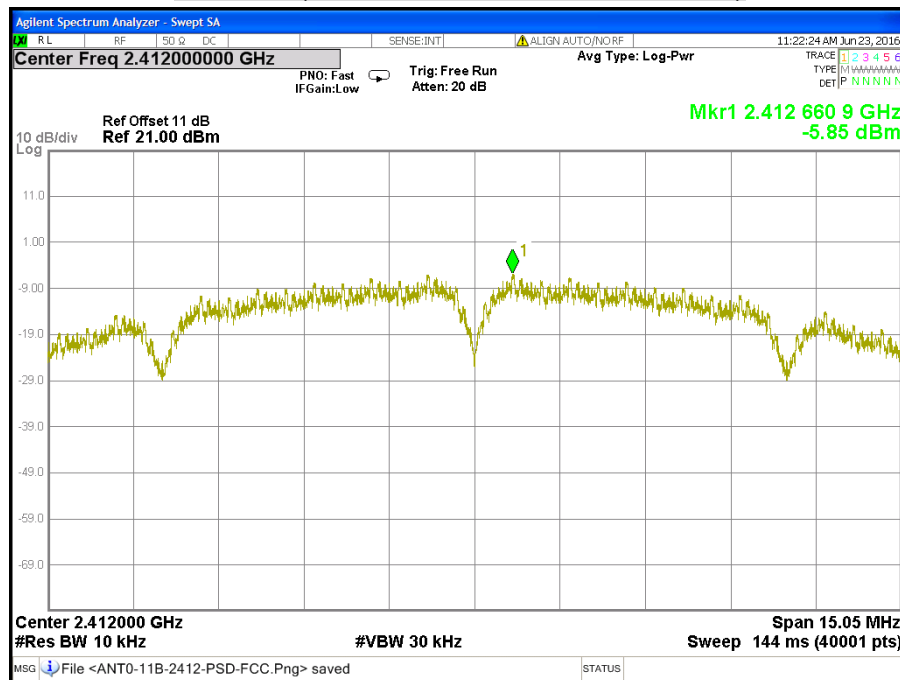


CH Middle (IEEE 802.11b Mode / Chain A)

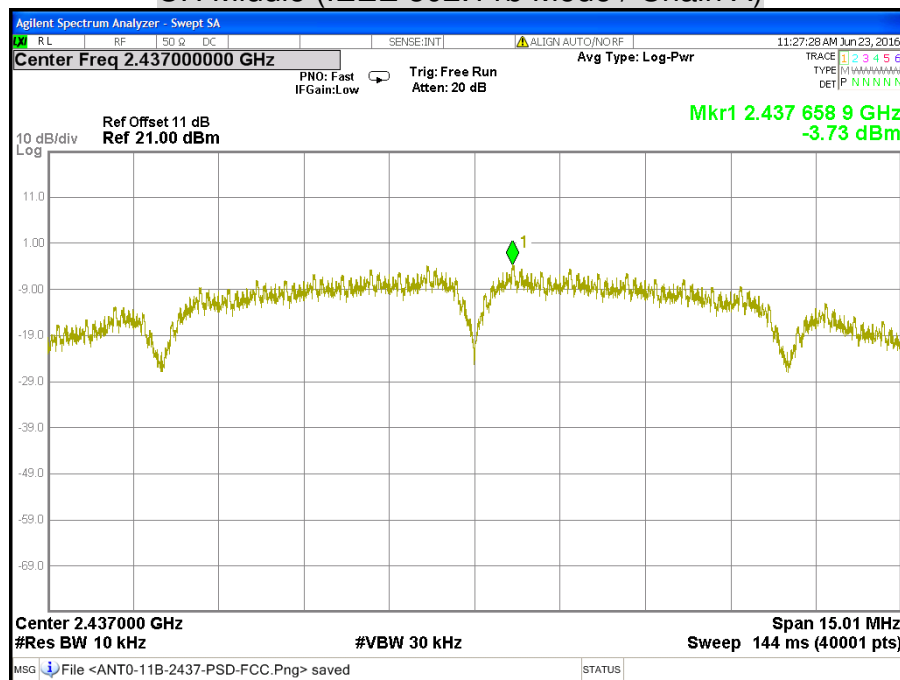


CH High (IEEE 802.11b Mode / Chain A)

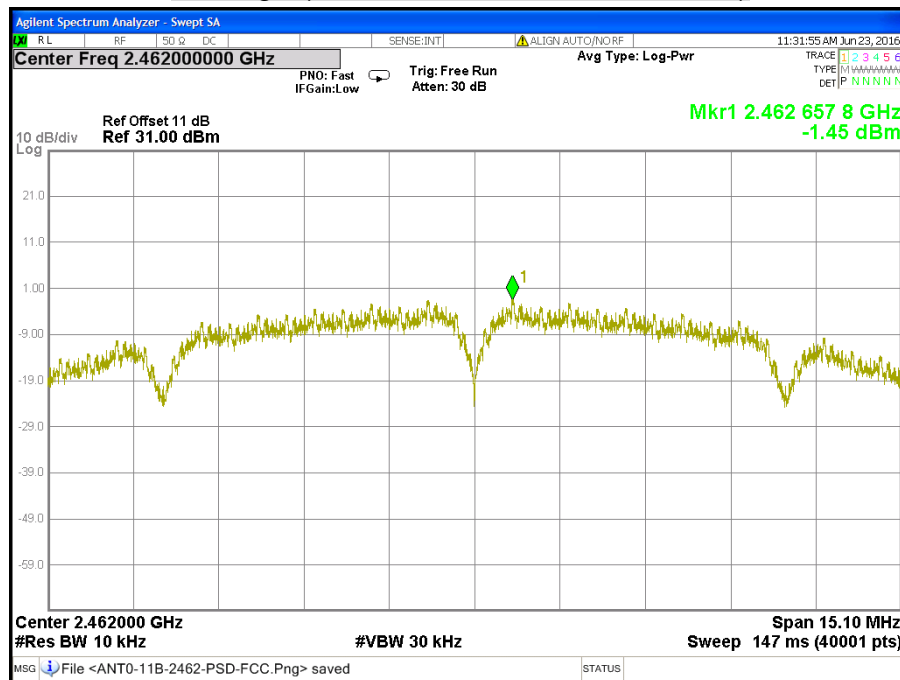


CH Low (IEEE 802.11b Mode / Chain B)

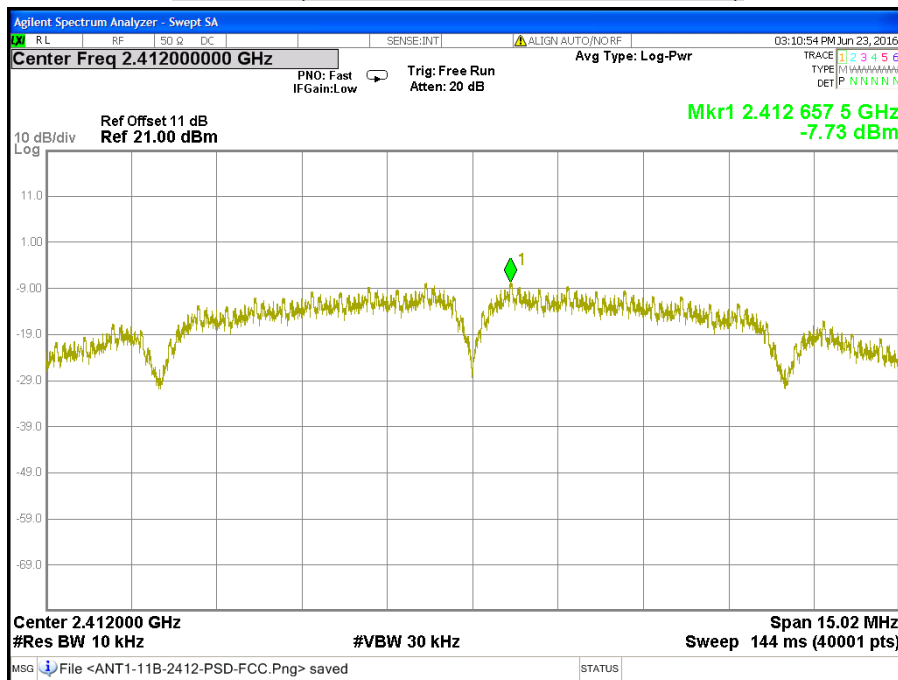


CH Middle (IEEE 802.11b Mode / Chain B)

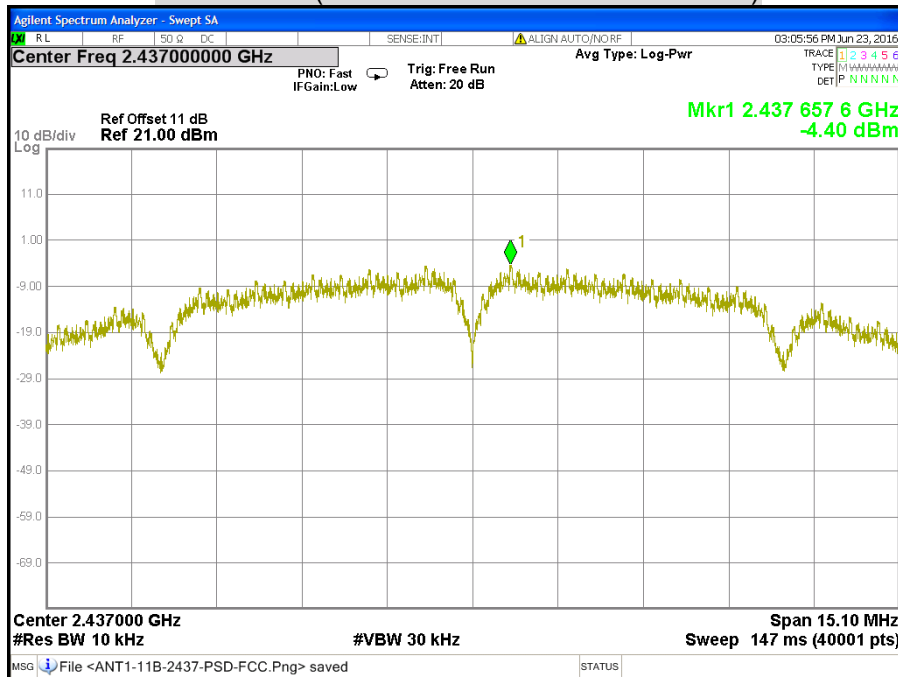


CH High (IEEE 802.11b Mode / Chain B)

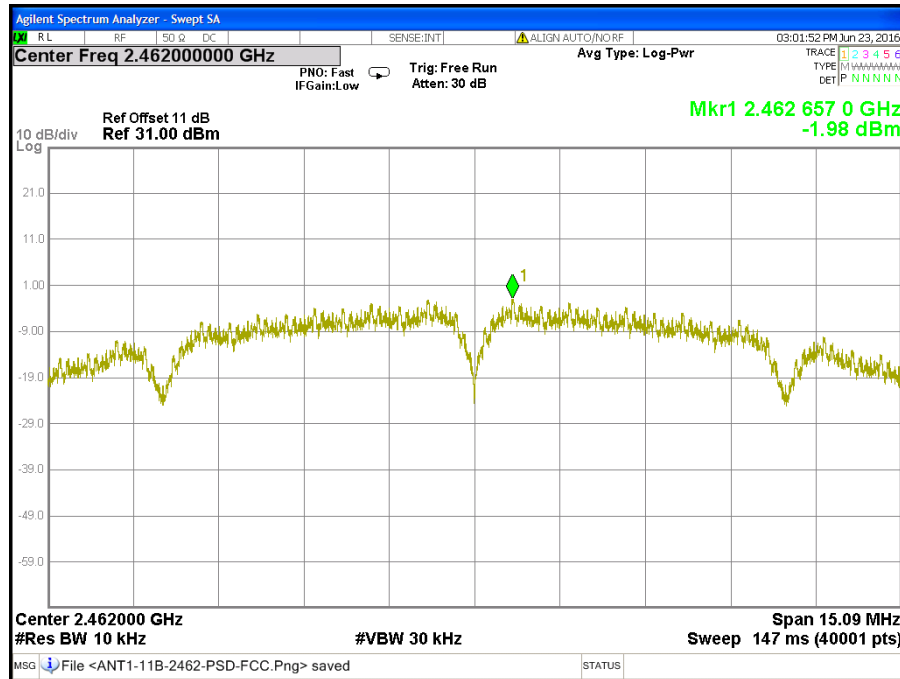


CH Low (IEEE 802.11g Mode / Chain A)

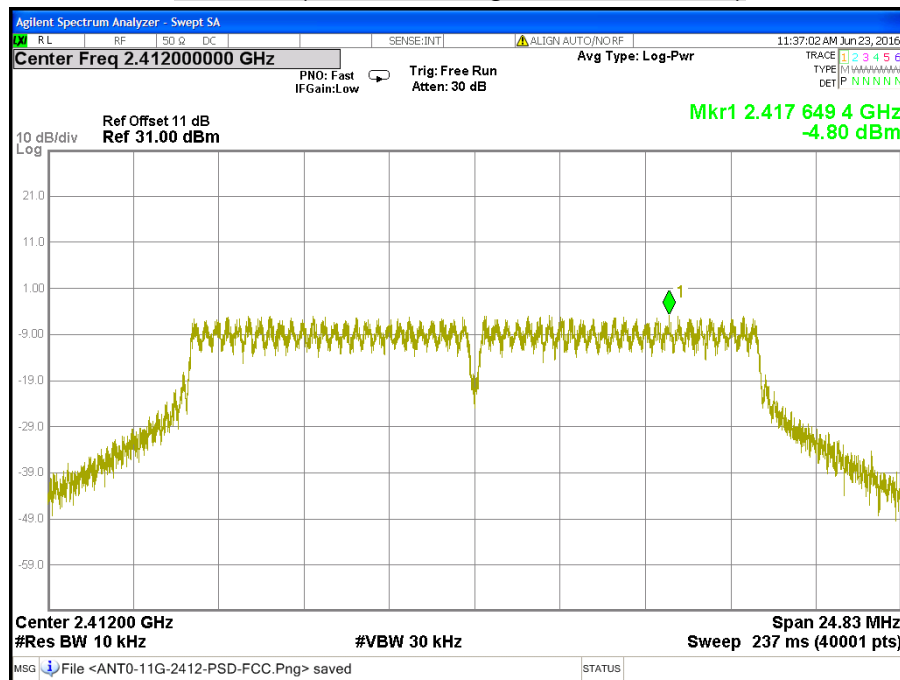


CH Middle (IEEE 802.11g Mode / Chain A)

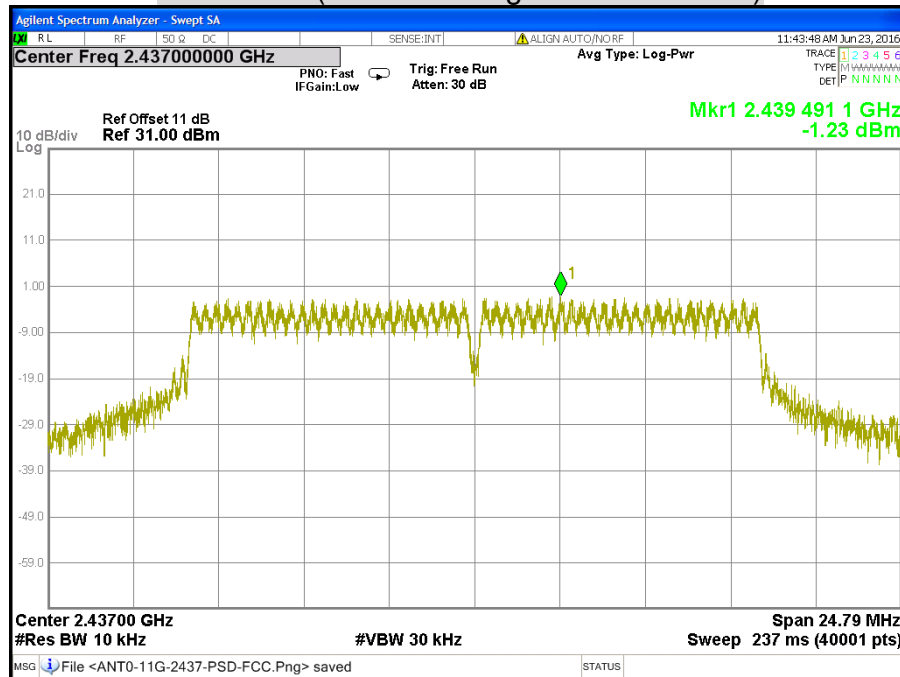


CH High (IEEE 802.11g Mode / Chain A)

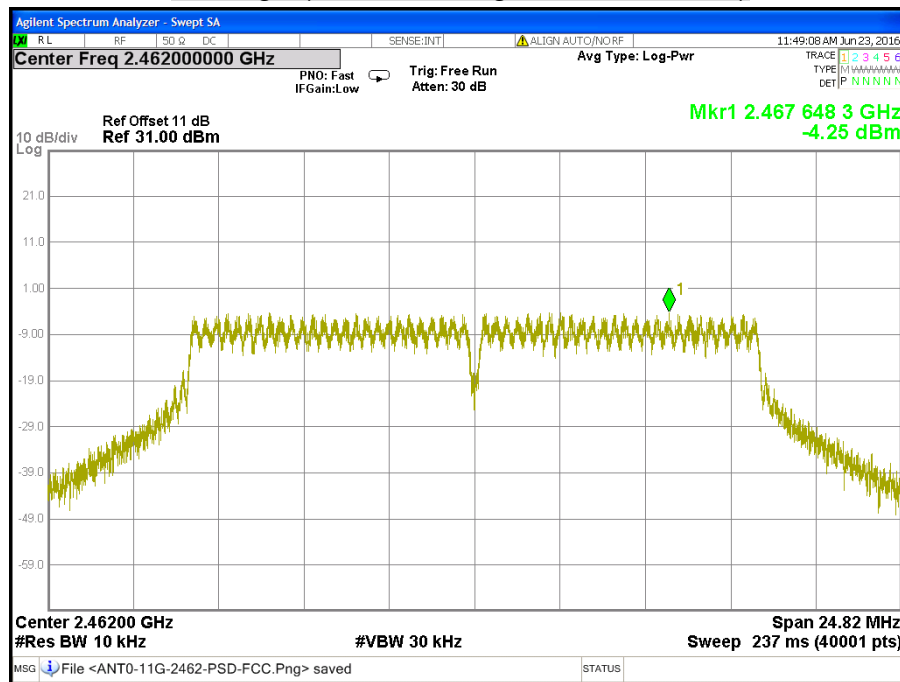


CH Low (IEEE 802.11g Mode / Chain B)

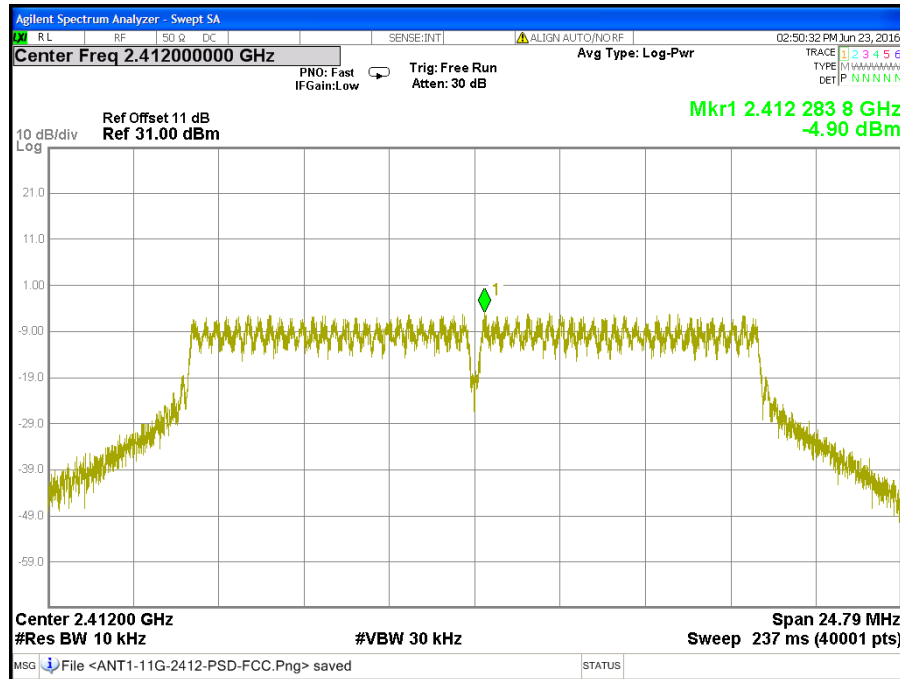


CH Middle (IEEE 802.11g Mode / Chain B)

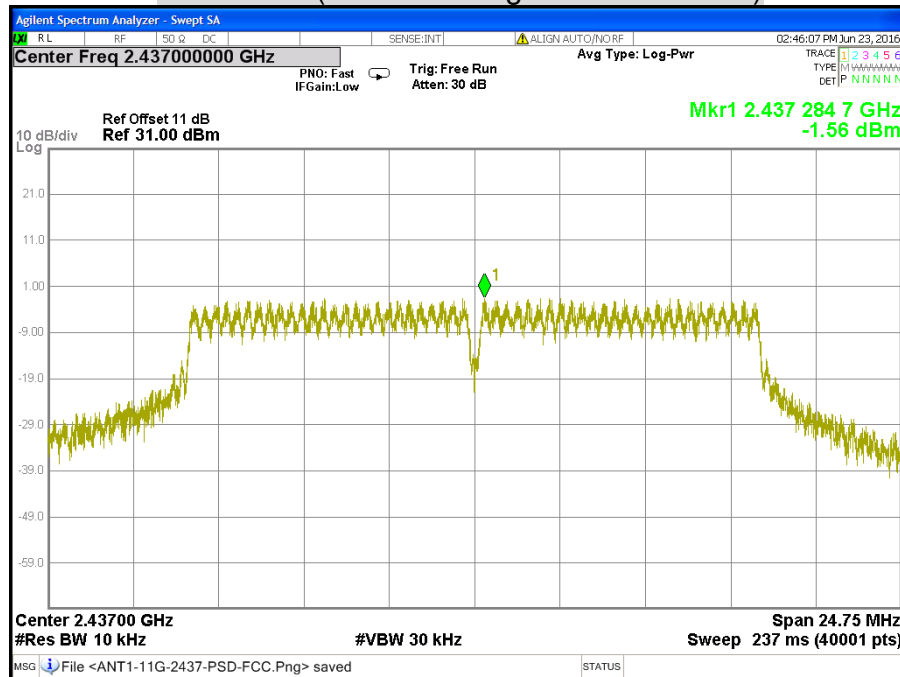


CH High (IEEE 802.11g Mode / Chain B)

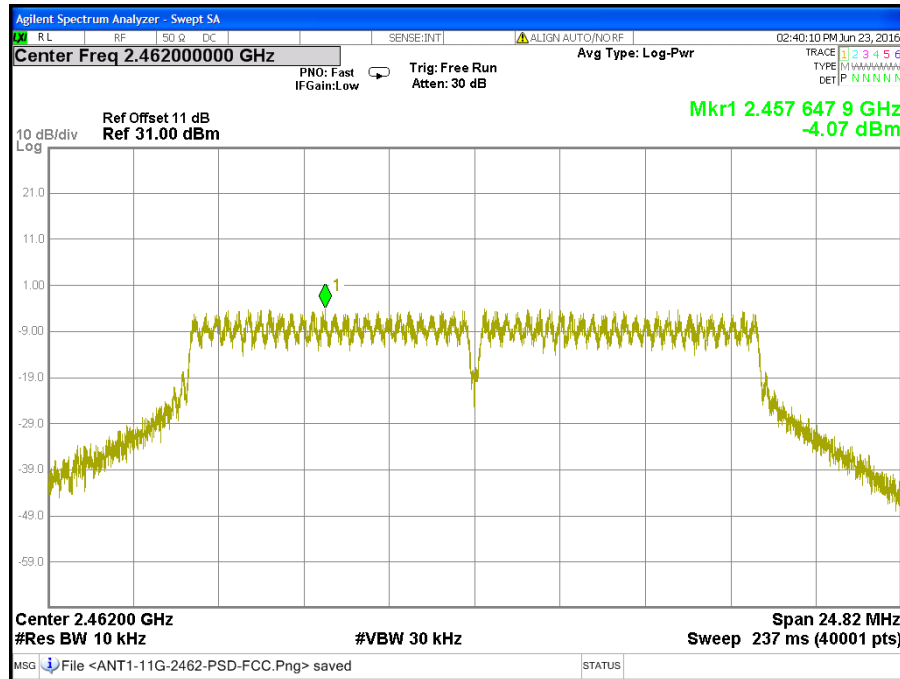


CH Low (IEEE 802.11gn HT20 MCS0 Mode / Chain A)

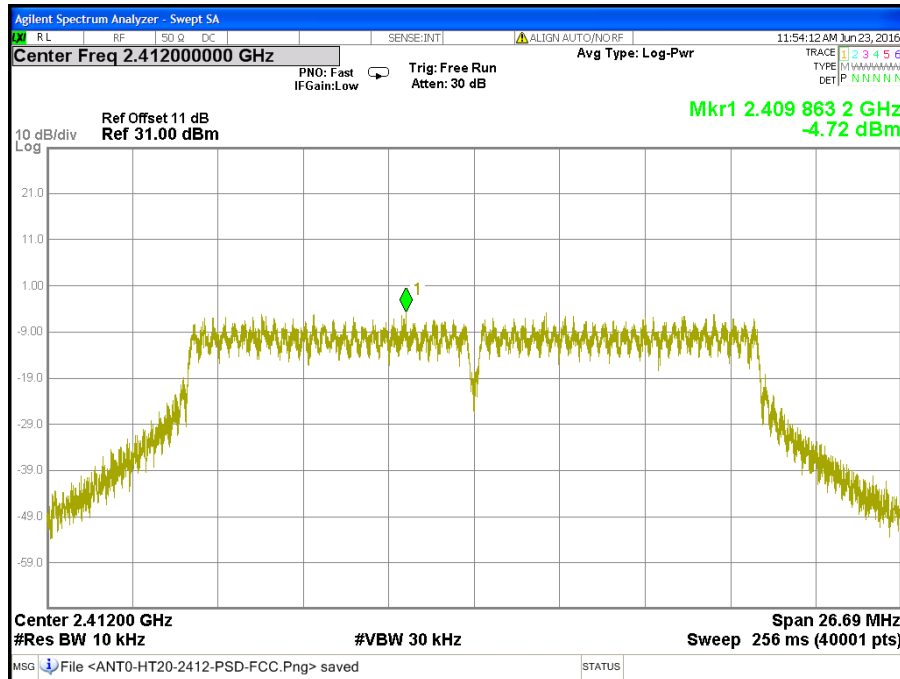


CH Middle (IEEE 802.11gn HT20 MCS0 Mode / Chain A)

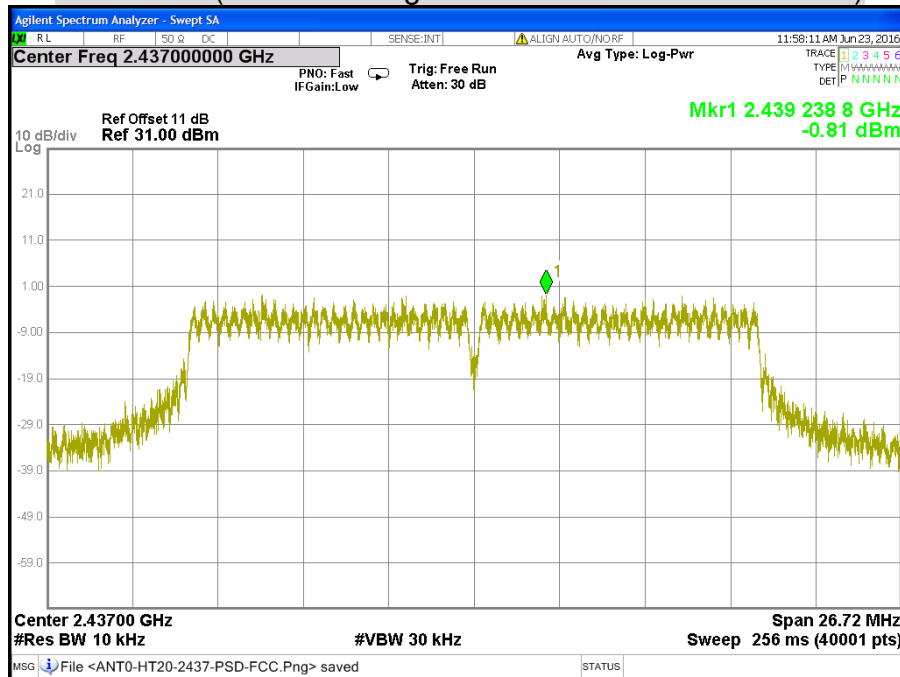


CH High (IEEE 802.11gn HT20 MCS0 Mode / Chain A)

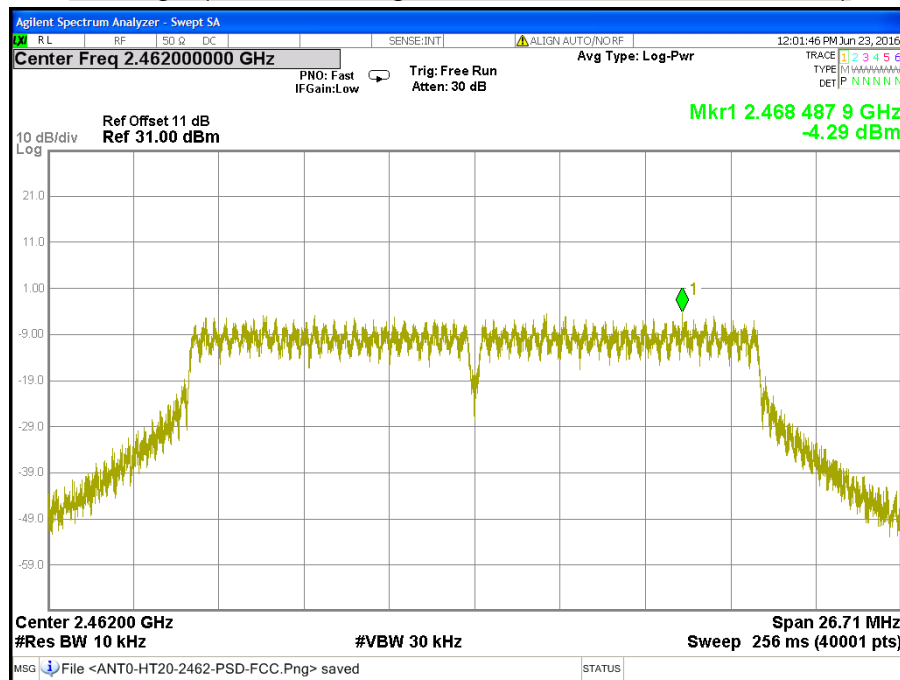


CH Low (IEEE 802.11gn HT20 MCS0 Mode / Chain B)

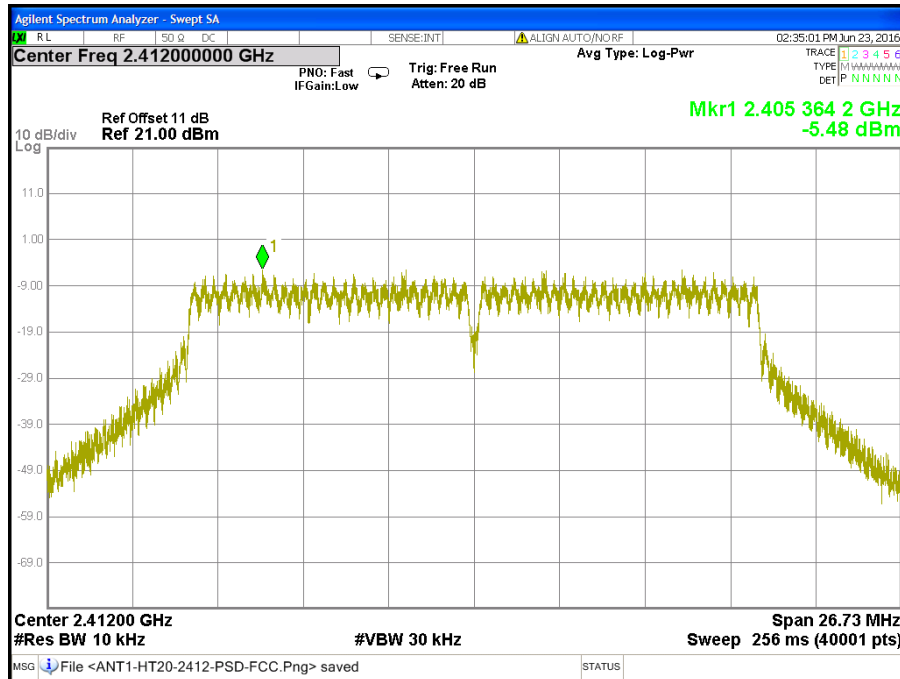


CH Middle (IEEE 802.11gn HT20 MCS0 Mode / Chain B)

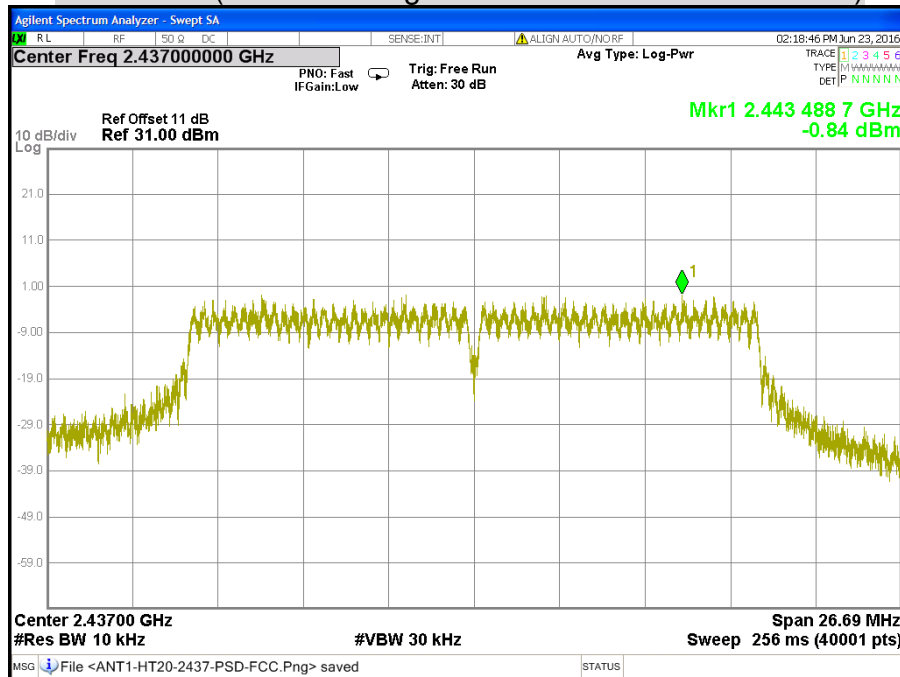


CH High (IEEE 802.11gn HT20 MCS0 Mode / Chain B)

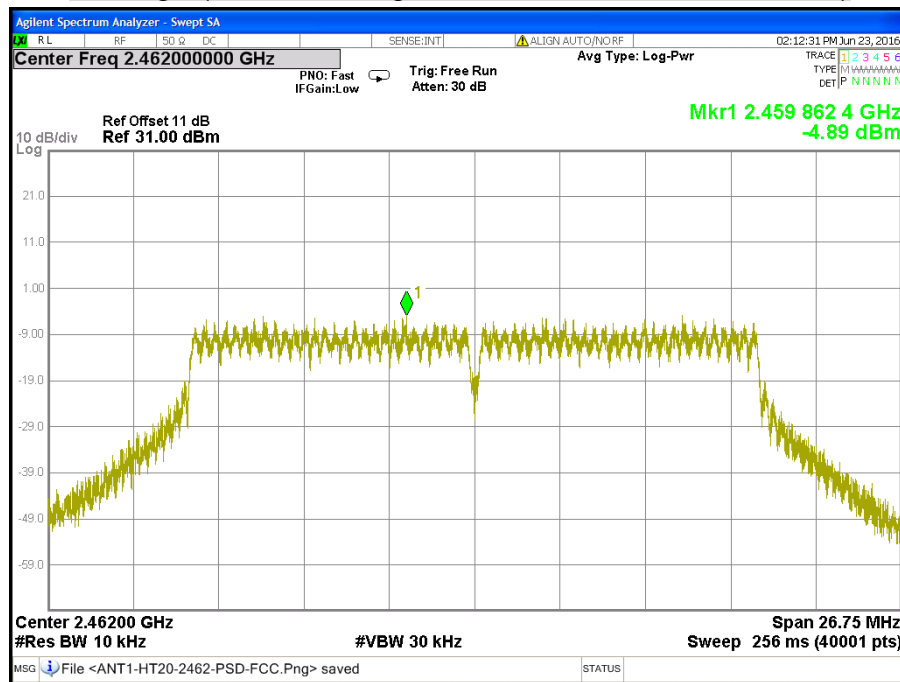


CH Low (IEEE 802.11gn HT40 MCS0 Mode / Chain A)

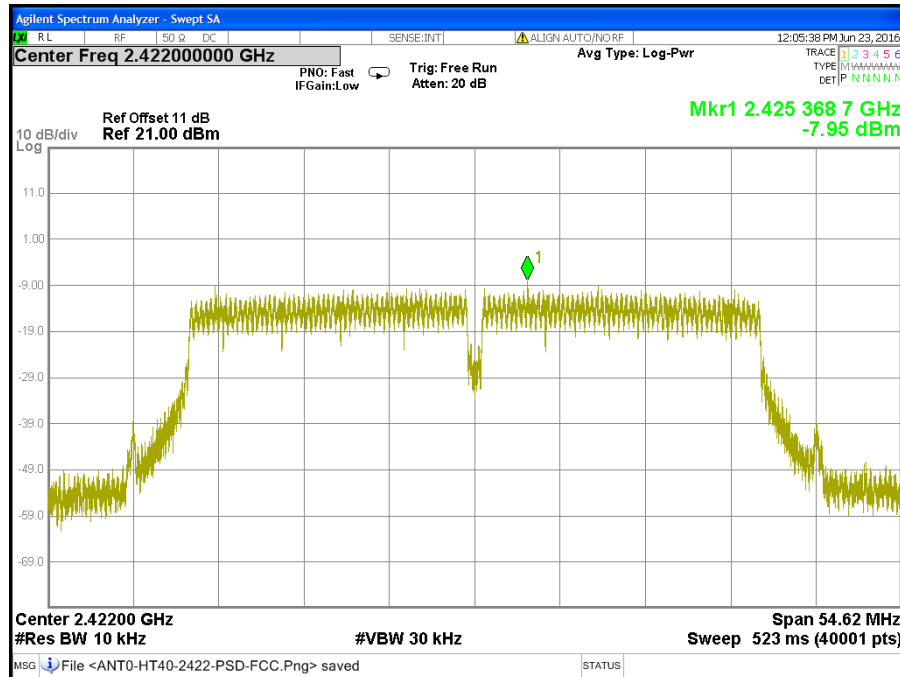


CH Middle (IEEE 802.11gn HT40 MCS0 Mode / Chain A)

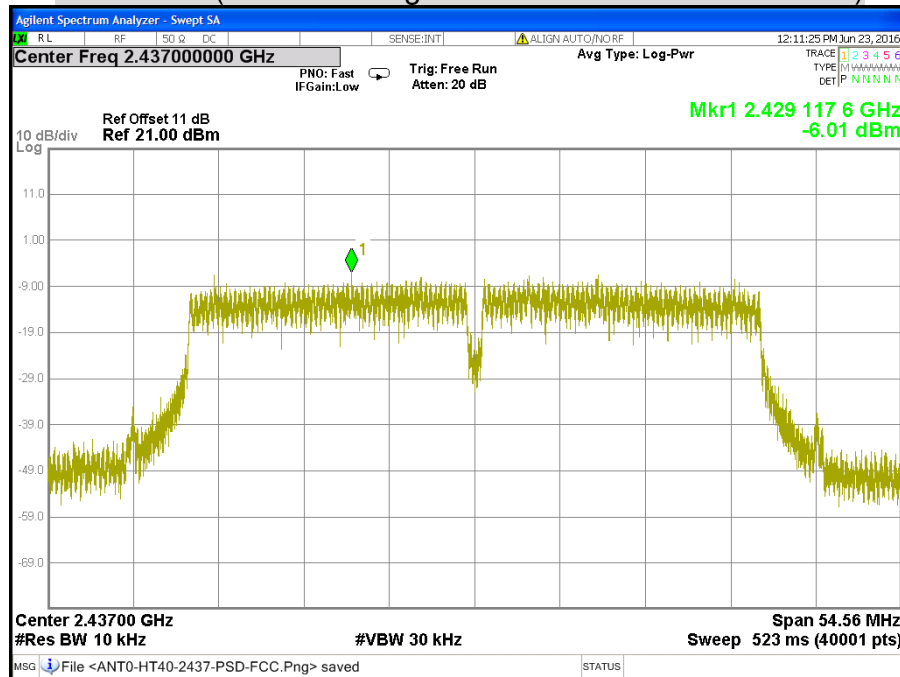


CH High (IEEE 802.11gn HT40 MCS0 Mode / Chain A)

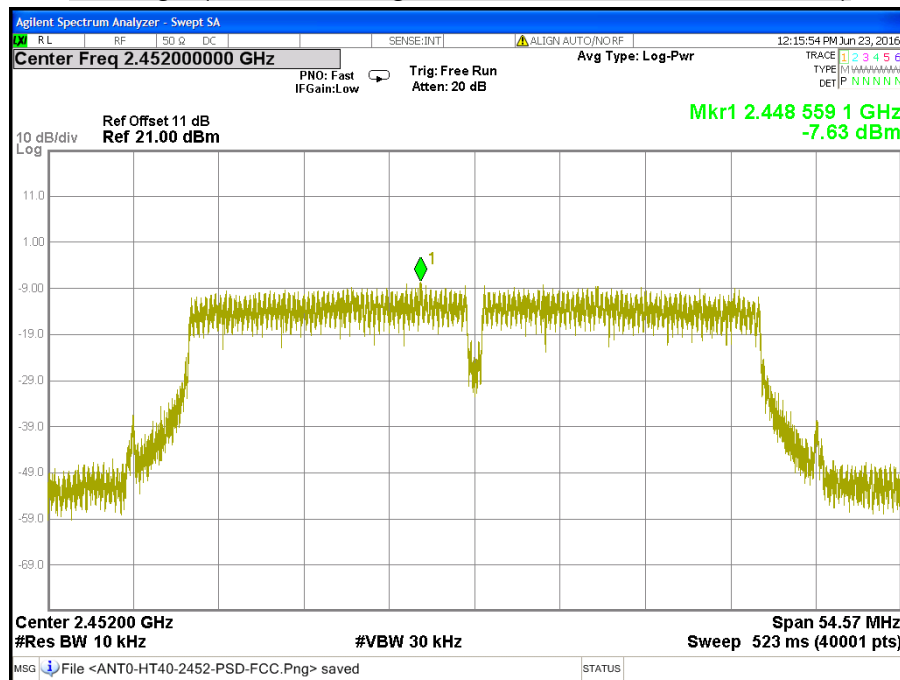


CH Low (IEEE 802.11gn HT40 MCS0 Mode / Chain B)

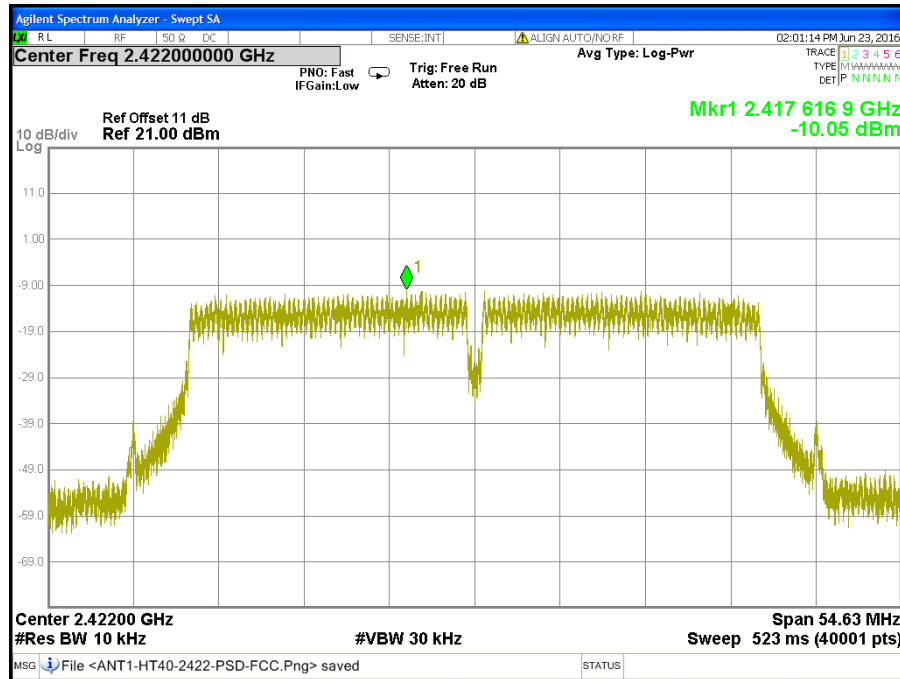

CH Middle (IEEE 802.11gn HT40 MCS0 Mode / Chain B)

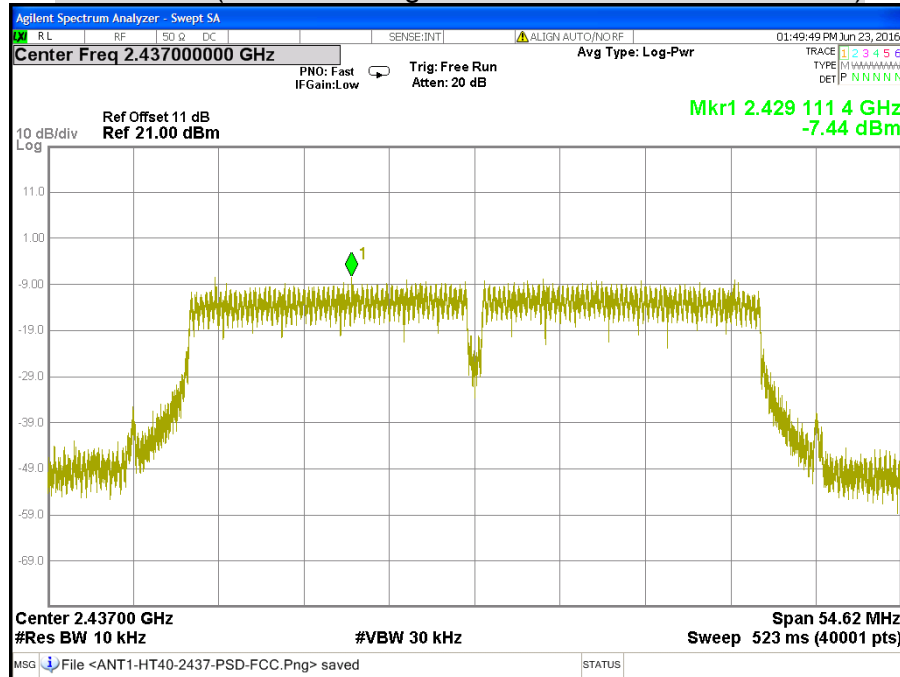

CH High (IEEE 802.11gn HT40 MCS0 Mode / Chain B)

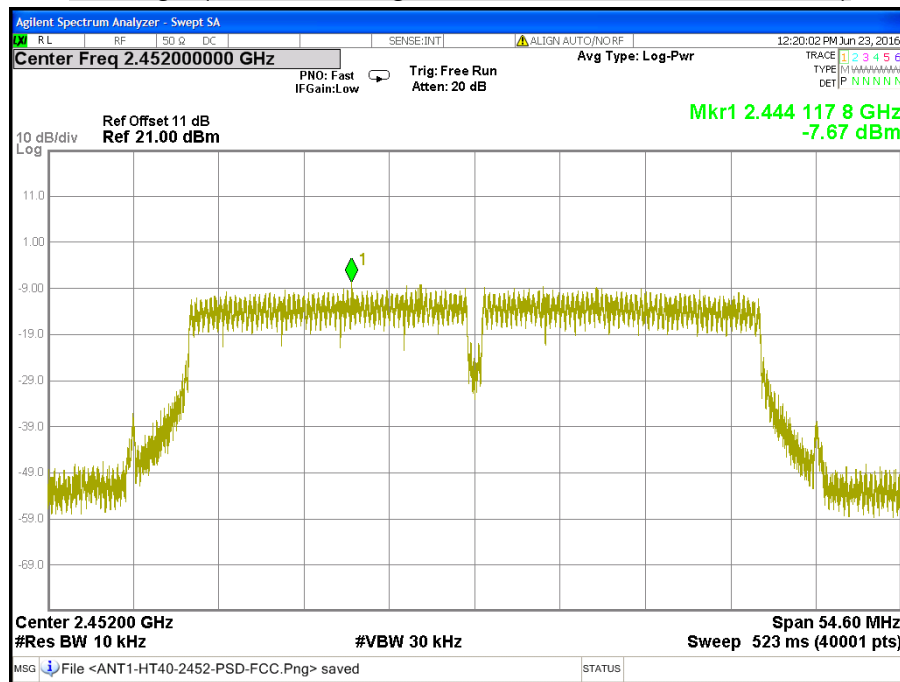

7.6 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/15/2017
Test S/W	N/A			

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

TEST RESULTS


Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Crystal Wu
Test Model	DL4480V	Test Date	2016/06/23
Test Mode	TX Mode	Temp. & Humidity	27C, 58

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


CH Low (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain A)

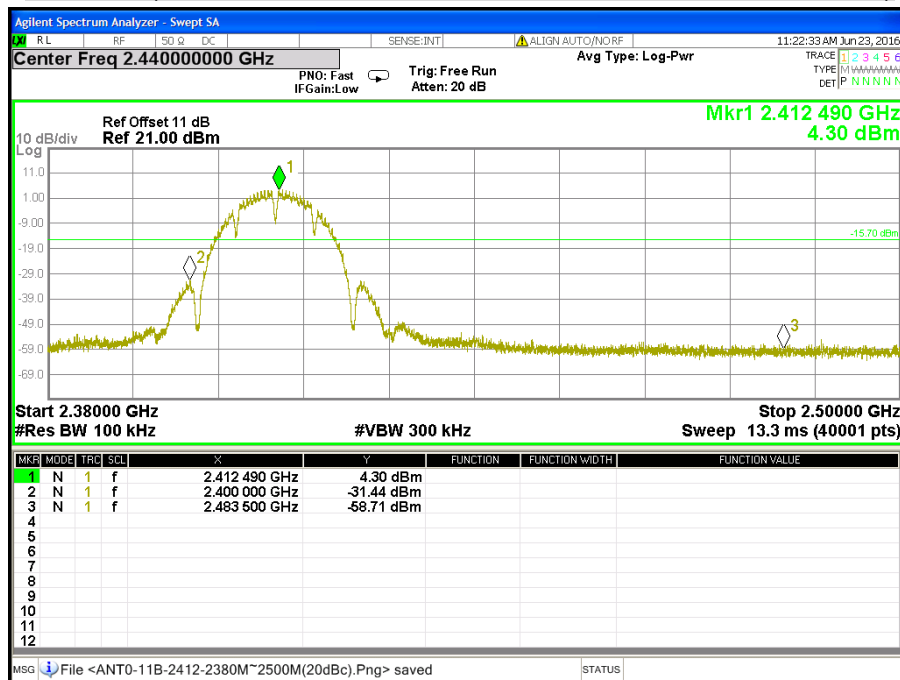


CH Low (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain A)

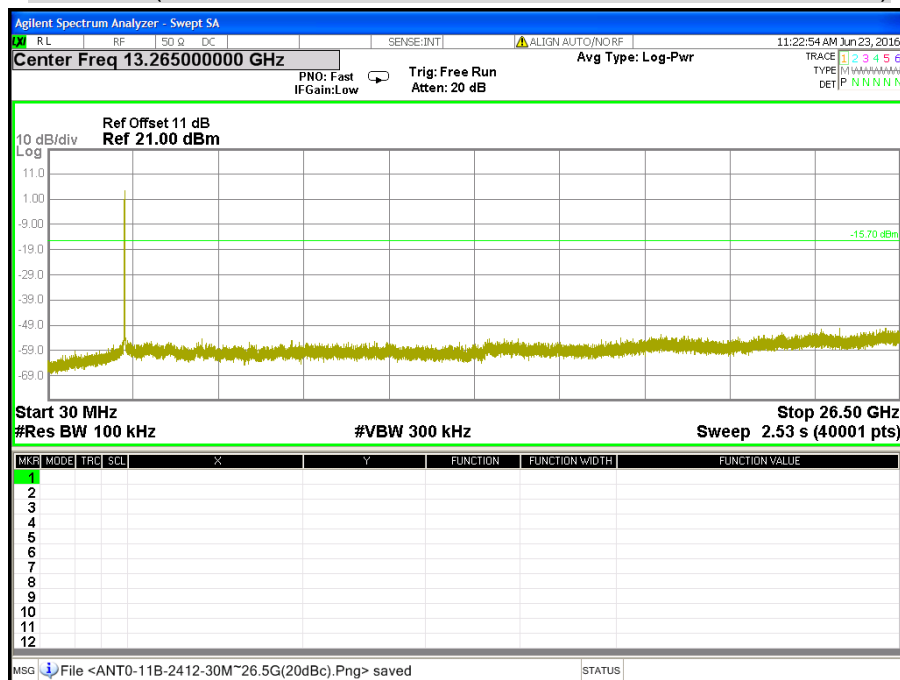


CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain
A)

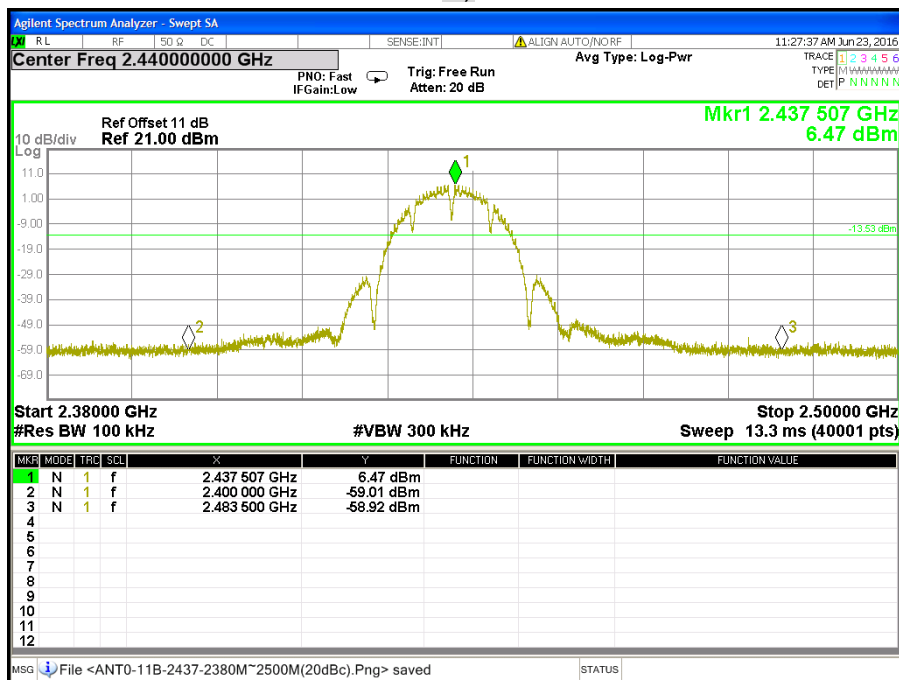


CH Middle (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain A)

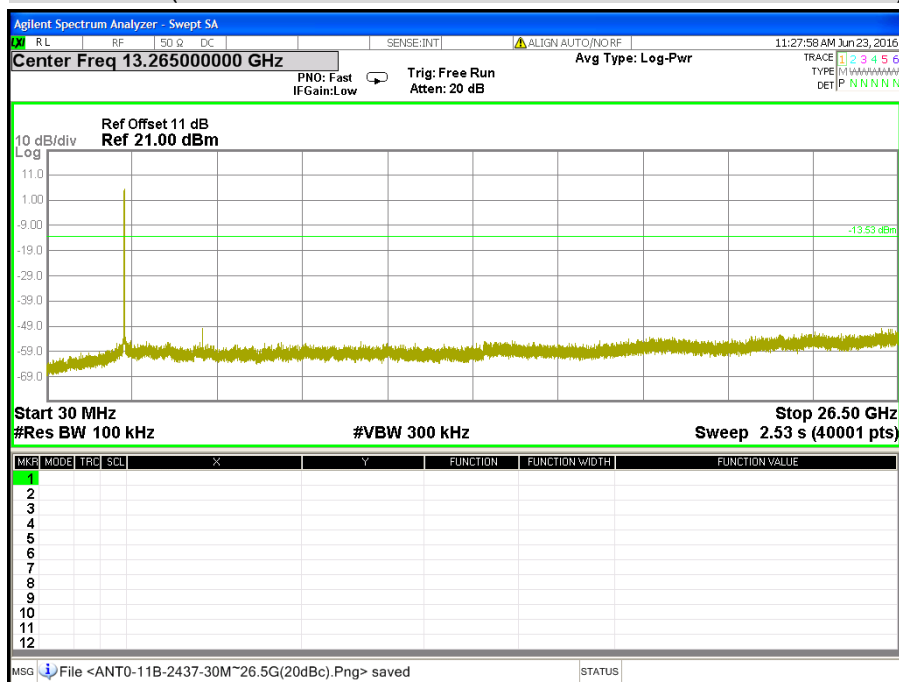


CH High (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain A)

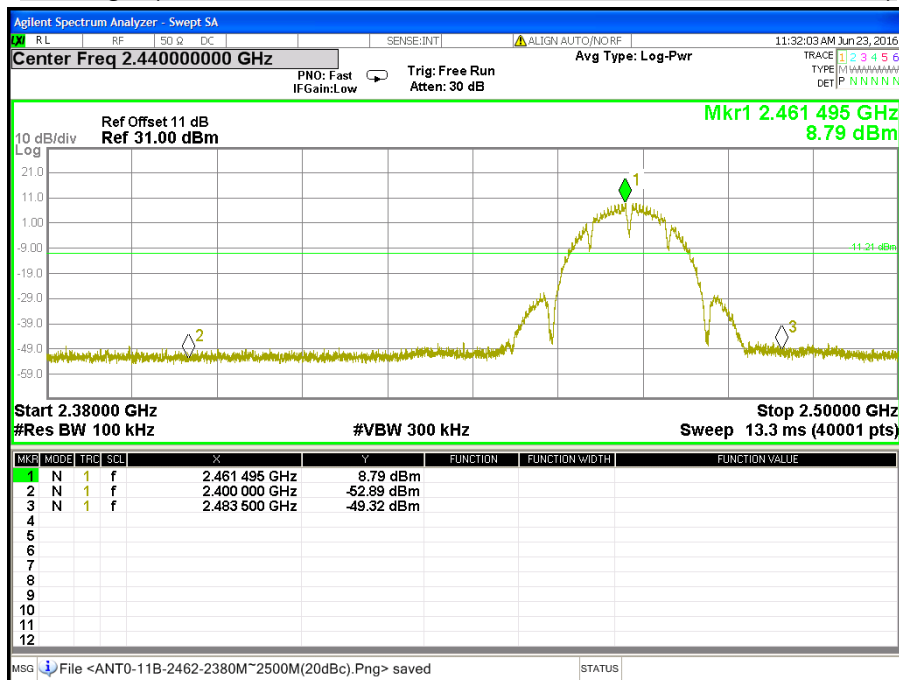


CH High (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain A)

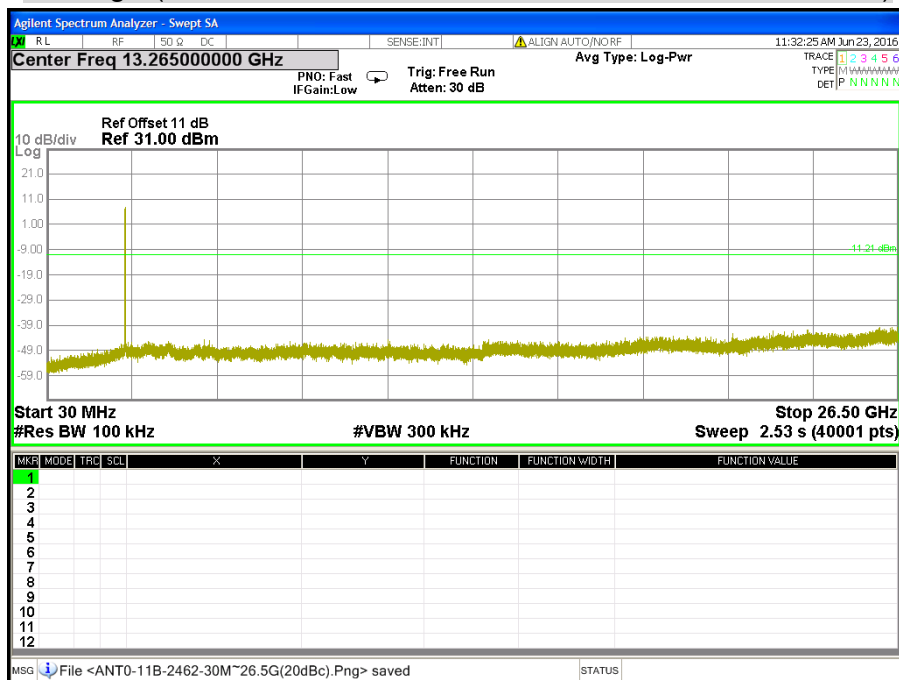


CH Low (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain B)

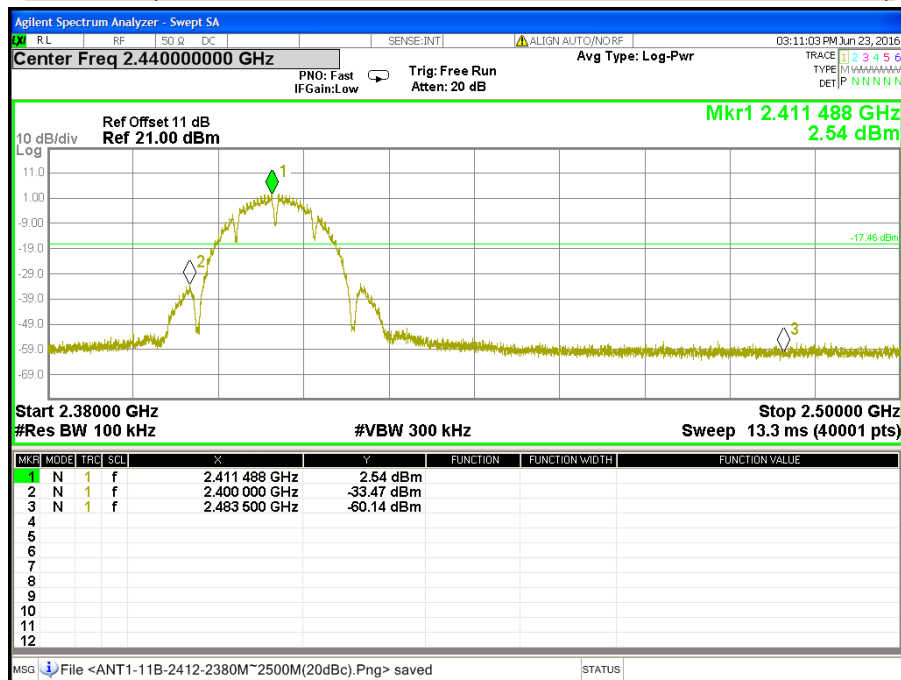


CH Low (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain B)

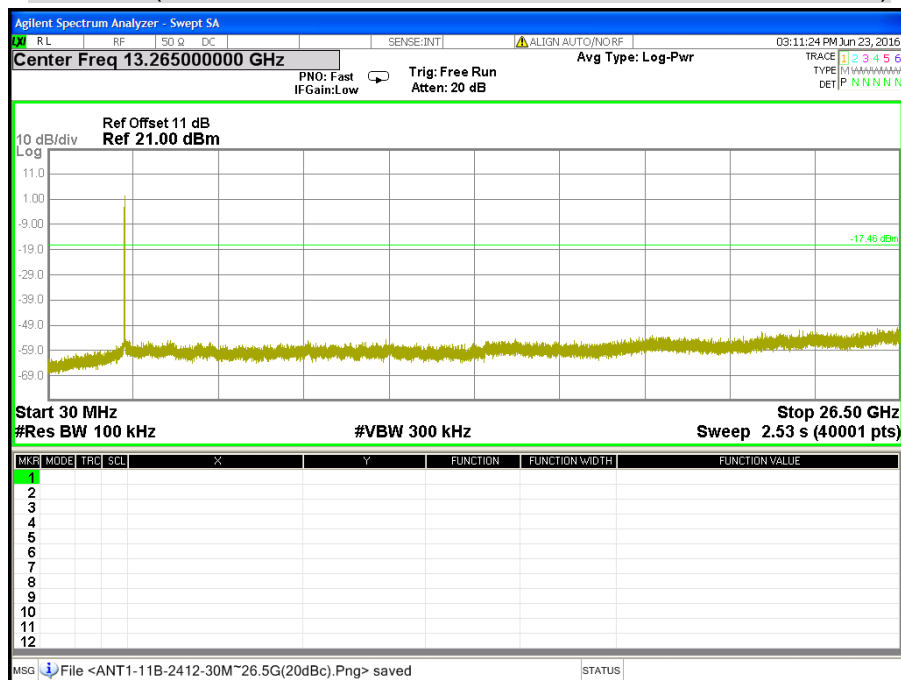


CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain B)

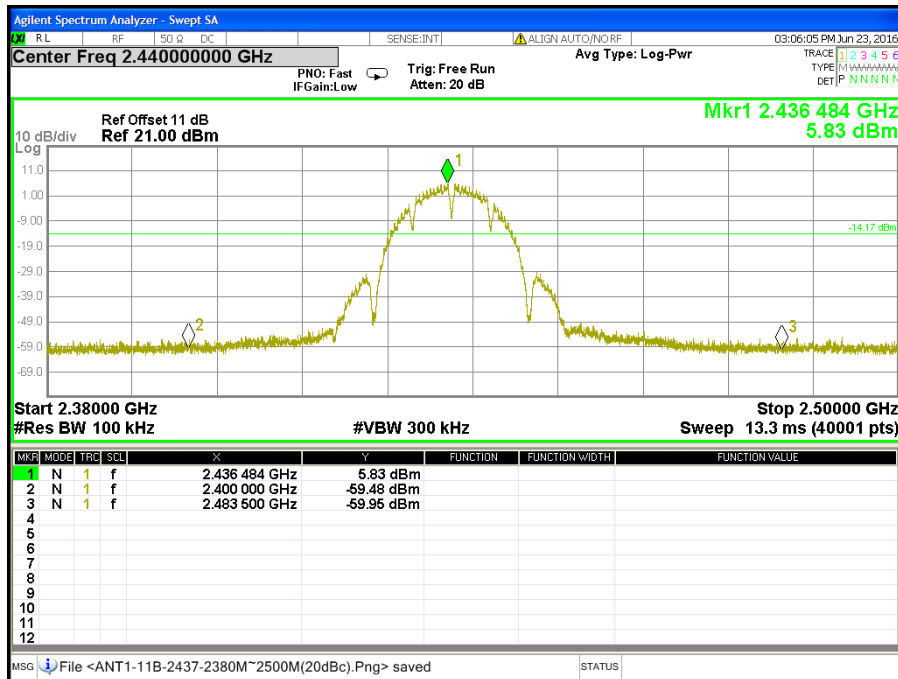


CH Middle (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain B)

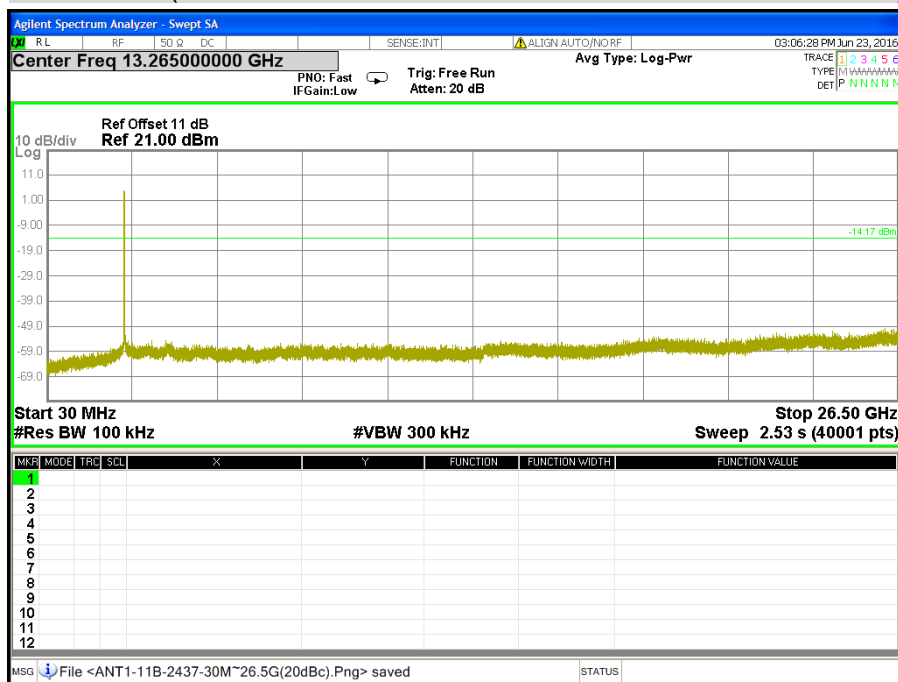


CH High (2.38GHz ~ 2.5GHz / IEEE 802.11b Mode / Chain B)

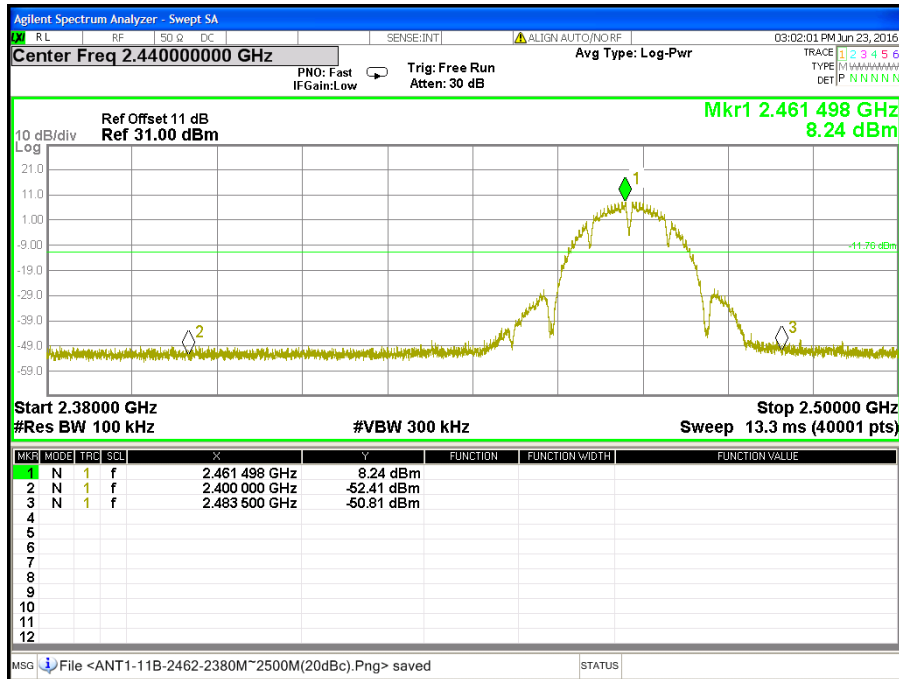


CH High (30MHz ~ 26.5GHz / IEEE 802.11b Mode / Chain B)

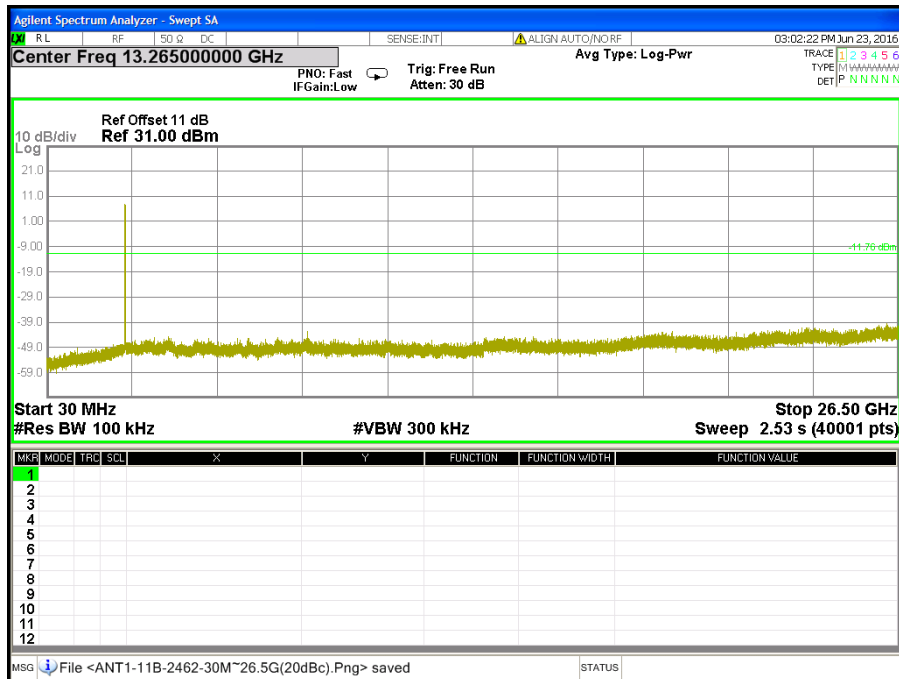


CH Low (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain A)

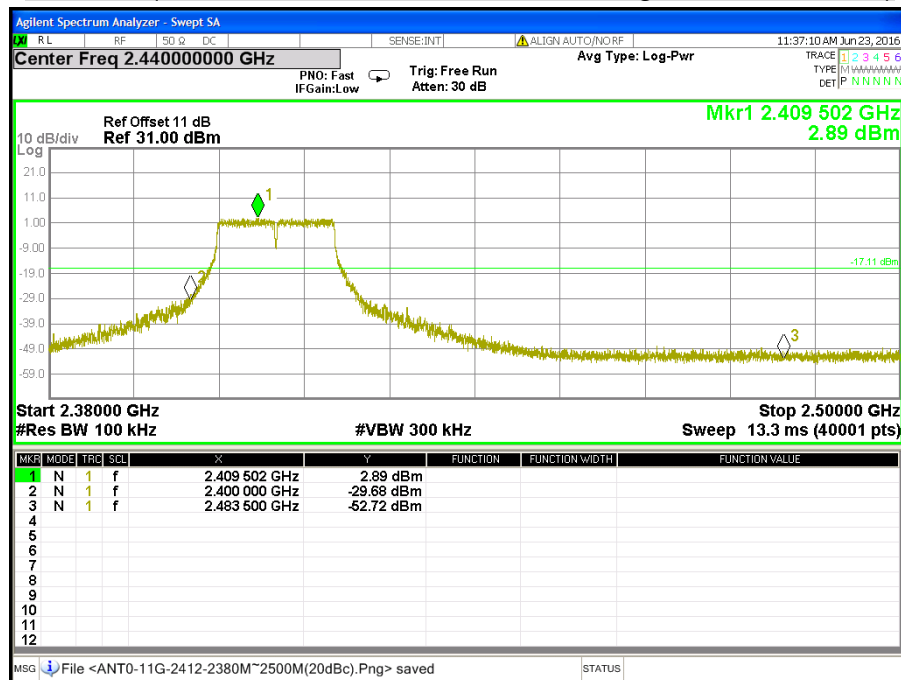


CH Low (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain A)

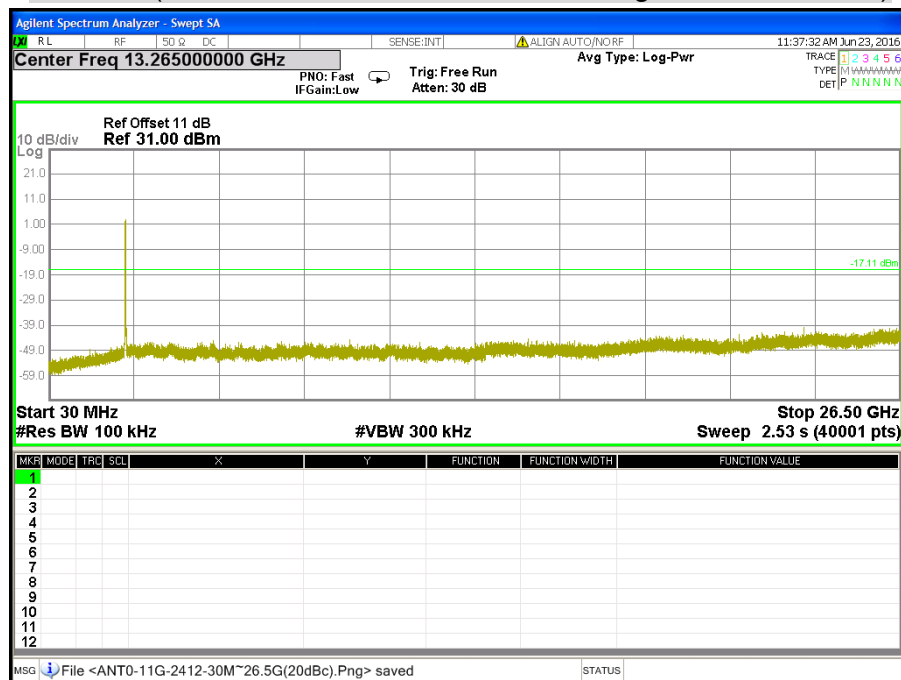


CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain
A)

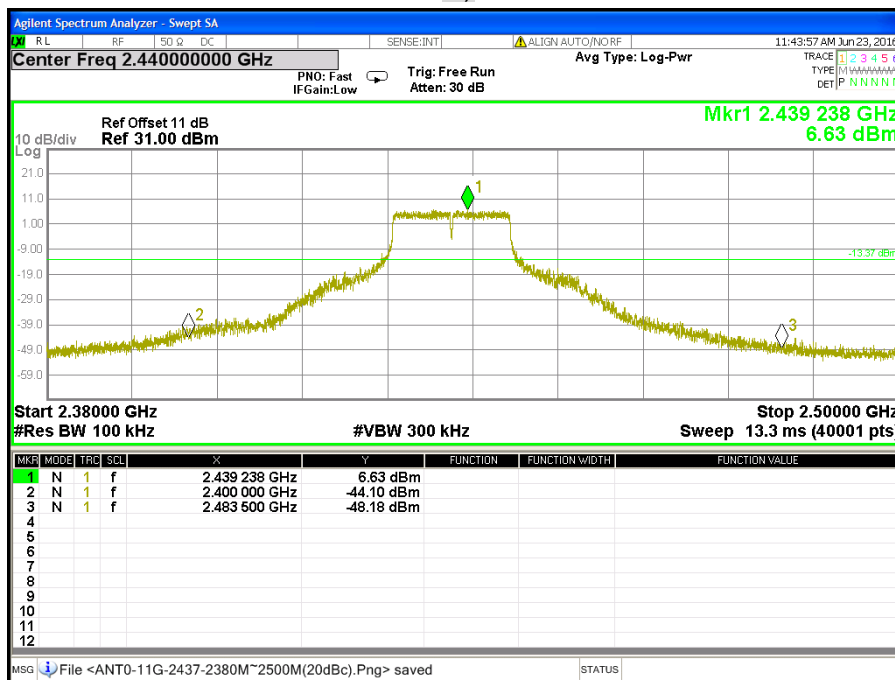


CH Middle (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain A)

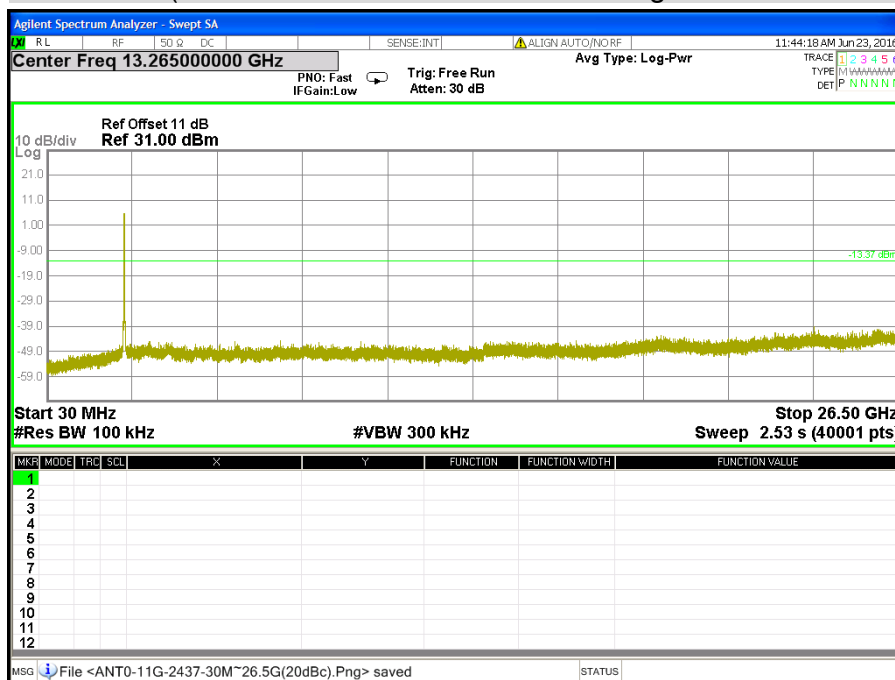


CH High (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain A)

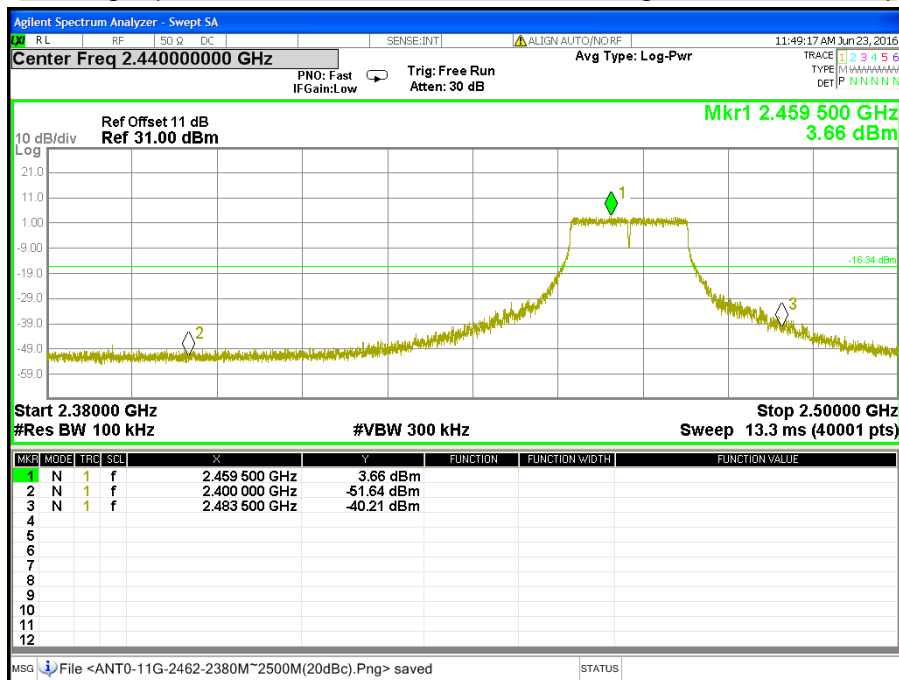


CH High (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain A)

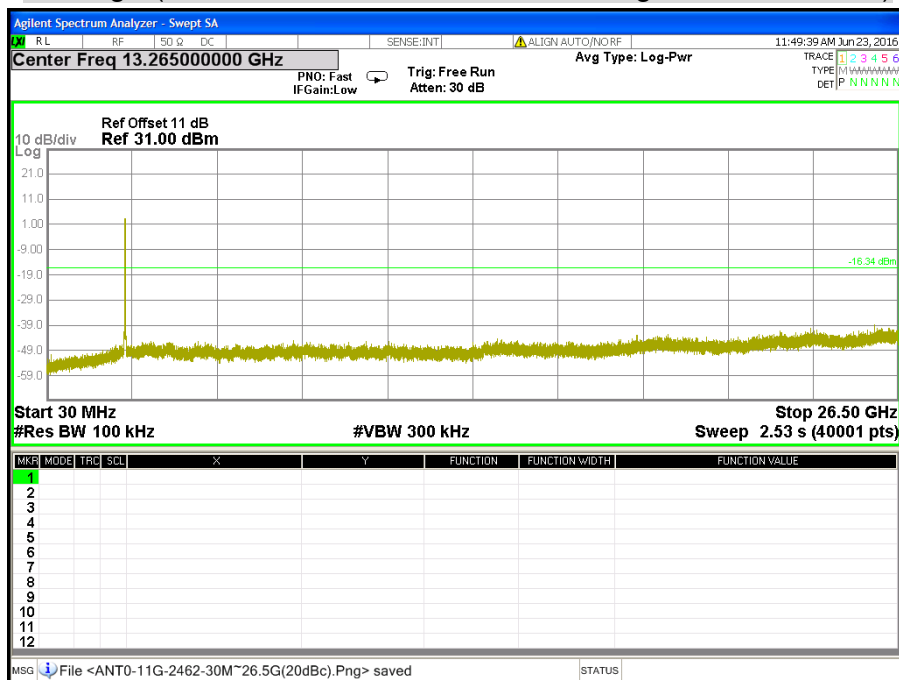


CH Low (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain B)

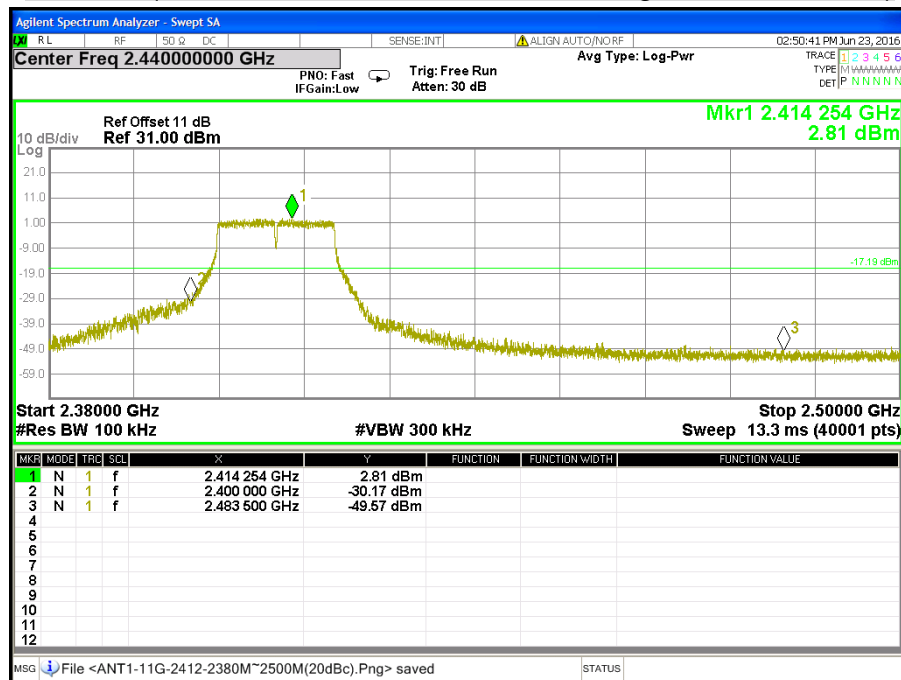


CH Low (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain B)

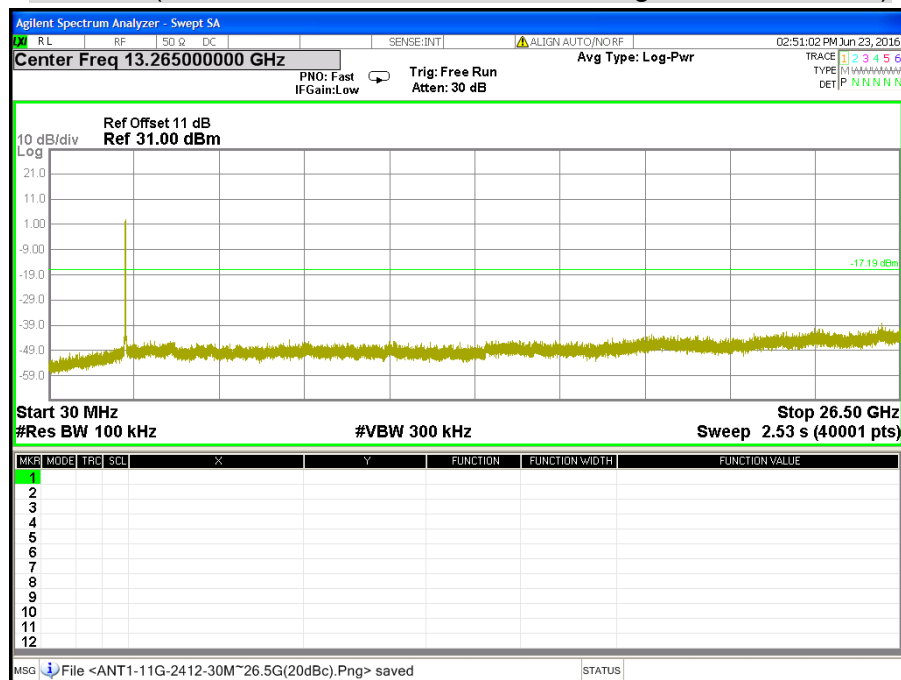


CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain B)

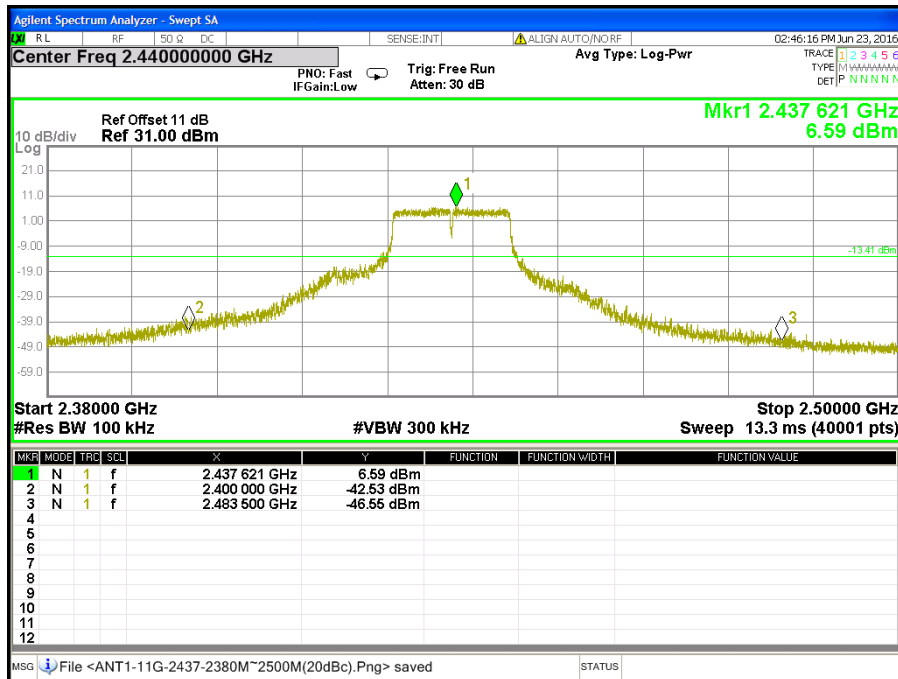


CH Middle (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain B)

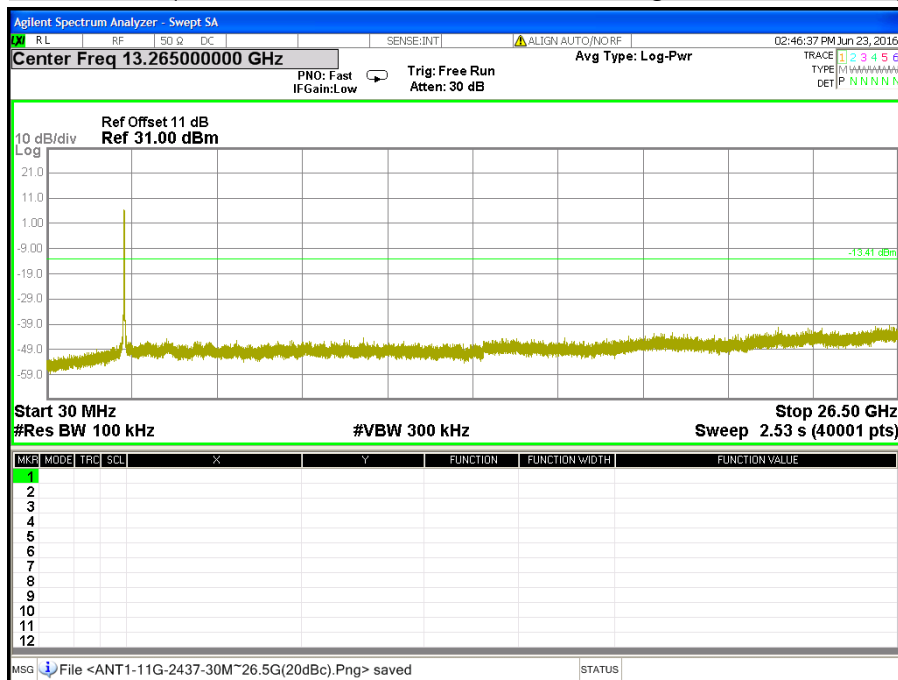


CH High (2.38GHz ~ 2.5GHz / IEEE 802.11g Mode / Chain B)

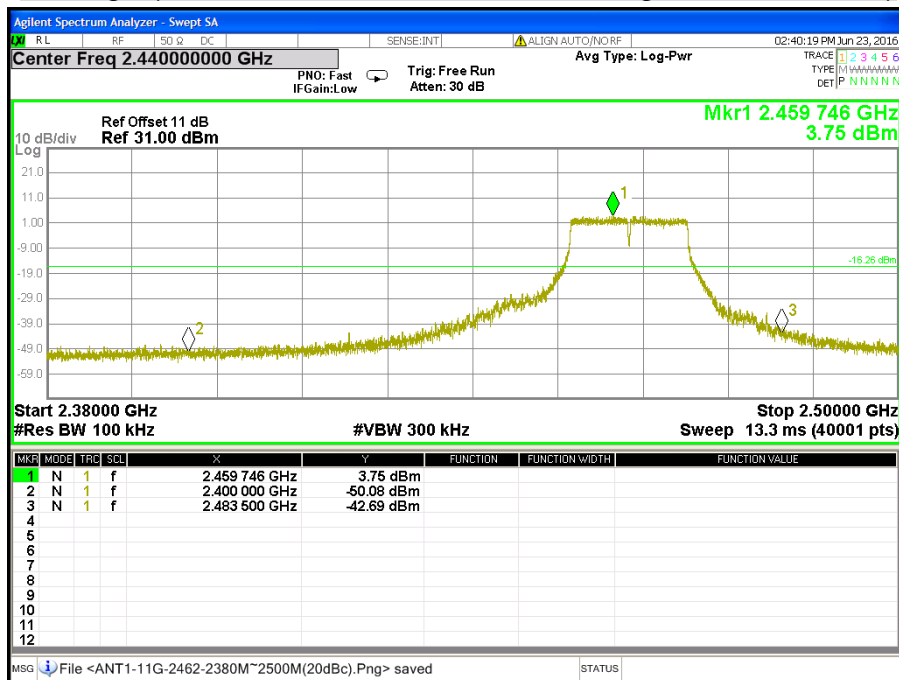


CH High (30MHz ~ 26.5GHz / IEEE 802.11g Mode / Chain B)

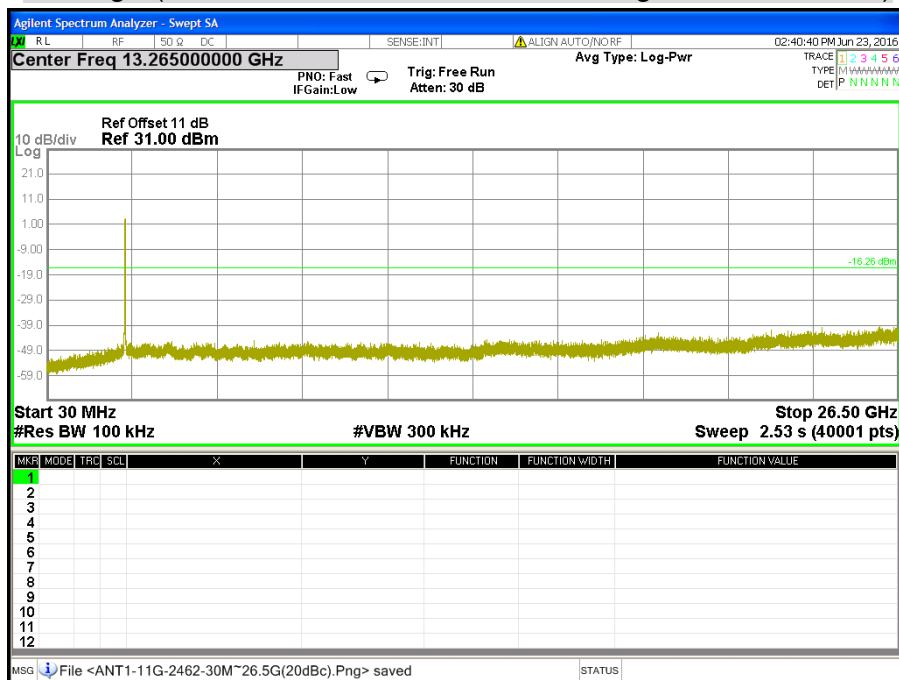


CH Low (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain A)

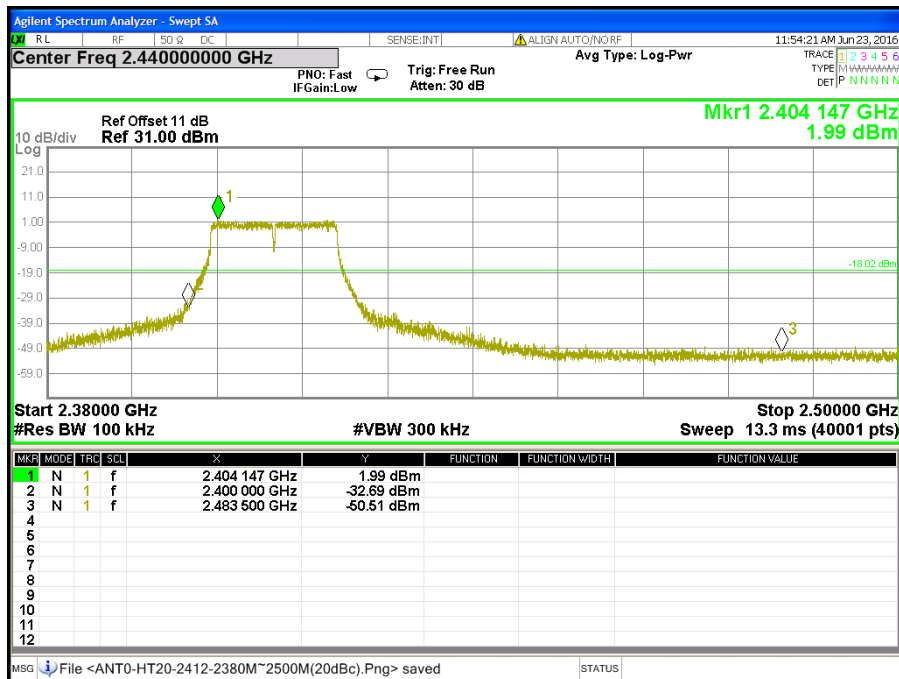


CH Low (30MHz ~ 26.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain A)

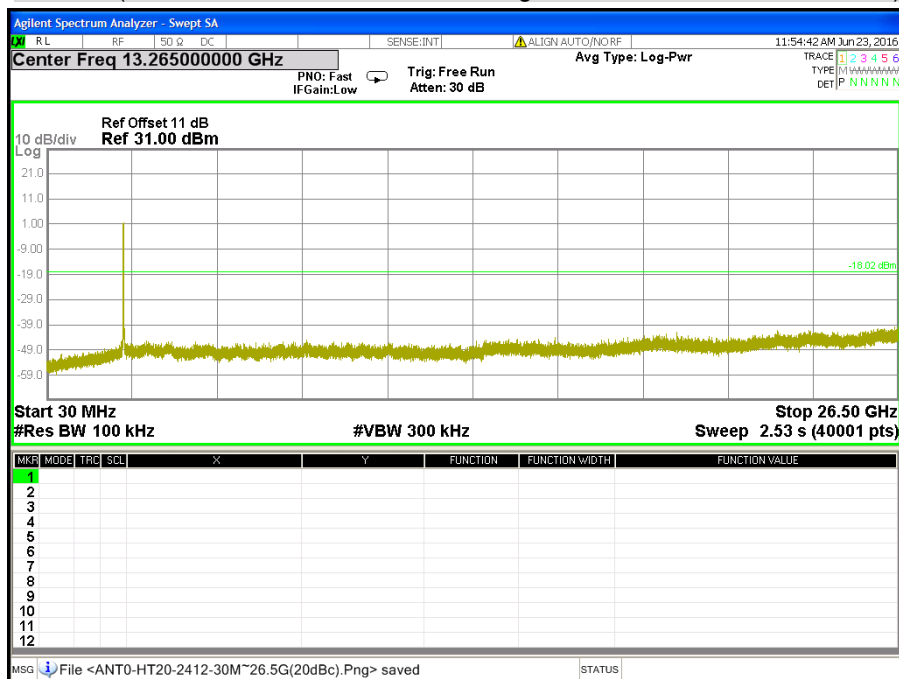


CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain A)

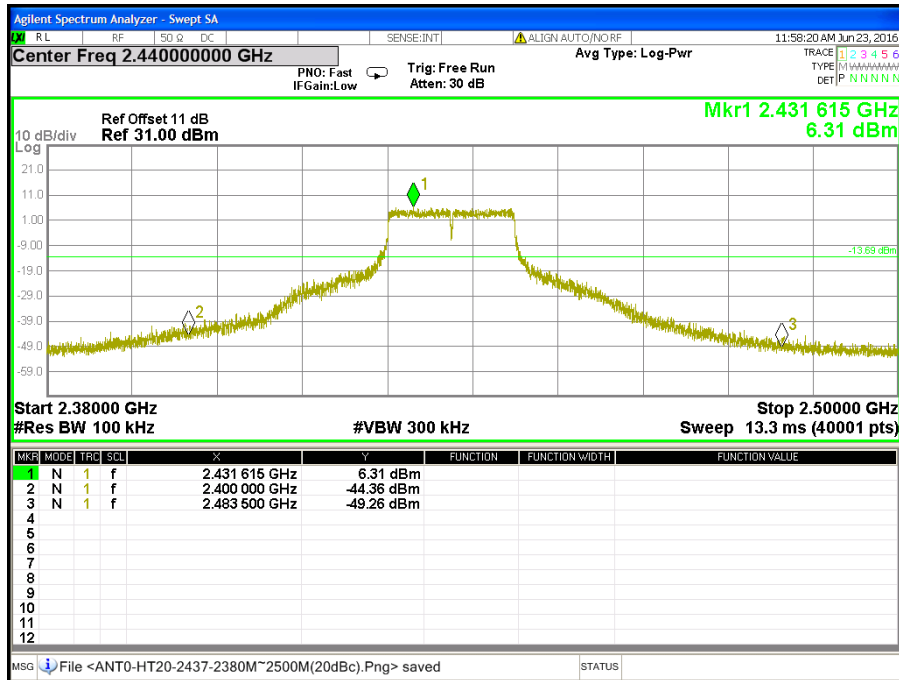


CH Middle (30MHz ~ 26.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain A)

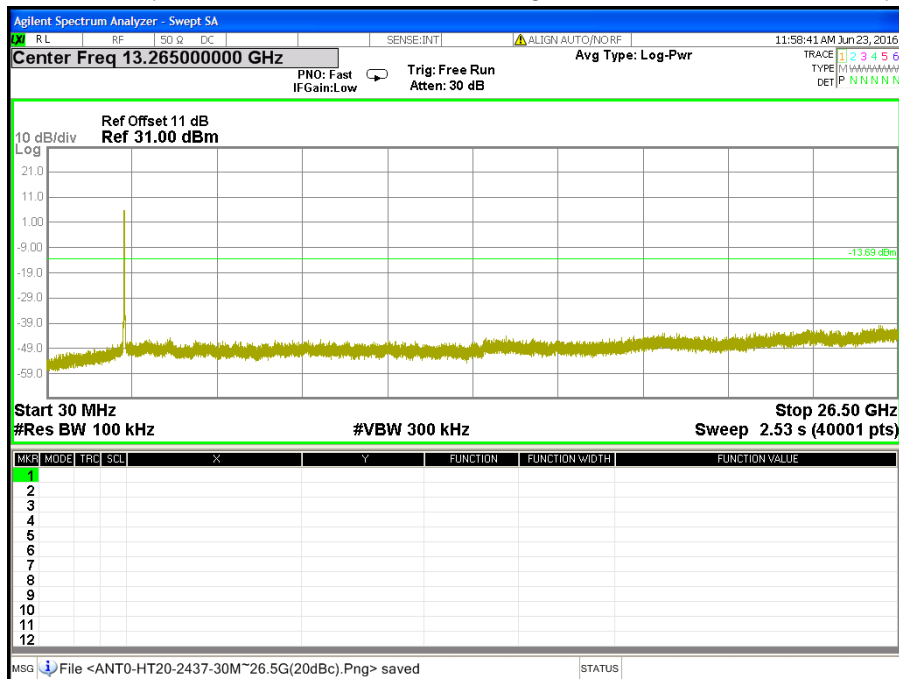


CH High (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain A)

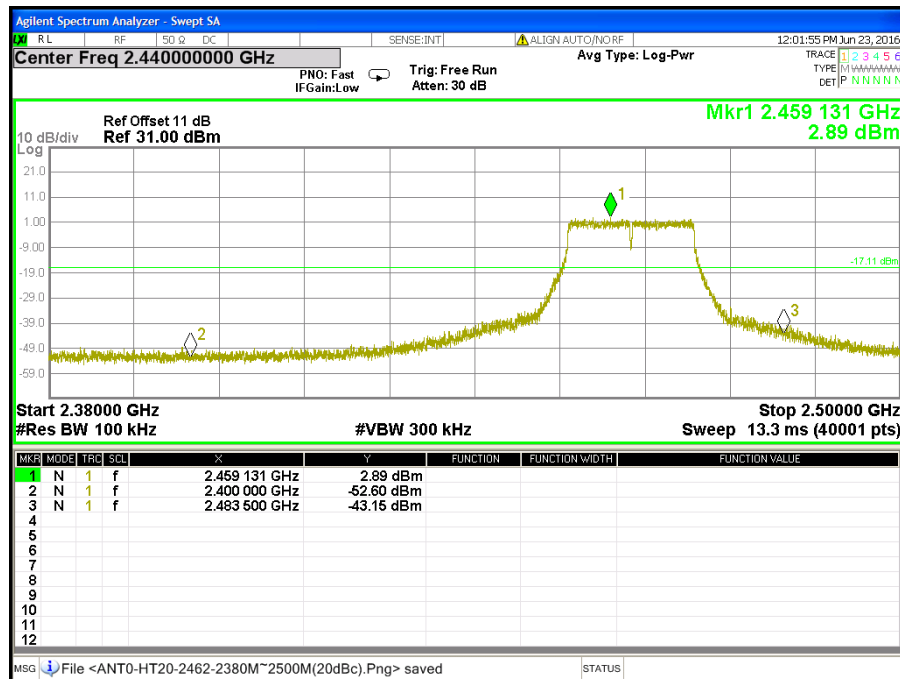


CH High (30MHz ~ 26.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain A)

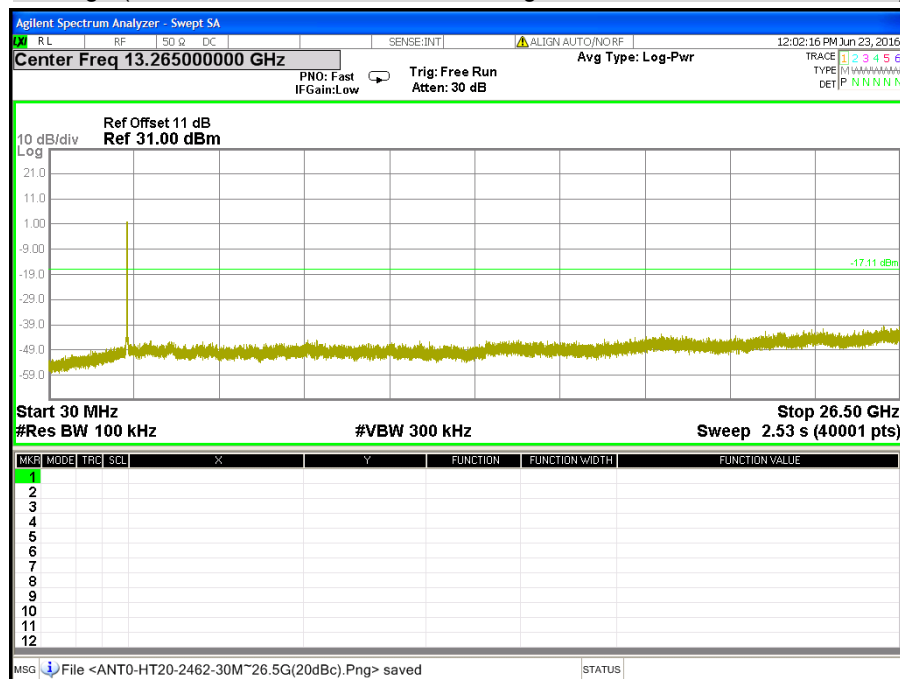


CH Low (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain B)

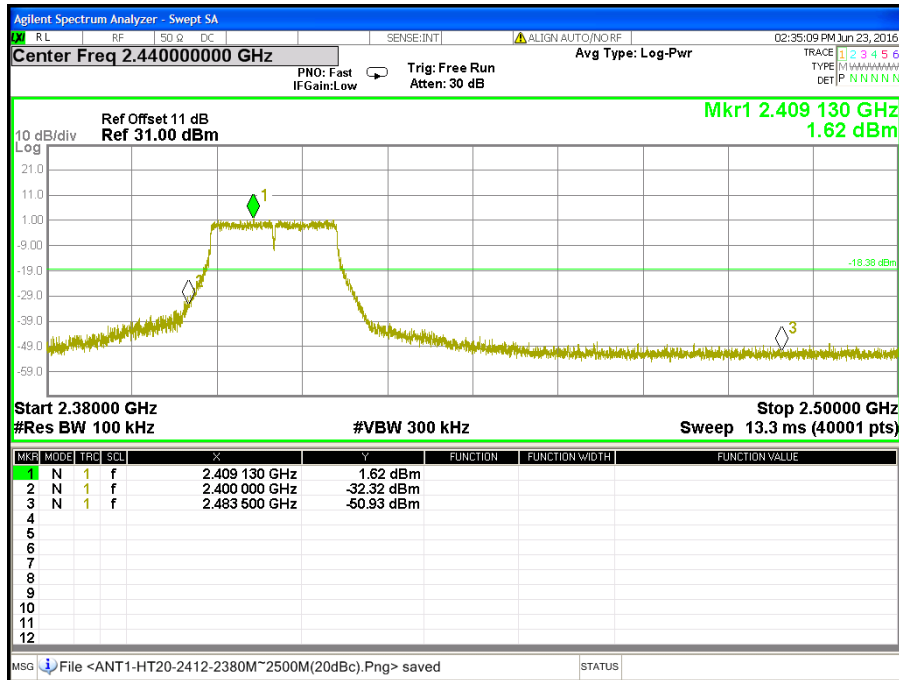


CH Low (30MHz ~ 26.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain B)

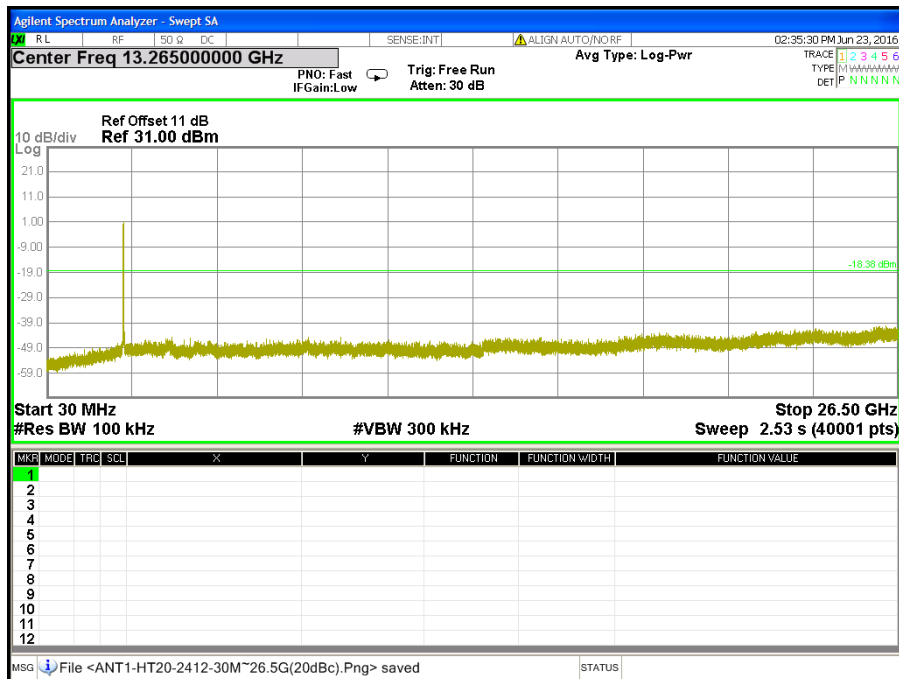


CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain B)

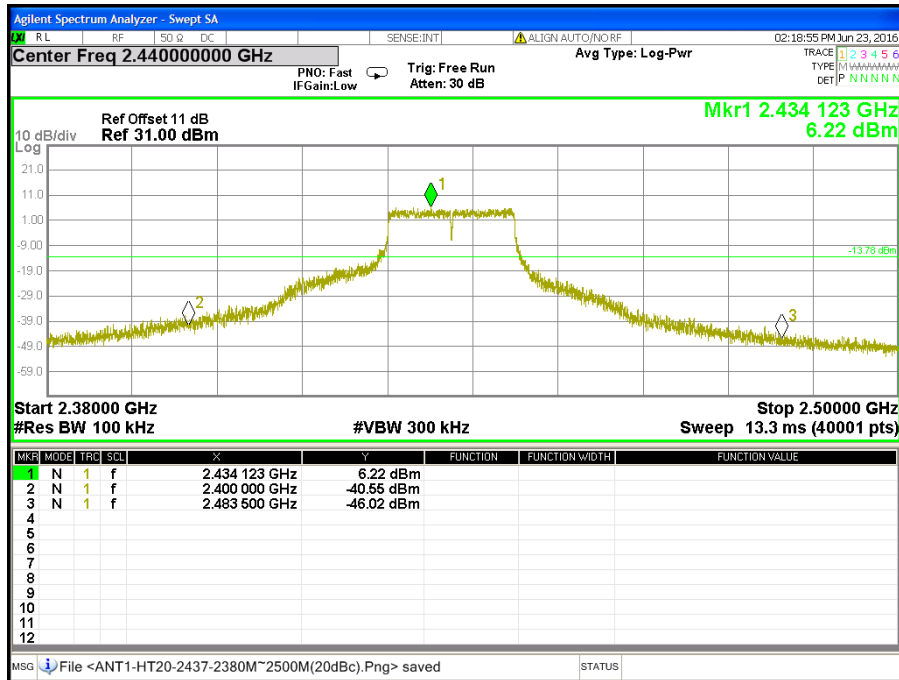


CH Middle (30MHz ~ 26.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain B)

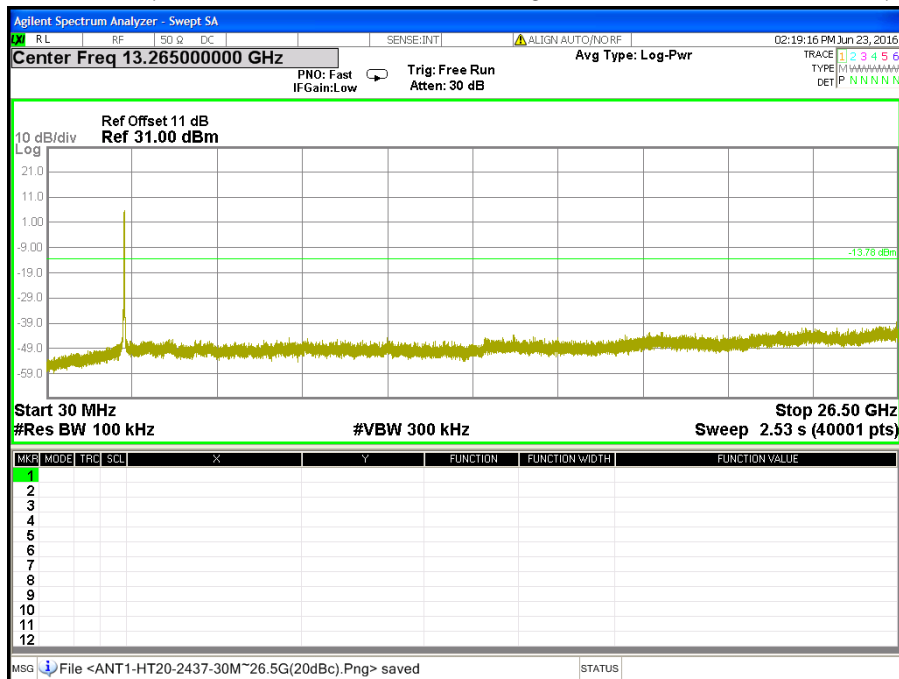


CH High (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain B)

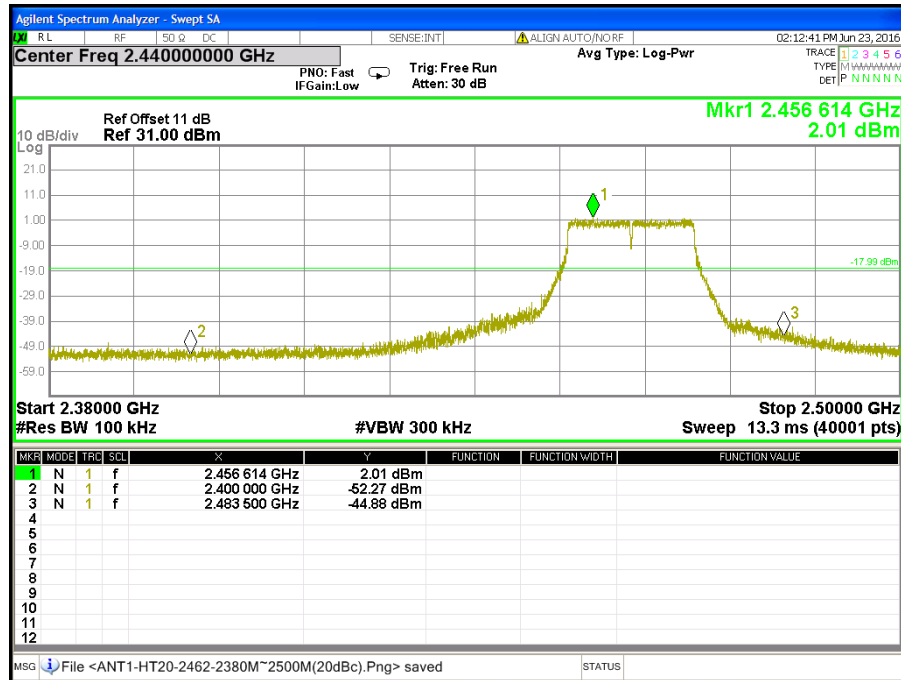


CH High (30MHz ~ 26.5GHz / IEEE 802.11gn HT20 MCS0 Mode / Chain B)

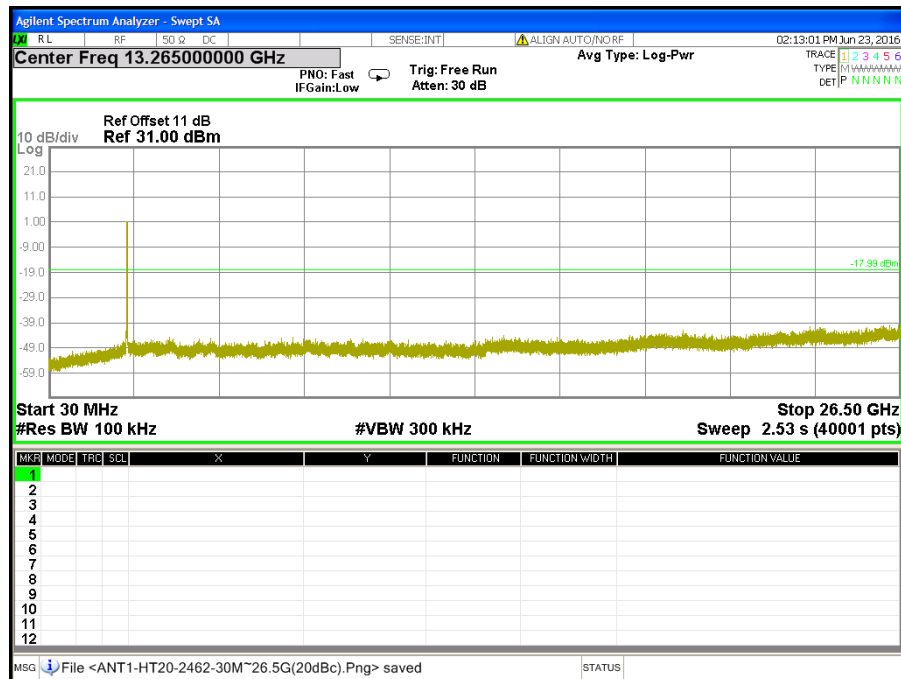


CH Low (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain A)

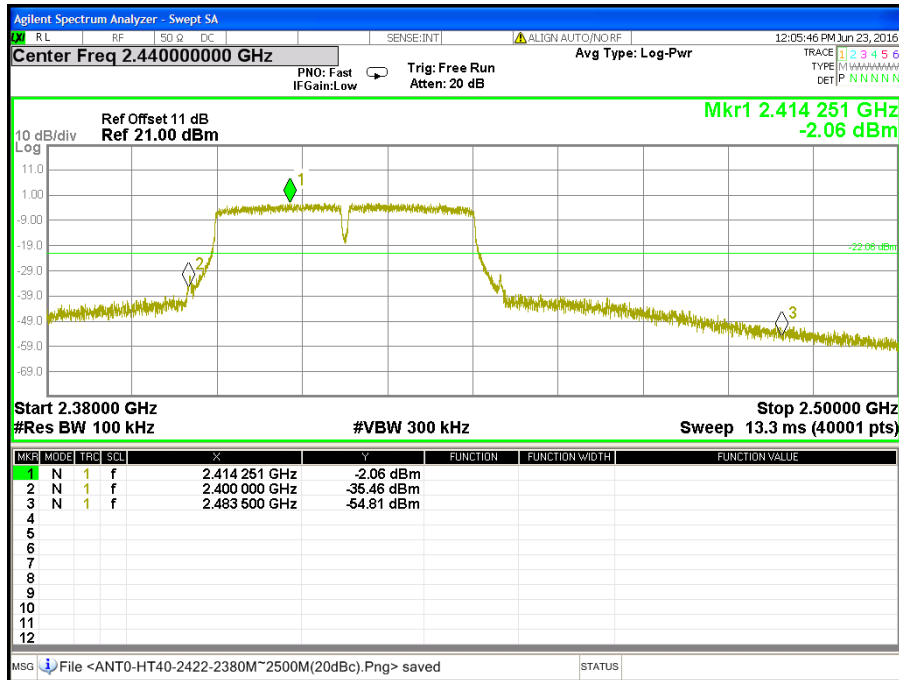


CH Low (30MHz ~ 26.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain A)

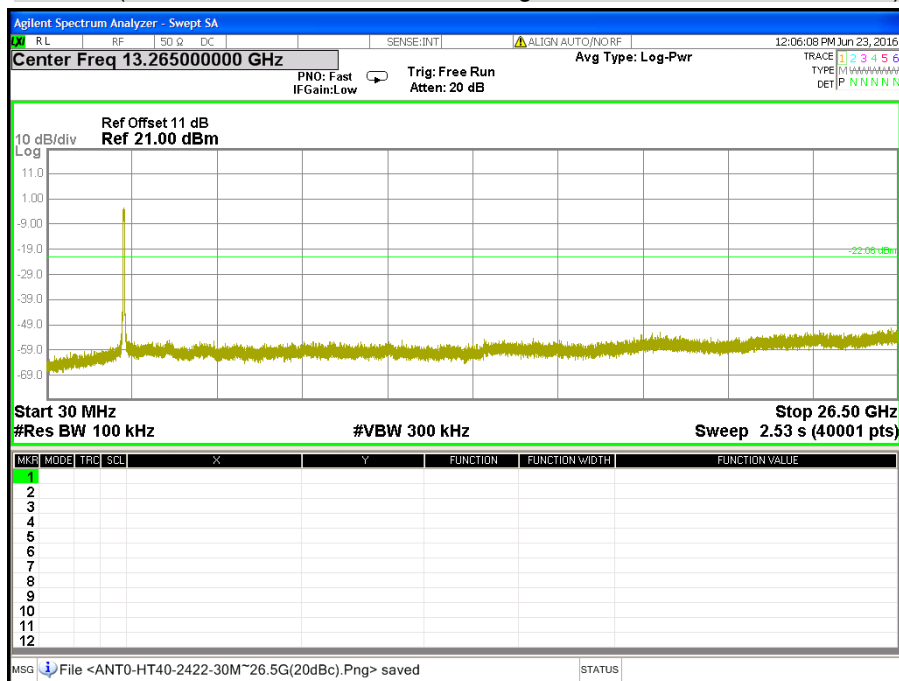


CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain A)

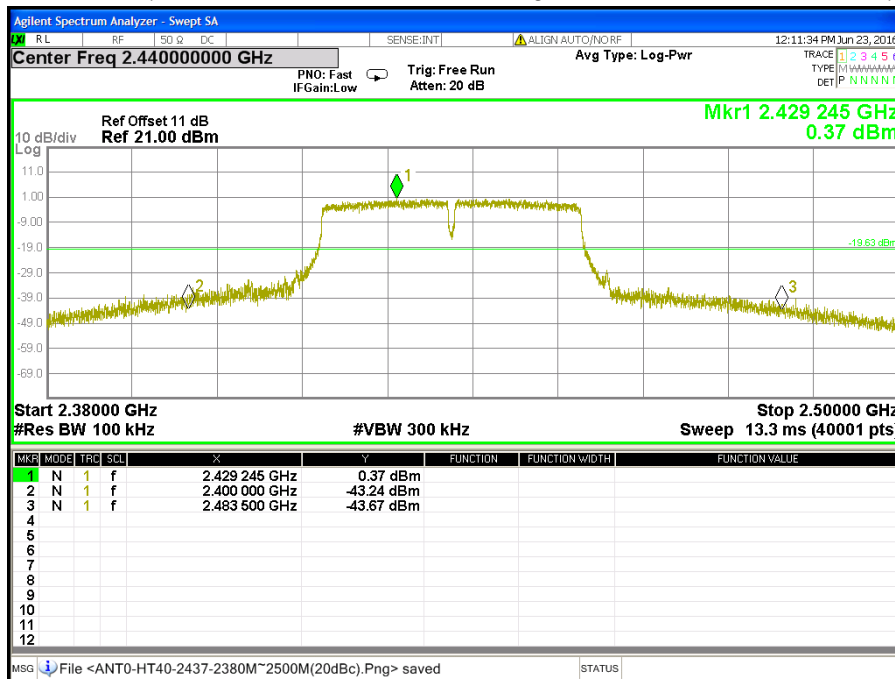


CH Middle (30MHz ~ 26.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain A)

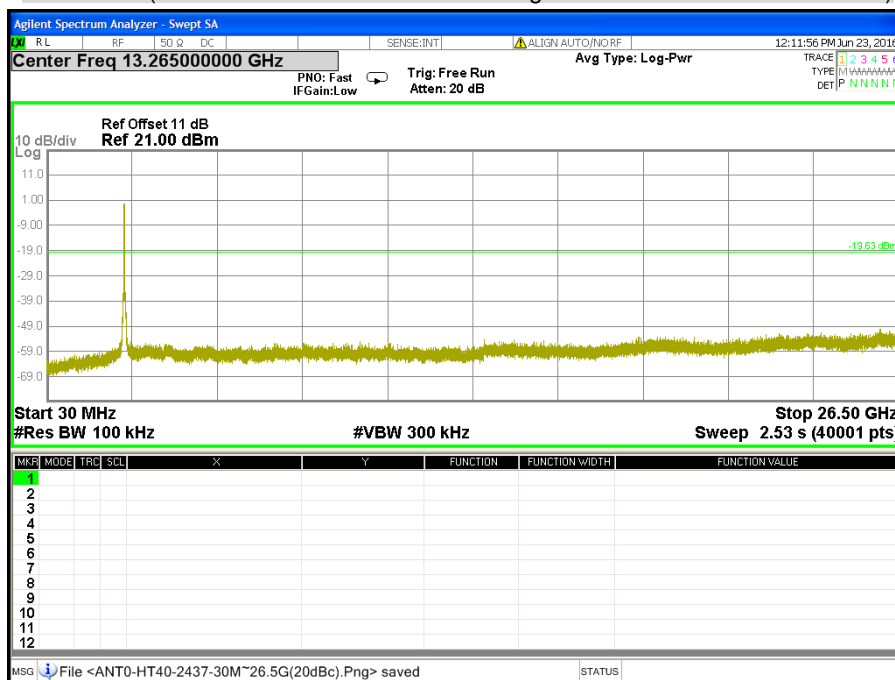


CH High (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain A)

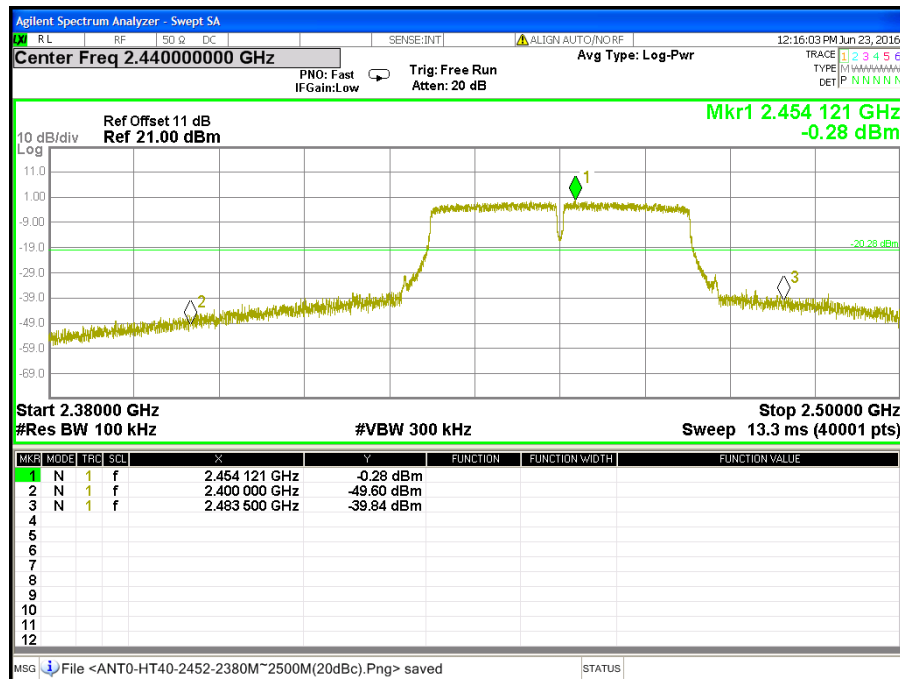


CH High (30MHz ~ 26.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain A)

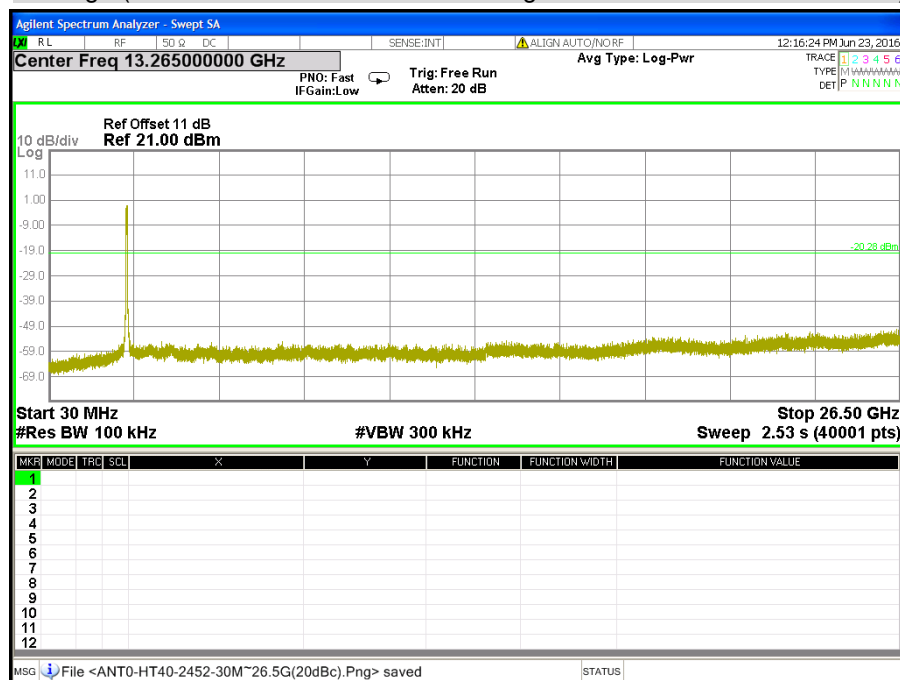


CH Low (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain B)

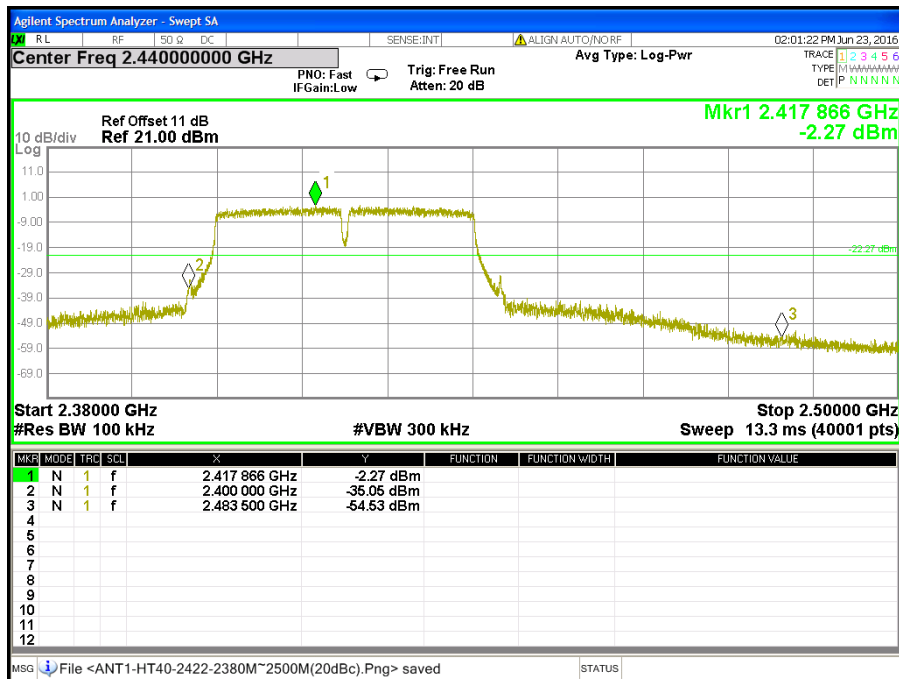


CH Low (30MHz ~ 26.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain B)

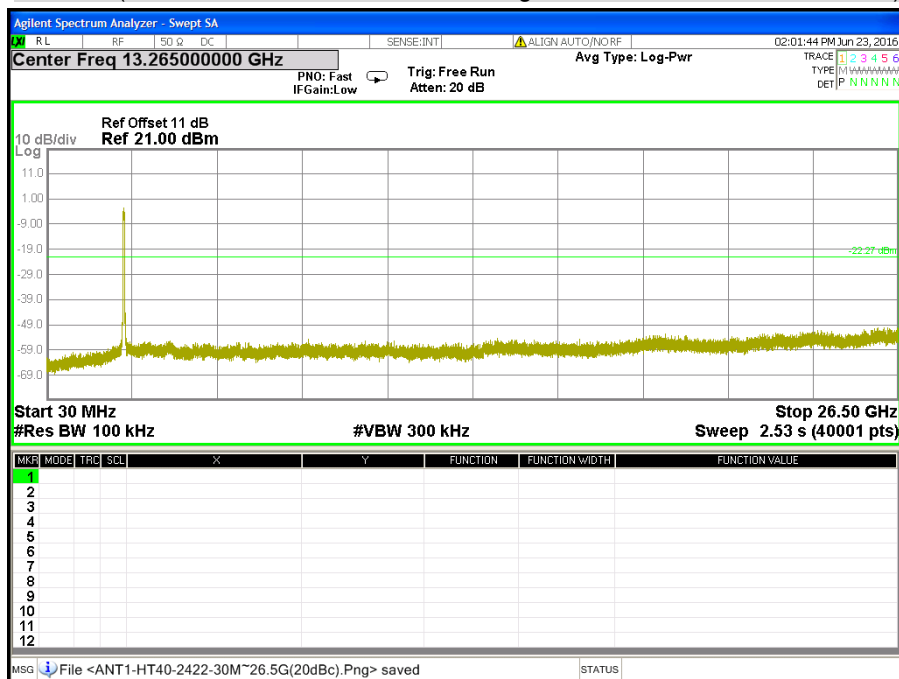


CH Middle (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain B)

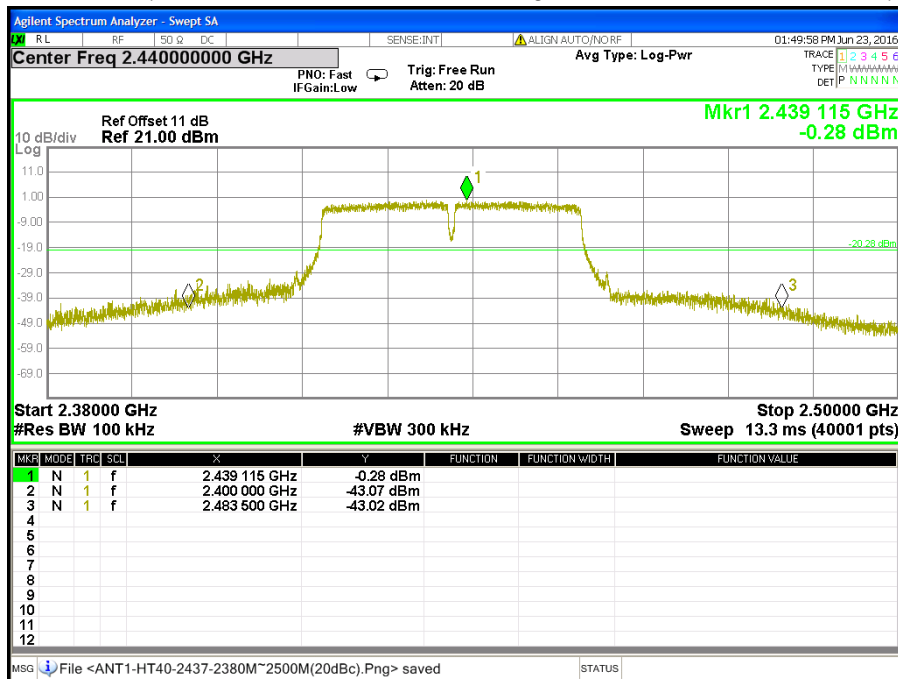


CH Middle (30MHz ~ 26.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain B)

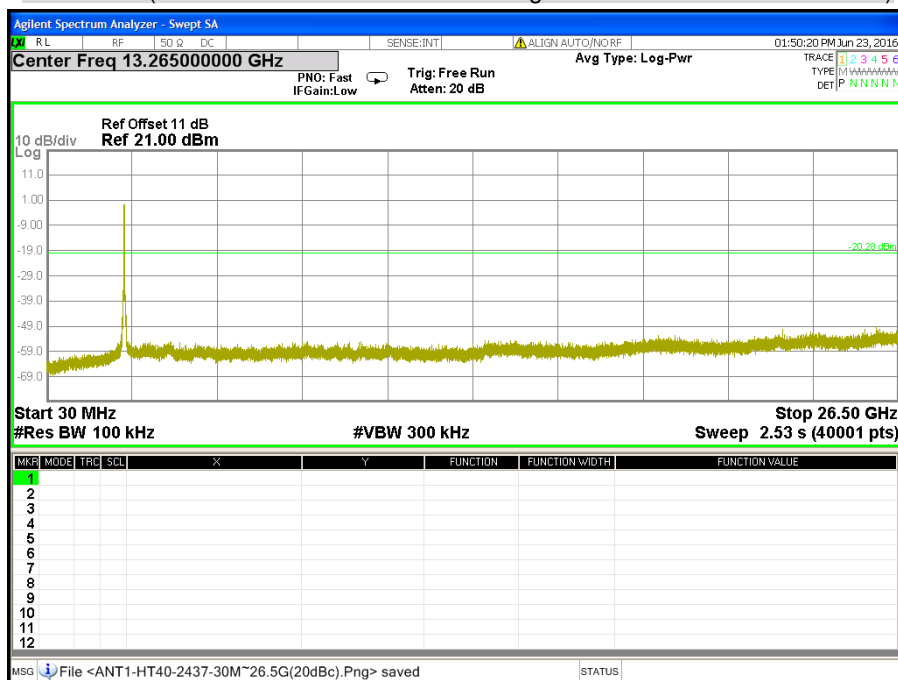

CH High (2.38GHz ~ 2.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain B)

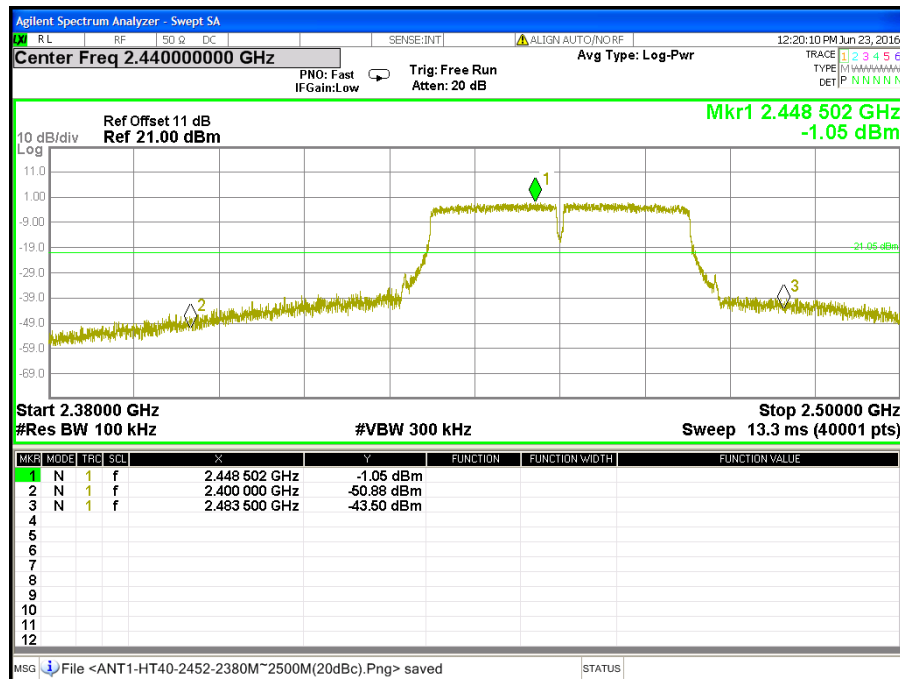

CH High (30MHz ~ 26.5GHz / IEEE 802.11gn HT40 MCS0 Mode / Chain B)

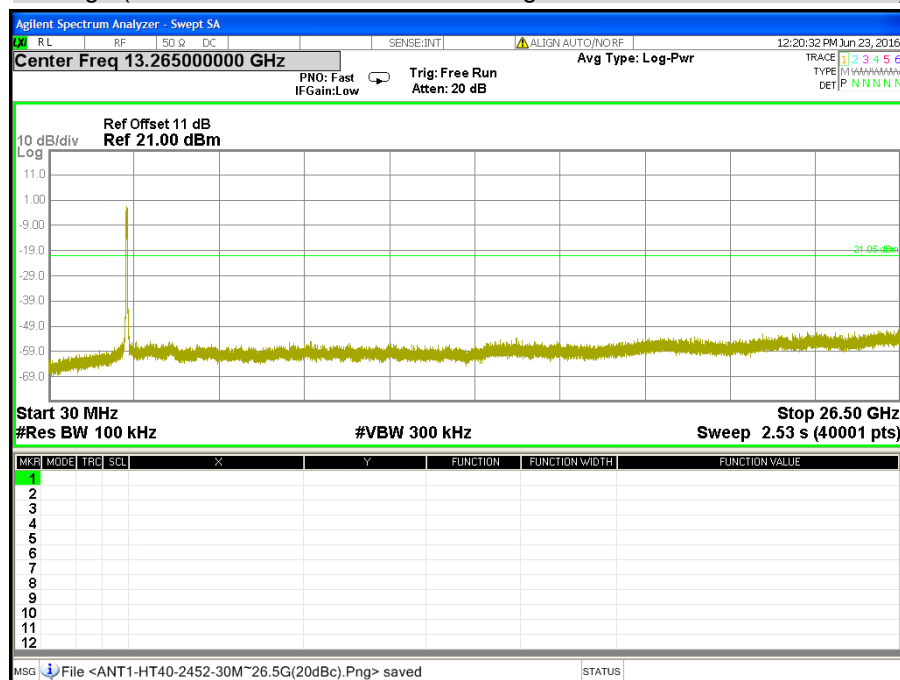

7.7 RADIATED EMISSION

LIMITS

- (1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Remark:

1. ¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2. ² Above 38.6

- (2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

- (3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

Remark: **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- (4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENT

Radiated Emission / 966Chamber_C


Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	04/21/2017
EMI Test Receiver	Rohde & Schwarz	ESCI	101387	10/06/2016
Bi-log Antenna	TESEQ	CBL 6112D	35404	08/04/2016
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-778	08/09/2016
Pre-Amplifier	EMCI	EMC001625	980243	04/11/2017
Pre-Amplifier	COM-POWER	PAM-118A	551043	04/11/2017
Double Ridged Guide Horn Antenna	ETS • LINDGREN	3117	00078732	07/14/2016
Horn Antenna	COM-POWER	AH-840	03077	12/08/2016
Loop Antenna	COM-POWER	AL-130	121060	05/23/2017
Test S/W	E3.815206a			

Remark: Each piece of equipment is scheduled for calibration once a year.


TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission below 1GHz.


9kHz ~ 30MHz

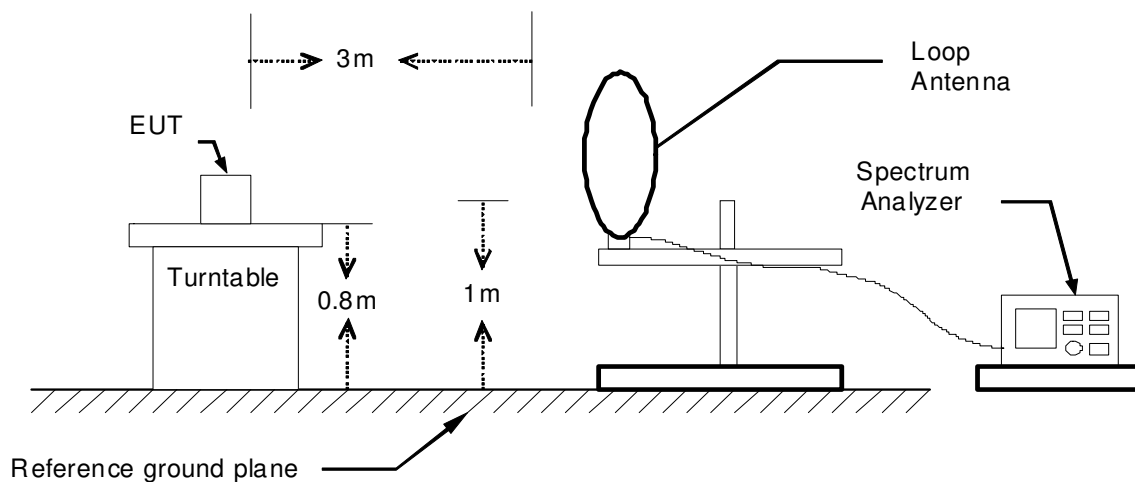

30MHz ~ 1GHz

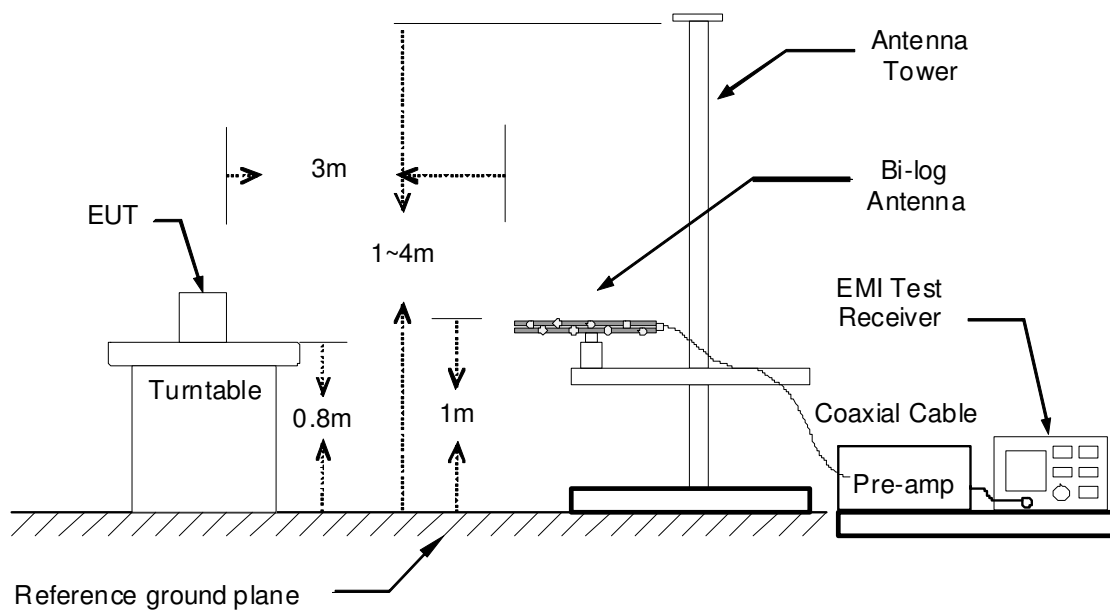

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

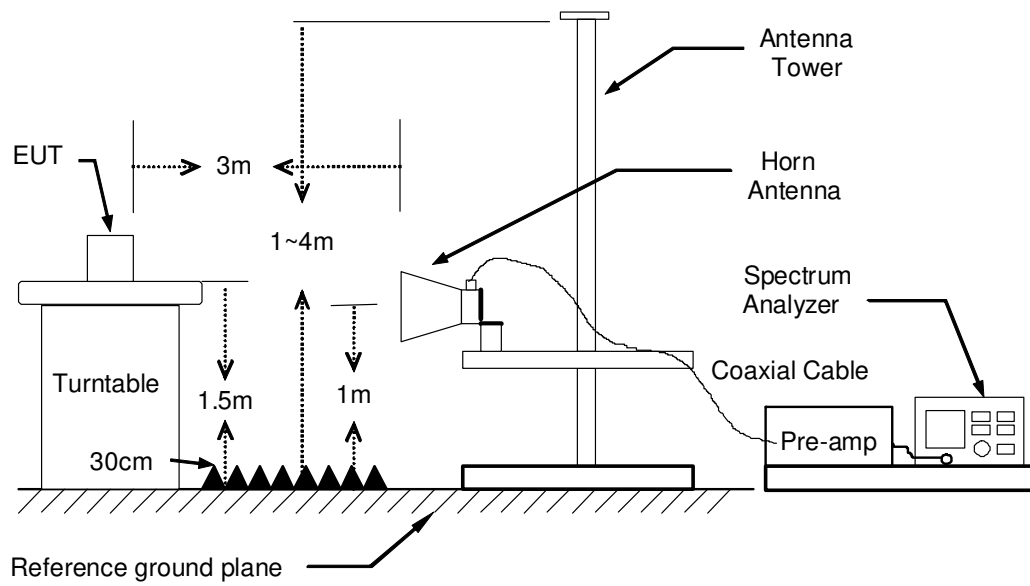

TEST PROCEDURE

1. The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Remark:

1. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.*
2. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.*
3. *The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.*

TEST RESULTS

Below 1 GHz (9kHz ~ 30MHz)

No emission found between lowest internal used/generated frequency to 30MHz.

Below 1 GHz (30MHz ~ 1GHz)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/25
Test Mode	Mode 1	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====	=====	=====	=====	=====	=====	=====	=====	=====
81.41	60.60	-23.10	37.50	40.00	-2.50	267	200	Peak
153.19	57.96	-19.55	38.41	43.50	-5.09	103	200	Peak
198.78	52.97	-20.27	32.70	43.50	-10.80	234	100	Peak
513.06	46.47	-11.49	34.98	46.00	-11.02	71	200	Peak
700.27	41.69	-9.42	32.27	46.00	-13.73	220	100	Peak
749.74	40.00	-8.75	31.25	46.00	-14.75	211	100	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====	=====	=====	=====	=====	=====	=====	=====	=====
42.61	56.70	-18.71	37.99	40.00	-2.01	148	100	QP
59.10	60.10	-24.32	35.78	40.00	-4.22	89	200	QP
80.44	59.45	-23.23	36.22	40.00	-3.78	118	100	QP
153.19	59.77	-19.55	40.22	43.50	-3.28	193	100	Peak
516.94	46.90	-11.43	35.47	46.00	-10.53	216	100	Peak
937.92	39.32	-6.98	32.34	46.00	-13.66	161	100	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
3. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
4. Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).

Above 1 GHz

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Crystal Wu
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11b Mode / TX / CH Low	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1922.00	48.58	2.73	51.31	74.00	-22.69	16	400	Peak
2138.00	49.35	3.75	53.10	74.00	-20.90	128	100	Peak
2484.00	46.97	4.49	51.46	74.00	-22.54	81	400	Peak
4824.00	53.78	-0.07	53.71	54.00	-0.29	188	150	Average
4824.00	53.91	-0.07	53.84	74.00	-20.16	188	150	Peak
5000.00	53.38	0.58	53.96	54.00	-0.04	311	200	Average
5000.00	54.70	0.58	55.28	74.00	-18.72	311	200	Peak
7530.00	44.37	3.27	47.64	74.00	-26.36	241	300	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1838.00	48.30	1.95	50.25	74.00	-23.75	168	400	Peak
2002.00	48.81	3.45	52.26	74.00	-21.74	335	150	Peak
2483.50	47.01	4.48	51.49	74.00	-22.51	76	100	Peak
4830.00	50.70	-0.05	50.65	74.00	-23.35	153	300	Peak
4995.00	51.34	0.56	51.90	74.00	-22.10	48	150	Peak
6945.00	44.12	2.99	47.11	74.00	-26.89	252	300	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Crystal Wu
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11b Mode / TX / CH Middle	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
2390.00	47.14	4.28	51.42	74.00	-22.58	71	200	Peak
2483.50	46.31	4.48	50.79	74.00	-23.21	30	400	Peak
4874.00	53.72	0.11	53.83	54.00	-0.17	182	150	Average
4874.00	53.91	0.11	54.02	74.00	-19.98	182	150	Peak
5000.00	53.41	0.58	53.99	54.00	-0.01	301	200	Average
5000.00	54.73	0.58	55.31	74.00	-18.69	301	200	Peak
6990.00	43.87	2.99	46.86	74.00	-27.14	247	100	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1838.00	48.30	1.95	50.25	74.00	-23.75	168	400	Peak
2002.00	48.81	3.45	52.26	74.00	-21.74	335	150	Peak
2483.50	47.01	4.48	51.49	74.00	-22.51	76	100	Peak
4874.00	53.34	0.11	53.45	54.00	-0.55	198	150	Average
4874.00	53.98	0.11	54.09	74.00	-19.91	198	150	Peak
5000.00	51.51	0.58	52.09	74.00	-21.91	14	100	Peak
7005.00	45.82	2.99	48.81	74.00	-25.19	360	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result – Limit
Remark Peak = Result(PK) – Limit(PK)
Remark AVG = Result(AV) – Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Kenneth Huang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11b Mode / TX / CH High	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
2390.00	47.33	4.28	51.61	74.00	-22.39	312	250	Peak
4924.00	53.32	0.30	53.62	54.00	-0.38	177	150	Average
4924.00	53.60	0.30	53.90	74.00	-20.10	177	150	Peak
5000.00	53.01	0.58	53.59	54.00	-0.41	298	200	Average
5000.00	54.10	0.58	54.68	74.00	-19.32	298	200	Peak
6930.00	44.11	2.99	47.10	74.00	-26.90	108	150	Peak
10425.00	44.39	6.05	50.44	74.00	-23.56	192	150	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
2390.00	47.13	4.28	51.41	74.00	-22.59	3	100	Peak
4920.00	52.25	0.28	52.53	74.00	-21.47	201	150	Peak
4995.00	51.45	0.56	52.01	74.00	-21.99	39	200	Peak
7005.00	45.70	2.99	48.69	74.00	-25.31	160	150	Peak
7380.00	46.81	3.20	50.01	74.00	-23.99	194	250	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result – Limit
Remark Peak = Result(PK) – Limit(PK)
Remark AVG = Result(AV) – Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11g Mode / TX / CH Low	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2000.00	48.12	3.45	51.57	74.00	-22.43	258	200	Peak
2392.00	49.08	4.29	53.37	54.00	-0.63	174	200	Average
2392.00	62.85	4.29	67.14	74.00	-6.86	174	200	Peak
2484.00	46.33	4.49	50.82	74.00	-23.18	88	100	Peak
4830.00	50.94	-0.05	50.89	74.00	-23.11	204	100	Peak
4995.00	49.62	0.56	50.18	54.00	-3.82	290	200	Average
4995.00	54.81	0.56	55.37	74.00	-18.63	290	200	Peak
7920.00	44.28	3.38	47.66	74.00	-26.34	58	200	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
1846.00	48.70	2.02	50.72	74.00	-23.28	109	100	Peak
2392.00	49.63	4.29	53.92	54.00	-0.08	287	200	Average
2392.00	67.47	4.29	71.76	74.00	-2.24	287	200	Peak
2484.00	48.34	4.49	52.83	74.00	-21.17	113	100	Peak
4815.00	51.49	-0.11	51.38	74.00	-22.62	173	200	Peak
4995.00	51.55	0.56	52.11	74.00	-21.89	33	200	Peak
7230.00	46.87	3.11	49.98	74.00	-24.02	183	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result – Limit
Remark Peak = Result(PK) – Limit(PK)
Remark AVG = Result(AV) – Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11g Mode / TX / CH Middle	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1838.00	50.52	1.95	52.47	74.00	-21.53	340	100	Peak
2388.00	43.79	4.28	48.07	54.00	-5.93	181	200	Average
2388.00	54.43	4.28	58.71	74.00	-15.29	181	200	Peak
2484.00	42.65	4.49	47.14	54.00	-6.86	121	200	Average
2484.00	55.53	4.49	60.02	74.00	-13.98	121	200	Peak
4890.00	43.83	0.17	44.00	54.00	-10.00	189	200	Average
4890.00	53.84	0.17	54.01	74.00	-19.99	189	200	Peak
4995.00	49.03	0.56	49.59	54.00	-4.41	300	200	Average
4995.00	55.03	0.56	55.59	74.00	-18.41	300	200	Peak
7320.00	44.09	3.16	47.25	74.00	-26.75	86	200	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1778.00	51.05	1.39	52.44	74.00	-21.56	35	100	Peak
2394.00	45.43	4.29	49.72	54.00	-4.28	287	200	Average
2394.00	57.71	4.29	62.00	74.00	-12.00	287	200	Peak
2484.00	44.89	4.49	49.38	54.00	-4.62	81	100	Average
2484.00	55.17	4.49	59.66	74.00	-14.34	81	100	Peak
4890.00	44.01	0.17	44.18	54.00	-9.82	214	200	Average
4890.00	54.64	0.17	54.81	74.00	-19.19	214	200	Peak
4995.00	51.93	0.56	52.49	74.00	-21.51	56	200	Peak
7335.00	40.24	3.17	43.41	54.00	-10.59	162	200	Average
7335.00	51.54	3.17	54.71	74.00	-19.29	162	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result – Limit
Remark Peak = Result(PK) – Limit(PK)
Remark AVG = Result(AV) – Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11g Mode / TX / CH High	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
1988.00	48.90	3.34	52.24	74.00	-21.76	178	200	Peak
2316.00	43.27	4.13	47.40	54.00	-6.60	344	100	Average
2316.00	50.27	4.13	54.40	74.00	-19.60	344	100	Peak
2488.00	49.06	4.49	53.55	54.00	-0.45	47	200	Average
2488.00	58.95	4.49	63.44	74.00	-10.56	47	200	Peak
4920.00	47.71	0.28	47.99	74.00	-26.01	204	100	Peak
4995.00	49.33	0.56	49.89	54.00	-4.11	297	200	Average
4995.00	54.95	0.56	55.51	74.00	-18.49	297	200	Peak
7110.00	45.13	3.05	48.18	74.00	-25.82	269	200	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2042.00	49.14	3.54	52.68	74.00	-21.32	108	200	Peak
2388.00	41.21	4.28	45.49	54.00	-8.51	338	100	Average
2388.00	51.22	4.28	55.50	74.00	-18.50	338	100	Peak
2484.00	48.05	4.49	52.54	54.00	-1.46	300	100	Average
2484.00	63.54	4.49	68.03	74.00	-5.97	300	100	Peak
4920.00	49.27	0.28	49.55	74.00	-24.45	219	200	Peak
4995.00	51.87	0.56	52.43	74.00	-21.57	44	200	Peak
7395.00	46.85	3.20	50.05	74.00	-23.95	180	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result – Limit
Remark Peak = Result(PK) – Limit(PK)
Remark AVG = Result(AV) – Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2042.00	49.55	3.54	53.09	74.00	-20.91	0	200	Peak
2392.00	49.21	4.29	53.50	54.00	-0.50	49	100	Average
2392.00	62.92	4.29	67.21	74.00	-6.79	49	100	Peak
2462.00	50.75	4.44	55.19	74.00	-18.81	319	200	Peak
4830.00	51.72	-0.05	51.67	74.00	-22.33	145	200	Peak
4995.00	49.31	0.56	49.87	54.00	-4.13	301	200	Average
4995.00	55.32	0.56	55.88	74.00	-18.12	301	200	Peak
6990.00	43.33	2.99	46.32	74.00	-27.68	254	100	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
1634.00	51.30	0.05	51.35	74.00	-22.65	104	200	Peak
2378.00	49.35	4.26	53.61	54.00	-0.39	94	200	Average
2378.00	57.90	4.26	62.16	74.00	-11.84	94	200	Peak
2486.00	48.29	4.49	52.78	74.00	-21.22	236	200	Peak
4830.00	50.31	-0.05	50.26	74.00	-23.74	161	200	Peak
4995.00	51.68	0.56	52.24	74.00	-21.76	46	200	Peak
6150.00	43.89	2.41	46.30	74.00	-27.70	135	100	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1906.00	51.30	2.58	53.88	74.00	-20.12	33	200	Peak
2392.00	42.40	4.29	46.69	54.00	-7.31	101	100	Average
2392.00	55.16	4.29	59.45	74.00	-14.55	101	100	Peak
2488.00	43.79	4.49	48.28	54.00	-5.72	187	200	Average
2488.00	56.06	4.49	60.55	74.00	-13.45	187	200	Peak
4890.00	44.07	0.17	44.24	54.00	-9.76	197	200	Average
4890.00	57.66	0.17	57.83	74.00	-16.17	197	200	Peak
4995.00	49.49	0.56	50.05	54.00	-3.95	291	200	Average
4995.00	54.50	0.56	55.06	74.00	-18.94	291	200	Peak
7020.00	44.50	3.00	47.50	74.00	-26.50	353	100	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1614.00	51.15	-0.13	51.02	74.00	-22.98	44	100	Peak
2392.00	44.19	4.29	48.48	54.00	-5.52	319	100	Average
2392.00	57.15	4.29	61.44	74.00	-12.56	319	100	Peak
2484.00	44.25	4.49	48.74	54.00	-5.26	246	200	Average
2484.00	58.49	4.49	62.98	74.00	-11.02	246	200	Peak
4875.00	43.42	0.11	43.53	54.00	-10.47	232	200	Average
4875.00	54.89	0.12	55.01	74.00	-18.99	232	200	Peak
4995.00	51.99	0.56	52.55	74.00	-21.45	41	200	Peak
6960.00	43.74	2.99	46.73	74.00	-27.27	317	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result – Limit
Remark Peak = Result(PK) – Limit(PK)
Remark AVG = Result(AV) – Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
1878.00	49.79	2.32	52.11	74.00	-21.89	250	100	Peak
2386.00	41.82	4.28	46.10	54.00	-7.90	175	200	Average
2386.00	49.82	4.28	54.10	74.00	-19.90	175	200	Peak
2484.00	48.96	4.49	53.45	54.00	-0.55	44	100	Average
2484.00	57.99	4.49	62.48	74.00	-11.52	44	100	Peak
4995.00	49.95	0.56	50.51	54.00	-3.49	309	200	Average
4995.00	54.95	0.56	55.51	74.00	-18.49	309	200	Peak
6525.00	43.39	3.00	46.39	74.00	-27.61	35	100	Peak
7680.00	43.85	3.31	47.16	74.00	-26.84	73	200	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
1974.00	49.87	3.21	53.08	74.00	-20.92	5	200	Peak
2390.00	43.45	4.28	47.73	54.00	-6.27	208	200	Average
2390.00	50.46	4.28	54.74	74.00	-19.26	208	200	Peak
2484.00	48.83	4.49	53.32	54.00	-0.68	246	200	Average
2484.00	61.47	4.49	65.96	74.00	-8.04	246	200	Peak
4995.00	50.57	0.56	51.13	74.00	-22.87	33	200	Peak
6330.00	43.10	2.71	45.81	74.00	-28.19	16	200	Peak
7395.00	47.44	3.20	50.64	74.00	-23.36	186	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11gn HT40 MCS0 Mode / TX / CH Low	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2096.00	49.33	3.66	52.99	74.00	-21.01	338	100	Peak
2398.00	49.51	4.30	53.81	54.00	-0.19	122	200	Average
2398.00	63.49	4.30	67.79	74.00	-6.21	122	200	Peak
2486.00	40.30	4.49	44.79	54.00	-9.21	173	200	Average
2486.00	52.31	4.49	56.80	74.00	-17.20	173	200	Peak
4845.00	44.58	0.00	44.58	74.00	-29.42	194	200	Peak
4995.00	49.53	0.56	50.09	54.00	-3.91	301	200	Average
4995.00	54.53	0.56	55.09	74.00	-18.91	301	200	Peak
6960.00	43.77	2.99	46.76	74.00	-27.24	111	200	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
1888.00	49.12	2.41	51.53	74.00	-22.47	105	200	Peak
2394.00	48.73	4.29	53.02	54.00	-0.98	96	200	Average
2394.00	63.62	4.29	67.91	74.00	-6.09	96	200	Peak
2484.00	41.82	4.49	46.31	54.00	-7.69	216	200	Average
2484.00	50.04	4.49	54.53	74.00	-19.47	216	200	Peak
4860.00	44.67	0.06	44.73	74.00	-29.27	232	100	Peak
4995.00	51.39	0.56	51.95	74.00	-22.05	46	200	Peak
7005.00	44.44	2.99	47.43	74.00	-26.57	141	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result – Limit
Remark Peak = Result(PK) – Limit(PK)
Remark AVG = Result(AV) – Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11gn HT40 MCS0 Mode / TX / CH Middle	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1784.00	48.78	1.45	50.23	74.00	-23.77	202	200	Peak
2392.00	47.95	4.29	52.24	54.00	-1.76	44	100	Average
2392.00	59.41	4.29	63.70	74.00	-10.30	44	100	Peak
2484.00	48.66	4.49	53.15	54.00	-0.85	141	100	Average
2484.00	60.72	4.49	65.21	74.00	-8.79	141	100	Peak
4890.00	51.95	0.17	52.12	74.00	-21.88	199	200	Peak
4995.00	49.36	0.56	49.92	54.00	-4.08	304	200	Average
4995.00	54.36	0.56	54.92	74.00	-19.08	304	200	Peak
7710.00	44.99	3.32	48.31	74.00	-25.69	50	200	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1650.00	48.08	0.20	48.28	74.00	-25.72	52	100	Peak
2392.00	47.27	4.29	51.56	54.00	-2.44	46	100	Average
2392.00	61.11	4.29	65.40	74.00	-8.60	46	100	Peak
2484.00	48.47	4.49	52.96	54.00	-1.04	320	100	Average
2484.00	62.30	4.49	66.79	74.00	-7.21	320	100	Peak
4890.00	51.91	0.17	52.08	74.00	-21.92	165	200	Peak
4995.00	51.72	0.56	52.28	74.00	-21.72	40	200	Peak
7065.00	43.33	3.03	46.36	74.00	-27.64	223	100	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result – Limit
Remark Peak = Result(PK) – Limit(PK)
Remark AVG = Result(AV) – Limit(AV)

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Audi Chang
Test Model	DL4480V	Test Date	2016/06/21
Test Mode	IEEE 802.11gn HT40 MCS0 Mode / TX / CH High	Temp. & Humidity	20°C, 53%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1666.00	47.96	0.35	48.31	74.00	-25.69	167	200	Peak
2392.00	42.96	4.29	47.25	54.00	-6.75	51	100	Average
2392.00	49.96	4.29	54.25	74.00	-19.75	51	100	Peak
2484.00	49.13	4.49	53.62	54.00	-0.38	117	200	Average
2484.00	60.49	4.49	64.98	74.00	-9.02	117	200	Peak
4905.00	46.68	0.23	46.91	74.00	-27.09	155	200	Peak
4995.00	49.73	0.56	50.29	54.00	-3.71	300	200	Average
4995.00	54.74	0.56	55.30	74.00	-18.70	300	200	Peak
6900.00	44.23	2.99	47.22	74.00	-26.78	117	100	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1812.00	48.38	1.71	50.09	74.00	-23.91	256	100	Peak
2392.00	43.77	4.29	48.06	54.00	-5.94	66	100	Average
2392.00	53.36	4.29	57.65	74.00	-16.35	66	100	Peak
2488.00	48.75	4.49	53.24	54.00	-0.76	321	100	Average
2488.00	61.80	4.49	66.29	74.00	-7.71	321	100	Peak
4905.00	49.56	0.23	49.79	74.00	-24.21	175	200	Peak
4995.00	51.90	0.56	52.46	74.00	-21.54	39	200	Peak
7005.00	43.67	2.99	46.66	74.00	-27.34	353	100	Peak


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result – Limit
Remark Peak = Result(PK) – Limit(PK)
Remark AVG = Result(AV) – Limit(AV)

Restricted Band Edges


Detector mode: Peak

Polarity: Horizontal

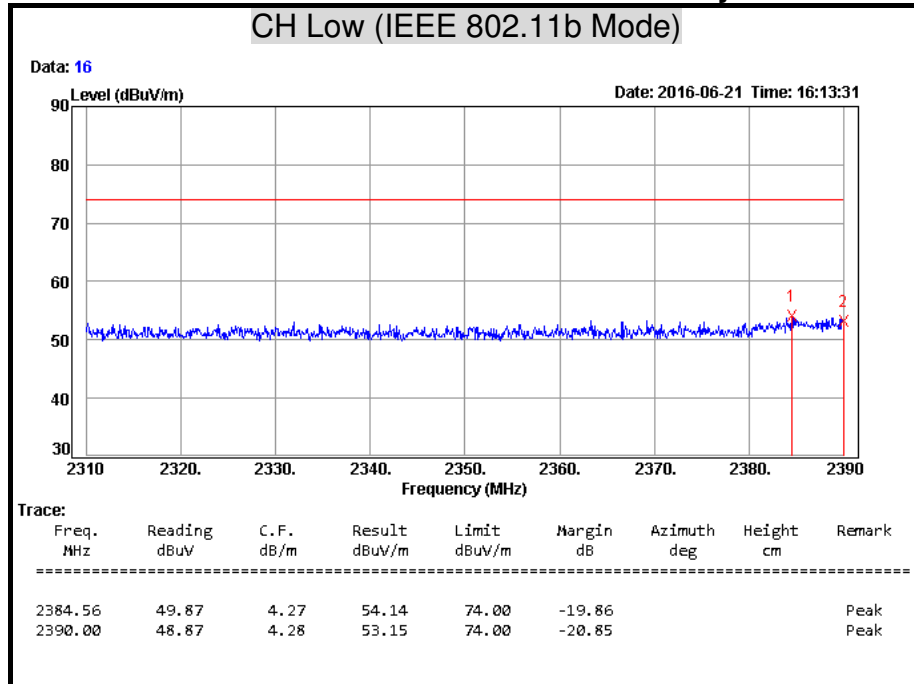

Detector mode: Average

Polarity: Horizontal

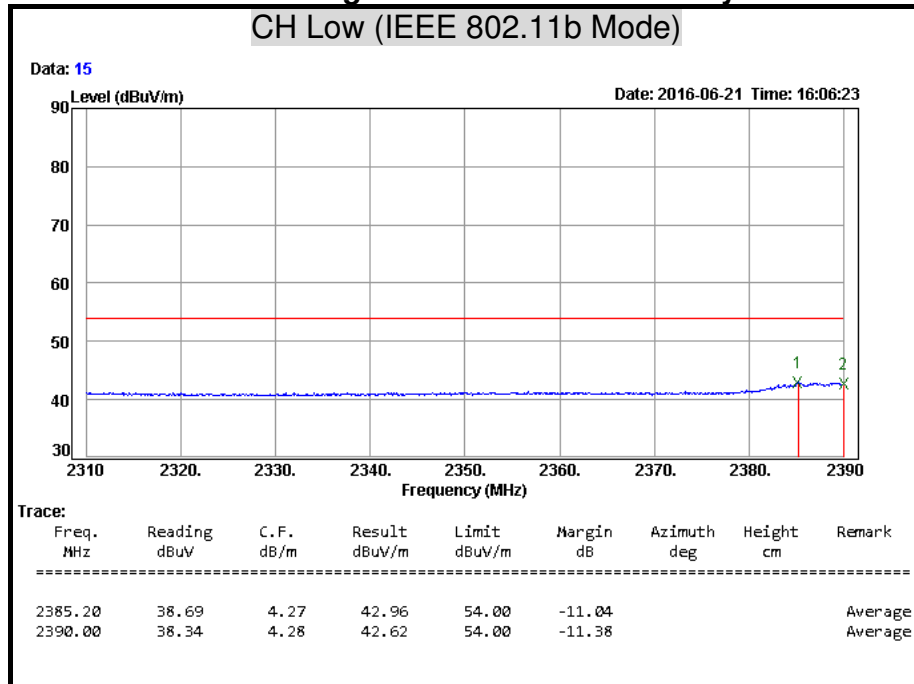


Detector mode: Peak

Polarity: Vertical

CH Low (IEEE 802.11b Mode)

Data: 14

Date: 2016-06-21 Time: 16:02:41

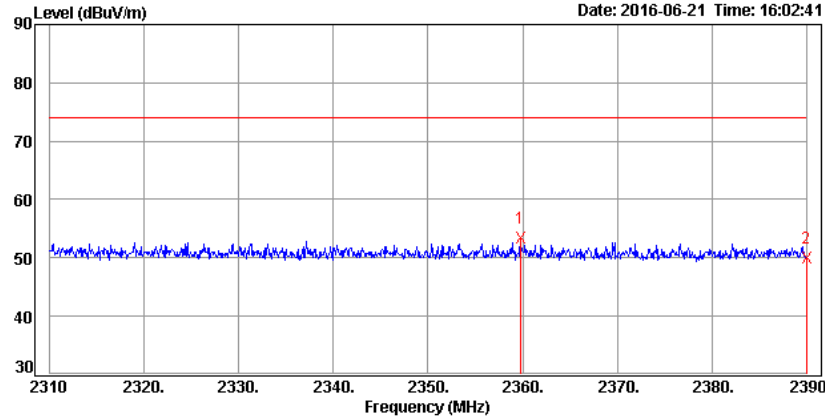

Trace:									
Freq.	Reading	C.F.	Result	Limit	Margin	Azimuth	Height	Remark	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	deg	cm		
2359.76	49.19	4.22	53.41	74.00	-20.59			Peak	
2390.00	45.78	4.28	50.06	74.00	-23.94			Peak	


Detector mode: Average

Polarity: Vertical

CH Low (IEEE 802.11b Mode)

Data: 13

Date: 2016-06-21 Time: 15:53:31

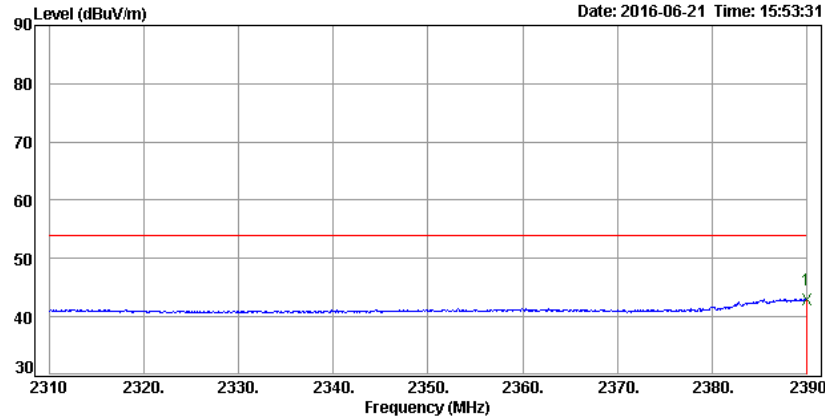

Trace:									
Freq.	Reading	C.F.	Result	Limit	Margin	Azimuth	Height	Remark	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	deg	cm		
2390.00	38.65	4.28	42.93	54.00	-11.07			Average	


Detector mode: Peak

Polarity: Horizontal

CH High (IEEE 802.11b Mode)

Data: 18

Date: 2016-06-21 Time: 16:12:49

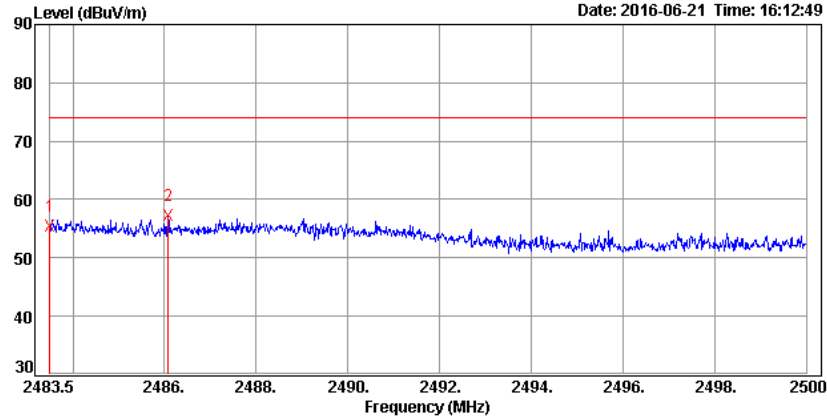

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	50.99	4.48	55.47	74.00	-18.53			Peak
2486.07	52.69	4.49	57.18	74.00	-16.82			Peak


Detector mode: Average

Polarity: Horizontal

CH High (IEEE 802.11b Mode)

Data: 17

Date: 2016-06-21 Time: 16:13:09

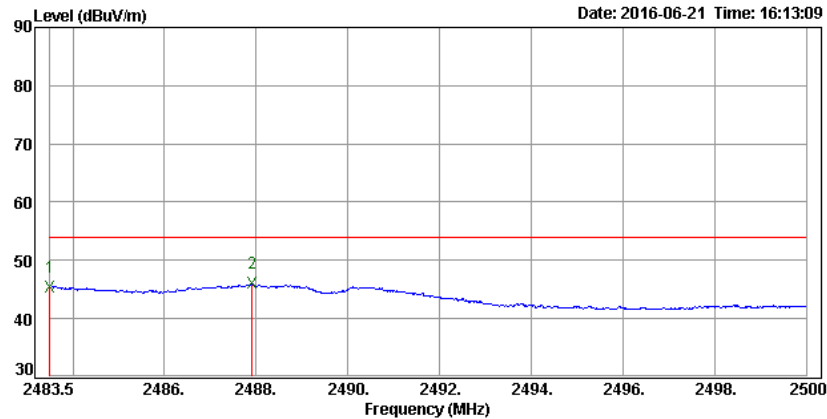

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	40.94	4.48	45.42	54.00	-8.58			Average
2487.91	41.48	4.49	45.97	54.00	-8.03			Average


Detector mode: Peak

Polarity: Vertical

CH High (IEEE 802.11b Mode)

Data: 20

Date: 2016-06-21 Time: 16:18:04

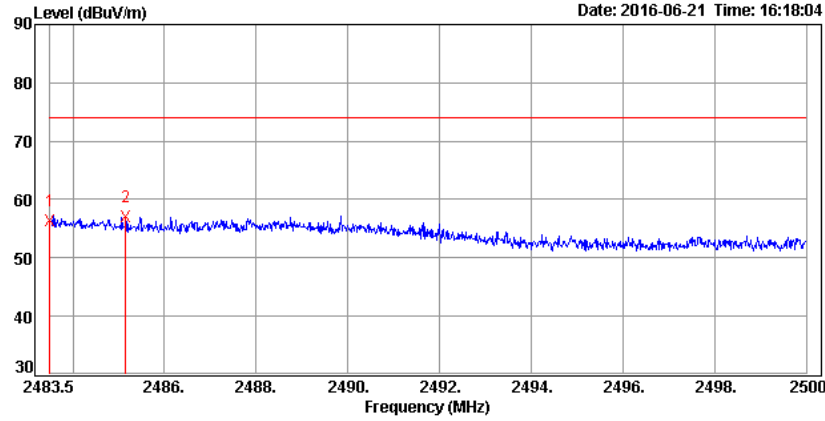

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	51.89	4.48	56.37	74.00	-17.63			Peak
2485.15	52.64	4.49	57.13	74.00	-16.87			Peak


Detector mode: Average

Polarity: Vertical

CH High (IEEE 802.11b Mode)

Data: 19

Date: 2016-06-21 Time: 16:17:33

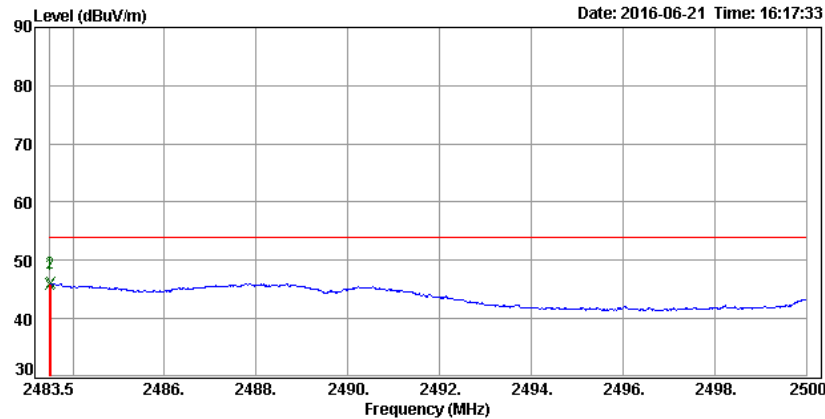

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	41.41	4.48	45.89	54.00	-8.11			Average
2483.52	41.59	4.48	46.07	54.00	-7.93			Average


Detector mode: Peak

Polarity: Horizontal

CH Low (IEEE 802.11g Mode)

Data: 26

Date: 2016-06-21 Time: 16:42:53

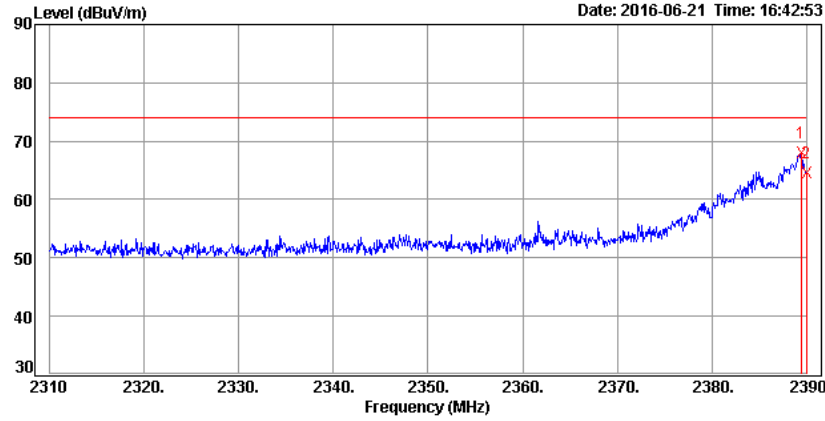

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2389.44	63.80	4.28	68.08	74.00	-5.92			Peak
2390.00	60.30	4.28	64.58	74.00	-9.42			Peak


Detector mode: Average

Polarity: Horizontal

CH Low (IEEE 802.11g Mode)

Data: 25

Date: 2016-06-21 Time: 16:42:21

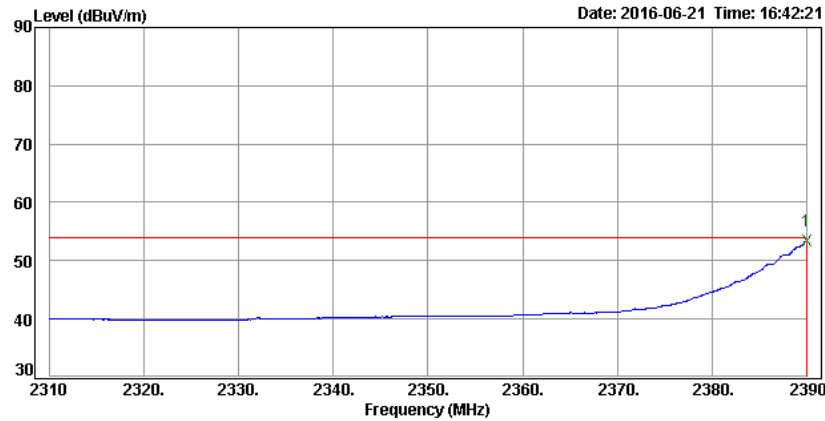

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2390.00	49.08	4.28	53.36	54.00	-0.64			Average


Detector mode: Peak

Polarity: Vertical

CH Low (IEEE 802.11g Mode)

Data: 28

Date: 2016-06-21 Time: 16:46:58

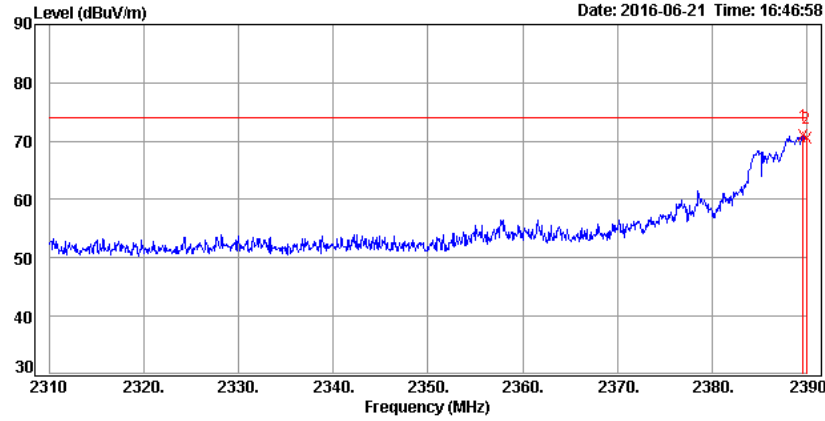

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2389.68	66.57	4.28	70.85	74.00	-3.15			Peak
2390.00	66.33	4.28	70.61	74.00	-3.39			Peak


Detector mode: Average

Polarity: Vertical

CH Low (IEEE 802.11g Mode)

Data: 27

Date: 2016-06-21 Time: 16:46:16

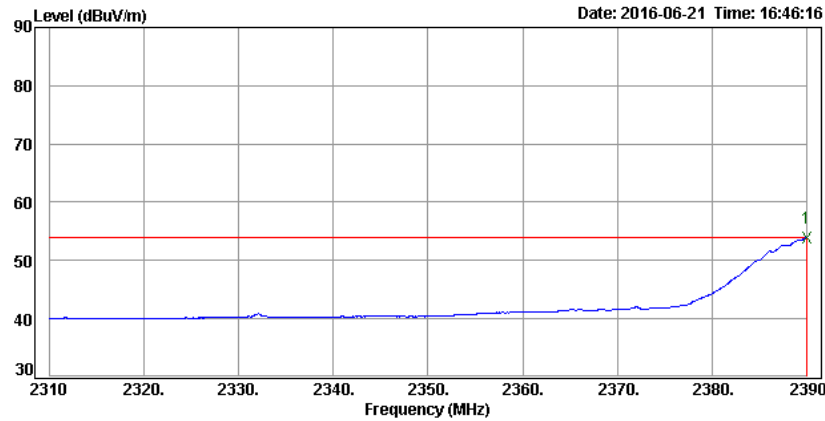

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2390.00	49.63	4.28	53.91	54.00	-0.09			Average


Detector mode: Peak

Polarity: Horizontal

CH High (IEEE 802.11g Mode)

Data: 22

Date: 2016-06-21 Time: 16:32:10

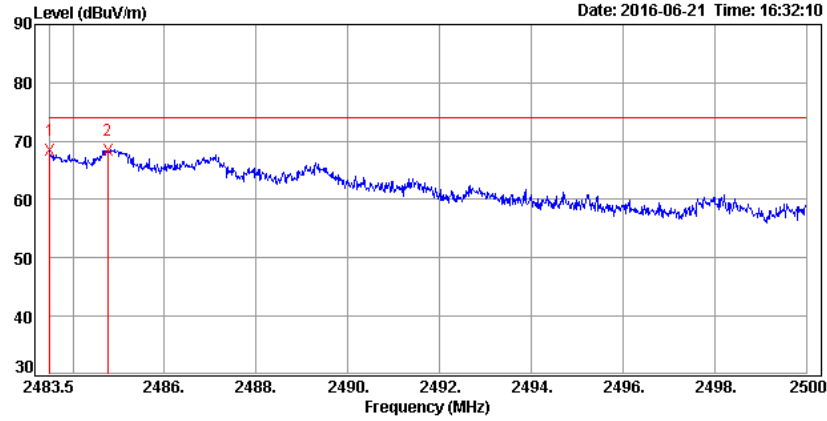

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	63.91	4.48	68.39	74.00	-5.61			Peak
2484.75	63.99	4.49	68.48	74.00	-5.52			Peak


Detector mode: Average

Polarity: Horizontal

CH High (IEEE 802.11g Mode)

Data: 21

Date: 2016-06-21 Time: 16:31:29

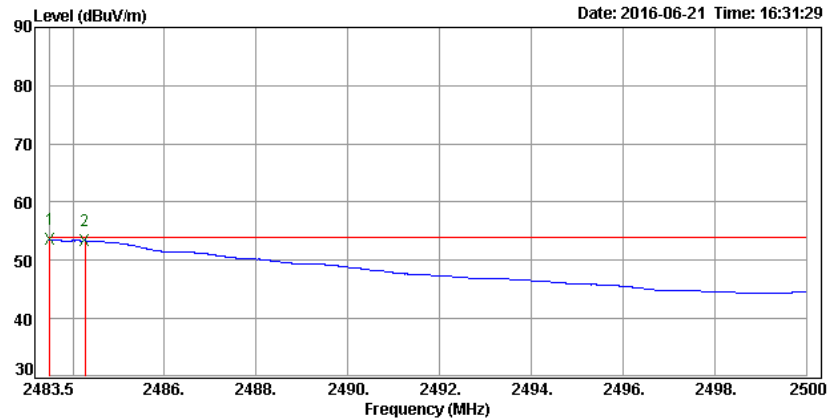

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	49.08	4.48	53.56	54.00	-0.44			Average
2484.26	48.91	4.49	53.40	54.00	-0.60			Average


Detector mode: Peak

Polarity: Vertical

CH High (IEEE 802.11g Mode)

Data: 24

Date: 2016-06-21 Time: 16:36:11

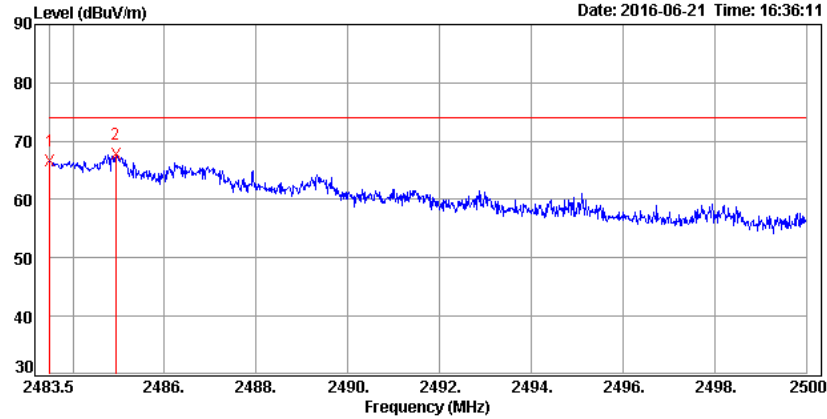

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	62.08	4.48	66.56	74.00	-7.44			Peak
2484.94	63.31	4.49	67.80	74.00	-6.20			Peak


Detector mode: Average

Polarity: Vertical

CH High (IEEE 802.11g Mode)

Data: 23

Date: 2016-06-21 Time: 16:35:49

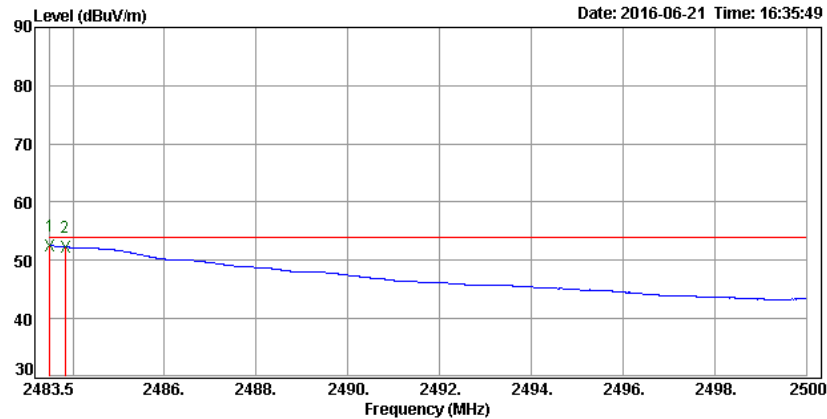

Trace:


Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2483.50	48.05	4.48	52.53	54.00	-1.47			Average
2483.83	47.80	4.49	52.29	54.00	-1.71			Average

Detector mode: Peak

Polarity: Horizontal

CH Low (IEEE 802.11gn HT20 MCS0 Mode)

Data: 32

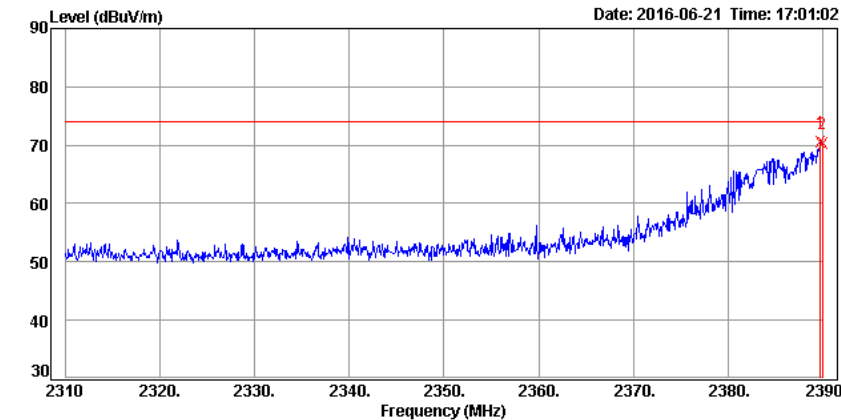

Trace:


Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2389.84	66.11	4.28	70.39	74.00	-3.61			Peak
2390.00	66.04	4.28	70.32	74.00	-3.68			Peak

Detector mode: Average

Polarity: Horizontal

CH Low (IEEE 802.11gn HT20 MCS0 Mode)

Data: 31

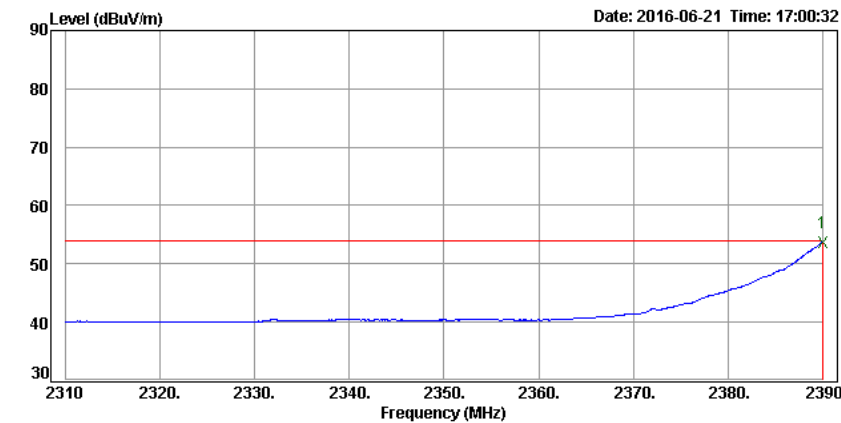

Trace:


Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2390.00	49.35	4.28	53.63	54.00	-0.37			Average

Detector mode: Peak

Polarity: Vertical

CH Low (IEEE 802.11gn HT20 MCS0 Mode)

Data: 30

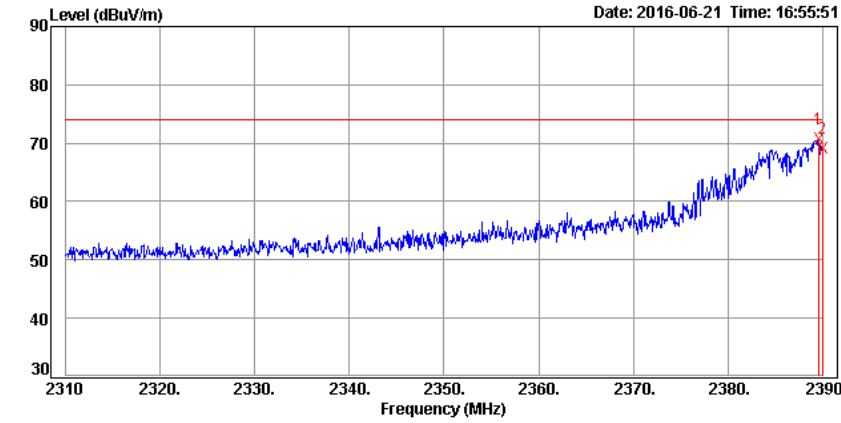

Trace:


Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2389.60	66.51	4.28	70.79	74.00	-3.21			Peak
2390.00	64.93	4.28	69.21	74.00	-4.79			Peak

Detector mode: Average

Polarity: Vertical

CH Low (IEEE 802.11gn HT20 MCS0 Mode)

Data: 29

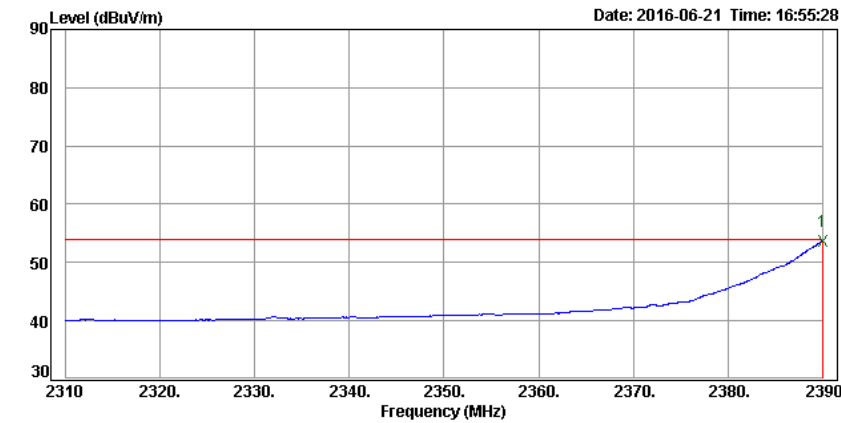


Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2390.00	49.35	4.28	53.63	54.00	-0.37			Average


Detector mode: Peak

Polarity: Horizontal

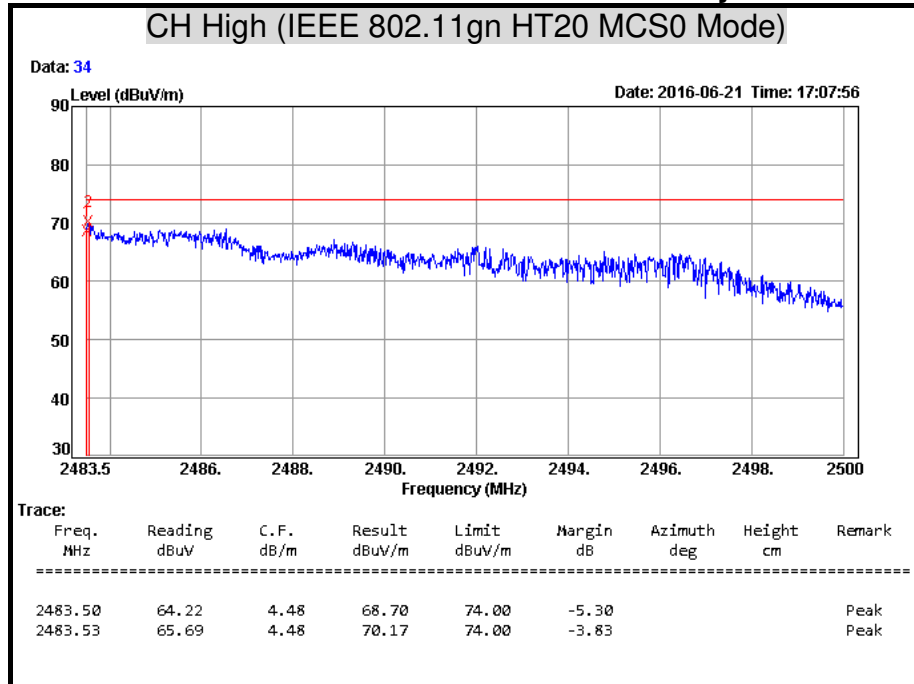


Detector mode: Average

Polarity: Horizontal

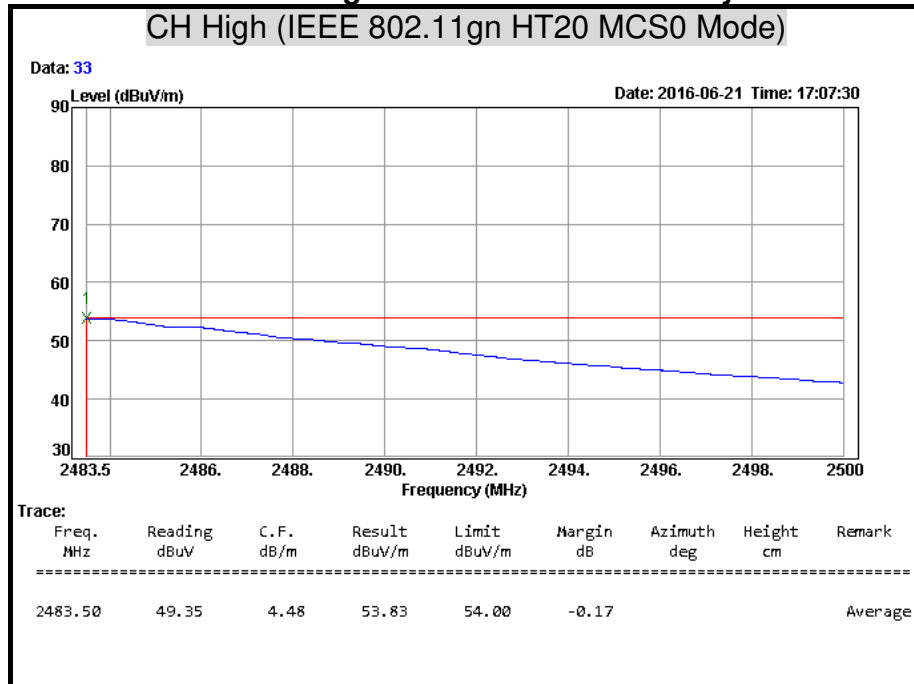


Detector mode: Peak

Polarity: Vertical

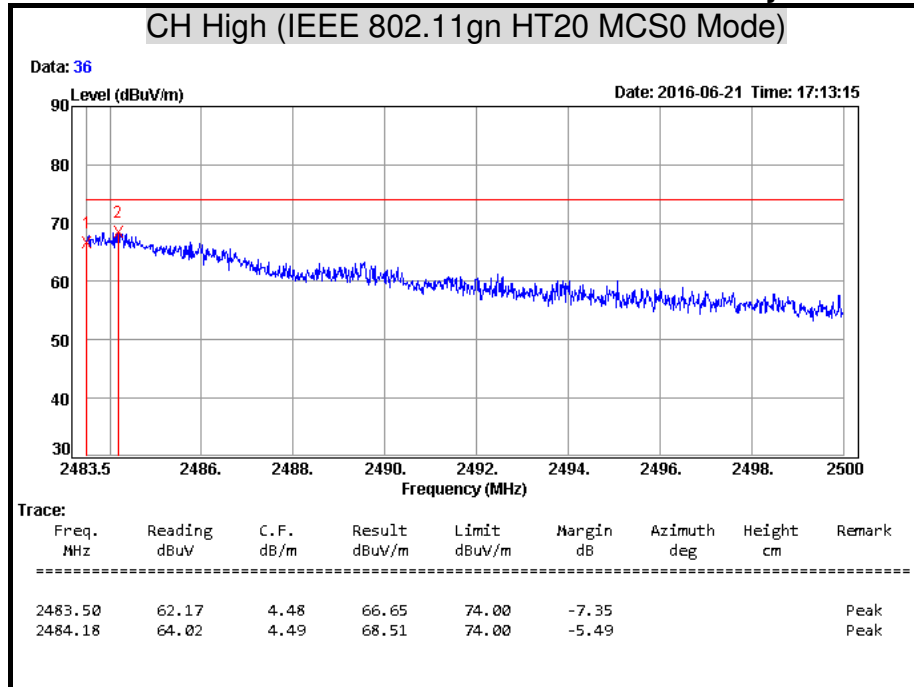

Detector mode: Average

Polarity: Vertical

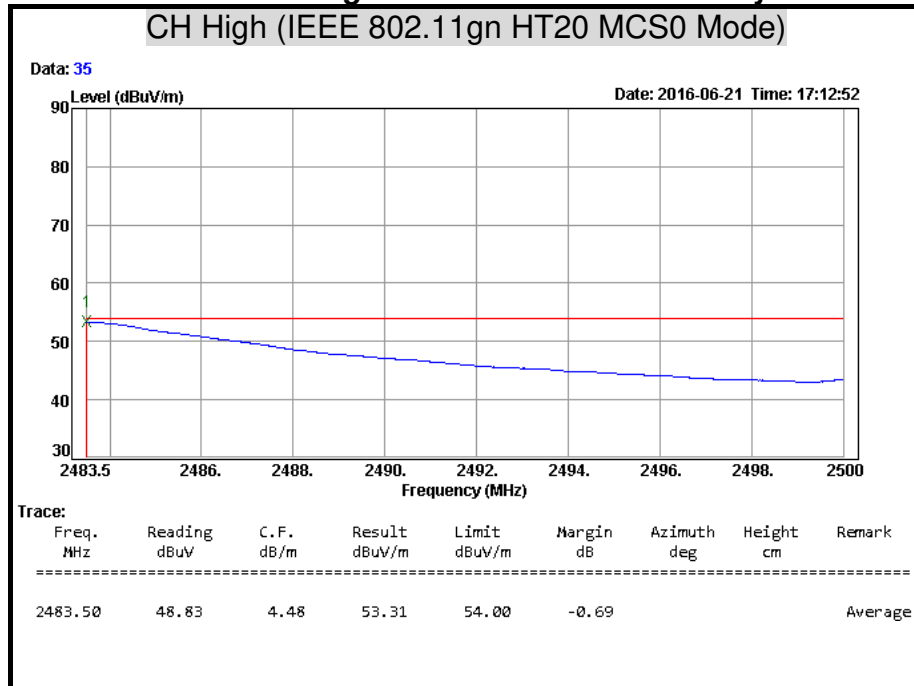


Detector mode: Peak

Polarity: Horizontal

CH Low (IEEE 802.11gn HT40 MCS0 Mode)

Data: 42

Date: 2016-06-21 Time: 17:27:42

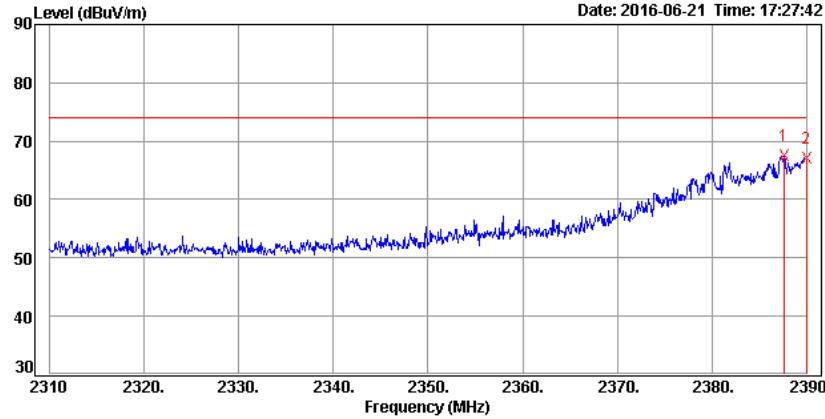

Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2387.60	63.14	4.28	67.42	74.00	-6.58			Peak
2390.00	62.68	4.28	66.96	74.00	-7.04			Peak


Detector mode: Average

Polarity: Horizontal

CH Low (IEEE 802.11gn HT40 MCS0 Mode)

Data: 41

Date: 2016-06-21 Time: 17:27:07

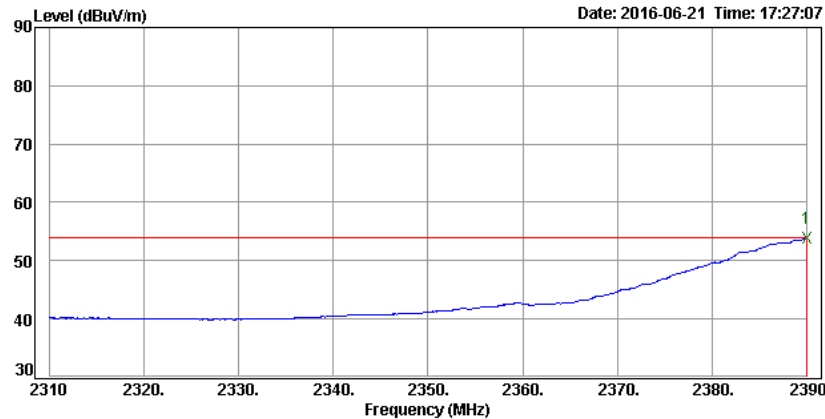

Trace:


Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2390.00	49.51	4.28	53.79	54.00	-0.21			Average

Detector mode: Peak

Polarity: Vertical

CH Low (IEEE 802.11gn HT40 MCS0 Mode)

Data: 44

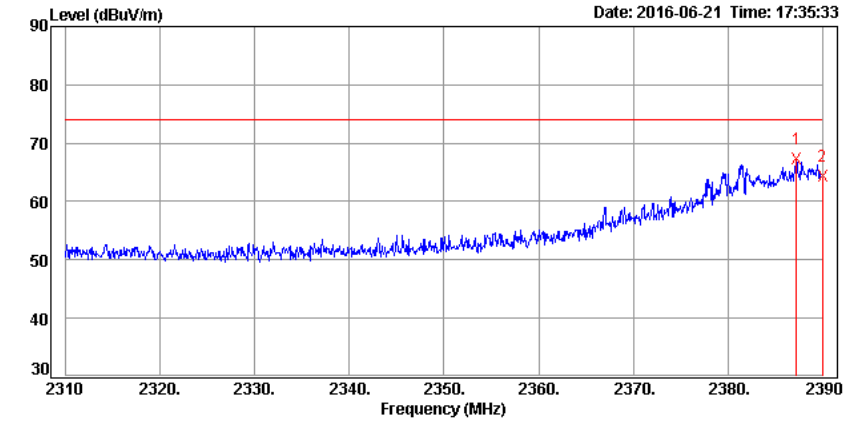

Trace:


Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2387.28	63.11	4.28	67.39	74.00	-6.61			Peak
2390.00	59.95	4.28	64.23	74.00	-9.77			Peak

Detector mode: Average

Polarity: Vertical

CH Low (IEEE 802.11gn HT40 MCS0 Mode)

Data: 43

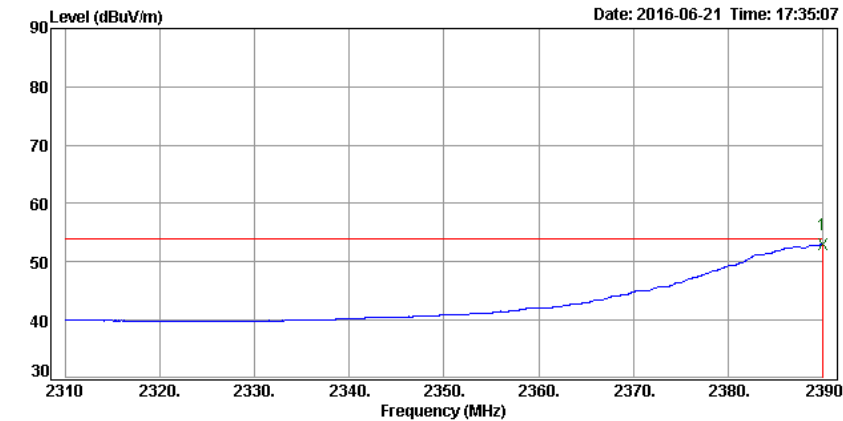


Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2390.00	48.73	4.28	53.01	54.00	-0.99			Average


Detector mode: Peak

Polarity: Horizontal

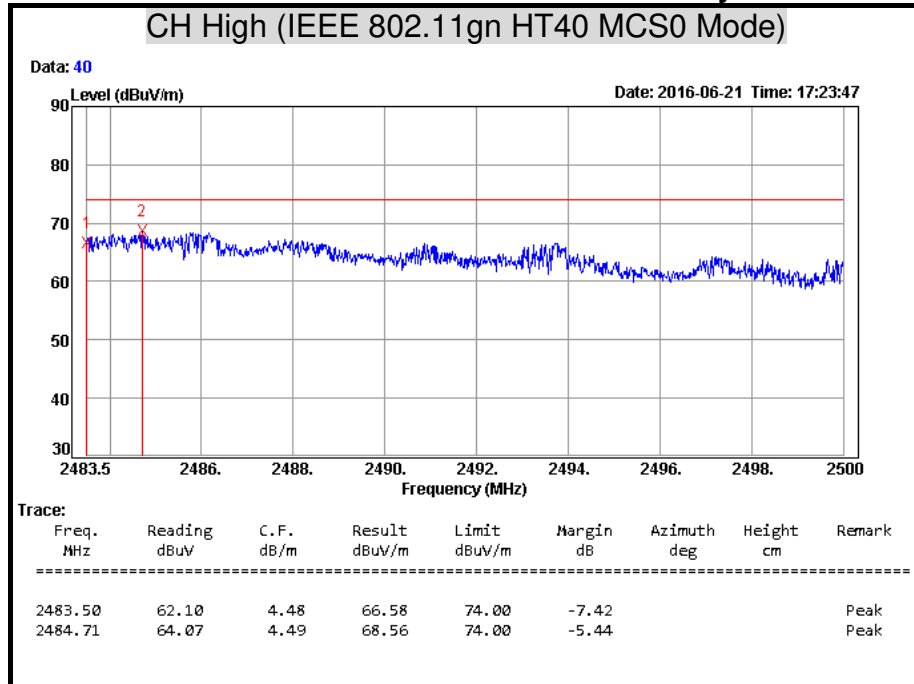


Detector mode: Average

Polarity: Horizontal

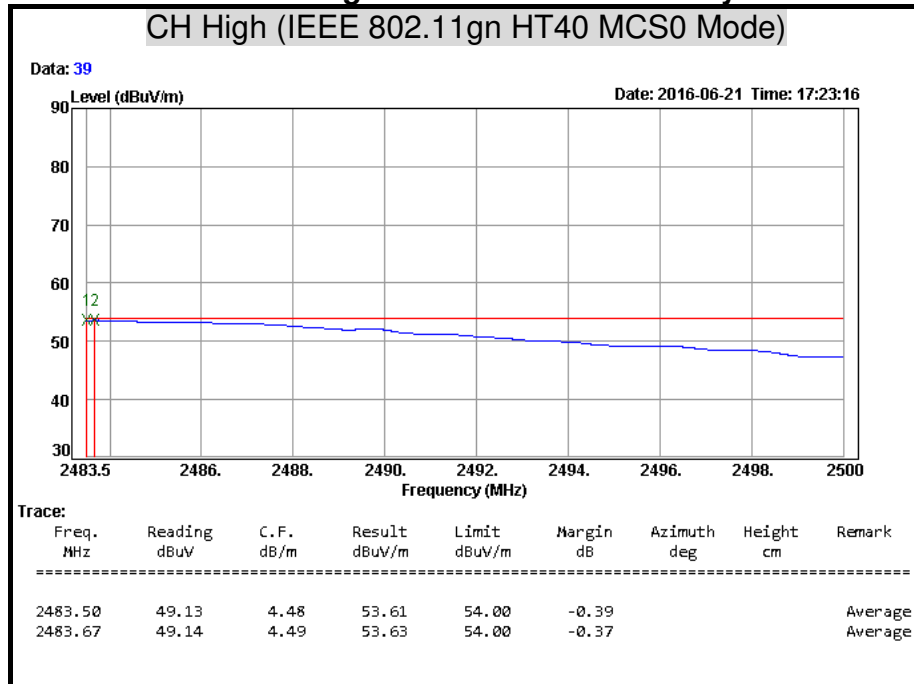


Detector mode: Peak

Polarity: Vertical

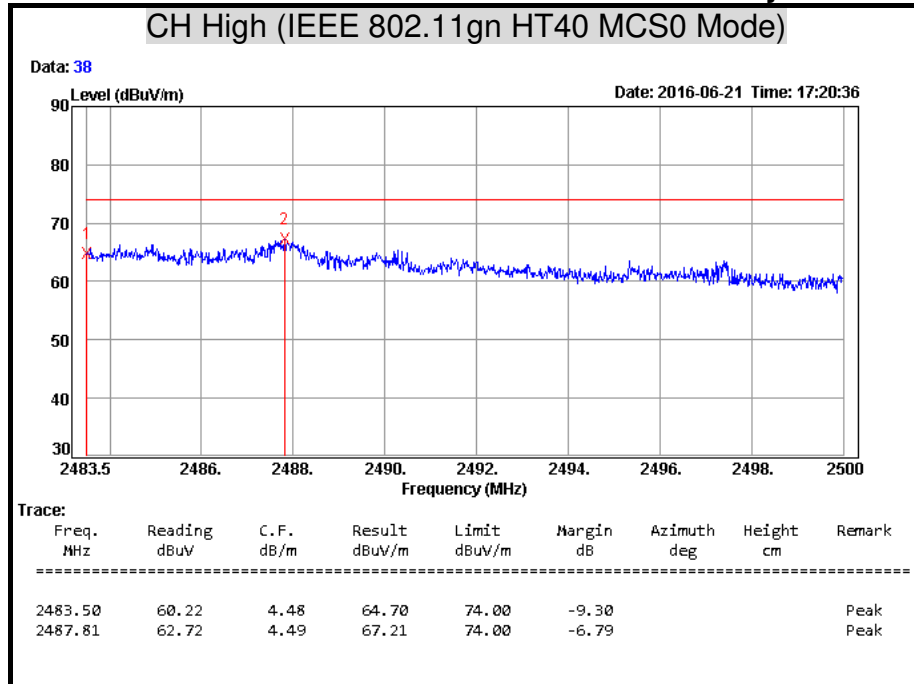

Detector mode: Average

Polarity: Vertical

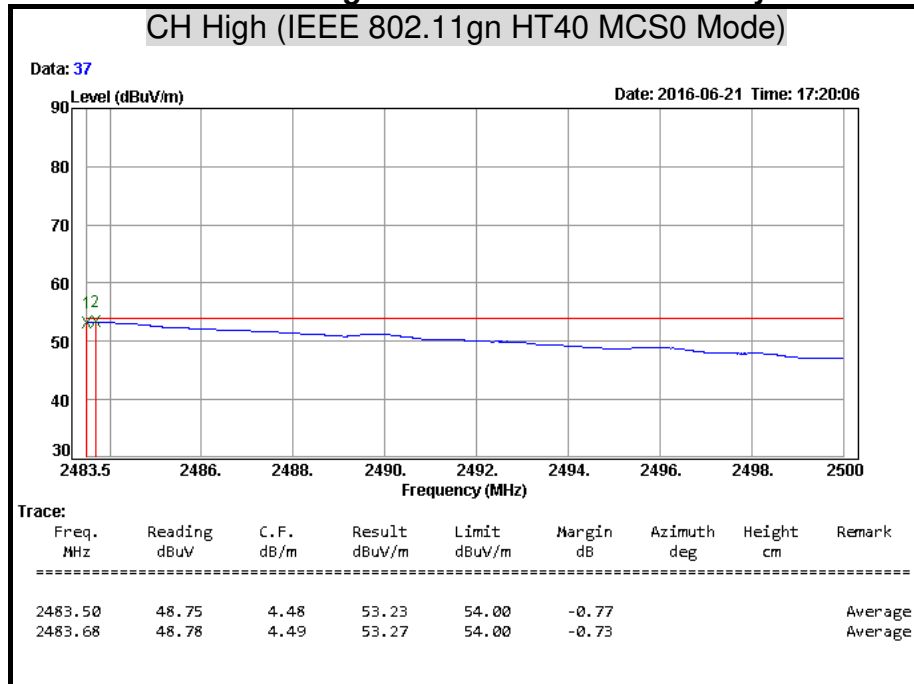

7.8 CONDUCTED EMISSION

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.



Frequency Range (MHz)	Conducted Limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5.00	56	46
5.00 - 30.0	60	50

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	Schwarzbeck	NSLK 8127	8127465	08/05/2016
L.I.S.N	Schwarzbeck	NSLK 8127	8127473	03/10/2017
EMI Test Receiver	Rohde & Schwarz	ESHS 30	838550/003	10/31/2016
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100111	06/27/2017
Test S/W	E3.815206a			

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

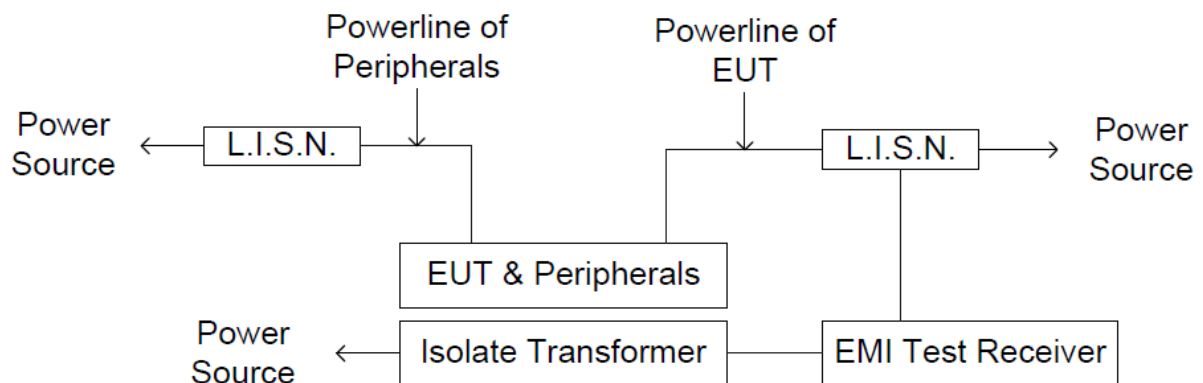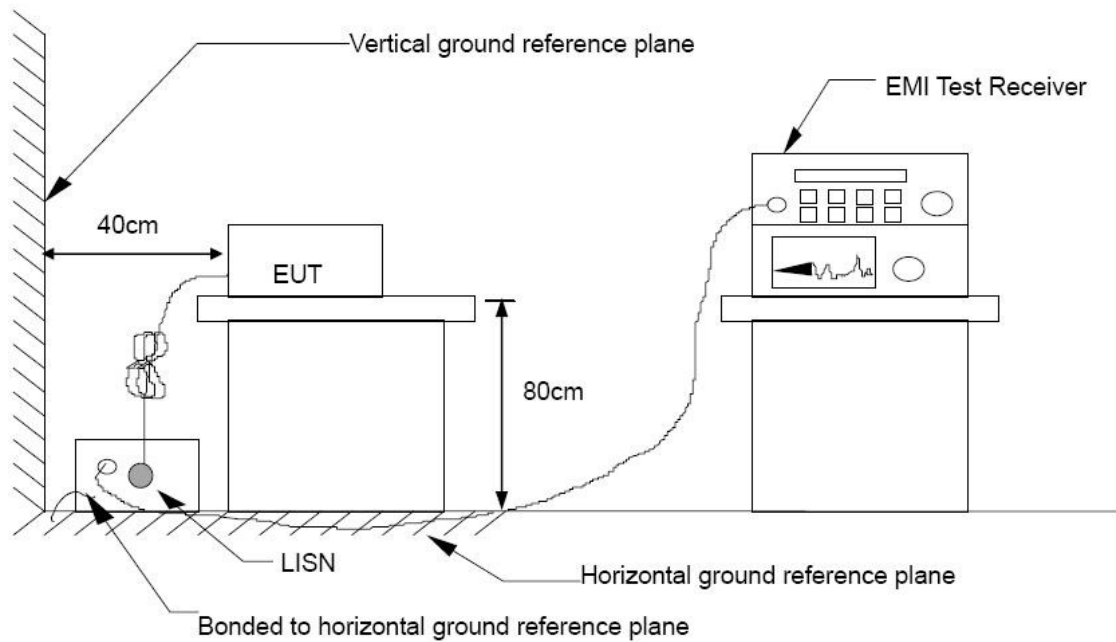

TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.10:2013.

The test procedure is performed in a 4m × 3m × 2.4m (L×W×H) shielded room.

The EUT along with its peripherals were placed on a 1.0m (W) × 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.


The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

TEST RESULTS

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Allen Liu
Test Model	DL4480V	Test Date	2016/06/30
Test Mode	Mode 1	Temp. & Humidity	25°C, 50%

LINE

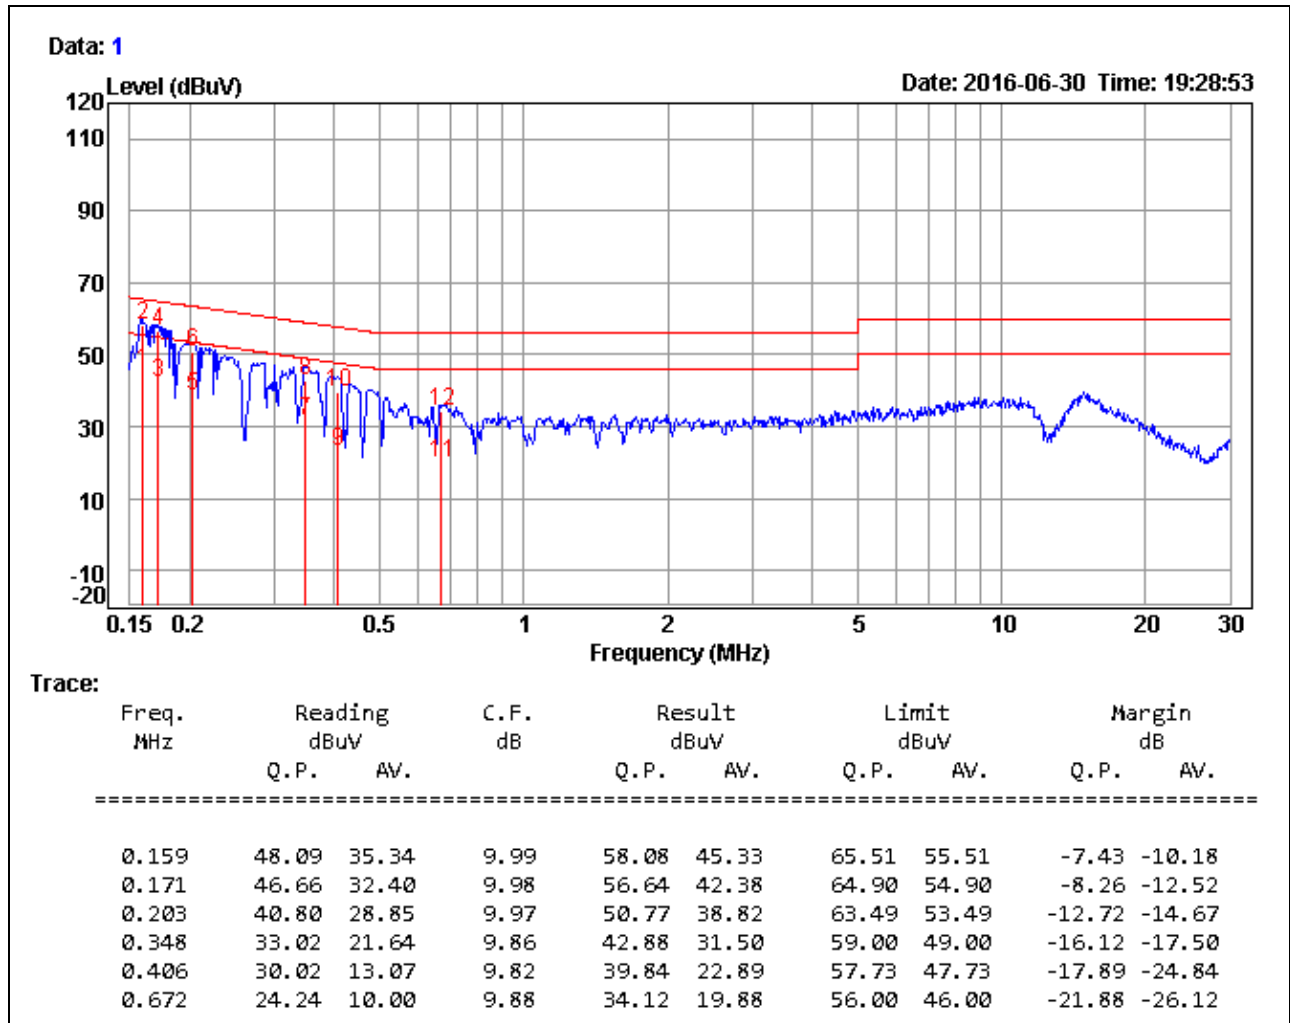


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Result level = Reading Value + Correction factor
3. Margin value = Result level – Limit value

Product Name	AC1200 Wireless Dual Band VDSL2 Gigabit VoIP IAD	Test By	Allen Liu
Test Model	DL4480V	Test Date	2016/06/30
Test Mode	Mode 1	Temp. & Humidity	25°C, 50%

NEUTRAL

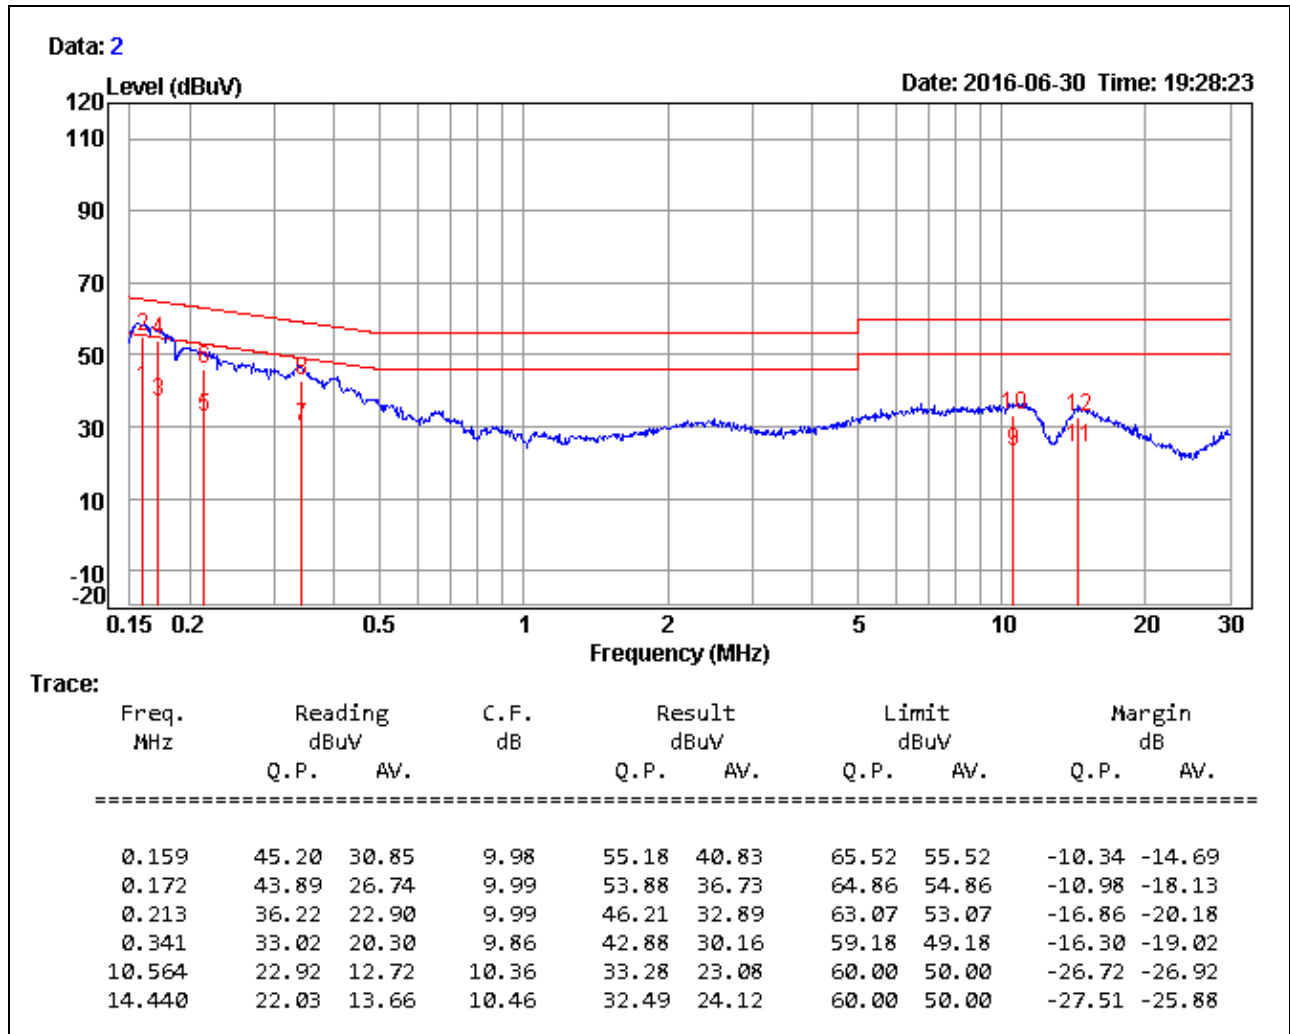

Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Result level = Reading Value + Correction factor
3. Margin value = Result level – Limit value