

FCC Radio Test Report

FCC ID: T58WF2411ER

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1506C211
Equipment : 150Mbps Wireless N Router
Model Name : WF2411E
Applicant : NETIS SYSTEMS CO., LTD
Address : 4F&5F R&D Building, Oriental Cyberport, High-Tech Industrial Park, Nanshan, Shenzhen, China.

Date of Receipt : Jun. 23, 2015
Date of Test : Jun. 23, 2015 ~ Jul. 06, 2015
Issued Date : Jul. 07, 2015
Tested by : BTL Inc.

Testing Engineer : David Mao
(David Mao)

Technical Manager : Leo Hung
(Leo Hung)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 EUT TEST CONDITIONS	14
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	18
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . BANDWIDTH TEST	19
5.1 APPLIED PROCEDURES	19
5.1.1 TEST PROCEDURE	19
5.1.2 DEVIATION FROM STANDARD	19
5.1.3 TEST SETUP	19
5.1.4 EUT OPERATION CONDITIONS	19
5.1.5 EUT TEST CONDITIONS	19
5.1.6 TEST RESULTS	19

Table of Contents	Page
6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	20
6.1 APPLIED PROCEDURES / LIMIT	20
6.1.1 TEST PROCEDURE	20
6.1.2 DEVIATION FROM STANDARD	20
6.1.3 TEST SETUP	20
6.1.4 EUT OPERATION CONDITIONS	20
6.1.5 EUT TEST CONDITIONS	20
6.1.6 TEST RESULTS	20
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	21
7.1 APPLIED PROCEDURES / LIMIT	21
7.1.1 TEST PROCEDURE	21
7.1.2 DEVIATION FROM STANDARD	21
7.1.3 TEST SETUP	21
7.1.4 EUT OPERATION CONDITIONS	21
7.1.5 EUT TEST CONDITIONS	21
7.1.6 TEST RESULTS	21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 APPLIED PROCEDURES / LIMIT	22
8.1.1 TEST PROCEDURE	22
8.1.2 DEVIATION FROM STANDARD	22
8.1.3 TEST SETUP	22
8.1.4 EUT OPERATION CONDITIONS	22
8.1.5 EUT TEST CONDITIONS	22
8.1.6 TEST RESULTS	22
9 . MEASUREMENT INSTRUMENTS LIST	23
10 . EUT TEST PHOTO	25
ATTACHMENT A - CONDUCTED EMISSION	29
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	32
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	34
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	41
ATTACHMENT E - BANDWIDTH	90
ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER	99
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	101
ATTACHMENT H - POWER SPECTRAL DENSITY	118

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1506C211	Original Issue.	Jul. 07, 2015

1. CERTIFICATION

Equipment : 150Mbps Wireless N Router
Brand Name : netis
Model Name : WF2411E
Applicant : NETIS SYSTEMS CO., LTD
Manufacturer : Shenzhen Netcore Industrial Ltd.
Address : 4F&5F R&D Building, Oriental Cyberport, High-Tech Industrial Park, Nanshan, Shenzhen, China.
Factory : Dongguan City Netcore Network Technology Co.,Ltd.
Address : No.10-1,Sankeng Road,Qinghutou,Tangxia Town,Dongguan City
Date of Test : Jun. 23, 2015 ~ Jul. 06, 2015
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart C: 2014 (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1506C211) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C: 2014			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.209/15.205	Transmitter Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	Note
DG-C02	CISPR	150 KHz ~ 30MHz	2.59	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	Note
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	150Mbps Wireless N Router	
Brand Name	netis	
Model Difference	WF2411E	
Model Difference	N/A	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 150 Mbps
	Output Power (Max.)	802.11b: 16.93dBm 802.11g: 23.09dBm 802.11n(20MHz): 22.64dBm 802.11n(40MHz): 22.86dBm
Power Source	DC Voltage supplied from AC/DC adapter. Manufacturer/ model: DongGuan tenpao Power CO.,LTD/ NTPI2EU	
Power Rating	I/P AC 100-240V 50/60Hz 0.2A O/P DC 9V 500mA	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 – CH09 for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	RF link	RF21C00283A	Dipole	N/A	4.86	

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
802.11g mode: OFDM (6Mbps)
802.11n HT20 mode : BPSK (6.5Mbps)
802.11n HT40 mode : BPSK (13.5Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	MT7620 QA V1.0.6.0		
Frequency (MHz)	2412	2437	2462
802.11b	0C	0B	0A
802.11g	0B	0A	0A
802.11n (20MHz)	0B	0A	0A
Frequency	2422	2437	2452
802.11n (40MHz)	0D	0D	0D

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

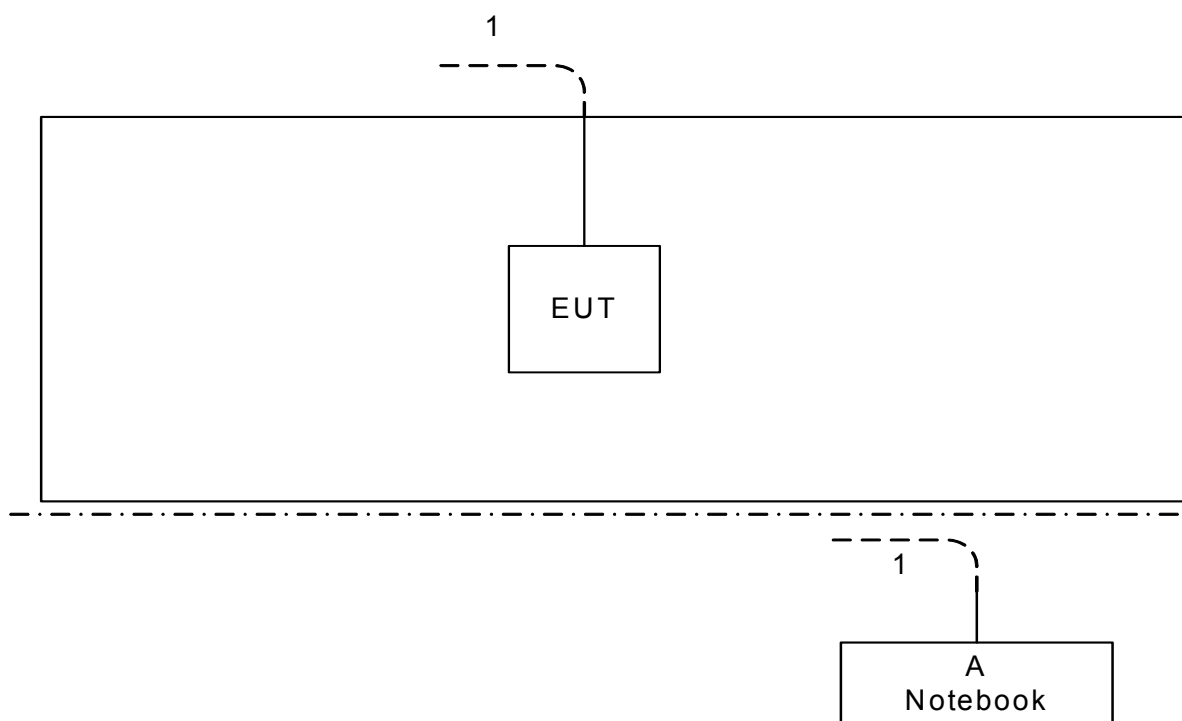

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	Notebook	DELL	INSPIRON 1420	DOC	JX193A01SDC2	-

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	10m	RJ45

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.5 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

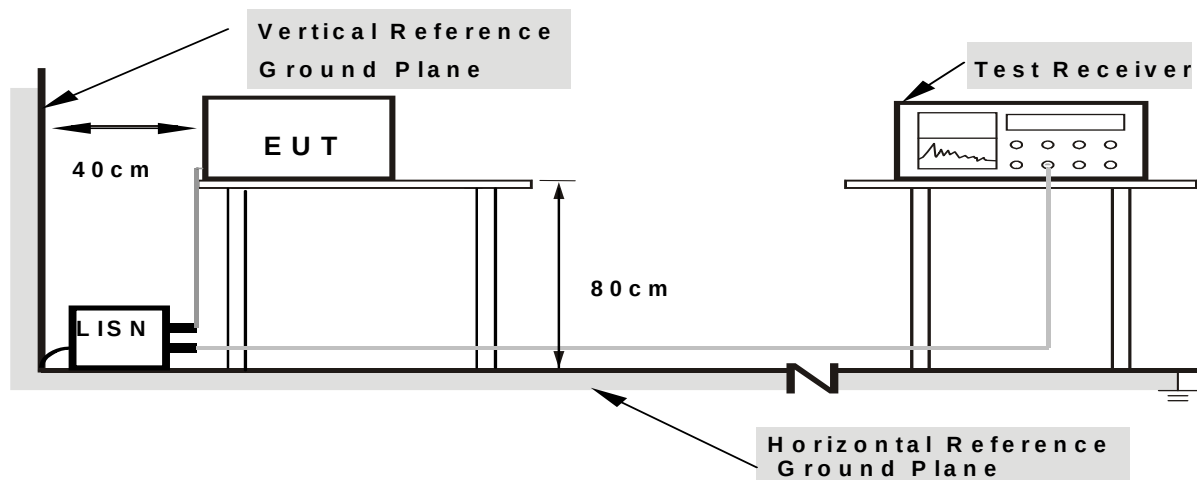

- Note:** 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

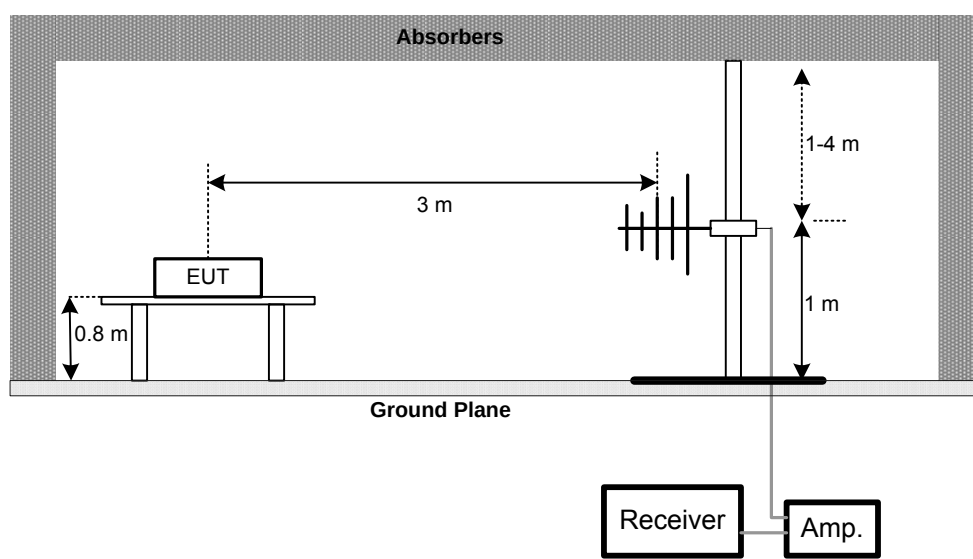

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

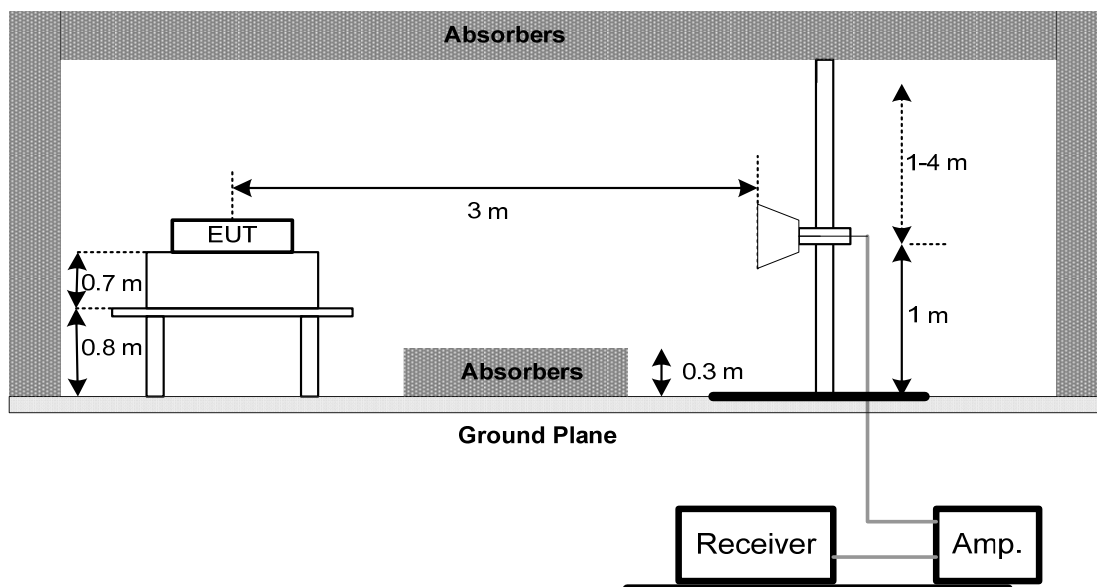

(C) For radiated emissions below 30MHz

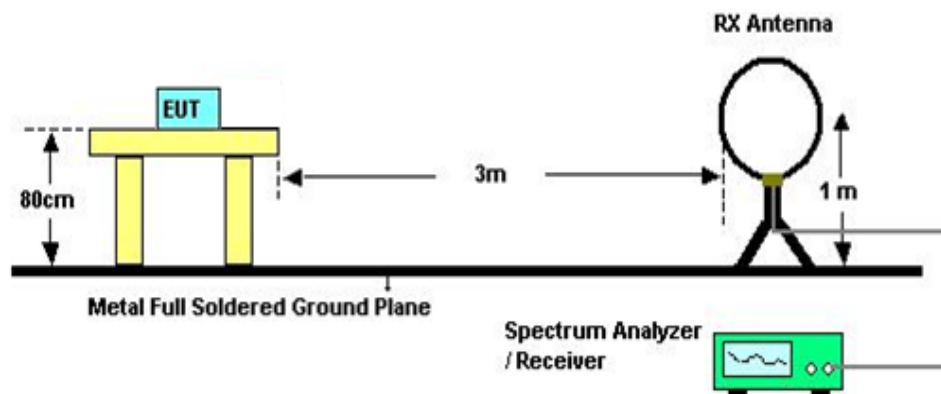

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.5 Unless** otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

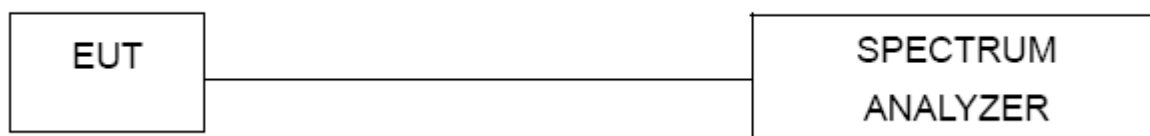

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 52% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016
2	LISN	R&S	ENV216	101447	Mar. 28, 2016
3	Test Cable	N/A	C_17	N/A	Mar. 13, 2016
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 28, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 17, 2015
3	Receiver	AGILENT	N9038A	MY5213003 9	Sep. 30, 2015
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Controller	CT	SC100	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	Antenna	ETS	3115	00075789	Mar. 28, 2016
8	Amplifier	Agilent	8449B	3008A02274	Nov. 02, 2015
9	Receiver	AGILENT	N9038A	MY5213003 9	Sep. 30, 2015
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 28, 2016
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016
13	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Aug. 16, 2015

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	power Meter	ANRITSU	ML2495A	1128009	Mar. 28, 2016
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 28, 2016

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.


10. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos

9KHz to 30MHz

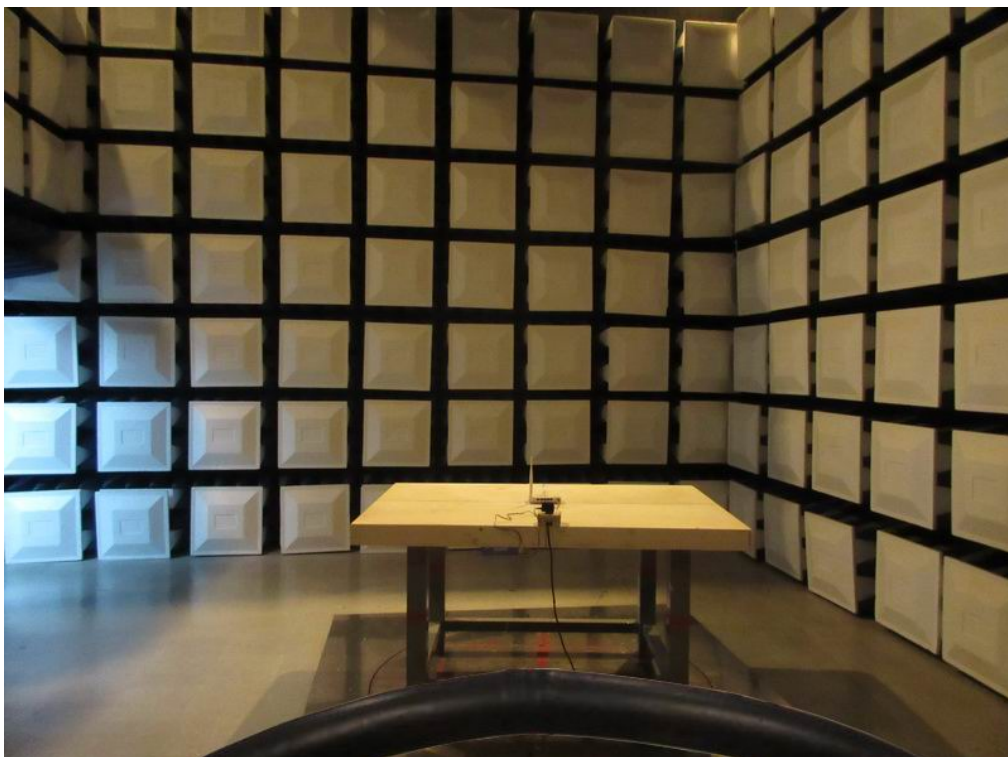


Radiated Measurement Photos

30MHz to 1000MHz

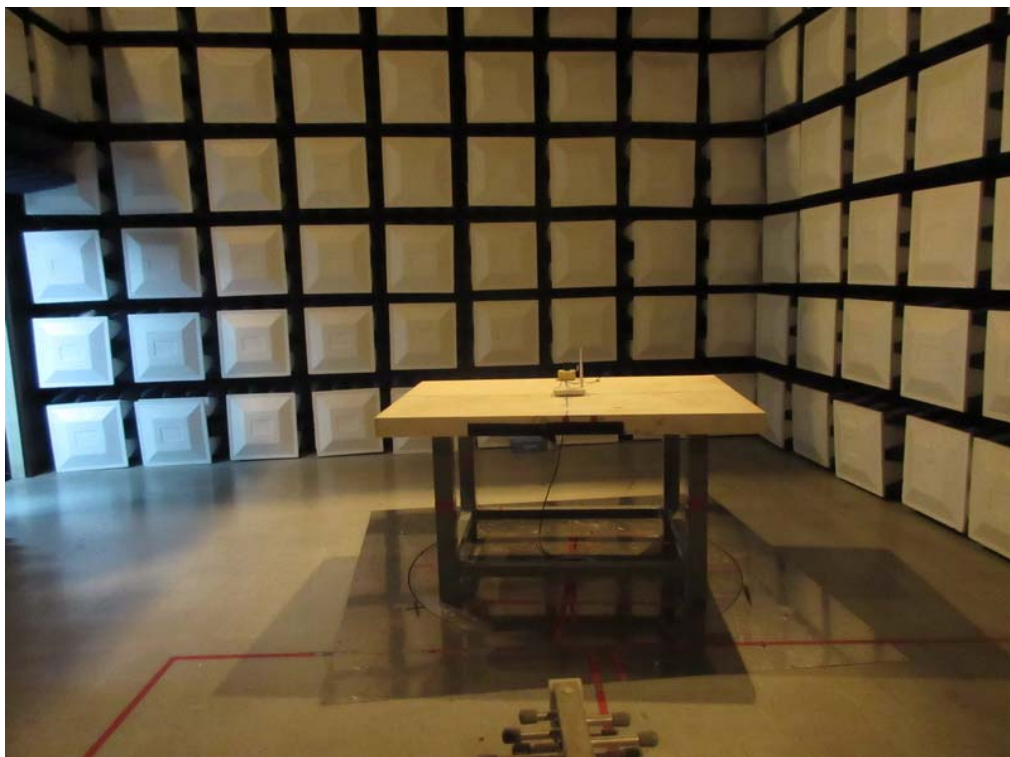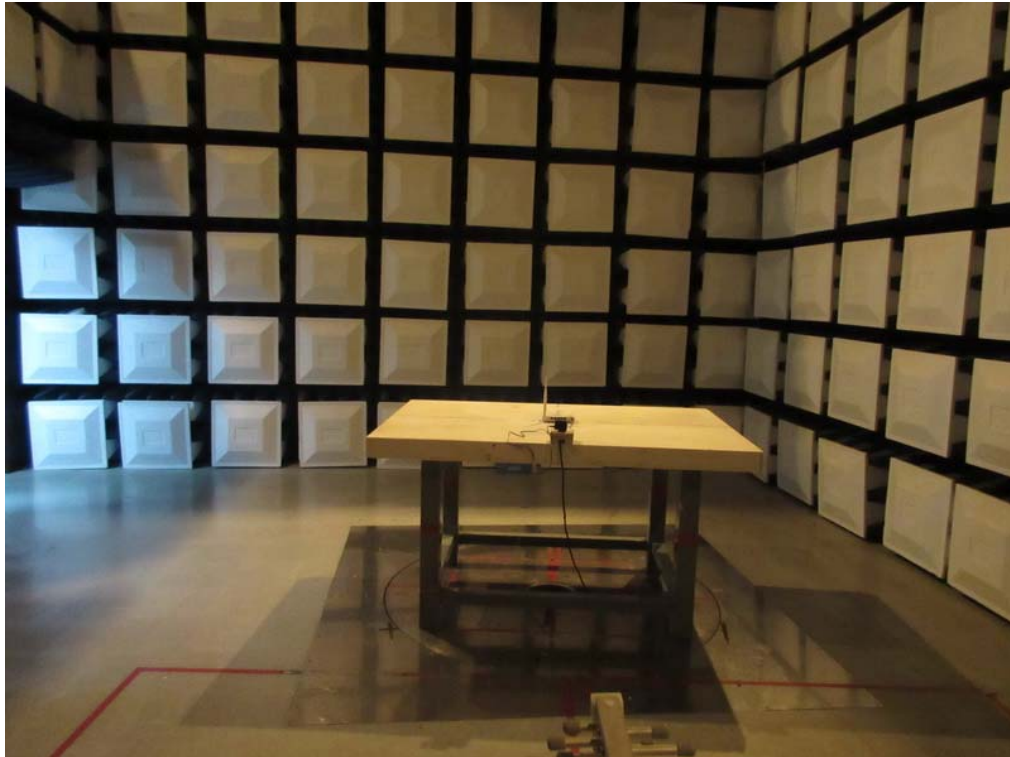

Radiated Measurement Photos


Above 1000MHz

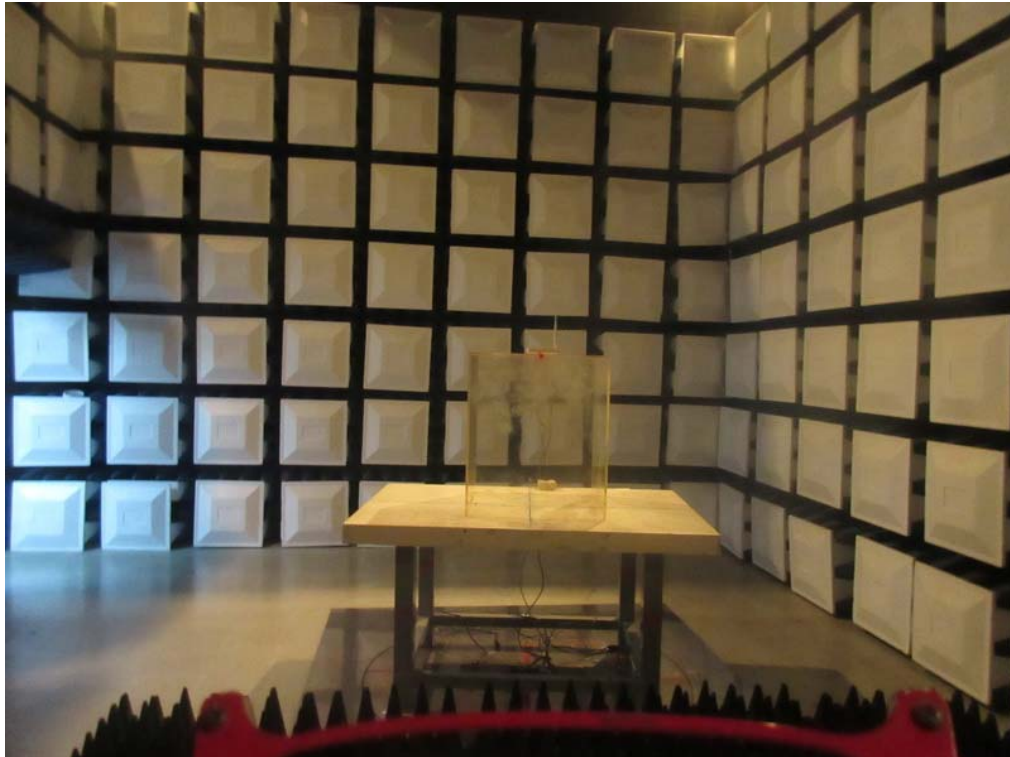

ATTACHMENT A - CONDUCTED EMISSION

Test Mode : TX MODE


Line

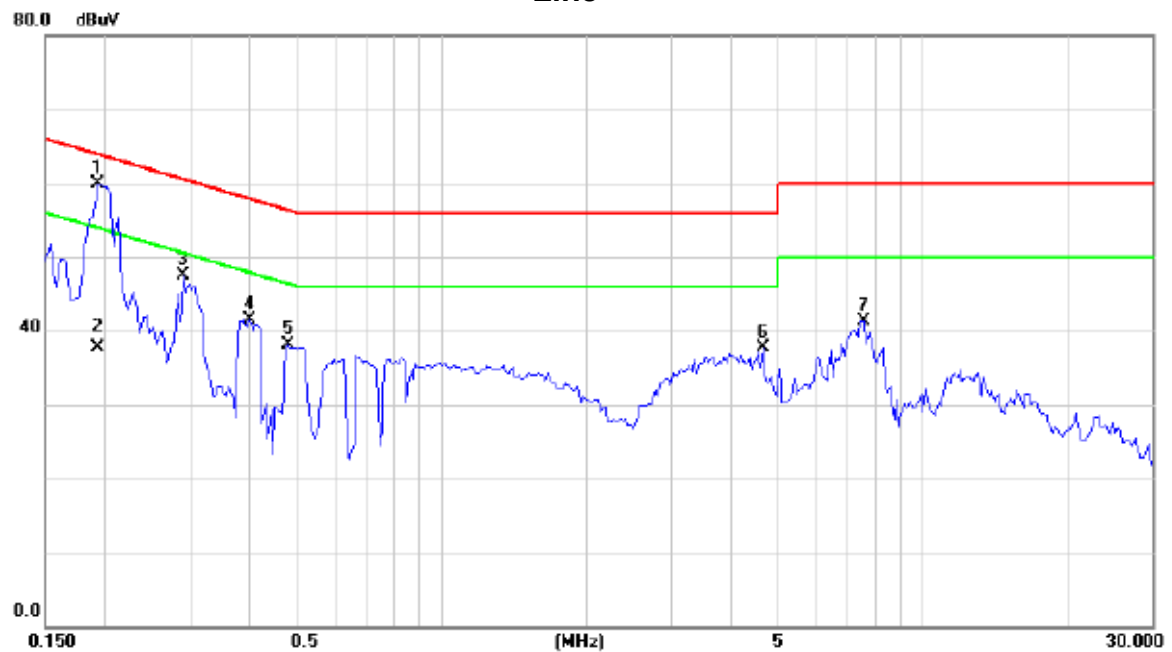

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1930	50.25	9.69	59.94	63.91	-3.97	peak	
2		0.1930	28.10	9.69	37.79	53.91	-16.12	AVG	
3		0.2906	37.70	9.73	47.43	60.51	-13.08	peak	
4		0.4000	31.69	9.79	41.48	57.85	-16.37	peak	
5		0.4781	28.33	9.80	38.13	56.37	-18.24	peak	
6		4.6483	28.74	9.06	37.80	56.00	-18.20	peak	
7		7.5273	31.61	9.74	41.35	60.00	-18.65	peak	

Test Mode : TX MODE

Neutral

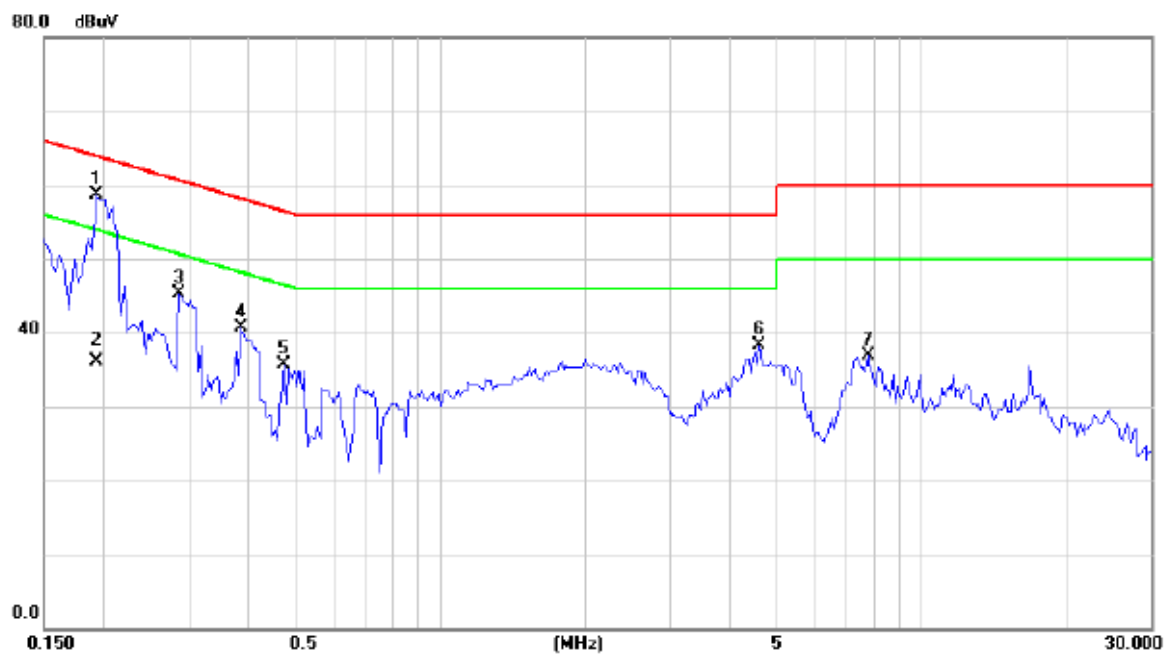

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1930	49.13	9.59	58.72	63.91	-5.19	peak	
2		0.1930	26.50	9.59	36.09	53.91	-17.82	AVG	
3		0.2867	35.67	9.61	45.28	60.62	-15.34	peak	
4		0.3844	31.07	9.61	40.68	58.18	-17.50	peak	
5		0.4742	26.13	9.62	35.75	56.44	-20.69	peak	
6		4.6016	28.52	9.84	38.36	56.00	-17.64	peak	
7		7.7383	27.04	9.88	36.92	60.00	-23.08	peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode 2412MHz


Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0095	0°	13.43	24.96	38.39	128.03	-89.64	AVG
0.0095	0°	14.23	24.96	39.19	148.03	-108.84	PEAK
0.0226	0°	6.78	24.14	30.92	120.52	-89.61	AVG
0.0226	0°	8.10	24.14	32.24	140.52	-108.29	PEAK
0.0316	0°	3.15	23.57	26.72	117.61	-90.90	AVG
0.0316	0°	5.53	23.57	29.10	137.61	-108.52	PEAK
0.0427	0°	1.26	22.86	24.12	115.00	-90.87	AVG
0.0427	0°	2.54	22.86	25.40	135.00	-109.59	PEAK
0.4932	0°	19.66	19.82	39.48	73.74	-34.27	QP
1.7151	0°	23.71	19.33	43.04	69.54	-26.50	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0096	90°	13.11	24.30	37.41	127.93	-90.52	AVG
0.0096	90°	14.82	24.30	39.12	147.93	-108.81	PEAK
0.0257	90°	7.28	23.94	31.22	119.41	-88.19	AVG
0.0257	90°	8.94	23.94	32.88	139.41	-106.53	PEAK
0.0312	90°	5.23	23.59	28.82	117.72	-88.90	AVG
0.0312	90°	6.10	23.59	29.69	137.72	-108.03	PEAK
0.0444	90°	1.55	22.75	24.30	114.66	-90.35	AVG
0.0437	90°	2.83	22.75	25.58	134.66	-109.07	PEAK
0.4915	90°	22.14	19.82	41.96	73.77	-31.81	QP
1.7160	90°	24.51	19.53	44.04	69.54	-25.50	QP

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX B MODE CHANNEL 01


Vertical

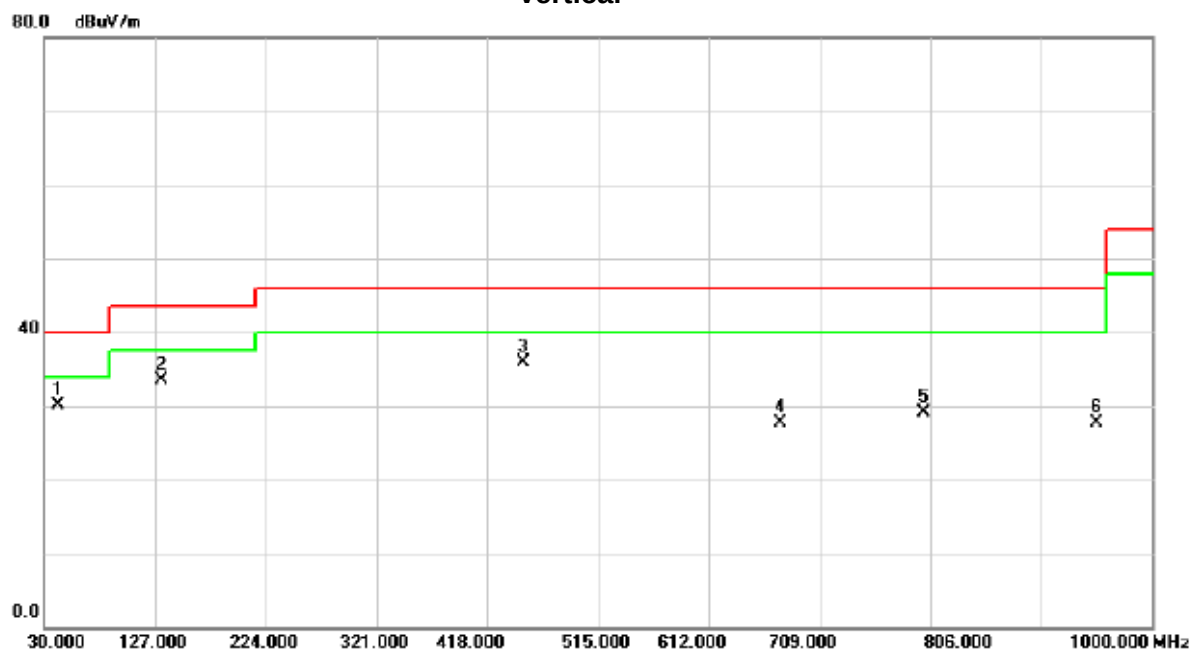

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	41.6400	45.09	-14.97	30.12	40.00	-9.88	peak	
2		132.8200	47.21	-13.77	33.44	43.50	-10.06	peak	
3		450.0100	45.18	-9.35	35.83	46.00	-10.17	peak	
4		675.0500	33.74	-5.95	27.79	46.00	-18.21	peak	
5		800.1800	33.08	-3.97	29.11	46.00	-16.89	peak	
6		951.5000	29.68	-1.97	27.71	46.00	-18.29	peak	

Test Mode: TX B MODE CHANNEL 01


Horizontal

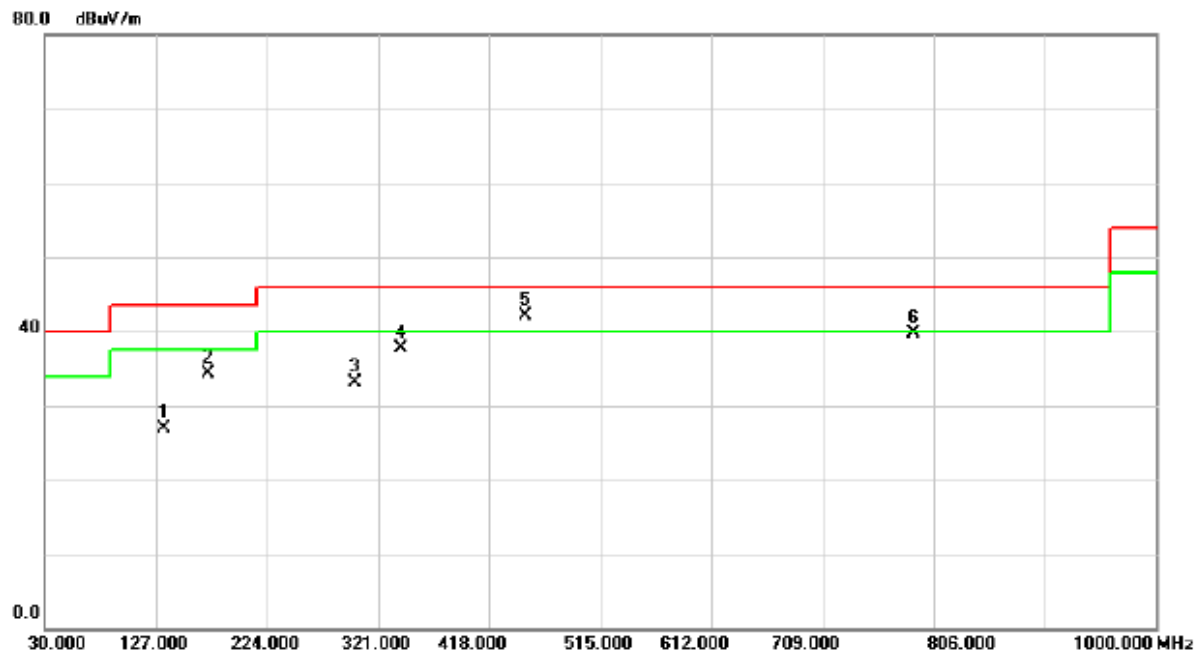

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		133.7900	40.69	-13.79	26.90	43.50	-16.60	peak	
2		172.5900	47.06	-12.85	34.21	43.50	-9.29	peak	
3		300.6300	43.81	-10.80	33.01	46.00	-12.99	peak	
4		341.3700	48.70	-10.92	37.78	46.00	-8.22	peak	
5	*	450.0100	51.46	-9.35	42.11	46.00	-3.89	peak	
6		788.5400	43.95	-4.32	39.63	46.00	-6.37	peak	

Test Mode: TX B MODE CHANNEL 06


Vertical

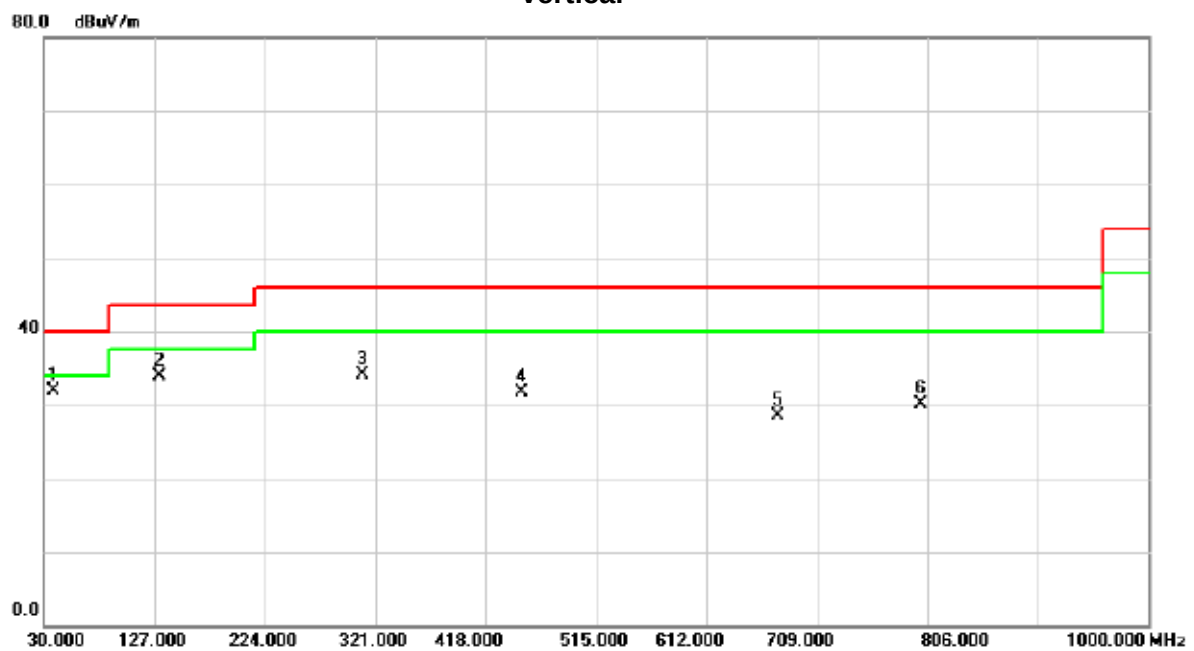

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	38.7300	46.78	-14.96	31.82	40.00	-8.18	peak	
2		131.8500	47.61	-13.74	33.87	43.50	-9.63	peak	
3		310.3300	44.99	-10.83	34.16	46.00	-11.84	peak	
4		450.0100	40.97	-9.35	31.62	46.00	-14.38	peak	
5		675.0500	34.50	-5.95	28.55	46.00	-17.45	peak	
6		800.1800	34.13	-3.97	30.16	46.00	-15.84	peak	

Test Mode: TX B MODE CHANNEL 06


Horizontal

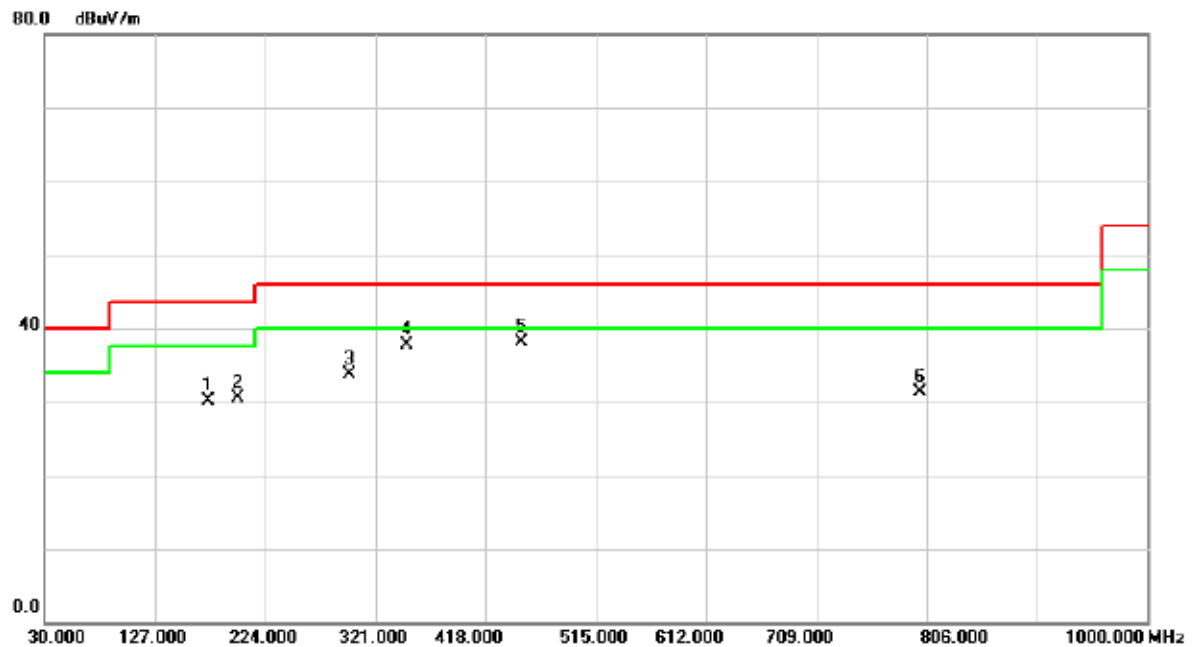

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		173.5600	42.93	-12.84	30.09	43.50	-13.41	peak	
2		199.7500	45.16	-14.64	30.52	43.50	-12.98	peak	
3		298.6900	44.69	-10.99	33.70	46.00	-12.30	peak	
4		348.1600	48.62	-10.93	37.69	46.00	-8.31	peak	
5	*	450.0100	47.46	-9.35	38.11	46.00	-7.89	peak	
6		800.1800	35.22	-3.97	31.25	46.00	-14.75	peak	

Test Mode: TX B MODE CHANNEL 11


Vertical

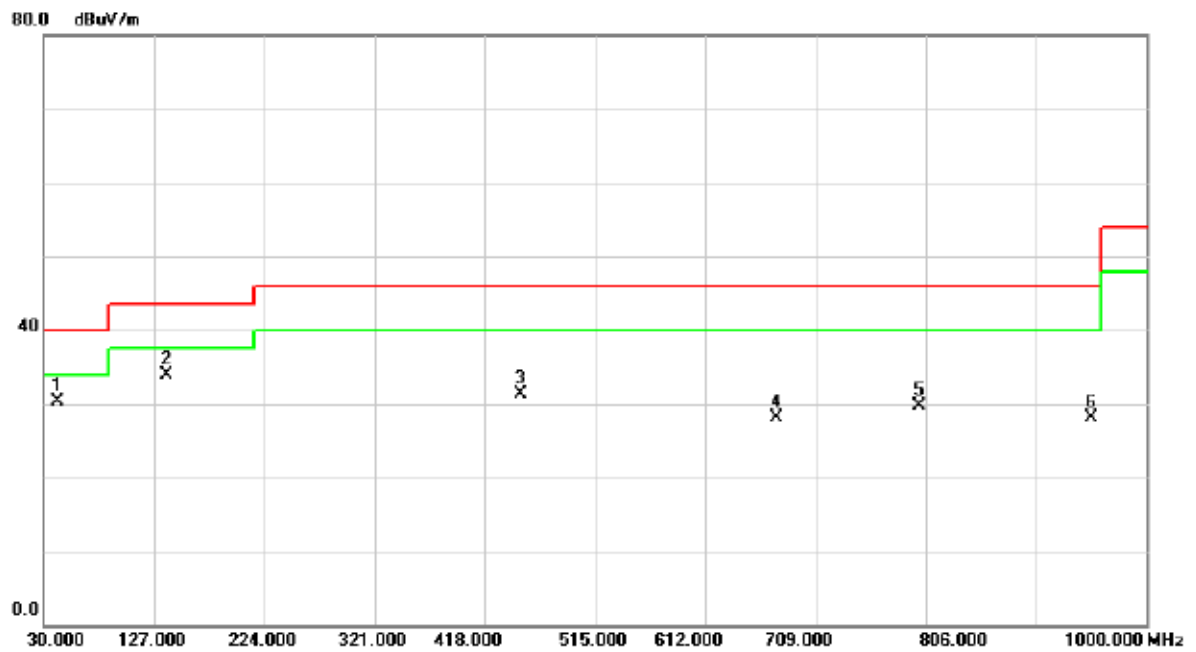

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		42.6100	45.32	-15.07	30.25	40.00	-9.75	peak	
2	*	137.6700	47.73	-13.91	33.82	43.50	-9.68	peak	
3		450.0100	40.74	-9.35	31.39	46.00	-14.61	peak	
4		675.0500	34.02	-5.95	28.07	46.00	-17.93	peak	
5		800.1800	33.65	-3.97	29.68	46.00	-16.32	peak	
6		951.5000	30.02	-1.97	28.05	46.00	-17.95	peak	

Test Mode: TX B MODE CHANNEL 11

Horizontal

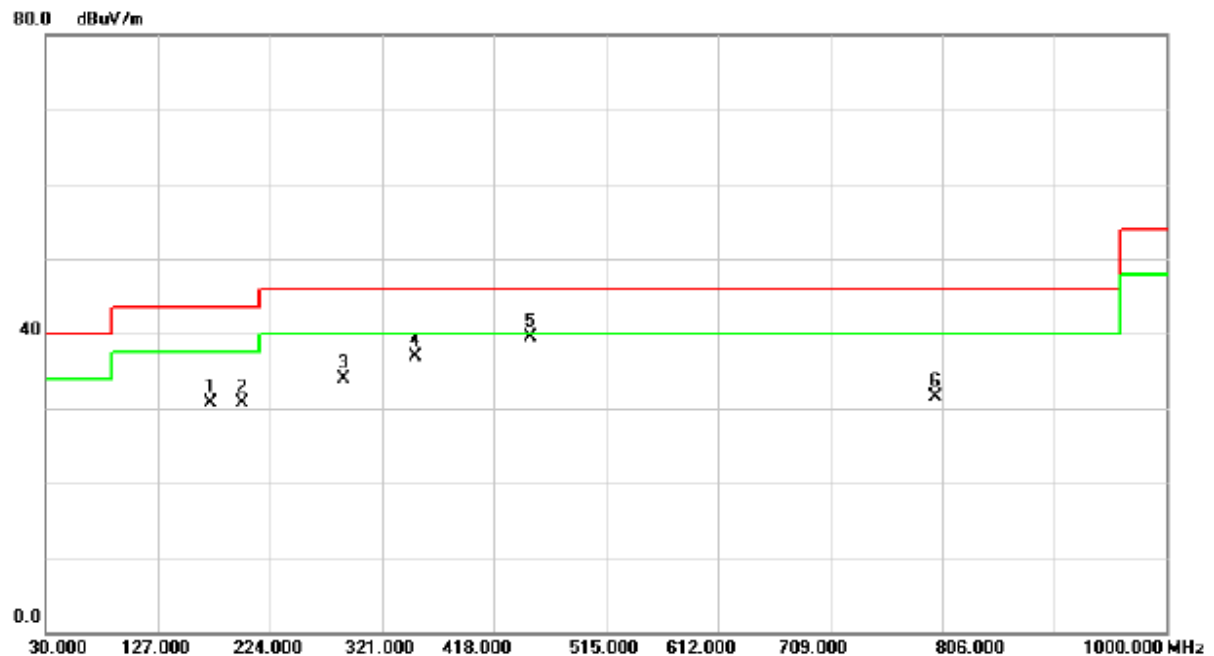


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		172.5900	43.52	-12.85	30.67	43.50	-12.83	peak	
2		199.7500	45.41	-14.64	30.77	43.50	-12.73	peak	
3		288.0200	46.42	-12.53	33.89	46.00	-12.11	peak	
4		350.1000	47.82	-10.94	36.88	46.00	-9.12	peak	
5	*	450.0100	48.82	-9.35	39.47	46.00	-6.53	peak	
6		800.1800	35.57	-3.97	31.60	46.00	-14.40	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)


Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Vertical

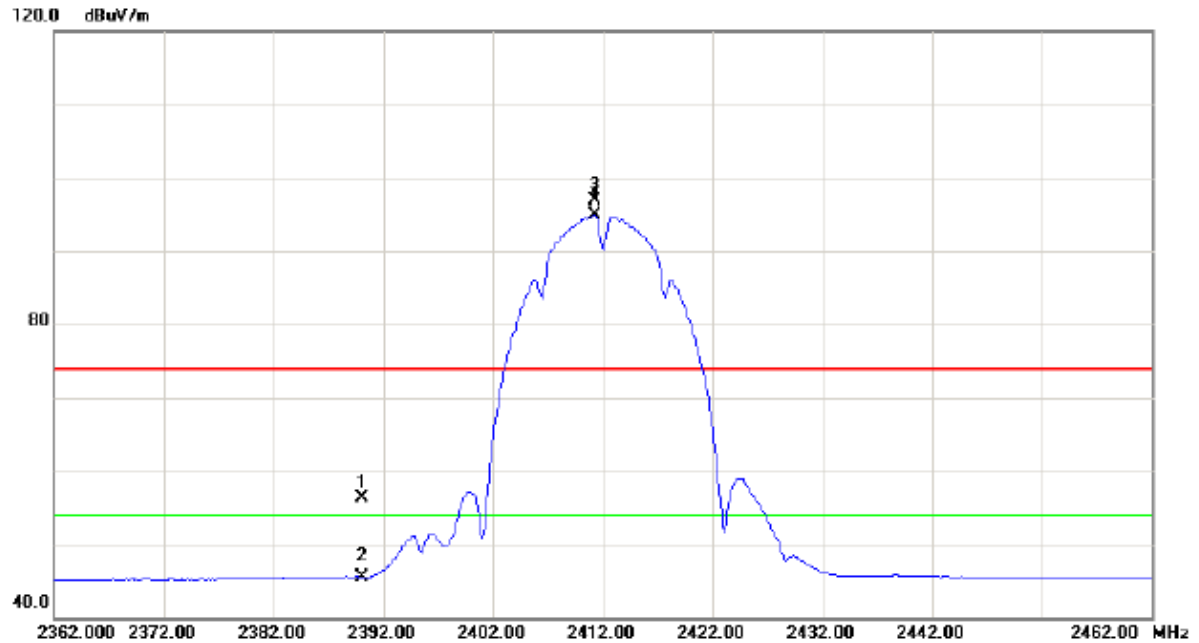

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	24.33	31.88	56.21	74.00	-17.79	peak	
2		2390.000	13.69	31.88	45.57	54.00	-8.43	AVG	
3	X	2411.200	64.90	31.91	96.81	74.00	22.81	peak	No Limit
4	*	2411.200	62.97	31.91	94.88	54.00	40.88	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

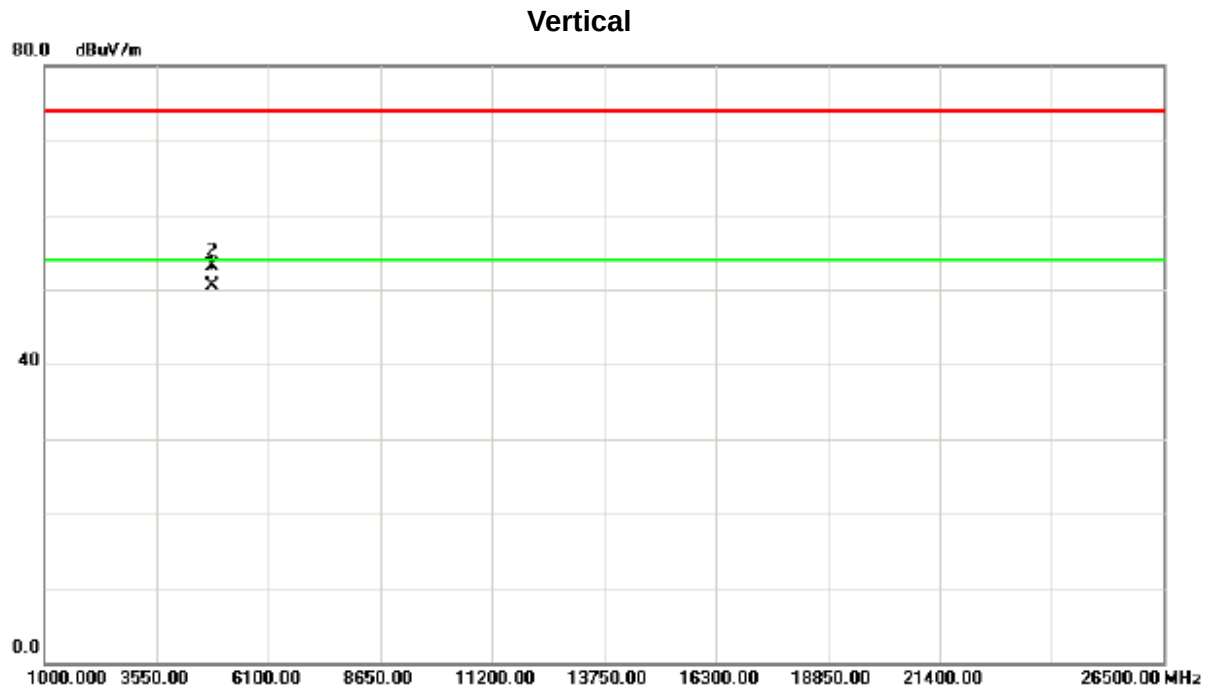

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4824.000	46.91	3.62	50.53	54.00	-3.47	AVG	
2		4824.060	49.54	3.62	53.16	74.00	-20.84	peak	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal

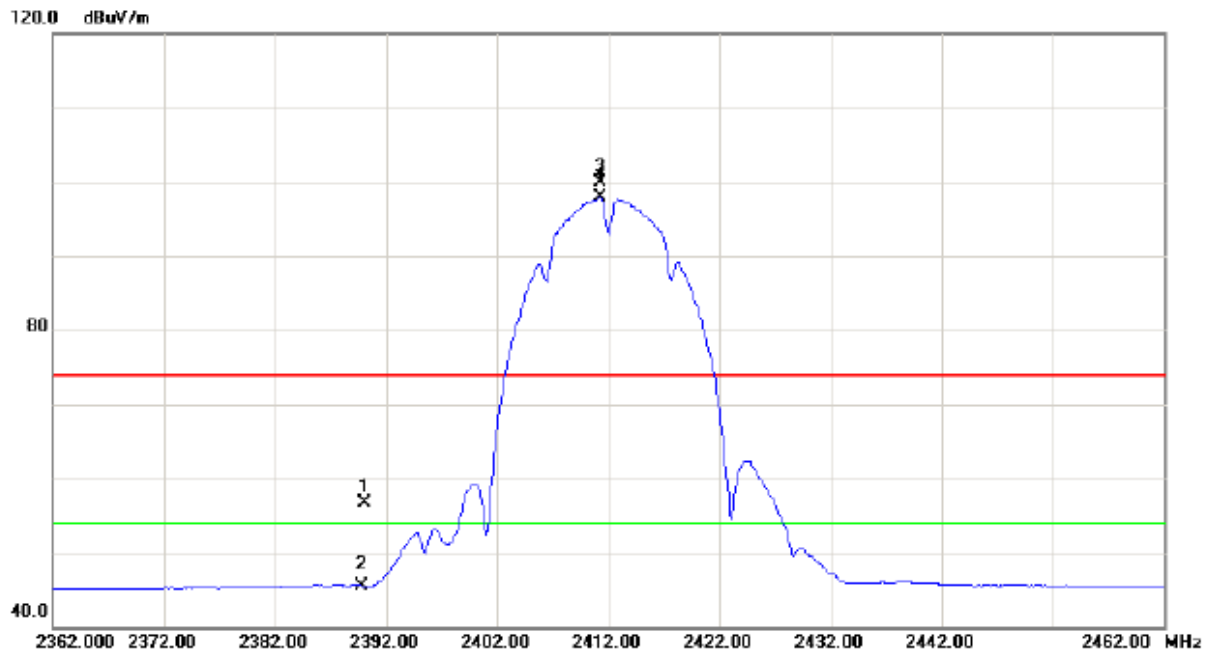

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	24.76	31.88	56.64	74.00	-17.36	peak	
2		2390.000	13.70	31.88	45.58	54.00	-8.42	AVG	
3	X	2411.200	67.90	31.91	99.81	74.00	25.81	peak	No Limit
4	*	2411.200	65.94	31.91	97.85	54.00	43.85	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

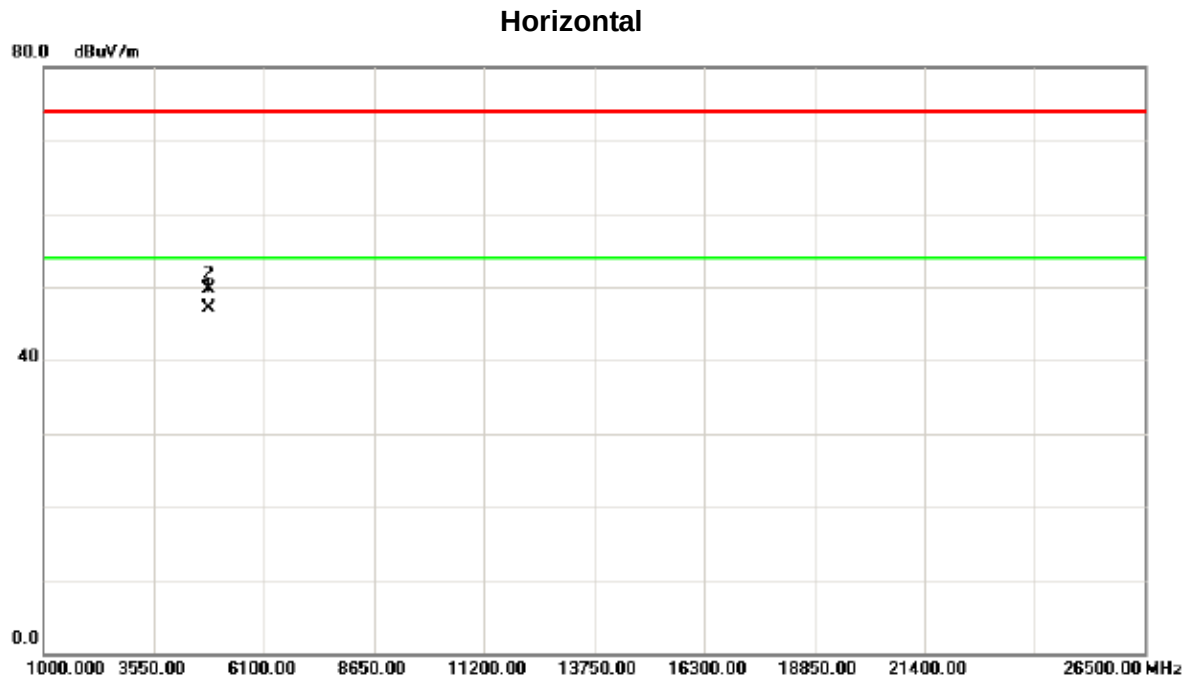

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4824.060	43.54	3.62	47.16	54.00	-6.84	AVG	
2		4824.080	46.16	3.62	49.78	74.00	-24.22	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical

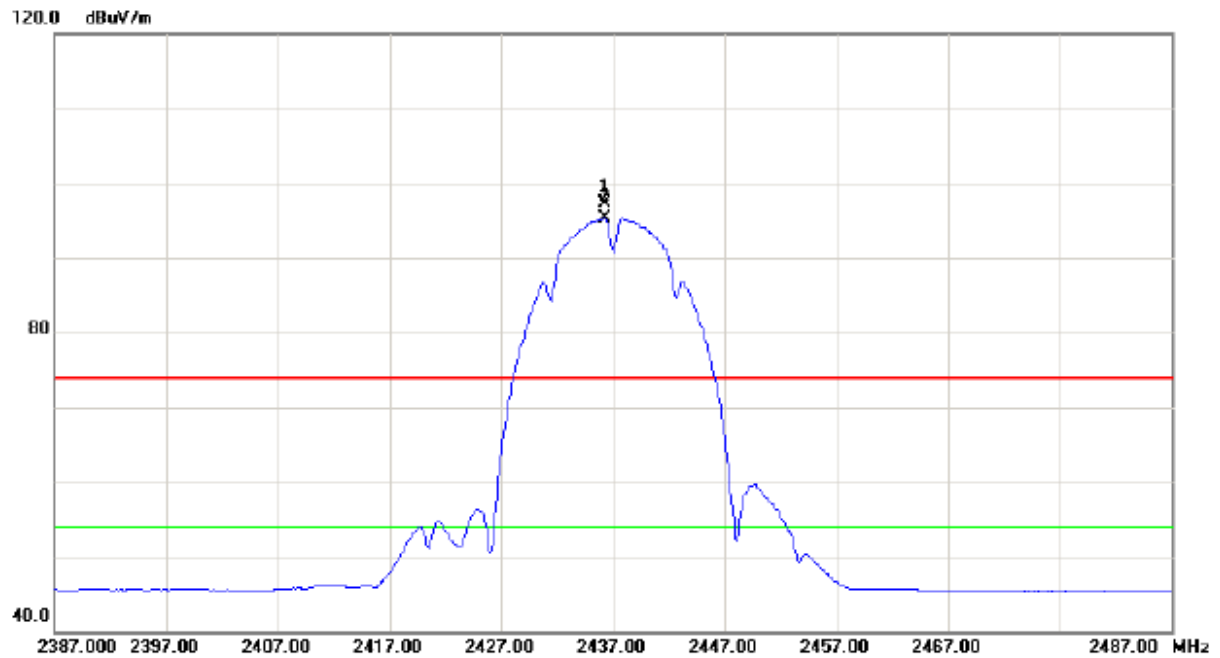

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2436.200	65.37	31.94	97.31	74.00	23.31	peak	No Limit
2	*	2436.200	63.42	31.94	95.36	54.00	41.36	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical

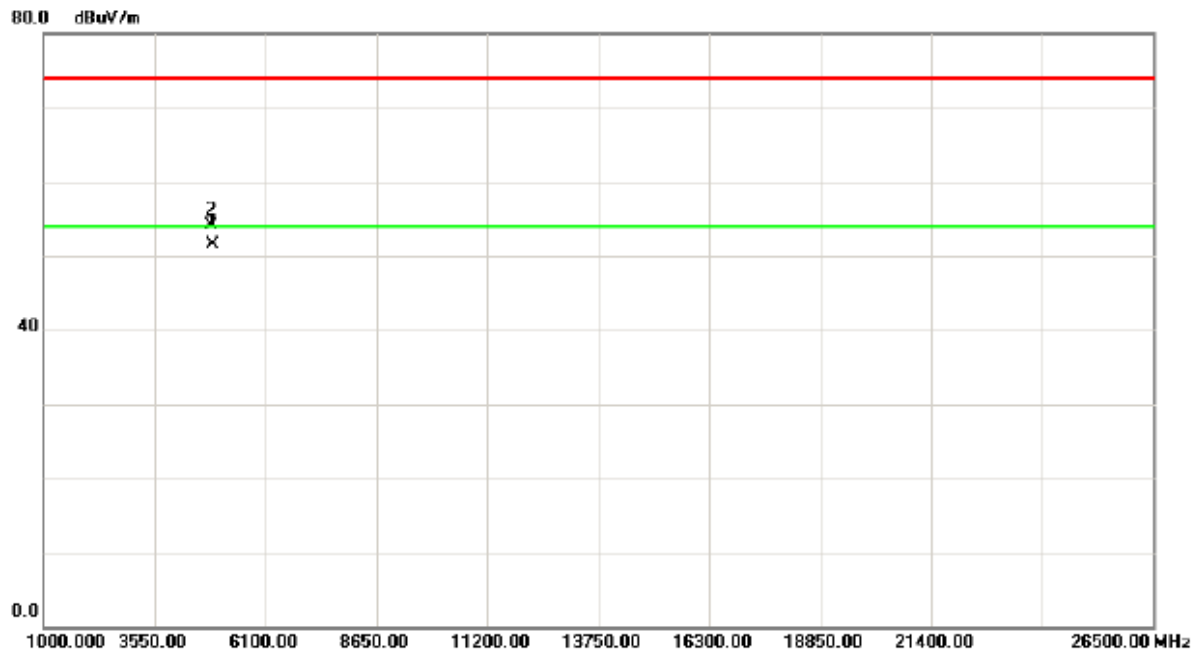

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4874.020	47.81	3.72	51.53	54.00	-2.47	AVG	
2		4874.040	50.44	3.72	54.16	74.00	-19.84	peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal

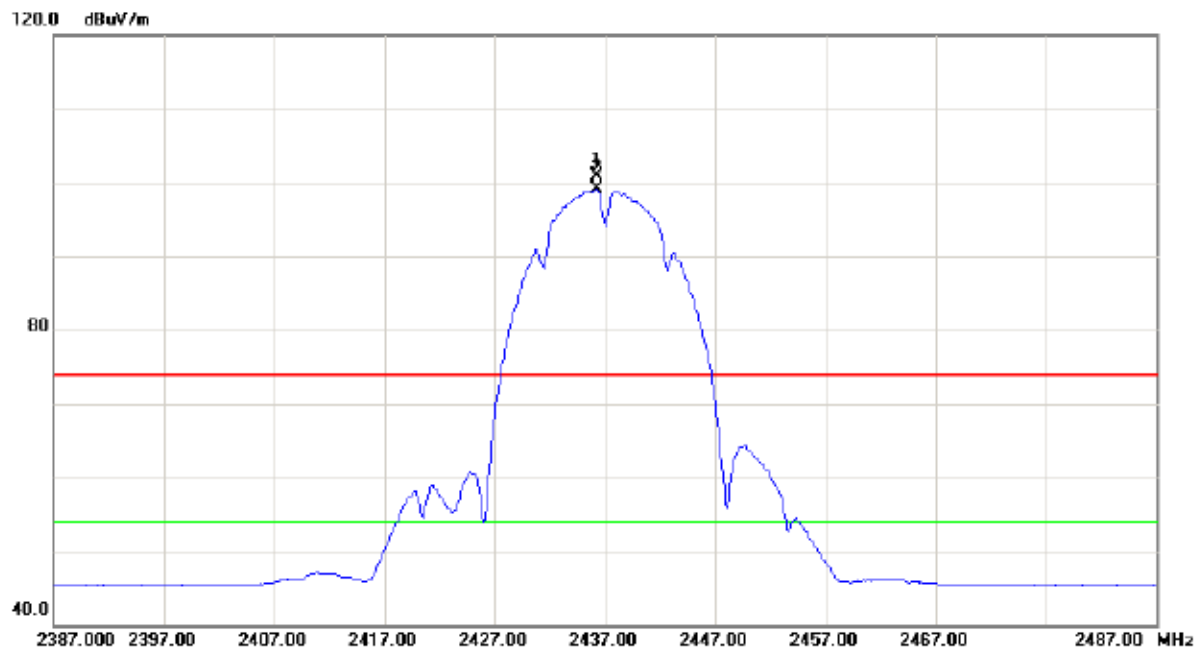

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2436.200	68.95	31.94	100.89	74.00	26.89	peak	No Limit
2	*	2436.200	67.11	31.94	99.05	54.00	45.05	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal

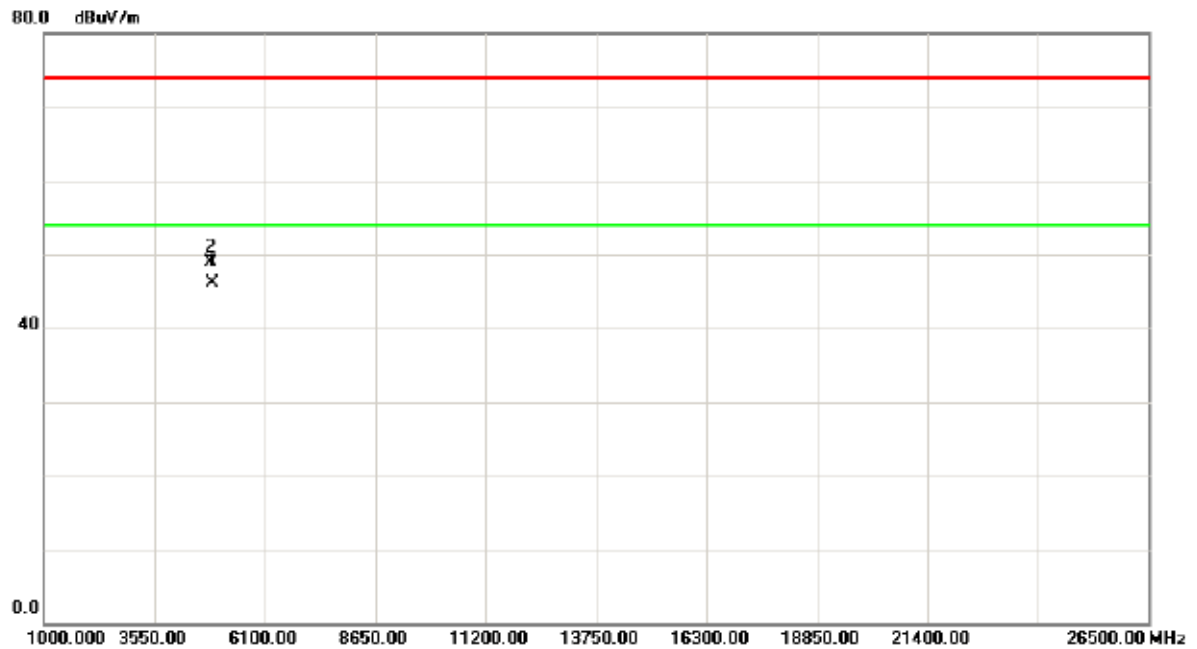

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4874.150	42.44	3.72	46.16	54.00	-7.84	AVG
2		4874.090	45.12	3.72	48.84	74.00	-25.16	peak


Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Vertical

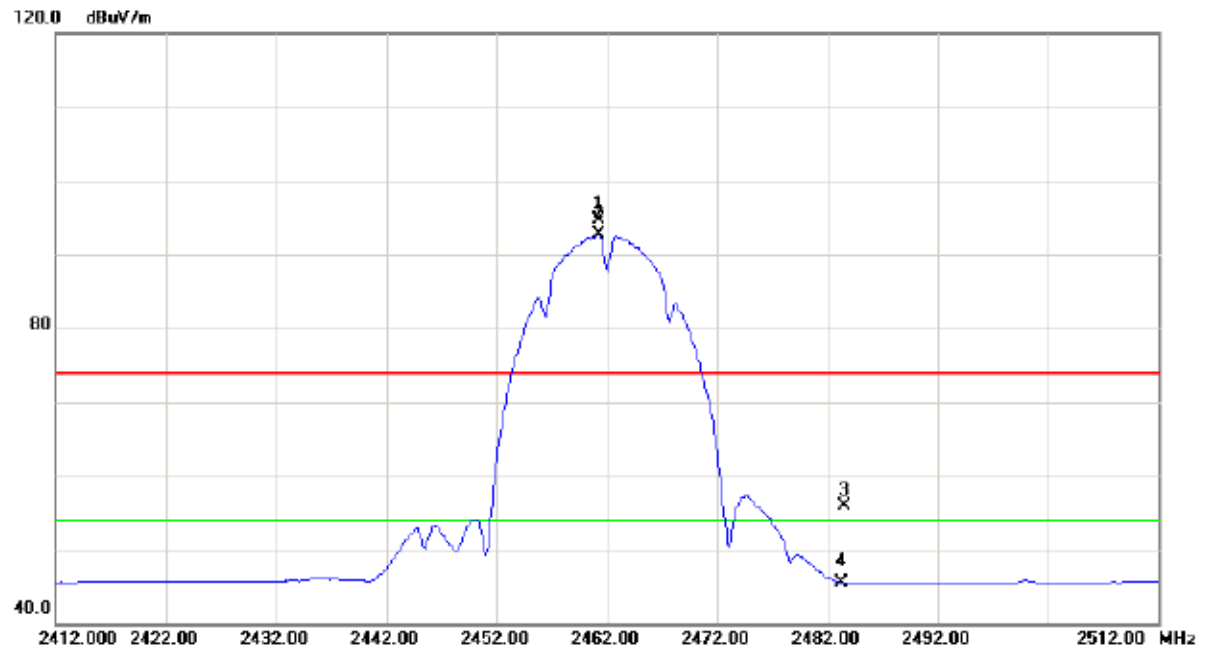

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2461.200	62.66	31.98	94.64	74.00	20.64	peak	No Limit
2	*	2461.200	60.73	31.98	92.71	54.00	38.71	AVG	No Limit
3		2483.500	23.83	32.01	55.84	74.00	-18.16	peak	
4		2483.500	13.46	32.01	45.47	54.00	-8.53	AVG	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

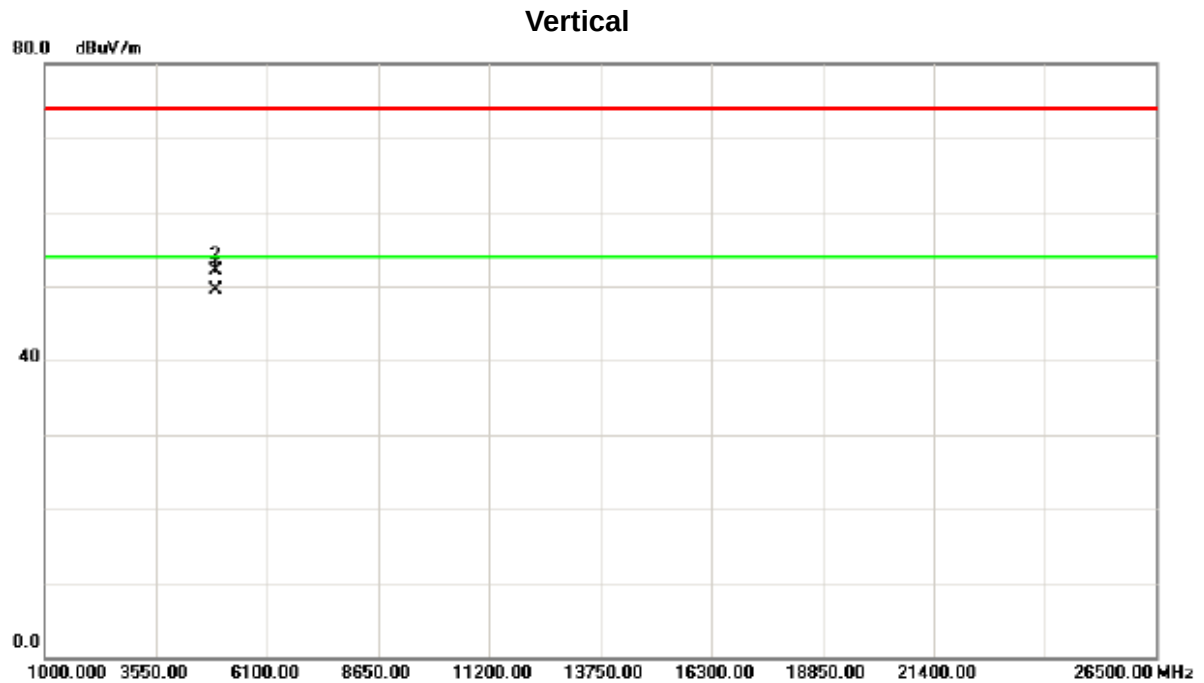

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4924.050	45.73	3.80	49.53	54.00	-4.47	AVG	
2		4924.010	48.36	3.80	52.16	74.00	-21.84	peak	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Horizontal

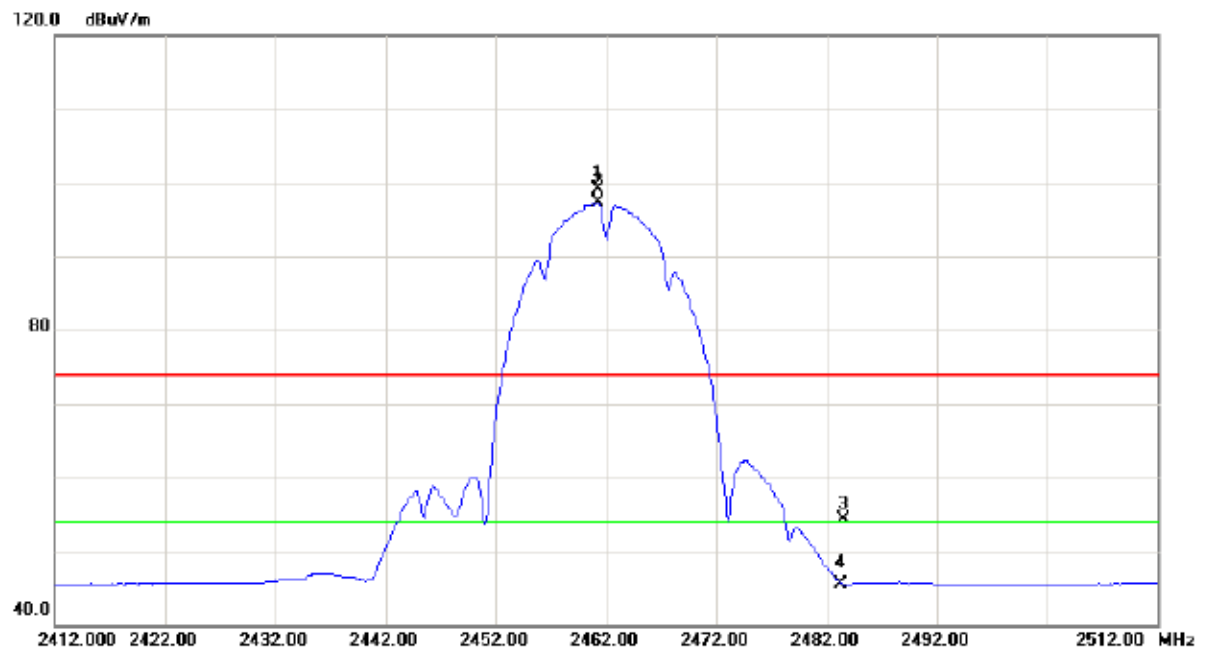

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2461.200	67.15	31.98	99.13	74.00	25.13	peak	No Limit
2	*	2461.200	65.28	31.98	97.26	54.00	43.26	AVG	No Limit
3		2483.500	22.24	32.01	54.25	74.00	-19.75	peak	
4		2483.500	13.57	32.01	45.58	54.00	-8.42	AVG	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

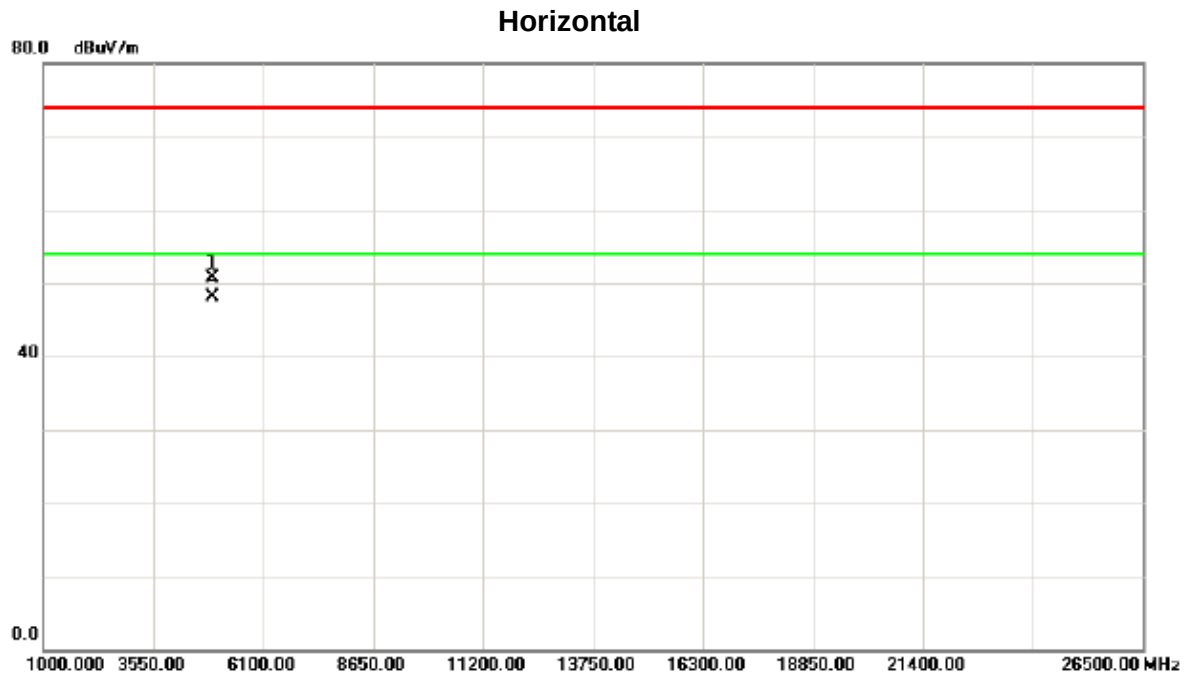

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.090	46.87	3.80	50.67	74.00	-23.33	peak	
2	*	4924.110	44.36	3.80	48.16	54.00	-5.84	AVG	


Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical

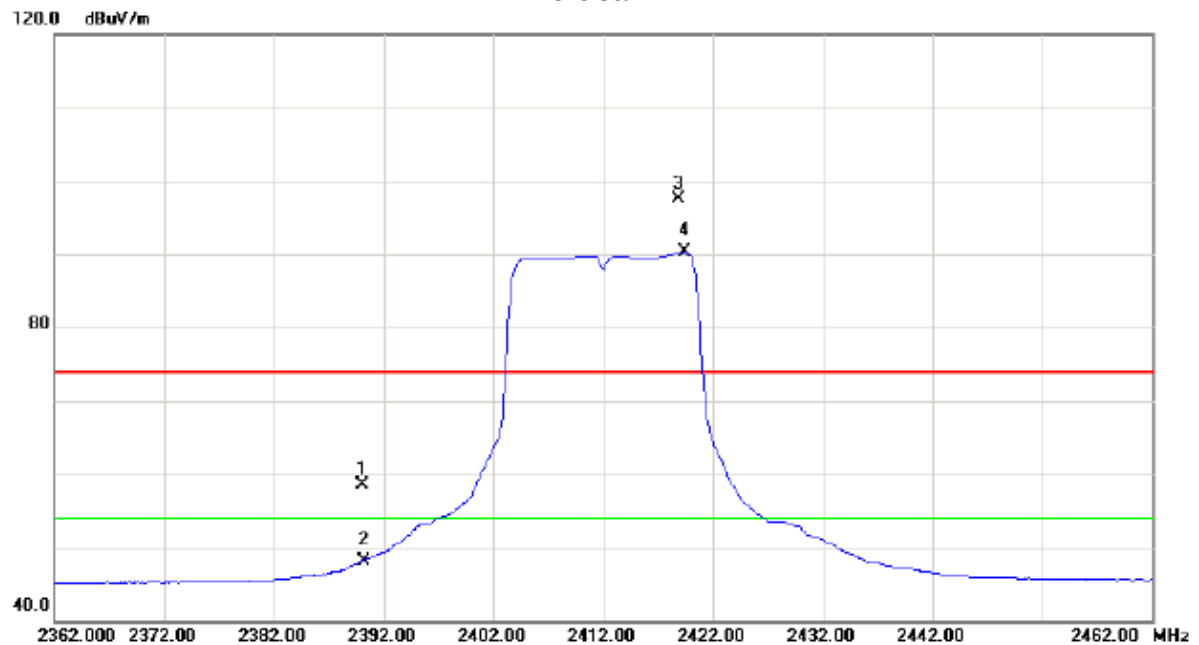

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	26.66	31.88	58.54	74.00	-15.46	peak	
2		2390.000	16.31	31.88	48.19	54.00	-5.81	AVG	
3	X	2418.900	65.55	31.92	97.47	74.00	23.47	peak	No Limit
4	*	2419.400	58.30	31.92	90.22	54.00	36.22	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

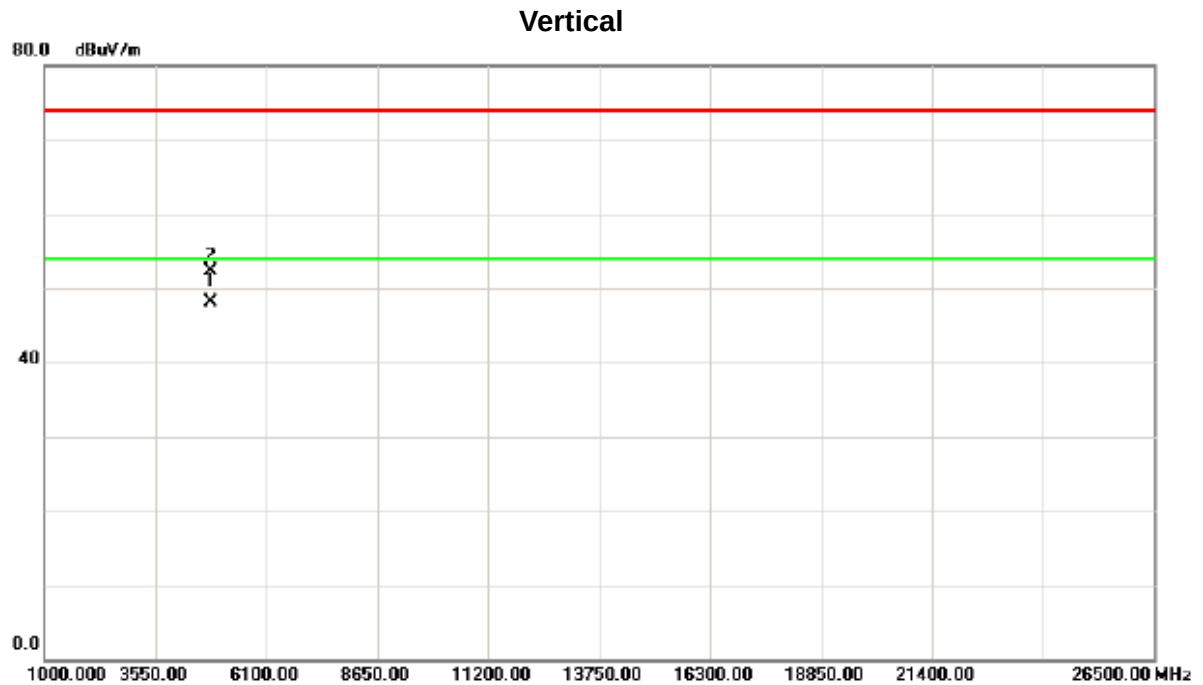

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	4824.020	44.58	3.62	48.20	54.00	-5.80	AVG	
2		4824.050	48.69	3.62	52.31	74.00	-21.69	peak	


Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal

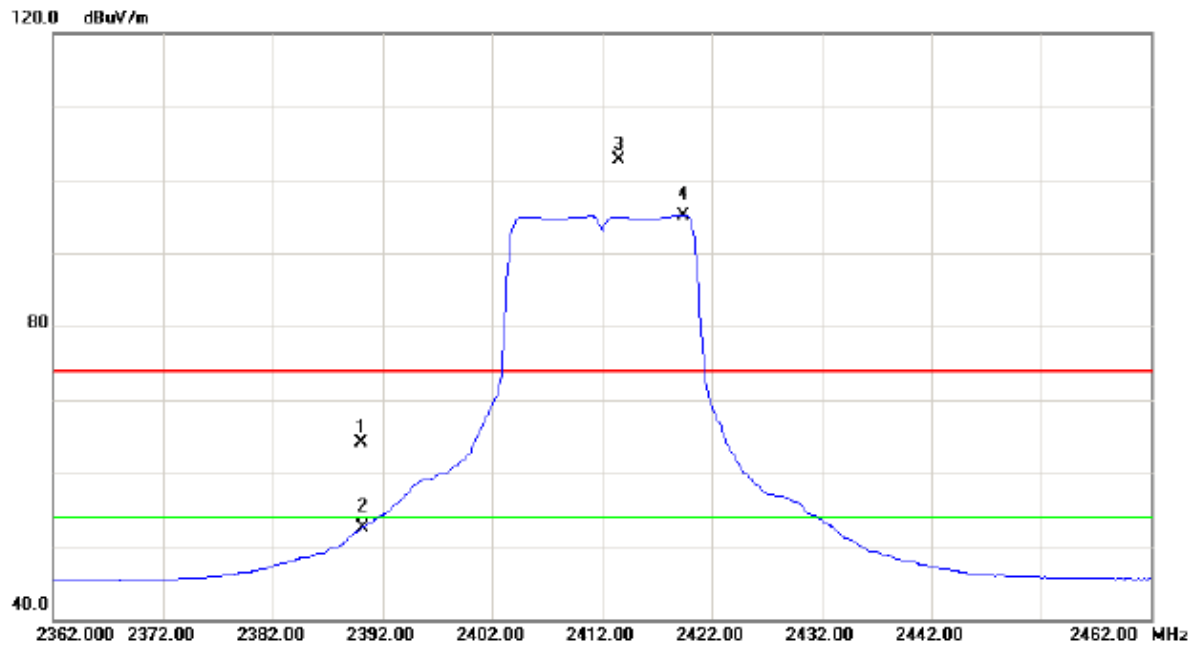

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	32.16	31.88	64.04	74.00	-9.96	peak	
2		2390.000	20.58	31.88	52.46	54.00	-1.54	AVG	
3	X	2413.500	70.71	31.91	102.62	74.00	28.62	peak	No Limit
4	*	2419.400	63.24	31.92	95.16	54.00	41.16	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

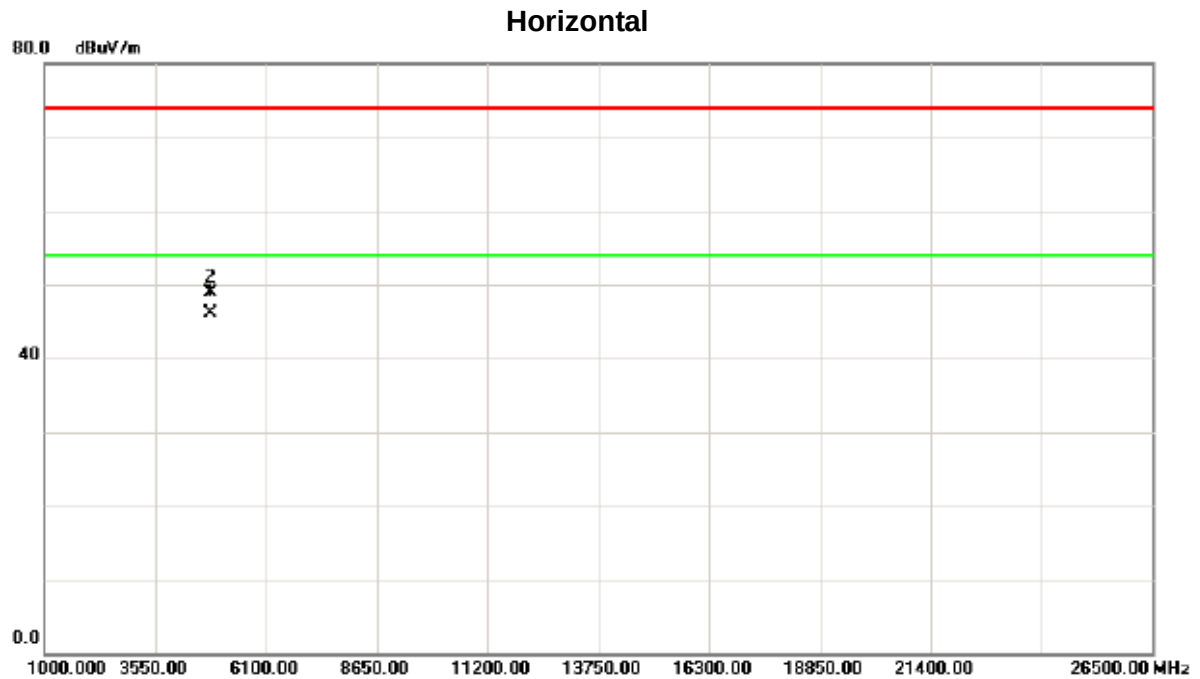

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4824.010	42.47	3.62	46.09	54.00	-7.91	AVG	
2		4824.020	45.28	3.62	48.90	74.00	-25.10	peak	


Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical

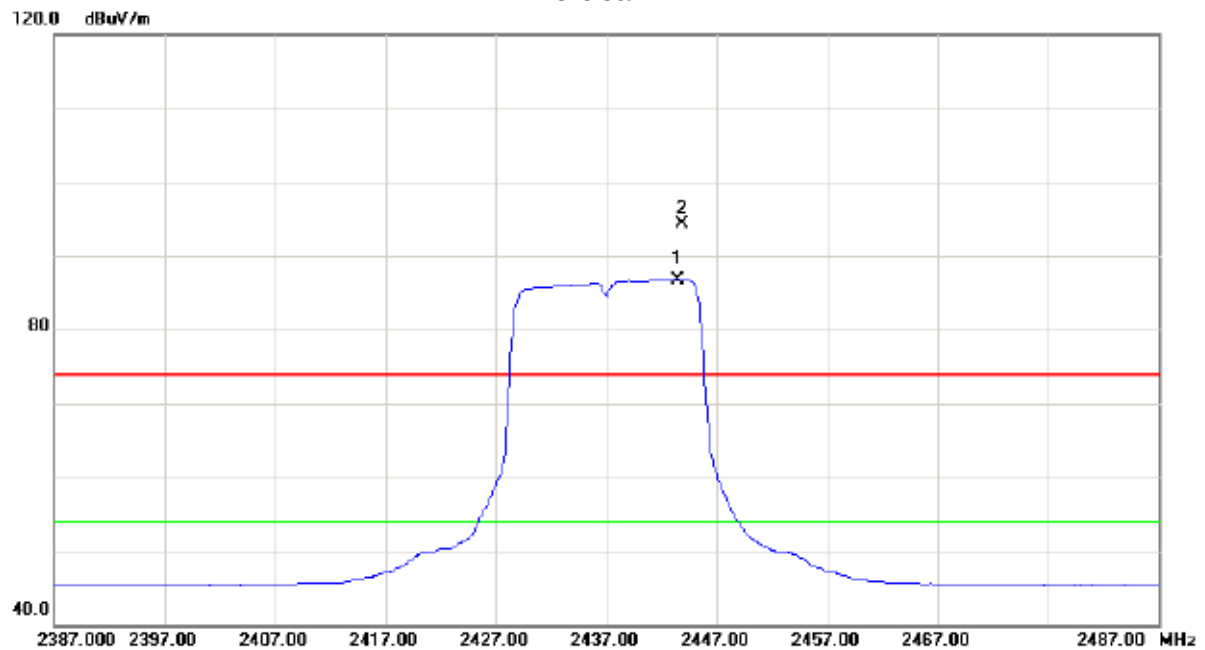

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2443.500	54.83	31.95	86.78	54.00	32.78	AVG	No Limit
2	X	2443.800	62.26	31.96	94.22	74.00	20.22	peak	No Limit


Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

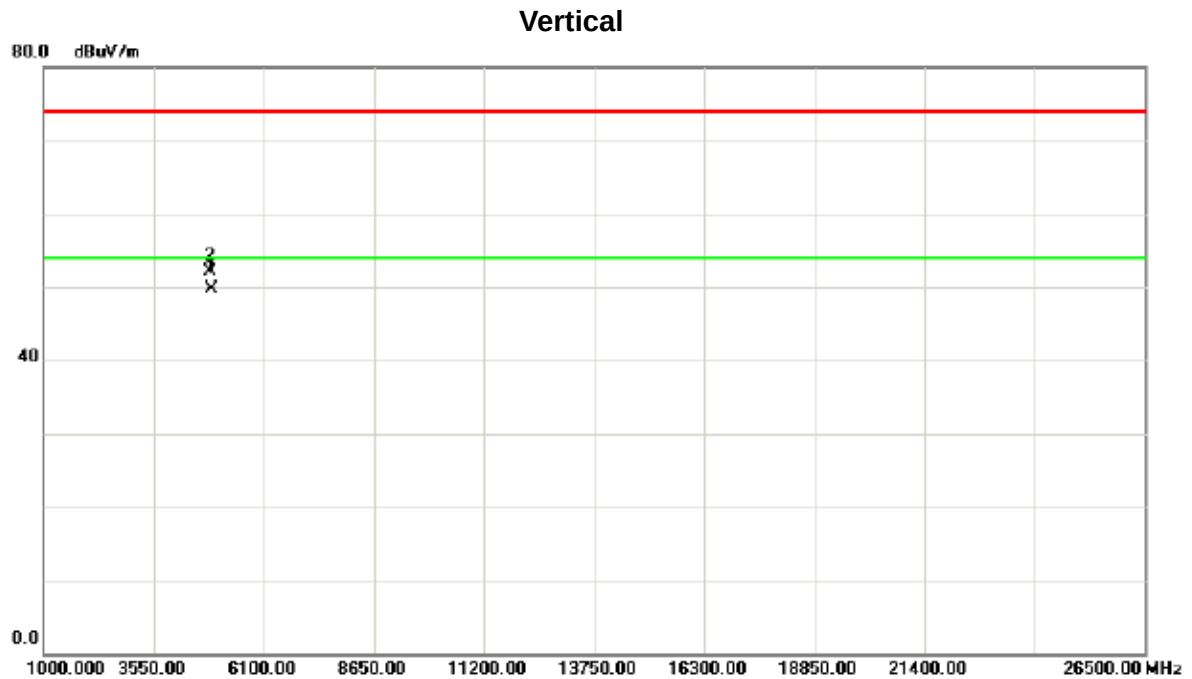

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4873.950	45.93	3.72	49.65	54.00	-4.35	AVG	
2		4874.020	48.44	3.72	52.16	74.00	-21.84	peak	


Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal

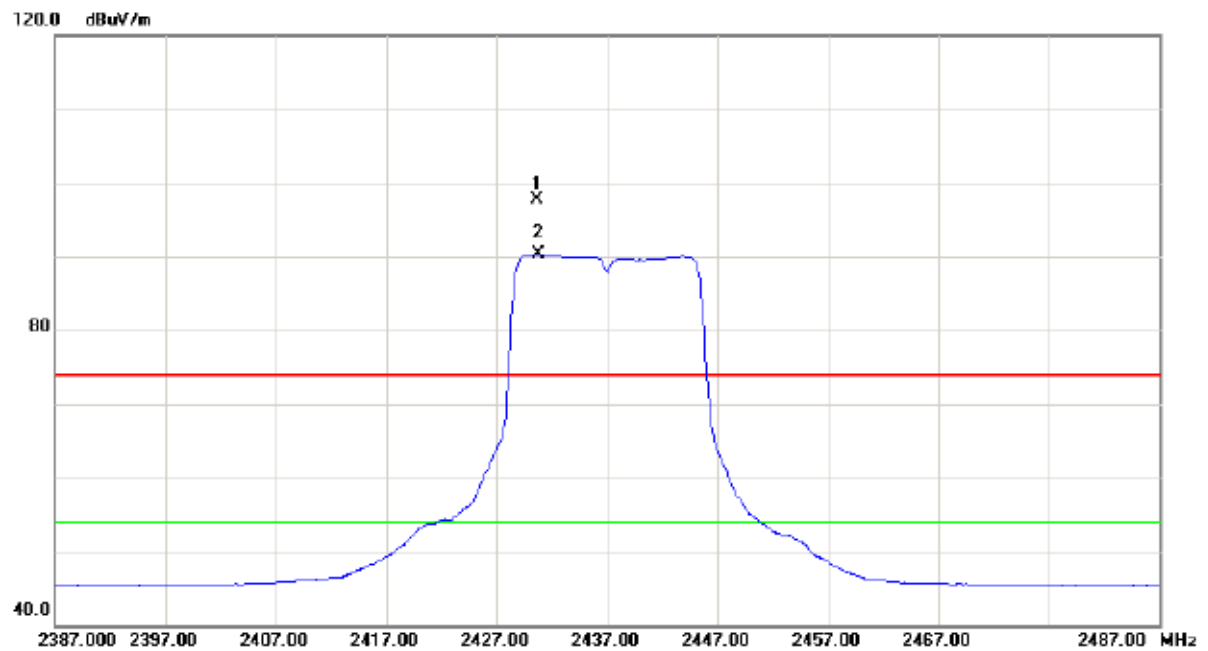


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2430.600	65.72	31.93	97.65	74.00	23.65	peak	No Limit
2	*	2430.800	58.41	31.93	90.34	54.00	36.34	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

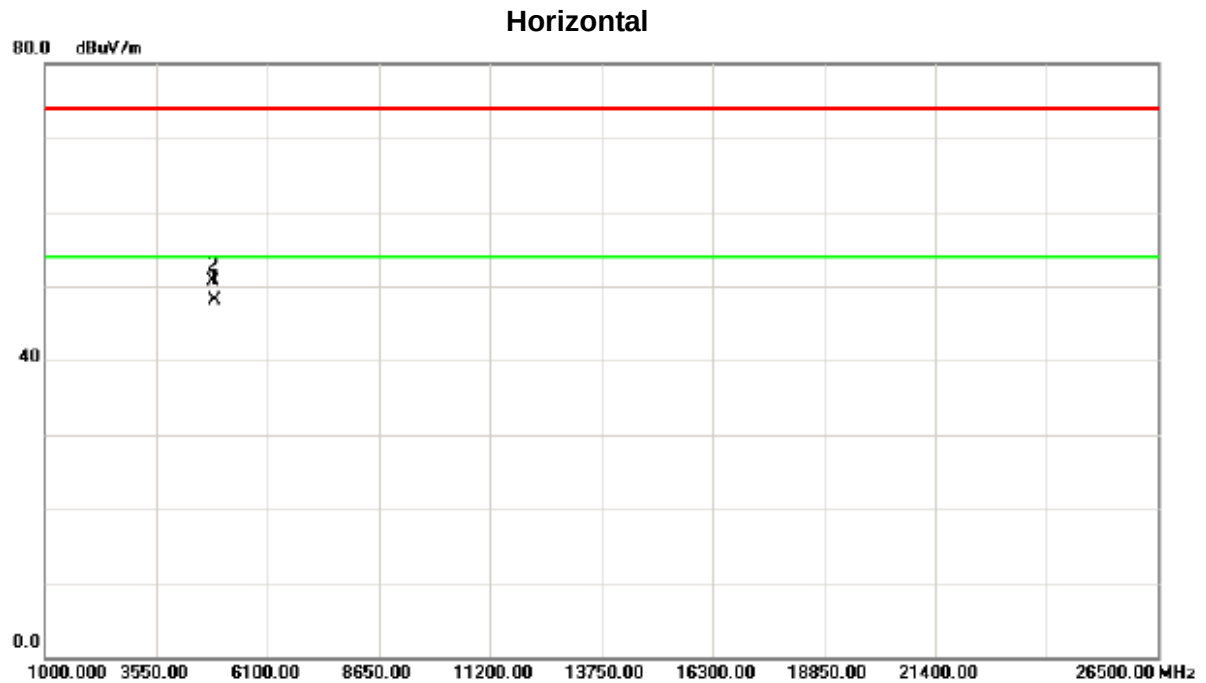


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4874.030	44.32	3.72	48.04	54.00	-5.96	AVG	
2		4874.010	47.06	3.72	50.78	74.00	-23.22	peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

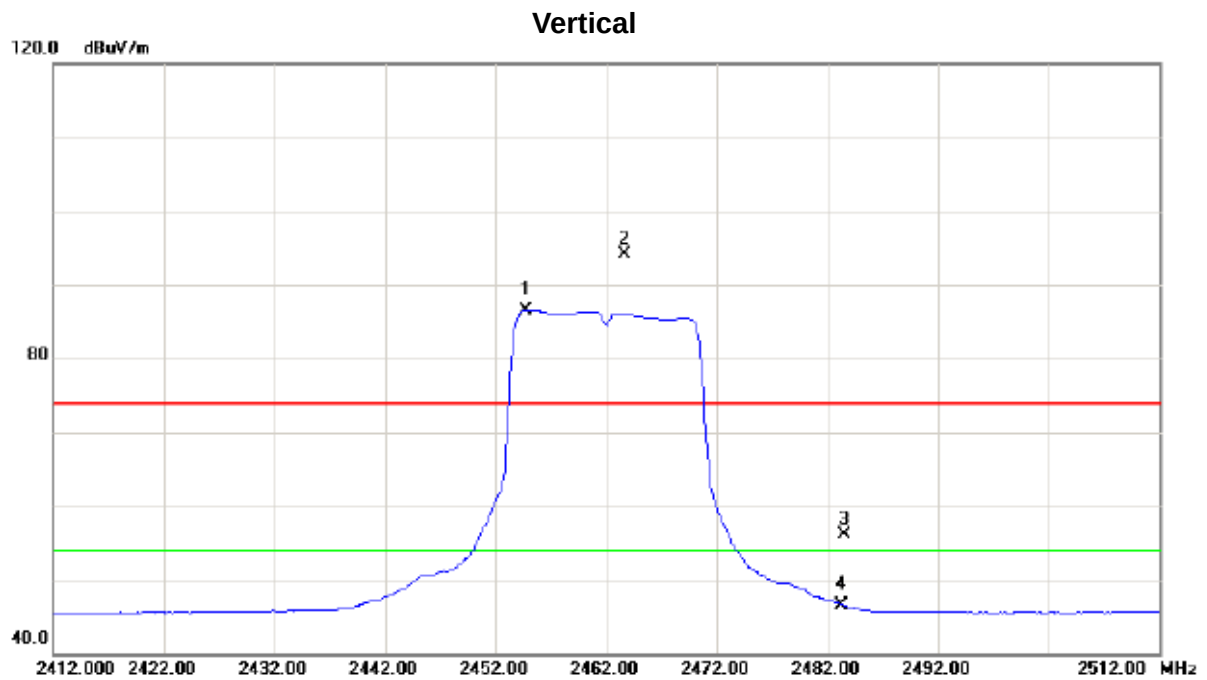

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.700	54.54	31.96	86.50	54.00	32.50	AVG	No Limit
2	X	2463.600	62.09	31.98	94.07	74.00	20.07	peak	No Limit
3		2483.500	24.08	32.01	56.09	74.00	-17.91	peak	
4		2483.500	14.58	32.01	46.59	54.00	-7.41	AVG	


Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

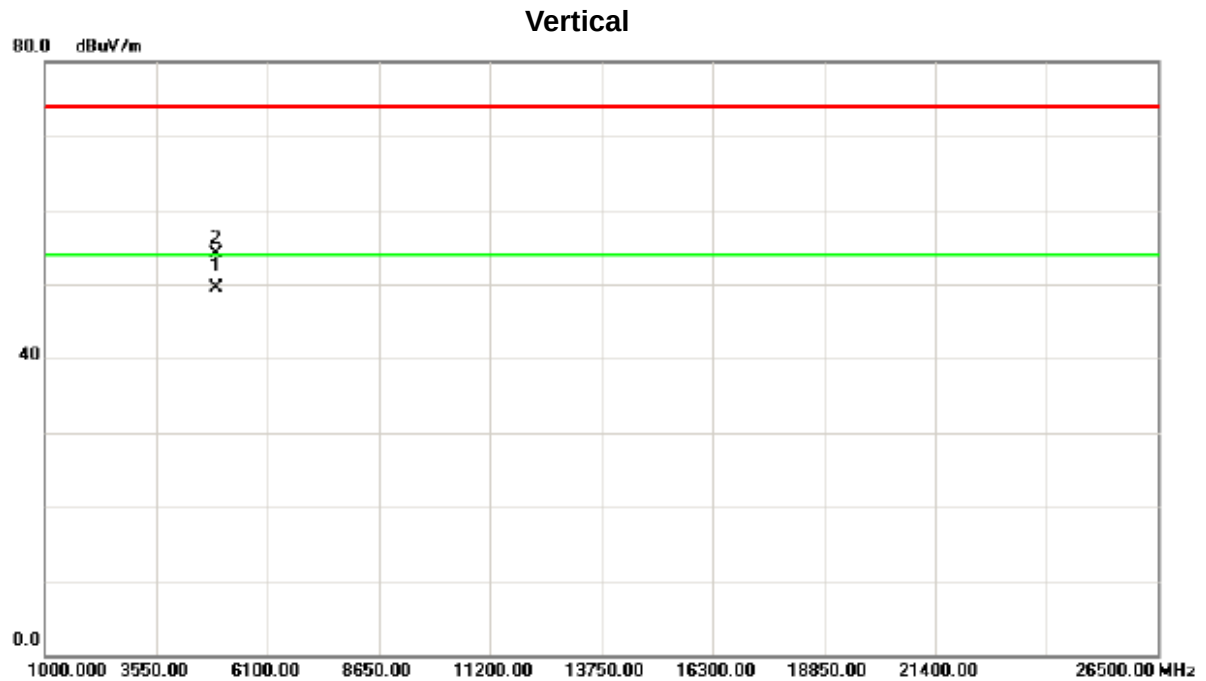

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4924.030	45.68	3.80	49.48	54.00	-4.52	AVG	
2		4924.050	50.36	3.80	54.16	74.00	-19.84	peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

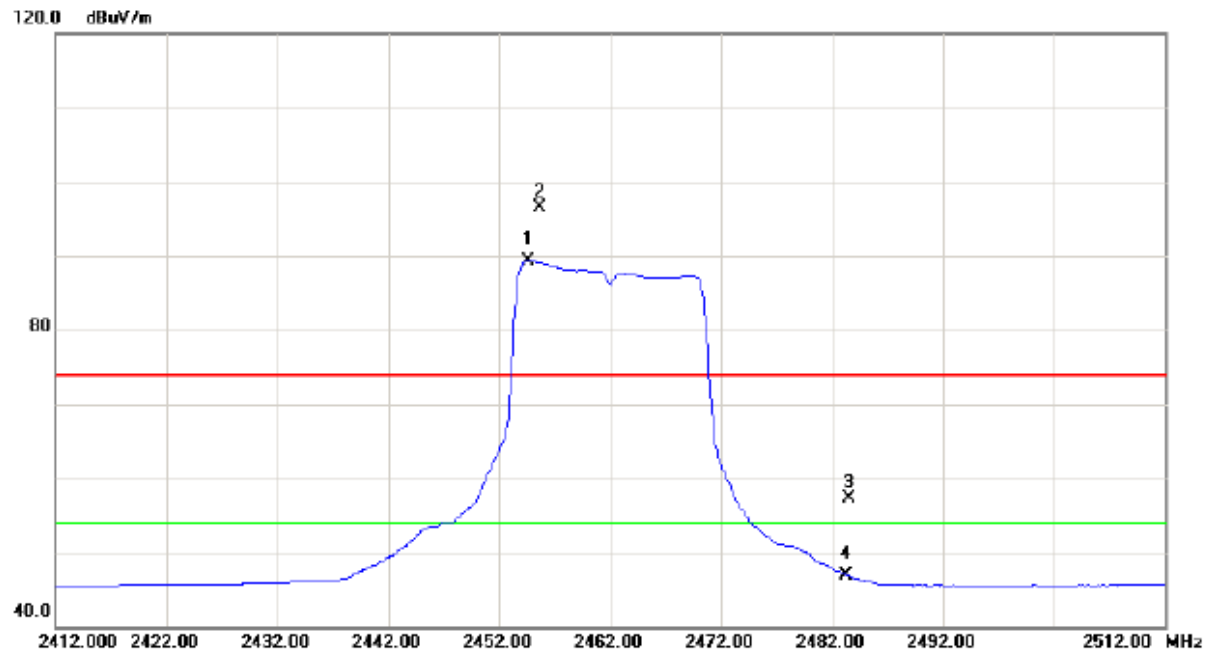

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2454.600	57.40	31.96	89.36	54.00	35.36	AVG	No Limit
2	X	2455.600	64.60	31.96	96.56	74.00	22.56	peak	No Limit
3		2483.500	25.22	32.01	57.23	74.00	-16.77	peak	
4		2483.500	14.85	32.01	46.86	54.00	-7.14	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

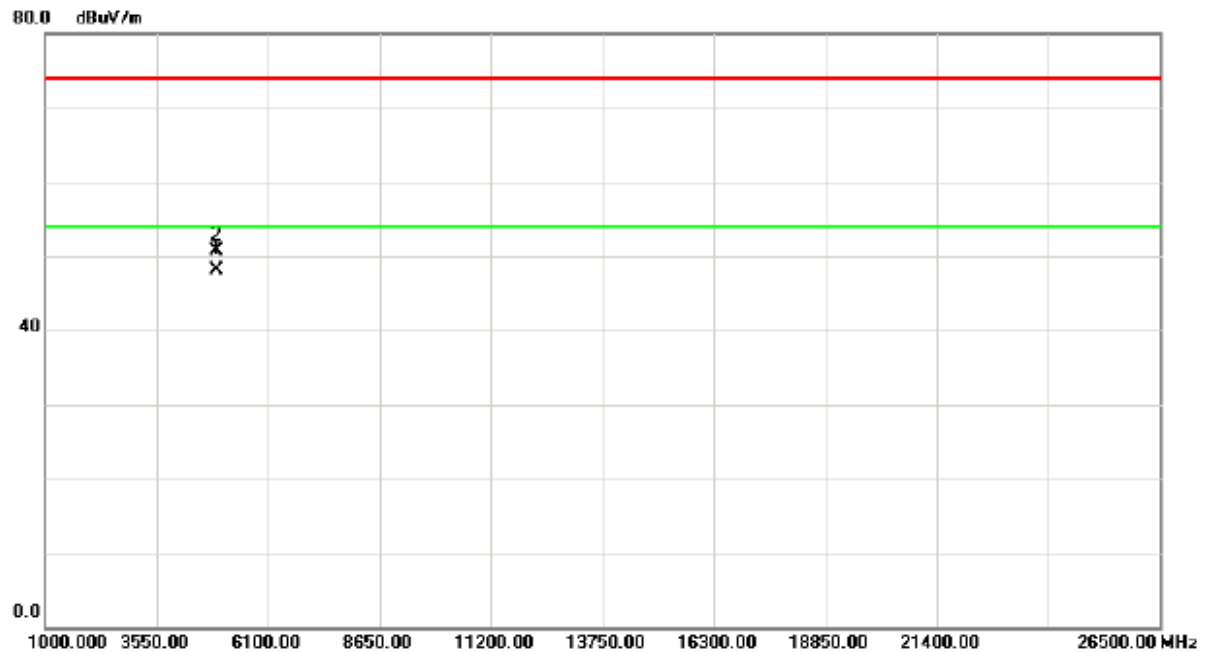

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4924.060	44.35	3.80	48.15	54.00	-5.85	AVG	
2		4924.110	46.98	3.80	50.78	74.00	-23.22	peak	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical

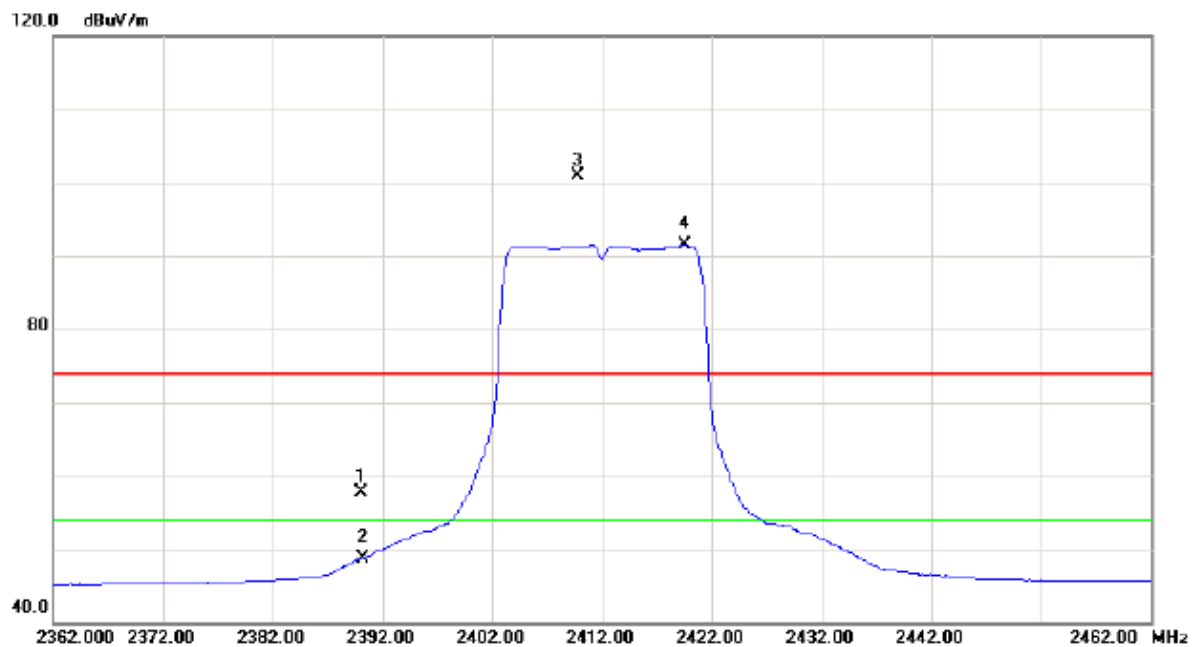

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	25.79	31.88	57.67	74.00	-16.33	peak	
2		2390.000	16.90	31.88	48.78	54.00	-5.22	AVG	
3	X	2409.800	68.92	31.91	100.83	74.00	26.83	peak	No Limit
4	*	2419.500	59.52	31.92	91.44	54.00	37.44	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

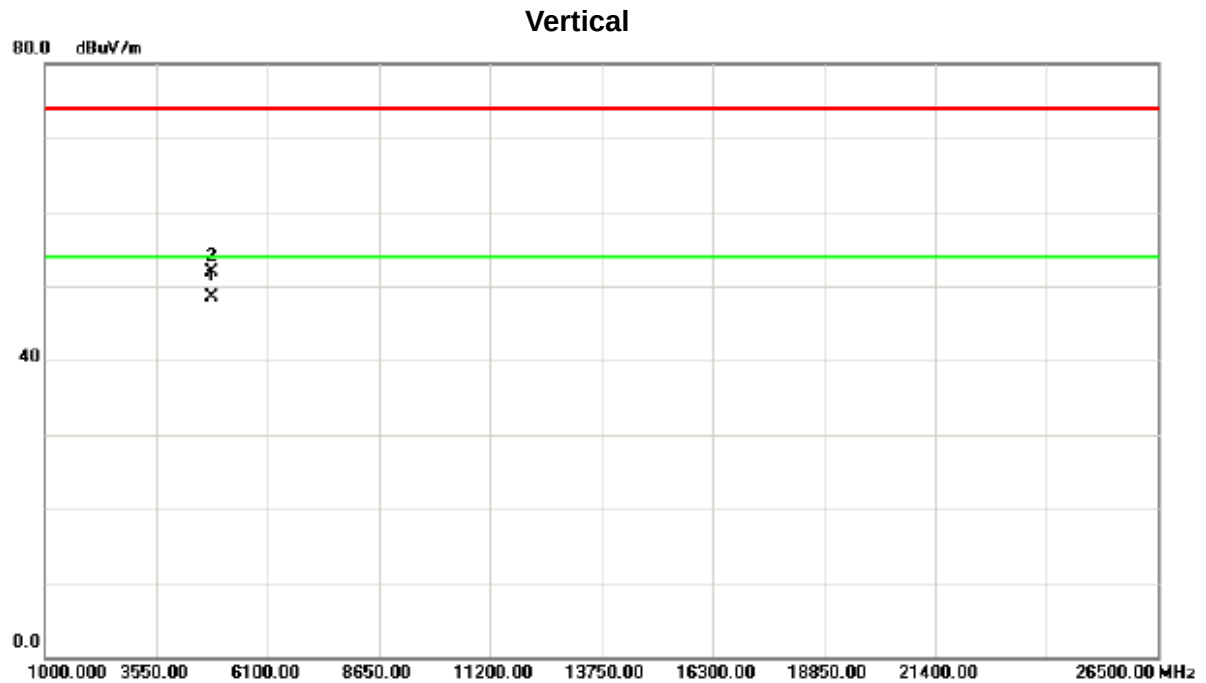

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4823.950	44.91	3.62	48.53	54.00	-5.47	AVG	
2		4824.020	48.32	3.62	51.94	74.00	-22.06	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

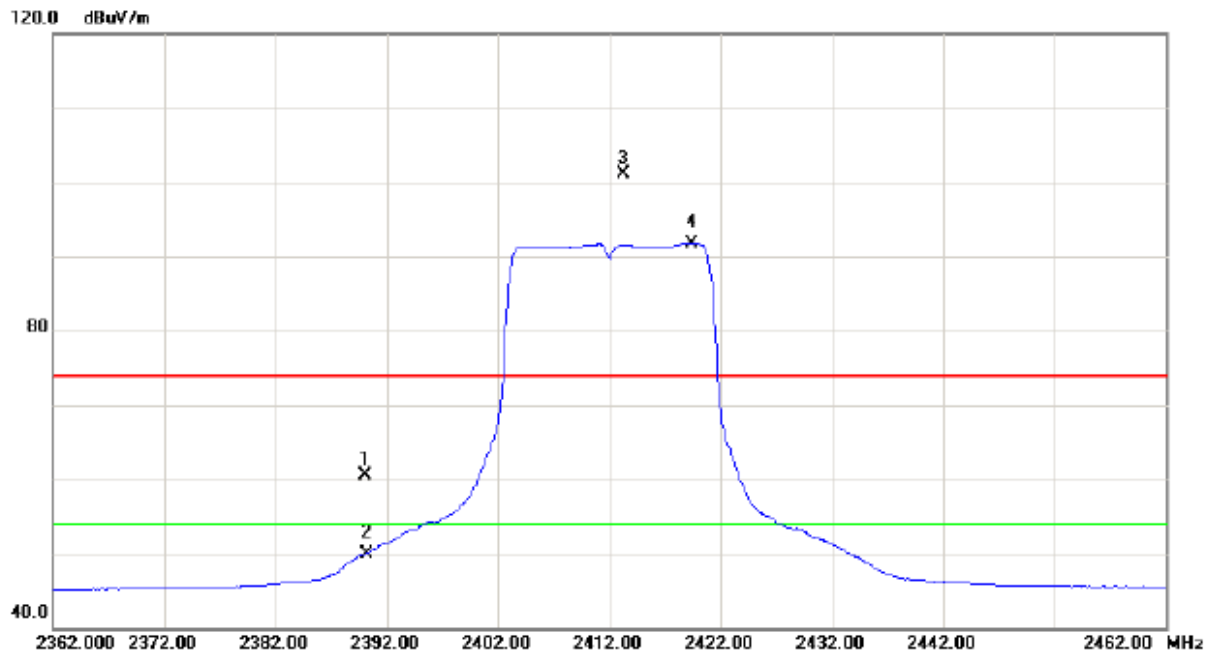

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	28.72	31.88	60.60	74.00	-13.40	peak	
2		2390.000	18.08	31.88	49.96	54.00	-4.04	AVG	
3	X	2413.300	69.25	31.91	101.16	74.00	27.16	peak	No Limit
4	*	2419.400	59.88	31.92	91.80	54.00	37.80	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

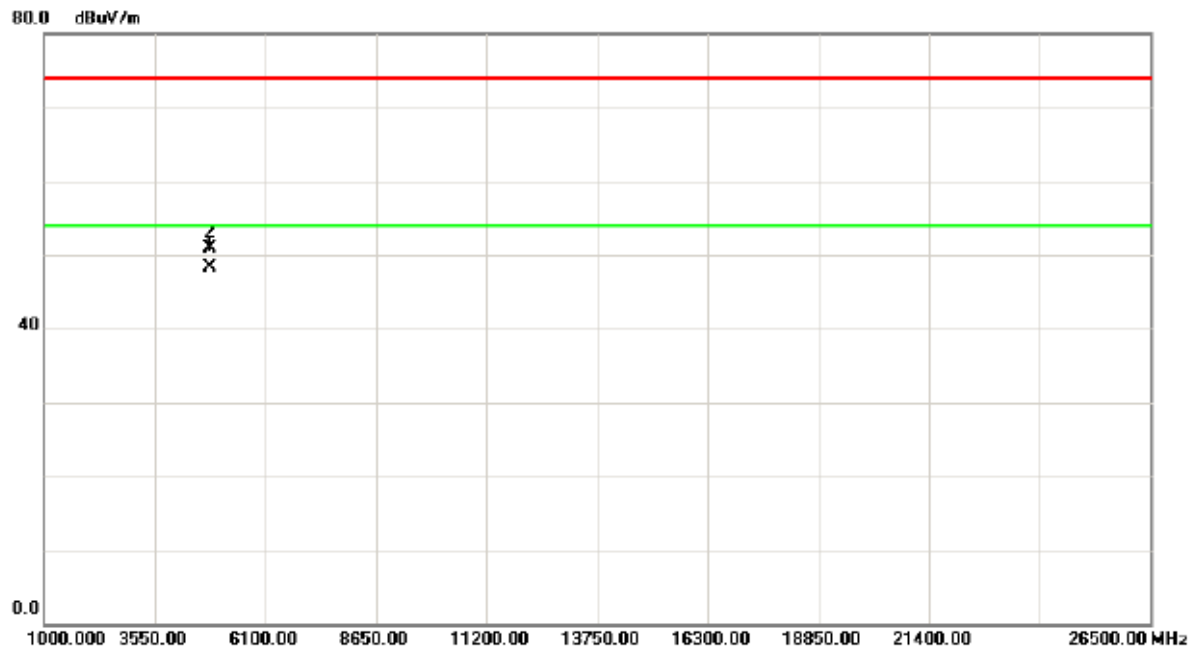

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4824.010	44.64	3.62	48.26	54.00	-5.74	AVG	
2		4824.060	47.35	3.62	50.97	74.00	-23.03	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

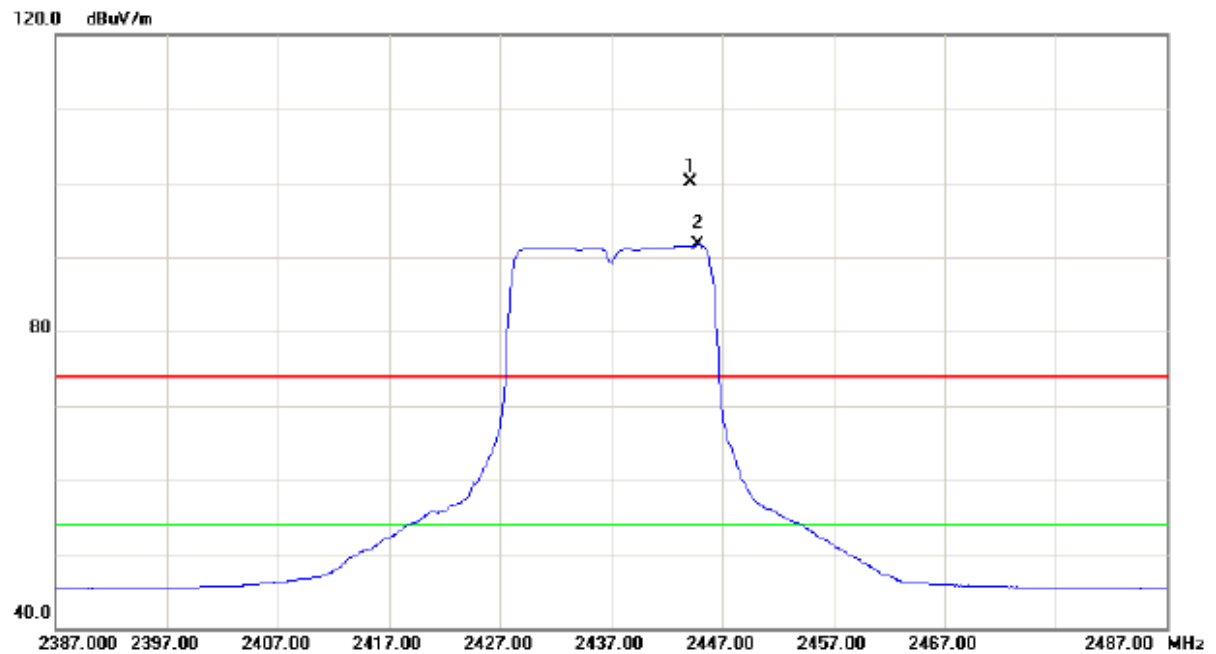

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2444.100	68.12	31.96	100.08	74.00	26.08	peak	No Limit
2	*	2444.800	59.66	31.96	91.62	54.00	37.62	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

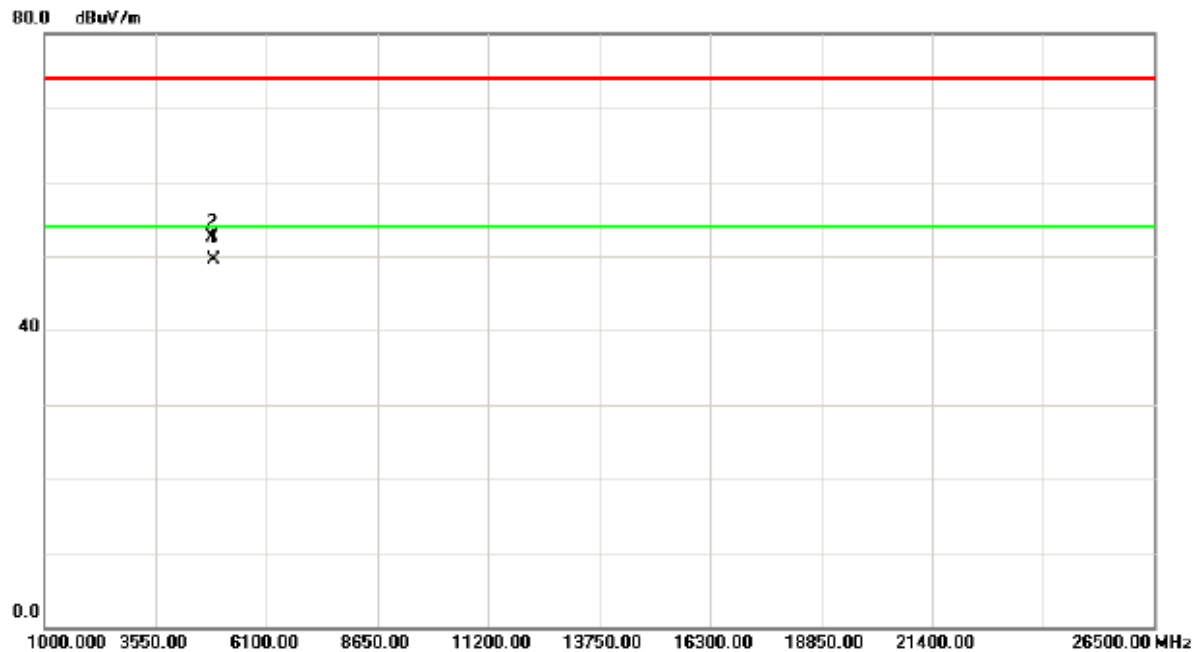

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4874.000	45.77	3.72	49.49	54.00	-4.51	AVG	
2		4874.060	48.81	3.72	52.53	74.00	-21.47	peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

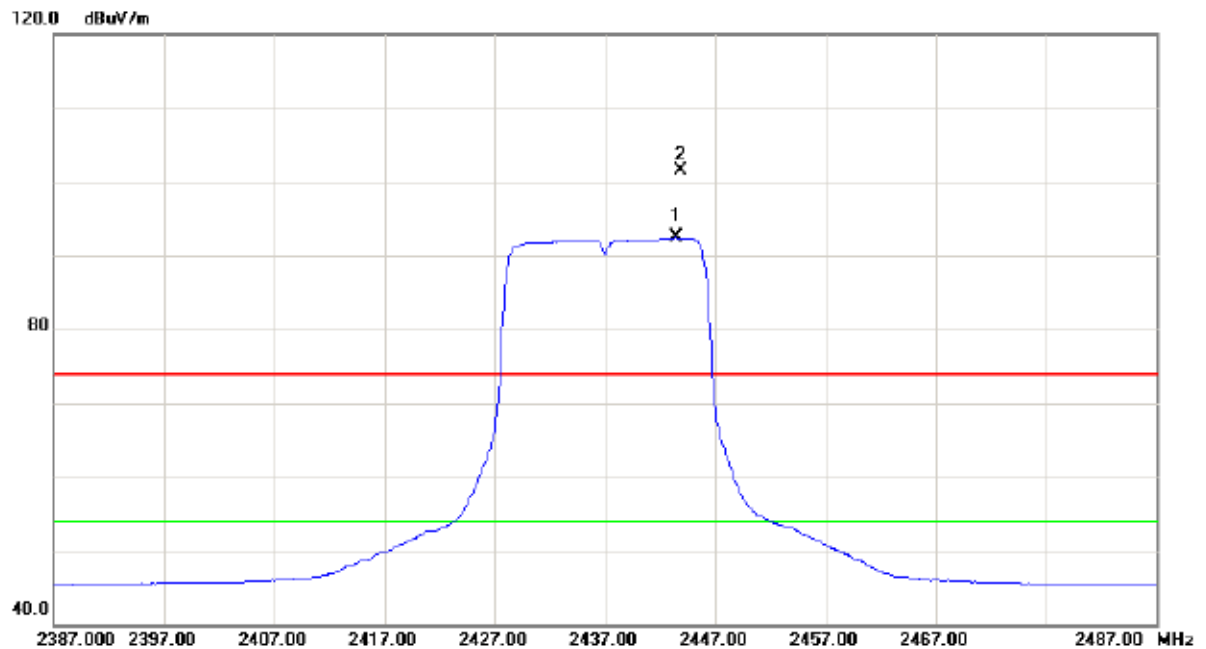

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2443.500	60.46	31.95	92.41	54.00	38.41	AVG	No Limit
2	X	2443.800	69.54	31.96	101.50	74.00	27.50	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

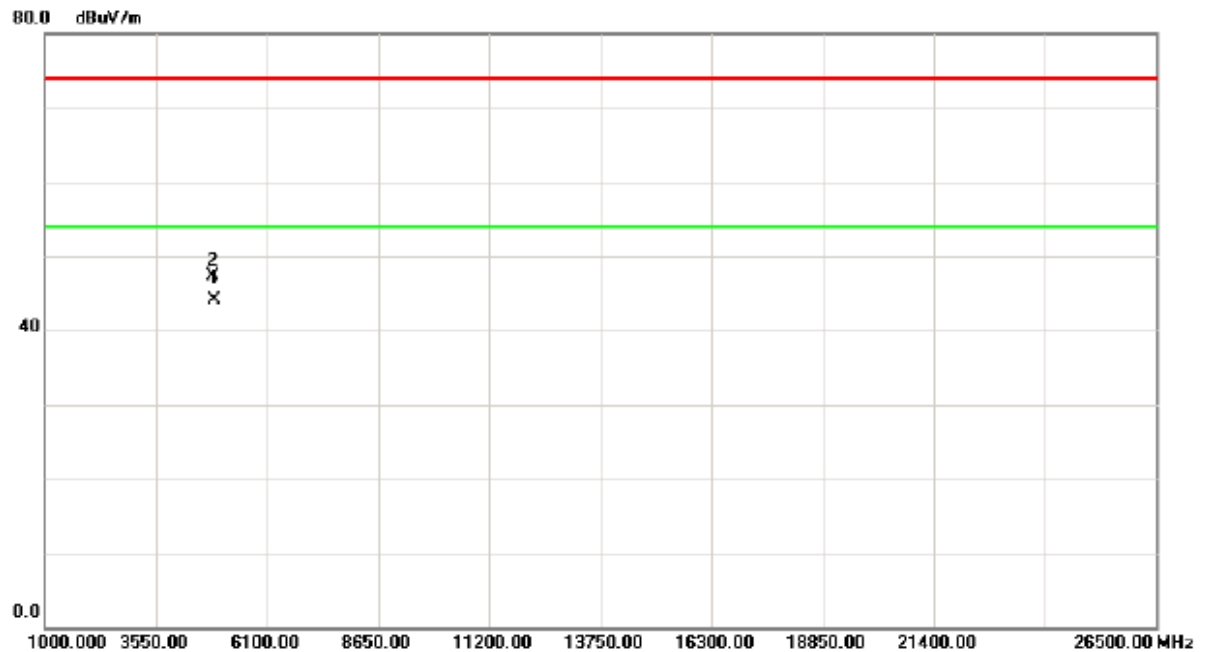

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4874.060	40.38	3.72	44.10	54.00	-9.90	AVG	
2		4874.080	43.62	3.72	47.34	74.00	-26.66	peak	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical

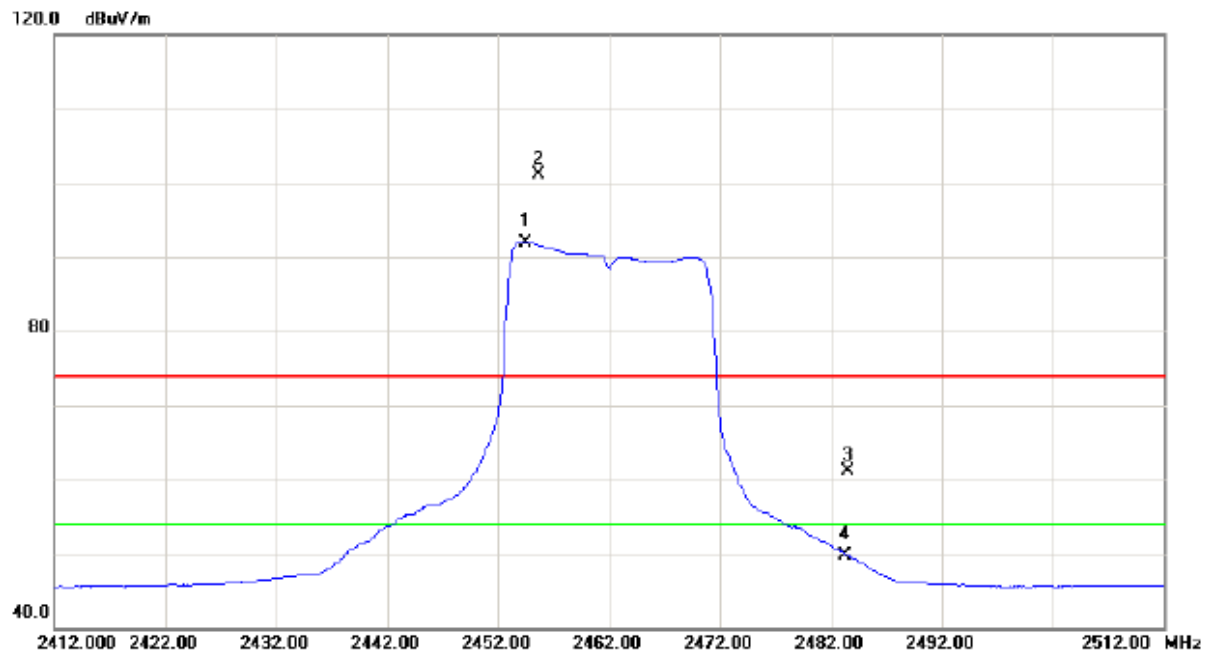

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.400	60.02	31.96	91.98	54.00	37.98	AVG	No Limit
2	X	2455.600	69.08	31.96	101.04	74.00	27.04	peak	No Limit
3		2483.500	29.16	32.01	61.17	74.00	-12.83	peak	
4		2483.500	17.70	32.01	49.71	54.00	-4.29	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

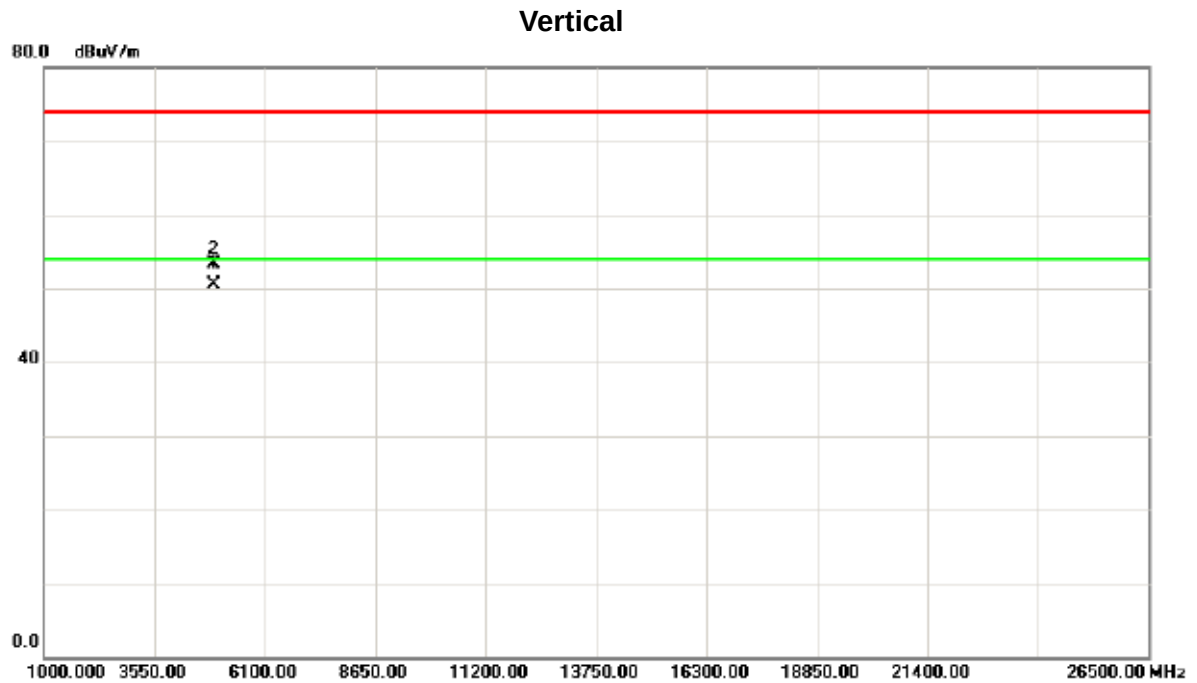

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4924.050	46.78	3.80	50.58	54.00	-3.42	AVG	
2		4924.060	49.51	3.80	53.31	74.00	-20.69	peak	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

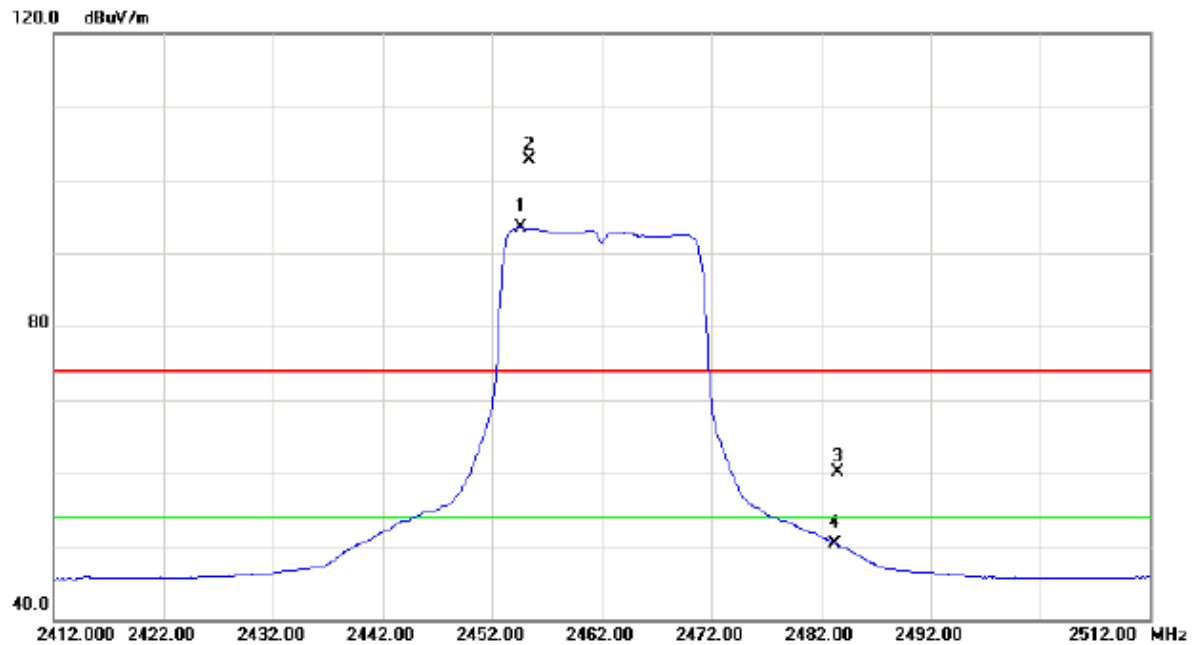

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.600	61.49	31.96	93.45	54.00	39.45	AVG	No Limit
2	X	2455.400	70.69	31.96	102.65	74.00	28.65	peak	No Limit
3		2483.500	28.09	32.01	60.10	74.00	-13.90	peak	
4		2483.500	18.26	32.01	50.27	54.00	-3.73	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

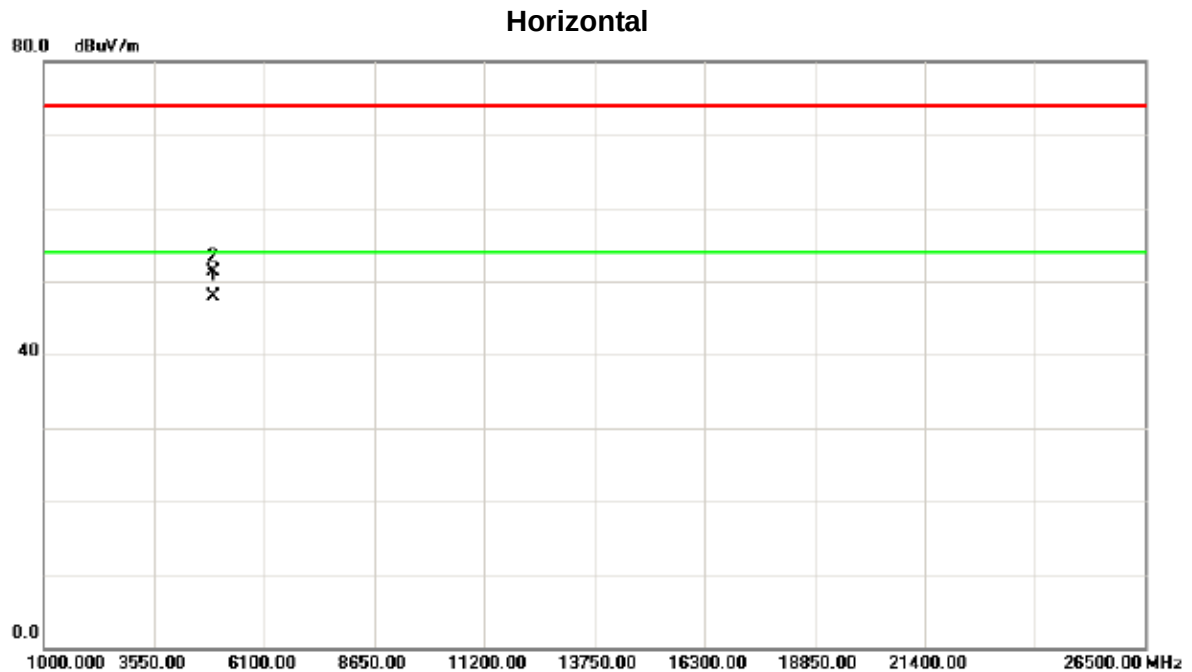

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4924.030	44.05	3.80	47.85	54.00	-6.15	AVG	
2		4924.080	47.49	3.80	51.29	74.00	-22.71	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Vertical

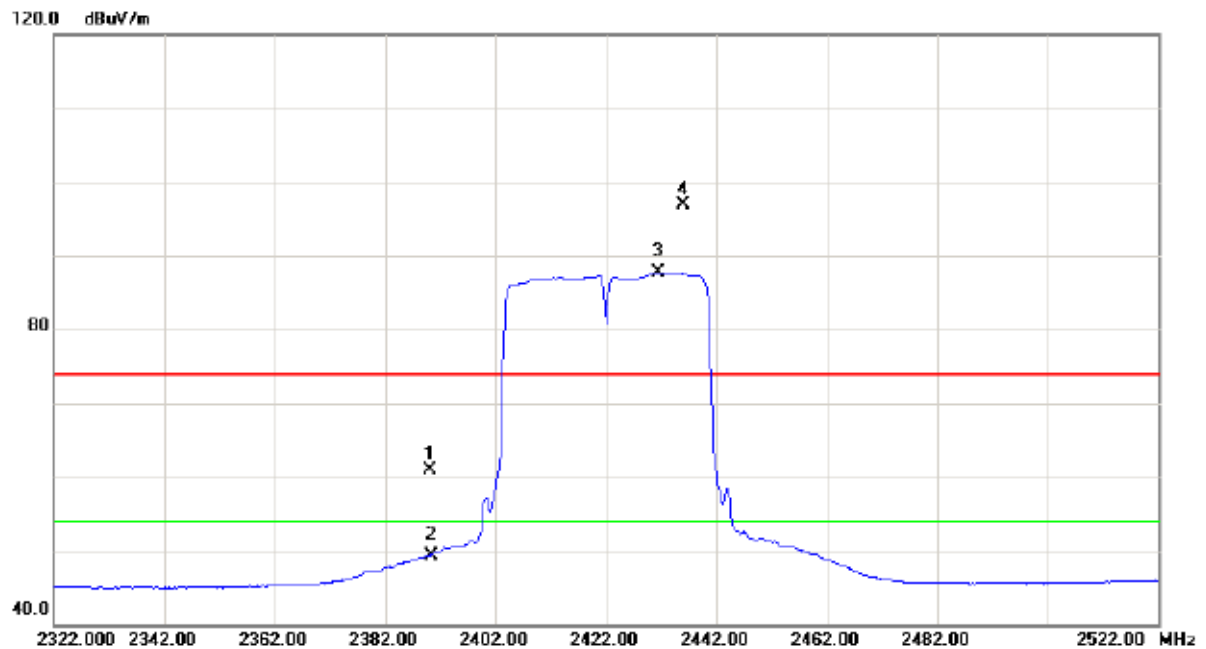

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	28.99	31.88	60.87	74.00	-13.13	peak	
2		2390.000	17.44	31.88	49.32	54.00	-4.68	AVG	
3	*	2431.400	55.82	31.94	87.76	54.00	33.76	AVG	No Limit
4	X	2436.000	64.97	31.94	96.91	74.00	22.91	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Vertical

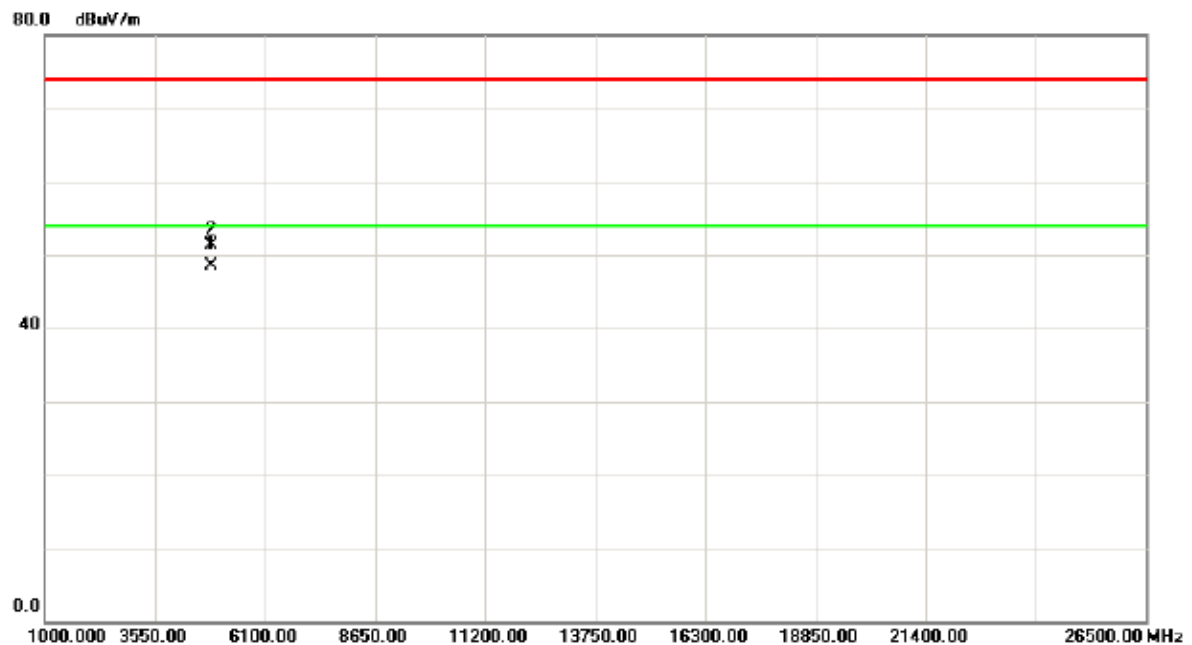

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4844.000	44.86	3.66	48.52	54.00	-5.48	AVG	
2		4844.010	47.69	3.66	51.35	74.00	-22.65	peak	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal

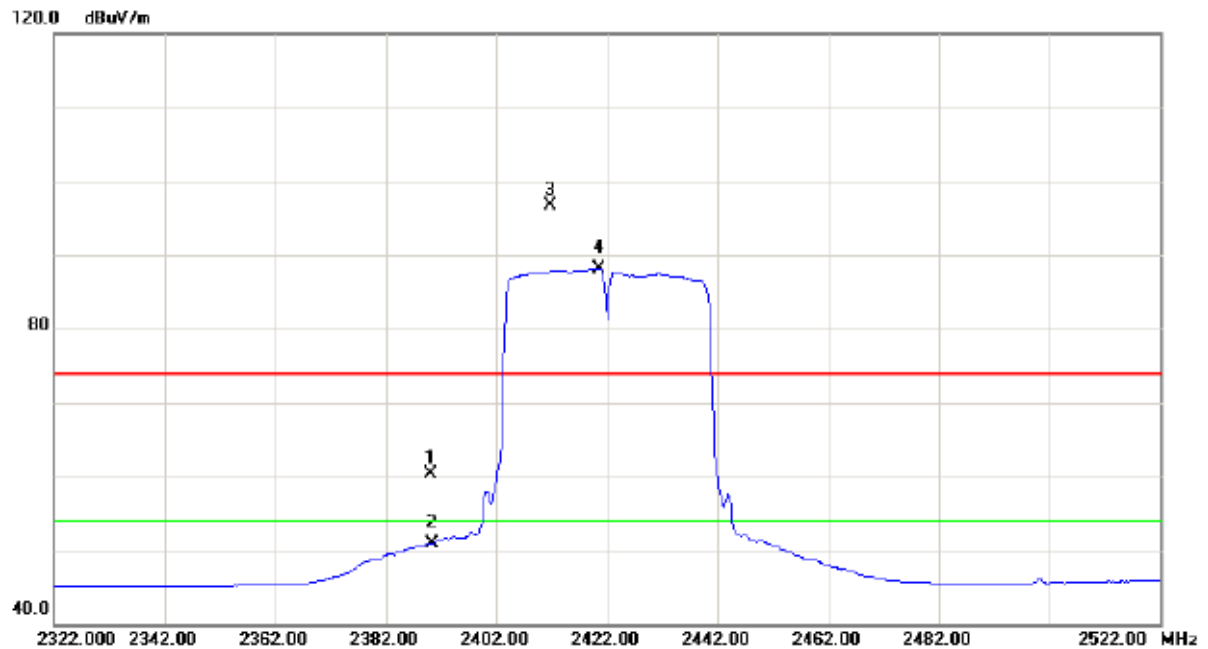

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	28.47	31.88	60.35	74.00	-13.65	peak	
2		2390.000	18.97	31.88	50.85	54.00	-3.15	AVG	
3	X	2411.600	64.70	31.91	96.61	74.00	22.61	peak	No Limit
4	*	2420.600	56.22	31.92	88.14	54.00	34.14	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

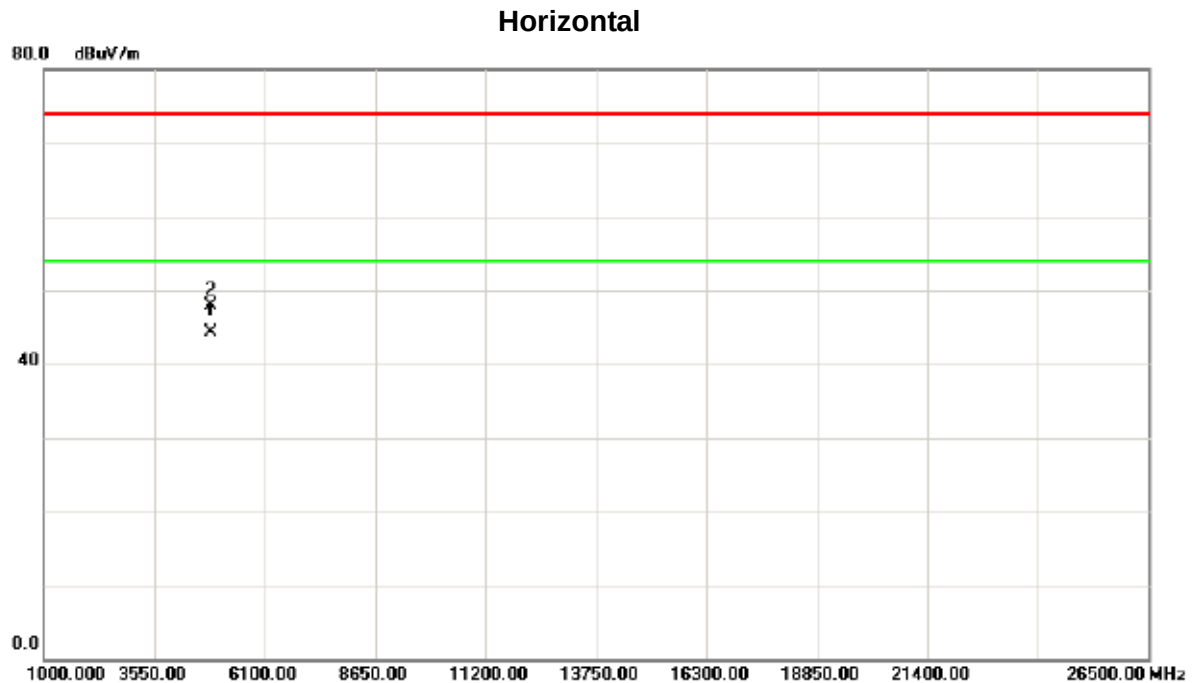

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4844.030	40.56	3.66	44.22	54.00	-9.78	AVG	
2		4844.020	44.19	3.66	47.85	74.00	-26.15	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Vertical

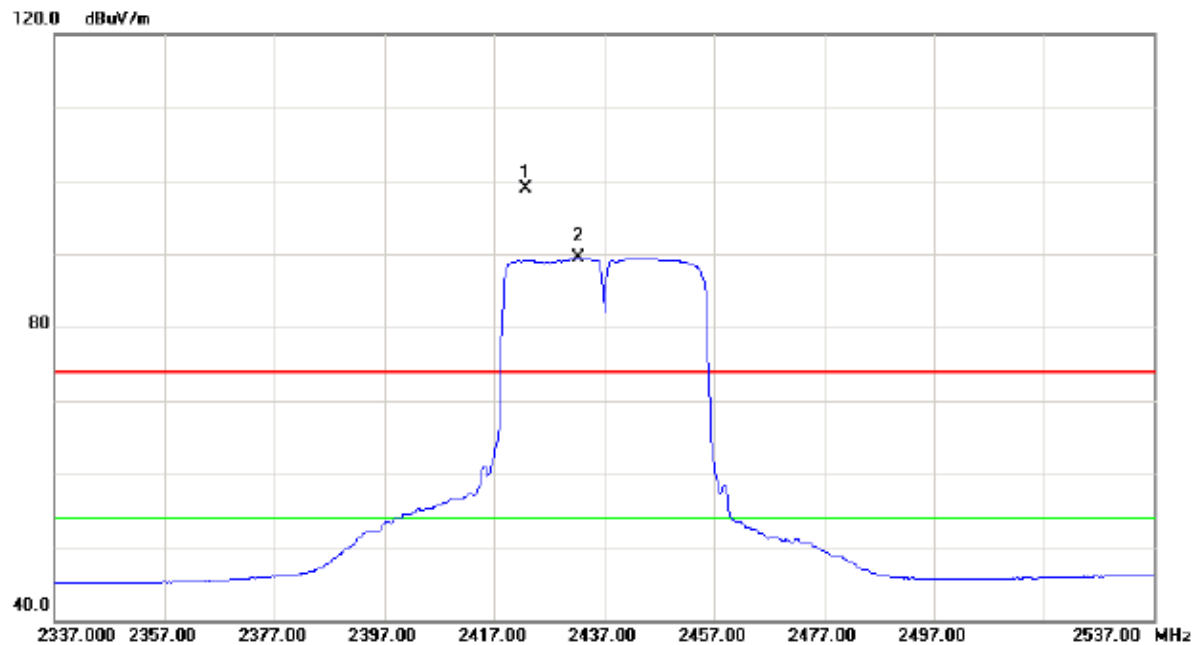

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2422.800	66.92	31.93	98.85	74.00	24.85	peak	No Limit
2	*	2432.400	57.52	31.94	89.46	54.00	35.46	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Vertical

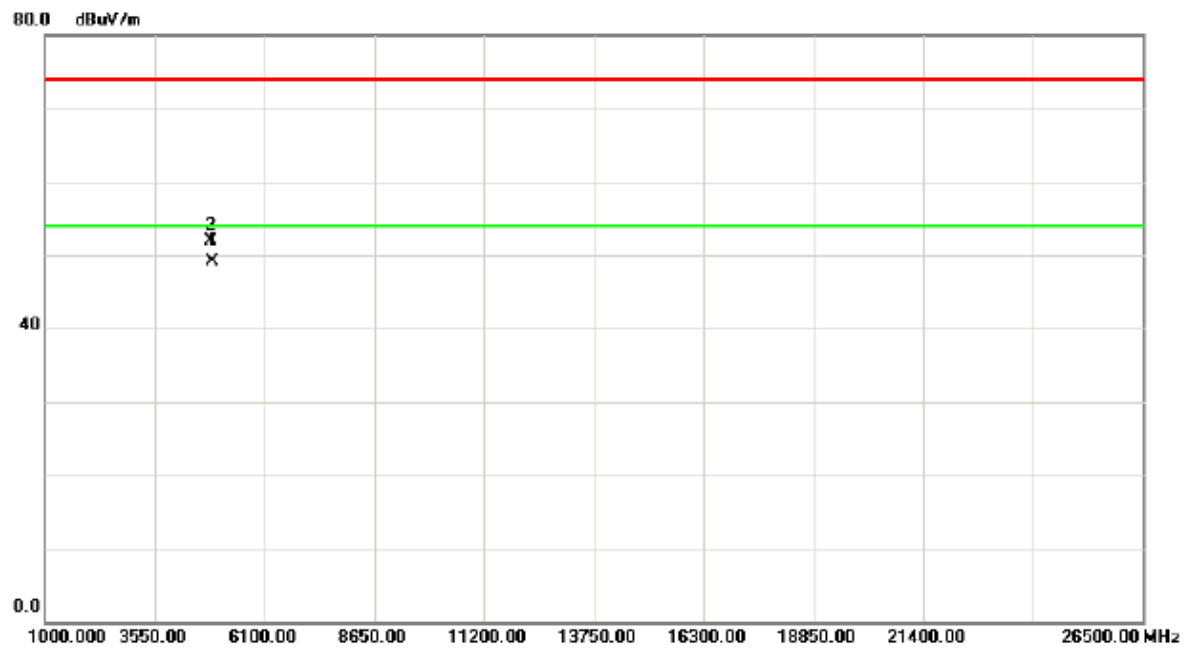

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4874.020	45.37	3.72	49.09	54.00	-4.91	AVG	
2		4874.100	48.09	3.72	51.81	74.00	-22.19	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Horizontal

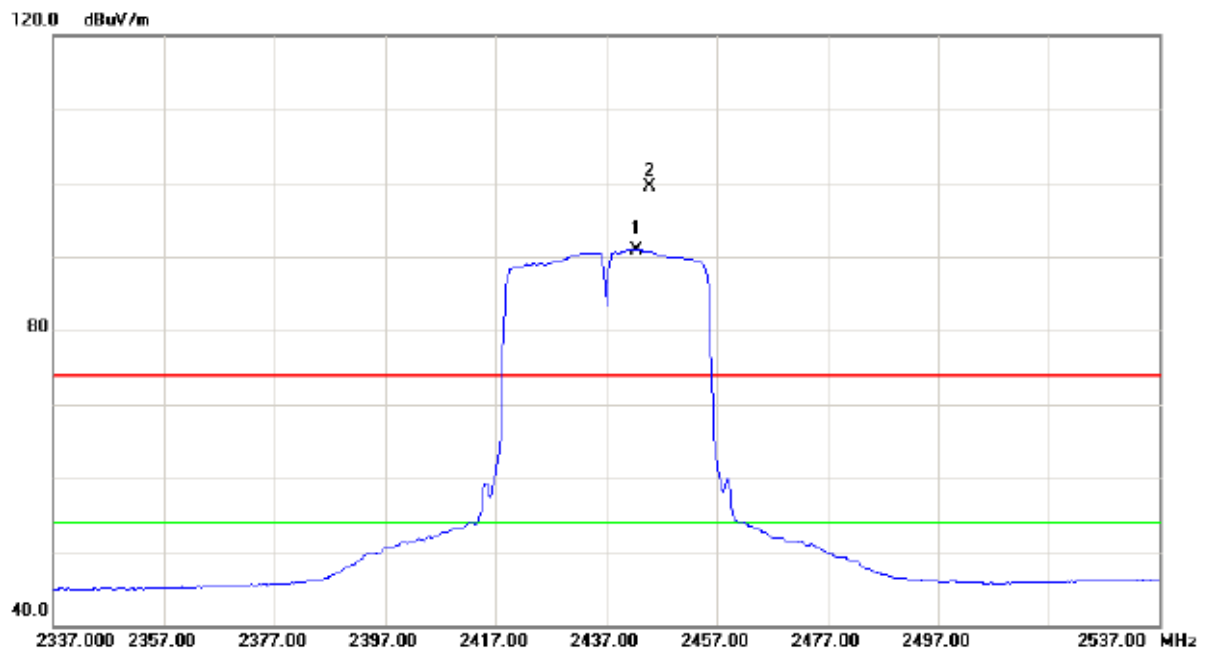

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2442.400	58.93	31.95	90.88	54.00	36.88	AVG	No Limit
2	X	2444.800	67.56	31.96	99.52	74.00	25.52	peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Horizontal

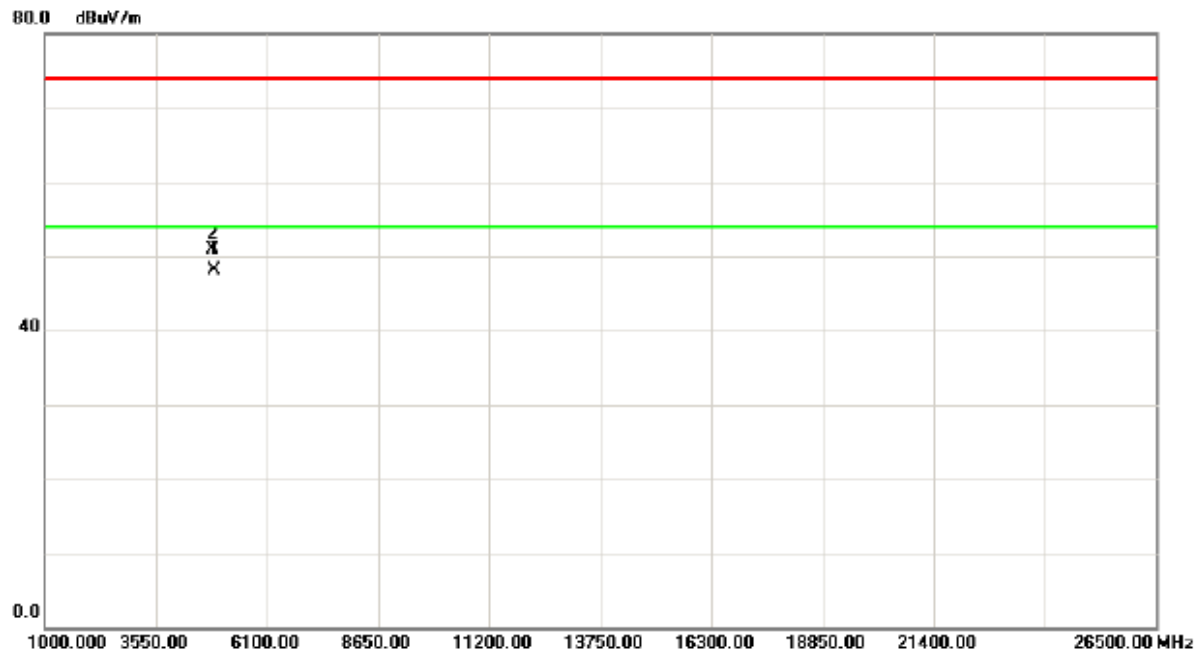

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4874.030	44.32	3.72	48.04	54.00	-5.96	AVG
2		4874.050	47.18	3.72	50.90	74.00	-23.10	peak

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Vertical

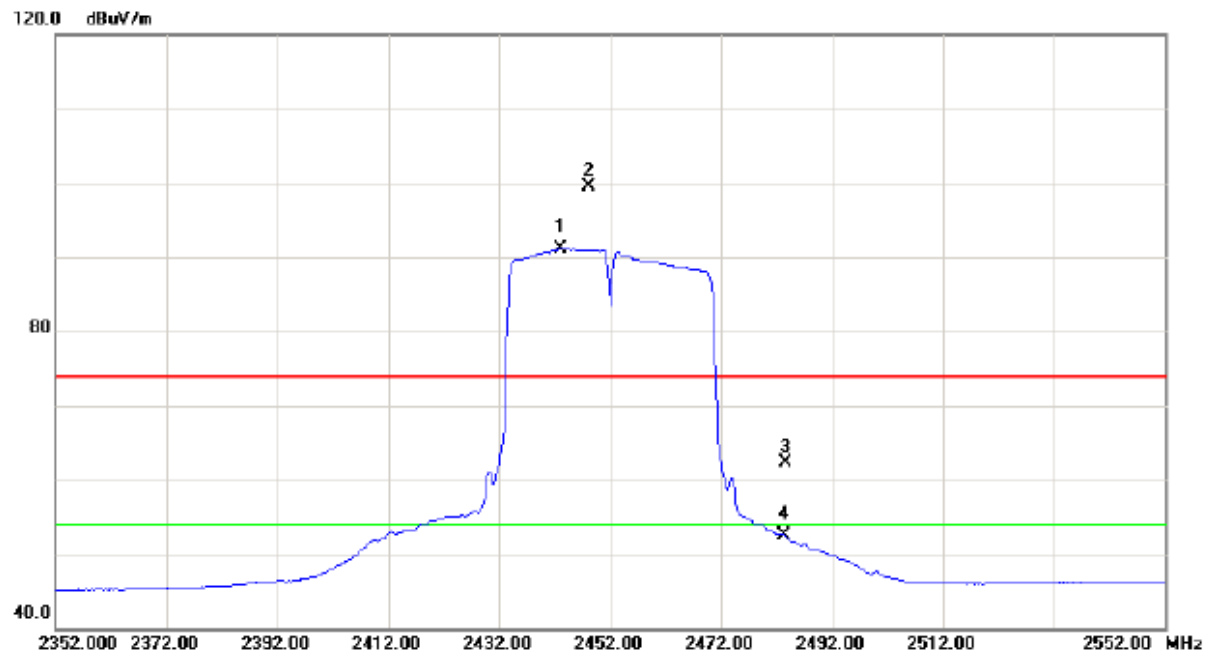

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2443.000	59.12	31.95	91.07	54.00	37.07	AVG	No Limit
2	X	2448.200	67.58	31.96	99.54	74.00	25.54	peak	No Limit
3		2483.500	30.36	32.01	62.37	74.00	-11.63	peak	
4		2483.500	20.54	32.01	52.55	54.00	-1.45	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Vertical

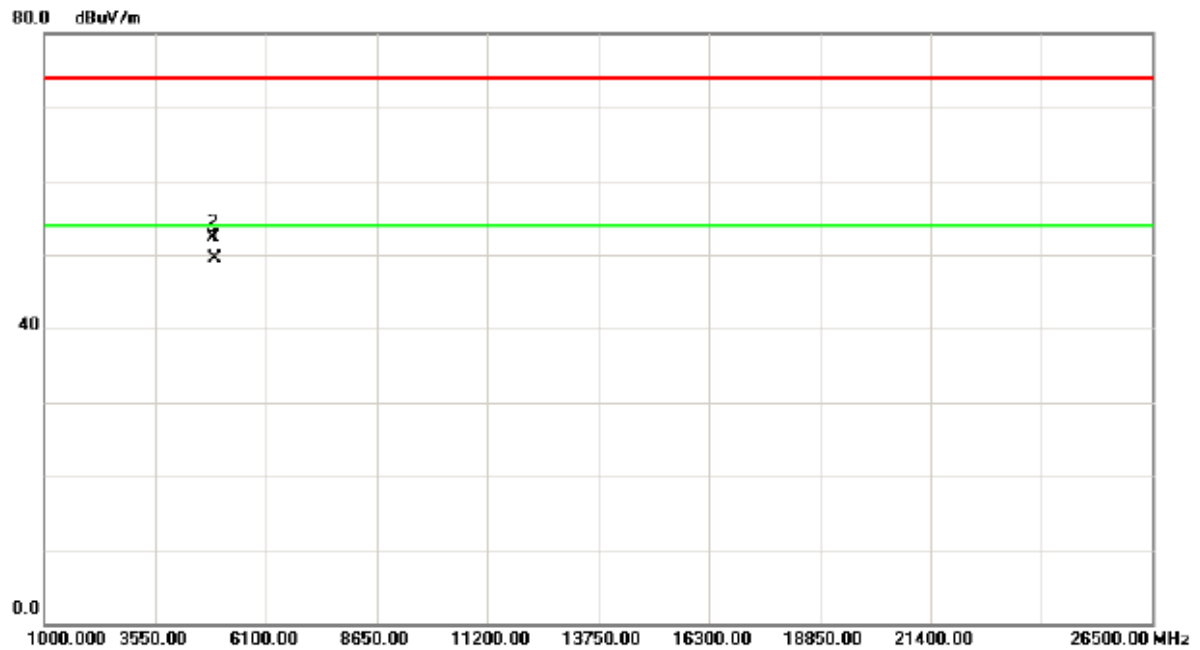

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4904.000	45.64	3.77	49.41	54.00	-4.59	AVG	
2		4904.030	48.47	3.77	52.24	74.00	-21.76	peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Horizontal

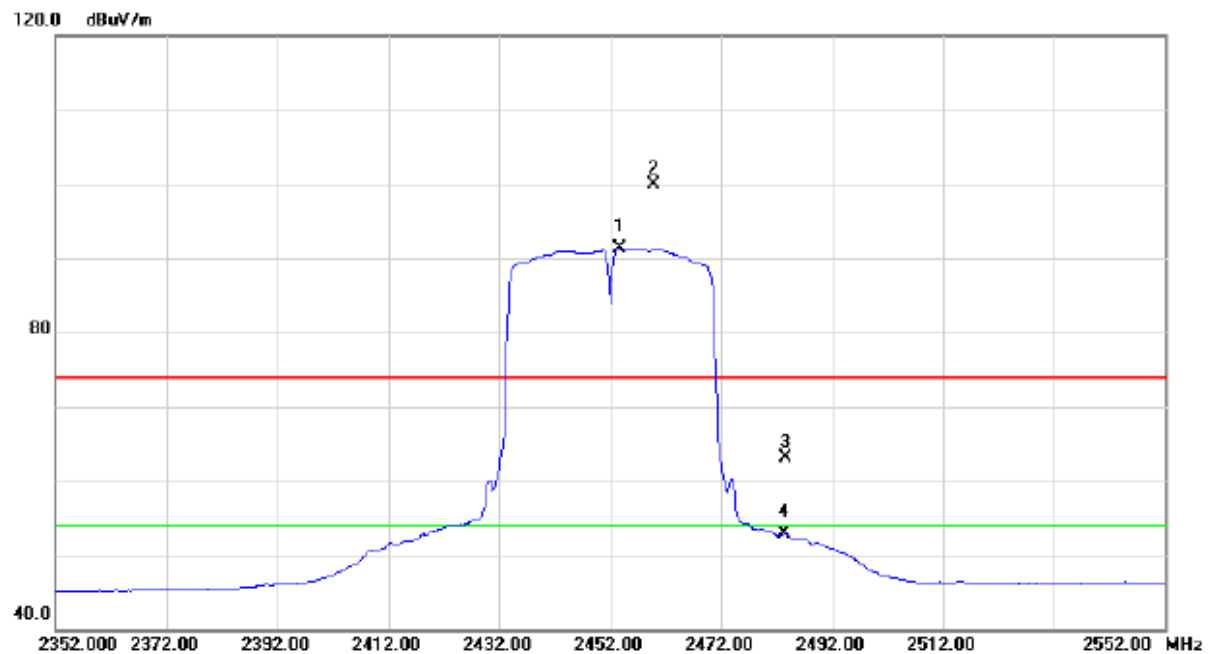

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2453.600	59.36	31.96	91.32	54.00	37.32	AVG	No Limit
2	X	2459.800	67.88	31.98	99.86	74.00	25.86	peak	No Limit
3		2483.500	31.04	32.01	63.05	74.00	-10.95	peak	
4		2483.500	20.86	32.01	52.87	54.00	-1.13	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

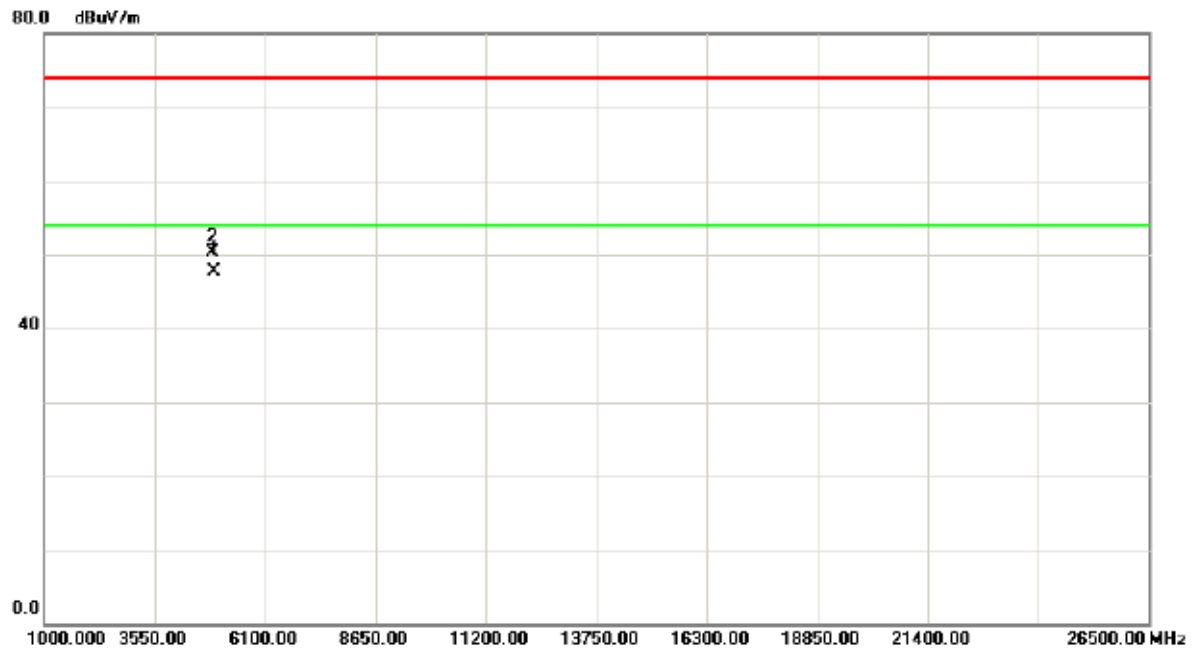


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4904.010	43.87	3.77	47.64	54.00	-6.36	AVG	
2		4904.030	46.56	3.77	50.33	74.00	-23.67	peak	

ATTACHMENT E - BANDWIDTH

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.11	15.28	500	Complies
2437	10.10	15.32	500	Complies
2462	10.11	15.24	500	Complies

TX CH01

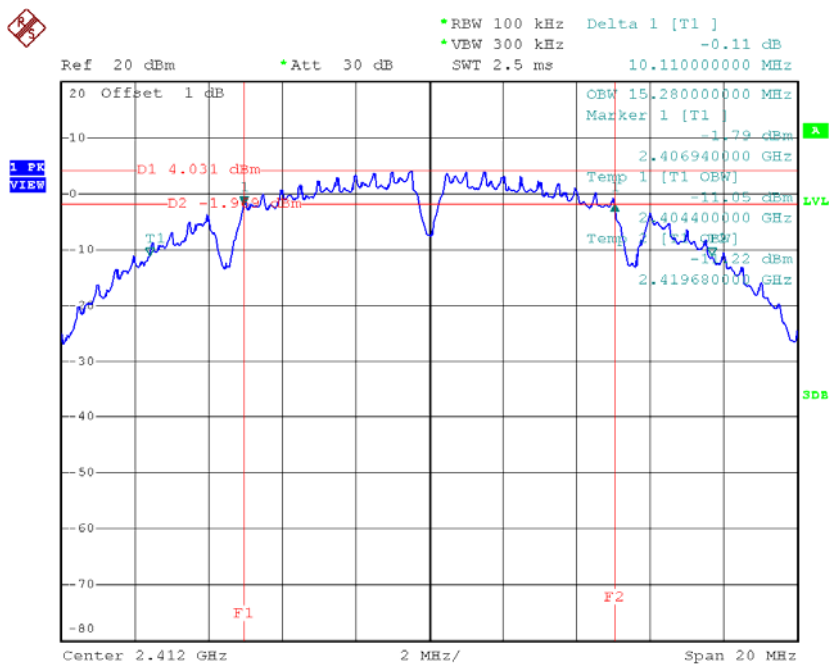


Date: 1.JUL.2015 09:06:00

TX CH06

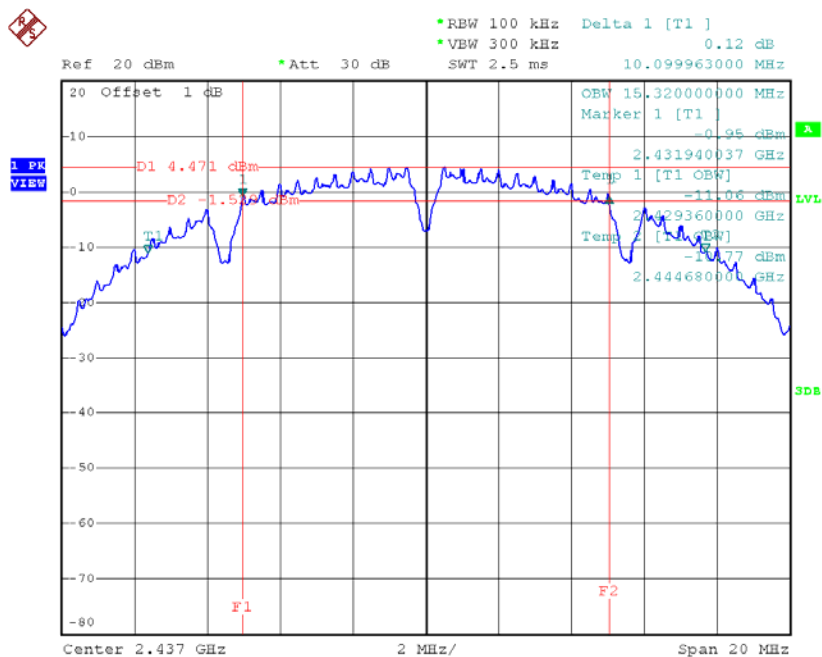

Date: 1.JUL.2015 09:07:43

TX CH11

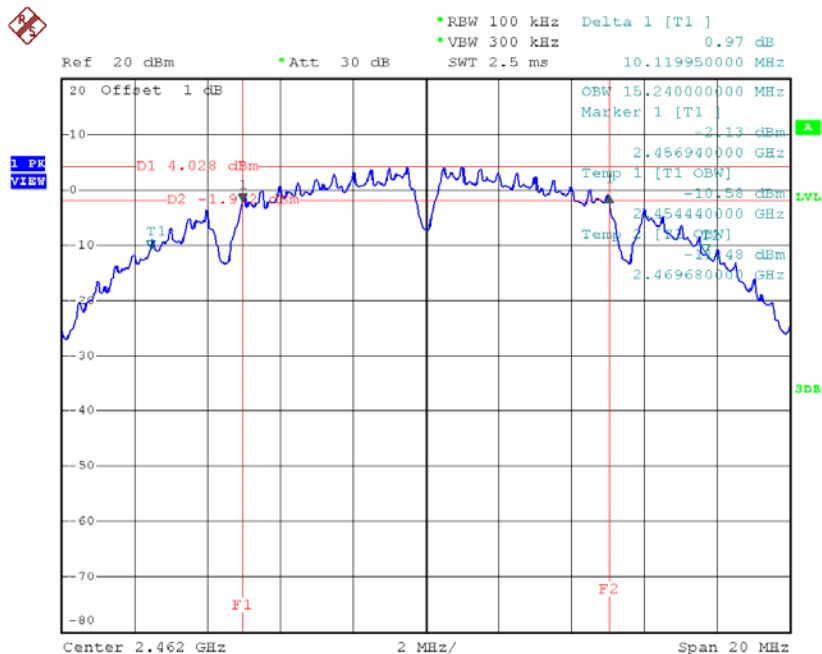


Date: 1.JUL.2015 09:08:57

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.65	16.48	500	Complies
2437	16.61	16.48	500	Complies
2462	16.66	16.48	500	Complies

TX CH01

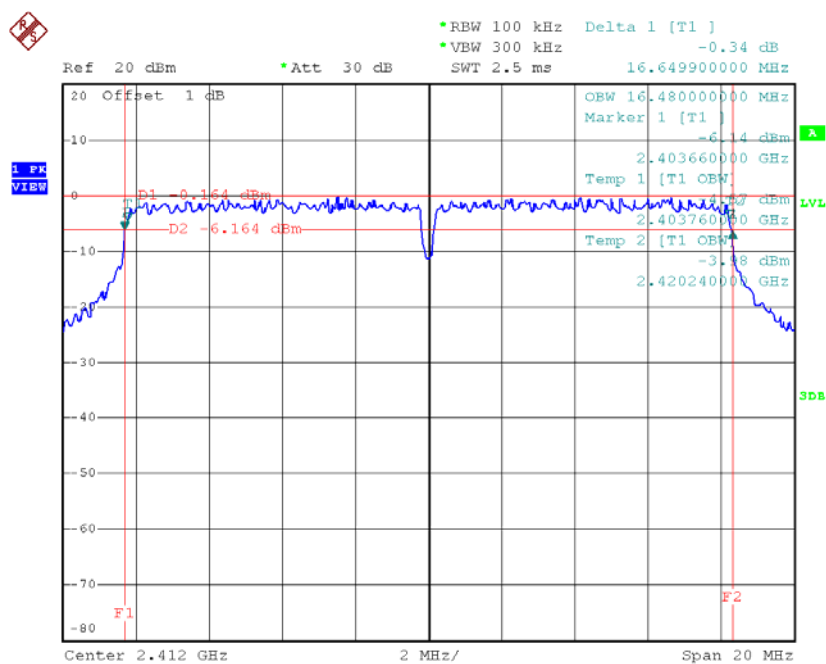


Date: 1.JUL.2015 09:10:35

TX CH06

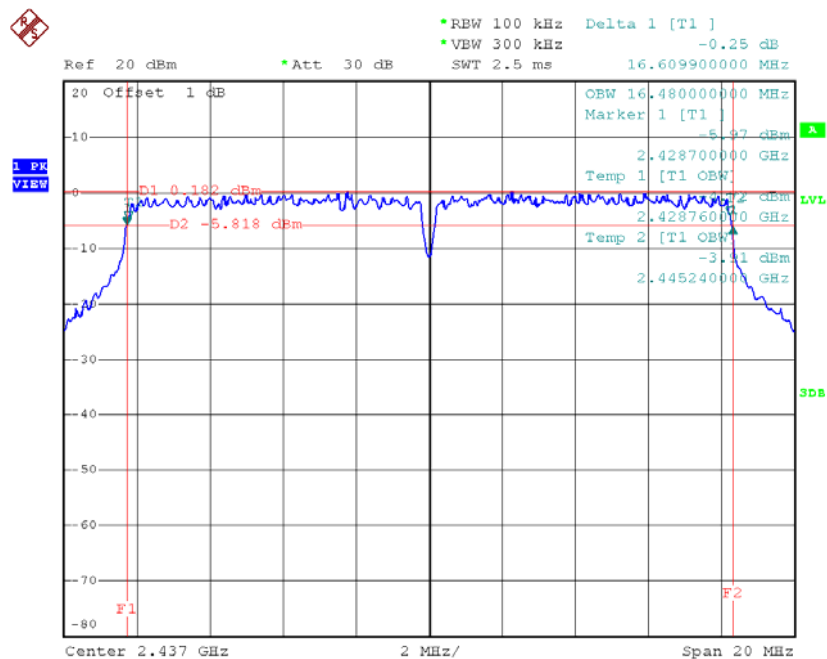

Date: 1.JUL.2015 09:11:36

TX CH11

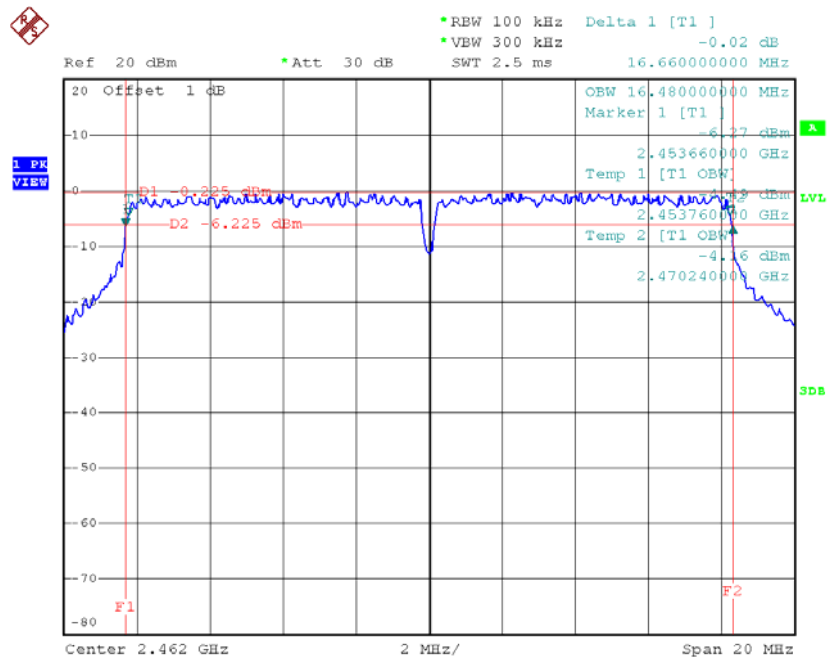


Date: 1.JUL.2015 09:12:31

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.90	17.72	500	Complies
2437	17.86	17.72	500	Complies
2462	17.88	17.72	500	Complies

TX CH01

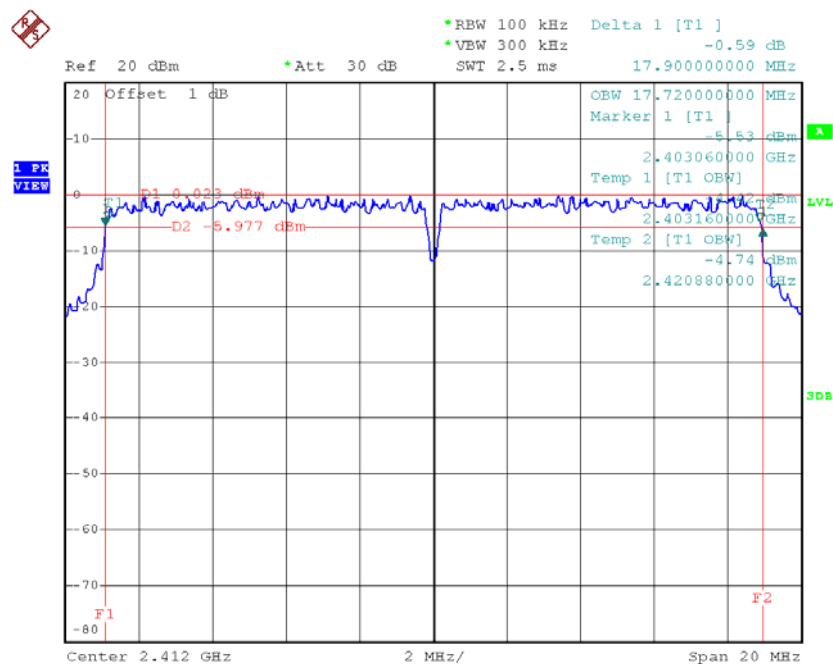


Date: 1.JUL.2015 09:15:32

TX CH06

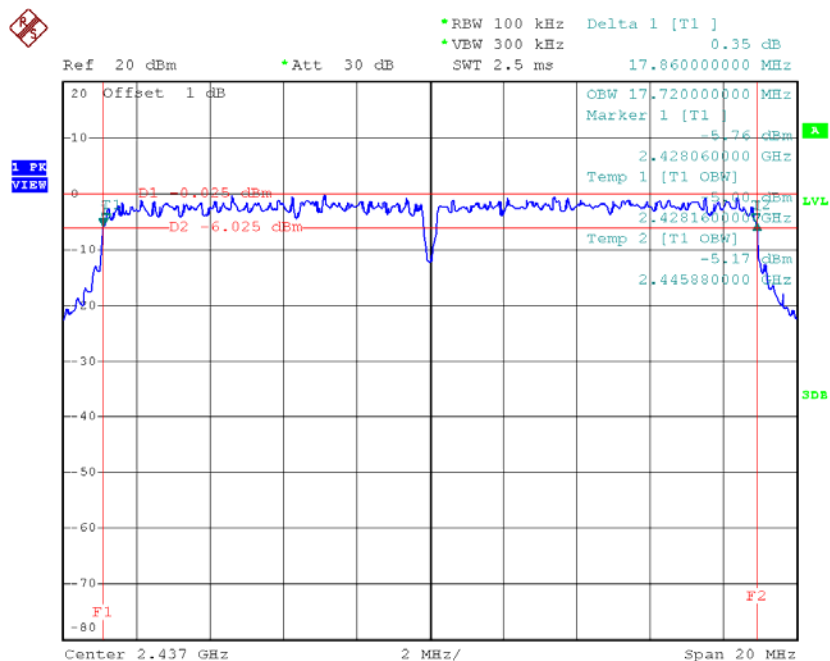

Date: 1.JUL.2015 09:16:32

TX CH11

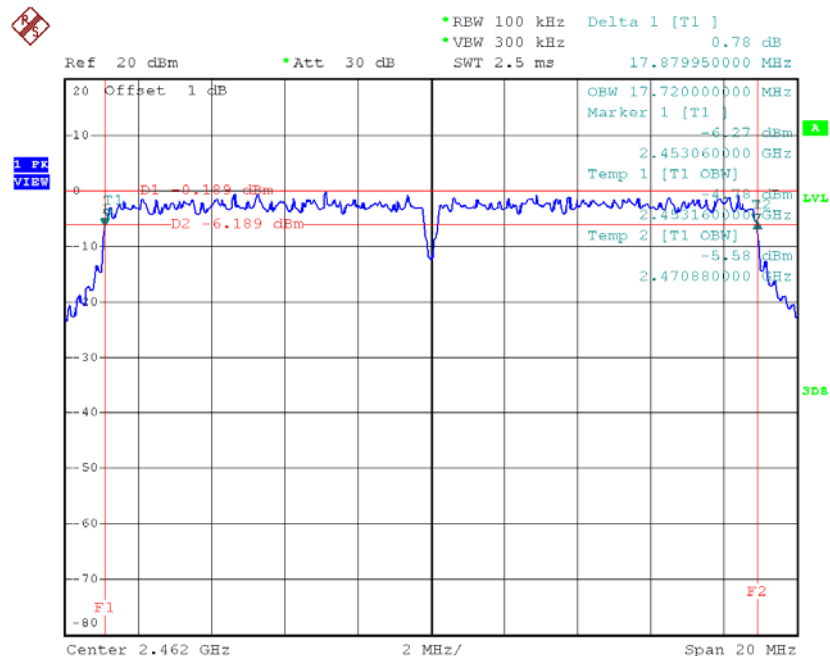


Date: 1.JUL.2015 09:17:22

Test Mode : TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.44	35.92	500	Complies
2437	35.56	36.08	500	Complies
2452	36.49	36.00	500	Complies

TX CH03

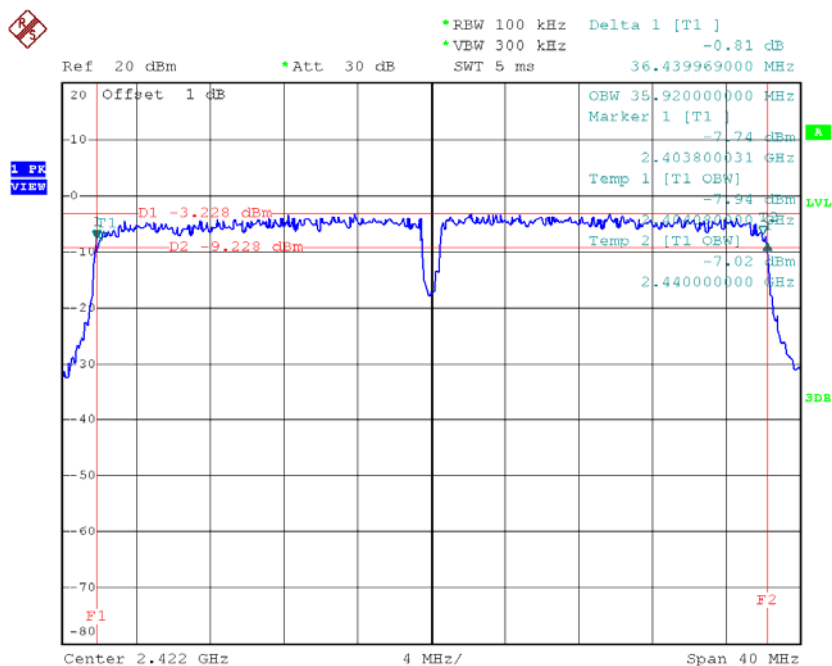


Date: 1.JUL.2015 09:19:18

TX CH06

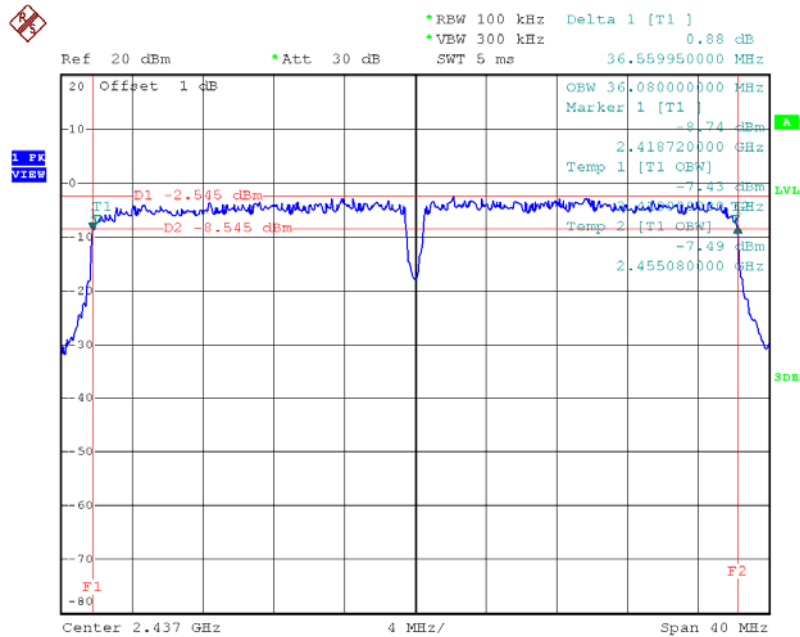

Date: 1.JUL.2015 09:20:31

TX CH09

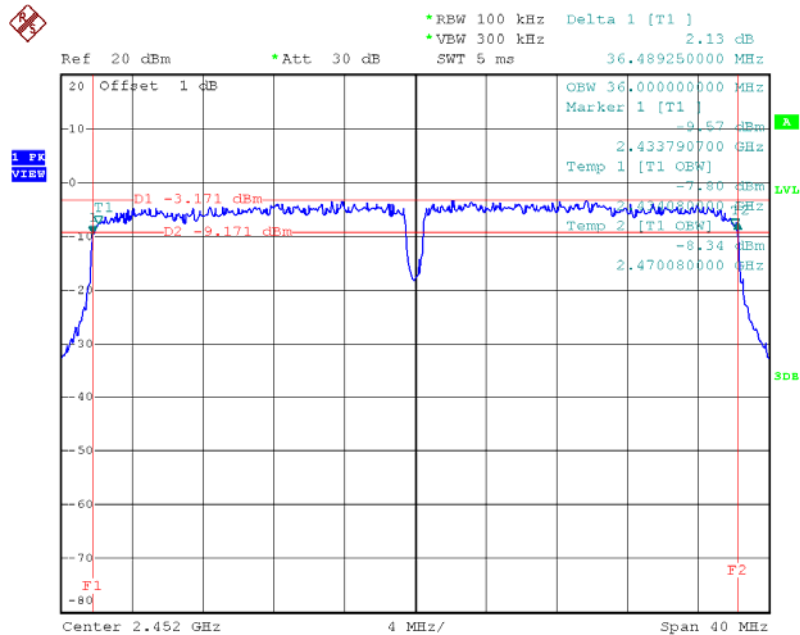

Date: 1.JUL.2015 09:21:35

ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

Test Mode :TX B Mode_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	16.27	0.0424	30.00	1.00	Complies
2437	16.93	0.0493	30.00	1.00	Complies
2462	16.67	0.0465	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	22.66	0.1845	30.00	1.00	Complies
2437	23.09	0.2037	30.00	1.00	Complies
2462	22.85	0.1928	30.00	1.00	Complies

Test Mode :TX N-20M Mode_CH01/06/11

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	22.64	0.1837	30.00	1.00	Complies
2437	22.45	0.1758	30.00	1.00	Complies
2462	22.03	0.1596	30.00	1.00	Complies


Test Mode :TX N-40M Mode_CH03/06/09

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	22.59	0.1816	30.00	1.00	Complies
2437	22.86	0.1932	30.00	1.00	Complies
2452	22.42	0.1746	30.00	1.00	Complies

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode :	TX B Mode
--------------------	------------------

TX B mode CH01

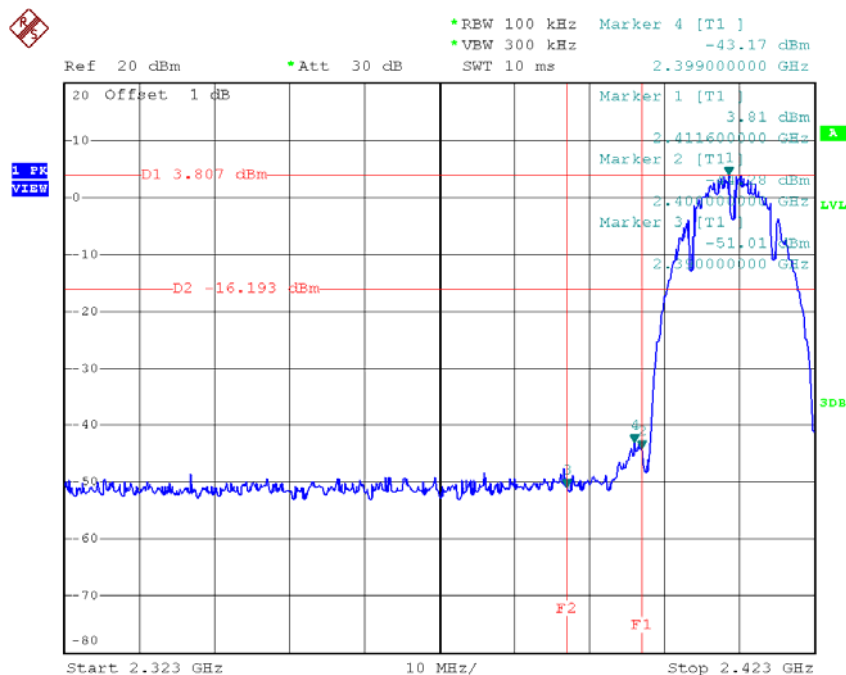


Date: 1.JUL.2015 09:06:22

TX B mode CH11

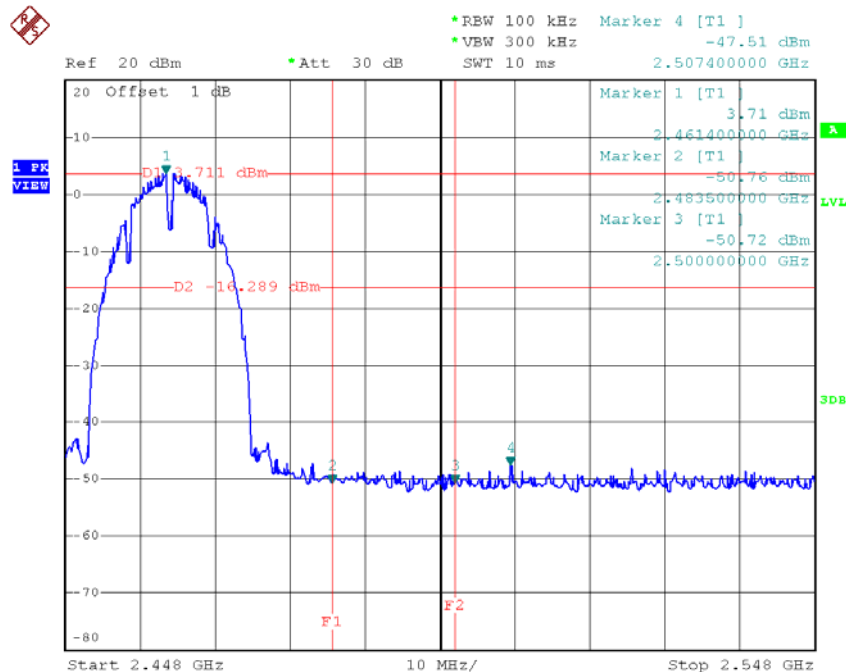


Date: 1.JUL.2015 09:09:19

TX B mode CH01 (10 Harmonic of the frequency)

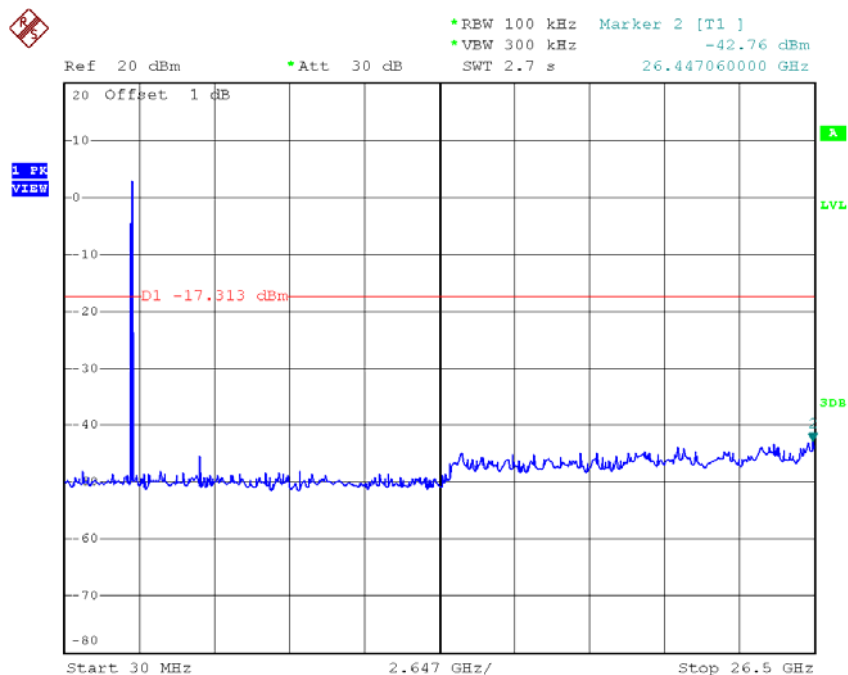


Date: 1.JUL.2015 09:06:14

TX B mode CH06 (10 Harmonic of the frequency)

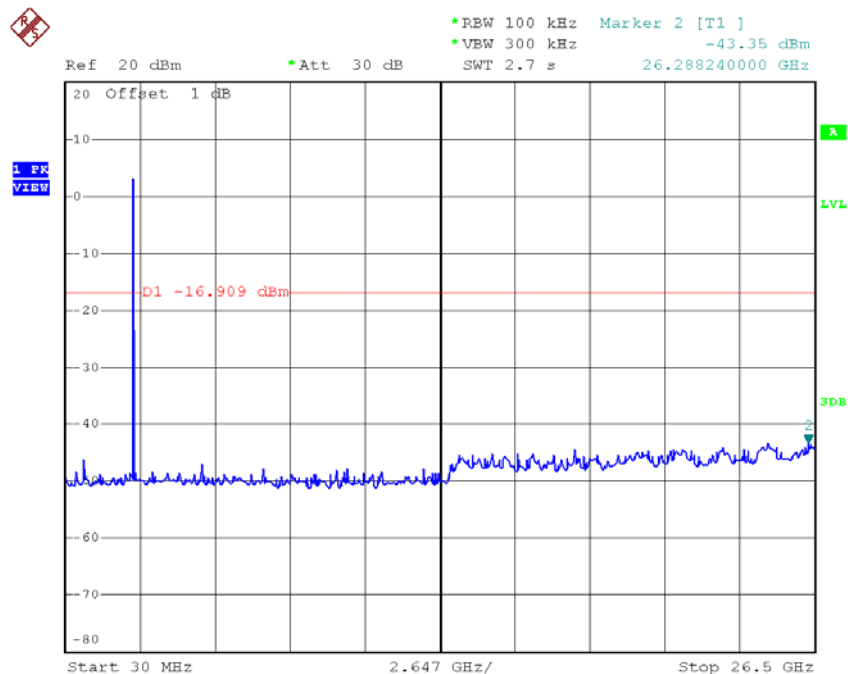

Date: 1.JUL.2015 09:07:57


TX B mode CH11 (10 Harmonic of the frequency)

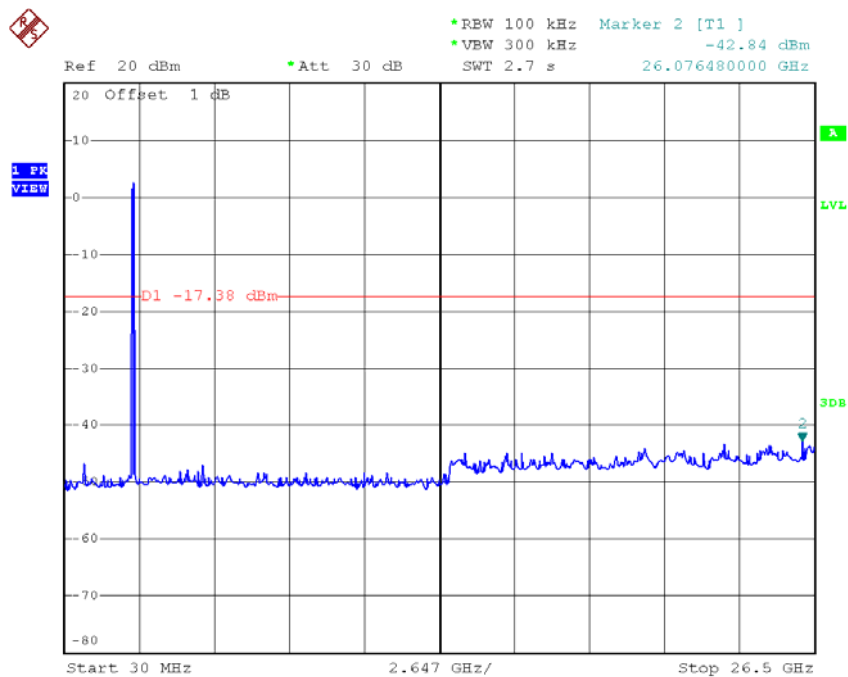

Date: 1.JUL.2015 09:09:11


Test Mode :	TX G Mode
--------------------	------------------

TX G mode CH01

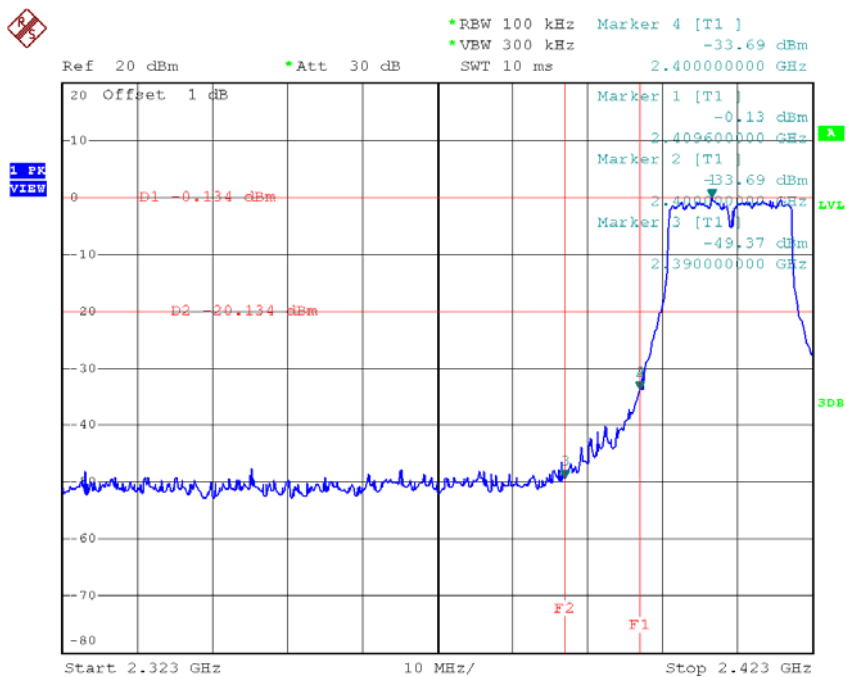


Date: 1.JUL.2015 09:10:56

TX G mode CH11

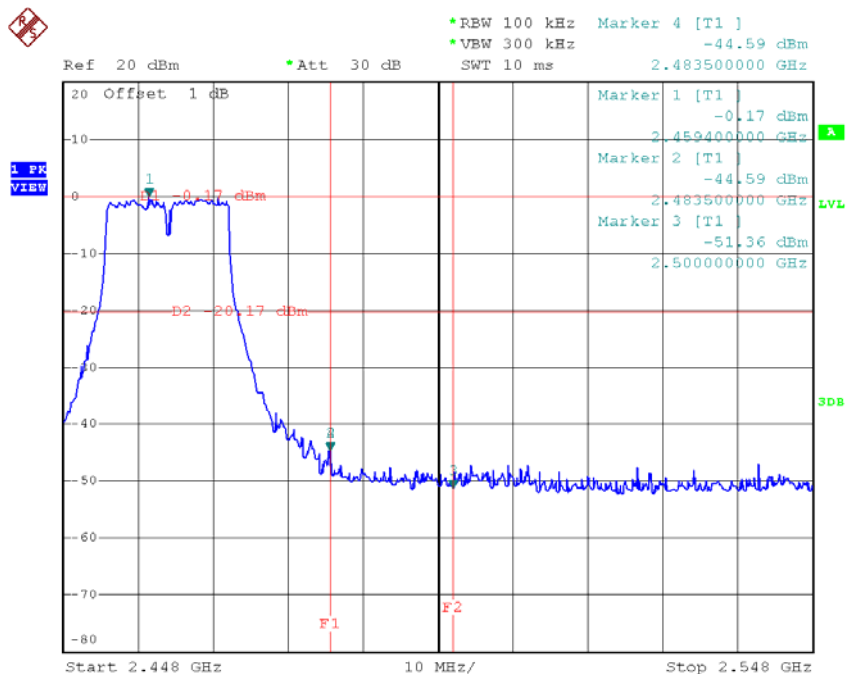


Date: 1.JUL.2015 09:12:53

TX G mode CH01 (10 Harmonic of the frequency)

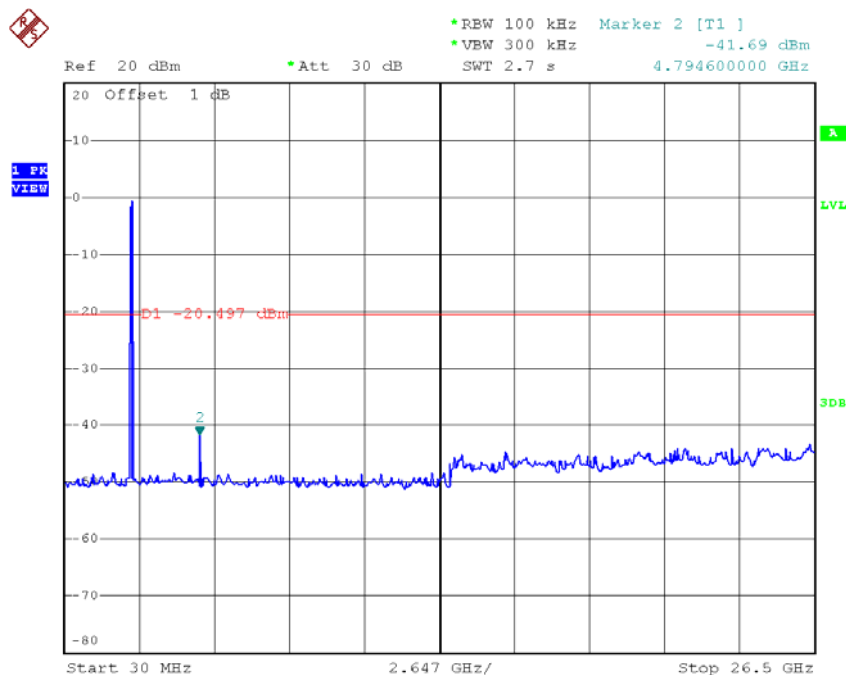


Date: 1.JUL.2015 09:10:49

TX G mode CH06 (10 Harmonic of the frequency)

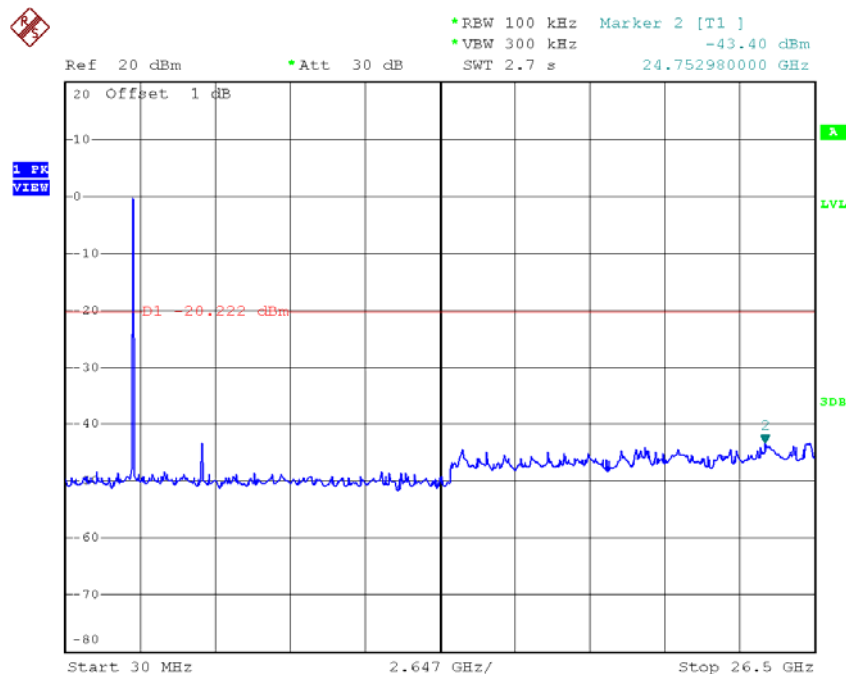

Date: 1.JUL.2015 09:11:49


TX G mode CH11 (10 Harmonic of the frequency)

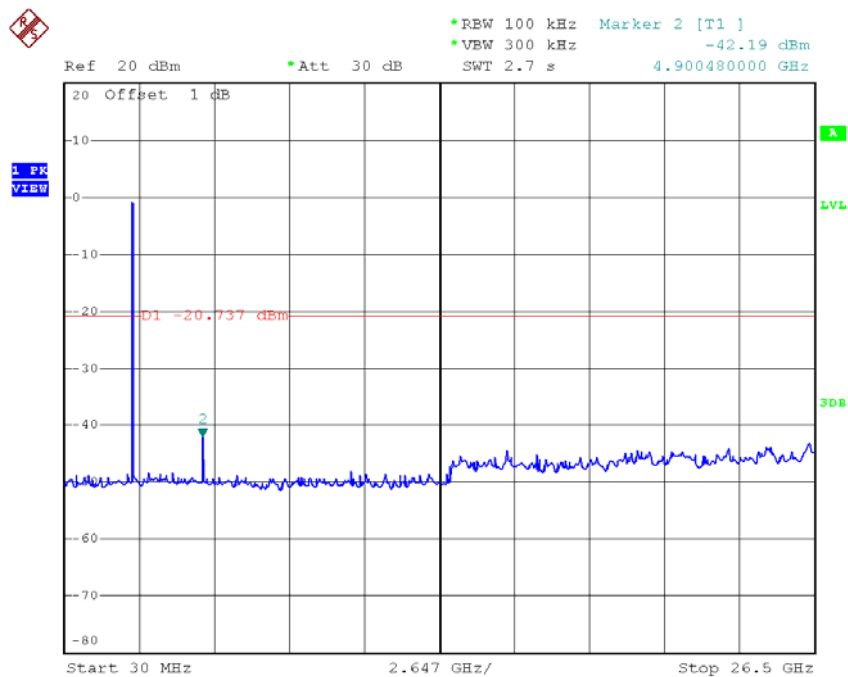

Date: 1.JUL.2015 09:12:45


Test Mode :	TX N-20M Mode
--------------------	----------------------

TX HT20 mode CH01

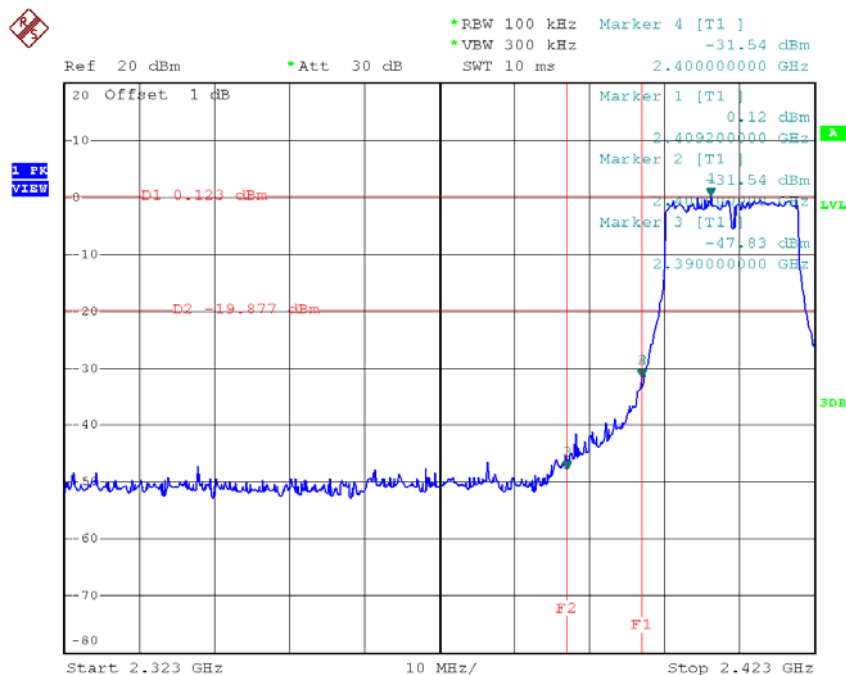


Date: 1.JUL.2015 09:15:54

TX HT20 mode CH11

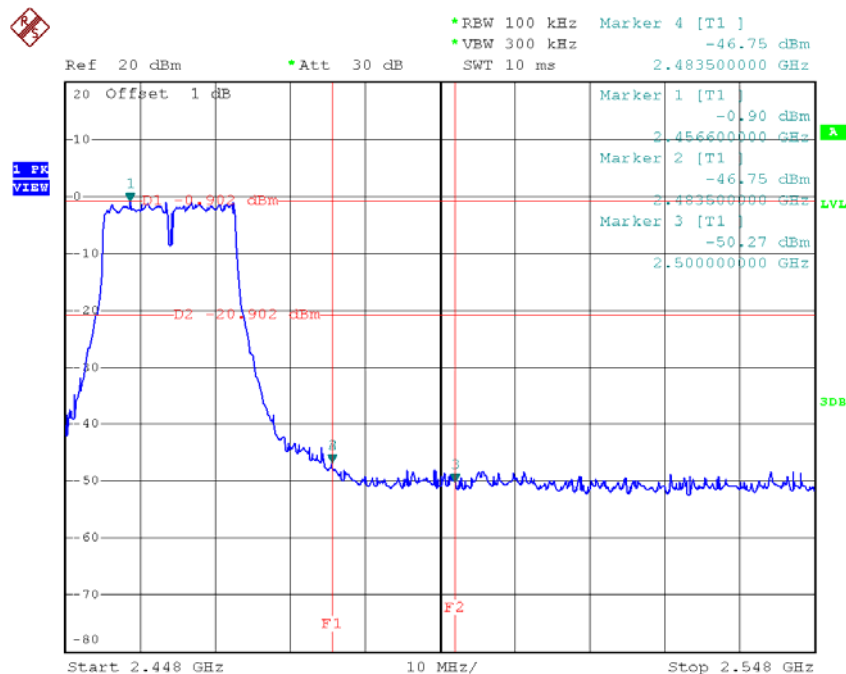


Date: 1.JUL.2015 09:17:44

TX HT20 mode CH01 (10 Harmonic of the frequency)

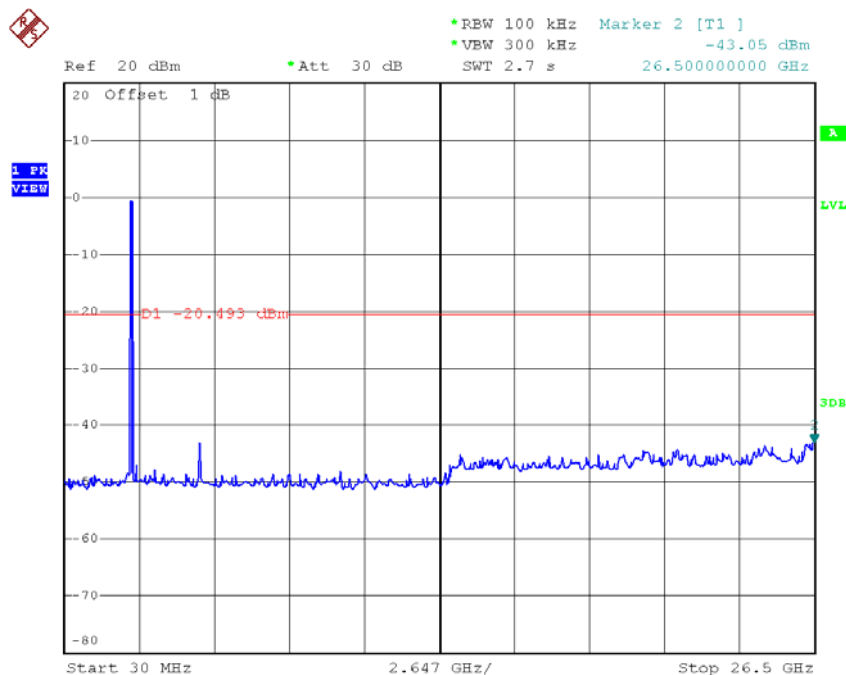


Date: 1.JUL.2015 09:15:46

TX HT20 mode CH06 (10 Harmonic of the frequency)

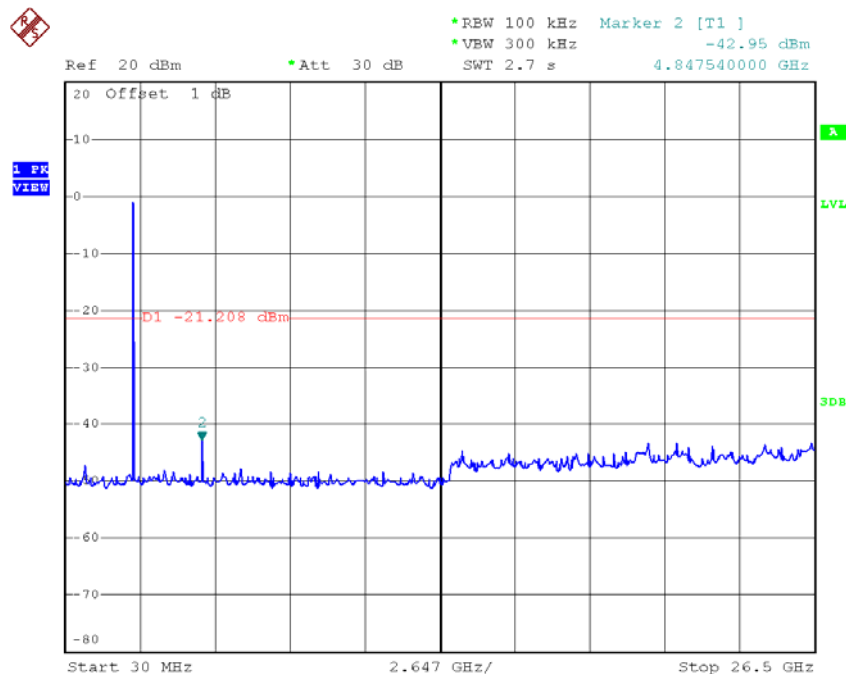

Date: 1.JUL.2015 09:16:45


TX HT20 mode CH11 (10 Harmonic of the frequency)

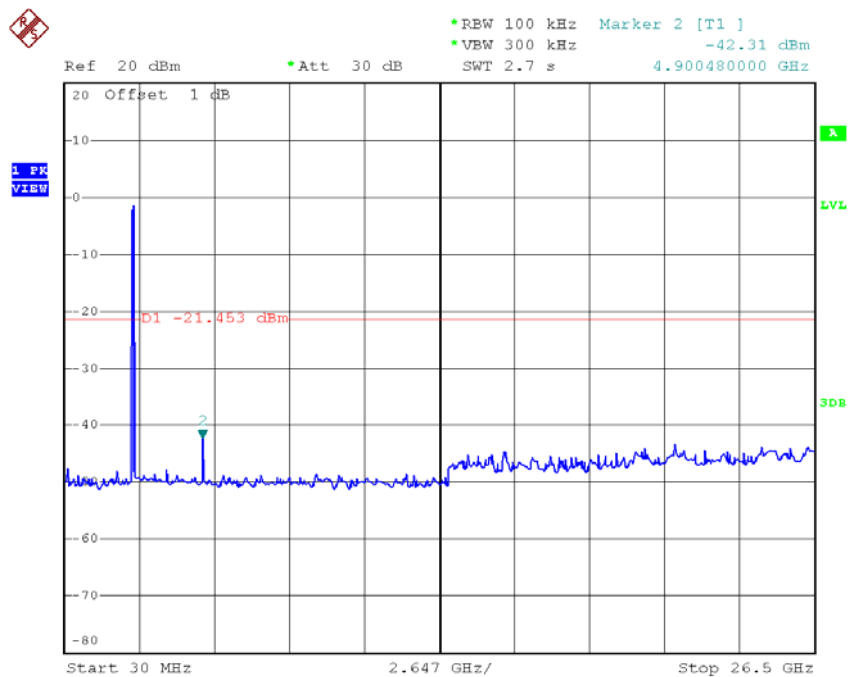

Date: 1.JUL.2015 09:17:36


Test Mode :	TX N-40M Mode
--------------------	----------------------

TX HT40 mode CH03

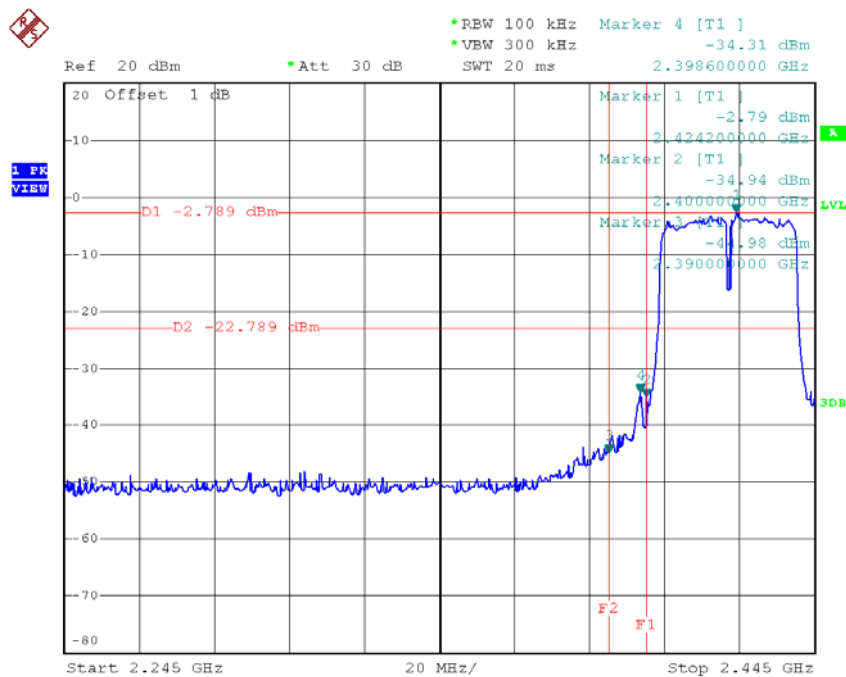


Date: 1.JUL.2015 09:19:40

TX HT40 mode CH09

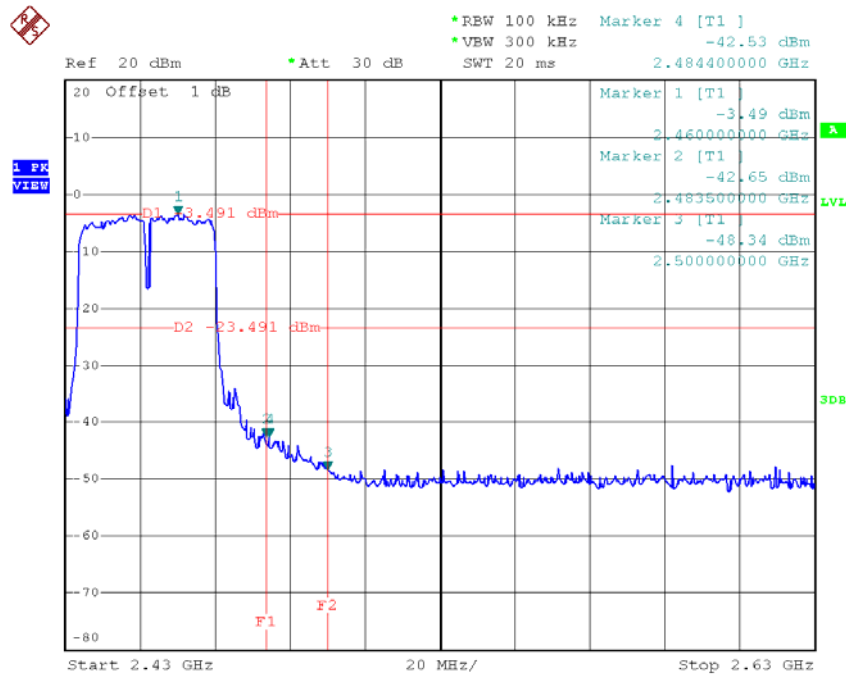


Date: 1.JUL.2015 09:21:57

TX HT40 mode CH03 (10 Harmonic of the frequency)

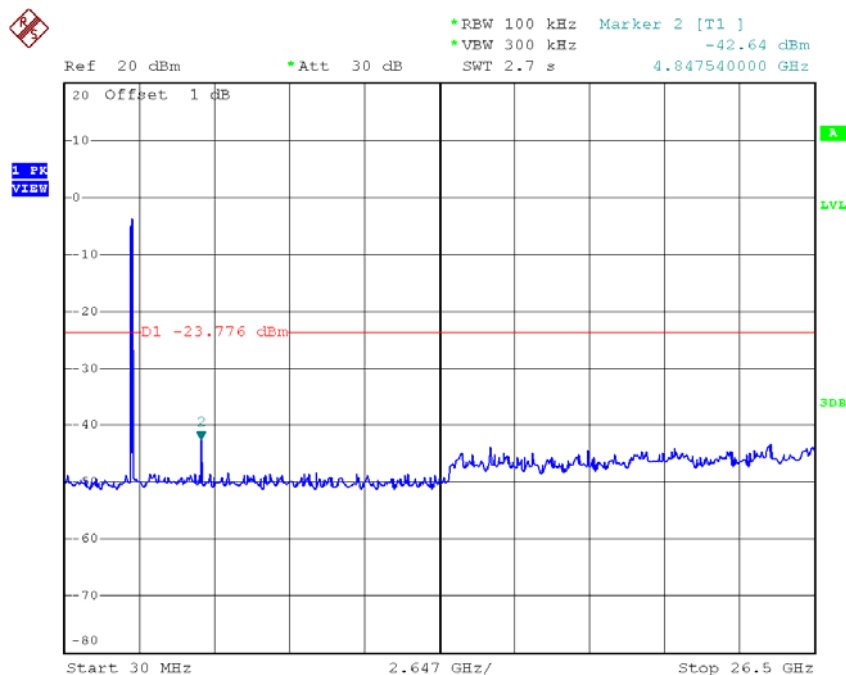


Date: 1.JUL.2015 09:19:33

TX HT40 mode CH06 (10 Harmonic of the frequency)

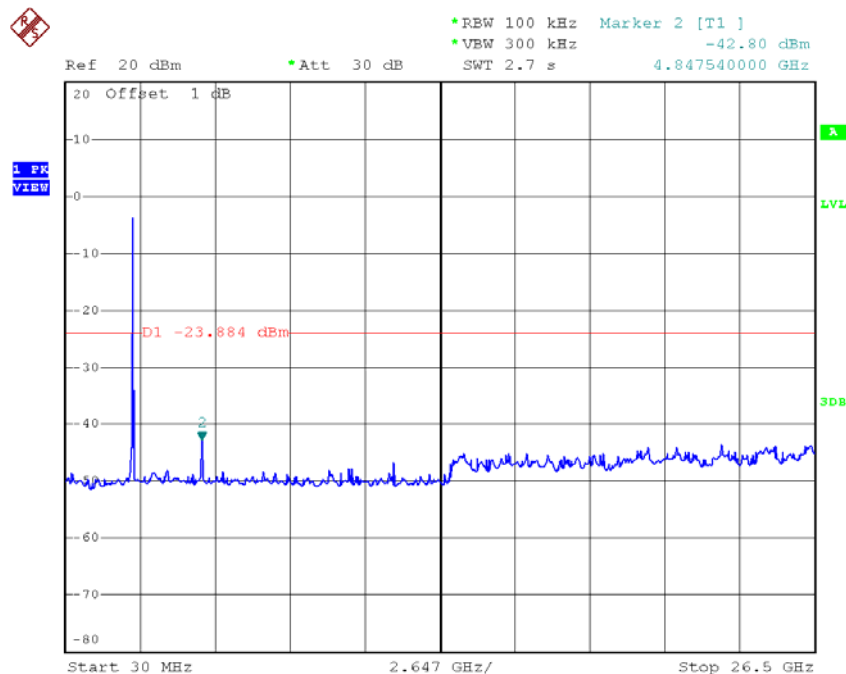

Date: 1.JUL.2015 09:20:45

TX HT40 mode CH09 (10 Harmonic of the frequency)

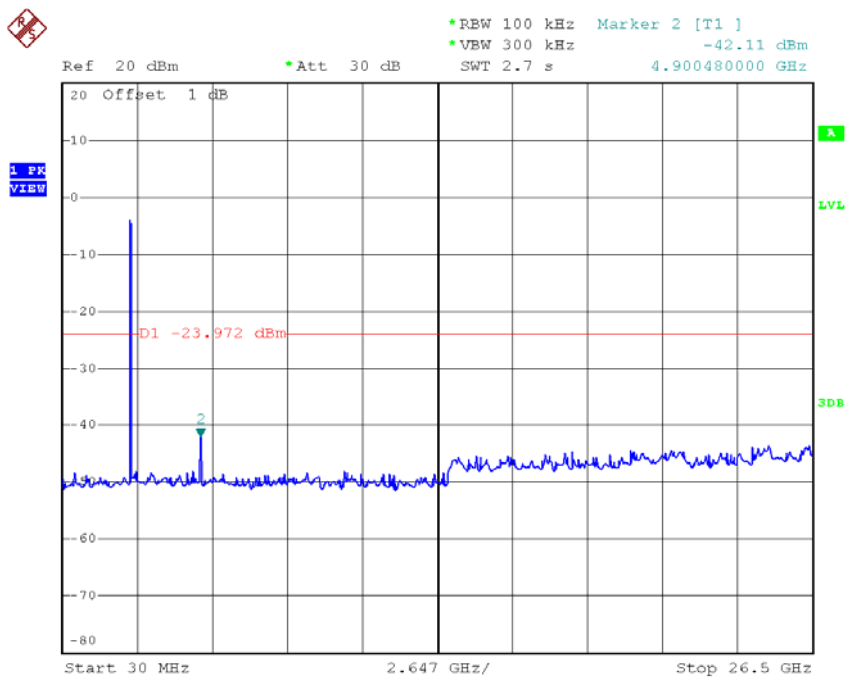


Date: 1.JUL.2015 09:21:49

ATTACHMENT H - POWER SPECTRAL DENSITY

Test Mode :TX B Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-16.20	8	8.00	Complies
2437	-15.81	8	8.00	Complies
2462	-16.29	8	8.00	Complies

TX CH01

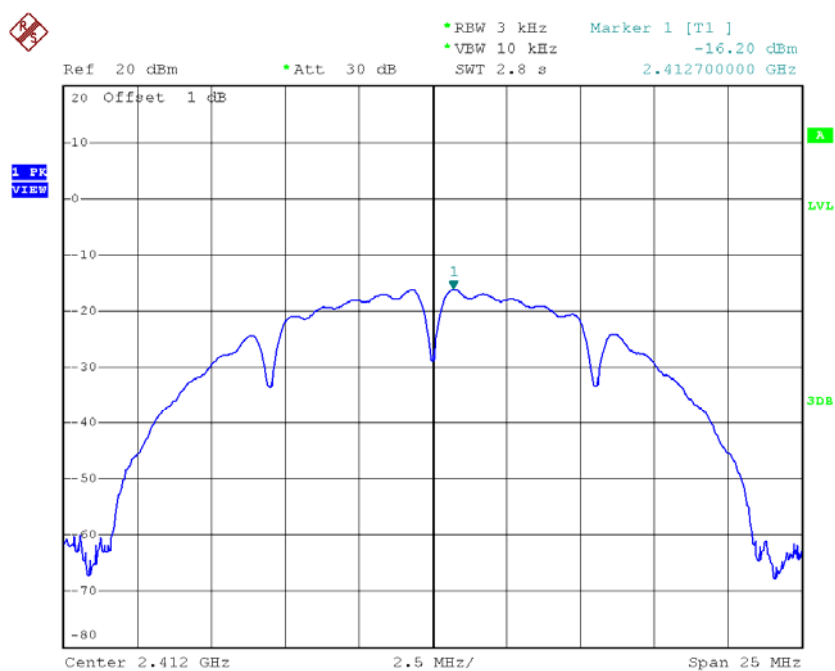


Date: 1.JUL.2015 09:06:31

TX CH06

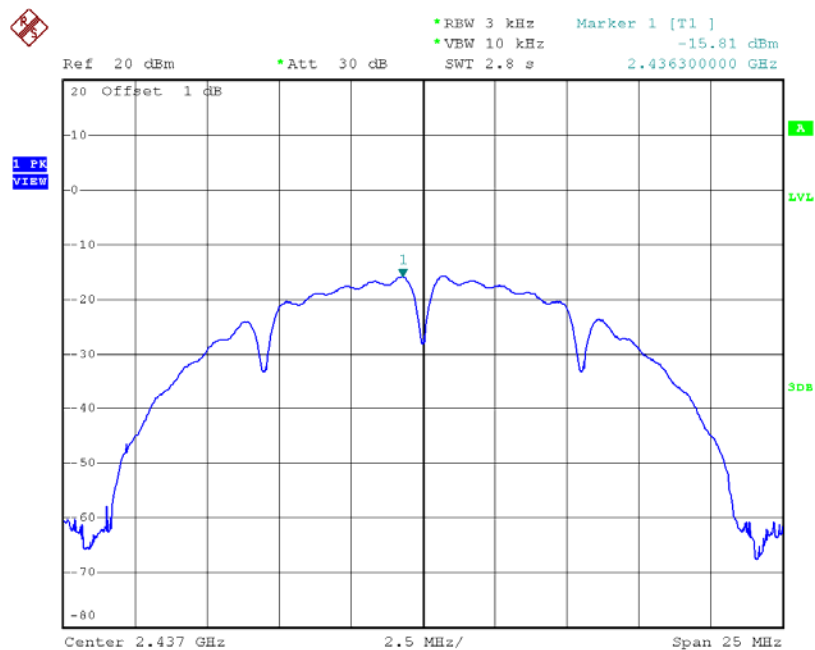

Date: 1.JUL.2015 09:08:07

TX CH11

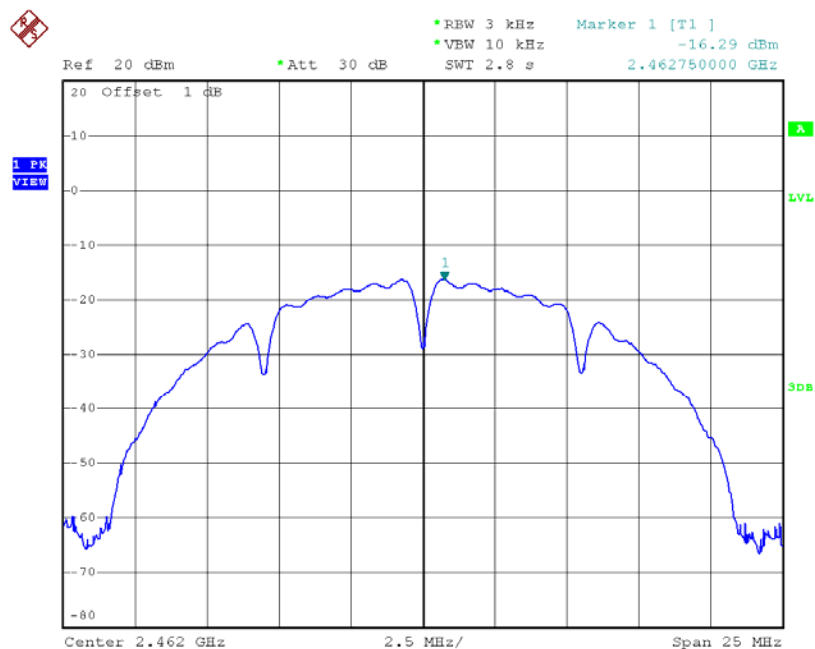


Date: 1.JUL.2015 09:09:28

Test Mode :TX G Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-14.75	8	8.00	Complies
2437	-14.14	8	8.00	Complies
2462	-14.64	8	8.00	Complies

TX CH01

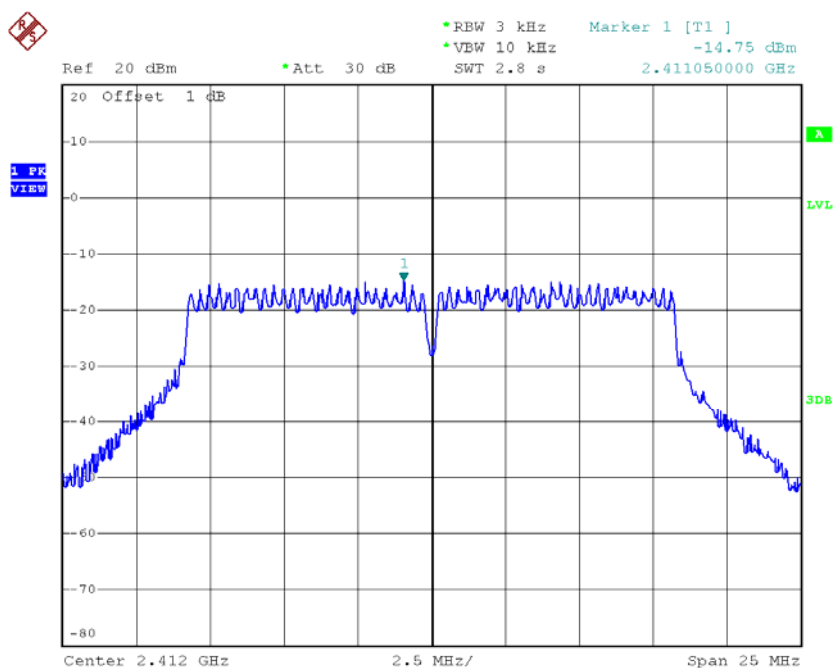


Date: 1.JUL.2015 09:11:06

TX CH06

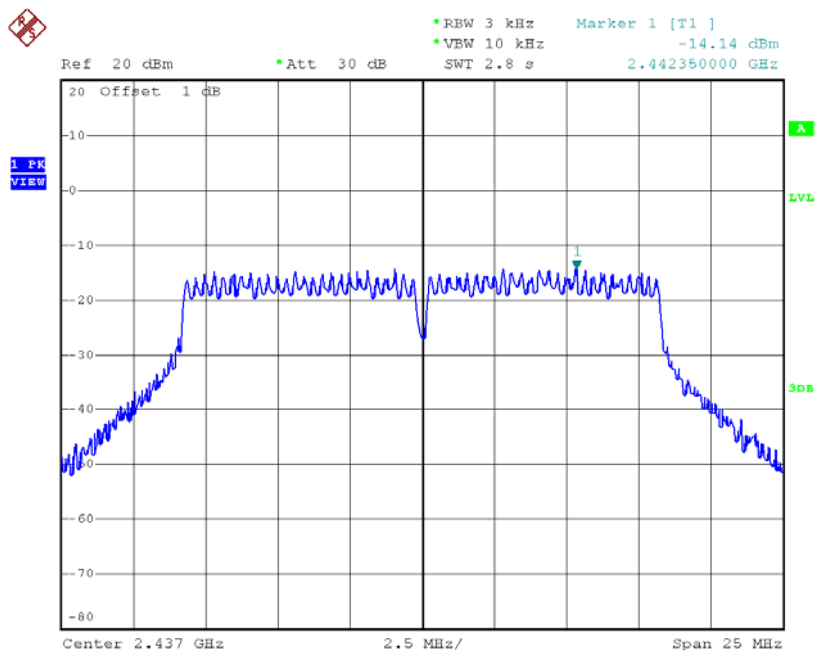

Date: 1.JUL.2015 09:11:59

TX CH11

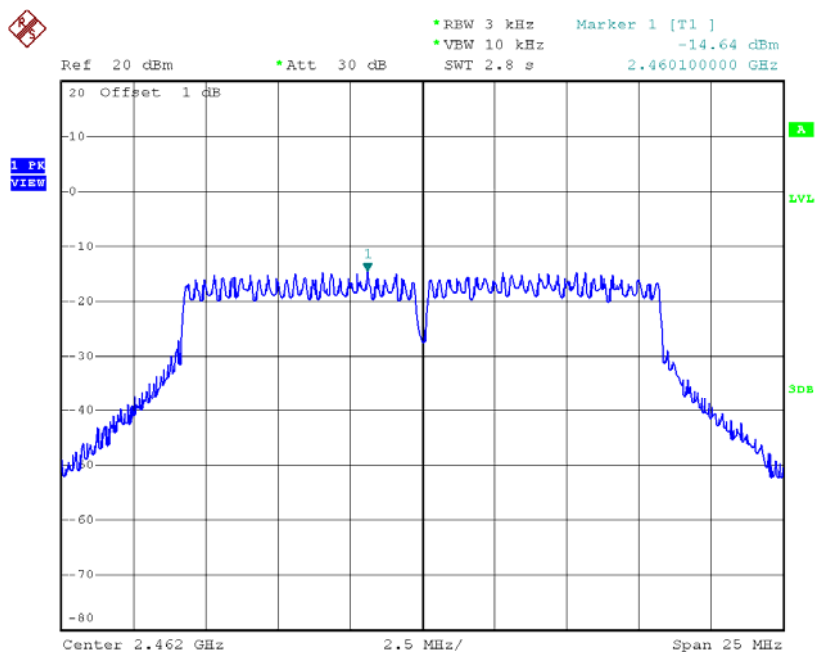


Date: 1.JUL.2015 09:13:02

Test Mode : TX N-20M Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-13.42	8	8.00	Complies
2437	-14.20	8	8.00	Complies
2462	-14.72	8	8.00	Complies

TX CH01

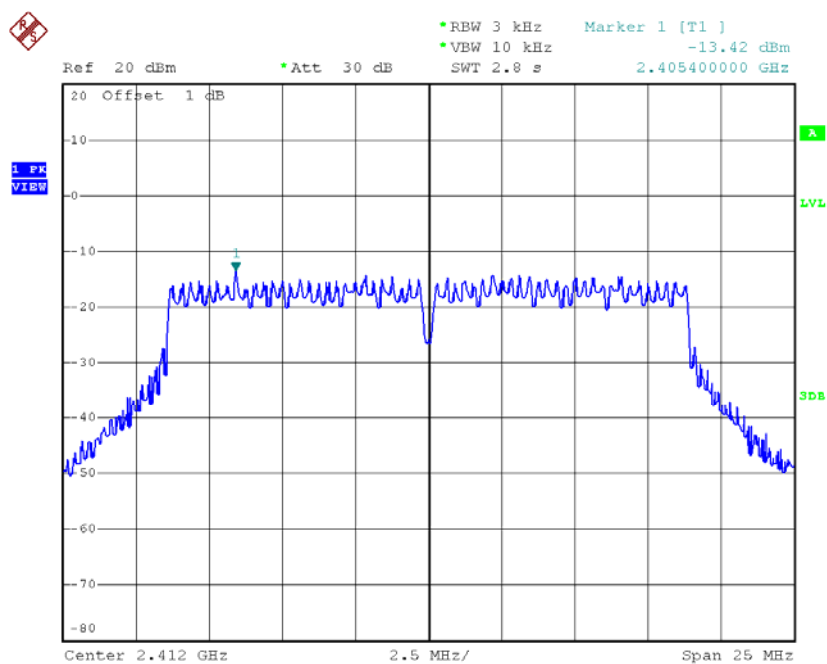


Date: 1.JUL.2015 09:16:03

TX CH06

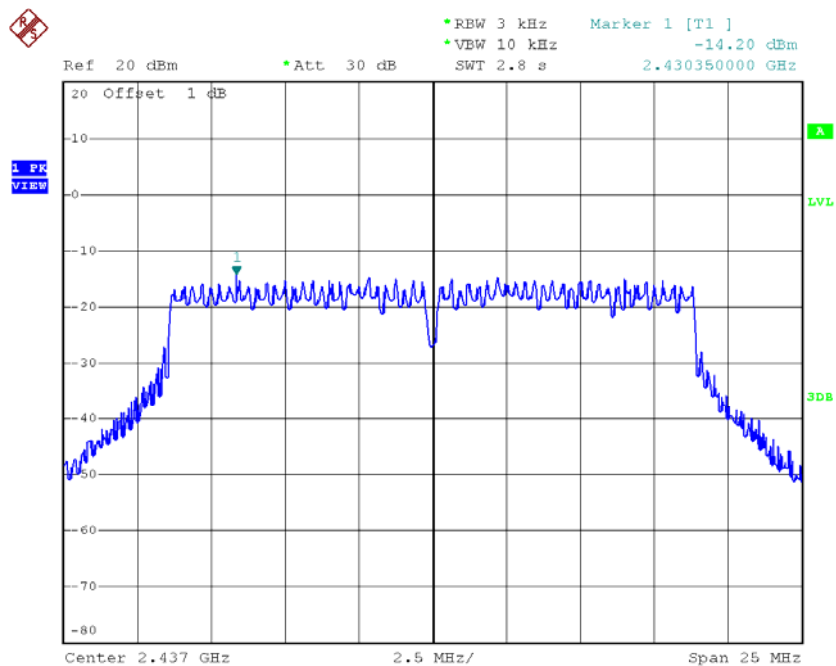

Date: 1.JUL.2015 09:16:55

TX CH11

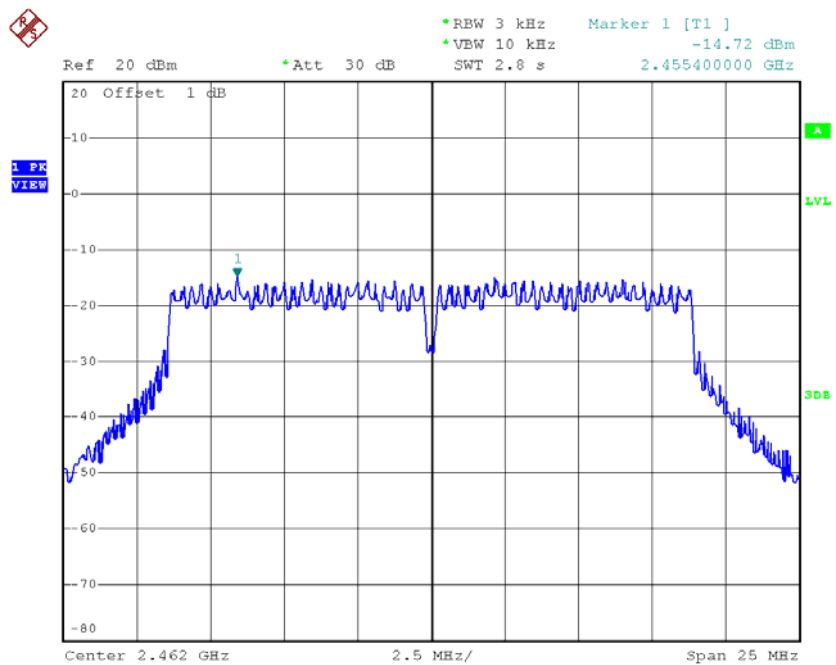


Date: 1.JUL.2015 09:17:53

Test Mode : TX N-40M Mode_CH03/06/09


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-15.72	8	8.00	Complies
2437	-14.55	8	8.00	Complies
2452	-16.18	8	8.00	Complies

TX CH03

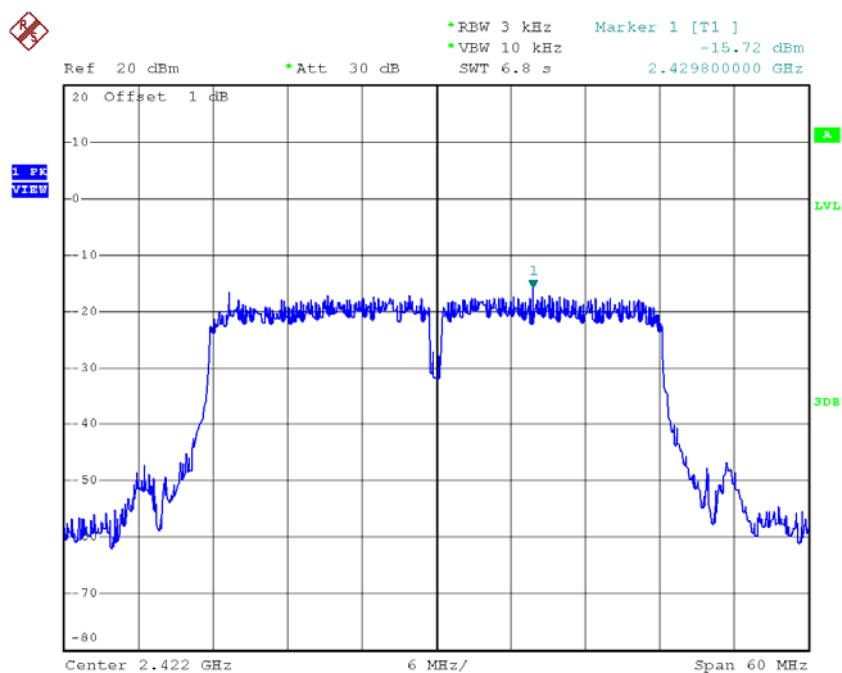


Date: 1.JUL.2015 09:19:52

TX CH06

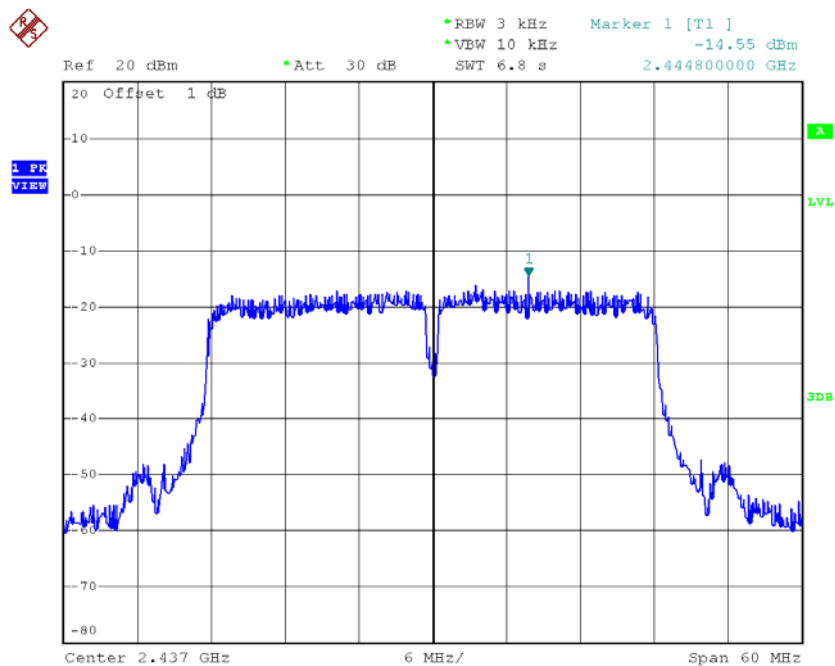

Date: 1.JUL.2015 09:20:57

TX CH09

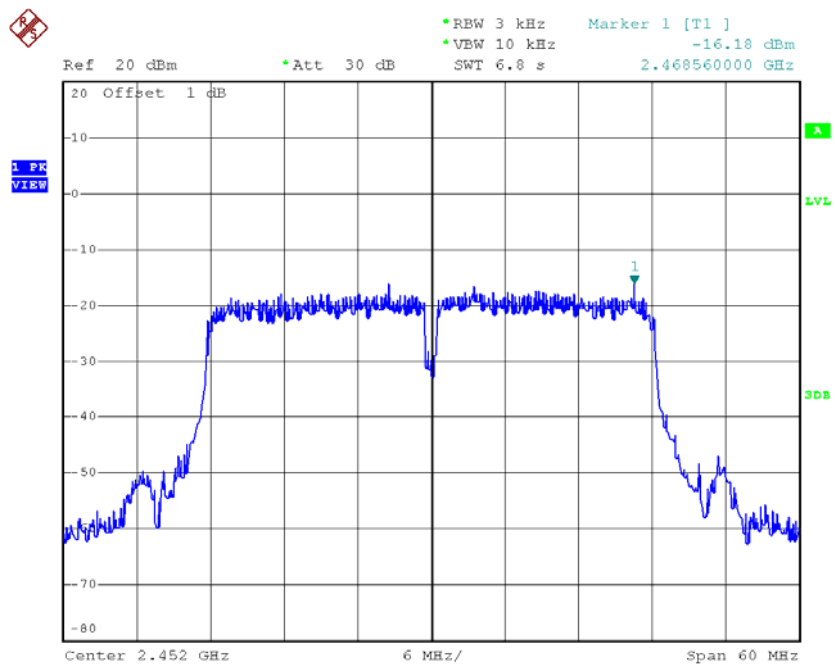

Date: 1.JUL.2015 09:22:09